



Attachment 2 – SAR Test Plots

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Cheek/Touch 661ch (1880.00MHz)**DUT: UMTS / GSM 900/1800/1900 GPRS Phone / Bluetooth Enable; Type: 550SH; Serial: 004401/11/010710/5**

Communication System: GSM 1900; Frequency: 1880 MHz;Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 39.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(5.2, 5.2, 5.2); Calibrated: 2005/12/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2005/12/08
- Phantom: SAM 1194; Type: QD 000 P40 CA; Serial: 1194
- Measurement SW: DAS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Cheek/Touch Position/Area Scan (9x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.676 mW/g


Cheek/Touch Position/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.1 V/m; Power Drift = -0.128 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.649 mW/g; SAR(10 g) = 0.393 mW/g

Maximum value of SAR (measured) = 0.697 mW/g

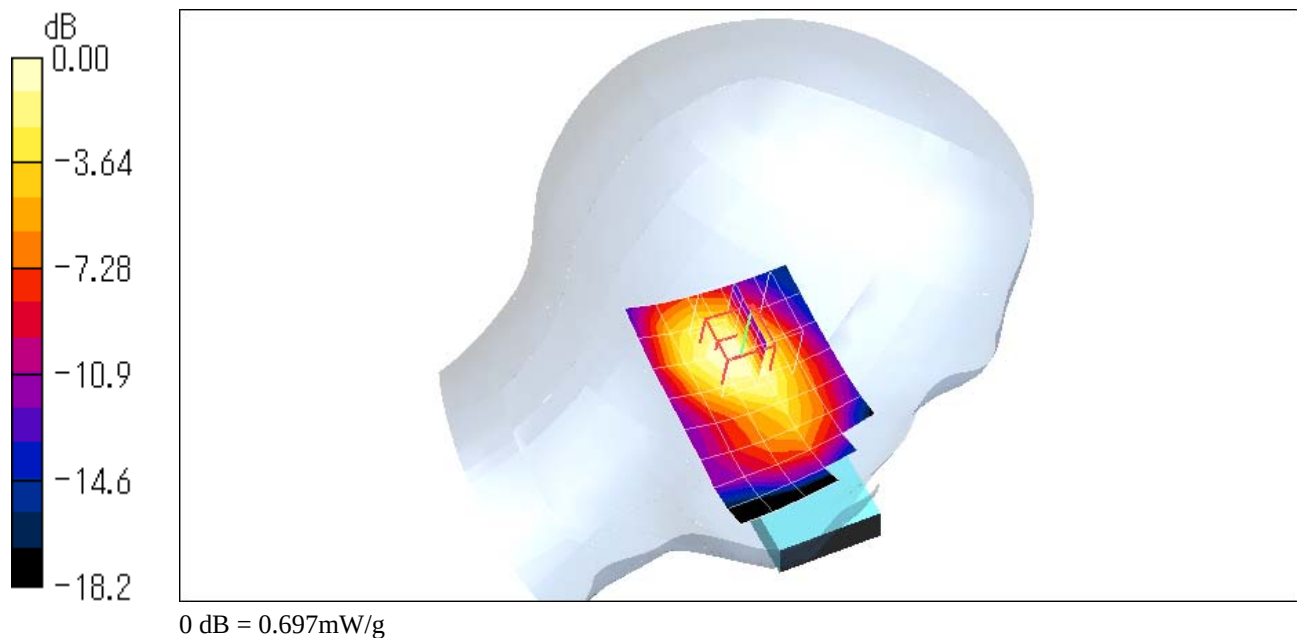

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Ear/Tilt 661ch (1880.00MHz)

DUT: UMTS / GSM 900/1800/1900 GPRS Phone / Bluetooth Enable; Type: 550SH; Serial: 004401/11/010710/5

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 39.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(5.2, 5.2, 5.2); Calibrated: 2005/12/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2005/12/08
- Phantom: SAM 1194; Type: QD 000 P40 CA; Serial: 1194
- Measurement SW: DAS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Ear/Tilt Position/Area Scan (9x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.599 mW/g


Ear/Tilt Position/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.8 V/m; Power Drift = -0.124 dB

Peak SAR (extrapolated) = 0.994 W/kg

SAR(1 g) = 0.610 mW/g; SAR(10 g) = 0.355 mW/g

Maximum value of SAR (measured) = 0.656 mW/g

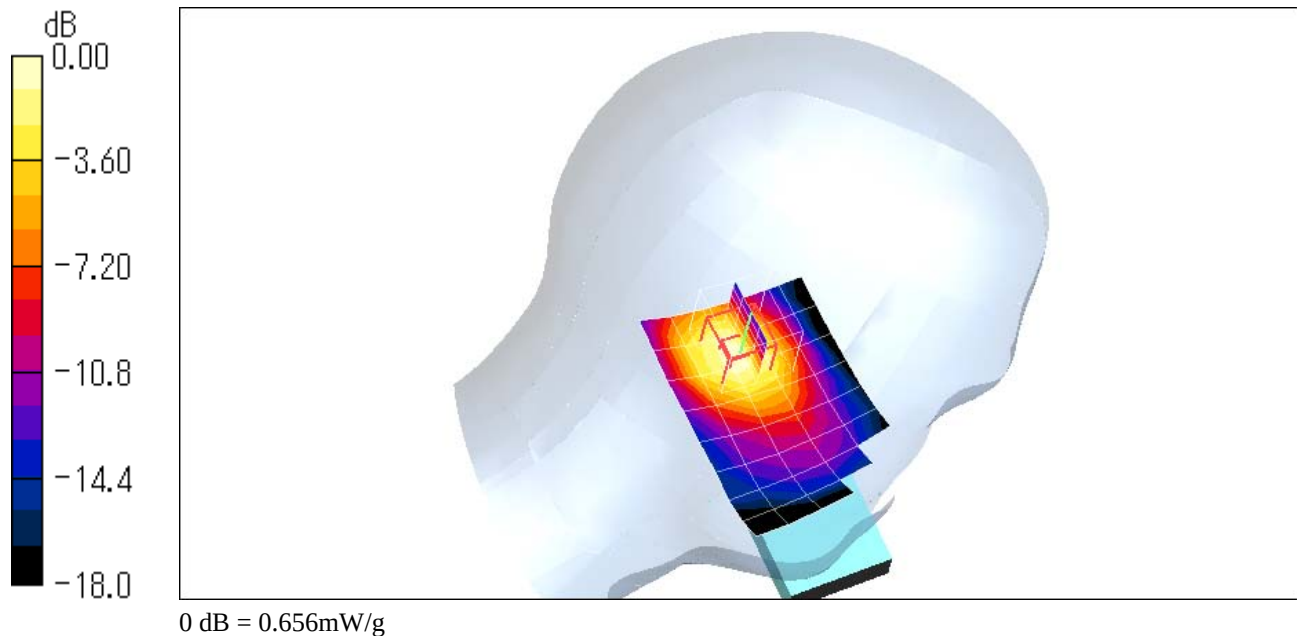

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Cheek/Touch 512ch (1850.20MHz)**DUT: UMTS / GSM 900/1800/1900 GPRS Phone / Bluetooth Enable; Type: 550SH; Serial: 004401/11/010710/5**

Communication System: GSM 1900; Frequency: 1850.2 MHz;Duty Cycle: 1:8.3


Medium: HSL1900 Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.44 \text{ mho/m}$; $\epsilon_r = 39.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASy4 (High Precision Assessment)

DASy4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(5.2, 5.2, 5.2); Calibrated: 2005/12/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2005/12/08
- Phantom: SAM 1194; Type: QD 000 P40 CA; Serial: 1194
- Measurement SW: DASy4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

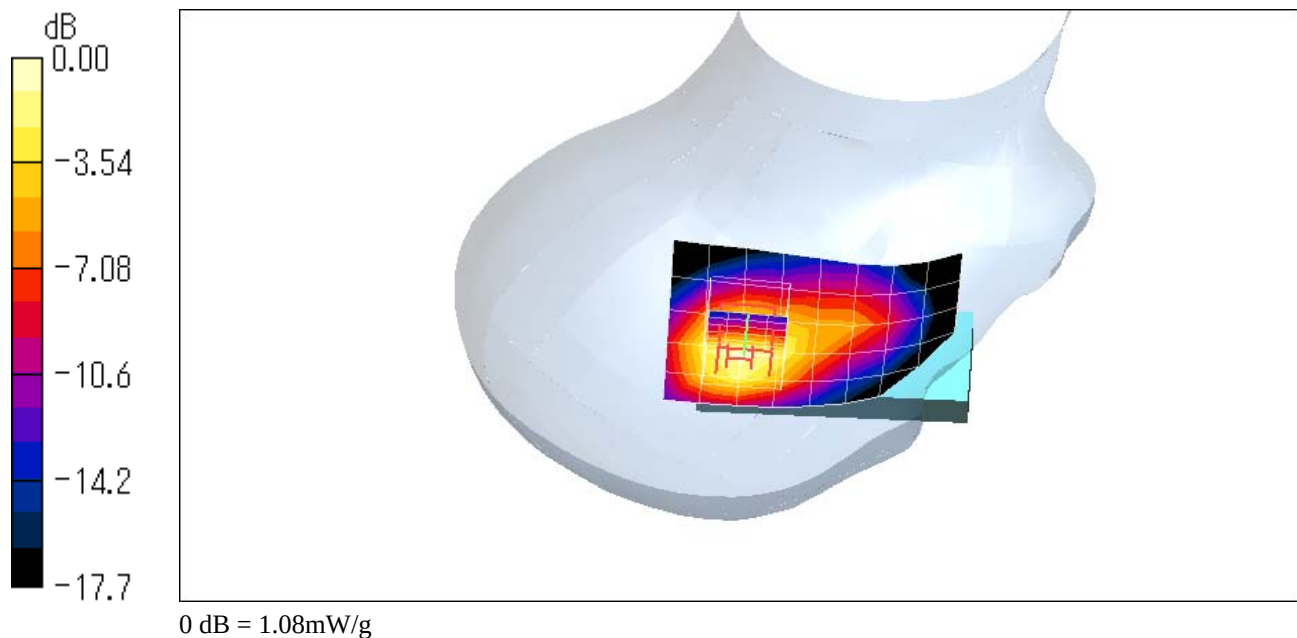Cheek/Touch Position/Area Scan (9x6x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 1.02 mW/g **Cheek/Touch Position/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 21.0 V/m ; Power Drift = -0.060 dB Peak SAR (extrapolated) = 1.75 W/kg **SAR(1 g) = 0.993 mW/g ; SAR(10 g) = 0.547 mW/g** Maximum value of SAR (measured) = 1.08 mW/g 

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Cheek/Touch 661ch (1880.00MHz)

DUT: UMTS / GSM 900/1800/1900 GPRS Phone / Bluetooth Enable; Type: 550SH; Serial: 004401/11/010710/5

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.44 \text{ mho/m}$; $\epsilon_r = 39.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASy4 (High Precision Assessment)

DASy4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(5.2, 5.2, 5.2); Calibrated: 2005/12/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2005/12/08
- Phantom: SAM 1194; Type: QD 000 P40 CA; Serial: 1194
- Measurement SW: DASy4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Cheek/Touch Position/Area Scan (9x6x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.891 mW/g


Cheek/Touch Position/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.2 V/m ; Power Drift = -0.113 dB

Peak SAR (extrapolated) = 1.60 W/kg

SAR(1 g) = 0.903 mW/g ; SAR(10 g) = 0.496 mW/g

Maximum value of SAR (measured) = 1.000 mW/g

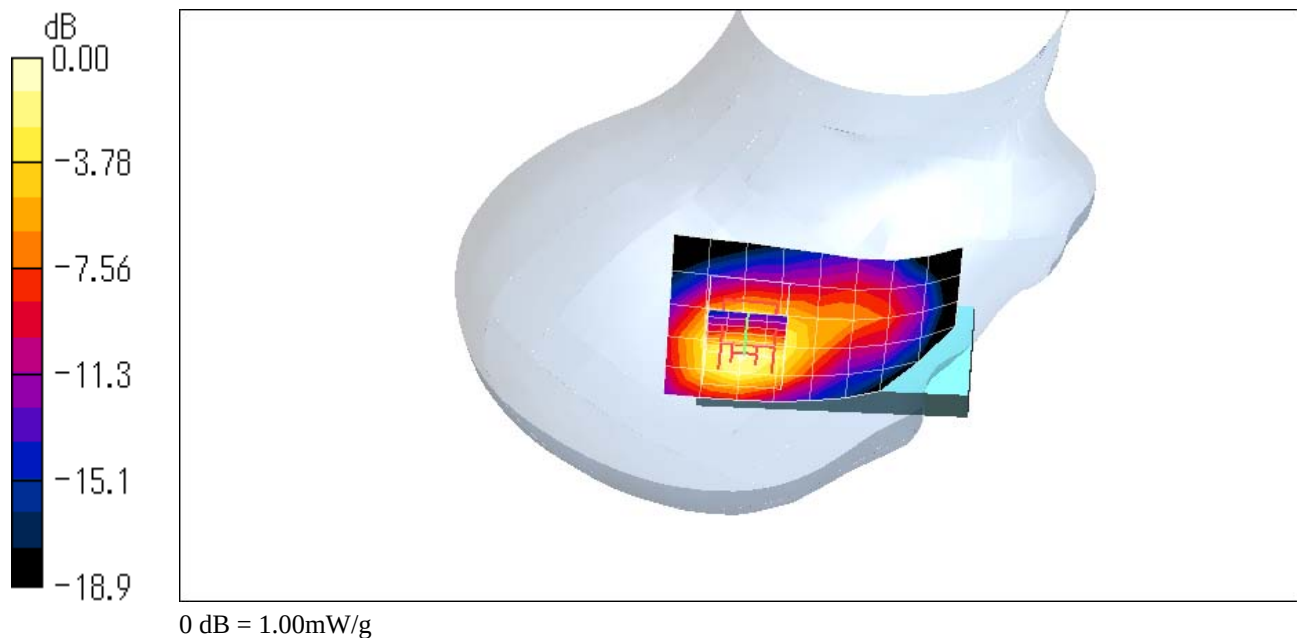

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Cheek/Touch 810ch (1909.80MHz)**DUT: UMTS / GSM 900/1800/1900 GPRS Phone / Bluetooth Enable; Type: 550SH; Serial: 004401/11/010710/5**

Communication System: GSM 1900; Frequency: 1909.8 MHz;Duty Cycle: 1:8.3


Medium: HSL1900 Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.44 \text{ mho/m}$; $\epsilon_r = 39.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASy4 (High Precision Assessment)

DASy4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(5.2, 5.2, 5.2); Calibrated: 2005/12/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2005/12/08
- Phantom: SAM 1194; Type: QD 000 P40 CA; Serial: 1194
- Measurement SW: DASy4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

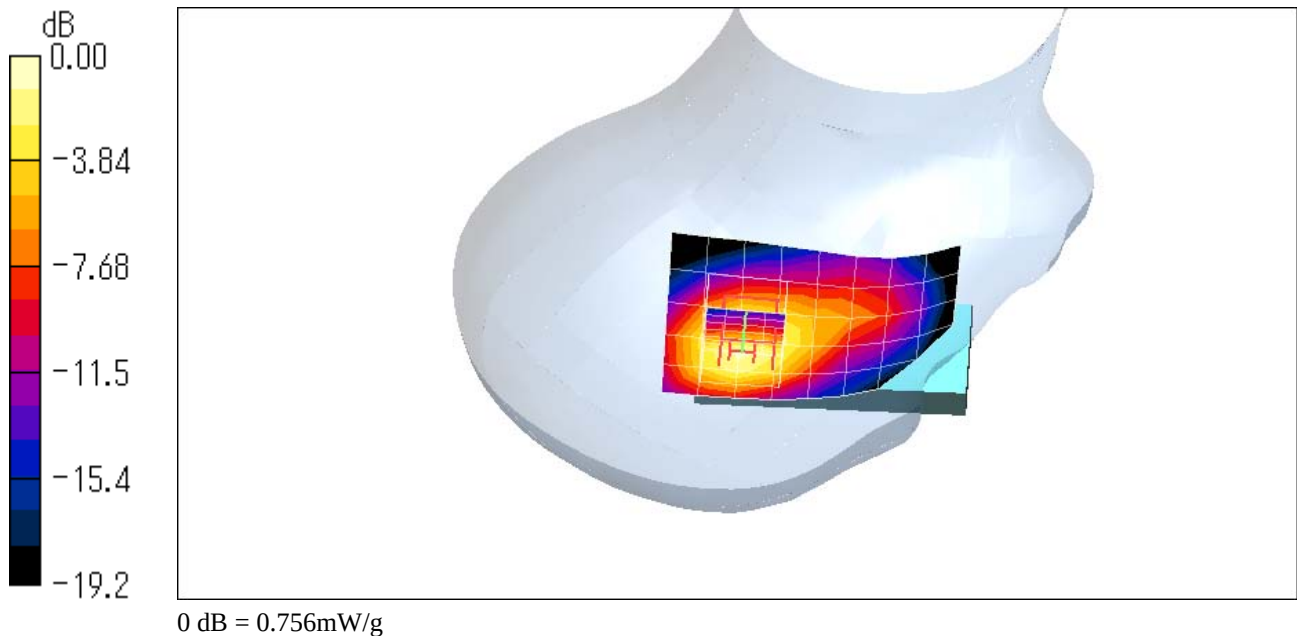Cheek/Touch Position/Area Scan (9x6x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.684 mW/g **Cheek/Touch Position/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 16.5 V/m ; Power Drift = -0.020 dB Peak SAR (extrapolated) = 1.23 W/kg **SAR(1 g) = 0.685 mW/g ; SAR(10 g) = 0.378 mW/g** Maximum value of SAR (measured) = 0.756 mW/g 

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Ear/Tilt 512ch (1850.20MHz)**DUT: UMTS / GSM 900/1800/1900 GPRS Phone / Bluetooth Enable; Type: 550SH; Serial: 004401/11/010710/5**

Communication System: GSM 1900; Frequency: 1850.2 MHz;Duty Cycle: 1:8.3


Medium: HSL1900 Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.44 \text{ mho/m}$; $\epsilon_r = 39.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASy4 (High Precision Assessment)

DASy4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(5.2, 5.2, 5.2); Calibrated: 2005/12/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2005/12/08
- Phantom: SAM 1194; Type: QD 000 P40 CA; Serial: 1194
- Measurement SW: DASy4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

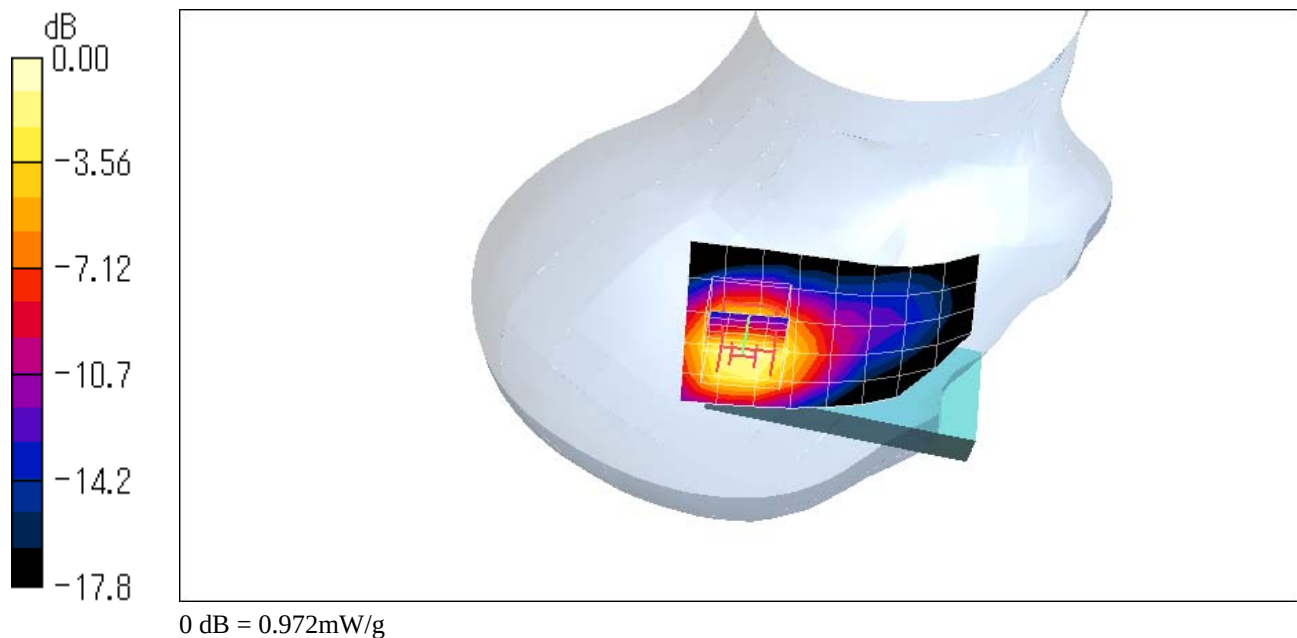Ear/Tilt Position/Area Scan (9x6x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.895 mW/g **Ear/Tilt Position/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 23.7 V/m ; Power Drift = -0.101 dB Peak SAR (extrapolated) = 1.53 W/kg **SAR(1 g) = 0.897 mW/g ; SAR(10 g) = 0.504 mW/g** Maximum value of SAR (measured) = 0.972 mW/g 

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Ear/Tilt 661ch (1880.00MHz)

DUT: UMTS / GSM 900/1800/1900 GPRS Phone / Bluetooth Enable; Type: 550SH; Serial: 004401/11/010710/5

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.44 \text{ mho/m}$; $\epsilon_r = 39.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(5.2, 5.2, 5.2); Calibrated: 2005/12/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2005/12/08
- Phantom: SAM 1194; Type: QD 000 P40 CA; Serial: 1194
- Measurement SW: DAS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Ear/Tilt Position/Area Scan (9x6x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.847 mW/g


Ear/Tilt Position/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 22.5 V/m ; Power Drift = -0.062 dB

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.843 mW/g ; SAR(10 g) = 0.467 mW/g

Maximum value of SAR (measured) = 0.916 mW/g

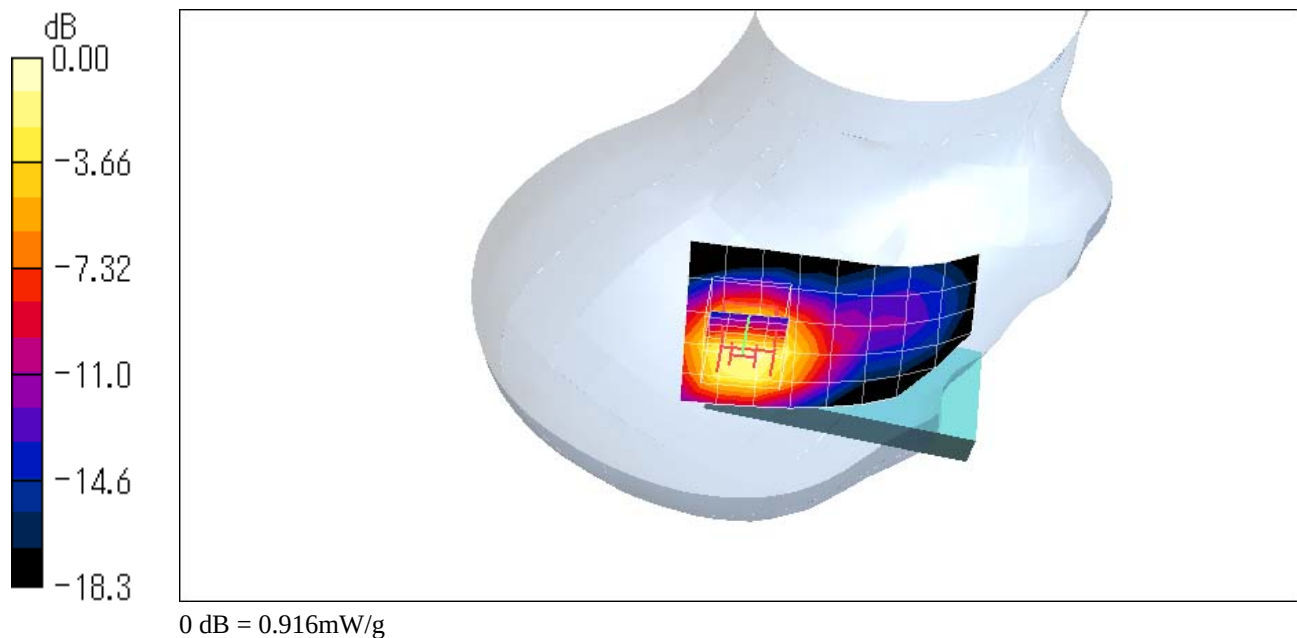

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Ear/Tilt 810ch (1909.80MHz)

DUT: UMTS / GSM 900/1800/1900 GPRS Phone / Bluetooth Enable; Type: 550SH; Serial: 004401/11/010710/5

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.44 \text{ mho/m}$; $\epsilon_r = 39.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(5.2, 5.2, 5.2); Calibrated: 2005/12/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2005/12/08
- Phantom: SAM 1194; Type: QD 000 P40 CA; Serial: 1194
- Measurement SW: DAS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Ear/Tilt Position/Area Scan (9x6x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.632 mW/g


Ear/Tilt Position/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.0 V/m ; Power Drift = -0.098 dB

Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.628 mW/g ; SAR(10 g) = 0.345 mW/g

Maximum value of SAR (measured) = 0.683 mW/g

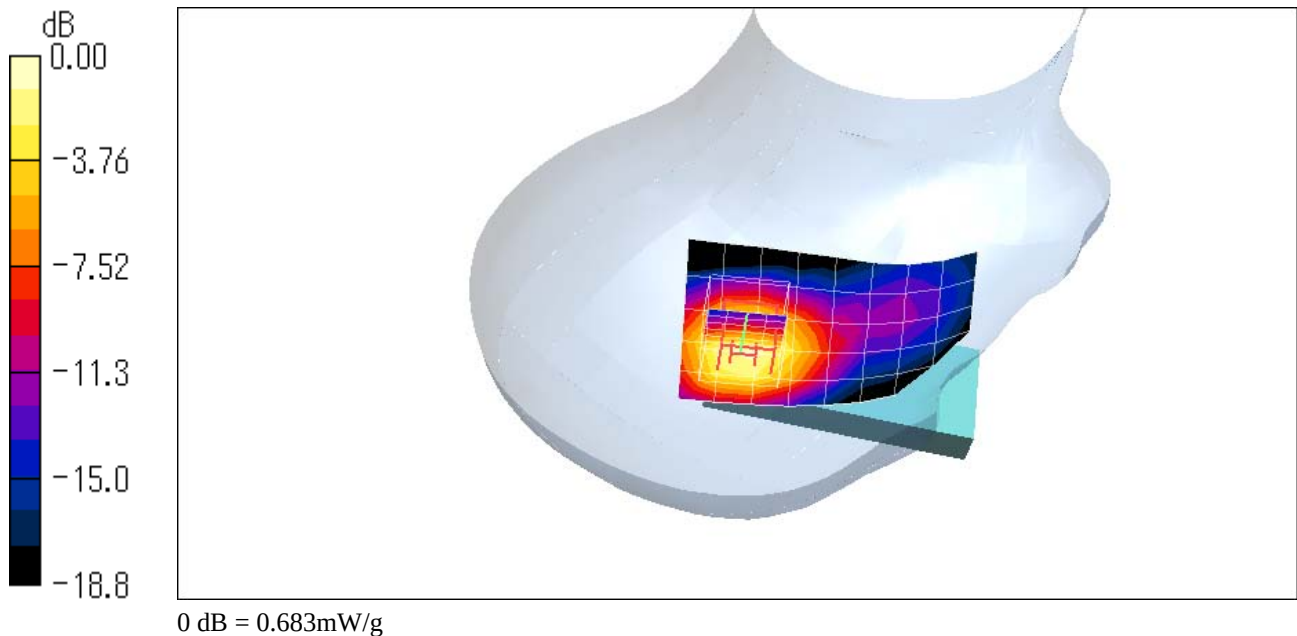

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Cheek/Touch 512ch (1850.20MHz) Co-located with Bluetooth**DUT: UMTS / GSM 900/1800/1900 GPRS Phone / Bluetooth Enable; Type: 550SH; Serial: 004401/11/010710/5**

Communication System: GSM 1900; Frequency: 1850.2 MHz;Duty Cycle: 1:8.3


Medium: HSL1900 Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.44 \text{ mho/m}$; $\epsilon_r = 39.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASy4 (High Precision Assessment)

DASy4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(5.2, 5.2, 5.2); Calibrated: 2005/12/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2005/12/08
- Phantom: SAM 1194; Type: QD 000 P40 CA; Serial: 1194
- Measurement SW: DASy4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

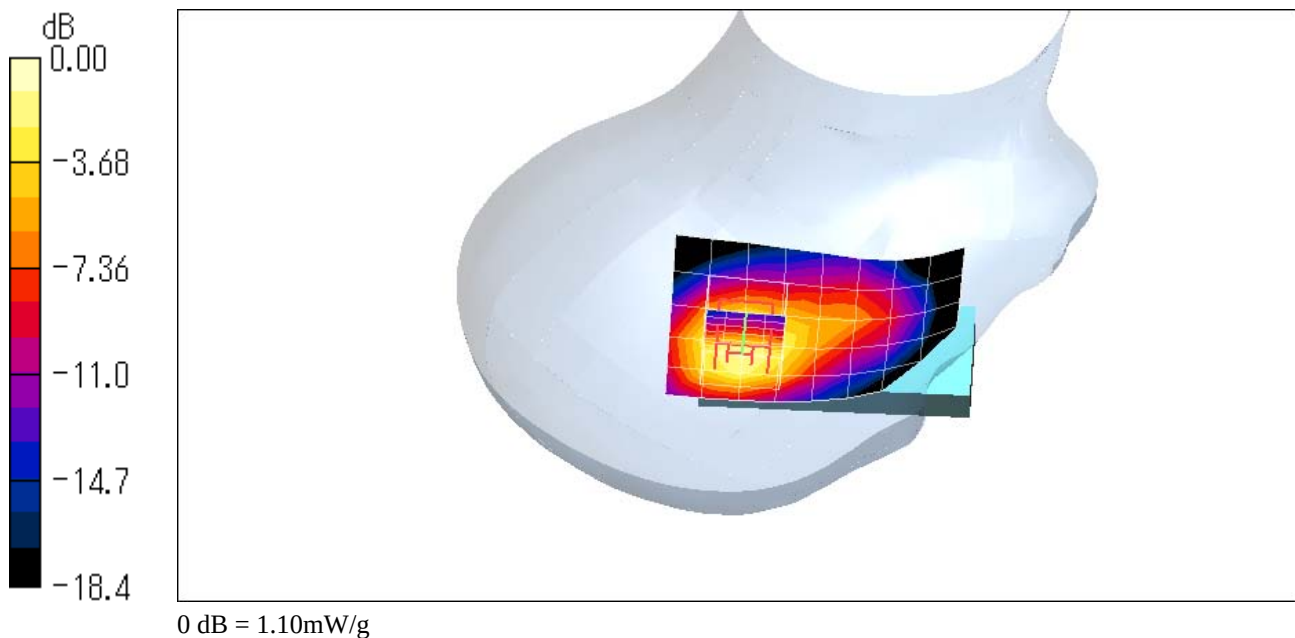Cheek/Touch Position/Area Scan (9x6x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 1.01 mW/g **Cheek/Touch Position/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 21.3 V/m ; Power Drift = -0.076 dB Peak SAR (extrapolated) = 1.76 W/kg **SAR(1 g) = 0.996 mW/g ; SAR(10 g) = 0.544 mW/g** Maximum value of SAR (measured) = 1.10 mW/g 

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Cheek/Touch 512ch (1850.20MHz) Co-located with Bluetooth

DUT: UMTS / GSM 900/1800/1900 GPRS Phone / Bluetooth Enable; Type: 550SH; Serial: 004401/11/010710/5

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.44 \text{ mho/m}$; $\epsilon_r = 39.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section


Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(5.2, 5.2, 5.2); Calibrated: 2005/12/15
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn508; Calibrated: 2005/12/08
- Phantom: SAM 1194; Type: QD 000 P40 CA; Serial: 1194
- Measurement SW: DAS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Cheek/Touch Position/Z Scan (1x1x33): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$, $dz=5\text{mm}$

Maximum value of SAR (measured) = 1.20 mW/g

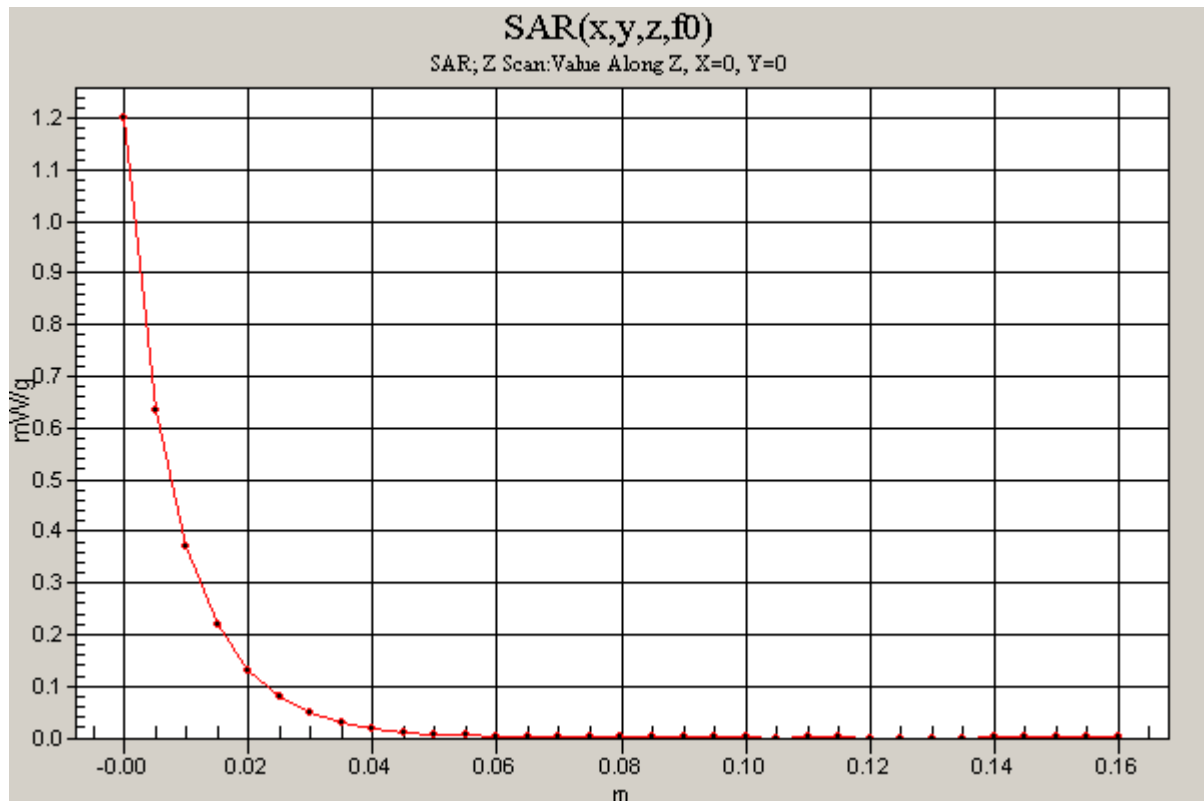

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Body-worn 512ch (1850.20MHz)

DUT: UMTS / GSM 900/1800/1900 GPRS Phone / Bluetooth Enable; Type: 550SH; Serial: 004401/11/010710/5

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: M1900 Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.58 \text{ mho/m}$; $\epsilon_r = 53.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(4.54, 4.54, 4.54); Calibrated: 2005/12/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2005/12/08
- Phantom: SAM 1194; Type: QD 000 P40 CA; Serial: 1194
- Measurement SW: DAS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-worn/Area Scan (6x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.418 mW/g


Body-worn/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.1 V/m; Power Drift = -0.143 dB

Peak SAR (extrapolated) = 0.614 W/kg

SAR(1 g) = 0.405 mW/g; SAR(10 g) = 0.250 mW/g

Maximum value of SAR (measured) = 0.438 mW/g

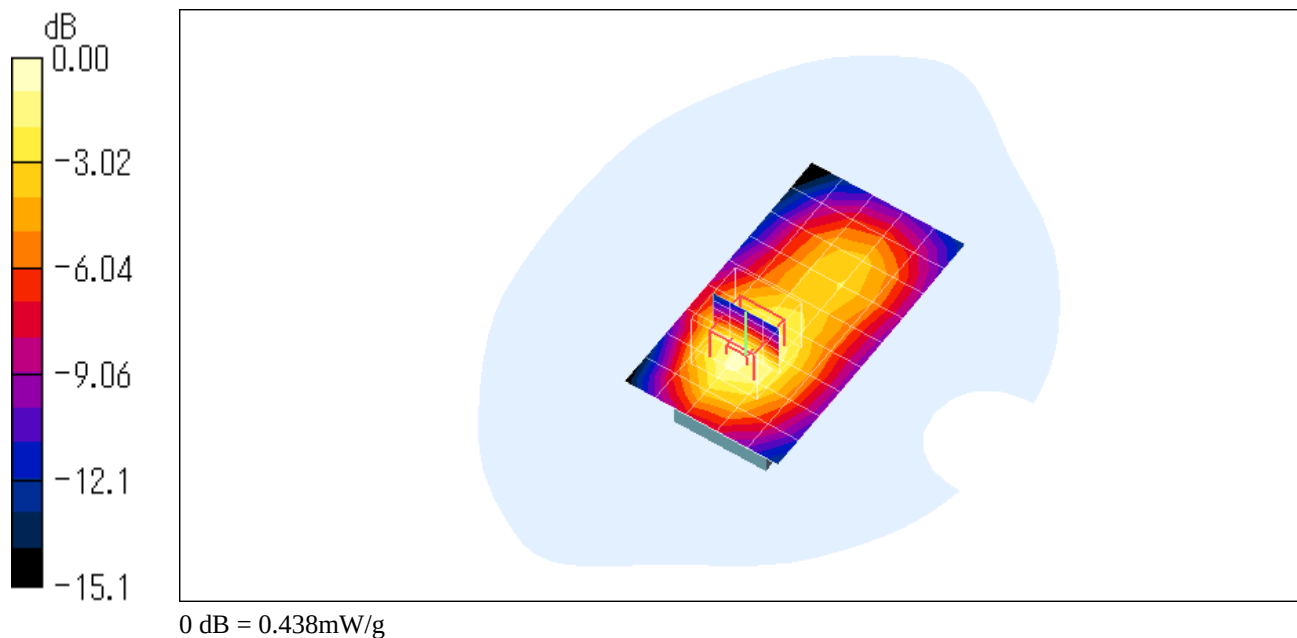

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Body-worn 661ch (1880.00MHz)

DUT: UMTS / GSM 900/1800/1900 GPRS Phone / Bluetooth Enable; Type: 550SH; Serial: 004401/11/010710/5

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: M1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.58$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(4.54, 4.54, 4.54); Calibrated: 2005/12/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2005/12/08
- Phantom: SAM 1194; Type: QD 000 P40 CA; Serial: 1194
- Measurement SW: DAS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-worn/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.359 mW/g


Body-worn/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.4 V/m; Power Drift = -0.122 dB

Peak SAR (extrapolated) = 0.508 W/kg

SAR(1 g) = 0.333 mW/g; SAR(10 g) = 0.206 mW/g

Maximum value of SAR (measured) = 0.360 mW/g

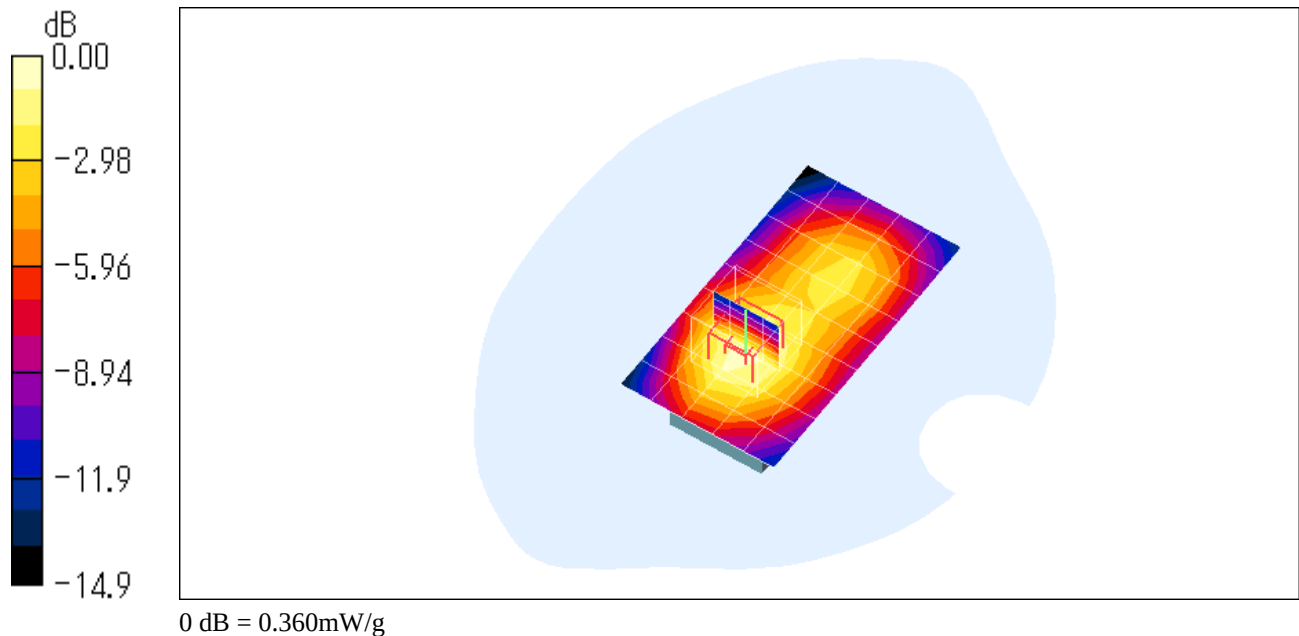

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Body-worn 810ch (1909.80MHz)

DUT: UMTS / GSM 900/1800/1900 GPRS Phone / Bluetooth Enable; Type: 550SH; Serial: 004401/11/010710/5

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: M1900 Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.58 \text{ mho/m}$; $\epsilon_r = 53.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(4.54, 4.54, 4.54); Calibrated: 2005/12/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2005/12/08
- Phantom: SAM 1194; Type: QD 000 P40 CA; Serial: 1194
- Measurement SW: DAS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-worn/Area Scan (6x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.256 mW/g

Body-worn/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.3 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.377 W/kg

SAR(1 g) = 0.239 mW/g; SAR(10 g) = 0.146 mW/g

Maximum value of SAR (measured) = 0.257 mW/g


Body-worn/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.3 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.244 W/kg

SAR(1 g) = 0.170 mW/g; SAR(10 g) = 0.110 mW/g

Maximum value of SAR (measured) = 0.181 mW/g

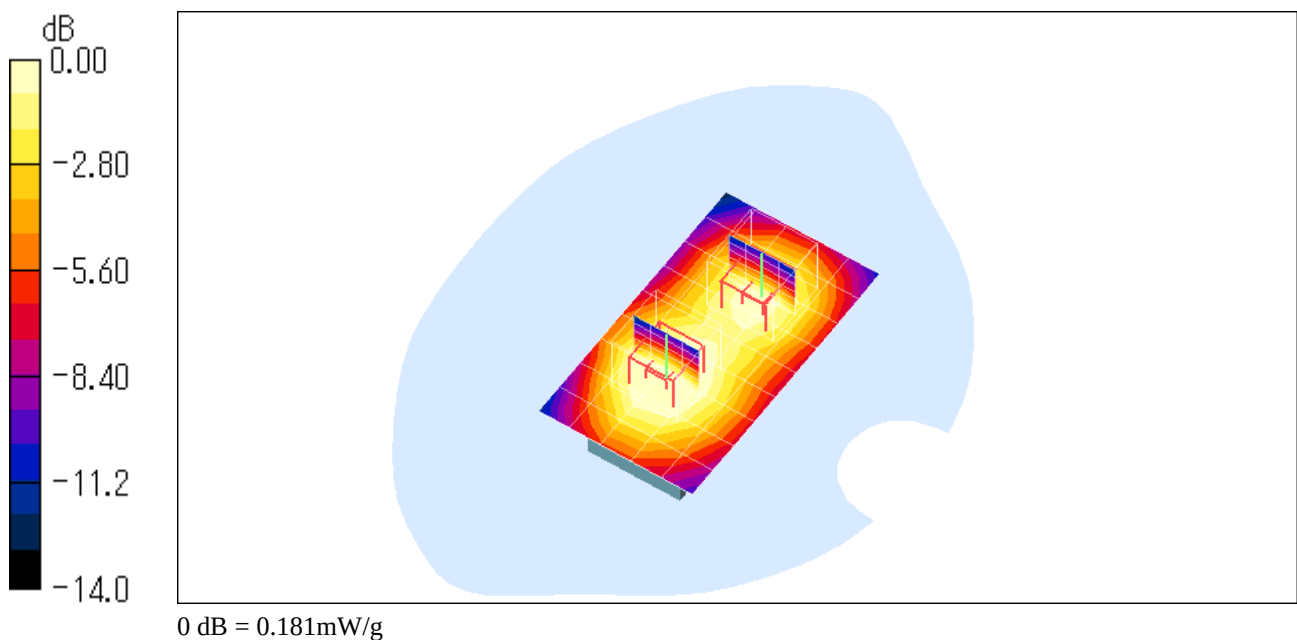

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Body-worn 512ch (1850.20MHz) Co-located with Bluetooth

DUT: UMTS / GSM 900/1800/1900 GPRS Phone / Bluetooth Enable; Type: 550SH; Serial: 004401/11/010710/5

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: M1900 Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.58 \text{ mho/m}$; $\epsilon_r = 53.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(4.54, 4.54, 4.54); Calibrated: 2005/12/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2005/12/08
- Phantom: SAM 1194; Type: QD 000 P40 CA; Serial: 1194
- Measurement SW: DAS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-worn/Area Scan (6x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.418 mW/g


Body-worn/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.1 V/m; Power Drift = -0.076 dB

Peak SAR (extrapolated) = 0.621 W/kg

SAR(1 g) = 0.410 mW/g; SAR(10 g) = 0.253 mW/g

Maximum value of SAR (measured) = 0.445 mW/g

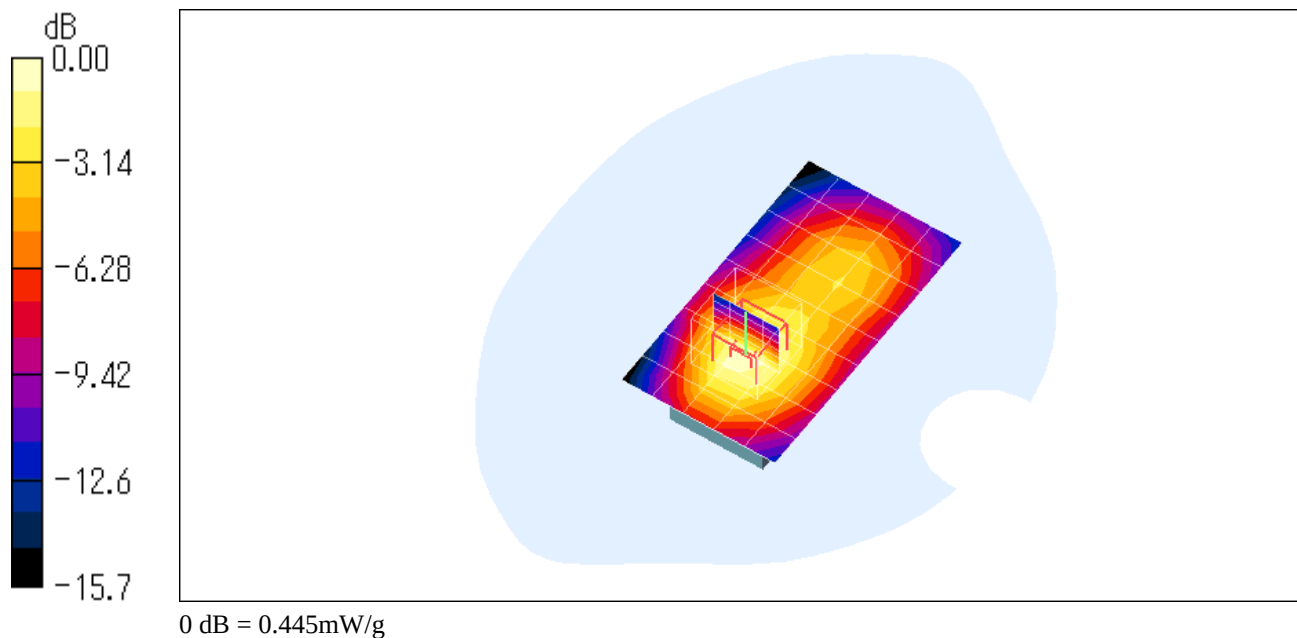

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Body-worn (GPRS) 512ch (1850.20MHz)**DUT: UMTS / GSM 900/1800/1900 GPRS Phone / Bluetooth Enable; Type: 550SH; Serial: 004401/11/010710/5**

Communication System: GSM 1900; Frequency: 1850.2 MHz;Duty Cycle: 1:4.2

Medium: M1900 Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.58 \text{ mho/m}$; $\epsilon_r = 53.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASy4 (High Precision Assessment)

DASy4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(4.54, 4.54, 4.54); Calibrated: 2005/12/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2005/12/08
- Phantom: SAM 1194; Type: QD 000 P40 CA; Serial: 1194
- Measurement SW: DASy4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-worn/Area Scan (6x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.798 mW/g


Body-worn/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.5 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.800 mW/g; SAR(10 g) = 0.490 mW/g

Maximum value of SAR (measured) = 0.867 mW/g

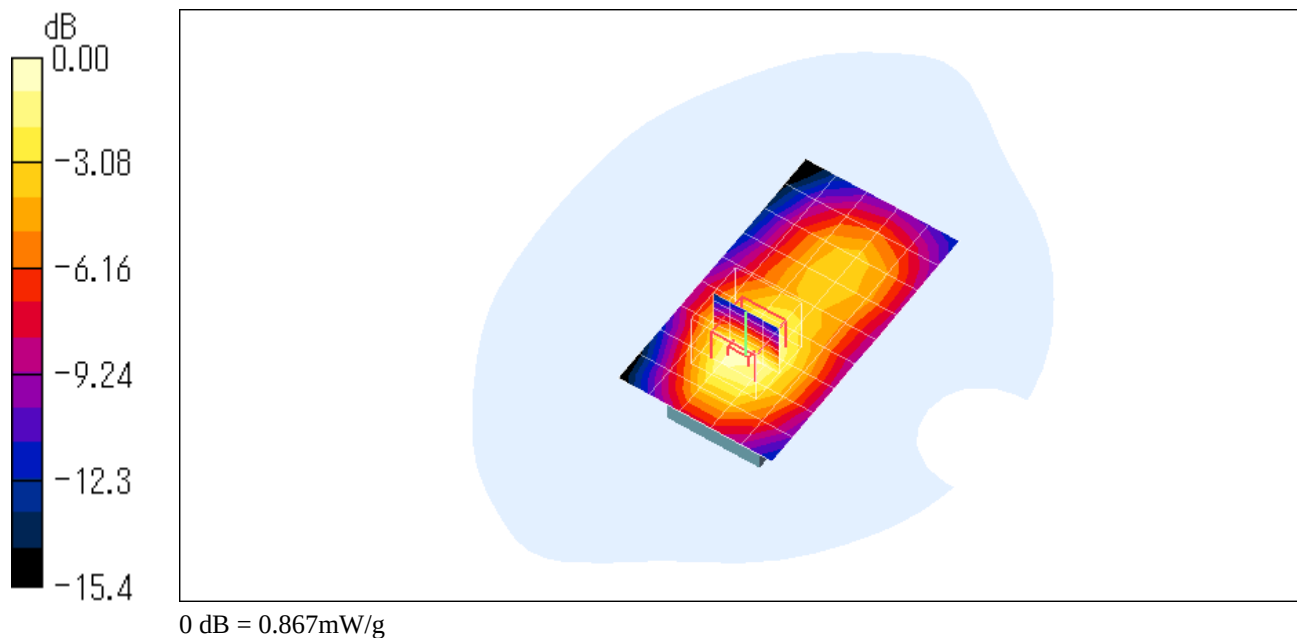

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Body-worn (GPRS) 512ch (1850.20MHz)

DUT: UMTS / GSM 900/1800/1900 GPRS Phone / Bluetooth Enable; Type: 550SH; Serial: 004401/11/010710/5

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:4.2

Medium: M1900 Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.58 \text{ mho/m}$; $\epsilon_r = 53.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section


Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(4.54, 4.54, 4.54); Calibrated: 2005/12/15
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn508; Calibrated: 2005/12/08
- Phantom: SAM 1194; Type: QD 000 P40 CA; Serial: 1194
- Measurement SW: DAS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-worn/Z Scan (1x1x33): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$, $dz=5\text{mm}$

Maximum value of SAR (measured) = 0.991 mW/g

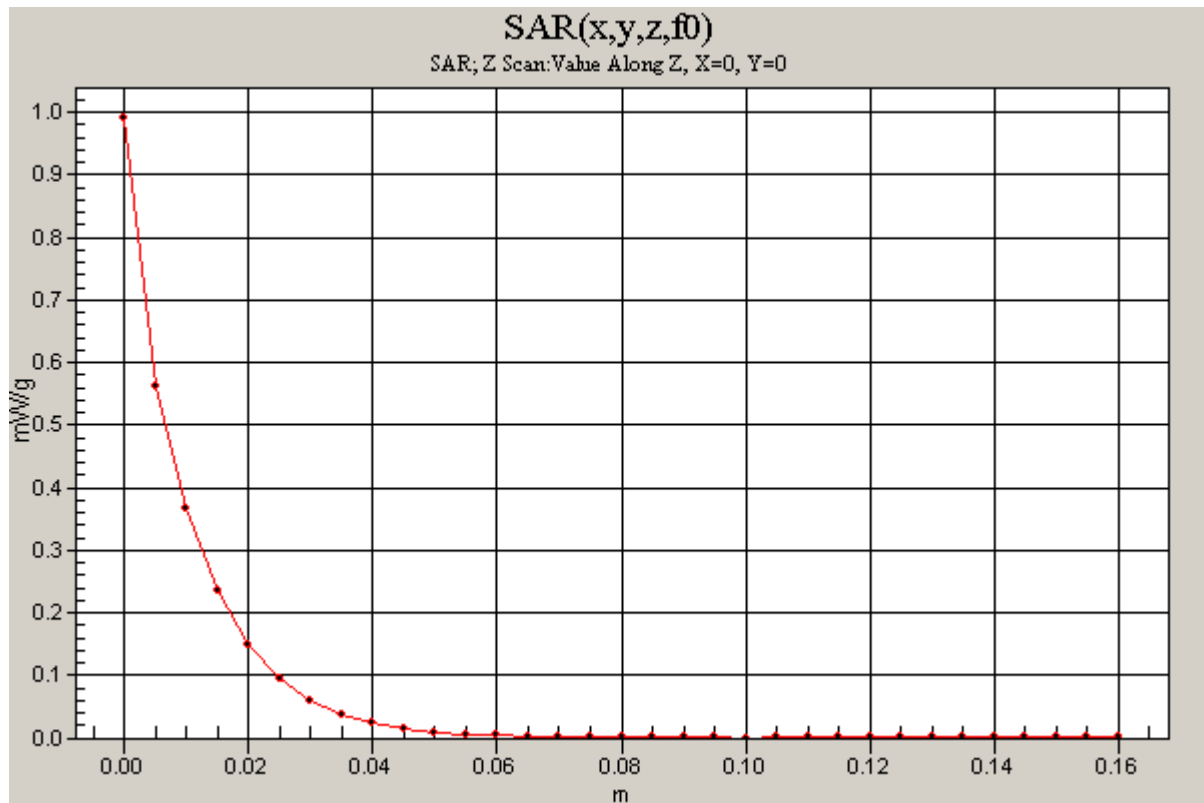

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Body-worn (GPRS) 661ch (1880.00MHz)

DUT: UMTS / GSM 900/1800/1900 GPRS Phone / Bluetooth Enable; Type: 550SH; Serial: 004401/11/010710/5

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:4.2

Medium: M1900 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.58 \text{ mho/m}$; $\epsilon_r = 53.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(4.54, 4.54, 4.54); Calibrated: 2005/12/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2005/12/08
- Phantom: SAM 1194; Type: QD 000 P40 CA; Serial: 1194
- Measurement SW: DAS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-worn/Area Scan (6x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.677 mW/g


Body-worn/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.4 V/m ; Power Drift = -0.077 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.657 mW/g ; SAR(10 g) = 0.402 mW/g

Maximum value of SAR (measured) = 0.715 mW/g

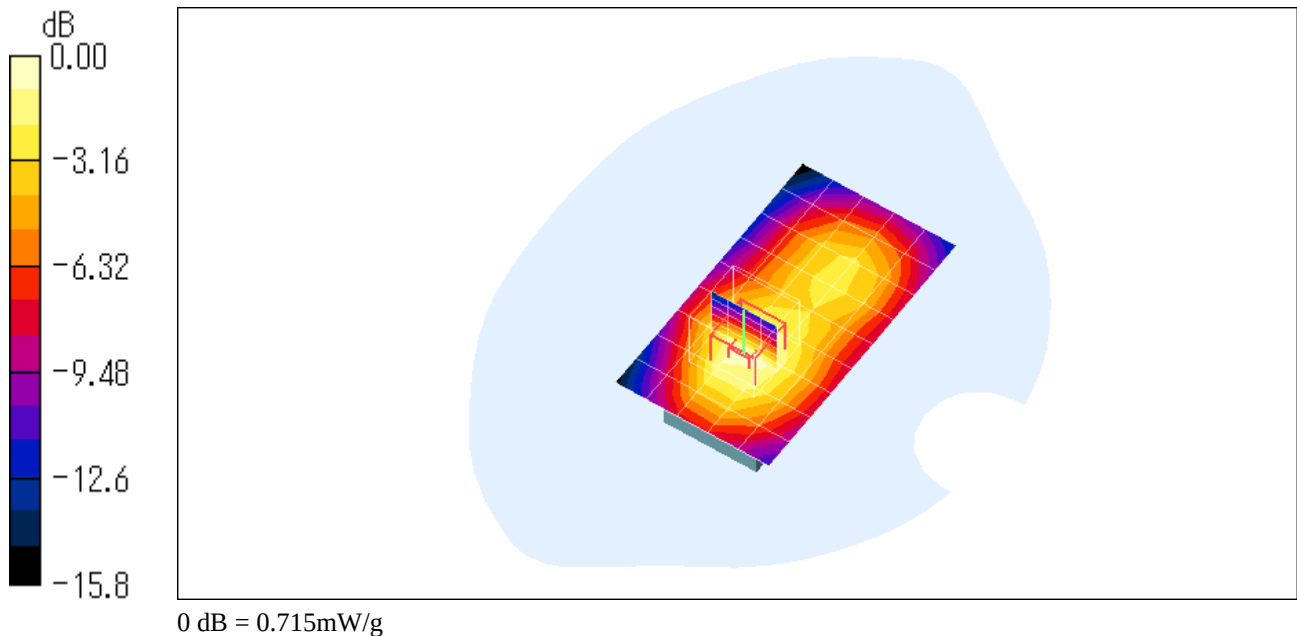

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Body-worn (GPRS) 810ch (1909.80MHz)**DUT: UMTS / GSM 900/1800/1900 GPRS Phone / Bluetooth Enable; Type: 550SH; Serial: 004401/11/010710/5**

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:4.2

Medium: M1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.58$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(4.54, 4.54, 4.54); Calibrated: 2005/12/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2005/12/08
- Phantom: SAM 1194; Type: QD 000 P40 CA; Serial: 1194
- Measurement SW: DAS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-worn/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.475 mW/g

Body-worn/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.8 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.748 W/kg

SAR(1 g) = 0.467 mW/g; SAR(10 g) = 0.282 mW/g

Maximum value of SAR (measured) = 0.508 mW/g

Body-worn/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.8 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.480 W/kg

SAR(1 g) = 0.335 mW/g; SAR(10 g) = 0.218 mW/g

Maximum value of SAR (measured) = 0.359 mW/g

