

TEST REPORT

APPLICANT : Sharp Corporation
ADDRESS : 2-13-1, Iida Hachihonmatsu, Higashi-Hiroshima City, Hiroshima, 739-0192, JAPAN
PRODUCTS : Cellular Phone
MODEL NO. : 103SH
SERIAL NO. : 004401/11/371712/4
FCC ID : APYHRO00161
TEST STANDARD : CFR 47 FCC Rules and Regulations Part 24
TESTING LOCATION : Japan Quality Assurance Organization
KITA-KANSAI Testing Center
1-7-7, Ishimaru, Minoh-shi, Osaka 562-0027, Japan
TEST RESULTS : Passed
DATE OF TEST : November 17 ~ 29, 2011



Kousei Shibata
Manager
Japan Quality Assurance Organization
KITA-KANSAI Testing Center
Testing Dept. SAITO EMC Branch
7-3-10, Saito-asagi, Ibaraki-shi, Osaka 567-0085, Japan



- The measurement values stated in Test Report was made with traceable to National Institute of Advanced Industrial Science and Technology (AIST) of Japan and National Institute of Information and Communications Technology (NICT) of Japan.
- The applicable standard, testing condition and testing method which were used for the tests are based on the request of the applicant.
- The test results presented in this report relate only to the offered test sample.
- The contents of this test report cannot be used for the purposes, such as advertisement for consumers.
- This test report shall not be reproduced except in full without the written approval of JQA.
- VLAC does not approve, certify or warrant the product by this test report.

TABLE OF CONTENTS

	Page
Documentation	3
1 Test Regulation.....	3
2 Test Location.....	3
3 Recognition of Test Laboratory.....	3
4 Description of the Equipment Under Test.....	4
5 Test Condition.....	5
6 Preliminary Test and Test Setup	7
7 Equipment Under Test Modification.....	16
8 Responsible Party	16
9 Deviation from Standard.....	16
10 Test Results.....	17
11 Summary.....	20
12 Operating Condition.....	21
13 Test Configuration.....	21
14 Equipment Under Test Arrangement (Drawings)	22
Appendix A: Test Data	23
Appendix B: Test Arrangement (Photographs)	40
Appendix C: Test Instruments	42

DEFINITIONS FOR ABBREVIATION AND SYMBOLS USED IN THIS TEST REPORT

EUT	: Equipment Under Test	EMC	: Electromagnetic Compatibility
AE	: Associated Equipment	EMI	: Electromagnetic Interference
N/A	: Not Applicable	EMS	: Electromagnetic Susceptibility
N/T	: Not Tested		

- indicates that the listed condition, standard or equipment is applicable for this report.
 - indicates that the listed condition, standard or equipment is not applicable for this report.

Documentation

1 Test Regulation

Applied Standard : CFR 47 FCC Rules and Regulations Part 24
Subpart E - Broadband PCS

Test Requirements : CFR 47 FCC Rules and Regulations Part 2
§2.1046, §2.1047, §2.1049, §2.1051, §2.1053, §2.1055 and §2.1057

Test Procedure : ANSI C63.4-2003, TIA/EIA-603-C-2004

2 Test Location

Japan Quality Assurance Organization (JQA)
KITA-KANSAI Testing Center Testing Department SAITO EMC Branch
7-3-10, Saito-asagi, Ibaraki-shi, Osaka 567-0085, Japan
MINOH Test Site (KITA-KANSAI Testing Center)
7-7, Ishimaru, 1-chome, Minoh-shi, Osaka, 562-0027, Japan
KAMEOKA EMC Branch
9-1, Ozaki, Inukanno, Nishibetsuin-cho, Kameoka-shi, Kyoto, 621-0126, Japan

3 Recognition of Test Laboratory

JQA KITA-KANSAI Testing Center Testing Dept. SAITO EMC Branch is accredited under ISO/IEC 17025 by following accreditation bodies and the test facility of Testing Division is registered by the following bodies.

VLAC Code : VLAC-001-2 (Effective through : March 30, 2012)
BSMI Recognition No. : SL2-IS-E-6006, SL2-IN-E-6006, SL2-AI-E-6006
(Effective through : September 14, 2013)
IC Registration No. : 2079E-2 (Effective through : January 25, 2014)
2079E-3, 2079E-4 (Effective through : July 20, 2014)

Accredited as conformity assessment body for Japan electrical appliances and material law by METI.
(Effective through : February 22, 2012)

4 Description of the Equipment Under Test

4.1 General Information

1. Manufacturer : Sharp Corporation
2-13-1, Iida Hachihonmatsu, Higashi-Hiroshima City, Hiroshima,
739-0192, JAPAN
2. Products : Cellular Phone
3. Model No. : 103SH
4. Serial No. : 004401/11/371712/4
5. Product Type : Pre-production
6. Date of Manufacture : October, 2011
7. Transmitting Frequency : 1850.2 MHz(512CH) – 1909.8MHz(810CH)
8. Receiving Frequency : 1930.2 MHz(512CH) – 1989.8MHz(810CH)
9. Emission Designations : 245KGXW
10. Max. RF Output Power : 1.479W (EIRP)
11. Power Rating : 4.0VDC (Lithium-ion Battery Pack SHBEE1 1520mAh)
12. EUT Grounding : None
13. Category : Broadband PCS
14. EUT Authorization : Certification
15. Receive Date of EUT : November 17, 2011

4.2 Channel Plan

The carrier spacing is 200 kHz.

The carrier frequency is designated by the absolute frequency channel number (ARFCN).

The carrier frequency is expressed in the equation shown as follows:

$$\text{Transmitting Frequency (in MHz)} = 1850.2 + 0.2 \times (n - 512)$$

$$\text{Receiving Frequency (in MHz)} = 1930.2 + 0.2 \times (n - 512)$$

where, n : channel number ($512 \leq n \leq 810$)

5 Test Condition

5.1 RF Power Output (§2.1046)

5.1.1 Conducted RF Power Output

The requirements are - Applicable - Tested. - Not tested by applicant request.]
 - Not Applicable

Test site : SAITO	<input type="checkbox"/> - Shielded room (S1)	<input type="checkbox"/> - Shielded room (S2)
	<input type="checkbox"/> - Shielded room (S3)	<input checked="" type="checkbox"/> - Shielded room (S4)
MINOH	<input type="checkbox"/> - Shielded room	<input type="checkbox"/> - 2nd shielded room
KAMEOKA	<input type="checkbox"/> - Shielded room	<input type="checkbox"/> - Conducted emission facility

Test instruments : Refer to Appendix C.

5.1.2 ERP / EIRP RF Power Output

The requirements are - Applicable - Tested. - Not tested by applicant request.]
 - Not Applicable

Test site : SAITO	<input type="checkbox"/> - Anechoic chamber (A1)	<input checked="" type="checkbox"/> - Anechoic chamber (A2)
KAMEOKA	<input type="checkbox"/> - 1st open site	

Test instruments : Refer to Appendix C.

5.2 Modulation Characteristics (§2.1047)

The requirements are - Applicable - Tested. - Not tested by applicant request.]
 - Not Applicable

Test site : SAITO	<input type="checkbox"/> - Shielded room (S1)	<input type="checkbox"/> - Shielded room (S2)
	<input type="checkbox"/> - Shielded room (S3)	<input type="checkbox"/> - Shielded room (S4)
MINOH	<input type="checkbox"/> - Shielded room	<input type="checkbox"/> - 2nd shielded room
KAMEOKA	<input type="checkbox"/> - Shielded room	<input type="checkbox"/> - Conducted emission facility

Test instruments : Refer to Appendix C.

5.3 Occupied Bandwidth (§2.1049)

The requirements are - Applicable - Tested. - Not tested by applicant request.]
 - Not Applicable

Test site : SAITO	<input type="checkbox"/> - Shielded room (S1)	<input type="checkbox"/> - Shielded room (S2)
	<input type="checkbox"/> - Shielded room (S3)	<input checked="" type="checkbox"/> - Shielded room (S4)
MINOH	<input type="checkbox"/> - Shielded room	<input type="checkbox"/> - 2nd shielded room
KAMEOKA	<input type="checkbox"/> - Shielded room	<input type="checkbox"/> - Conducted emission facility

Test instruments : Refer to Appendix C.

5.4 Spurious Emissions at Antenna Terminals (§2.1051)

The requirements are - Applicable [- Tested. - Not tested by applicant request.]
 - Not Applicable

Test site : SAITO	<input type="checkbox"/> - Shielded room (S1)	<input type="checkbox"/> - Shielded room (S2)
	<input type="checkbox"/> - Shielded room (S3)	<input checked="" type="checkbox"/> - Shielded room (S4)
MINOH	<input type="checkbox"/> - Shielded room	<input type="checkbox"/> - 2nd shielded room
KAMEOKA	<input type="checkbox"/> - Shielded room	<input type="checkbox"/> - Conducted emission facility

Test instruments : Refer to Appendix C.

5.5 Band-Edge Emission (§2.1051)

The requirements are - Applicable [- Tested. - Not tested by applicant request.]
 - Not Applicable

Test site : SAITO	<input type="checkbox"/> - Shielded room (S1)	<input type="checkbox"/> - Shielded room (S2)
	<input type="checkbox"/> - Shielded room (S3)	<input checked="" type="checkbox"/> - Shielded room (S4)
MINOH	<input type="checkbox"/> - Shielded room	<input type="checkbox"/> - 2nd shielded room
KAMEOKA	<input type="checkbox"/> - Shielded room	<input type="checkbox"/> - Conducted emission facility

Test instruments : Refer to Appendix C.

5.6 Field Strength of Spurious Radiation (§2.1053)

The requirements are - Applicable [- Tested. - Not tested by applicant request.]
 - Not Applicable

Test site : SAITO	<input type="checkbox"/> - Anechoic chamber (A1)	<input checked="" type="checkbox"/> - Anechoic chamber (A2)
KAMEOKA	<input type="checkbox"/> - 1st open site	

Test instruments : Refer to Appendix C.

5.7 Frequency Stability (§2.1055)

The requirements are - Applicable [- Tested. - Not tested by applicant request.]
 - Not Applicable

Test site : SAITO	<input checked="" type="checkbox"/> - Environment Testing Room
MINOH	<input type="checkbox"/> - Environment Testing Room


Test instruments : Refer to Appendix C.

6 Preliminary Test and Test Setup

6.1 RF Power Output (§2.1046)

6.1.1 Conducted RF Power Output

The Conducted RF Power Output was measured with a power meter, one 10dB attenuator and a short, low loss cable.

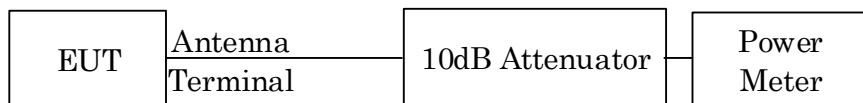

6.1.2 ERP / EIRP RF Power Output

Step 1:

In order to obtain the maximum emission, the EUT was placed at the height 1.8 m on the non-conducted support and was varying at three orthogonal axes (Refer to clause 15), at the distance 3 m from the receiving antenna and rotated around 360 degrees.

The receiving antenna height was varied from 1 m to 4 m.

The EUT on the table was placed to be maximum emission against at the receiving antenna polarized (vertical and horizontal).

Then the meter reading of the spectrum analyzer at the maximum emission was A dB(μ V).

Step 2:

The EUT was replaced to substitution antenna at the same polarized under the same condition as step 1.

The RF power was fed to the transmitting antenna through the RF amplifier from the signal generator.

In order to obtain the maximum emission level, the height of the receiving antenna was varied from 1 m to 4 m.

The level of maximum emission was A dB(μ V), same as the recorded level in the step 1.

Then the RF power into the substitution horn antenna was P (dBm).


The ERP/EIRP output power was calculated in the following equation.

$$\text{ERP (dBm)} = P (\text{dBm}) - \text{Balun loss of the half-wave dipole antenna (dB)} + \text{Cable loss (dB)}$$


$$\text{EIRP (dBm)} = P (\text{dBm}) + G_h (\text{dBi})$$

where, G_h (dBi) : Gain of the substitution horn antenna.

– Side View –

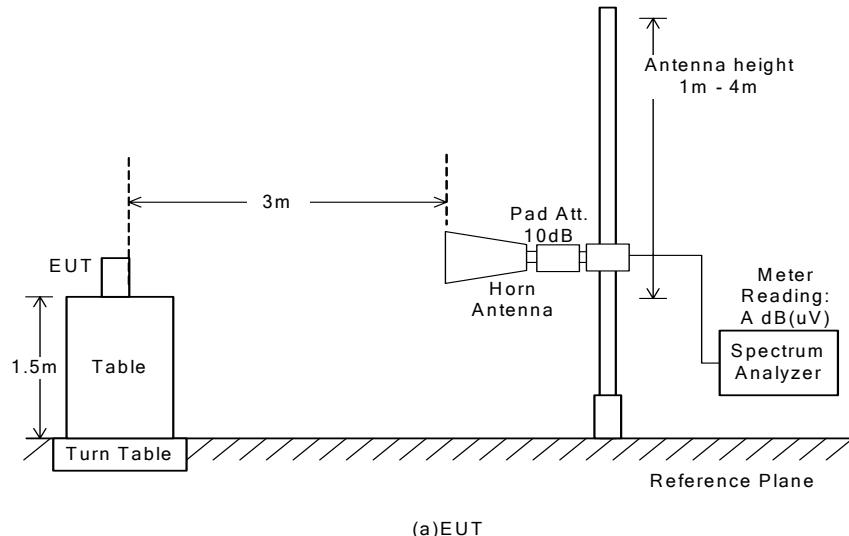

(a) EUT

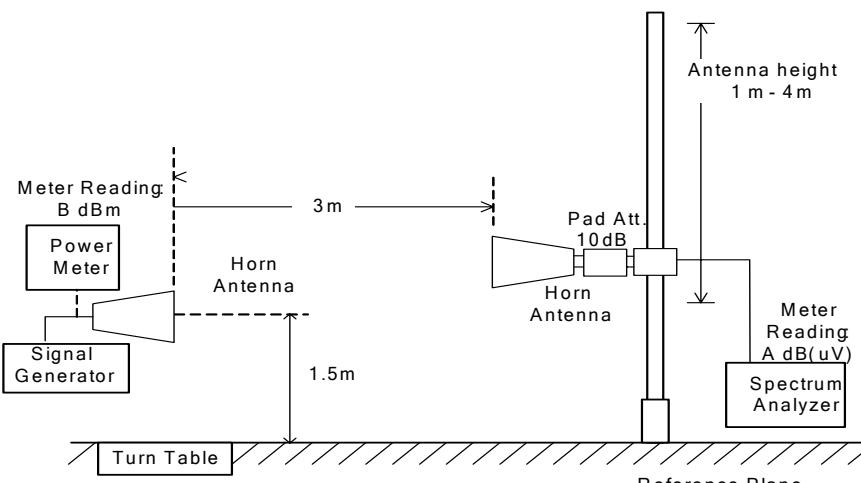


(b) Substitution Horn Antenna

6.2 Modulation Characteristics (§2.1047)

Not Applicable

6.3 Occupied Bandwidth (§2.1049)

The test system is shown as follows:

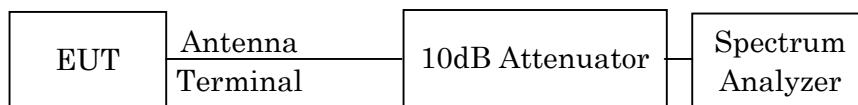


The setting of the spectrum analyzer are shown as follows:

Res. Bandwidth	10 kHz
Video Bandwidth	30 kHz
Span	1 MHz
Sweep Time	AUTO
Trace	Maxhold


6.4 Spurious Emissions at Antenna Terminals (§2.1051)

The Antenna Conducted Emission was with a spectrum analyzer. The test system is shown as follows:

a) Frequency Range : 9kHz - 2GHz



b) Frequency Range : 2GHz - 20GHz




The setting of the spectrum analyzer are shown as follows:

Frequency Range	9 kHz - 150 kHz	150 kHz - 30 MHz	30 MHz - 20 GHz
Res. Bandwidth	200 Hz	10 kHz	1 MHz
Video Bandwidth	1 kHz	30 kHz	3 MHz
Sweep Time	AUTO	AUTO	AUTO
Trace	Maxhold	Maxhold	Maxhold

6.5 Band-Edge Emission (§2.1051)

The test system is shown as follows:

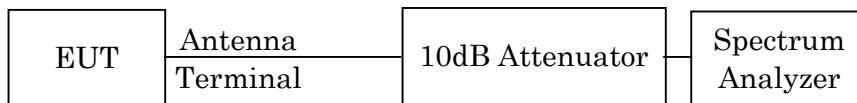

The setting of the spectrum analyzer are shown as follows:

TX Frequency	1850.20 MHz / 1909.80 MHz
Band-Edge Frequency	1850.00 MHz / 1910.00 MHz
Res. Bandwidth	3 kHz
Video Bandwidth	10 kHz
Span	2 MHz
Sweep Time	AUTO
Trace	Maxhold

6.6 Field Strength of Spurious Radiation (§2.1053)

Step 1) The spurious radiation for transmitter were measured at the distance 3 m away from the EUT which was placed on a non-conducted support 1.0 m in height and was varying at three orthogonal axes (Refer to clause 15). The receiving antenna was oriented for vertical polarization and varied from 1 m to 4 m until the maximum emission level was detected on the measuring instrument. The EUT was rotated 360 degrees until the maximum emission was received. The measurement was also repeated with the receiving antenna in the horizontal polarization.

This test was carried out using the half-wave dipole antenna for up to 1GHz and using the horn antenna for above 1 GHz.

Step 2)

A) Up to 1 GHz

The ERP measurement was carried out with according to Step 2 in page 8. Then the RF power in the substitution antenna half-wave dipole antenna for up to 1 GHz and the substitution horn antenna for above 1 GHz.

The ERP is calculated in the following equation.

$$\text{ERP(dBm)} = \text{P(dBm)} - (\text{Balun Loss of the half-wave dipole Ant. (dB)}) + \text{Cable Loss (dB)}$$

B) Above 1 GHz

The ERP is calculated from the maximum emission level by the following formula.

$$\frac{e^2}{120\pi} = \frac{eirp}{4\pi d^2} \quad \text{---(Eq.1)}$$

$$erp = eirp - Gd \quad \text{---(Eq.2)}$$

Where, $e[V/m]$: Field Strength at measuring distance($d=3m$)

$eirp[W]$: Equivalent Isotropic Radiated Power

$erp[W]$: Effective Radiated Power

$Gd(dBi)$: Gain of the substitution half-wave dipole antenna(2.15dB)

$$eirp = \frac{(de)^2}{30} = \frac{3}{10} e^2$$

$$\therefore 10\log(eirp) = 20\log(e) + 10\log(3/10) = 20\log(e) - 5.23$$

$$10\log(eirp) = EIRP[dBm] - 30$$


$$20\log(e) = E[dB(\mu V/m)] - 120$$

$$\therefore EIRP = E - 120 + 30 - 5.23 = E - 95.23$$


$$\therefore ERP[dBm] = EIRP - 2.15 = E - 97.38$$

The respective calculated ERP of the spurious and harmonics were compared with the ERP of fundamental frequency by specified attenuation limits, $43 + 10\log_{10}(\text{TP in watt})$ [dB]. Where, TP = Transmitter power at the ANT OUT under test configuration as the hands free unit used.

Radiated Emission 30 MHz to 1000 MHz

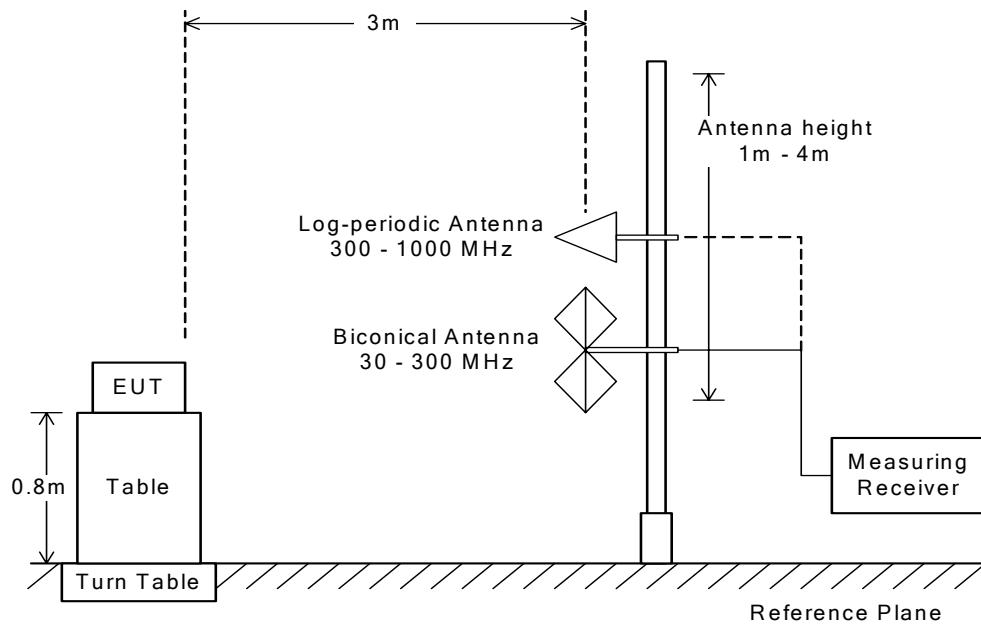


Radiated Emission above 1 GHz

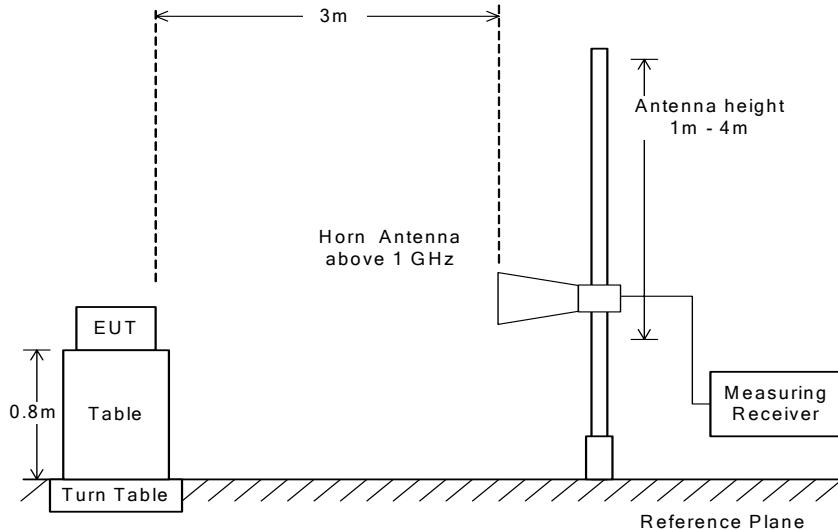

NOTE

The antenna height is scanned depending on the EUT's size and mounting height.

Radiated Emission 30 to 1000 MHz – Substitution Method

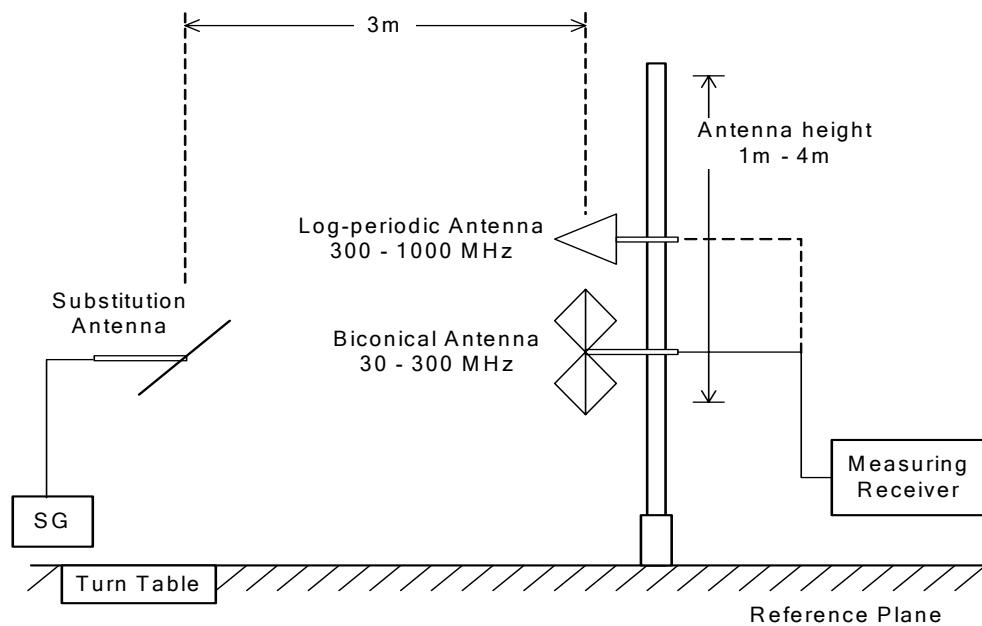


6.7 Frequency Stability (§2.1055)

Frequency Stability versus Temperature

The EUT was placed in an environmental chamber and was tested in the range from -30 to +50 degrees Celsius. The EUT was stabilized at each temperature. The power (4.0VDC) supplied was applied to the transmitter and allowed to stabilize for 10 minutes. The transmitting frequency was measured at startup and 2 minutes, 5 minutes and 10 minutes after startup. This procedure was repeated from -30 to +50 degrees Celsius at the interval of 10 degrees.

Frequency Stability versus Power Supply Voltage

The EUT was placed in an environmental chamber and was tested at the temperature of +20 degrees Celsius. The EUT was stabilized at the temperature. The power (4.0VDC) and the power (3.7VDC, the ending voltage) was applied to the EUT allowed to stabilize for 10 minutes. The transmitting frequency was measured at startup and 2 minutes, 5 minutes and 10 minutes after startup.

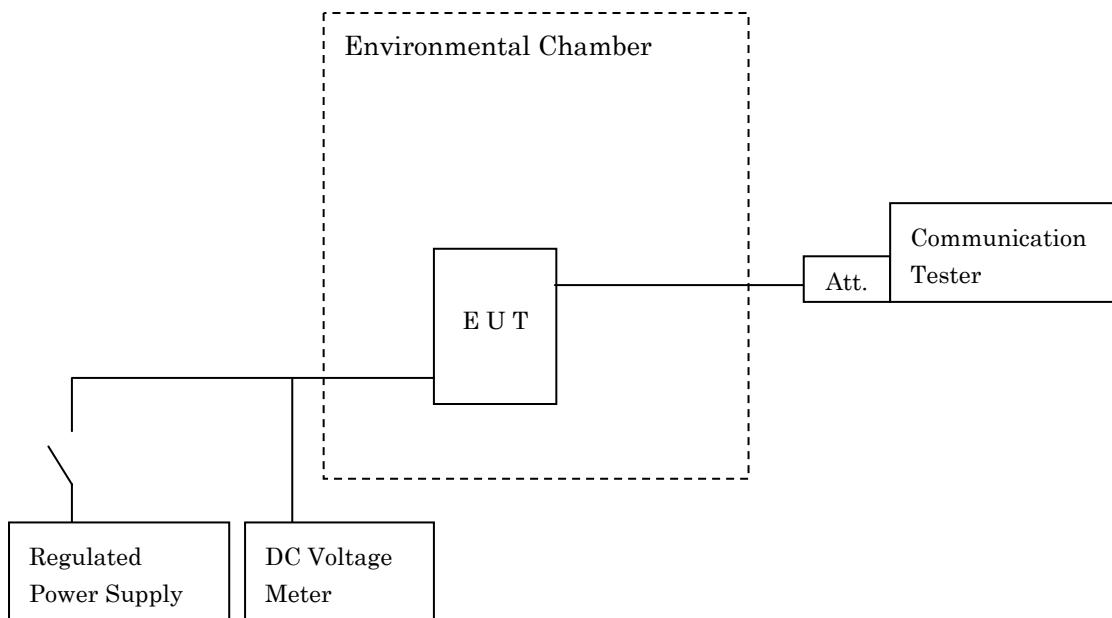

7 Equipment Under Test Modification

- No modifications were conducted by JQA to achieve compliance to the limitations.
 - To achieve compliance to the limitations, the following changes were made by JQA during the compliance test.

The modifications will be implemented in all production models of this equipment.

Applicant : Not Applicable
Date : Not Applicable
Typed Name : Not Applicable
Position : Not Applicable

Signatory : Not Applicable

8 Responsible PartyResponsible Party of Test Item (Product)

Responsible Party :

Contact Person :

Signatory

9 Deviation from Standard

- No deviations from the standard described in clause 1.
 - The following deviations were employed from the standard described in clause 1.

10 Test Results

10.1 RF Power Output (§2.1046)

10.1.1 Conducted RF Power Output

The requirements are - Applicable - Tested. - Not tested by applicant request.]
 - Not Applicable

Transmitter Power is 714.5 mW at 1880.000 MHz

Uncertainty of Measurement Results +/-0.8 dB(2σ)

Remarks : _____

10.1.2 ERP / EIRP RF Power Output

The requirements are - Applicable - Tested. - Not tested by applicant request.]
 - Not Applicable

- Passed - Failed - Not judged

Min. Limit Margin 1.3 dB at 1880.000 MHz

Max. Limit Exceeding _____ dB at _____ MHz

Uncertainty of Measurement Results +/-2.2 dB(2σ)

Remarks : The maximum EIRP is 1.479 W at 1880.000 MHz. The measurement result is within the range of measurement uncertainty.

10.2 Modulation Characteristics (§2.1047)

The requirements are - Applicable - Tested. - Not tested by applicant request.]
 - Not Applicable

- Passed - Failed - Not judged

Remarks : _____

10.3 Occupied Bandwidth (§2.1049)

The requirements are - Applicable [- Tested. - Not tested by applicant request.]
 - Not Applicable

- Passed - Failed - Not judged

The 99% Bandwidth is 244.7 kHz at 1850.200 MHz
The 26dB Bandwidth is 316.0 kHz at 1909.800 MHz

Uncertainty of Measurement Results +/-0.9 %(2o)

Remarks : _____

10.4 Spurious Emissions at Antenna Terminals (§2.1051)

The requirements are - Applicable [- Tested. - Not tested by applicant request.]
 - Not Applicable

- Passed - Failed - Not judged

Min. Limit Margin >36.1 dB at 19098.000 MHz

Max. Limit Exceeding _____ dB at _____ MHz

Uncertainty of Measurement Results
9 kHz – 1GHz +/-1.0 dB(2o)
1GHz – 18GHz +/-1.2 dB(2o)
18GHz – 40GHz +/-1.6 dB(2o)

Remarks : _____

10.5 Band-Edge Emission (§2.1051)

The requirements are - Applicable [- Tested. - Not tested by applicant request.]
 - Not Applicable

- Passed - Failed - Not judged

The Band-Edge level is -15.8 dBm at 1910.0 MHz

Uncertainty of Measurement Results +/-1.2 dB(2 σ)

Remarks : _____

10.6 Field Strength of Spurious Radiation (§2.1053)

The requirements are - Applicable [- Tested. - Not tested by applicant request.]
 - Not Applicable

- Passed - Failed - Not judged

Min. Limit Margin >22.1 dB at 13368.6 MHz

Max. Limit Exceeding _____ dB at _____ MHz

Uncertainty of Measurement Results 30 MHz – 1000 MHz +/-1.4 dB(2 σ)
above 1 GHz +/-2.2 dB(2 σ)

Remarks : _____

10.7 Frequency Stability(§2.1055)

The requirements are - Applicable [- Tested. - Not tested by applicant request.]
 - Not Applicable

The Frequency Stability level is +0.04 ppm at 1880.000 MHz

Uncertainty of Measurement Results +/-0.02 ppm(2 σ)

Remarks : _____

11 Summary

General Remarks :

The EUT was tested according to the requirements of the following standard.

CFR 47 FCC Rules and Regulations Part 24

The test configuration is shown in clause 12 to 14.

The conclusion for the test items of which are required by the applied regulation is indicated under the test results.

Determining compliance with the limits in this report was based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

Test Results :

The "as received" sample;

- fulfill the test requirements of the regulation mentioned on clause 1.
- doesn't fulfill the test requirements of the regulation mentioned on clause 1.

Reviewed by:



Shigeru Kinoshita
Deputy Manager
JQA KITA-KANSAI Testing Center
Testing Dept. SAITO EMC Branch

Tested by:



Shigeru Osawa
Deputy Manager
JQA KITA-KANSAI Testing Center
Testing Dept. SAITO EMC Branch

12 Operating Condition

The test were carried under one modulation type shown as follows:

Modulation Burst Signal : DATA TSC 5 in accordance with GSM 05.02.

The Radiated Emission test were carried under 3 test configurations shown in clause 14.

In all tests, the fully charged battery is used for the EUT.

Detailed Transmitter portion:

Transmitter frequency : 1850.2 MHz(512CH) – 1909.8 MHz(810CH)

Local frequency : 1850.2 MHz(512CH) – 1909.8 MHz(810CH)

Detailed Receiver portion:

Receiver frequency : 1930.2 MHz(512CH) – 1989.8 MHz(810CH)

Local frequency : 3860.4 MHz(512CH) – 3979.6 MHz(810CH)

Other Clock Frequency

32.768 kHz, 19.2 MHz, 24.576 MHz

13 Test Configuration

The equipment under test (EUT) consists of :



	Item	Manufacturer	Model No.	Serial No.	FCC ID
A	Cellular Phone	Sharp	103SH	004401/11/ 371712/4	APYHRO00161
B	Lithium-ion Battery	Sharp	Battery Pack SHBEE1	--	N/A
C	AC Charger	KYUSHU MITSUMI	ZTDAA1	--	N/A
D	USB conversion cable	Sharp	SHCDL1	--	N/A
E	Handsfree	Sharp	SHLDL1	--	N/A

The auxiliary equipment used for testing :


None

Type of Cable:

No.	Description	Identification (Manu. etc.)	Connector Shielded	Cable Shielded	Ferrite Core	Length (m)
1	DC Power Cord	--	NO	--	NO	1.5
2	USB conversion cable	--	--	NO	NO	0.1
3	Handsfree Cable	--	NO	--	NO	1.5

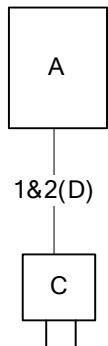14 Equipment Under Test Arrangement (Drawings)**a) Single Unit****b) AC Charger used**

120VAC 60Hz

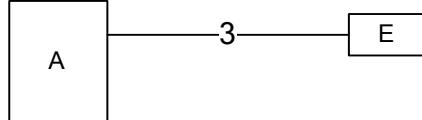c) Handsfree used

Appendix A: Test Data**A.1 RF Power Output (§2.1046)****A.1.1 Conducted RF Power Output**

(GSM-PCS1900)

Test Date: November 17, 2011
Temp.: 20 °C, Humi: 41 %

Transmitting Frequency CH	[MHz]	Correction Factor [dB]	Meter Reading (Peak) [dBm]	Results (Peak) [dBm]	Results (Peak) [mW]
512	1850.200	10.09	18.37	28.46	701.5
661	1880.000	10.09	18.45	28.54	714.5
810	1909.800	10.10	18.35	28.45	699.8

Calculated result at 1880.000 MHz, as the maximum level point shown on underline:

$$\begin{array}{rcl} \text{Correction Factor} & = & 10.09 \text{ dB} \\ +) \underline{\text{Meter Reading}} & = & \underline{18.45 \text{ dBm}} \\ \text{Result} & = & 28.54 \text{ dBm} = 714.5 \text{ mW} \end{array}$$

NOTE : The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.

A.1.2 ERP /EIRP Power Output

(GSM-PCS1900)

 Test Date: November 22, 2011
 Temp.: 19 °C. Humi: 36 %
1. Measurement Results

CH	Transmitting Frequency [MHz]	Emission Measurement [dB(uV)]		Substitution Measurement [dB(uV)]		Supplied Power to Substitution Antenna [dBm]	Gain of Substitution Antenna [dB]
		Hori. (Mh)	Vert. (Mv)	Hori. (Msh)	Vert. (Msv)		
512	1850.200	93.4	92.5	62.8	63.2	-13.1	14.1
661	1880.000	93.6	92.9	63.0	63.0	-13.2	14.3
810	1909.800	93.3	93.5	63.2	63.2	-13.2	14.5

2. Calculation Results

CH	Transmitting Frequency [MHz]	Peak EIRP [dBm]		Maximum Peak EIRP [W]	Limits [dBm]	Margin [dB]
		(EIRPh)	Vert. (EIRPv)			
512	1850.200	31.6	30.3	1.445	33.0	+ 1.4
661	1880.000	31.7	31.0	1.479	33.0	+ 1.3
810	1909.800	31.4	31.6	1.445	33.0	+ 1.4

Calculated result at 1880.000 MHz, as the worst point shown on underline:

Emission Measurement (Mh)	=	93.6 dB(uV)
Substitution Measurement (Msh)	=	-63.0 dB(uV)
Supplied Power to Substitution Antenna	=	-13.2 dBm
+) <u>Gain of Substitution Antenna</u>	=	14.3 dB
Result (EIRPh)	=	31.7 dBm = 1.479 W

Minimum Margin: 33.0 - 31.7 = 1.3 (dB)

NOTE : Setting of measuring instrument(s) :

Detector Function	Resolution B.W.	V.B.W.	Sweep Time
Peak	1 MHz	1 MHz	20 msec.

A.2 Modulation Characteristics (§2.1047)

Not Applicable


A.3 Occupied Bandwidth (§2.1049)

The resolution bandwidth was set to about 1% of emission bandwidth, -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.


Test Date : November 21, 2011
Temp.:19°C, Humi:39%

Channel	Frequency (MHz)	99% Bandwidth (kHz)	-26dBc Bandwidth (kHz)
512	1850.200	244.7	315.3
661	1880.000	244.1	314.8
810	1909.800	242.5	316.0


Low Channel

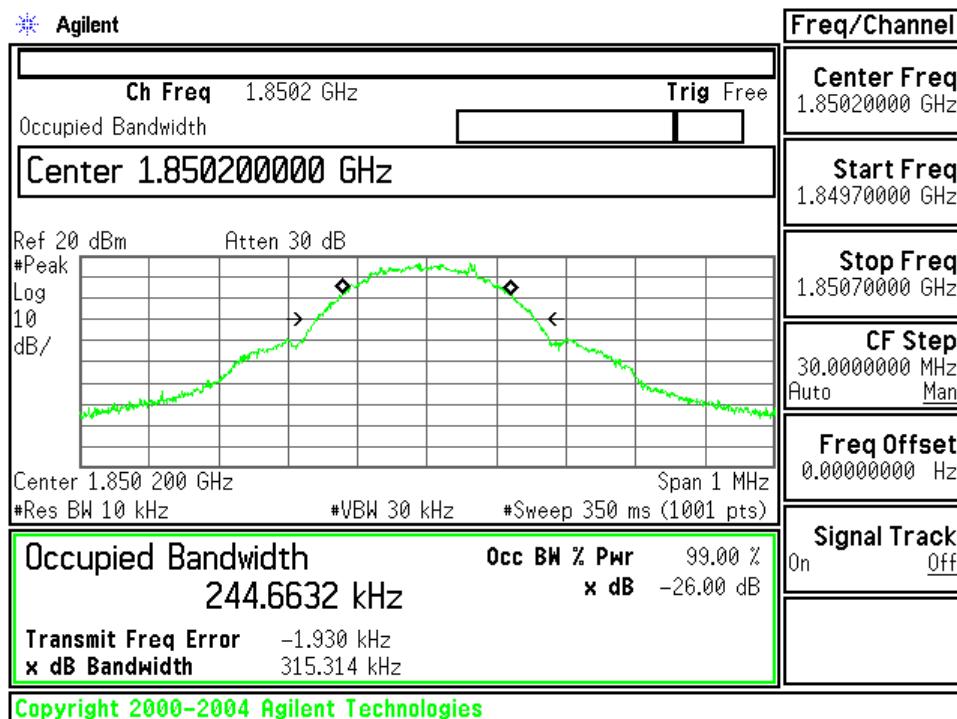

Middle Channel

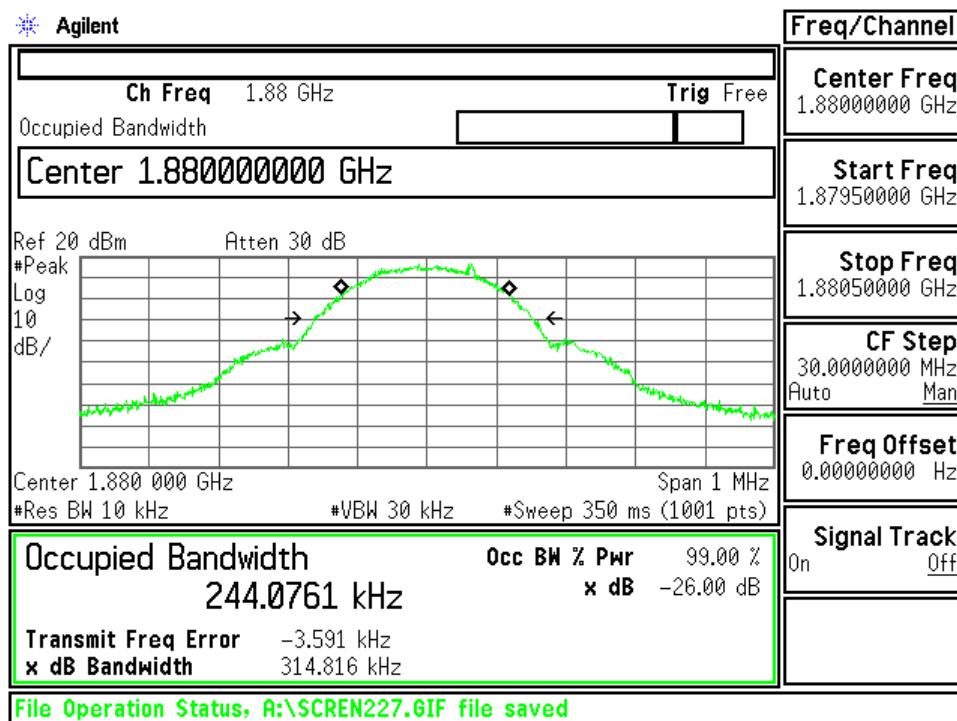

High Channel

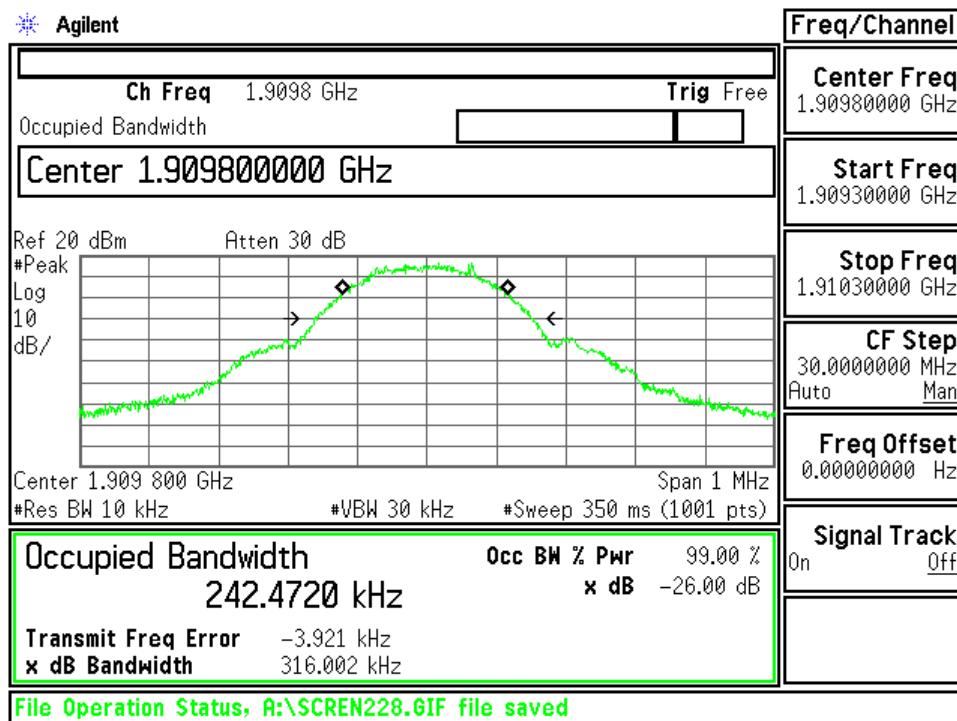

A.4 Spurious Emissions at Antenna Terminals (§2.1051)**(GSM-PCS1900)**Test Date: November 21, 2011
Temp.: 19 °C, Humi: 39 %

Transmitting Frequency CH	Measured Frequency [MHz]	Corr. Factor [dB]	Meter Readings [dBm]	Limits [dBm]	Results [dBm]	Margin [dB]	Remarks
512	1850.200	3700.400	11.1	< -63.0	-13.0	< -51.9	> +38.9
		5550.600	11.3	< -63.0	-13.0	< -51.7	> +38.7
		7400.800	11.5	< -63.0	-13.0	< -51.5	> +38.5
		9251.000	11.7	< -63.0	-13.0	< -51.3	> +38.3
		11101.200	12.0	< -63.0	-13.0	< -51.0	> +38.0
		12951.400	12.4	< -63.0	-13.0	< -50.6	> +37.6
		14801.600	12.7	< -63.0	-13.0	< -50.3	> +37.3
		16651.800	13.2	< -63.0	-13.0	< -49.8	> +36.8
		18502.000	13.7	< -63.0	-13.0	< -49.3	> +36.3
661	1880.000	3760.000	11.1	< -63.0	-13.0	< -51.9	> +38.9
		5640.000	11.3	< -63.0	-13.0	< -51.7	> +38.7
		7520.000	11.5	< -63.0	-13.0	< -51.5	> +38.5
		9400.000	11.7	< -63.0	-13.0	< -51.3	> +38.3
		11280.000	12.1	< -63.0	-13.0	< -50.9	> +37.9
		13160.000	12.4	< -63.0	-13.0	< -50.6	> +37.6
		15040.000	12.8	< -63.0	-13.0	< -50.2	> +37.2
		16920.000	13.3	< -63.0	-13.0	< -49.7	> +36.7
		18800.000	13.8	< -63.0	-13.0	< -49.2	> +36.2
810	1909.800	3819.600	11.1	< -63.0	-13.0	< -51.9	> +38.9
		5729.400	11.3	< -63.0	-13.0	< -51.7	> +38.7
		7639.200	11.5	< -63.0	-13.0	< -51.5	> +38.5
		9549.000	11.7	< -63.0	-13.0	< -51.3	> +38.3
		11458.800	12.1	< -63.0	-13.0	< -50.9	> +37.9
		13368.600	12.5	< -63.0	-13.0	< -50.5	> +37.5
		15278.400	12.9	< -63.0	-13.0	< -50.1	> +37.1
		17188.200	13.5	< -63.0	-13.0	< -49.5	> +36.5
		19098.000	13.9	< -63.0	-13.0	< -49.1	> +36.1

Calculated result at 19098.0 MHz, as the worst point shown on underline:

$$\begin{array}{rcl} \text{Corr. Factor} & = & 13.9 \text{ dB} \\ +) \underline{\text{Meter Reading}} & = & <63.0 \text{ dBm} \\ \hline \text{Result} & = & <\underline{49.1} \text{ dBm} \end{array}$$


Minimum Margin: $-13.0 - (<\underline{49.1}) = >36.1$ (dB)

NOTES


1. The spectrum was checked from 9 kHz to 20 GHz.
2. Applied limits : $-13.0 \text{ [dBm]} = 10\log(\text{TP[mW]}) - (43 + 10\log(\text{tp[W]})) = 10\log(\text{TP[mW]}) - (43 + (10 \log(\text{TP[mW]}) - 30))$
where, $\text{tp[W]} = \text{TP[mW]} / 1000$: Transmitter power at antenna terminal
3. The correction factor is shown as follows:
Corr. Factor [dB] = Cable Loss + 10dB Pad Att. [dB] (9 kHz - 2 GHz)
Corr. Factor [dB] = Cable Loss + 10dB Pad Att. + High Pass Filter Loss (D-96) [dB] (over 2 GHz)
4. The symbol of “<” means “or less”.
5. The symbol of “>” means “more than”.
6. Setting of measuring instrument(s) :

	Detector Function	RES B.W.	V.B.W.	Sweep Time
A	Peak	200 Hz	1 kHz	AUTO
B	Peak	10 kHz	30 kHz	AUTO
C	Peak	1 MHz	3 MHz	AUTO


Low Channel, Out-Of-Band Emissions (9 kHz – 150 kHz)

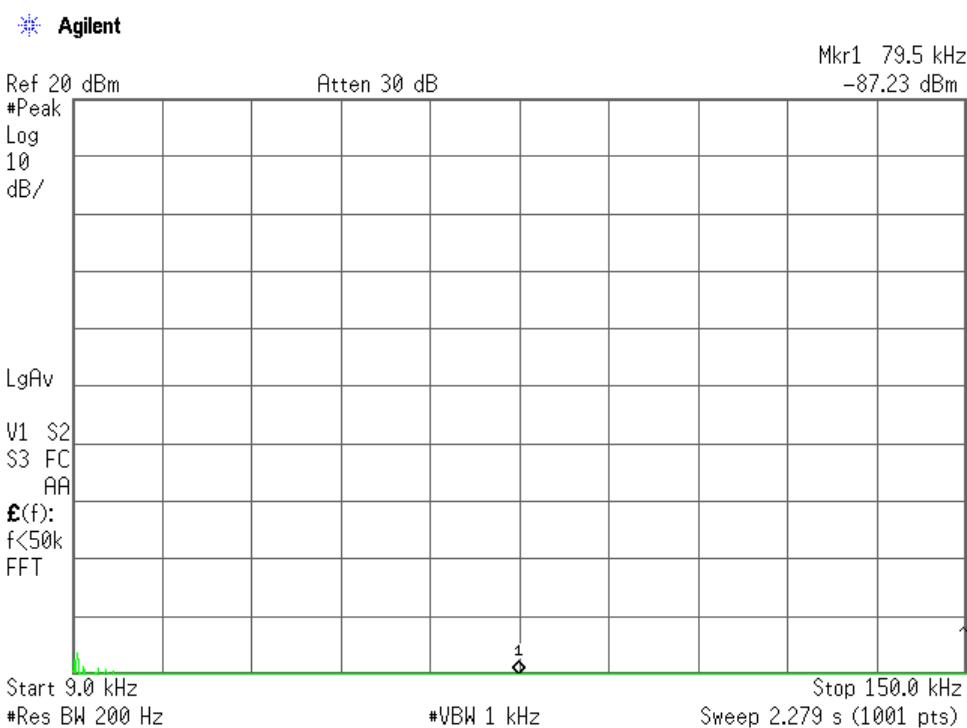


Low Channel, Out-Of-Band Emissions (150 kHz – 30 MHz)

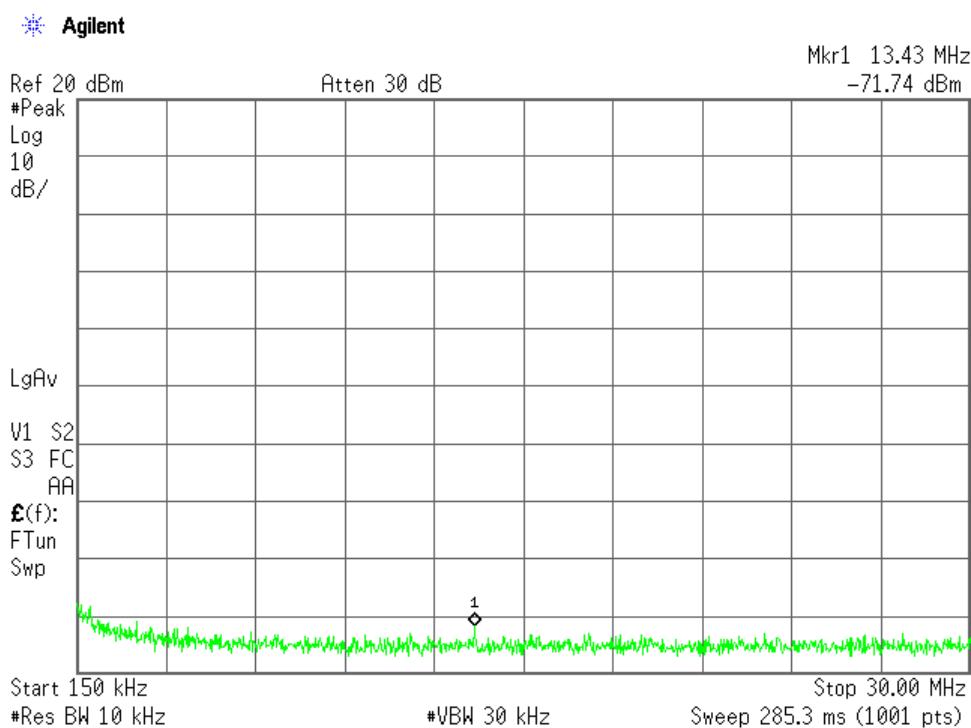


Low Channel, Out-Of-Band Emissions (30 MHz – 2 GHz)

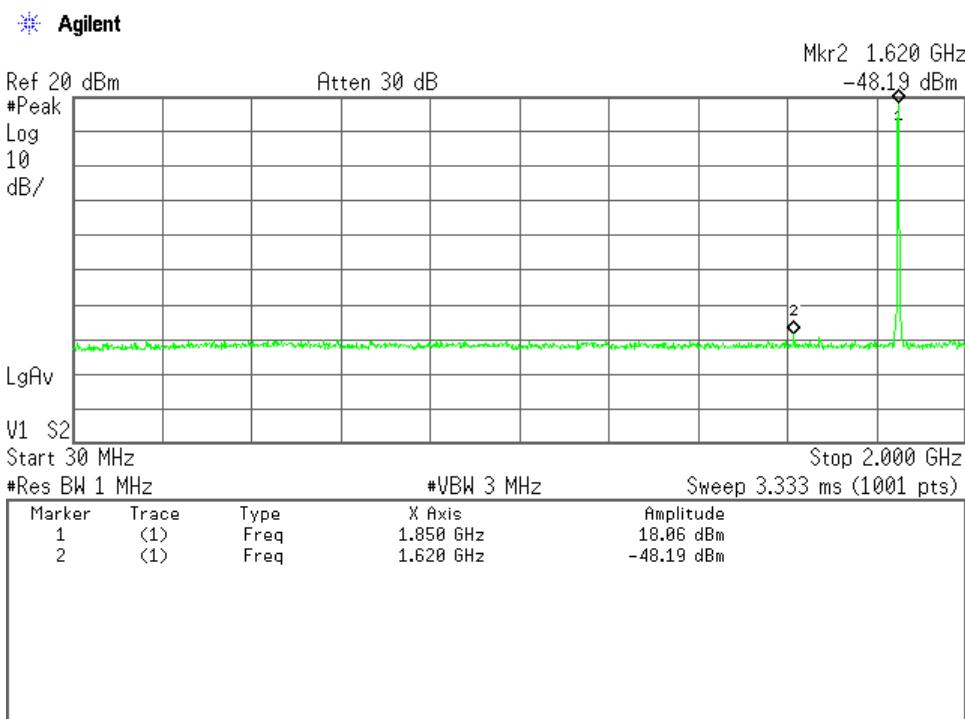


Low Channel, Out-Of-Band Emissions (2 GHz – 20 GHz)

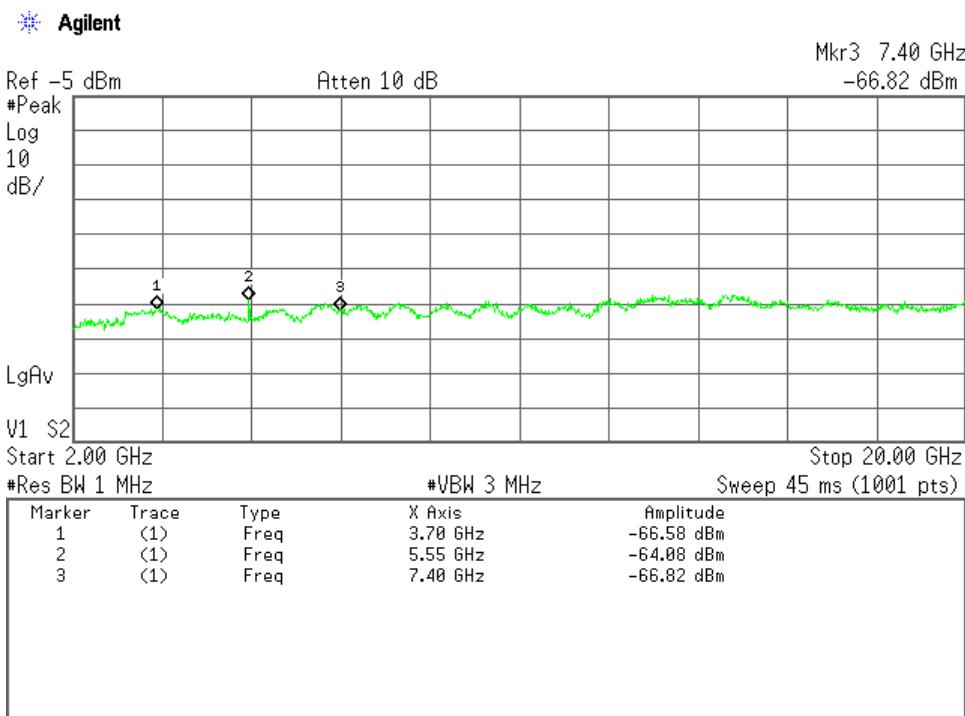


Middle Channel, Out-Of-Band Emissions (9 kHz – 150 kHz)

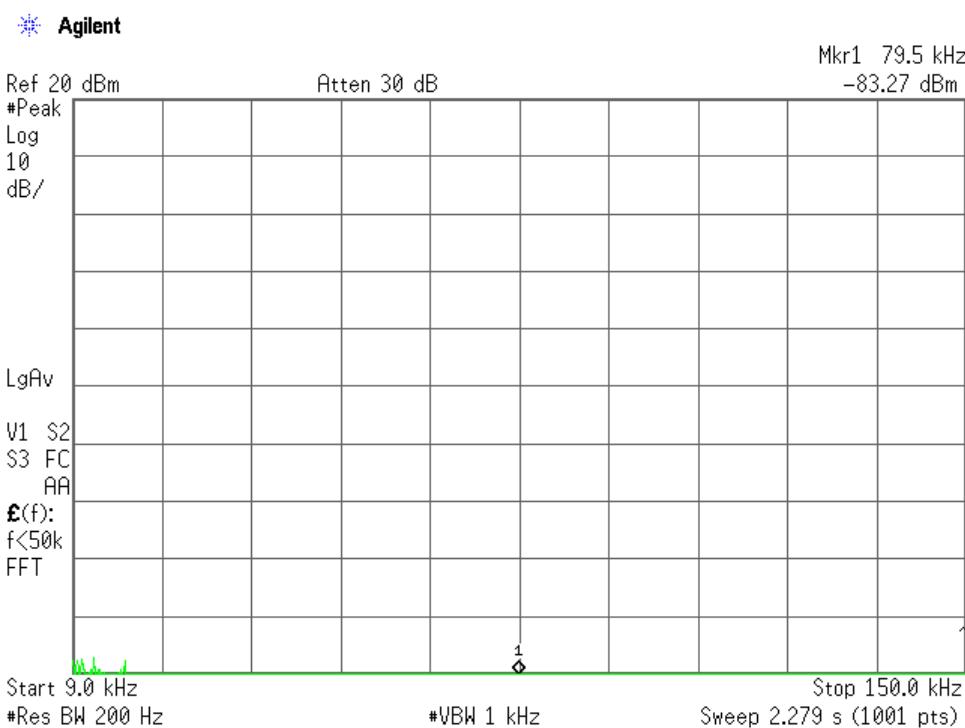


Middle Channel, Out-Of-Band Emissions (150 kHz – 30 MHz)

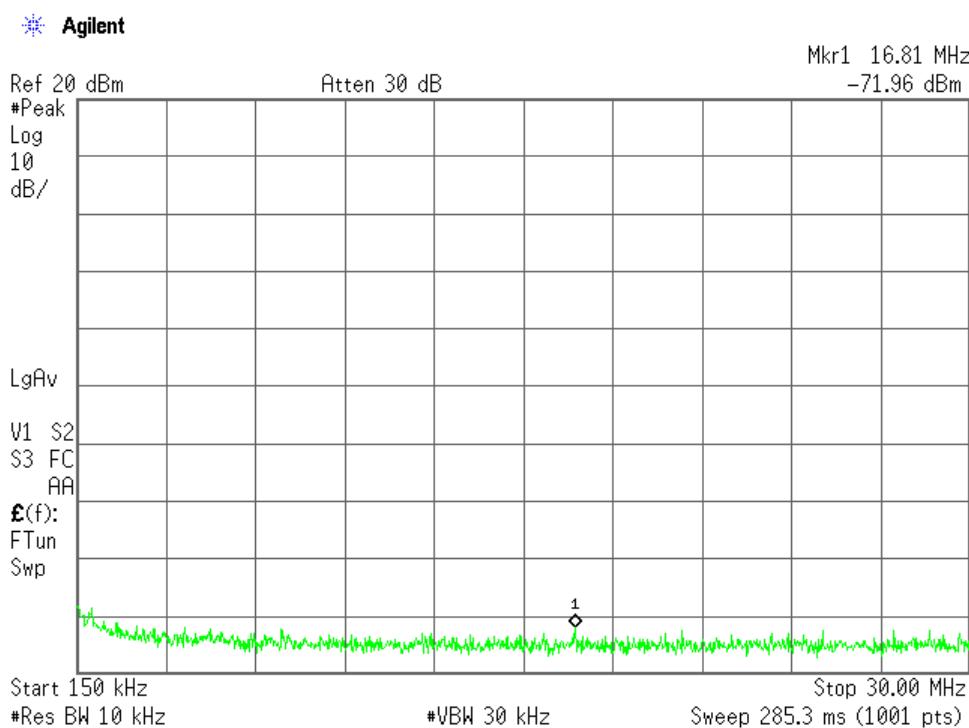


Middle Channel, Out-Of-Band Emissions (30 MHz – 2 GHz)

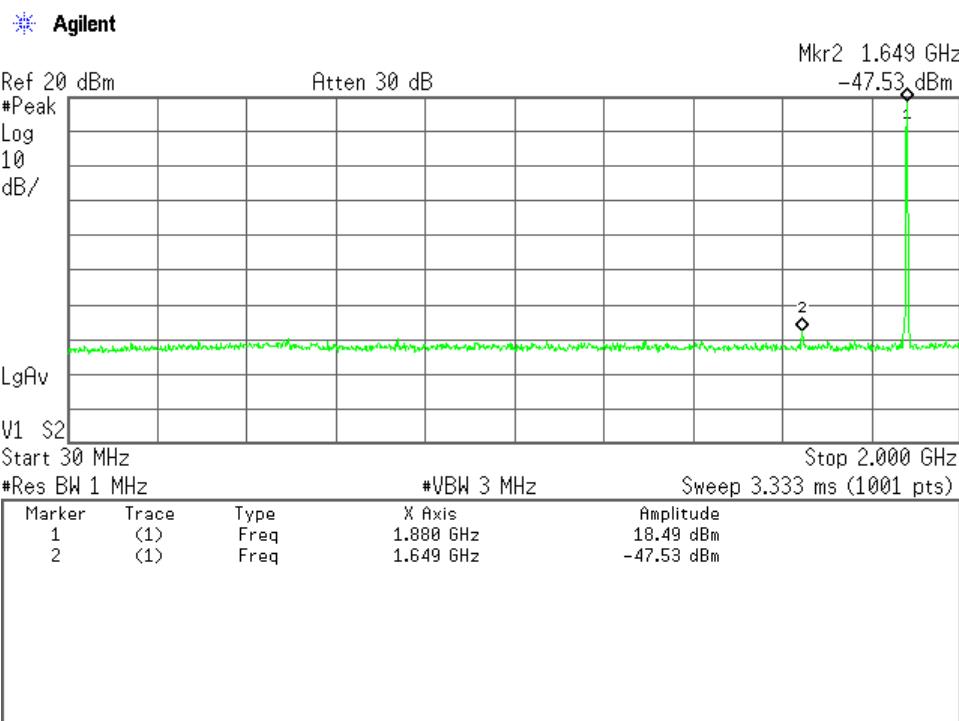


Middle Channel, Out-Of-Band Emissions (2 GHz – 20 GHz)

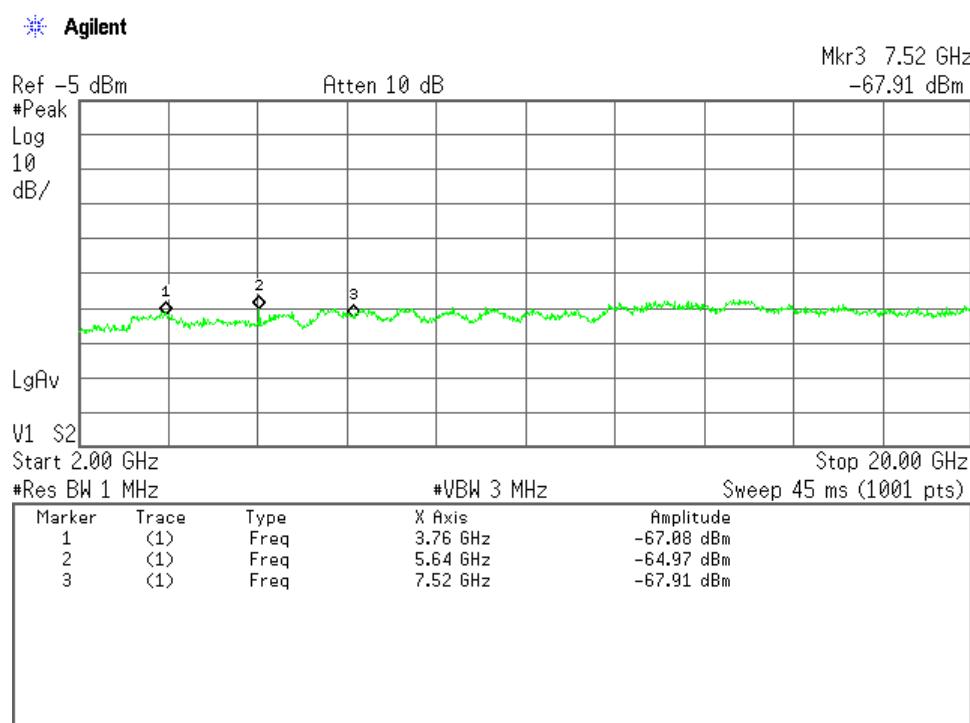


High Channel, Out-Of-Band Emissions (9 kHz – 150 kHz)

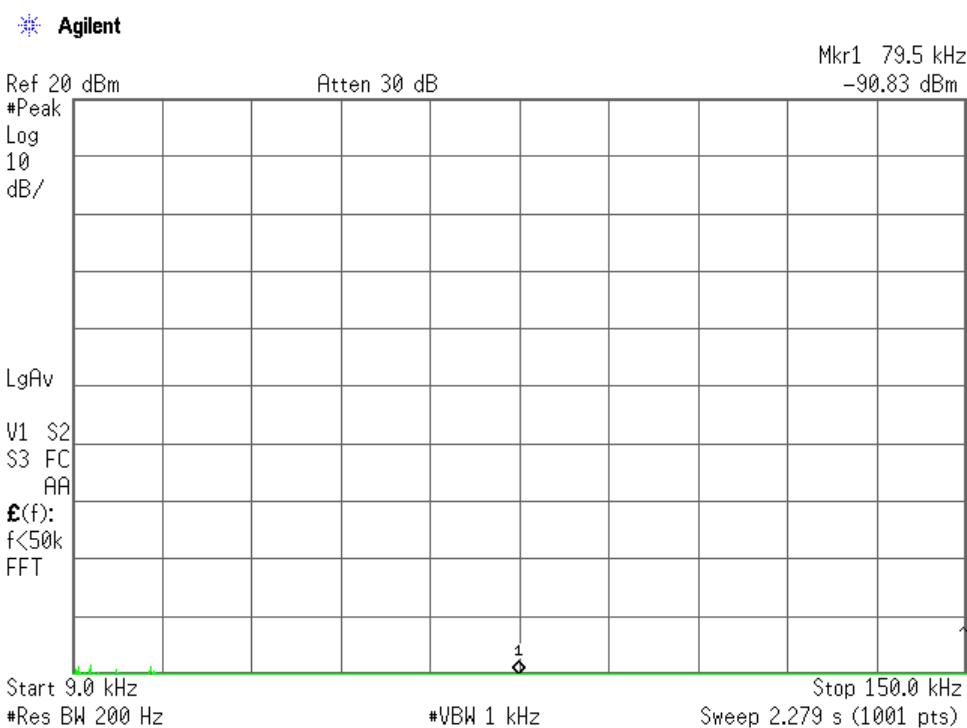


High Channel, Out-Of-Band Emissions (150 kHz – 30 MHz)

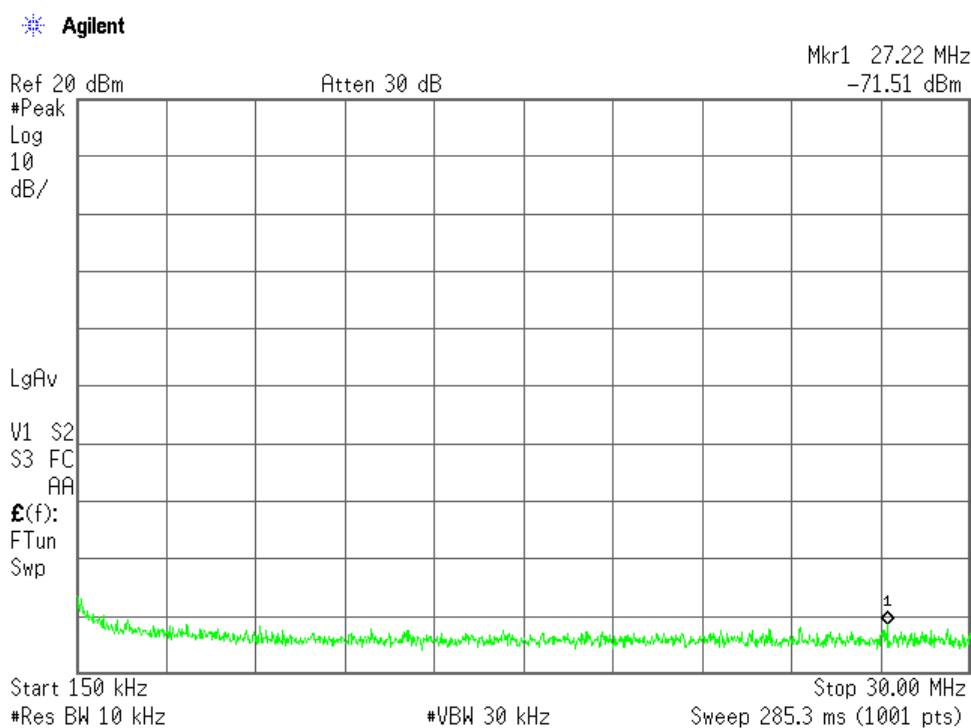

High Channel, Out-Of-Band Emissions (30 MHz – 2 GHz)

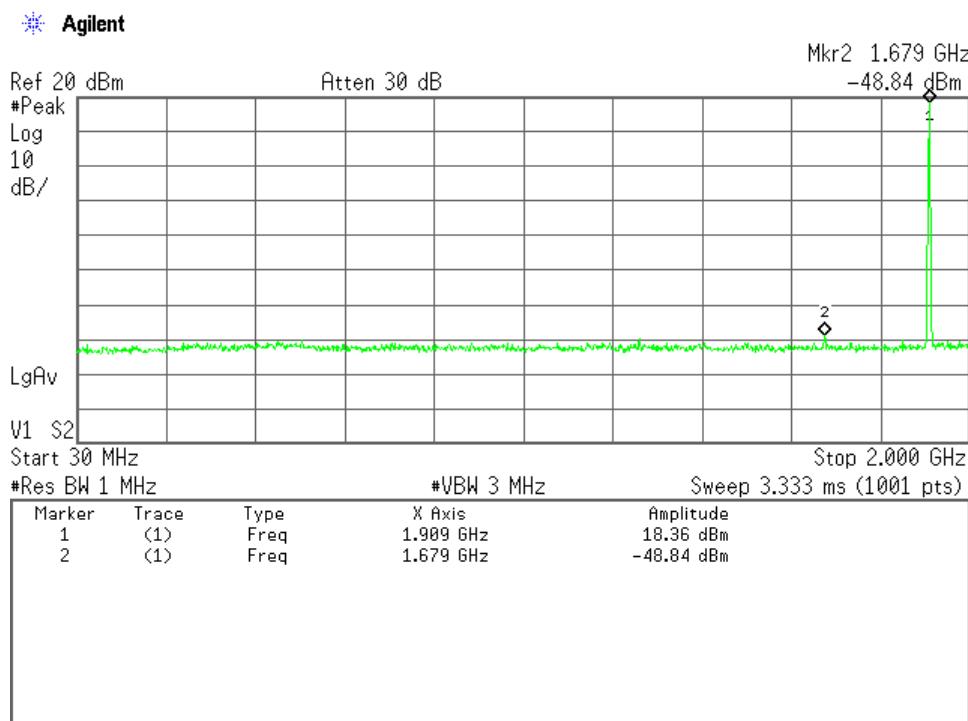

High Channel, Out-Of-Band Emissions (2 GHz – 20 GHz)

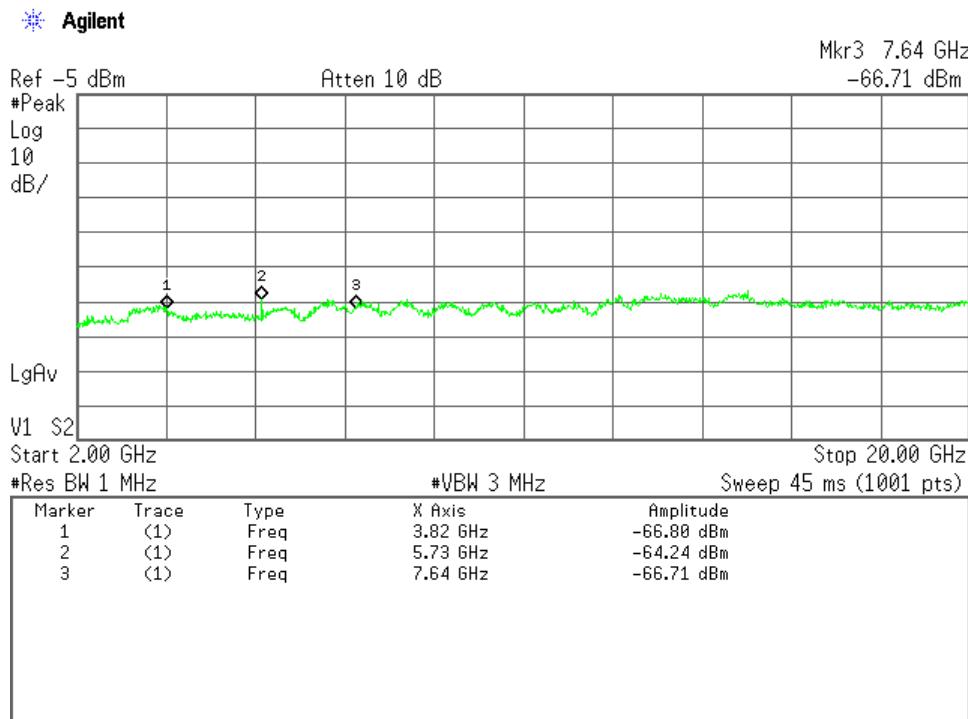


A.5 Band-Edge Emission(§2.1051)

Test Date : November 21, 2011
Temp.:19°C, Humi:39%


(GSM-PCS1900)

Channel	Frequency (MHz)	Band-Edge Frequency (MHz)	Band-Edge Level (dBm)
512	1850.200	1850.00	-18.1
810	1909.800	1910.00	-15.8

Low Channel, Band-Edge Emission

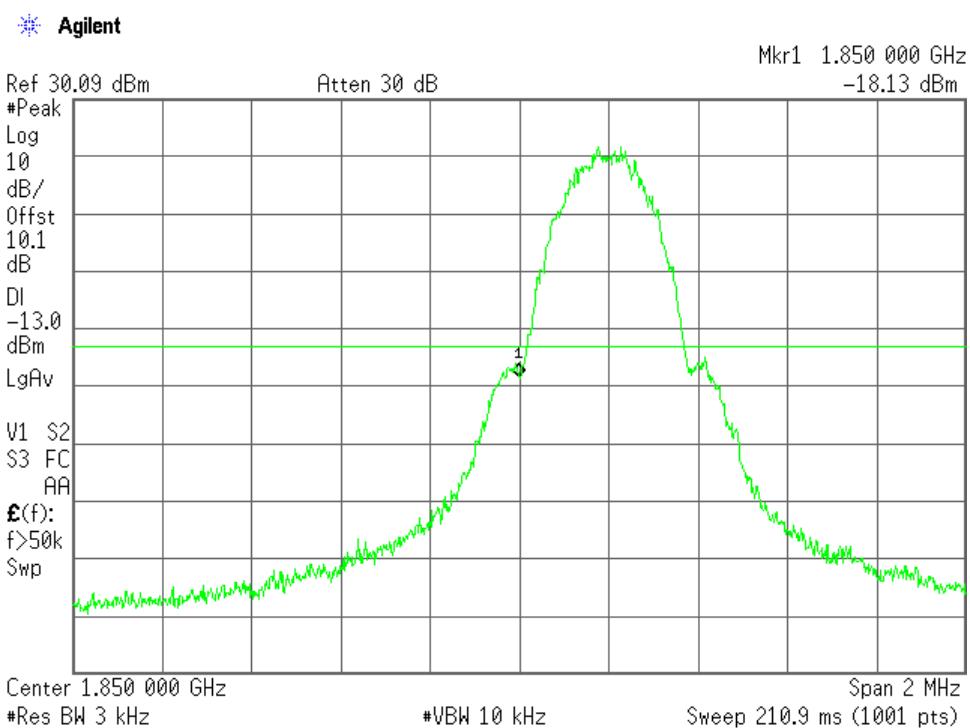

High Channel, Band-Edge Emission

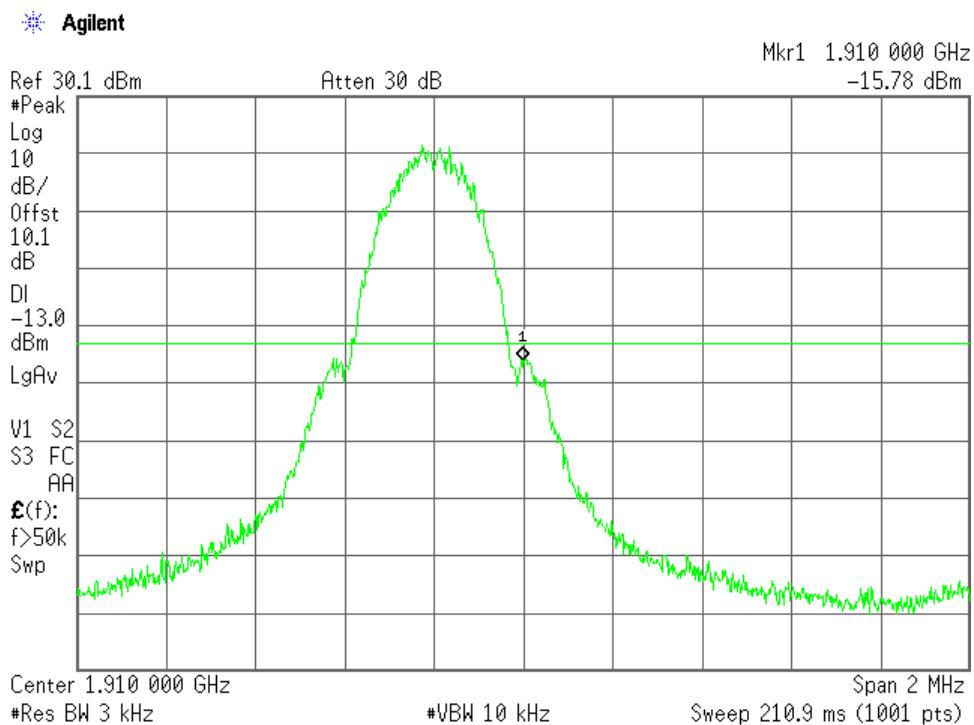

A.6 Field Strength of Spurious Radiation (§2.1053)

(GSM-PCS1900)

Test Configuration : Single Unit

Test Date: November 24, 2011
Temp.: 20 °C. Humi: 30 %

CH	Transmitting Frequency [MHz]	Measured Frequency [MHz]	ERP [dBm]		Limits [dBm]	Margin [dB]	Remarks
			Hori.	Vert.			
512	1850.200	3700.400	-52.6	-52.9	-13.0	+39.6	C
		5550.600	-42.2	-42.3	-13.0	+29.2	C
		7400.800	< -46.5	< -46.5	-13.0	> +33.5	C
		9251.000	< -40.7	< -40.7	-13.0	> +27.7	C
		11101.200	< -39.7	< -39.7	-13.0	> +26.7	C
		12951.400	< -35.2	< -35.2	-13.0	> +22.2	C
		14801.600	< -35.3	< -35.3	-13.0	> +22.3	C
		16651.800	< -45.7	< -45.7	-13.0	> +32.7	C
		18502.000	< -38.7	< -38.7	-13.0	> +25.7	C
		3760.000	-49.9	-50.5	-13.0	+36.9	C
661	1880.000	5640.000	-39.2	-42.0	-13.0	+26.2	C
		7520.000	< -46.4	< -46.4	-13.0	> +33.4	C
		9400.000	< -40.6	< -40.6	-13.0	> +27.6	C
		11280.000	< -39.9	< -39.9	-13.0	> +26.9	C
		13160.000	< -35.2	< -35.2	-13.0	> +22.2	C
		15040.000	< -35.4	< -35.4	-13.0	> +22.4	C
		16920.000	< -45.9	< -45.9	-13.0	> +32.9	C
		18800.000	< -38.8	< -38.8	-13.0	> +25.8	C
		3819.600	-51.1	-51.1	-13.0	+38.1	C
		5729.400	-40.3	-40.3	-13.0	+27.3	C
810	1909.800	7639.200	< -44.1	< -44.1	-13.0	> +31.1	C
		9549.000	< -40.5	< -40.5	-13.0	> +27.5	C
		11458.800	< -39.8	< -39.8	-13.0	> +26.8	C
		13368.600	< -35.1	< -35.1	-13.0	> +22.1	C
		15278.400	< -35.4	< -35.4	-13.0	> +22.4	C
		17188.200	< -45.8	< -45.8	-13.0	> +32.8	C
		19098.000	< -38.7	< -38.7	-13.0	> +25.7	C

Calculated result at 13368.6 MHz, as the worst point shown on underline:
Minimum Margin: -13.0 - (<-35.1) = >22.1 (dB)

NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 30 MHz to 20 GHz.
3. All emissions not reported were more than 20 dB below the applied limits.
4. Applied limits : $-13.0 \text{ [dBm]} = 10\log(\text{TP[mW]}) - (43 + 10\log(\text{tp[W]})) = 10\log(\text{TP[mW]}) - (43 + (10 \log(\text{TP[mW]}) - 30))$
where, $\text{tp[W]} = \text{TP[mW]} / 1000$: Transmitter power at antenna terminal
5. The symbol of “<” means “or less”.
6. The symbol of “>” means “more than”.
7. Setting of measuring instrument(s) :

	Detector Function	RES B.W.	V.B.W.	Sweep Time
A	Peak	10 kHz	30 kHz	20 msec.
B	Peak	100 kHz	300 kHz	20 msec.
C	Peak	1 MHz	3 MHz	20 msec.

A.7 Frequency Stability (§2.1055)

(GSM-PCS1900)

Test Date: November 28, 2011
- November 29, 2011**1. Frequency Stability Measurement versus Temperature**Transmitting Frequency : 1880.000 MHz (661 ch)
DC Supply Voltage : 4.0 VDC

Ambient Temperature [°C]	Startup	Deviation [ppm]			Limits [ppm]	Margin [ppm]
		2 minutes	5 minutes	10 minutes		
-30	<u>+ 0.04</u>	+ 0.03	+ 0.02	+ 0.02	N/A	N/A
-20	<u>+ 0.04</u>	+ 0.03	+ 0.03	+ 0.02	N/A	N/A
-10	<u>+ 0.04</u>	+ 0.02	+ 0.02	+ 0.02	N/A	N/A
0	+ 0.01	+ 0.01	+ 0.01	+ 0.01	N/A	N/A
10	- 0.01	- 0.01	- 0.01	+ 0.01	N/A	N/A
20	- 0.02	- 0.01	- 0.01	+ 0.01	N/A	N/A
30	- 0.02	- 0.01	- 0.01	+ 0.01	N/A	N/A
40	- 0.01	- 0.01	- 0.01	- 0.01	N/A	N/A
50	- 0.01	+ 0.01	+ 0.01	+ 0.01	N/A	N/A

2. Frequency Stability Measurement versus Power Supply VoltageTransmitting Frequency : 1880.000 MHz (661 ch)
Ambient Temperature: : 20 °C

DC Supply Voltage [V]	Startup	Deviation [ppm]			Limits [ppm]	Margin [ppm]
		2 minutes	5 minutes	10 minutes		
4.0	- 0.02	- 0.01	- 0.01	+ 0.01	N/A	N/A
3.7 (Ending)	- 0.02	- 0.01	- 0.01	+ 0.01	N/A	N/A

Test condition example as the maximum deviation point shown on underline:

Ambient Temperature : -30 °C / Startup

DC Supply Voltage : 4 VDC

NOTE : The measurement were made after all of components of the oscillator sufficiently stabilized at each temperature.

Appendix B: Test Arrangement (Photographs)

Radiated Emission

This page is CONFIDENTIAL.

This page is CONFIDENTIAL.

Appendix C: Test Instruments**C.1 RF Power Output****C.1.1 Conducted RF Power Output**

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Power Meter	N1911A	Agilent	B-63	2011/7	1 Year
Power Sensor	N1921A	Agilent	B-64	2011/7	1 Year
Attenuator	54A-10	Weinschel	D-28	2011/9	1 Year
RF Cable	SUCOFLEX102	SUHNER	C-52	2011/6	1 Year

C.1.2 ERP /EIRP Power Output

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Test Receiver	ESU 26	Rohde & Schwarz	A-6	2011/5	1 Year
Signal Generator	E8257D	Agilent	B-39	2011/8	1 Year
Power Meter	N1911A	Agilent	B-63	2011/7	1 Year
Power Sensor	N1921A	Agilent	B-64	2011/7	1 Year
Attenuator(RX)	2-10	Weinschel	D-79	2011/11	1 Year
Attenuator(TX)	2-10	Weinschel	D-80	2011/11	1 Year
RF Cable(RX)	SUCOFLEX104	SUHNER	C-40-11	2010/12	1 Year
RF Cable(TX)	SUCOFLEX 102/E	SUHNER	C-70	2010/11	1 Year
Horn Antenna(TX)	91889-2	EATON	C-40-2	2011/6	2 Years
Horn Antenna(RX)	91889-2	EATON	C-41-2	2011/6	1 Year

B.2 Modulation Characteristics

Not Applicable

C.3 Occupied Bandwidth

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Spectrum Analyzer	E4446A	Agilent	A-39	2011/9	1 Year
Attenuator	54A-10	Weinschel	D-28	2011/9	1 Year
RF Cable	SUCOFLEX102	SUHNER	C-52	2011/6	1 Year

C.4 Spurious Emissions at Antenna Terminals

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Spectrum Analyzer	E4446A	Agilent	A-39	2011/9	1 Year
Attenuator	54A-10	Weinschel	D-28	2011/9	1 Year
RF Cable	SUCOFLEX102	SUHNER	C-52	2011/6	1 Year
HPF	HPM13899	MICRO-TRONICS	D-96	2011/2	1 Year

C.5 Band-Edge Emission

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Spectrum Analyzer	E4446A	Agilent	A-39	2011/9	1 Year
Attenuator	54A-10	Weinschel	D-28	2011/9	1 Year
RF Cable	SUCOFLEX102	SUHNER	C-52	2011/6	1 Year

C.6 Field Strength of Spurious Radiation

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Test Receiver	ESU 26	Rohde & Schwarz	A-6	2011/5	1 Year
Signal Generator	E8257D	Agilent	B-39	2011/8	1 Year
Power Meter	N1911A	Agilent	B-63	2011/7	1 Year
Power Sensor	N1921A	Agilent	B-64	2011/7	1 Year
Horn Antenna(TX)	91889-2	EATON	C-40-2	2011/6	1 Year
Horn Antenna	91888-2	EATON	C-41-1	2011/6	1 Year
Horn Antenna(RX)	91889-2	EATON	C-41-2	2011/6	1 Year
Horn Antenna	3160-04	EATON	C-55	2011/6	2 Years
Horn Antenna	3160-05	EATON	C-56	2011/6	2 Years
Horn Antenna	3160-06	EATON	C-57	2011/6	2 Years
Horn Antenna	3160-07	EATON	C-58	2011/6	2 Years
Horn Antenna	3160-08	EATON	C-59	2011/6	2 Years
Horn Antenna)	3160-09	EATON	C-48	2011/6	2 Years
RF Cable(TX)	SUCOFLEX E102E	SUHNER	C-70	2010/11	1 Year
RF Cable(RX)	SUCOFLEX104	SUHNER	C-40-11	2010/12	1 Year
RF Cable(RX)	SUCOFLEX104	SUHNER	C-40-14	2010/12	1 Year
Attenuator(TX)	2-10	Weinschel	D-40	2011/9	1 Year
Attenuator(RX)	2-10	Weinschel	D-79	2011/11	1 Year
Attenuator(RX)	54-10	Weinschel	D-29	2011/9	1 Year
Pre-Amplifier	WJ-6611-513	Watkins Johnson	A-23	2010/12	1 Year
Pre-Amplifier	WJ-6882-824	Watkins Johnson	A-21	2010/12	1 Year
Pre-Amplifier	DBL-0618N515	DBS Microwave	A-33	2010/12	1 Year
HPF	HPM13899	MICRO-TRONICS	D-96	2011/2	1 Year

C.7 Frequency Stability

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Universal Telecommunication Tester	CMU200	Rohde&Schwarz	B-21	2011/4	1 Year
DC Voltage Meter	2011-39	YEW	B-33	2011/4	1 Year
Environmental Chamber	SH-641	ESPEC	F-32	2011/6	1 Year
DC Power Supply	NL035-10	TAKASAGO	F-4	N/A	N/A