

TEST REPORT (SAR EVALUATION)

Applicant : Sharp Corporation, Communication Systems Group
Address : 2-13-1, Iida, Hachihonmatsu, Higashi-Hiroshima City, Hiroshima,
739-0192, Japan

Products : Cellular Phone
Model No. : SH-06E
Serial No. : 004401114715176
FCC ID : APYHRO00189

Test Standard : FCC/OET Bulletin 65 Supplement C (Edition 01-01)

Test Results : **Passed**

Date of Test : April 3 ~ 9, 2013



A handwritten signature in black ink, appearing to read 'K. Shibata', positioned above a horizontal line.

Kousei Shibata
Manager
Japan Quality Assurance Organization
KITA-KANSAI Testing Center
SAITO EMC Branch
7-3-10, Saito-asagi, Ibaraki-shi, Osaka 567-0085, Japan

-
- The measurement values stated in Test Report was made with traceable to National Institute of Advanced Industrial Science and Technology (AIST) of Japan, National Institute of Information and Communications Technology (NICT) of Japan , and Laboratory for EMF and Microwave Electronics at the Swiss Federal Institute of Technology (ETH) in Zürich, Switzerland.
 - The applicable standard, testing condition and testing method which were used for the tests are based on the request of the applicant.
 - The test results presented in this report relate only to the offered test sample.
 - The contents of this test report cannot be used for the purposes, such as advertisement for consumers.
 - This test report shall not be reproduced except in full without the written approval of JQA.
 - VLAC does not approve, certify or warrant the product by this test report.

TABLE OF CONTENTS

	Page
1 Description of the Device Under Test (DUT).....	3
2 Summary of Test Results.....	4
3 Test Procedure.....	5
4 Test Location.....	5
5 Recognition of Test Laboratory.....	5
6 Measurement System Diagram.....	6
7 System Components.....	7
8 Measurement Process.....	11
9 Measurement Uncertainties.....	12
10 Test Arrangement.....	14
11 Tissue Verification.....	16
12 System Validation.....	17
13 RF Output Power Measurements.....	19
14 SAR Measurements.....	27
15 Test Setup Photographs.....	50
16 Test Instruments.....	55
17 Appendix.....	56

1 Description of the Device Under Test (DUT)

1. Manufacturer : Sharp Corporation, Communication Systems Group
2-13-1, Iida, Hachihonmatsu, Higashi-Hiroshima City, Hiroshima,
739-0192, Japan
2. Products : Cellular Phone
3. Model No. : SH-06E
4. Serial No. : 004401114715176
5. Product Type : Pre-production
6. Date of Manufacture : March, 2013
7. Transmitting Frequency : 826.4 MHz – 846.6 MHz (WCDMA Band V)
824.2 MHz – 848.8 MHz (GSM 850)
1850.2 MHz – 1909.8 MHz (PCS 1900)
2402 MHz – 2480 MHz (Bluetooth)
2412 MHz – 2462 MHz (WLAN 802.11b/g/n)
5150 MHz – 5250 MHz (WLAN 802.11a/n/ac, W52)
5250 MHz – 5350 MHz (WLAN 802.11a/n/ac, W53)
5470 MHz – 5725 MHz (WLAN 802.11a/n/ac, W56)
8. Battery Option : Lithium-ion Battery Pack 1UPF395689T-N001H (2600mAh)
9. Power Rating : 4.0VDC
10. EUT Grounding : None
11. Device Category : Portable Device (§2.1093)
12. Exposure Category : General Population/Uncontrolled Exposure
13. FCC Rule Part(s) : 24(E), 15.247, 15.407
14. EUT Authorization : Certification
15. Received Date of DUT : April 2, 2013

2 Summary of Test Results

Applied Standard : FCC/OET Bulletin 65 Supplement C (Edition 01-01)
 Evaluating Compliance with FCC Guidelines for Human Exposure to Radio-frequency Electromagnetic Fields
Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions

Band	Test Configuration	Reported 1 g SAR (W/kg)	Limit (W/kg)
WCDMA Band V	Head	0.27	1.6
	Body & Hotspot	0.69	
GSM 850	Head	0.27	
	Body & Hotspot	0.77	
PCS 1900	Head	0.28	
	Body & Hotspot	0.45	
WLAN 2.4 GHz	Head	0.10	
	Body & Hotspot	0.16	
WLAN 5.2 GHz	Head	0.17	
	Body	0.13	
WLAN 5.3 GHz	Head	0.22	
	Body	0.16	
WLAN 5.6 GHz	Head	0.26	
	Body	0.12	
Simultaneous transmission condition		0.92	

The test results are **passed** for exposure limits specified in ANSI/IEEE Std. C95.1-1991.

In the approval of test results,

- Determining compliance with the limits in this report was based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.
- No deviations were employed from the applied standard.
- No modifications were conducted by JQA to achieve compliance to the limitations.

Reviewed by:

Tested by:



Shigeru Kinoshita
 Deputy Manager
 JQA KITA-KANSAI Testing Center
 SAITO EMC Branch



Yasuhisa Sakai
 Deputy Manager
 JQA KITA-KANSAI Testing Center
 SAITO EMC Branch

3 Test Procedure

The tests documented in this report were performed in accordance with FCC/OET Bulletin 65 Supplement C (Edition 01-01), IEEE Std.1528-2003 and the following KDB Procedures.

- # 248227 D01 SAR meas for 802 11 a b g v01r02
- # 447498 D01 General RF Exposure Guidance v05
- # 648474 D04 SAR Handsets Multi Xmitter and Ant v01
- # 865664 D01 SAR measurement 100 MHz to 6 GHz v01
- # 865664 D02 SAR Reporting v01
- # 941225 D01 SAR test for 3G devices v02
- # 941225 D02 Guidance PBA for 3GPP R6 HSPA v02r01
- # 941225 D03 SAR Test Reduction GSM GPRS EDGE v01
- # 941225 D06 Hot Spot SAR v01

4 Test Location

Japan Quality Assurance Organization (JQA)
KITA-KANSAI Testing Center
7-7, Ishimaru, 1-chome, Minoh-shi, Osaka, 562-0027, Japan
SAITO EMC Branch
7-3-10, Saito-asagi, Ibaraki-shi, Osaka 567-0085, Japan

5 Recognition of Test Laboratory

JQA KITA-KANSAI Testing Center SAITO EMC Branch is accredited under ISO/IEC 17025 by following accreditation bodies and the test facility is registered by the following bodies.


- VLAC Accreditation No. : VLAC-001-2 (Expiry date : March 30, 2014)
- VCCI Registration No. : A-0002 (Expiry date : March 30, 2014)
- BSMI Registration No. : SL2-IS-E-6006, SL2-IN-E-6006, SL2-A1-E-6006
(Expiry date : September 14, 2013)
- IC Registration No. : 2079E-3, 2079E-4 (Expiry date : July 20, 2014)

Accredited as conformity assessment body for Japan electrical appliances and material law by METI.
(Expiry date : February 22, 2016)

6 Measurement System Diagram

These measurements are performed using the DASY4 automated dosimetric assessment system (manufactured by Schmid & Partner Engineering AG (SPEAG) in Zürich, Switzerland). It consists of high precision robotics system, cell controller system, DASY4 measurement server, personal computer with DASY4 software, data acquisition electronic (DAE) circuit, the Electro-optical converter (EOC), near-field probe, and the twin SAM phantom containing the equivalent tissue. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF).

The Robot is connected to the cell controller to allow software manipulation of the robot. The DAE is connected to the EOC. The DAE performs the signal amplification, signal multiplexing, A/D conversion, offset measurements, mechanical surface detection, collision detection, etc. The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the DASY4 measurement server.

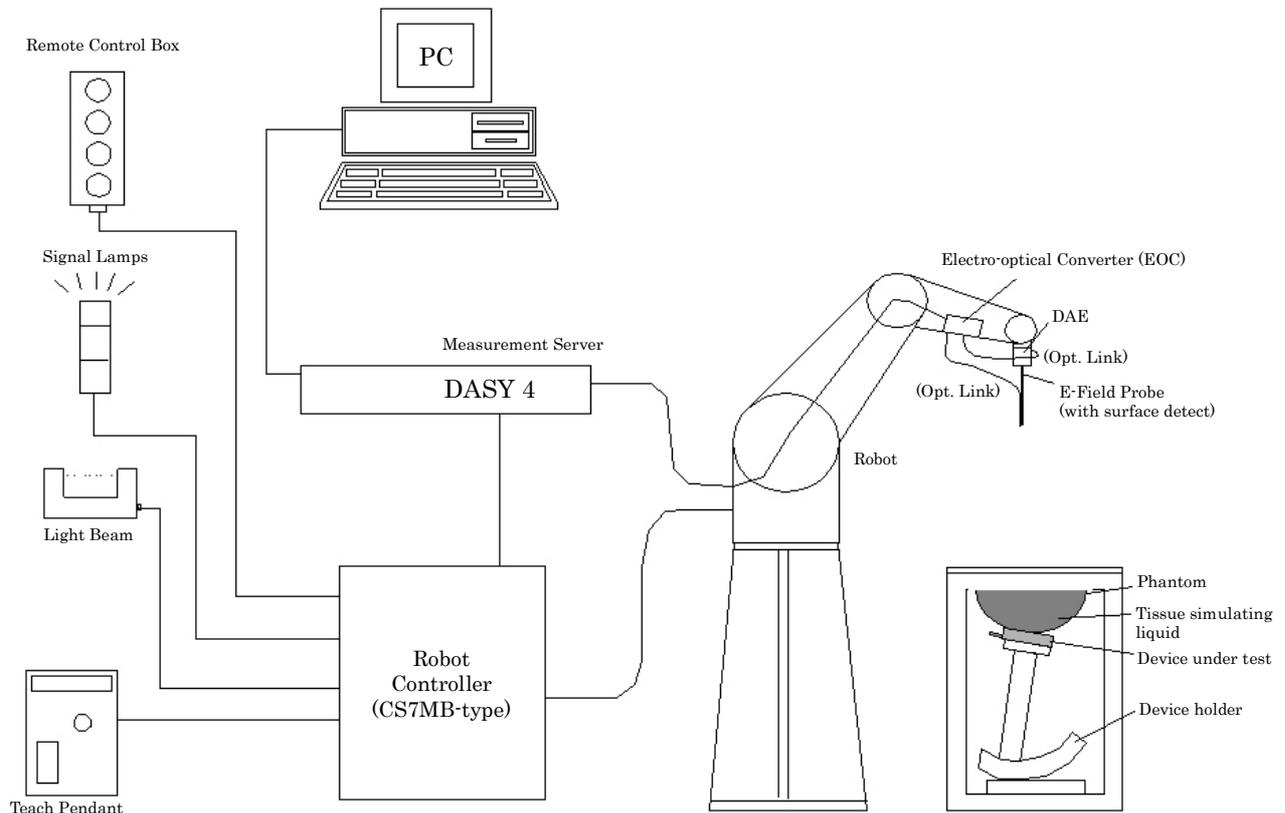

7 System Components

7.1 Probe Specification ET3DV6

Construction : Symmetrical design with triangular core
Built-in optical fiber for surface detection system
Built-in shielding against static changes
PEEK enclosure material (resistant to organic solvents, e.g., DGBE)

Calibration : In air form 10 MHz to 2.3 GHz
In head tissue simulating liquid (HSL) and muscle tissue simulating liquid
835 MHz (accuracy $\pm 12.0\%$; $k=2$)
900 MHz (accuracy $\pm 12.0\%$; $k=2$)
1450 MHz (accuracy $\pm 12.0\%$; $k=2$)
1750 MHz (accuracy $\pm 12.0\%$; $k=2$)
1900 MHz (accuracy $\pm 12.0\%$; $k=2$)
1950 MHz (accuracy $\pm 12.0\%$; $k=2$)



Frequency : 10 MHz to 2.3 GHz
Linearity: ± 0.2 dB (30 MHz to 2.3 GHz)

Directivity : ± 0.2 dB in HSL (rotation around probe axis)
 ± 0.4 dB in HSL (rotation normal to probe axis)

Dynamic Range : $5 \mu\text{W/g}$ to $>100 \text{ mW/g}$; Linearity: ± 0.2 dB

Surface Detection : ± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces

Dimensions : Overall length 337 mm
Tip length 16 mm
Body diameter 12 mm
Tip diameter 6.8 mm
Distance from probe tip to dipole centers 2.7 mm

7.2 Probe Specification EX3DV4

Construction : Symmetrical design with triangular core
Built-in shielding against static charges
PEEK enclosure material (resistant to organic solvents, e.g., DGBE)

Calibration : In air from 10 MHz to 6 GHz
In head tissue simulating liquid (HSL) and muscle tissue simulating liquid
2450 MHz (accuracy $\pm 12.0\%$; $k=2$)
2600 MHz (accuracy $\pm 12.0\%$; $k=2$)
5200 MHz (accuracy $\pm 13.1\%$; $k=2$)
5300 MHz (accuracy $\pm 13.1\%$; $k=2$)
5500 MHz (accuracy $\pm 13.1\%$; $k=2$)
5600 MHz (accuracy $\pm 13.1\%$; $k=2$)
5800 MHz (accuracy $\pm 13.1\%$; $k=2$)



Frequency : 10 MHz to 6 GHz
Linearity: ± 0.2 dB (30 MHz to 6 GHz)

Directivity : ± 0.3 dB in HSL (rotation around probe axis)
 ± 0.5 dB in tissue material (rotation normal to probe axis)

Dynamic Range : $10 \mu\text{W/g}$ to $>100 \text{ mW/g}$; Linearity: ± 0.2 dB (noise: typically $< 1 \mu\text{W/g}$)

Dimensions : Overall length 337 mm
Tip length 20 mm
Body diameter 12 mm
Tip diameter 2.5 mm
Distance from probe tip to dipole centers 1 mm

7.3 Twin SAM Phantom


The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.



Shell Thickness : 2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm
Filling Volume : Volume Approx. 25 liters
Dimensions : $810 \times 1000 \times 500$ mm (H \times L \times W)

7.4 ELI4 Flat Phantom

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.

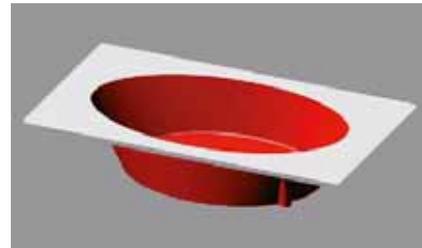

Shell Thickness : 2 ± 0.2 mm (sagging: <1%)
Filling Volume : Volume Approx. 30 liters
Dimensions : Major ellipse axis : 600 mm
 Minor axis : 400 mm


7.5 Mounting Device for Transmitters

In combination with the Twin SAM Phantom V4.0/V4.0c or ELI4, the Mounting Device enables the rotation of the mounted transmitter device in spherical coordinates. Rotation point is the ear opening point. Transmitter devices can be easily and accurately positioned according to IEC, IEEE, CENELEC, FCC or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat point).



7.6 Laptop Extensions Kit for Mounting Device

Simple but effective and easy-to-use extension for Mounting Device that facilitates the testing of larger devices according to IEC 62209-2 (e.g., laptops, cameras, etc.) It is lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin SAM, ELI4 and SAM v6.0 Phantoms.



7.7 Typical Composition of Ingredients for Liquid Tissue

Ingredients (% by weight)	Frequency (MHz)					
	835		1900		2450	
	Head	Body	Head	Body	Head	Body
Water	41.45	52.40	54.90	40.40	62.70	73.20
Salt (NaCl)	1.45	1.40	0.18	0.50	0.50	0.04
Sugar	56.00	45.00	0.00	58.00	0.00	0.00
HEC	1.00	1.00	0.00	1.00	0.00	0.00
Bactericide	0.10	0.10	0.00	0.10	0.00	0.00
Triton X-100	0.00	0.00	0.00	0.00	36.80	0.00
DGBE	0.00	0.00	44.92	0.00	0.00	26.70

- Salt : 99+% Pure Sodium Chloride Sugar : 98+% Pure Sucrose
- Water : De-ionized, 16 MΩ⁺ resistivity HEC : Hydroxyethyl Cellulose
- DGBE : 99+% Di (ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]
- Triton X-100 (ultra pure) : Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether

The composition of ingredients is according to FCC/OET Bulletin 65 Supplement C.

8 Measurement Process

Step 1 : Power Reference Measurement

The power reference job measures the field at a specified reference position, at a selectable distance from the phantom surface. The reference position can be either the selected section's grid reference point or a user point in this section. The reference job projects the selected point onto the phantom surface, orients the probe perpendicularly to the surface, and approaches the surface using the selected detection method. The minimum distance of probe sensors to surface set to 4 mm for an ET3DV6 probe, or 2 mm for EX3DV4 probe. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2 : Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations in relatively coarse grids. When an area scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. If only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maxima within 2 dB of the maximum SAR value are detected, the number of zoom scans has to be increased accordingly.

Step 3 : Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The zoom scan measures points specified in standards within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure.

Step 4 : Z Scan

The Z scan measures points along a vertical straight line. The line runs along the Z axis of a one-dimensional grid. In order to get a reasonable extrapolation, the extrapolated distance should not be larger than the step size in Z-direction.

Step 5 : Power Drift Measurement

The power drift measurement measures the field at the same location as the most recent power reference measurement job within the same procedure, and with the same settings. The power drift measurement gives the field difference in dB from the reading conducted within the last power reference measurement. The power reference measurement and power drift measurement are for monitoring the power drift of the device under test in the batch process.

9 Measurement Uncertainties

9.1 300 MHz to 3 GHz

Uncertainty Component	Tol. (± %)	Prob. Dist.	Div.	c_i (1g)	c_i (10g)	Std. Unc. (± %)		v_i
						1g	10g	
Measurement System								
Probe calibration	6.0	N	1	1	1	6.0	6.0	∞
Axial isotropy	4.7	R	√3	0.7	0.7	1.9	1.9	∞
Hemispherical isotropy	9.6	R	√3	0.7	0.7	3.9	3.9	∞
Boundary effect	1.0	R	√3	1	1	0.6	0.6	∞
Linearity	4.7	R	√3	1	1	2.7	2.7	∞
System detection limits	1.0	R	√3	1	1	0.6	0.6	∞
Readout electronics	0.3	N	1	1	1	0.3	0.3	∞
Response time	0.8	R	√3	1	1	0.5	0.5	∞
Integration time	2.6	R	√3	1	1	1.5	1.5	∞
RF ambient conditions – noise	3.0	R	√3	1	1	1.7	1.7	∞
RF ambient conditions – reflections	3.0	R	√3	1	1	1.7	1.7	∞
Probe positioner mechanical tolerance	0.4	R	√3	1	1	0.2	0.2	∞
Probe positioning with respect to phantom shell	2.9	R	√3	1	1	1.7	1.7	∞
Extrapolation, interpolation and integration algorithms for max. SAR evaluation	1.0	R	√3	1	1	0.6	0.6	∞
Test Sample Related								
Test sample positioning	3.4	N	1	1	1	3.4	3.4	23
Device holder uncertainty	2.9	N	1	1	1	2.9	2.9	5
Output power variation – SAR drift measurement	5.0	R	√3	1	1	2.9	2.9	∞
Phantom and Tissue Parameters								
Phantom uncertainty	4.0	R	√3	1	1	2.3	2.3	∞
Liquid conductivity – deviation from target	5.0	R	√3	0.64	0.43	1.8	1.2	∞
Liquid Conductivity – measurement uncertainty	3.2	N	1	0.64	0.43	2.0	1.4	5
Liquid Permittivity – deviation from target	5.0	R	√3	0.6	0.49	1.7	1.4	∞
Liquid Permittivity – measurement uncertainty	3.0	N	1	0.6	0.49	1.8	1.5	5
Combined Standard Uncertainty			RSS			11.0	10.8	
Expanded Uncertainty (95% Confidence Interval)			k=2			22.1	21.5	
NOTES								
1. Tol. : tolerance in influence quantity								
2. Prob. Dist. : probability distributions								
3. N, R : normal, rectangular								
4. Div. : divisor used to obtain standard uncertainty								
5. c_i : sensitivity coefficient								
6. Std. Unc. : standard uncertainty								
7. Measurement uncertainties are according to IEEE Std. 1528 and IEC 62209-1.								


9.2 3 GHz to 6 GHz

Uncertainty Component	Tol. (± %)	Prob. Dist.	Div.	c_i (1g)	c_i (10g)	Std. Unc. (± %)		v_i
						1g	10g	
Measurement System								
Probe calibration	6.6	N	1	1	1	6.6	6.6	∞
Axial isotropy	4.7	R	√3	0.7	0.7	1.9	1.9	∞
Hemispherical isotropy	9.6	R	√3	0.7	0.7	3.9	3.9	∞
Boundary effect	2.0	R	√3	1	1	1.2	1.2	∞
Linearity	4.7	R	√3	1	1	2.7	2.7	∞
System detection limits	1.0	R	√3	1	1	0.6	0.6	∞
Readout electronics	0.3	N	1	1	1	0.3	0.3	∞
Response time	0.8	R	√3	1	1	0.5	0.5	∞
Integration time	2.6	R	√3	1	1	1.5	1.5	∞
RF ambient conditions – noise	3.0	R	√3	1	1	1.7	1.7	∞
RF ambient conditions – reflections	3.0	R	√3	1	1	1.7	1.7	∞
Probe positioner mechanical tolerance	0.8	R	√3	1	1	0.5	0.5	∞
Probe positioning with respect to phantom shell	9.9	R	√3	1	1	5.7	5.7	∞
Extrapolation, interpolation and integration algorithms for max. SAR evaluation	4.0	R	√3	1	1	2.3	2.3	∞
Test Sample Related								
Test sample positioning	3.4	N	1	1	1	3.4	3.4	23
Device holder uncertainty	2.9	N	1	1	1	2.9	2.9	5
Output power variation – SAR drift measurement	5.0	R	√3	1	1	2.9	2.9	∞
Phantom and Tissue Parameters								
Phantom uncertainty	4.0	R	√3	1	1	2.3	2.3	∞
Liquid conductivity – deviation from target	5.0	R	√3	0.64	0.43	1.8	1.2	∞
Liquid Conductivity – measurement uncertainty	3.2	N	1	0.64	0.43	2.0	1.4	5
Liquid Permittivity – deviation from target	5.0	R	√3	0.6	0.49	1.7	1.4	∞
Liquid Permittivity – measurement uncertainty	3.0	N	1	0.6	0.49	1.8	1.5	5
Combined Standard Uncertainty			RSS			12.8	12.6	
Expanded Uncertainty (95% Confidence Interval)			k=2			25.7	25.2	
NOTES 1. Tol. : tolerance in influence quantity 2. Prob. Dist. : probability distributions 3. N, R : normal, rectangular 4. Div. : divisor used to obtain standard uncertainty 5. c_i : sensitivity coefficient 6. Std. Unc. : standard uncertainty 7. Measurement uncertainties are according to IEEE Std. 1528 and IEC 62209-1.								

10 Test Arrangement

10.1 Cheek-Touch Position

1. Position the device with the vertical center line of the body of the device and the horizontal line crossing the center of the ear piece in a plane parallel to the sagittal plane of the phantom.
2. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference points (M, RE and LE) and align the center of the ear piece with the line RE-LE.
3. Translate the mobile phone box towards the phantom with the ear piece aligned with the line RE-LE until the phone touches the ear.
4. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the box until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost.

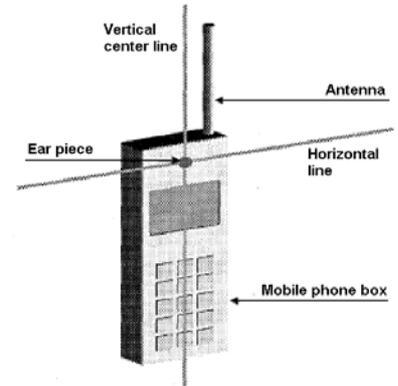


10.2 Ear-Tilt Position

1. Position the device in the “Cheek-Touch Position”.
2. While maintaining the device in the reference plane and pivoting against the ear, move it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost.




10.3 Body-worn Configuration

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a headset output should be tested with a headset connected to the device. Both the physical spacing to the body of the user as dictated by the accessory and the materials used in an accessory affect the SAR produced by the transmitting device. For purpose of determining test requirements, accessories may be divided into two categories: those that do not contain metallic components and those that do.

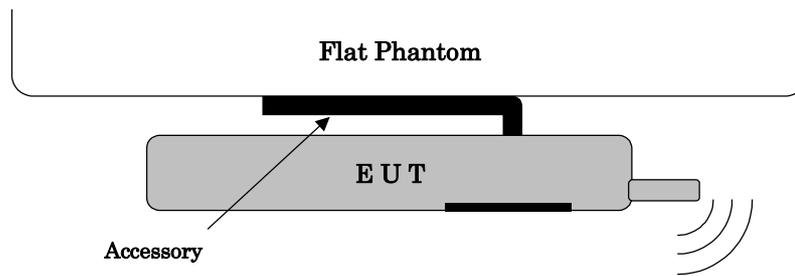

When multiple accessories that do not contain metallic components are supplied with the device, the device may be tested with only the accessory that dictates the closest spacing to the body. When multiple accessories that contain metallic components are supplied with the device, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (e.g., the same metallic belt-clip used with different holsters with no other metallic components), only the accessory that dictates the closest spacing to the body must be tested.

Body-worn accessories may not always be supplied or available as options for some devices that are intended to be authorized for body-worn use. A separation distance of 1.5 cm between the back of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances. Other separation distances may be used, but they should not exceed 2.5 cm. In these cases, the device may use body-worn accessories that provide a separation distance greater than that tested for the device provided however that the accessory contains no metallic components.

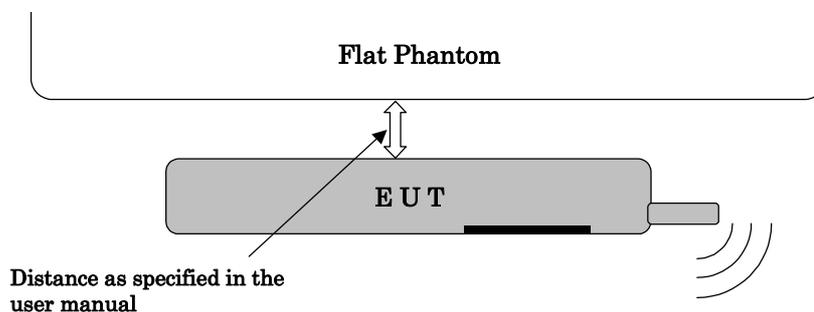


Lap-held device (e.g. laptop computer)
 SAR is tested for a lap-held position with the bottom of the computer in direct contact against a flat phantom.

11 Tissue Verification

11.1 Tissue Verification Measurement Condition

The tissue dielectric parameters of the tissue medium at the middle of a device transmission band should be within $\pm 5\%$ of the parameters specified at that target frequency. It is verified by using the dielectric probe and the network analyzer.

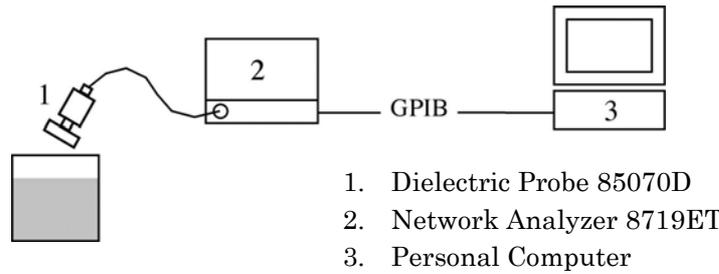

11.2 Tissue Verification Results


Date	Frequency [MHz]	Parameters	Target	Measured	Deviation [%]	Limit [%]
4/3/2013	Head 835	Permittivity (ϵ_r)	41.5	41.75	+0.60	± 5
		Conductivity (σ)	0.90	0.902	+0.22	± 5
4/4/2013	Body 835	Permittivity (ϵ_r)	55.2	54.86	-0.62	± 5
		Conductivity (σ)	0.97	0.961	-0.93	± 5
4/5/2013	Head 1900	Permittivity (ϵ_r)	40.0	39.74	-0.65	± 5
		Conductivity (σ)	1.40	1.408	+0.57	± 5
4/5/2013	Body 1900	Permittivity (ϵ_r)	53.3	53.23	-0.13	± 5
		Conductivity (σ)	1.52	1.528	+0.53	± 5
4/6/2013	Head 2450	Permittivity (ϵ_r)	39.2	38.80	-1.02	± 5
		Conductivity (σ)	1.80	1.847	+2.61	± 5
4/7/2013	Body 2450	Permittivity (ϵ_r)	52.7	52.09	-1.16	± 5
		Conductivity (σ)	1.95	1.962	+0.62	± 5
4/8/2013	Head 5200	Permittivity (ϵ_r)	36.0	36.20	+0.56	± 5
		Conductivity (σ)	4.66	4.676	+0.34	± 5
4/8/2013	Head 5500	Permittivity (ϵ_r)	35.6	35.62	+0.06	± 5
		Conductivity (σ)	4.96	5.007	+0.95	± 5
4/9/2013	Body 5200	Permittivity (ϵ_r)	49.0	48.91	-0.18	± 5
		Conductivity (σ)	5.30	5.354	+1.02	± 5
4/9/2013	Body 5500	Permittivity (ϵ_r)	48.6	48.26	-0.70	± 5
		Conductivity (σ)	5.65	5.770	+2.12	± 5

12 System Validation

12.1 System Validation Measurement Condition

The power meter PM1 (including Attenuator) measures the forward power at the location of the validation dipole connector. The signal generator is adjusted for 250 mW at the dipole connector and the power meter PM2 is read at that level. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at power meter PM2.

The dipole antenna is matched to be used near flat phantom filled with tissue simulating solution. A specific distance holder is used in the positioning of the antenna to ensure correct spacing between the phantom and the dipole.

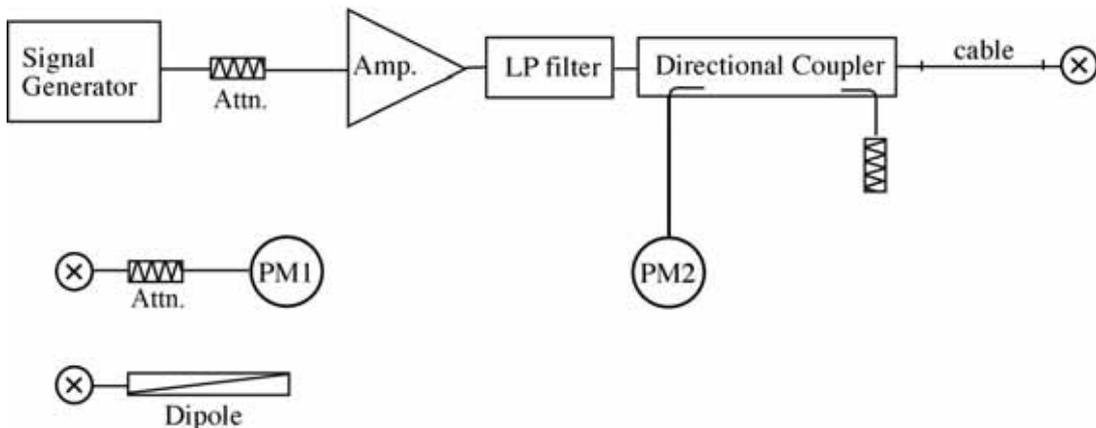

12.2 Target SAR Values for System Validation

The target SAR values can be obtained from the calibration certificate of system validation dipoles.

System Dipole		Cal. Date	Frequency [MHz]	Target SAR Values [W/kg]		
Type	Serial			1g/10g	Head	Body
D835V2	4d081	8/8/2012	835	1g	9.35	9.46
				10g	6.12	6.25
D1900V2	5d112	8/14/2012	1900	1g	39.6	40.5
				10g	20.9	21.5
D2450V2	714	11/7/2012	2450	1g	53.1	50.5
				10g	24.7	23.5
D5GHzV2	1111	9/18/2012	5200	1g	77.7	75.3
				10g	22.3	21.0
			5500	1g	82.4	79.1
				10g	23.4	22.0
			5800	1g	76.0	74.4
				10g	21.7	20.6

12.3 System Validation Results

The SAR measured with a system validation dipole, using the required tissue-equivalent medium at the test frequency, must be within 10 % of the manufacturer calibrated dipole SAR target.

Date	System Dipole		Liquid	Measured SAR [W/kg] (Normalized to 1 W)		Target	Deviation [%]	Limit [%]
	Type	Serial		1 g	10 g			
4/3/2013	D835V2	4d082	Head	1 g	9.64	9.35	+3.10	± 10
				10 g	6.36	6.12	+3.92	± 10
4/4/2013	D835V2	4d082	Body	1 g	9.36	9.46	-1.06	± 10
				10 g	6.16	6.25	-1.44	± 10
4/5/2013	D1900V2	5d112	Head	1 g	38.88	39.6	-1.82	± 10
				10 g	20.52	20.9	-1.82	± 10
4/5/2013	D1900V2	5d112	Body	1 g	39.36	40.5	-2.81	± 10
				10 g	21.12	21.5	-1.77	± 10
4/6/2013	D2450V2	714	Head	1 g	54.40	53.1	+2.45	± 10
				10 g	24.92	24.7	+0.89	± 10
4/7/2013	D2450V2	714	Body	1 g	51.60	50.5	+2.18	± 10
				10 g	24.04	23.5	+2.30	± 10
4/8/2013	D5GHzV2 (5.2GHz)	1111	Head	1 g	78.40	77.7	+0.90	± 10
				10 g	22.52	22.3	+0.99	± 10
4/8/2013	D5GHzV2 (5.5GHz)	1111	Head	1 g	82.80	82.4	+0.49	± 10
				10 g	23.56	23.4	+0.68	± 10
4/9/2013	D5GHzV2 (5.2GHz)	1111	Body	1 g	76.80	75.3	+1.99	± 10
				10 g	21.76	21.0	+3.62	± 10
4/9/2013	D5GHzV2 (5.5GHz)	1111	Body	1 g	78.40	79.1	-0.88	± 10
				10 g	22.08	22.0	+0.36	± 10

13 RF Output Power Measurements

13.1 WCDMA Band V

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification.

To setup the desire channel frequency and the maximum output power, a Radio Communication Tester “Anritsu, MT8820C” was used to program the DUT.

3GPP Release 99 WCDMA Settings

Settings	Release 99		
Loopback Mode	Mode 1	OFF	
Channel Coding	12.2k / 64k / 144k / 384kbps RMC	Voice AMR	
TPC Bit Pattern	All 1		
Power Tolerance (dB)	+1.7/-3.7		

3GPP Release 5 HSDPA Settings

Settings	Release 5 HSDPA			
Sub-test	1	2	3	4
Loopback Mode	Mode 1			
Channel Coding	Fixed Reference Channel (QPSK)			
TPC Algorithm	2			
TPC Bit Pattern	All 1			
Beta C	2	11	15	15
Beta D	15	15	8	4
MPR (dB)	0	0	0.5	0.5
Power Tolerance (dB)	+1.7/-3.7	+1.7/-3.7	+2.7/-3.7	+3.7/-3.7

3GPP Release 6 HSPA Settings

Settings	Release 6 HSPA				
Sub-test	1	2	3	4	5
Loopback Mode	Mode 1				
Channel Coding	E-DCH RF Test with TTI 10ms (QPSK)				
TPC Algorithm	2				1
TPC Bit Pattern	Inner Loop Power Control				All 1
Beta C	10	6	15	2	15
Beta D	15	15	9	15	0
Absolute Grant Value	20	12	15	17	12
MPR (dB)	0	2	1	2	0
Power Tolerance (dB)	+1.7/-6.7	+3.7/-5.2	+2.7/-5.2	+3.7/-5.2	+1.7/-3.7

Conducted power measurement results

Mode		Conducted Average Power (dBm)		
		4132 ch (826.4 MHz)	4182 ch (836.4 MHz)	4233 ch (846.6 MHz)
12.2 kbps RMC		23.89	23.94	23.84
64 kbps RMC		23.89	23.92	23.83
144 kbps RMC		23.89	23.93	23.84
384 kbps RMC		23.88	23.94	23.84
Voice AMR		23.87	23.92	23.84
R5 HSDPA	Sub-test 1	23.89	23.94	23.84
	Sub-test 2	23.89	23.92	23.84
	Sub-test 3	23.35	23.42	23.35
	Sub-test 4	23.36	23.42	23.34
R6 HSPA	Sub-test 1	23.45	23.49	23.40
	Sub-test 2	21.84	21.90	21.80
	Sub-test 3	22.94	22.98	22.85
	Sub-test 4	21.95	21.97	21.87
	Sub-test 5	23.85	23.88	23.81

Note(s):

1. KDB 941225 D01 – SAR in voice and data modes is measured using a 12.2 kbps RMC. SAR in voice AMR configurations and for other spreading codes are not required when the maximum average output of each channel is less than ¼ dB higher than that measured in 12.2 kbps RMC.
2. KDB 941225 D01 – Body SAR for HSPA (HSDPA/HSUPA) is not required when the maximum average output with HSPA active is less than ¼ dB higher than that measured without HSPA using 12.2 kbps RMC and the maximum SAR for 12.2 kbps RMC is ≤ 75% of the SAR limit.
3. KDB 941225 D01 – Head SAR for HSPA (VoIP applicable) is not required when the maximum average output with HSPA active is less than ¼ dB higher than that measured without HSPA using 12.2 kbps RMC.
4. KDB 941225 D02 – The maximum power reduction (MPR) on the order of 0, 2, 1, 2, 0 dB are expected for the subtests specified in R6 HSPA. Conducted power measurement results are set within 24 dB +/- expected power tolerance.

13.2 GSM 850

To setup the desire channel frequency and the maximum output power, a Radio Communication Tester “Anritsu, MT8820C” was used to program the DUT.

GSM/GPRS Settings

Settings	Mode	Parameter
General Settings	Band Indicator	GSM 850
	Power Control Level	5 (33 dBm)
GPRS Specific Settings	Connection Type	Test Mode A
	Multi Slot Class	12 (4 down / 4 up / 5 sum)
	Coding Scheme	CS1 (GMSK)

Conducted power measurement results

Mode		Conducted Power (dBm)		
		128 ch (824.2 MHz)	189 ch (836.4 MHz)	251 ch (848.8 MHz)
GSM	Burst Avg.	32.43	32.54	32.71
	Frame Avg.	23.40	23.51	23.68
GPRS (1 slot)	Burst Avg.	32.43	32.54	32.71
	Frame Avg.	23.40	23.51	23.68
GPRS (2 slot)	Burst Avg.	29.67	29.53	29.67
	Frame Avg.	23.65	23.51	23.65
GPRS (3 slot)	Burst Avg.	27.93	28.08	28.32
	Frame Avg.	23.67	23.82	24.06
GPRS (4 slot)	Burst Avg.	26.72	26.86	27.14
	Frame Avg.	23.71	23.85	24.13

Note(s):

KDB 941225 D03 – The worst-case configuration for SAR testing is determined to be as follows.

1. Body : GPRS mode with 4 time slots, based on the output power above
2. Head : Same mode as Body SAR testing (VoIP applicable using GPRS multi-slot)

13.3 PCS 1900

To setup the desire channel frequency and the maximum output power, a Radio Communication Tester was used to program the DUT.

GSM/GPRS Settings

Settings	Mode	Parameter
General Settings	Band Indicator	PCS 1900
	Power Control Level	0 (30 dBm)
GPRS Specific Settings	Connection Type	Test Mode A
	Multi Slot Class	12 (4 down / 4 up / 5 sum)
	Coding Scheme	CS1 (GMSK)

Conducted power measurement results

Mode		Conducted Power (dBm)		
		512 ch (1850.2 MHz)	661 ch (1880.0 MHz)	810 ch (1909.8 MHz)
GSM	Burst Avg.	28.87	28.90	29.01
	Frame Avg.	19.84	19.87	19.98
GPRS (1 slot)	Burst Avg.	28.87	28.90	29.01
	Frame Avg.	19.84	19.87	19.98
GPRS (2 slot)	Burst Avg.	27.08	27.10	27.23
	Frame Avg.	21.06	21.08	21.21
GPRS (3 slot)	Burst Avg.	25.71	25.64	25.68
	Frame Avg.	21.45	21.38	21.42
GPRS (4 slot)	Burst Avg.	24.81	24.72	24.76
	Frame Avg.	21.80	21.71	21.75

Note(s):

KDB 941225 D03 – The worst-case configuration for SAR testing is determined to be as follows.

1. Body : GPRS mode with 4 time slots, based on the output power above
2. Head : Same mode as Body SAR testing (VoIP applicable using GPRS multi-slot)

13.4 WLAN 2.4 GHz

To setup the desire channel frequency and the maximum output power, RF test mode prepared by the manufacturer was used to program the DUT.

Conducted power measurement results

Band	Mode	Channel	Frequency (MHz)	Average Power (dBm)
2.4 GHz	802.11b	1	2412	13.32
		6	2437	13.73
		11	2462	13.31
	802.11g	1	2412	12.86
		6	2437	13.22
		11	2462	12.84
	802.11n [HT20]	1	2412	12.84
		6	2437	13.11
		11	2462	12.92

Note(s):

KDB 248227 D01 – SAR is not required for 802.11g/n channels when the maximum average output power is less than ¼ dB higher than that measured on the corresponding 802.11b channels.

13.5 WLAN 5 GHz

To setup the desire channel frequency and the maximum output power, RF test mode prepared by the manufacturer was used to program the DUT.

Conducted power measurement results (W52)

Band	Mode	Channel	Frequency (MHz)	Average Power (dBm)
5.2 GHz	802.11a	36	5180	12.59
		40	5200	12.57
		44	5220	12.59
		48	5240	12.53
	802.11n [HT20]	36	5180	12.59
		44	5220	12.52
		48	5240	12.47
	802.11n [HT40]	38	5190	12.55
		46	5230	12.53
	802.11ac [VHT80]	42	5210	12.53

Note(s):

KDB 248227 D01 – SAR is not required for 802.11n/ac channels when the maximum average output power is less than ¼ dB higher than that measured on the corresponding 802.11a channels.

Conducted power measurement results (W53)

Band	Mode	Channel	Frequency (MHz)	Average Power (dBm)
5.3 GHz	802.11a	52	5260	12.90
		56	5280	12.87
		60	5300	12.80
		64	5320	12.70
	802.11n [HT20]	52	5260	12.87
		60	5300	12.84
		64	5320	12.69
	802.11n [HT40]	54	5270	12.88
		62	5310	12.80
	802.11ac [VHT80]	58	5290	12.74

Note(s):

KDB 248227 D01 – SAR is not required for 802.11n/ac channels when the maximum average output power is less than ¼ dB higher than that measured on the corresponding 802.11a channels.

Conducted power measurement results (W56)

Band	Mode	Channel	Frequency (MHz)	Average Power (dBm)
5.6 GHz	802.11a	100	5500	12.39
		104	5520	12.47
		108	5540	12.24
		112	5560	12.22
		116	5580	12.14
		120	5600	Not supported
		124	5620	Not supported
		128	5640	Not supported
		132	5660	11.97
		136	5680	11.95
		140	5700	11.92
	802.11n [HT20]	100	5500	12.40
		116	5580	12.12
		140	5700	11.81
	802.11n [HT40]	102	5510	12.58
		110	5550	12.25
		134	5670	12.10
	802.11ac [VHT80]	106	5530	12.58

Note(s):

KDB 248227 D01 – SAR is not required for 802.11n/ac channels when the maximum average output power is less than ¼ dB higher than that measured on the corresponding 802.11a channels.

13.6 Bluetooth

For the Bluetooth operation, the client supplied a special driving program to program the DUT to continually transmit the specified maximum power.

Modulation type : Frequency Hopping Spread Spectrum (FHSS)
 Transmitting Frequency : 2402 MHz (0 ch) – 2480 MHz (78 ch)
 RF Output Power : Max. 2.5 mW (Class 2)

13.7 Standalone SAR Test Exclusion Considerations (KDB 447498 D01)

The 1 g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by;

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f_{\text{(GHz)}}}] \leq 3.0, \text{ where}$$

- $f_{\text{(GHz)}}$ is the RF channel transmit frequency in GHz.
- Power and distance are rounded to the nearest mW and mm before calculation.
- The result is rounded to one decimal place for comparison.
- When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied.

Band	Frequency (MHz)	Max. Power		Test Position	Distance (mm)	Threshold	Test Exclusion
		(dBm)	(mW)				
WLAN 2.4 GHz	2412	14.5	28.2	Head	< 5	8.8	NO
				Body	10	4.4	NO
WLAN 5 GHz	5180	13.5	22.4	Head	< 5	10.2	NO
				Body	10	5.1	NO
Bluetooth	2441	4.0	2.5	Head	< 5	0.8	YES
				Body	10	0.4	YES

14 SAR Measurements

14.1 WCDMA Band V

14.1.1 Head

R99 12.2kbps RMC – Duty Cycle 100%							
Test Position	Ch#	Frequency [MHz]	Power [dBm]		1 g SAR [W/kg]		Note
			Tune-up Limit	Measured	Measured	Scaled	
Left Touched	4132	826.4					1
	4182	836.4	24.7	23.94	0.221	0.263	
	4233	846.6					1
Left Tilted	4132	826.4					1
	4182	836.4	24.7	23.94	0.119	0.142	
	4233	846.6					1
Right Touched	4132	826.4					1
	4182	836.4	24.7	23.94	0.224	0.267	
	4233	846.6					1
Right Tilted	4132	826.4					1
	4182	836.4	24.7	23.94	0.096	0.114	
	4233	846.6					1

NOTE(S) :

- KDB 447498 D01 – Testing of other required channels within the operating mode of a frequency band is not required when the reported 1 g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg when the transmission band is ≥ 200 MHz

14.1.2 Body w/ 1.0 cm (body-worn accessory & hotspot mode)

R99 12.2kbps RMC – Duty Cycle 100%							
Test Position	Ch#	Frequency [MHz]	Power [dBm]		1 g SAR [W/kg]		Note
			Tune-up Limit	Measured	Measured	Scaled	
Top Edge	4132	826.4					3
	4182	836.4					3
	4233	846.6					3
Bottom Edge	4132	826.4					1
	4182	836.4	24.7	23.94	0.092	0.110	
	4233	846.6					1
Left Edge	4132	826.4					1
	4182	836.4	24.7	23.94	0.157	0.187	
	4233	846.6					1
Right Edge	4132	826.4					1
	4182	836.4	24.7	23.94	0.197	0.235	
	4233	846.6					1
Front Side	4132	826.4					1
	4182	836.4	24.7	23.94	0.358	0.426	
	4233	846.6					1
Rear Side	4132	826.4					1
	4182	836.4	24.7	23.94	0.582	0.693	
	4233	846.6					1

NOTE(S) :

- KDB 447498 D01 – Testing of other required channels within the operating mode of a frequency band is not required when the reported 1 g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg when the transmission band is ≥ 200 MHz
- KDB 648474 D04 – When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band is repeated for that body-worn accessory with a headset attached to the handset.
- KDB 941225 D06 – SAR is not required because the distance from the transmitting antenna to this surface (or edge) is greater than 2.5 cm.

14.2 GSM 850

14.2.1 Head

GPRS 4 slot (CS1) – Duty Cycle 48.0%							
Test Position	Ch#	Frequency [MHz]	Power [dBm]		1 g SAR [W/kg]		Note
			Tune-up Limit	Measured	Measured	Scaled	
Left Touched	128	824.2					1
	189	836.4	28.7	26.86	0.172	0.263	
	251	848.8					1
Left Tilted	128	824.2					1
	189	836.4	28.7	26.86	0.101	0.154	
	251	848.8					1
Right Touched	128	824.2					1
	189	836.4	28.7	26.86	0.175	0.267	
	251	848.8					1
Right Tilted	128	824.2					1
	189	836.4	28.7	26.86	0.075	0.115	
	251	848.8					1

NOTE(S) :

- KDB 447498 D01 – Testing of other required channels within the operating mode of a frequency band is not required when the reported 1 g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg when the transmission band is ≥ 200 MHz

14.2.2 Body w/ 1.0 cm (body-worn accessory & hotspot mode)

GPRS 4 slot (CS1) – Duty Cycle 48.0%							
Test Position	Ch#	Frequency [MHz]	Power [dBm]		1 g SAR [W/kg]		Note
			Tune-up Limit	Measured	Measured	Scaled	
Top Edge	128	824.2					3
	189	836.4					3
	251	848.8					3
Bottom Edge	128	824.2					1
	189	836.4	28.7	26.86	0.078	0.119	
	251	848.8					1
Left Edge	128	824.2					1
	189	836.4	28.7	26.86	0.134	0.205	
	251	848.8					1
Right Edge	128	824.2					1
	189	836.4	28.7	26.86	0.170	0.260	
	251	848.8					1
Front Side	128	824.2					1
	189	836.4	28.7	26.86	0.295	0.451	
	251	848.8					1
Rear Side	128	824.2					1
	189	836.4	28.7	26.86	0.501	0.765	
	251	848.8					1

NOTE(S) :

- KDB 447498 D01 – Testing of other required channels within the operating mode of a frequency band is not required when the reported 1 g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg when the transmission band is ≥ 200 MHz
- KDB 648474 D04 – When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band is repeated for that body-worn accessory with a headset attached to the handset.
- KDB 941225 D06 – SAR is not required because the distance from the transmitting antenna to this surface (or edge) is greater than 2.5 cm.

14.3 PCS 1900

14.3.1 Head

GPRS 4 slot (CS1) – Duty Cycle 48.0%							
Test Position	Ch#	Frequency [MHz]	Power [dBm]		1 g SAR [W/kg]		Note
			Tune-up Limit	Measured	Measured	Scaled	
Left Touched	512	1850.2					1
	661	1880.0	26.0	24.72	0.208	0.279	
	810	1909.8					1
Left Tilted	512	1850.2					1
	661	1880.0	26.0	24.72	0.080	0.107	
	810	1909.8					1
Right Touched	512	1850.2					1
	661	1880.0	26.0	24.72	0.134	0.180	
	810	1909.8					1
Right Tilted	512	1850.2					1
	661	1880.0	26.0	24.72	0.078	0.105	
	810	1909.8					1

NOTE(S) :

- KDB 447498 D01 – Testing of other required channels within the operating mode of a frequency band is not required when the reported 1 g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg when the transmission band is ≥ 200 MHz

14.3.2 Body w/ 1.0 cm (body-worn accessory & hotspot mode)

GPRS 4 slot (CS1) – Duty Cycle 48.0%							
Test Position	Ch#	Frequency [MHz]	Power [dBm]		1 g SAR [W/kg]		Note
			Tune-up Limit	Measured	Measured	Scaled	
Top Edge	512	1850.2					3
	661	1880.0					3
	810	1909.8					3
Bottom Edge	512	1850.2					1
	661	1880.0	26.0	24.72	0.234	0.314	
	810	1909.8					1
Left Edge	512	1850.2					1
	661	1880.0	26.0	24.72	0.142	0.191	
	810	1909.8					1
Right Edge	512	1850.2					1
	661	1880.0	26.0	24.72	0.069	0.093	
	810	1909.8					1
Front Side	512	1850.2					1
	661	1880.0	26.0	24.72	0.331	0.444	
	810	1909.8					1
Rear Side	512	1850.2					1
	661	1880.0	26.0	24.72	0.337	0.453	
	810	1909.8					1

NOTE(S) :

- KDB 447498 D01 – Testing of other required channels within the operating mode of a frequency band is not required when the reported 1 g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg when the transmission band is ≥ 200 MHz
- KDB 648474 D04 – When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band is repeated for that body-worn accessory with a headset attached to the handset.
- KDB 941225 D06 – SAR is not required because the distance from the transmitting antenna to this surface (or edge) is greater than 2.5 cm.

14.4 WLAN 2.4 GHz

14.4.1 Head

802.11b (1 Mbps) – Duty Cycle 100%							
Test Position	Ch#	Frequency [MHz]	Power [dBm]		1 g SAR [W/kg]		Note
			Tune-up Limit	Measured	Measured	Scaled	
Left Touched	1	2412					1
	6	2437	14.5	13.73	0.023	0.027	
	11	2462					1
Left Tilted	1	2412					1
	6	2437	14.5	13.73	0.014	0.017	
	11	2462					1
Right Touched	1	2412					1
	6	2437	14.5	13.73	0.084	0.100	
	11	2462					1
Right Tilted	1	2412					1
	6	2437	14.5	13.73	0.040	0.048	
	11	2462					1

NOTE(S) :

- KDB 447498 D01 – Testing of other required channels within the operating mode of a frequency band is not required when the reported 1 g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg when the transmission band is ≥ 200 MHz

14.4.2 Body w/ 1.0 cm (body-worn accessory & hotspot mode)

802.11b (1 Mbps) – Duty Cycle 100%							
Test Position	Ch#	Frequency [MHz]	Power [dBm]		1 g SAR [W/kg]		Note
			Tune-up Limit	Measured	Measured	Scaled	
Top Edge	1	2412					1
	6	2437	14.5	13.73	0.00869	0.010	
	11	2462					1
Bottom Edge	1	2412					3
	6	2437					3
	11	2462					3
Left Edge	1	2412					3
	6	2437					3
	11	2462					3
Right Edge	1	2412					1
	6	2437	14.5	13.73	0.081	0.097	
	11	2462					1
Front Side	1	2412					1
	6	2437	14.5	13.73	0.021	0.025	
	11	2462					1
Rear Side	1	2412					1
	6	2437	14.5	13.73	0.130	0.156	
	11	2462					1

NOTE(S) :

- KDB 447498 D01 – Testing of other required channels within the operating mode of a frequency band is not required when the reported 1 g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg when the transmission band is ≥ 200 MHz
- KDB 648474 D04 – When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band is repeated for that body-worn accessory with a headset attached to the handset.
- KDB 941225 D06 – SAR is not required because the distance from the transmitting antenna to this surface (or edge) is greater than 2.5 cm.

14.5 WLAN 5.2 GHz

14.5.1 Head

802.11a (6 Mbps) – Duty Cycle 100%							
Test Position	Ch#	Frequency [MHz]	Power [dBm]		1 g SAR [W/kg]		Note
			Tune-up Limit	Measured	Measured	Scaled	
Left Touched	36	5180	13.5	12.59	0.036	0.044	
	48	5240					1
Left Tilted	36	5180	13.5	12.59	0.015	0.018	
	48	5240					1
Right Touched	36	5180	13.5	12.59	0.134	0.165	
	48	5240					1
Right Tilted	36	5180	13.5	12.59	0.021	0.026	
	48	5240					1

NOTE(S) :

- KDB 447498 D01 – Testing of other required channels within the operating mode of a frequency band is not required when the reported 1 g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg when the transmission band is ≥ 200 MHz

14.5.2 Body w/ 1.0 cm (body-worn accessory mode)

802.11a (6 Mbps) – Duty Cycle 100%							
Test Position	Ch#	Frequency [MHz]	Power [dBm]		1 g SAR [W/kg]		Note
			Tune-up Limit	Measured	Measured	Scaled	
Front Side	36	5180	13.5	12.59	0.027	0.033	
	48	5240					1
Rear Side	36	5180	13.5	12.59	0.102	0.126	
	48	5240					1

NOTE(S) :

- KDB 447498 D01 – Testing of other required channels within the operating mode of a frequency band is not required when the reported 1 g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg when the transmission band is ≥ 200 MHz
- KDB 648474 D04 – When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band is repeated for that body-worn accessory with a headset attached to the handset.

14.6 WLAN 5.3 GHz

14.6.1 Head

802.11a (6 Mbps) – Duty Cycle 100%							
Test Position	Ch#	Frequency [MHz]	Power [dBm]		1 g SAR [W/kg]		Note
			Tune-up Limit	Measured	Measured	Scaled	
Left Touched	52	5260	13.5	12.90	0.054	0.062	
	64	5320					1
Left Tilted	52	5260	13.5	12.90	0.014	0.016	
	64	5320					1
Right Touched	52	5260	13.5	12.90	0.191	0.219	
	64	5320					1
Right Tilted	52	5260	13.5	12.90	0.033	0.038	
	64	5320					1

NOTE(S) :

- KDB 447498 D01 – Testing of other required channels within the operating mode of a frequency band is not required when the reported 1 g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg when the transmission band is ≥ 200 MHz

14.6.2 Body w/ 1.0 cm (body-worn accessory mode)

802.11a (6 Mbps) – Duty Cycle 100%							
Test Position	Ch#	Frequency [MHz]	Power [dBm]		1 g SAR [W/kg]		Note
			Tune-up Limit	Measured	Measured	Scaled	
Front Side	52	5260	13.5	12.90	0.045	0.052	
	64	5320					1
Rear Side	52	5260	13.5	12.90	0.138	0.158	
	64	5320					1

NOTE(S) :

- KDB 447498 D01 – Testing of other required channels within the operating mode of a frequency band is not required when the reported 1 g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg when the transmission band is ≥ 200 MHz
- KDB 648474 D04 – When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band is repeated for that body-worn accessory with a headset attached to the handset.

14.7 WLAN 5.6 GHz

14.7.1 Head

802.11a (6 Mbps) – Duty Cycle 100%							
Test Position	Ch#	Frequency [MHz]	Power [dBm]		1 g SAR [W/kg]		Note
			Tune-up Limit	Measured	Measured	Scaled	
Left Touched	104	5520	13.5	12.47	0.051	0.065	
	116	5580					1
	124	5620					2
	136	5680					1
Left Tilted	104	5520	13.5	12.47	0.022	0.028	
	116	5580					1
	124	5620					2
	136	5680					1
Right Touched	104	5520	13.5	12.47	0.202	0.256	
	116	5580					1
	124	5620					2
	136	5680					1
Right Tilted	104	5520	13.5	12.47	0.033	0.042	
	116	5580					1
	124	5620					2
	136	5680					1

NOTE(S) :

- KDB 447498 D01 – Testing of other required channels within the operating mode of a frequency band is not required when the reported 1 g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg when the transmission band is ≥ 200 MHz
- KDB 443999 D01 – Transmissions in the 5600 to 5650 MHz band are disabled.

14.7.2 Body w/ 1.0 cm (body-worn accessory mode)

802.11a (6 Mbps) – Duty Cycle 100%							
Test Position	Ch#	Frequency [MHz]	Power [dBm]		1 g SAR [W/kg]		Note
			Tune-up Limit	Measured	Measured	Scaled	
Front Side	104	5520	13.5	12.47	0.046	0.058	
	116	5580					1
	124	5620					3
	136	5680					1
Rear Side	104	5520	13.5	12.47	0.095	0.120	
	116	5580					1
	124	5620					3
	136	5680					1

NOTE(S) :

- KDB 447498 D01 – Testing of other required channels within the operating mode of a frequency band is not required when the reported 1 g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg when the transmission band is ≥ 200 MHz
- KDB 648474 D04 – When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band is repeated for that body-worn accessory with a headset attached to the handset.
- KDB 443999 D01 – Transmissions in the 5600 to 5650 MHz band are disabled.

14.8 Simultaneous Transmission SAR Analysis (KDB 447498 D01)

14.8.1 Simultaneous Transmission

WWAN can transmit simultaneously with WLAN/Bluetooth.

WLAN in 2.4 GHz and 5 GHz bands cannot transmit simultaneously with Bluetooth.

No.	Conditions	Head	Body	Hotspot
1	WCDMA Band V + WLAN 2.4 GHz	YES	YES	YES
2	GSM 850 + WLAN 2.4 GHz	YES	YES	YES
3	PCS 1900 + WLAN 2.4 GHz	YES	YES	YES
4	WCDMA Band V + WLAN 5 GHz	YES	YES	NO
5	GSM 850 + WLAN 5 GHz	YES	YES	NO
6	PCS 1900 + WLAN 5 GHz	YES	YES	NO
7	WCDMA Band V + Bluetooth	YES	YES	NO
8	GSM 850 + Bluetooth	YES	YES	NO
9	PCS 1900 + Bluetooth	YES	YES	NO

The device is capable of personal hotspot mode with WLAN in 2.4 GHz band.

However, the 5 GHz bands do not support hotspot mode.

14.8.2 Antenna Separation Distances

WWAN to WLAN/Bluetooth : 79.8 mm

14.8.3 Standalone SAR Estimation

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot$

$[\sqrt{f_{(\text{GHz})} / 7.5}] \text{ W/kg for 1 g SAR, test separation distances} \leq 50 \text{ mm}$

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied.

Band	Frequency (MHz)	Max. Power		Test Position	Distance (mm)	Estimated SAR (W/kg)
		(dBm)	(mW)			
Bluetooth	2441	4.0	2.5	Head	< 5	0.104
				Body	10	0.052

14.8.4 Sum of the SAR for WWAN + WLAN 2.4 GHz

14.8.4.1 Head

Sum of the SAR with Measured Values

Test Position	Highest 1 g SAR (W/kg)			Σ 1 g SAR (W/kg)
	WWAN		WLAN 2.4 GHz	
Left Touched	WCDMA Band V	0.263	0.027	0.290
	GSM 850	0.263	0.027	0.290
	PCS1900	0.279	0.027	0.306
Left Tilted	WCDMA Band V	0.142	0.017	0.159
	GSM 850	0.154	0.017	0.171
	PCS1900	0.107	0.017	0.124
Right Touched	WCDMA Band V	0.267	0.100	0.367
	GSM 850	0.267	0.100	0.367
	PCS1900	0.180	0.100	0.280
Right Tilted	WCDMA Band V	0.114	0.048	0.162
	GSM 850	0.115	0.048	0.163
	PCS1900	0.105	0.048	0.153

SAR to Peak Location Separation Ratio (SPLSR)

As the sum of the 1 g SAR is < 1.6 W/kg, SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the sum of the 1 g SAR is < 1.6 W/kg.

14.8.4.2 Body w/ 1.0 cm (body-worn accessory & hotspot mode)

Sum of the SAR with Measured Values

Test Position	Highest 1 g SAR (W/kg)			Σ 1 g SAR (W/kg)
	WWAN		WLAN 2.4 GHz	
Top Edge	WCDMA Band V	N/A	0.010	N/A
	GSM 850	N/A	0.010	N/A
	PCS1900	N/A	0.010	N/A
Bottom Edge	WCDMA Band V	0.110	N/A	N/A
	GSM 850	0.119	N/A	N/A
	PCS1900	0.314	N/A	N/A
Left Edge	WCDMA Band V	0.187	0.097	0.284
	GSM 850	0.205	0.097	0.302
	PCS1900	0.191	0.097	0.288
Right Edge	WCDMA Band V	0.235	N/A	N/A
	GSM 850	0.260	N/A	N/A
	PCS1900	0.093	N/A	N/A
Front Side	WCDMA Band V	0.426	0.025	0.451
	GSM 850	0.451	0.025	0.476
	PCS1900	0.444	0.025	0.469
Rear Side	WCDMA Band V	0.693	0.156	0.849
	GSM 850	0.765	0.156	0.921
	PCS1900	0.453	0.156	0.609

SAR to Peak Location Separation Ratio (SPLSR)

As the sum of the 1 g SAR is < 1.6 W/kg, SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the sum of the 1 g SAR is < 1.6 W/kg.

14.8.5 Sum of the SAR for WWAN + WLAN 5.2 GHz

14.8.5.1 Head

Sum of the SAR with Measured Values

Test Position	Highest 1 g SAR (W/kg)			Σ 1 g SAR (W/kg)
	WWAN		WLAN 5.2 GHz	
Left Touched	WCDMA Band V	0.263	0.044	0.307
	GSM 850	0.263	0.044	0.307
	PCS1900	0.279	0.044	0.323
Left Tilted	WCDMA Band V	0.142	0.018	0.160
	GSM 850	0.154	0.018	0.172
	PCS1900	0.107	0.018	0.125
Right Touched	WCDMA Band V	0.267	0.165	0.432
	GSM 850	0.267	0.165	0.432
	PCS1900	0.180	0.165	0.345
Right Tilted	WCDMA Band V	0.114	0.026	0.140
	GSM 850	0.115	0.026	0.141
	PCS1900	0.105	0.026	0.131

SAR to Peak Location Separation Ratio (SPLSR)

As the sum of the 1 g SAR is < 1.6 W/kg, SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the sum of the 1 g SAR is < 1.6 W/kg.

14.8.5.2 Body w/ 1.0 cm (body-worn accessory mode)

Sum of the SAR with Measured Values

Test Position	Highest 1 g SAR (W/kg)			Σ 1 g SAR (W/kg)
	WWAN		WLAN 5.2 GHz	
Front Side	WCDMA Band V	0.426	0.033	0.459
	GSM 850	0.451	0.033	0.484
	PCS1900	0.444	0.033	0.477
Rear Side	WCDMA Band V	0.693	0.126	0.819
	GSM 850	0.765	0.126	0.891
	PCS1900	0.453	0.126	0.579

SAR to Peak Location Separation Ratio (SPLSR)

As the sum of the 1 g SAR is < 1.6 W/kg, SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the sum of the 1 g SAR is < 1.6 W/kg.

14.8.6 Sum of the SAR for WWAN + WLAN 5.3 GHz

14.8.6.1 Head

Sum of the SAR with Measured Values

Test Position	Highest 1 g SAR (W/kg)			Σ 1 g SAR (W/kg)
	WWAN		WLAN 5.3 GHz	
Left Touched	WCDMA Band V	0.263	0.062	0.325
	GSM 850	0.263	0.062	0.325
	PCS1900	0.279	0.062	0.341
Left Tilted	WCDMA Band V	0.142	0.016	0.158
	GSM 850	0.154	0.016	0.170
	PCS1900	0.107	0.016	0.123
Right Touched	WCDMA Band V	0.267	0.219	0.486
	GSM 850	0.267	0.219	0.486
	PCS1900	0.180	0.219	0.399
Right Tilted	WCDMA Band V	0.114	0.038	0.152
	GSM 850	0.115	0.038	0.153
	PCS1900	0.105	0.038	0.143

SAR to Peak Location Separation Ratio (SPLSR)

As the sum of the 1 g SAR is < 1.6 W/kg, SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the sum of the 1 g SAR is < 1.6 W/kg.

14.8.6.2 Body w/ 1.0 cm (body-worn accessory mode)

Sum of the SAR with Measured Values

Test Position	Highest 1 g SAR (W/kg)			Σ 1 g SAR (W/kg)
	WWAN		WLAN 5.3 GHz	
Front Side	WCDMA Band V	0.426	0.052	0.478
	GSM 850	0.451	0.052	0.503
	PCS1900	0.444	0.052	0.496
Rear Side	WCDMA Band V	0.693	0.158	0.851
	GSM 850	0.765	0.158	0.923
	PCS1900	0.453	0.158	0.611

SAR to Peak Location Separation Ratio (SPLSR)

As the sum of the 1 g SAR is < 1.6 W/kg, SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the sum of the 1 g SAR is < 1.6 W/kg.

14.8.7 Sum of the SAR for WWAN + WLAN 5.6 GHz

14.8.7.1 Head

Sum of the SAR with Measured Values

Test Position	Highest 1 g SAR (W/kg)			Σ 1 g SAR (W/kg)
	WWAN		WLAN 5.6 GHz	
Left Touched	WCDMA Band V	0.263	0.065	0.328
	GSM 850	0.263	0.065	0.328
	PCS1900	0.279	0.065	0.344
Left Tilted	WCDMA Band V	0.142	0.028	0.170
	GSM 850	0.154	0.028	0.182
	PCS1900	0.107	0.028	0.135
Right Touched	WCDMA Band V	0.267	0.256	0.523
	GSM 850	0.267	0.256	0.523
	PCS1900	0.180	0.256	0.436
Right Tilted	WCDMA Band V	0.114	0.042	0.156
	GSM 850	0.115	0.042	0.157
	PCS1900	0.105	0.042	0.147

SAR to Peak Location Separation Ratio (SPLSR)

As the sum of the 1 g SAR is < 1.6 W/kg, SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the sum of the 1 g SAR is < 1.6 W/kg.

14.8.7.2 Body w/ 1.0 cm (body-worn accessory mode)

Sum of the SAR with Measured Values

Test Position	Highest 1 g SAR (W/kg)			Σ 1 g SAR (W/kg)
	WWAN		WLAN 5.6 GHz	
Front Side	WCDMA Band V	0.426	0.058	0.484
	GSM 850	0.451	0.058	0.509
	PCS1900	0.444	0.058	0.502
Rear Side	WCDMA Band V	0.693	0.120	0.813
	GSM 850	0.765	0.120	0.885
	PCS1900	0.453	0.120	0.573

SAR to Peak Location Separation Ratio (SPLSR)

As the sum of the 1 g SAR is < 1.6 W/kg, SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the sum of the 1 g SAR is < 1.6 W/kg.

14.8.8 Sum of the SAR for WWAN + Bluetooth

14.8.8.1 Head

Sum of the SAR with Measured Values

Test Position	Highest 1 g SAR (W/kg)		Σ 1 g SAR (W/kg)	
	WWAN	Bluetooth		
Left Touched	WCDMA Band V	0.263	0.104	0.367
	GSM 850	0.263	0.104	0.367
	PCS1900	0.279	0.104	0.383
Left Tilted	WCDMA Band V	0.142	0.104	0.246
	GSM 850	0.154	0.104	0.258
	PCS1900	0.107	0.104	0.211
Right Touched	WCDMA Band V	0.267	0.104	0.371
	GSM 850	0.267	0.104	0.371
	PCS1900	0.180	0.104	0.284
Right Tilted	WCDMA Band V	0.114	0.104	0.218
	GSM 850	0.115	0.104	0.219
	PCS1900	0.105	0.104	0.209

SAR to Peak Location Separation Ratio (SPLSR)

As the sum of the 1 g SAR is < 1.6 W/kg, SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the sum of the 1 g SAR is < 1.6 W/kg.

14.8.8.2 Body w/ 1.0 cm (body-worn accessory mode)**Sum of the SAR with Measured Values**

Test Position	Highest 1 g SAR (W/kg)			Σ 1 g SAR (W/kg)
	WWAN		Bluetooth	
Front Side	WCDMA Band V	0.426	0.052	0.478
	GSM 850	0.451	0.052	0.503
	PCS1900	0.444	0.052	0.496
Rear Side	WCDMA Band V	0.693	0.052	0.745
	GSM 850	0.765	0.052	0.817
	PCS1900	0.453	0.052	0.505

SAR to Peak Location Separation Ratio (SPLSR)

As the sum of the 1 g SAR is < 1.6 W/kg, SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the sum of the 1 g SAR is < 1.6 W/kg.

16 Test Instruments

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
E-Field Probe	ET3DV6	SPEAG	S-2	2012/8	1 Year
E-Field Probe	EX3DV4	SPEAG	S-17	2012/9	1 Year
DAE	DAE4	SPEAG	S-3	2012/11	1 Year
Robot	RX60L	SPEAG	S-7	-----	N/A
Probe Alignment Unit	LB1RX60L	SPEAG	S-13	-----	N/A
Network Analyzer	8719ET	Agilent	B-53	2012/9	1 Year
Dielectric Probe Kit	85070D	Agilent	B-54	-----	N/A
835MHz Dipole	D835V2	SPEAG	S-23	2012/8	1 Year
1900MHz Dipole	D1900V2	SPEAG	S-25	2012/8	1 Year
2450MHz Dipole	D2450V2	SPEAG	S-6	2012/11	1 Year
5GHz Dipole	D5GHzV2	SPEAG	S-31	2012/9	1 Year
Signal Generator	MG3681A	Anritsu	B-3	2012/9	1 Year
Signal Generator	MG3710A	Anritsu	B-41	2012/9	1 Year
RF Power Amplifier	A0840-3833-R	R&K	A-34	-----	N/A
RF Power Amplifier	CGA020M602-2633R	R&K	A-51	-----	N/A
Directional Coupler	4226-20	narda	D-87	-----	N/A
Low Pass Filter	LSM1000-4BA	LARK	D-90	2012/11	1 Year
Low Pass Filter	LSM2200-4BA	LARK	D-91	2012/11	1 Year
Low Pass Filter	LSM2700-3BA	LARK	D-92	2012/11	1 Year
Radio Communication Analyzer	MT8820C	Anritsu	B-5	2013/2	1 Year
Power Meter	E4417A	Agilent	B-51	2012/6	1 Year
Power Sensor	E9323A	Agilent	B-59	2012/6	1 Year
Power Meter	N1911A	Agilent	B-63	2012/7	1 Year
Power Sensor	N1921A	Agilent	B-64	2012/7	1 Year
Attenuator	54A-10	Weinschel	D-28	2012/9	1 Year
Attenuator	2-20	Weinschel	D-36	2012/9	1 Year

17 Appendix

Exhibit	Contents	No. of page(s)
1	System Validation Plots	10
2-1	SAR Test Plots (WCDMA Band V)	11
2-2	SAR Test Plots (GSM 850)	11
2-3	SAR Test Plots (PCS 1900)	11
2-4	SAR Test Plots (WLAN 2.4 GHz)	10
2-5	SAR Test Plots (WLAN 5 GHz)	24
3-1	Dosimetric E-Field Probe – ET3DV6, S/N: 1679	11
3-2	Dosimetric E-Field Probe – EX3DV4, S/N: 3808	11
4-1	System Validation Dipole – D835V2, S/N: 4d081	8
4-2	System Validation Dipole – D1900V2, S/N: 5d112	8
4-3	System Validation Dipole – D2450V2, S/N: 714	8
4-4	System Validation Dipole – D5GHzV2, S/N: 1111	13