

## TEST REPORT

**Applicant** : Sharp Corporation, Communication Systems Division  
**Address** : 2-13-1, Iida Hachihonmatsu, Higashi-Hiroshima City, Hiroshima,  
739-0192, JAPAN

**Products** : Cellular Phone  
**Model No.** : SH-04F  
**Serial No.** : 004401115065365  
004401115065464

**FCC ID** : APYHRO00207

**Test Standard** : CFR 47 FCC Rules and Regulations Part 22

**Test Results** : **Passed**

**Date of Test** : March 10 ~ 17, 2014



A handwritten signature in black ink, appearing to read 'K. Shibata'.

Kousei Shibata

Manager

Japan Quality Assurance Organization

KITA-KANSAI Testing Center

SAITO EMC Branch

7-3-10, Saito-asagi, Ibaraki-shi, Osaka 567-0085, Japan

- 
- The measurement values stated in Test Report was made with traceable to National Institute of Advanced Industrial Science and Technology (AIST) of Japan and National Institute of Information and Communications Technology (NICT) of Japan.
  - The applicable standard, testing condition and testing method which were used for the tests are based on the request of the applicant.
  - The test results presented in this report relate only to the offered test sample.
  - The contents of this test report cannot be used for the purposes, such as advertisement for consumers.
  - This test report shall not be reproduced except in full without the written approval of JQA.
  - VLAC does not approve, certify or warrant the product by this test report.

**TABLE OF CONTENTS**

|                                                | <b>Page</b> |
|------------------------------------------------|-------------|
| 1 Description of the Equipment Under Test..... | 3           |
| 2 Summary of Test Results .....                | 4           |
| 3 Test Procedure .....                         | 5           |
| 4 Test Location .....                          | 5           |
| 5 Recognition of Test Laboratory.....          | 5           |
| 6 Details of the Equipment Under Test .....    | 6           |
| 7 Details of the Test Item.....                | 8           |

**DEFINITIONS FOR ABBREVIATION AND SYMBOLS USED IN THIS TEST REPORT****EUT** : Equipment Under Test**AE** : Associated Equipment**N/A** : Not Applicable**N/T** : Not Tested**EMC** : Electromagnetic Compatibility**EMI** : Electromagnetic Interference**EMS** : Electromagnetic Susceptibility☒ - indicates that the listed condition, standard or equipment is applicable for this report.☐ - indicates that the listed condition, standard or equipment is not applicable for this report.

## 1 Description of the Equipment Under Test

1. Manufacturer : Sharp Corporation, Communication Systems Division  
2-13-1, Iida Hachihonmatsu, Higashi-Hiroshima City, Hiroshima,  
739-0192, JAPAN
2. Products : Cellular Phone
3. Model No. : SH-04F
4. Serial No. : 004401115065365  
: 004401115065464
5. Product Type : Pre-production
6. Date of Manufacture : February, 2014
7. Power Rating : 4.0VDC (Lithium-ion Battery UBATIA242AFN1 3300mAh)
8. EUT Grounding : None
9. Transmitting Frequency : 826.4 MHz(4132CH) – 846.6MHz(4233CH)
10. Receiving Frequency : 871.4 MHz(4357CH) – 891.6MHz(4458CH)
11. Emission Designations : 4M16F9W
12. Max. RF Output Power : 0.263W (ERP)
13. Category : WCDMA850
14. EUT Authorization : Certification
15. Received Date of EUT : March 5, 2014

### 16. Channel Plan

The carrier spacing is 200 kHz.

The carrier frequency is designated by the absolute frequency channel number (ARFCN).

The carrier frequency is expressed in the equation shown as follows:

Transmitting Frequency (in MHz) =  $826.4 + 0.2 \times (n - 4132)$   
where, n : channel number ( $4132 \leq n \leq 4233$ )

Receiving Frequency (in MHz) =  $871.4 + 0.2 \times (n - 4357)$   
where, n : channel number ( $4357 \leq n \leq 4458$ )

## 2 Summary of Test Results

Applied Standard : CFR 47 FCC Rules and Regulations Part 22  
Subpart H – Cellular Radiotelephone Service

The EUT described in clause 1 was tested according to the applied standard shown above.  
Details of the test configuration is shown in clause 6.

The conclusion for the test items of which are required by the applied standard is indicated under the test result.

☒ - The test result was **passed** for the test requirements of the applied standard.

☐ - The test result was **failed** for the test requirements of the applied standard.

☐ - The test result was **not judged** the test requirements of the applied standard.

In the approval of test results,

- Determining compliance with the limits in this report was based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.
- No deviations were employed from the applied standard.
- No modifications were conducted by JQA to achieve compliance to the limitations.

Reviewed by:

Tested by:



Shigeru Kinoshita  
Deputy Manager  
JQA KITA-KANSAI Testing Center  
SAITO EMC Branch



Shigeru Osawa  
Deputy Manager  
JQA KITA-KANSAI Testing Center  
SAITO EMC Branch

### 3 Test Procedure

Test Requirements : CFR 47 FCC Rules and Regulations Part 2  
§2.1046, §2.1047, §2.1049, §2.1051, §2.1053, §2.1055 and §2.1057

Test Procedure : ANSI C63.4-2003, TIA/EIA-603-C-2004  
FCC KDB 971168 D01 Licensed DTS Guidance v02r01, released June 7, 2013

### 4 Test Location

Japan Quality Assurance Organization (JQA)  
KITA-KANSAI Testing Center  
7-7, Ishimaru, 1-chome, Minoh-shi, Osaka, 562-0027, Japan  
SAITO EMC Branch  
7-3-10, Saito-asagi, Ibaraki-shi, Osaka 567-0085, Japan

### 5 Recognition of Test Laboratory

JQA KITA-KANSAI Testing Center SAITO EMC Branch is accredited under ISO/IEC 17025 by following accreditation bodies and the test facility is registered by the following bodies.

VLAC Accreditation No. : VLAC-001-2 (Expiry date : March 30, 2014)  
VCCI Registration No. : A-0002 (Expiry date : March 30, 2014)  
BSMI Registration No. : SL2-IS-E-6006, SL2-IN-E-6006, SL2-R1/R2-E-6006, SL2-A1-E-6006  
(Expiry date : September 14, 2016)  
IC Registration No. : 2079E-3, 2079E-4 (Expiry date : July 20, 2014)

Accredited as conformity assessment body for Japan electrical appliances and material law by METI.  
(Expiry date : February 22, 2016)

## 6 Details of the Equipment Under Test

### 6.1 Operating Condition

The test were carried under worst modulation type shown as follows:

Mode : 12.2 kbps RMC

The Radiated Emission test were carried under 3 test configurations shown in clause 6.3.

In all tests, the fully charged battery is used for the EUT.

Other Clock Frequency

32.768 kHz, 19.2 MHz, 27 MHz, 27.12 MHz, 48 MHz

The EUT was rotated through three orthogonal axis (X, Y and Z axis) in radiated measurement.

The EUT with temporary antenna port was used in conducted measurement.

### 6.2 Test Configuration

The equipment under test (EUT) consists of :

|   | Item             | Manufacturer           | Model No. | Serial No.                                         | FCC ID      |
|---|------------------|------------------------|-----------|----------------------------------------------------|-------------|
| A | Cellular Phone   | Sharp                  | SH-04F    | 004401115<br>065365 *1)<br>004401115<br>065464 *2) | APYHRO00207 |
| B | AC Adapter       | Fujitsu<br>Corporation | 04        | WDA                                                | N/A         |
| C | Stereo Handsfree | Sharp                  | SHLDL1    | --                                                 | N/A         |

\*1) Used for Field Strength of Spurious Emission

\*2) Used for Antenna Conducted Emission and Frequency Stability

The auxiliary equipment used for testing :


None

Type of Cable:


| No. | Description          | Identification<br>(Manu. etc.) | Connector<br>Shielded | Cable<br>Shielded | Ferrite<br>Core | Length<br>(m) |
|-----|----------------------|--------------------------------|-----------------------|-------------------|-----------------|---------------|
| 1   | USB conversion cable | --                             | --                    | NO                | YES             | 1.1           |
| 2   | Handsfree Cable      | --                             | --                    | NO                | NO              | 1.5           |

### 6.3 Test Arrangement (Drawings)


a) Single Unit



b) AC Adapter used

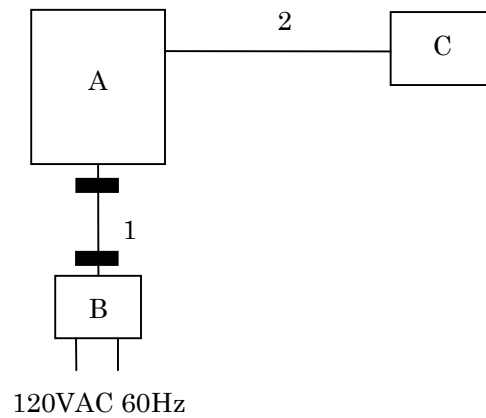

c) Earphone used

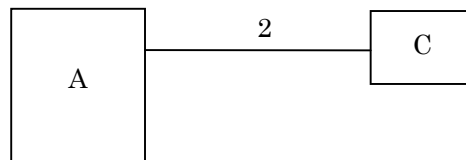

 : Ferrite Core

## 7 Details of the Test Item

### 7.0 Summary of the Test Results

| Test Item                               | FCC Specification    | Reference of the Test Report | Results | Remarks |
|-----------------------------------------|----------------------|------------------------------|---------|---------|
| RF Power Output                         | Section 22.913(a)(2) | Section 7.1                  | Passed  | -       |
| ERP / EIRP RF Power Output              | Section 22.913(a)(2) | Section 7.2                  | Passed  | -       |
| Modulation Characteristics              | -                    | -                            | -       | -       |
| Occupied Bandwidth                      | Section 22.917       | Section 7.4                  | Passed  | -       |
| Spurious Emissions at Antenna Terminals | Section 22.917       | Section 7.5                  | Passed  | -       |
| Band-Edge Emission                      | Section 22.917       | Section 7.6                  | Passed  | -       |
| Field Strength of Spurious Radiation    | Section 22.917       | Section 7.7                  | Passed  | -       |
| Frequency Stability                     | Section 22.355       | Section 7.8                  | Passed  | -       |

### 7.1 RF Power Output (§2.1046)

For the requirements, ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]  
☐ - Not Applicable

For the limits, ☒ - Passed ☐ - Failed ☐ - Not judged

#### 7.1.1 Worst Point and Measurement Uncertainty

Transmitter Power is 587.5 mW at 846.600 MHz(Peak)  
246.0 mW at 846.600 MHz(Average)

Uncertainty of Measurement Results at Amplitude +/-0.7 dB(2σ)

Remarks : \_\_\_\_\_

#### 7.1.2 Test Site and Instruments

##### 7.1.2.1 Test Site

KITA-KANSAI Testing Center

Test site : SAITO ☐ - Anechoic chamber (A1) ☐ - Measurement room (M1)  
☐ - Measurement room (M2) ☐ - Measurement room (M3)  
☐ - Shielded room (S1) ☐ - Shielded room (S2)  
☐ - Shielded room (S3) ☒ - Shielded room (S4)




### 7.1.2.2 Test Instruments

| Type         | Model       | Manufacturer | ID No. | Last Cal. | Interval |
|--------------|-------------|--------------|--------|-----------|----------|
| Power Meter  | N1911A      | Agilent      | B-63   | 2013/7    | 1 Year   |
| Power Sensor | N1921A      | Agilent      | B-64   | 2013/7    | 1 Year   |
| Attenuator   | 54A-10      | Weinschel    | D-28   | 2013/9    | 1 Year   |
| RF Cable     | SUCOFLEX102 | SUHNER       | C-52   | 2013/7    | 1 Year   |

### 7.1.3 Test Method and Test Setup (Diagrammatic illustration)

The Conducted RF Power Output was measured with a power meter, one 10dB attenuator and a short, low loss cable.



#### 7.1.4 Test Data

(WCDMA850)

Test Date: March 10, 2014

Temp.: 21 °C, Humi: 25 %

| Transmitting Frequency<br>CH | [MHz]   | Correction Factor<br>[dB] | Meter Reading (Peak)<br>[dBm] | Results (Peak)<br>[dBm] | [mW]  |
|------------------------------|---------|---------------------------|-------------------------------|-------------------------|-------|
| 4132                         | 826.400 | 9.98                      | 17.63                         | 27.61                   | 576.8 |
| 4182                         | 836.400 | 9.99                      | 16.88                         | 26.87                   | 486.4 |
| 4233                         | 846.600 | 9.99                      | 17.70                         | 27.69                   | 587.5 |

| Transmitting Frequency<br>CH | [MHz]   | Correction Factor<br>[dB] | Meter Reading (Average)<br>[dBm] | Results (Average)<br>[dBm] | [mW]  |
|------------------------------|---------|---------------------------|----------------------------------|----------------------------|-------|
| 4132                         | 826.400 | 9.98                      | 13.90                            | 23.88                      | 244.3 |
| 4182                         | 836.400 | 9.99                      | 13.89                            | 23.88                      | 244.3 |
| 4233                         | 846.600 | 9.99                      | 13.92                            | 23.91                      | 246.0 |

Calculated result at 846.600 MHz, as the maximum level point shown on underline:

|                   |   |       |                |
|-------------------|---|-------|----------------|
| Correction Factor | = | 9.99  | dB             |
| + ) Meter Reading | = | 17.70 | dBm            |
| Result            | = | 27.69 | dBm = 587.5 mW |

NOTE : The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.

**7.2 ERP / EIRP RF Power Output**

For the requirements, ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]  
☐ - Not Applicable

For the limits, ☒ - Passed ☐ - Failed ☐ - Not judged

**7.2.1 Worst Point and Measurement Uncertainty**

Min. Limit Margin 14.3 dB at 836.400 MHz

Uncertainty of Measurement Results +/-1.4 dB(2 $\sigma$ )

Remarks : The maximum ERP is 0.263 W at 836.400 MHz.

**7.2.2 Test Site and Instruments****7.2.2.1 Test Site**

KITA-KANSAI Testing Center SAITO EMC Branch

☐ - Anechoic chamber A1 ☒ - Anechoic chamber A2

**7.2.2.2 Test Instruments**

| Type                 | Model        | Manufacturer    | ID No. | Last Cal. | Interval |
|----------------------|--------------|-----------------|--------|-----------|----------|
| Test Receiver        | ESU26        | Rohde & Schwarz | A-6    | 2013/4    | 1 Year   |
| Signal Generator     | E8257D       | Agilent         | B-39   | 2013/8    | 1 Year   |
| Power Meter          | N1911A       | Agilent         | B-63   | 2013/7    | 1 Year   |
| Power Sensor         | N1921A       | Agilent         | B-64   | 2013/7    | 1 Year   |
| Attenuator(TX)       | 2-10         | Weinschel       | D-79   | 2013/11   | 1 Year   |
| Log-periodic Antenna | UHALP9108-A1 | Schwarzbeck     | C-31   | 2013/5    | 1 Year   |
| Dipole Antenna(TX)   | KBA-611      | Kyoritsu        | C-20   | 2013/5    | 1 Year   |

### 7.2.3 Test Method and Test Setup (Diagrammatic illustration)

#### Step 1:

In order to obtain the maximum emission, the EUT was placed at the height 1.5 m on the non-conducted support and was varying at three orthogonal axes, at the distance 3 m from the receiving antenna and rotated around 360 degrees.

The receiving antenna height was varied from 1 m to 4 m.

The EUT on the table was placed to be maximum emission against at the receiving antenna polarized (vertical and horizontal).

Then the meter reading of the spectrum analyzer at the maximum emission was A dB( $\mu$ V).

#### Step 2:

The EUT was replaced to substitution antenna at the same polarized under the same condition as step 1.

The RF power was fed to the transmitting antenna through the RF amplifier from the signal generator.

In order to obtain the maximum emission level, the height of the receiving antenna was varied from 1 m to 4 m.

The level of maximum emission was A dB( $\mu$ V), same as the recorded level in the step 1.

Then the RF power into the substitution horn antenna was P (dBm).


The ERP/EIRP output power was calculated in the following equation.

$$\text{ERP (dBm)} = \text{P (dBm)} - \text{Balun loss of the tuned dipole antenna (dB)} + \text{Cable loss (dB)}$$


$$\text{EIRP (dBm)} = \text{P (dBm)} + \text{Gh (dBi)}$$

where, Gh (dBi) : Gain of the substitution horn antenna.

– Side View –

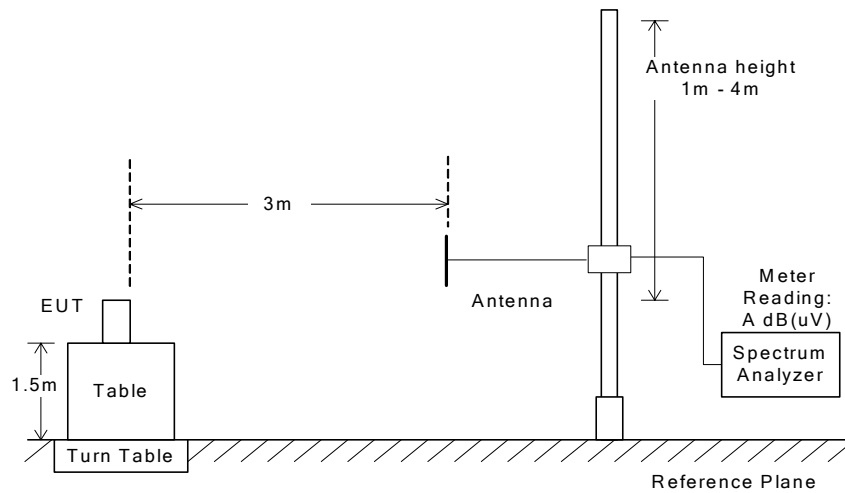

(a)EUT

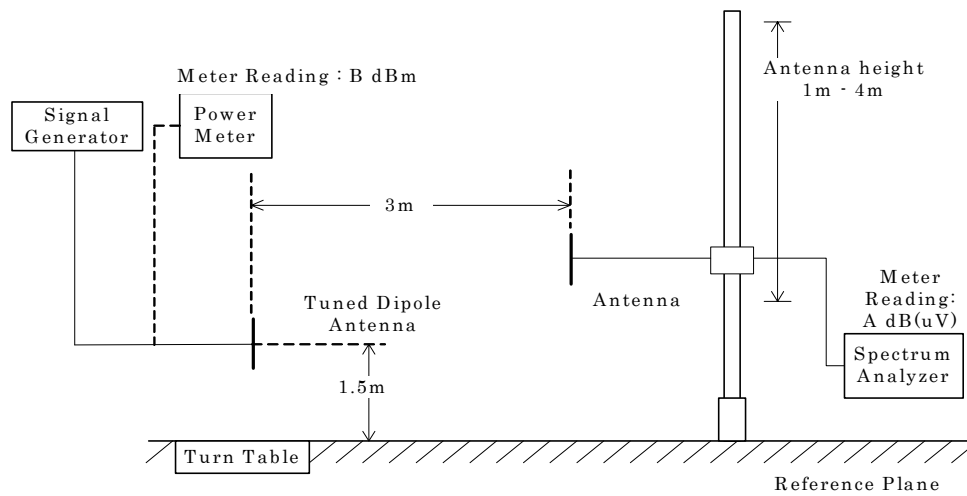

(b) Substitution Half-wave Dipole Antenna

## 7.2.4 Test Data

(WCDMA850)

Test Date: March 14, 2014

Temp.: 20 °C, Humi: 39 %

### 1. Measurement Results

| CH   | Transmitting Frequency [MHz] | Emission Measurement [dB(uV)] |            | Substitution Measurement [dB(uV)] |             | Supplied Power to Substitution Antenna [dBm] | Balun Loss of Substitution Antenna [dB] |
|------|------------------------------|-------------------------------|------------|-----------------------------------|-------------|----------------------------------------------|-----------------------------------------|
|      |                              | Hori. (Mh)                    | Vert. (Mv) | Hori. (Msh)                       | Vert. (Msv) |                                              |                                         |
| 4132 | 826.400                      | 97.3                          | 95.4       | 67.0                              | 65.8        | - 5.0                                        | 1.5                                     |
| 4182 | 836.400                      | 97.4                          | 95.6       | 66.7                              | 65.6        | - 5.0                                        | 1.5                                     |
| 4233 | 846.600                      | 96.6                          | 95.5       | 66.4                              | 65.3        | - 5.0                                        | 1.6                                     |

### 2. Calculation Results

| CH   | Transmitting Frequency [MHz] | Peak ERP [dBm] |              | Maximum Peak ERP [W] | Limits [dBm] | Margin [dB] |
|------|------------------------------|----------------|--------------|----------------------|--------------|-------------|
|      |                              | Hori. (ERPh)   | Vert. (ERPv) |                      |              |             |
| 4132 | 826.400                      | 23.8           | 23.1         | 0.240                | 38.5         | +14.7       |
| 4182 | 836.400                      | 24.2           | 23.5         | 0.263                | 38.5         | +14.3       |
| 4233 | 846.600                      | 23.6           | 23.6         | 0.229                | 38.5         | +14.9       |

Calculated result at 836.400 MHz, as the worst point shown on underline:

|                                        |   |                    |
|----------------------------------------|---|--------------------|
| Emission Measurement (Mh)              | = | 97.4 dB(uV)        |
| Substitution Measurement (Msh)         | = | -66.7 dB(uV)       |
| Supplied Power to Substitution Antenna | = | -5.0 dBm           |
| + ) Balun Loss of Substitution Antenna | = | -1.5 dB            |
| Result (ERPh)                          | = | 24.2 dBm = 0.263 W |

Minimum Margin: 38.5 - 24.2 = 14.3 (dB)

NOTE : Setting of measuring instrument(s) :

| Detector Function | Resolution B.W. | V.B.W. | Sweep Time |
|-------------------|-----------------|--------|------------|
| Peak              | 5 MHz           | 5 MHz  | AUTO       |

### 7.3 Modulation Characteristics (§2.1047)

For the requirements, ☐ - Applicable ☐ - Tested. ☐ - Not tested by applicant request.]  
☒ - Not Applicable

For the limits, ☐ - Passed ☐ - Failed ☐ - Not judged

### 7.4 Occupied Bandwidth (§2.1049)

For the requirements, ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]  
☐ - Not Applicable

For the limits, ☒ - Passed ☐ - Failed ☐ - Not judged

#### 7.4.1 Worst Point and Measurement Uncertainty

The 99% Bandwidth is 4.16 MHz at 826.4/836.4/846.6 MHz  
The 26dB Bandwidth is 4.62 MHz at 826.4/836.4/846.6 MHz

Uncertainty of Measurement Results +/-0.9 %(2σ)

Remarks : \_\_\_\_\_

#### 7.4.2 Test Site and Instruments

##### 7.4.2.1 Test Site

KITA-KANSAI Testing Center


Test site : SAITO ☐ - Anechoic chamber (A1) ☐ - Measurement room (M1)  
☐ - Measurement room (M2) ☐ - Measurement room (M3)  
☐ - Shielded room (S1) ☐ - Shielded room (S2)  
☐ - Shielded room (S3) ☒ - Shielded room (S4)

#### 7.4.2.2 Test Instruments

| Type              | Model       | Manufacturer | ID No. | Last Cal. | Interval |
|-------------------|-------------|--------------|--------|-----------|----------|
| Spectrum Analyzer | E4446A      | Agilent      | A-39   | 2013/9    | 1 Year   |
| Attenuator        | 54A-10      | Weinschel    | D-28   | 2013/9    | 1 Year   |
| RF Cable          | SUCOFLEX102 | SUHNER       | C-52   | 2013/7    | 1 Year   |

#### 7.4.3 Test Method and Test Setup (Diagrammatic illustration)

The test system is shown as follows:



The setting of the spectrum analyzer are shown as follows:

|                 |         |
|-----------------|---------|
| Res. Bandwidth  | 30 kHz  |
| Video Bandwidth | 100 kHz |
| Span            | 5 MHz   |
| Sweep Time      | AUTO    |
| Trace           | Maxhold |



#### 7.4.4 Test Data


The resolution bandwidth was set to about 1% of emission bandwidth, -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

Test Date : March 10, 2014


Temp.:21°C, Humi:25%

| Channel | Frequency (MHz) | 99% Bandwidth (MHz) | -26dBc Bandwidth (MHz) |
|---------|-----------------|---------------------|------------------------|
| 4132    | 826.40          | 4.16                | 4.62                   |
| 4182    | 836.40          | 4.16                | 4.62                   |
| 4233    | 846.60          | 4.16                | 4.62                   |

#### Low Channel

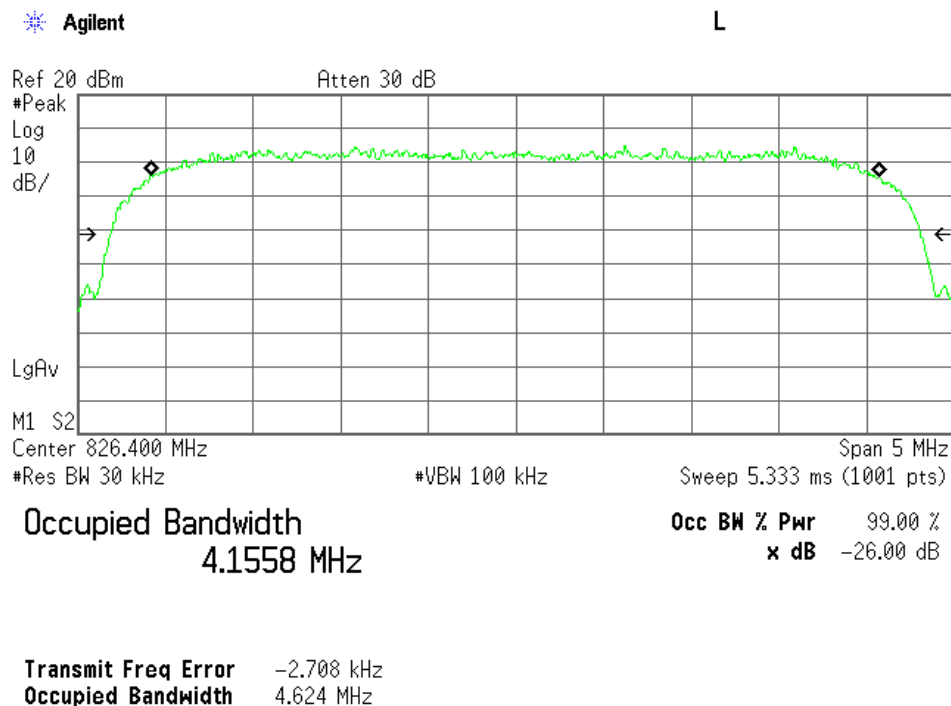


## Middle Channel

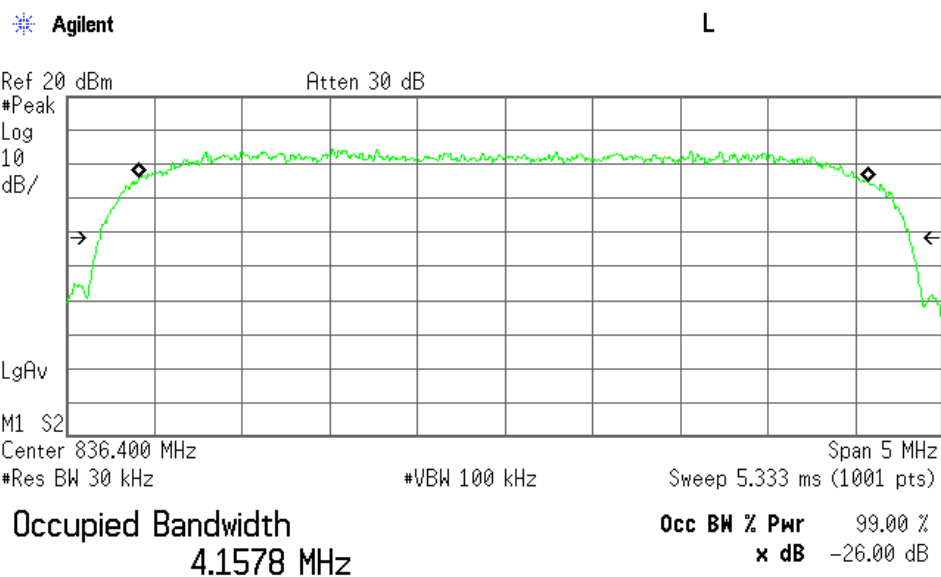

Transmit Freq Error -4.881 kHz  
Occupied Bandwidth 4.618 MHz

## High Channel

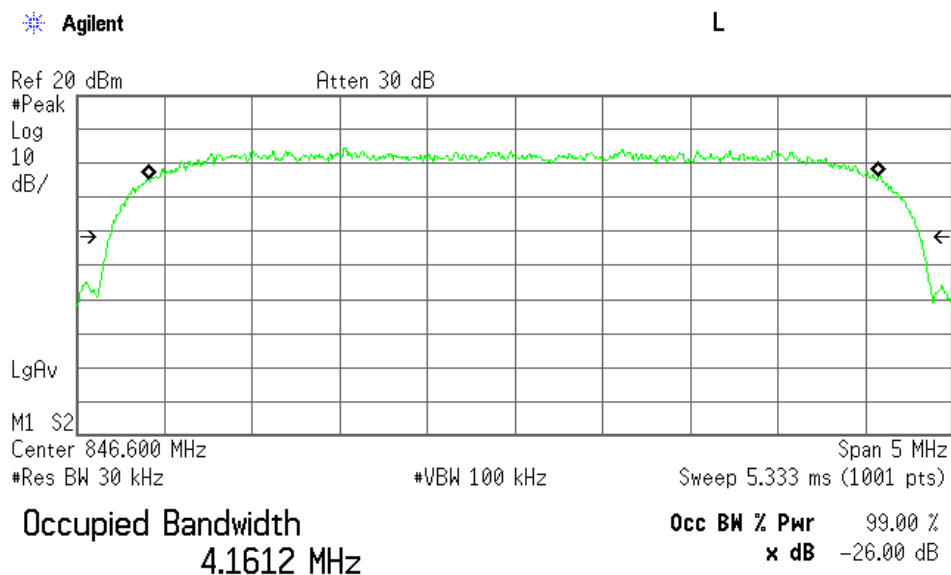

Transmit Freq Error -3.215 kHz  
Occupied Bandwidth 4.619 MHz

## 7.5 Spurious Emissions at Antenna Terminals (§2.1051)

For the requirements, ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]  
☐ - Not Applicable

For the limits, ☒ - Passed ☐ - Failed ☐ - Not judged

### 7.5.1 Worst Point and Measurement Uncertainty

Min. Limit Margin 30.9 dB at 1693.200 MHz

|                                    |               |               |                 |
|------------------------------------|---------------|---------------|-----------------|
| Uncertainty of Measurement Results | 9 kHz – 1GHz  | <u>+/-1.0</u> | dB(2 $\sigma$ ) |
|                                    | 1GHz – 18GHz  | <u>+/-1.2</u> | dB(2 $\sigma$ ) |
|                                    | 18GHz – 40GHz | <u>+/-1.6</u> | dB(2 $\sigma$ ) |

Remarks : \_\_\_\_\_

### 7.5.2 Test Site and Instruments

#### 7.5.2.1 Test Site

KITA-KANSAI Testing Center

Test site : SAITO

|                                                  |                                                          |
|--------------------------------------------------|----------------------------------------------------------|
| <input type="checkbox"/> - Anechoic chamber (A1) | <input type="checkbox"/> - Measurement room (M1)         |
| <input type="checkbox"/> - Measurement room (M2) | <input type="checkbox"/> - Measurement room (M3)         |
| <input type="checkbox"/> - Shielded room (S1)    | <input type="checkbox"/> - Shielded room (S2)            |
| <input type="checkbox"/> - Shielded room (S3)    | <input checked="" type="checkbox"/> - Shielded room (S4) |


### 7.5.2.2 Test Instruments

| Type              | Model       | Manufacturer  | ID No. | Last Cal. | Interval |
|-------------------|-------------|---------------|--------|-----------|----------|
| Spectrum Analyzer | E4446A      | Agilent       | A-39   | 2013/9    | 1 Year   |
| Attenuator        | 54A-10      | Weinschel     | D-28   | 2013/9    | 1 Year   |
| RF Cable          | SUCOFLEX102 | SUHNER        | C-52   | 2013/7    | 1 Year   |
| HPF               | HPM5010S    | MICRO-TRONICS | D-94   | 2014/2    | 1 Year   |


### 7.5.3 Test Method and Test Setup (Diagrammatic illustration)

The Antenna Conducted Emission was measured with a spectrum analyzer. The test system is shown as follows:

a) Frequency Range : 9kHz - 1.2GHz



b) Frequency Range : 1.2GHz - 10GHz



The setting of the spectrum analyzer are shown as follows:

| Frequency Range | 9 kHz - 150 kHz | 150 kHz - 30 MHz | 30 MHz - 10 GHz |
|-----------------|-----------------|------------------|-----------------|
| Res. Bandwidth  | 200 Hz          | 10 kHz           | 1 MHz           |
| Video Bandwidth | 1 kHz           | 30 kHz           | 3 MHz           |
| Sweep Time      | AUTO            | AUTO             | AUTO            |
| Trace           | Maxhold         | Maxhold          | Maxhold         |

#### 7.5.4 Test Data

(WCDMA850)

Test Date: March 10, 2014

Temp.: 21 °C, Humi: 25 %

| Transmitting<br>Frequency<br>CH | Transmitting<br>Frequency<br>[MHz] | Measured<br>Frequency<br>[MHz] | Corr.<br>Factor<br>[dB] | Meter Readings<br>[dBm] | Limits<br>[dBm] | Results<br>[dBm] | Margin<br>[dB] | Remarks |
|---------------------------------|------------------------------------|--------------------------------|-------------------------|-------------------------|-----------------|------------------|----------------|---------|
| 4132                            | 826.400                            | 1652.800                       | 11.2                    | -56.6                   | -13.0           | -45.4            | +32.4          | C       |
|                                 |                                    | 2479.200                       | 10.9                    | < -63.0                 | -13.0           | < -52.1          | > +39.1        | C       |
|                                 |                                    | 3305.600                       | 11.0                    | < -63.0                 | -13.0           | < -52.0          | > +39.0        | C       |
|                                 |                                    | 4132.000                       | 11.1                    | < -63.0                 | -13.0           | < -51.9          | > +38.9        | C       |
|                                 |                                    | 4958.400                       | 11.2                    | < -63.0                 | -13.0           | < -51.8          | > +38.8        | C       |
|                                 |                                    | 5784.800                       | 11.2                    | < -63.0                 | -13.0           | < -51.8          | > +38.8        | C       |
|                                 |                                    | 6611.200                       | 11.4                    | < -63.0                 | -13.0           | < -51.6          | > +38.6        | C       |
|                                 |                                    | 7437.600                       | 11.6                    | < -63.0                 | -13.0           | < -51.4          | > +38.4        | C       |
| 4182                            | 836.400                            | 8264.000                       | 11.9                    | < -63.0                 | -13.0           | < -51.1          | > +38.1        | C       |
|                                 |                                    | 1672.800                       | 11.2                    | -58.3                   | -13.0           | -47.1            | +34.1          | C       |
|                                 |                                    | 2509.200                       | 10.9                    | < -63.0                 | -13.0           | < -52.1          | > +39.1        | C       |
|                                 |                                    | 3345.600                       | 11.0                    | < -63.0                 | -13.0           | < -52.0          | > +39.0        | C       |
|                                 |                                    | 4182.000                       | 11.1                    | < -63.0                 | -13.0           | < -51.9          | > +38.9        | C       |
|                                 |                                    | 5018.400                       | 11.2                    | < -63.0                 | -13.0           | < -51.8          | > +38.8        | C       |
|                                 |                                    | 5854.800                       | 11.2                    | < -63.0                 | -13.0           | < -51.8          | > +38.8        | C       |
|                                 |                                    | 6691.200                       | 11.4                    | < -63.0                 | -13.0           | < -51.6          | > +38.6        | C       |
| 4233                            | 846.600                            | 7527.600                       | 11.6                    | < -63.0                 | -13.0           | < -51.4          | > +38.4        | C       |
|                                 |                                    | 8364.000                       | 11.9                    | < -63.0                 | -13.0           | < -51.1          | > +38.1        | C       |
|                                 |                                    | 1693.200                       | 11.2                    | -55.1                   | -13.0           | -43.9            | +30.9          | C       |
|                                 |                                    | 2539.800                       | 10.9                    | < -63.0                 | -13.0           | < -52.1          | > +39.1        | C       |
|                                 |                                    | 3386.400                       | 11.0                    | < -63.0                 | -13.0           | < -52.0          | > +39.0        | C       |
|                                 |                                    | 4233.000                       | 11.0                    | < -63.0                 | -13.0           | < -52.0          | > +39.0        | C       |
|                                 |                                    | 5079.600                       | 11.2                    | < -63.0                 | -13.0           | < -51.8          | > +38.8        | C       |
|                                 |                                    | 5926.200                       | 11.2                    | < -63.0                 | -13.0           | < -51.8          | > +38.8        | C       |
|                                 |                                    | 6772.800                       | 11.5                    | < -63.0                 | -13.0           | < -51.5          | > +38.5        | C       |
|                                 |                                    | 7619.400                       | 11.6                    | < -63.0                 | -13.0           | < -51.4          | > +38.4        | C       |
|                                 |                                    | 8466.000                       | 11.9                    | < -63.0                 | -13.0           | < -51.1          | > +38.1        | C       |

Calculated result at 1693.2 MHz, as the worst point shown on underline:

|                   |   |           |
|-------------------|---|-----------|
| Corr. Factor      | = | 11.2 dB   |
| + ) Meter Reading | = | -55.1 dBm |
| Result            | = | -43.9 dBm |


Minimum Margin:  $-13.0 - (-43.9) = 30.9$  (dB)

#### NOTES


- The spectrum was checked from 9 kHz to 10 GHz.
- Applied limits :  $-13.0$  [dBm] =  $10\log(TP[mW]) - (43 + 10\log(tp[W])) = 10\log(TP[mW]) - (43 + (10\log(TP[mW]) - 30))$   
where,  $tp[W] = TP[mW] / 1000$  : Transmitter power at antenna terminal
- The correction factor is shown as follows:  
Corr. Factor [dB] = Cable Loss + 10dB Pad Att. [dB] (9 kHz ~ 2 GHz)  
Corr. Factor [dB] = Cable Loss + 10dB Pad Att. + High Pass Filter Loss (D-96) [dB] (over 2 GHz)
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- Setting of measuring instrument(s) :

|   | Detector Function | RES B.W. | V.B.W. | Sweep Time |
|---|-------------------|----------|--------|------------|
| A | Peak              | 200 Hz   | 1 kHz  | AUTO       |
| B | Peak              | 10 kHz   | 30 kHz | AUTO       |
| C | Peak              | 1 MHz    | 3 MHz  | AUTO       |


## Low Channel, Out-Of-Band Emissions (9 kHz – 150 kHz)

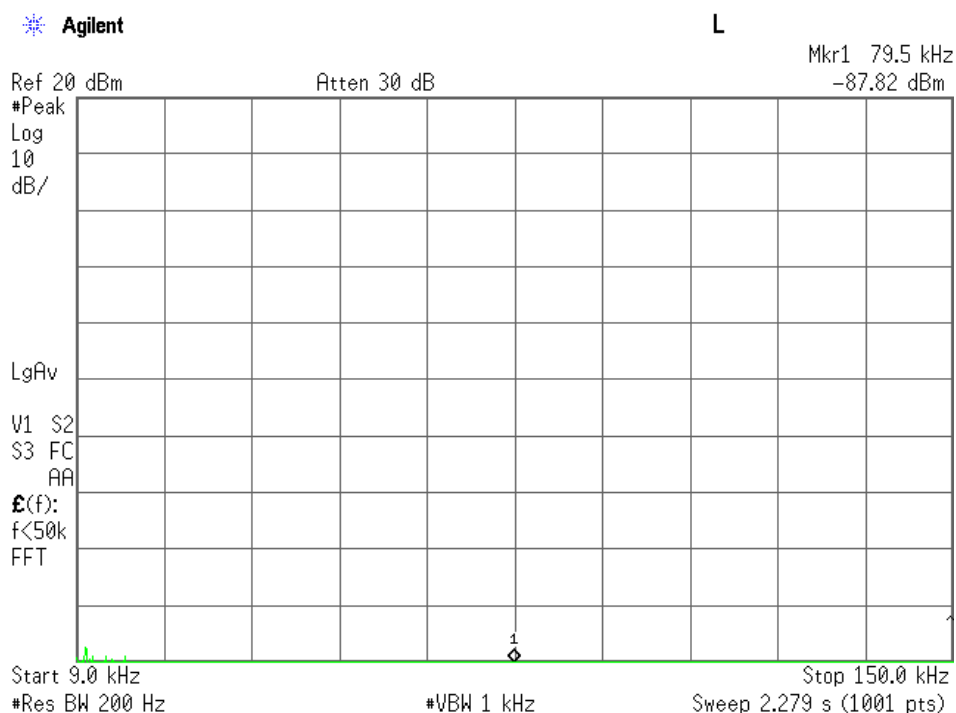


## Low Channel, Out-Of-Band Emissions (150 kHz – 30 MHz)

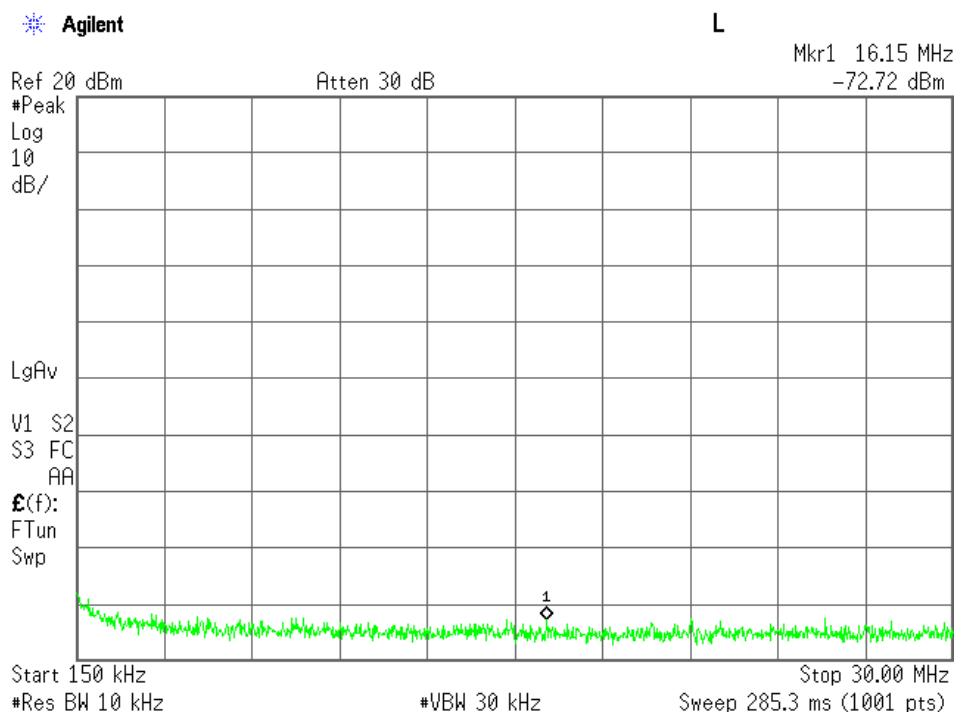

## Low Channel, Out-Of-Band Emissions (30 MHz – 1.2 GHz)

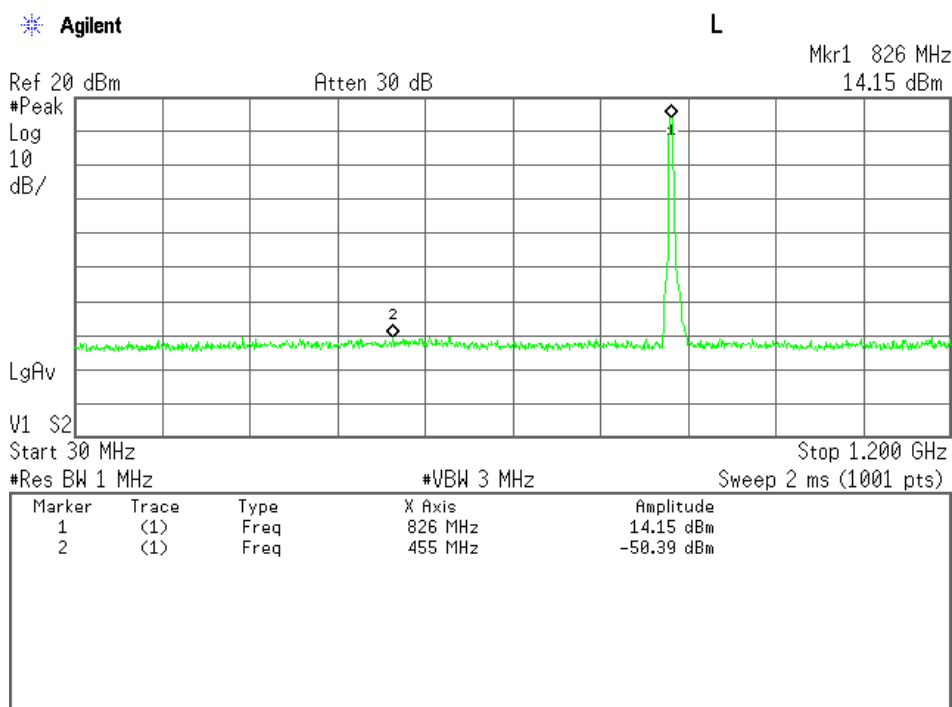


## Low Channel, Out-Of-Band Emissions (1.2 GHz – 10 GHz)

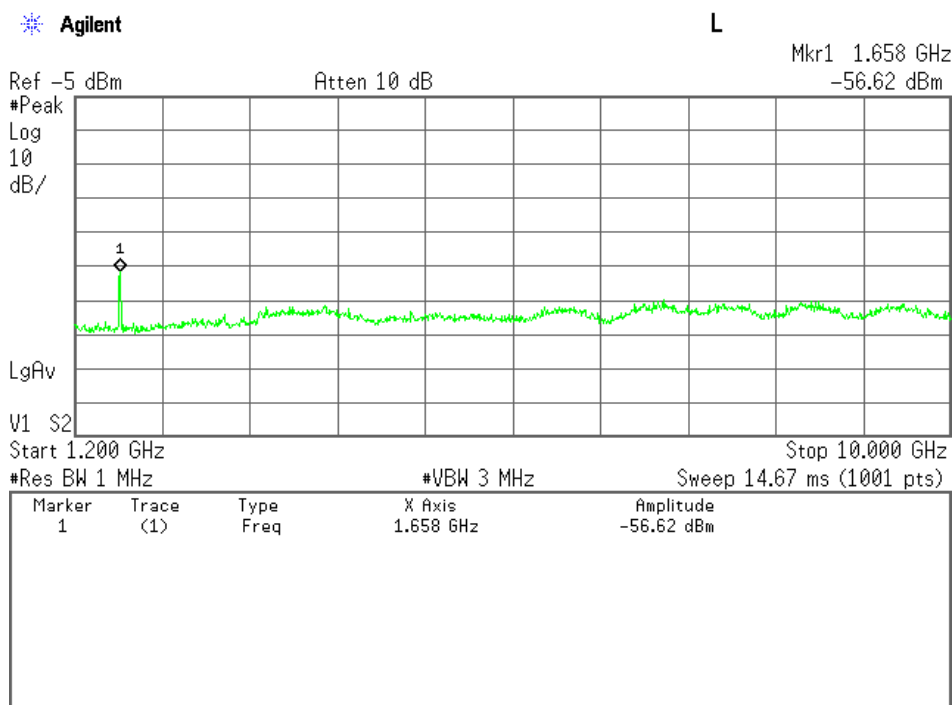





## Middle Channel, Out-Of-Band Emissions (9 kHz – 150 kHz)

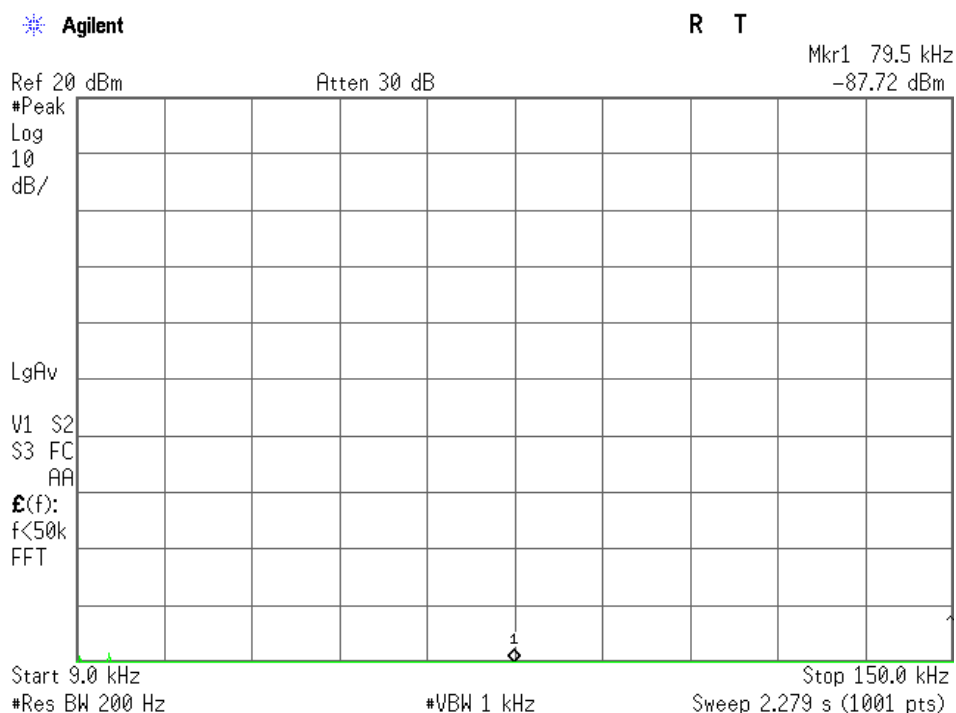


## Middle Channel, Out-Of-Band Emissions (150 kHz – 30 MHz)

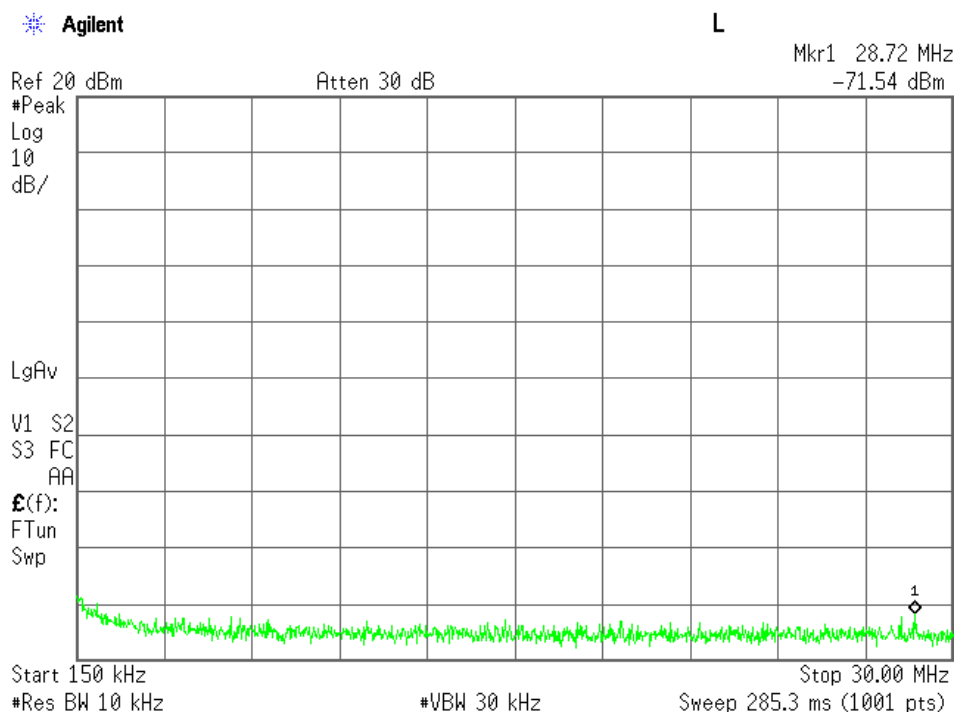


## Middle Channel, Out-Of-Band Emissions (30 MHz – 1.2 GHz)

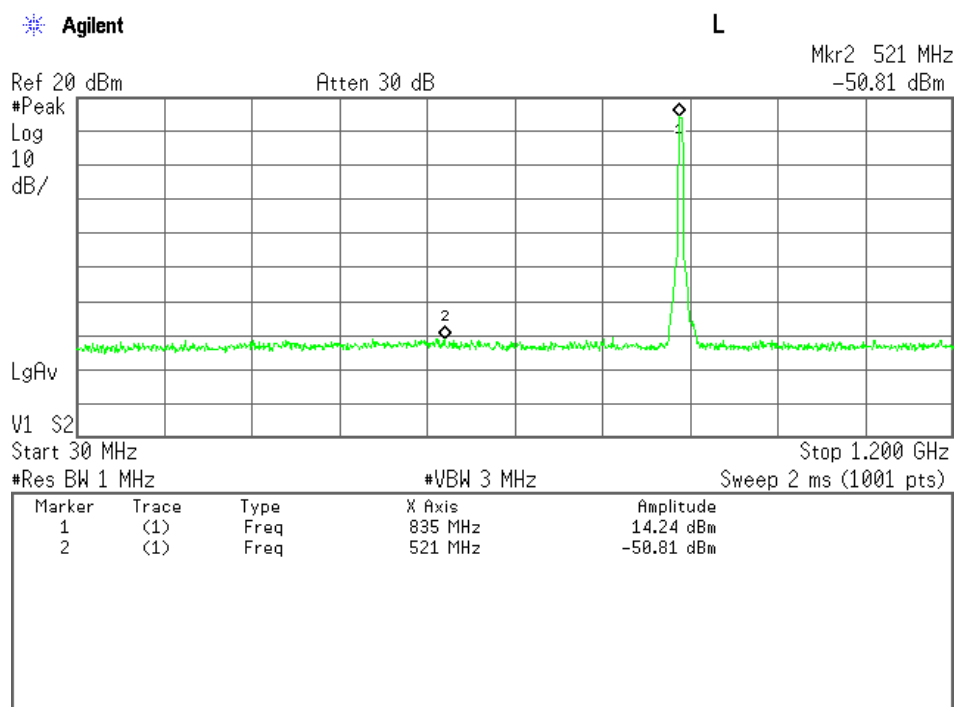


## Middle Channel, Out-Of-Band Emissions (1.2 GHz – 10 GHz)

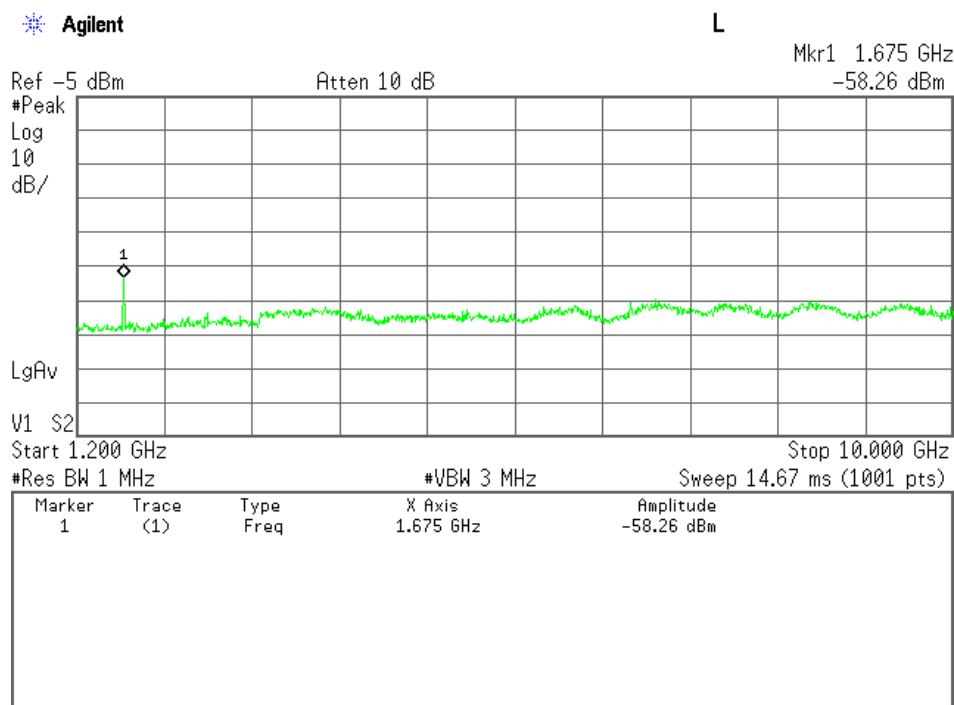


## High Channel, Out-Of-Band Emissions (9 kHz – 150 kHz)

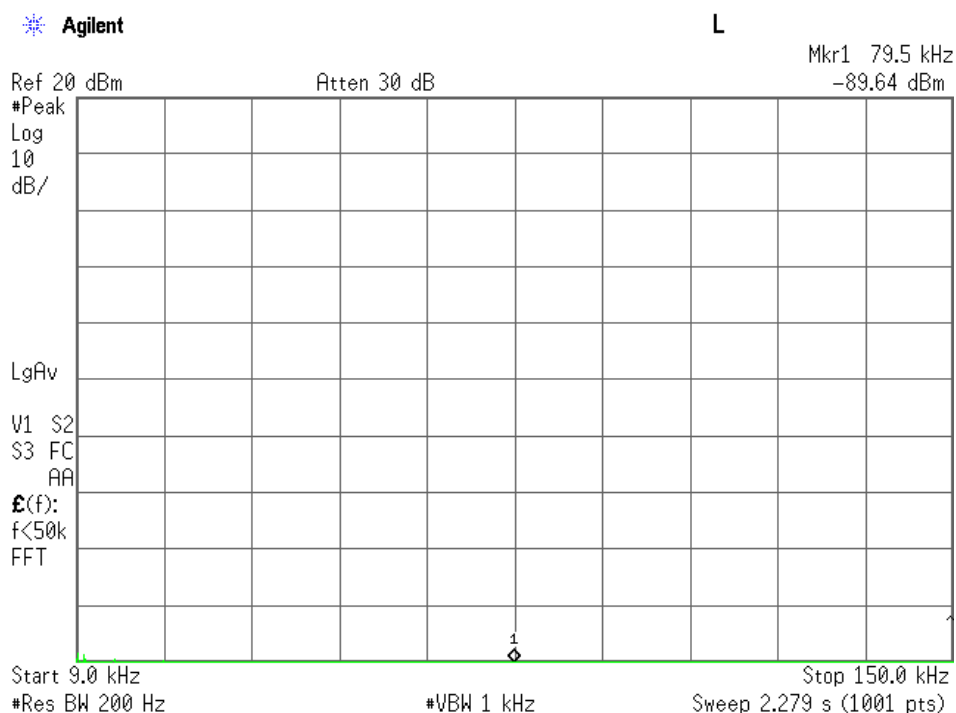


## High Channel, Out-Of-Band Emissions (150 kHz – 30 MHz)

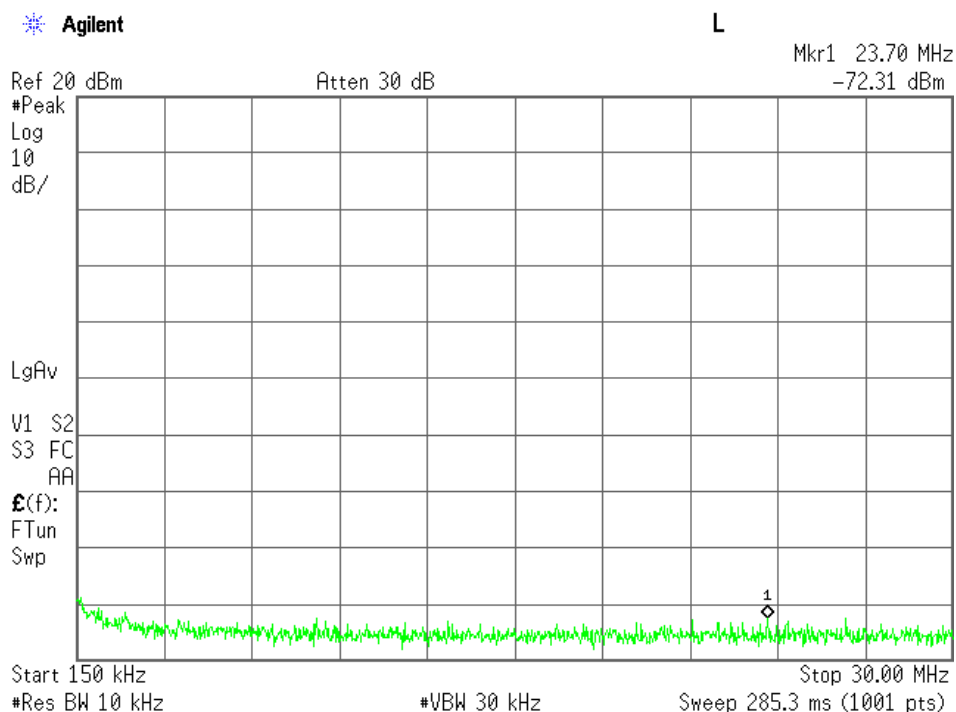

## High Channel, Out-Of-Band Emissions (30 MHz – 1.2 GHz)

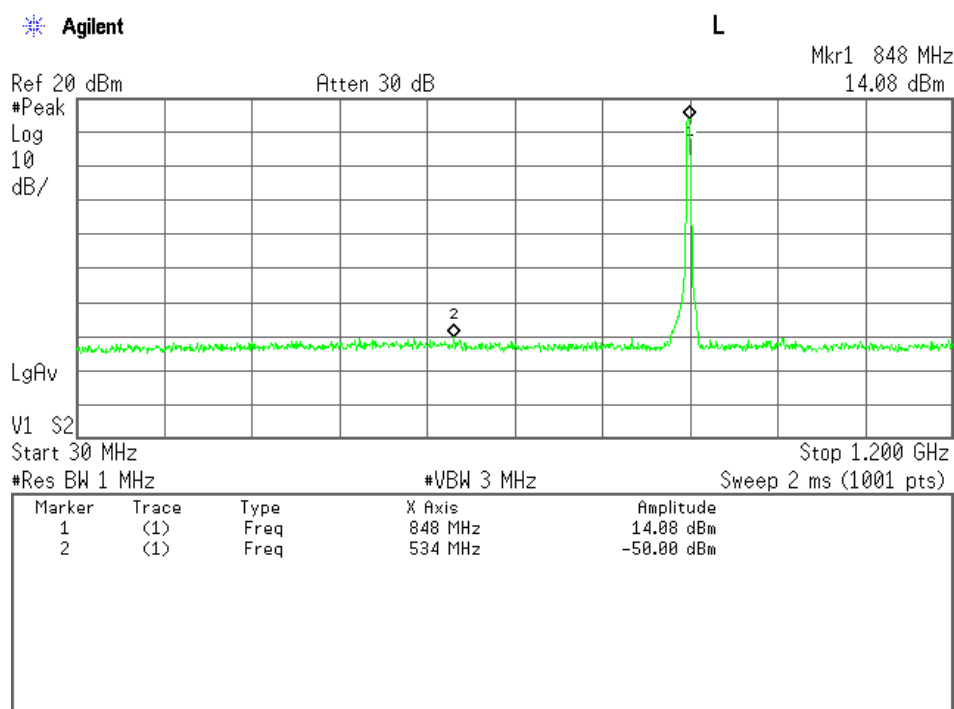

## High Channel, Out-Of-Band Emissions (1.2 GHz – 10 GHz)

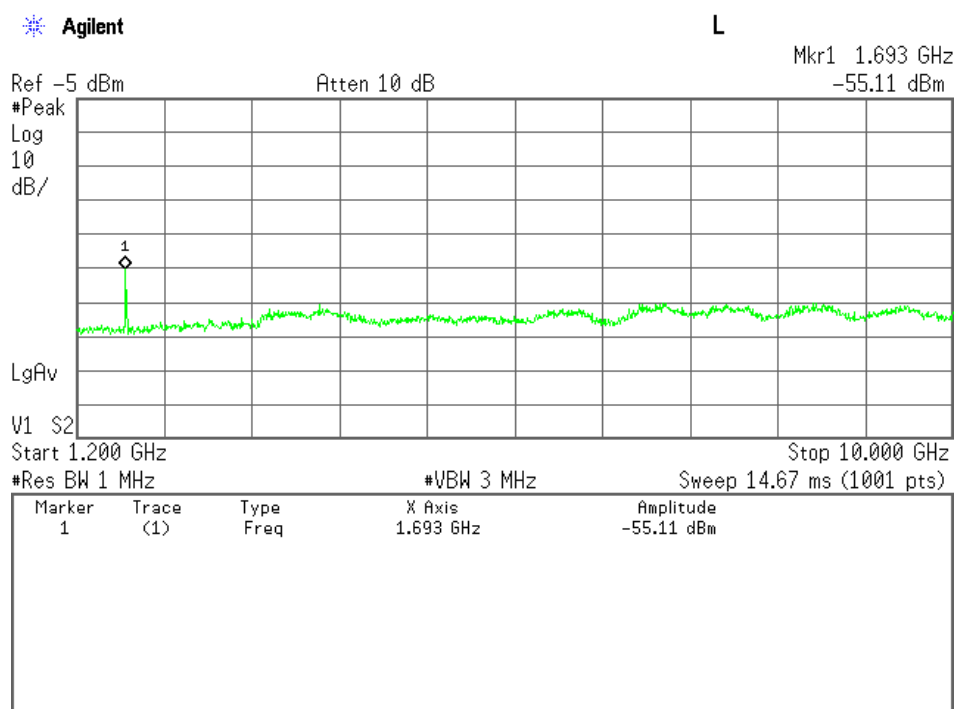

## 7.6 Band-Edge Emission (§2.1051)

For the requirements, ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]  
☐ - Not Applicable

For the limits, ☒ - Passed ☐ - Failed ☐ - Not judged

### 7.6.1 Worst Point and Measurement Uncertainty

Min. Limit Margin 11.5 dB at 849.000 MHz  
The Band-Edge level is -24.5 dBm at 849.000 MHz  
Uncertainty of Measurement Results +/-1.2 dB(2 $\sigma$ )

Remarks : \_\_\_\_\_

### 7.6.2 Test Site and Instruments

#### 7.6.2.1 Test Site

KITA-KANSAI Testing Center


Test site : SAITO ☐ - Anechoic chamber (A1) ☐ - Measurement room (M1)  
☐ - Measurement room (M2) ☐ - Measurement room (M3)  
☐ - Shielded room (S1) ☐ - Shielded room (S2)  
☐ - Shielded room (S3) ☒ - Shielded room (S4)

#### 7.6.2.2 Test Instruments

| Type              | Model       | Manufacturer | ID No. | Last Cal. | Interval |
|-------------------|-------------|--------------|--------|-----------|----------|
| Spectrum Analyzer | E4446A      | Agilent      | A-39   | 2013/9    | 1 Year   |
| Attenuator        | 54A-10      | Weinschel    | D-28   | 2013/9    | 1 Year   |
| RF Cable          | SUCOFLEX102 | SUHNER       | C-52   | 2013/7    | 1 Year   |

### 7.6.3 Test Method and Test Setup (Diagrammatic illustration)

The test system is shown as follows:



The setting of the spectrum analyzer are shown as follows:

|                     |                         |
|---------------------|-------------------------|
| TX Frequency        | 826.40 MHz / 846.60 MHz |
| Band-Edge Frequency | 824.00 MHz / 849.00 MHz |
| Res. Bandwidth      | 51 kHz                  |
| Video Bandwidth     | 51 kHz                  |
| Span                | 5 MHz                   |
| Sweep Time          | AUTO                    |
| Trace               | Maxhold                 |


### 7.6.4 Test Data

Test Date : March 10, 2014


Temp.:21°C, Humi:25%

| Channel | Frequency (MHz) | Band-Edge Frequency (MHz) | Band-Edge Level (dBm) | Limits (dBm) | Margin (dB) |
|---------|-----------------|---------------------------|-----------------------|--------------|-------------|
| 4132    | 826.4           | 824.0                     | -24.8                 | -13.0        | +11.8       |
| 4233    | 846.6           | 849.0                     | -24.5                 | -13.0        | +11.5       |

## Low Channel, Band-Edge Emission

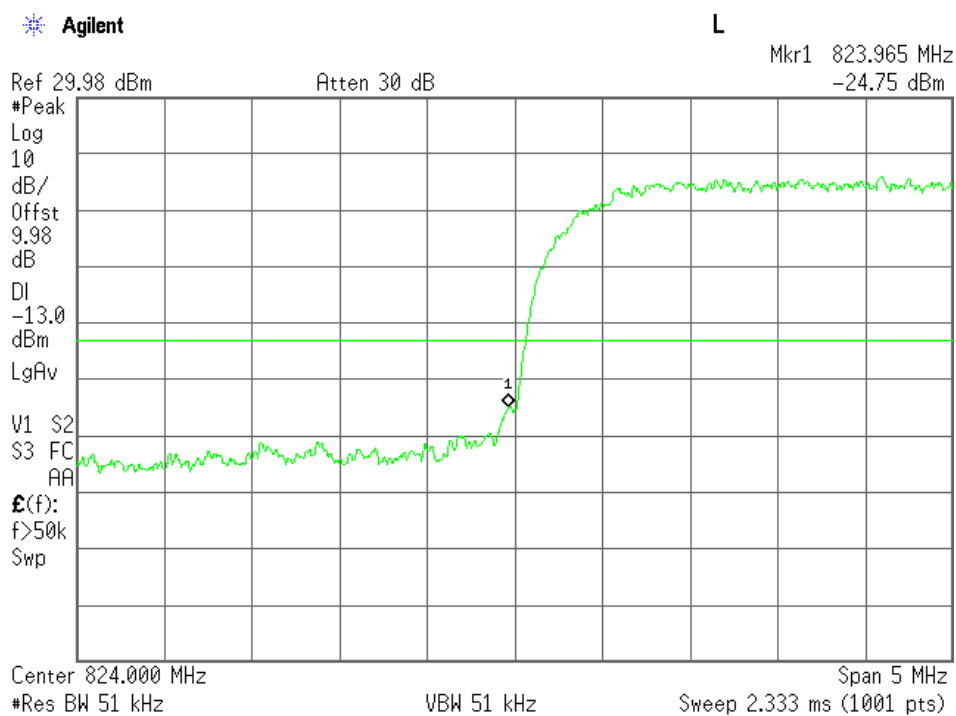

## High Channel, Band-Edge Emission

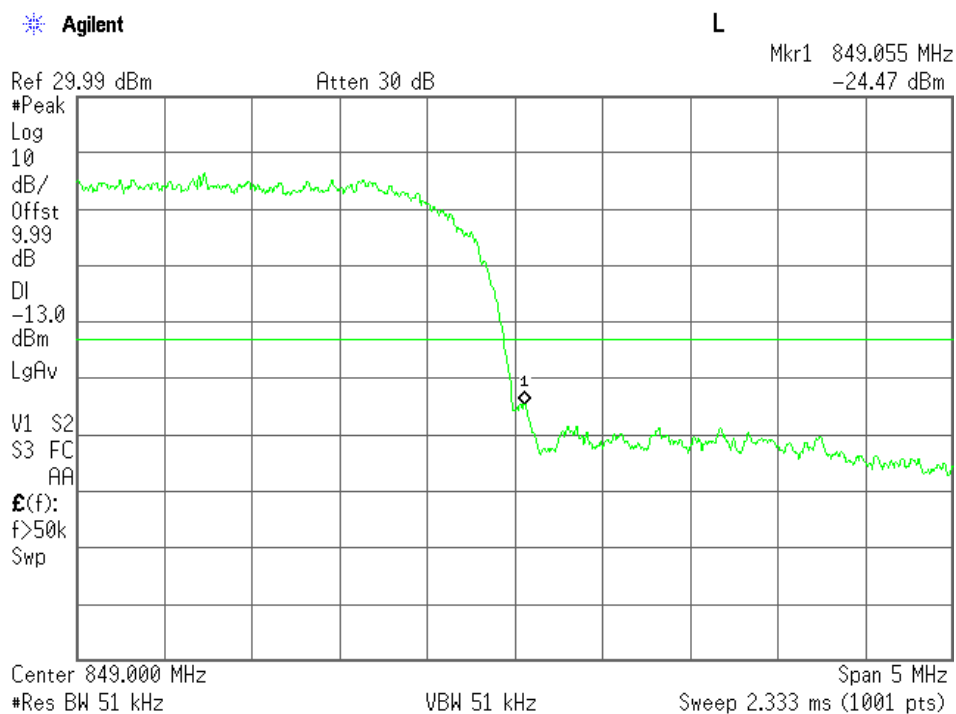

## 7.7 Field Strength of Spurious Radiation (§2.1053)

For the requirements, ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]  
☐ - Not Applicable

For the limits, ☒ - Passed ☐ - Failed ☐ - Not judged

### 7.7.1 Worst Point and Measurement Uncertainty

Min. Limit Margin >34.5 dB at 6611.200 MHz  
 Uncertainty of Measurement Results 30 MHz – 1000 MHz +/-1.4 dB(2 $\sigma$ )  
 above 1 GHz +/-2.2 dB(2 $\sigma$ )

Remarks : \_\_\_\_\_

### 7.7.2 Test Site and Instruments

#### 7.7.2.1 Test Site

KITA-KANSAI Testing Center SAITO EMC Branch

☐ - Anechoic chamber A1 ☒ - Anechoic chamber A2

#### 7.7.2.2 Test Instruments

| Type             | Model        | Manufacturer    | ID No. | Last Cal. | Interval |
|------------------|--------------|-----------------|--------|-----------|----------|
| Test Receiver    | ESU26        | Rohde & Schwarz | A-6    | 2013/4    | 1 Year   |
| Signal Generator | E8257A       | Agilent         | B-39   | 2013/8    | 1 Year   |
| Power Meter      | N1911A       | Agilent         | B-63   | 2013/7    | 1 Year   |
| Power Sensor     | N1921A       | Agilent         | B-64   | 2013/7    | 1 Year   |
| Horn Antenna     | 91888-2      | EATON           | C-41-1 | 2013/6    | 1 Year   |
| Horn Antenna     | 91889-2      | EATON           | C-41-2 | 2013/6    | 1 Year   |
| Horn Antenna     | 3160-05      | EATON           | C-56   | 2013/7    | 1 Year   |
| Horn Antenna     | 3160-06      | EATON           | C-57   | 2013/7    | 1 Year   |
| Horn Antenna     | 3160-07      | EATON           | C-58   | 2013/7    | 1 Year   |
| RF Cable         | SUCOFLEX104  | SUHNER          | C-66   | 2014/1    | 1 Year   |
| RF Cable         | SUCOFLEX104  | SUHNER          | C-67   | 2014/1    | 1 Year   |
| Attenuator       | 2-10         | Weinschel       | D-79   | 2013/11   | 1 Year   |
| Attenuator       | 54-10        | Weinschel       | D-29   | 2013/9    | 1 Year   |
| Pre-Amplifier    | WJ-6611-513  | Watkins Johnson | A-23   | 2014/1    | 1 Year   |
| Pre-Amplifier    | WJ-6882-824  | Watkins Johnson | A-21   | 2014/1    | 1 Year   |
| Pre-Amplifier    | DBL-0618N515 | DBS Microwave   | A-33   | 2014/1    | 1 Year   |
| HPF              | HPM5010S     | MICRO-TRONICS   | D-94   | 2014/2    | 1 Year   |



### 7.7.3 Test Method and Test Setup (Diagrammatic illustration)

Step 1) The spurious radiation for transmitter were measured at the distance 3 m away from the EUT which was placed on a non-conducted support 0.8 m in height and was varying at three orthogonal axes. The receiving antenna was oriented for vertical polarization and varied from 1 m to 4 m until the maximum emission level was detected on the measuring instrument. The EUT was rotated 360 degrees until the maximum emission was received. The measurement was also repeated with the receiving antenna in the horizontal polarization.

This test was carried out using the half-wave dipole antenna for up to 1GHz and using the horn antenna for above 1 GHz.

Step 2)

A) Up to 1 GHz

The ERP measurement was carried out with according to Step 2 in Clause 7.2.4. Then the RF power in the substitution antenna half-wave dipole antenna for up to 1 GHz and the substitution horn antenna for above 1 GHz.

The ERP is calculated in the following equation.

$$\text{ERP(dBm)} = P \text{ (dBm)} - (\text{Balun Loss of the half-wave dipole Ant. (dB)}) + \text{Cable Loss (dB)}$$

B) Above 1 GHz

The ERP is calculated from the maximum emission level by the following formula.

$$\frac{e^2}{120\pi} = \frac{\text{eirp}}{4\pi d^2} \text{ ----(Eq.1)}$$

$$\text{erp} = \text{eirp} - Gd \text{ ----(Eq.2)}$$

Where,  $e[V/m]$ : Field Strength at measuring distance( $d=3m$ )

$\text{eirp}[W]$ : Equivalent Isotropic Radiated Power

$\text{erp}[W]$ : Effective Radiated Power

$Gd(dBi)$ : Gain of the substitution half-wave dipole antenna(2.15dBi)

$$\text{eirp} = \frac{(de)^2}{30} = \frac{3}{10} e^2$$

$$\therefore 10 \log(\text{eirp}) = 20 \log(e) + 10 \log(3/10) = 20 \log(e) - 5.23$$

$$10 \log(\text{eirp}) = \text{EIRP[dBm]} - 30$$


$$20 \log(e) = E[dB(\mu V/m)] - 120$$

$$\therefore \text{EIRP} = E - 120 + 30 - 5.23 = E - 95.23$$


$$\therefore \text{ERP[dBm]} = \text{EIRP} - 2.15 = E - 97.38$$

The respective calculated ERP of the spurious and harmonics were compared with the ERP of fundamental frequency by specified attenuation limits,  $43+10\log_{10}(TP \text{ in watt})[dB]$ . Where, TP = Transmitter power at the ANT OUT under test configuration as the hands free unit used.

Radiated Emission 30 MHz to 1000 MHz

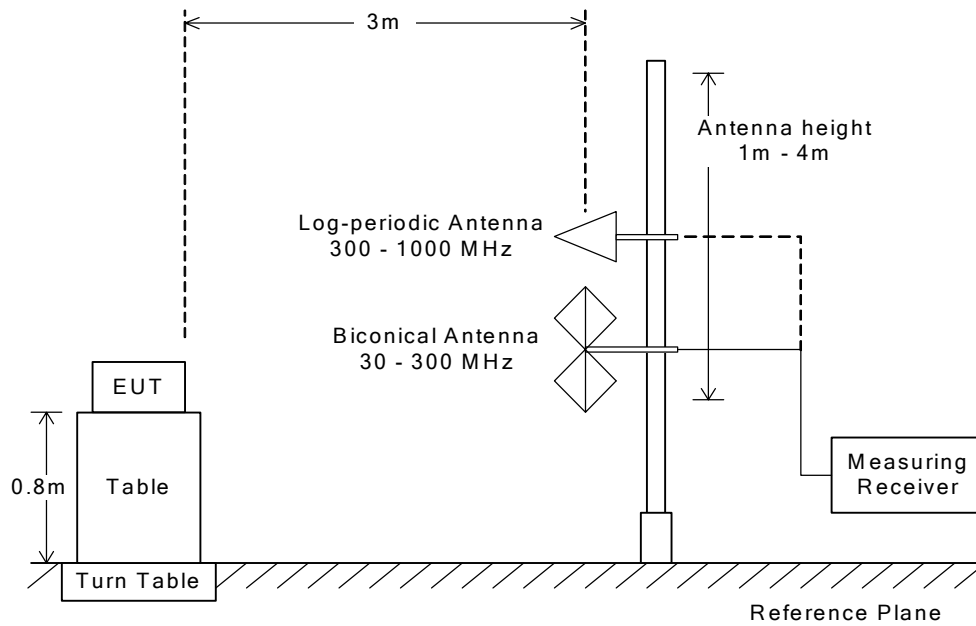


Radiated Emission above 1 GHz

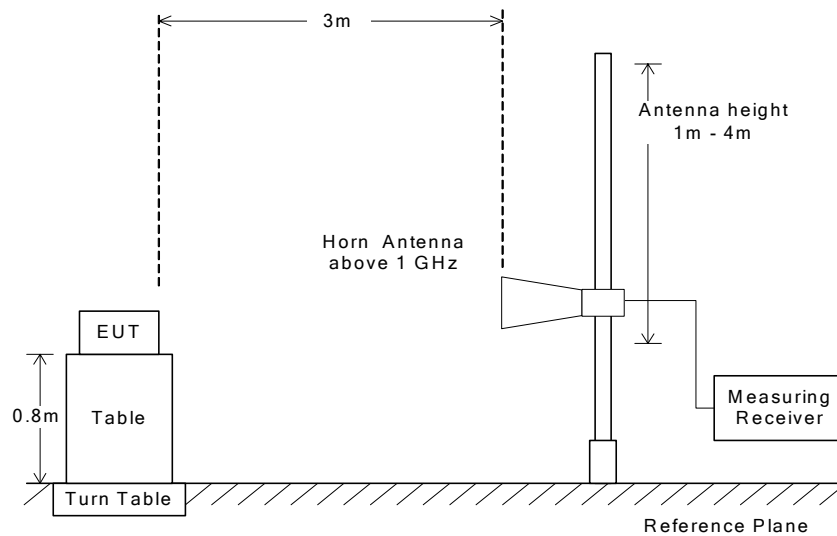

**NOTE**

The antenna height is scanned depending on the EUT's size and mounting height.

Radiated Emission 30 to 1000 MHz – Substitution Method

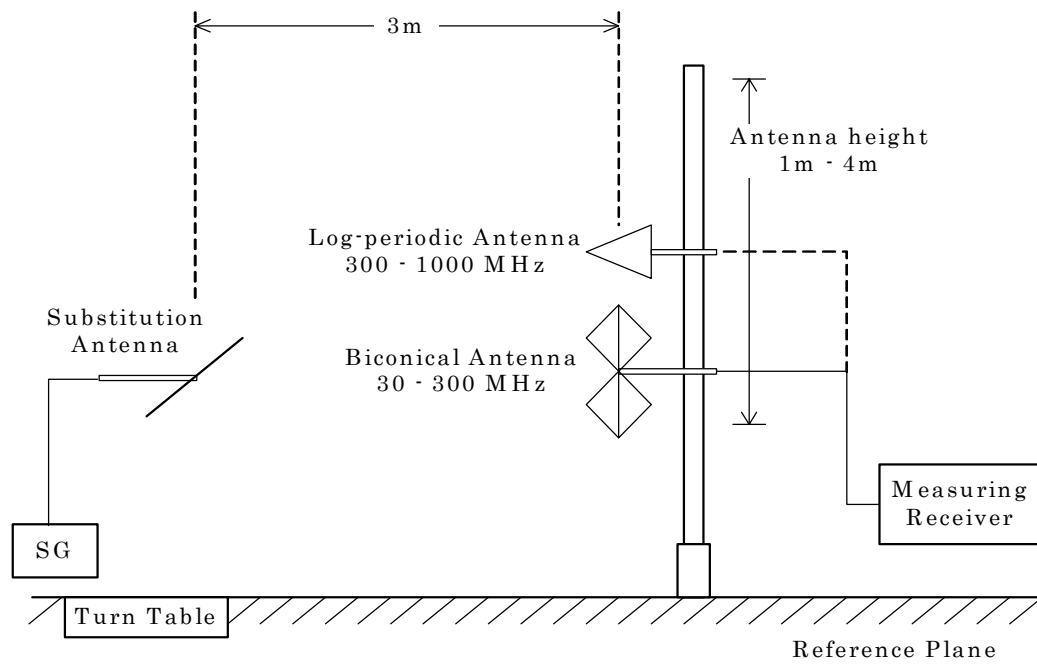

## 7.7.4 Test Data

### (WCDMA850)

Test Configuration : Single Unit

Test Date: March 12, 2014

Temp.: 17 °C, Humi: 37 %

| CH   | Transmitting<br>Frequency<br>[MHz] | Measured<br>Frequency<br>[MHz] | ERP<br>[dBm] |         | Limits<br>[dBm] | Margin<br>[dB] | Remarks |
|------|------------------------------------|--------------------------------|--------------|---------|-----------------|----------------|---------|
|      |                                    |                                | Hori.        | Vert.   |                 |                |         |
| 4132 | 826.400                            | 1652.800                       | -48.0        | -48.5   | -13.0           | +35.0          | C       |
|      |                                    | 2479.200                       | -53.5        | -55.4   | -13.0           | +40.5          | C       |
|      |                                    | 3305.600                       | < -56.7      | < -56.7 | -13.0           | > +43.7        | C       |
|      |                                    | 4132.000                       | < -50.9      | < -50.9 | -13.0           | > +37.9        | C       |
|      |                                    | 4958.400                       | < -51.7      | < -51.7 | -13.0           | > +38.7        | C       |
|      |                                    | 5784.800                       | < -50.6      | < -50.6 | -13.0           | > +37.6        | C       |
|      |                                    | 6611.200                       | < -47.5      | < -47.5 | -13.0           | > +34.5        | C       |
|      |                                    | 7437.600                       | < -57.3      | < -57.3 | -13.0           | > +44.3        | C       |
|      |                                    | 8264.000                       | < -51.3      | < -51.3 | -13.0           | > +38.3        | C       |
|      |                                    |                                |              |         |                 |                |         |
| 4182 | 836.400                            | 1672.800                       | -50.3        | -49.7   | -13.0           | +36.7          | C       |
|      |                                    | 2509.200                       | -53.7        | -55.3   | -13.0           | +40.7          | C       |
|      |                                    | 3345.600                       | < -56.5      | < -56.5 | -13.0           | > +43.5        | C       |
|      |                                    | 4182.000                       | < -50.9      | < -50.9 | -13.0           | > +37.9        | C       |
|      |                                    | 5018.400                       | < -51.7      | < -51.7 | -13.0           | > +38.7        | C       |
|      |                                    | 5854.800                       | < -50.5      | < -50.5 | -13.0           | > +37.5        | C       |
|      |                                    | 6691.200                       | < -47.6      | < -47.6 | -13.0           | > +34.6        | C       |
|      |                                    | 7527.600                       | < -57.3      | < -57.3 | -13.0           | > +44.3        | C       |
|      |                                    | 8364.000                       | < -51.4      | < -51.4 | -13.0           | > +38.4        | C       |
|      |                                    |                                |              |         |                 |                |         |
| 4233 | 846.600                            | 1693.200                       | -48.2        | -49.2   | -13.0           | +35.2          | C       |
|      |                                    | 2539.800                       | -54.2        | -55.0   | -13.0           | +41.2          | C       |
|      |                                    | 3386.400                       | < -56.5      | < -56.5 | -13.0           | > +43.5        | C       |
|      |                                    | 4233.000                       | < -50.9      | < -50.9 | -13.0           | > +37.9        | C       |
|      |                                    | 5079.600                       | < -51.6      | < -51.6 | -13.0           | > +38.6        | C       |
|      |                                    | 5926.200                       | < -50.1      | < -50.1 | -13.0           | > +37.1        | C       |
|      |                                    | 6772.800                       | < -47.6      | < -47.6 | -13.0           | > +34.6        | C       |
|      |                                    | 7619.400                       | < -55.2      | < -55.2 | -13.0           | > +42.2        | C       |
|      |                                    | 8466.000                       | < -51.5      | < -51.5 | -13.0           | > +38.5        | C       |
|      |                                    |                                |              |         |                 |                |         |

Calculated result at 6611.2 MHz, as the worst point shown on underline:

Minimum Margin:  $-13.0 - (<-47.5) = >34.5$  (dB)

#### NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 30 MHz to 10 GHz.
3. All emissions not reported were more than 20 dB below the applied limits.
4. Applied limits :  $-13.0$  [dBm] =  $10\log(TP[mW]) - (43 + 10\log(tp[W])) = 10\log(TP[mW]) - (43 + (10\log(TP[mW]) - 30))$   
where,  $tp[W] = TP[mW] / 1000$  : Transmitter power at antenna terminal
5. The symbol of "<" means "or less".
6. The symbol of ">" means "more than".
7. Setting of measuring instrument(s) :

|   | Detector Function | RES B.W. | V.B.W.  | Sweep Time |
|---|-------------------|----------|---------|------------|
| A | Peak              | 10 kHz   | 30 kHz  | 20 msec.   |
| B | Peak              | 100 kHz  | 300 kHz | 20 msec.   |
| C | Peak              | 1 MHz    | 3 MHz   | 20 msec.   |

## 7.8 Frequency Stability(\$2.1055)

For the requirements, ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]  
☐ - Not Applicable

For the limits, ☒ - Passed ☐ - Failed ☐ - Not judged

### 7.8.1 Worst Point and Measurement Uncertainty

The Frequency Stability level is -0.01 ppm at 836.400 MHz

Uncertainty of Measurement Results +/-0.02 ppm(2σ)

Remarks : \_\_\_\_\_

### 7.8.2 Test Site and Instruments

#### 7.8.2.1 Test Site

KITA-KANSAI Testing Center

Test site : SAITO ☒ - Environment Testing Room  
MINOH ☐ - Environment Testing Room

#### 7.8.2.2 Test Instruments

| Type                         | Model    | Manufacturer | ID No. | Last Cal. | Interval |
|------------------------------|----------|--------------|--------|-----------|----------|
| Radio Communication Analyzer | MT8815B  | Anritsu      | B-69   | 2013/9    | 1 Year   |
| DC Voltage Meter             | 2011-39  | YEW          | B-33   | 2013/4    | 1 Year   |
| Environmental Chamber        | SH-641   | ESPEC        | F-32   | 2013/7    | 1 Year   |
| DC Power Supply              | NL035-10 | TAKASAGO     | F-4    | N/A       | N/A      |


### 7.8.3 Test Method and Test Setup (Diagrammatic illustration)

#### Frequency Stability versus Temperature

The EUT was placed in an environmental chamber and was tested in the range from –30 to +50 degrees Celsius. The EUT was stabilized at each temperature. The power (4.0VDC) supplied was applied to the transmitter and allowed to stabilize for 10 minutes. The transmitting frequency was measured at startup and 2 minutes, 5 minutes and 10 minutes after startup. This procedure was repeated from –30 to +50 degrees Celsius at the interval of 10 degrees.

#### Frequency Stability versus Power Supply Voltage

The EUT was placed in an environmental chamber and was tested at the temperature of +20 degrees Celsius. The EUT was stabilized at the temperature. The power (4.0VDC) and the power (3.7VDC, the ending voltage) was applied to the EUT allowed to stabilize for 10 minutes. The transmitting frequency was measured at startup and 2 minutes, 5 minutes and 10 minutes after startup.

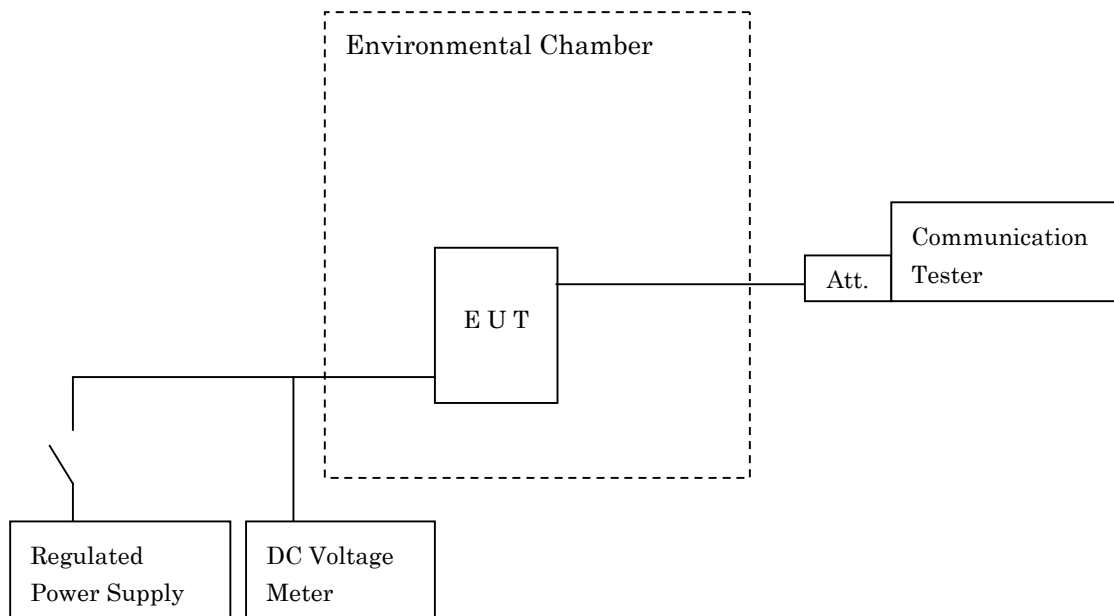

## 7.8.4 Test Data

(WCDMA850)

Test Date: March 15, 2014  
- March 17, 2014

### 1. Frequency Stability Measurement versus Temperature

Transmitting Frequency : 836.400 MHz (4182 ch)  
DC Supply Voltage : 4.0 VDC

| Ambient<br>Temperature<br>[°C] | Startup       | Deviation [ppm] |           |               | Limits<br>[ppm] | Margin<br>[ppm] |
|--------------------------------|---------------|-----------------|-----------|---------------|-----------------|-----------------|
|                                |               | 2 minutes       | 5 minutes | 10 minutes    |                 |                 |
| -30                            | + 0.00        | <u>- 0.01</u>   | + 0.00    | + 0.00        | 2.50            | 2.49            |
| -20                            | + 0.00        | <u>- 0.01</u>   | + 0.00    | + 0.00        | 2.50            | 2.49            |
| -10                            | <u>- 0.01</u> | + 0.00          | + 0.00    | + 0.00        | 2.50            | 2.49            |
| 0                              | + 0.00        | <u>- 0.01</u>   | + 0.00    | + 0.00        | 2.50            | 2.49            |
| 10                             | <u>- 0.01</u> | <u>- 0.01</u>   | + 0.00    | <u>- 0.01</u> | 2.50            | 2.49            |
| 20                             | <u>- 0.01</u> | <u>- 0.01</u>   | + 0.00    | + 0.00        | 2.50            | 2.49            |
| 30                             | + 0.00        | <u>- 0.01</u>   | + 0.00    | + 0.00        | 2.50            | 2.49            |
| 40                             | + 0.00        | + 0.00          | + 0.00    | + 0.00        | 2.50            | 2.50            |
| 50                             | + 0.00        | + 0.00          | + 0.00    | + 0.00        | 2.50            | 2.50            |

### 2. Frequency Stability Measurement versus Power Supply Voltage

Transmitting Frequency : 836.400 MHz (4182 ch)  
Ambient Temperature: : 20 °C

| DC Supply<br>Voltage<br>[V] | Startup       | Deviation [ppm] |           |            | Limits<br>[ppm] | Margin<br>[ppm] |
|-----------------------------|---------------|-----------------|-----------|------------|-----------------|-----------------|
|                             |               | 2 minutes       | 5 minutes | 10 minutes |                 |                 |
| 4.0                         | <u>- 0.01</u> | <u>- 0.01</u>   | + 0.00    | + 0.00     | 2.50            | 2.49            |
| 3.7(Ending)                 | <u>- 0.01</u> | + 0.00          | + 0.00    | + 0.00     | 2.50            | 2.49            |

Test condition example as the maximum deviation point shown on underline:

Ambient Temperature : -30 °C / 2 minutes

DC Supply Voltage : 4 VDC

Minimum Margin: 2.50 - 0.01 = 2.49 (ppm)

NOTE : The measurement were made after all of components of the oscillator sufficiently stabilized at each temperature.