

Appendix 2 – Highest SAR Test Plots

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

189ch / GSM 850 - GPRS 4slots

DUT: Smart Phone; Type: SH-01G; Serial: 00440115221216

Frequency: 836.4 MHz; Duty Cycle: 1:2.08018

Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 42.414$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.36, 6.36, 6.36); Calibrated: 8/15/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn508; Calibrated: 11/27/2013
- Phantom: SAM v4.0 SN1194; Type: QD000P40CA; Serial: TP 1194
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Head/Left Touched/Area Scan (11x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.363 W/kg

Head/Left Touched/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 20.69 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.430 W/kg

SAR(1 g) = 0.357 W/kg; SAR(10 g) = 0.275 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.370 W/kg

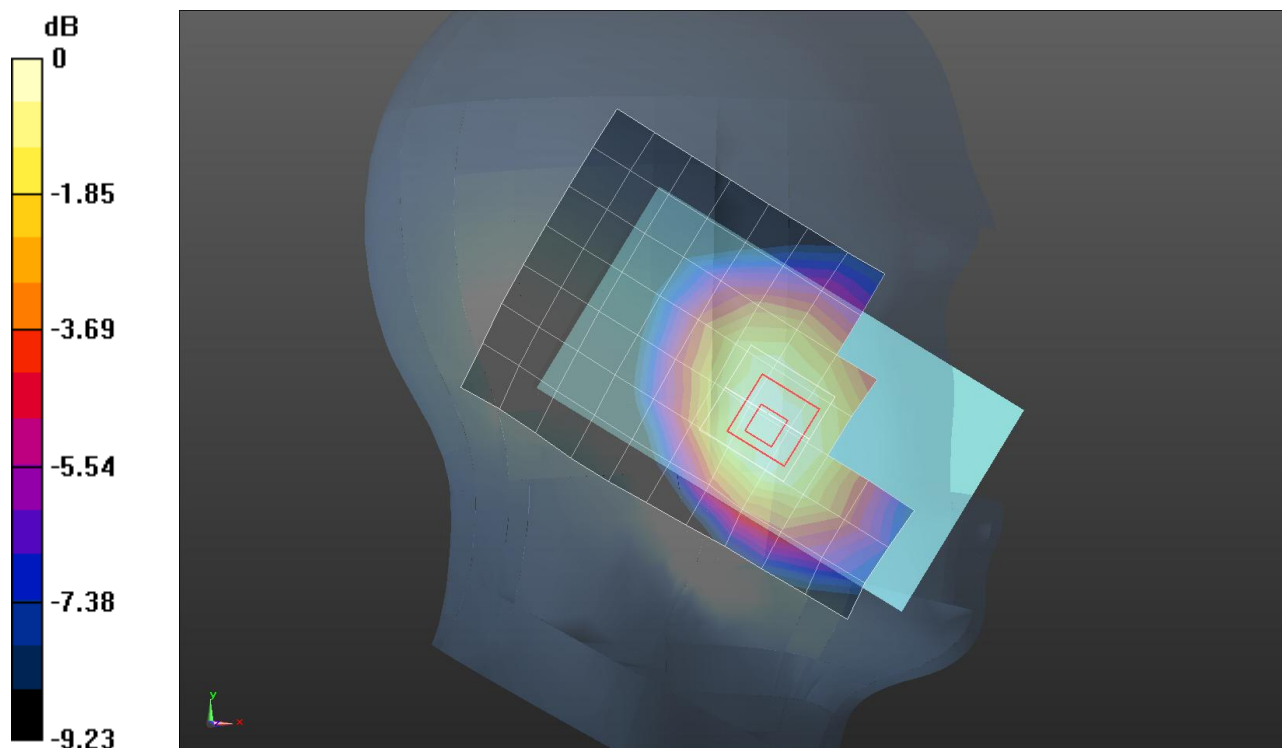

0 dB = 0.370 W/kg = -4.32 dBW/kg

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

251ch / GSM 850 - GPRS 4slots

DUT: Smart Phone; Type: SH-01G; Serial: 00440115221216

Frequency: 848.8 MHz; Duty Cycle: 1:2.08018

Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.996$ S/m; $\epsilon_r = 54.562$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.11, 6.11, 6.11); Calibrated: 8/15/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn508; Calibrated: 11/27/2013
- Phantom: SAM v4.0 SN1194; Type: QD000P40CA; Serial: TP 1194
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Body/Rear/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.743 W/kg

Body/Rear/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 24.02 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.956 W/kg

SAR(1 g) = 0.722 W/kg; SAR(10 g) = 0.519 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.768 W/kg

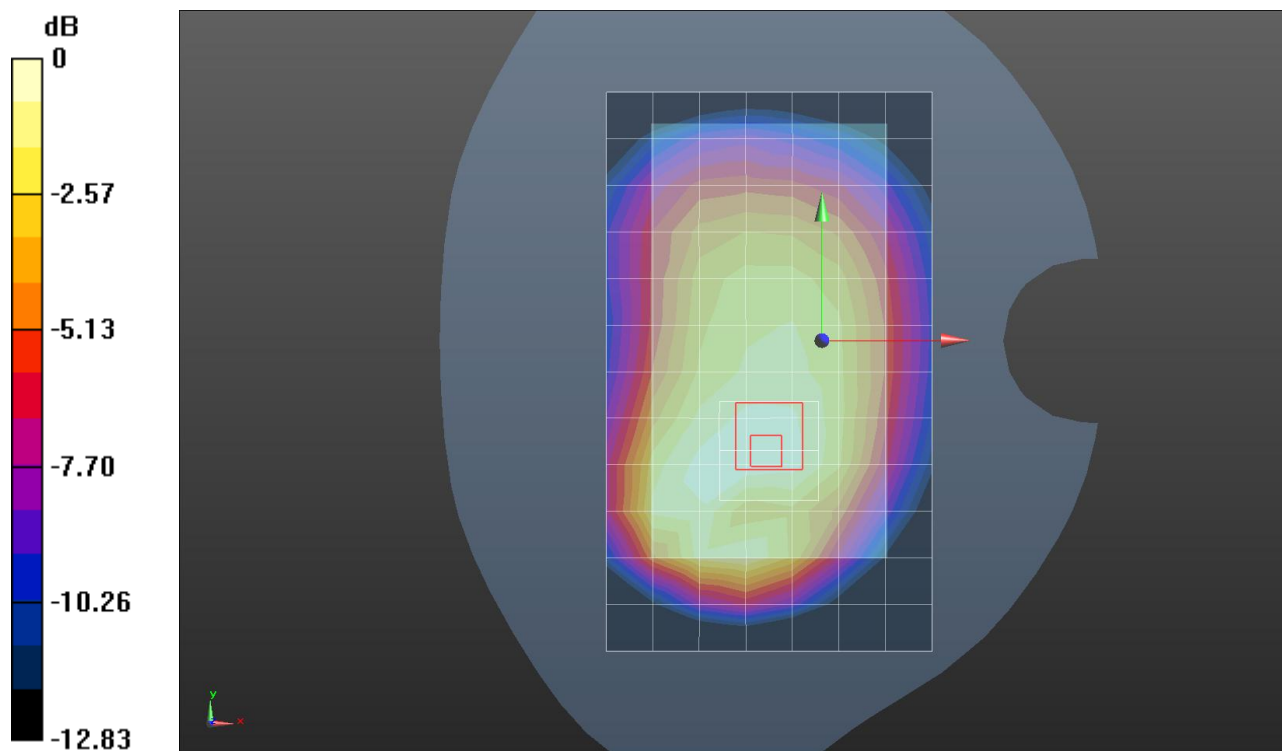

0 dB = 0.768 W/kg = -1.15 dBW/kg

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

661ch / PCS 1900 - GPRS 4slots

DUT: Smart Phone; Type: SH-01G; Serial: 00440115221216

Frequency: 1880 MHz; Duty Cycle: 1:2.08018

Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.403$ S/m; $\epsilon_r = 39.446$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(5.08, 5.08, 5.08); Calibrated: 8/15/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn508; Calibrated: 11/27/2013
- Phantom: SAM v4.0 SN1194; Type: QD000P40CA; Serial: TP 1194
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Head/Right Touched/Area Scan (13x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.166 W/kg



Head/Right Touched/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.479 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.242 W/kg

SAR(1 g) = 0.160 W/kg; SAR(10 g) = 0.101 W/kg

Maximum value of SAR (measured) = 0.169 W/kg

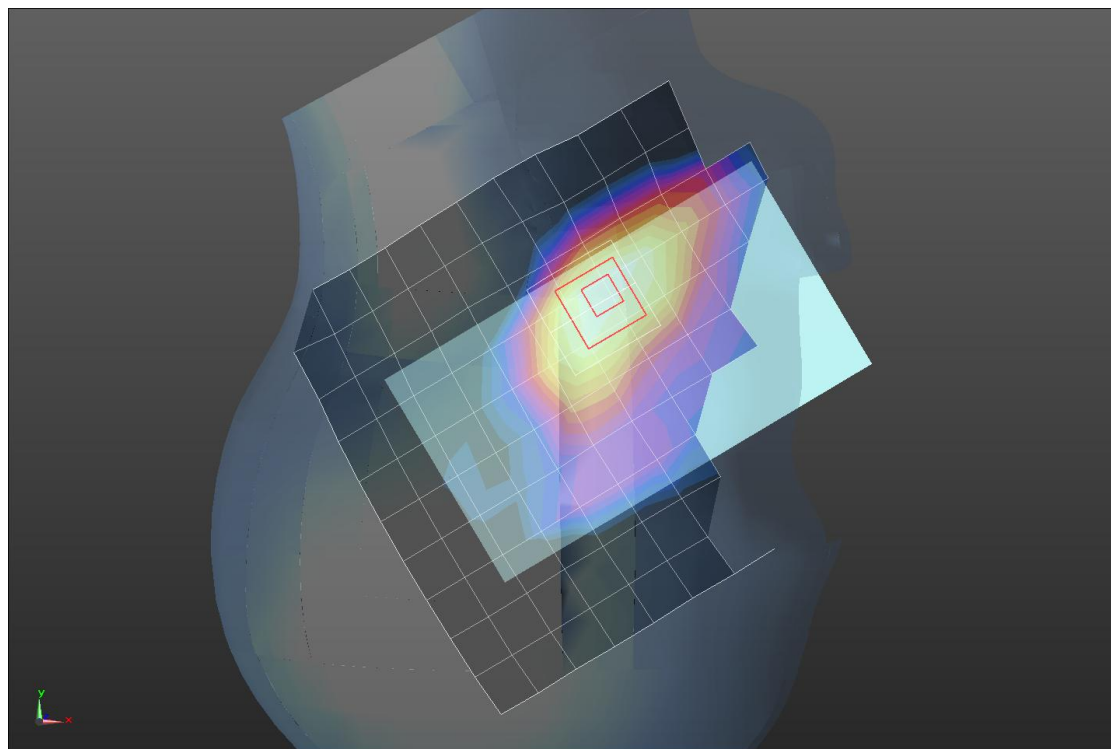

0 dB = 0.169 W/kg = -7.72 dBW/kg

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

661ch / PCS 1900 - GPRS 4slots

DUT: Smart Phone; Type: SH-01G; Serial: 00440115221216

Frequency: 1880 MHz; Duty Cycle: 1:2.08018

Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.533$ S/m; $\epsilon_r = 52.992$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(4.53, 4.53, 4.53); Calibrated: 8/15/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn508; Calibrated: 11/27/2013
- Phantom: SAM v4.0 SN1194; Type: QD000P40CA; Serial: TP 1194
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Body/Rear/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.324 W/kg



Body/Rear/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.89 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.530 W/kg

SAR(1 g) = 0.336 W/kg; SAR(10 g) = 0.188 W/kg

Maximum value of SAR (measured) = 0.378 W/kg

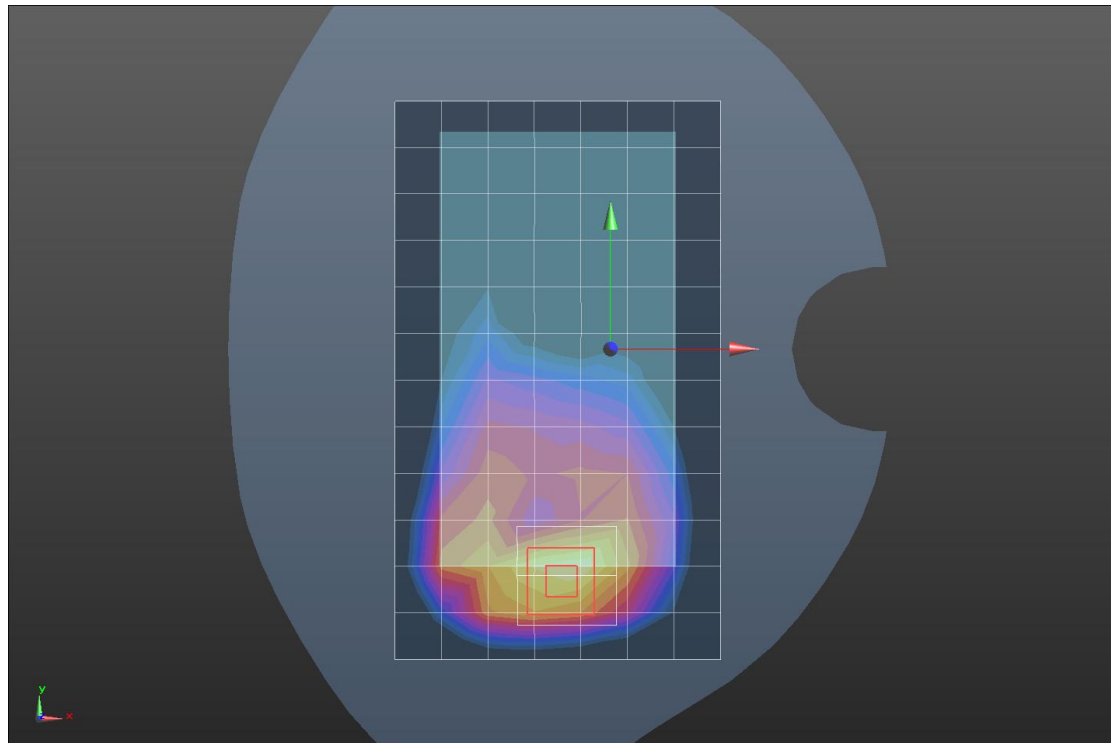

0 dB = 0.378 W/kg = -4.23 dBW/kg

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

661ch / PCS 1900 - GPRS 4slots

DUT: Smart Phone; Type: SH-01G; Serial: 004401115221216

Frequency: 1880 MHz; Duty Cycle: 1:2.08018

Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.533$ S/m; $\epsilon_r = 52.992$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(4.53, 4.53, 4.53); Calibrated: 8/15/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn508; Calibrated: 11/27/2013
- Phantom: SAM v4.0 SN1194; Type: QD000P40CA; Serial: TP 1194
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Body/Bottom/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.374 W/kg



Body/Bottom/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.00 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.563 W/kg

SAR(1 g) = 0.363 W/kg; SAR(10 g) = 0.208 W/kg

Maximum value of SAR (measured) = 0.402 W/kg

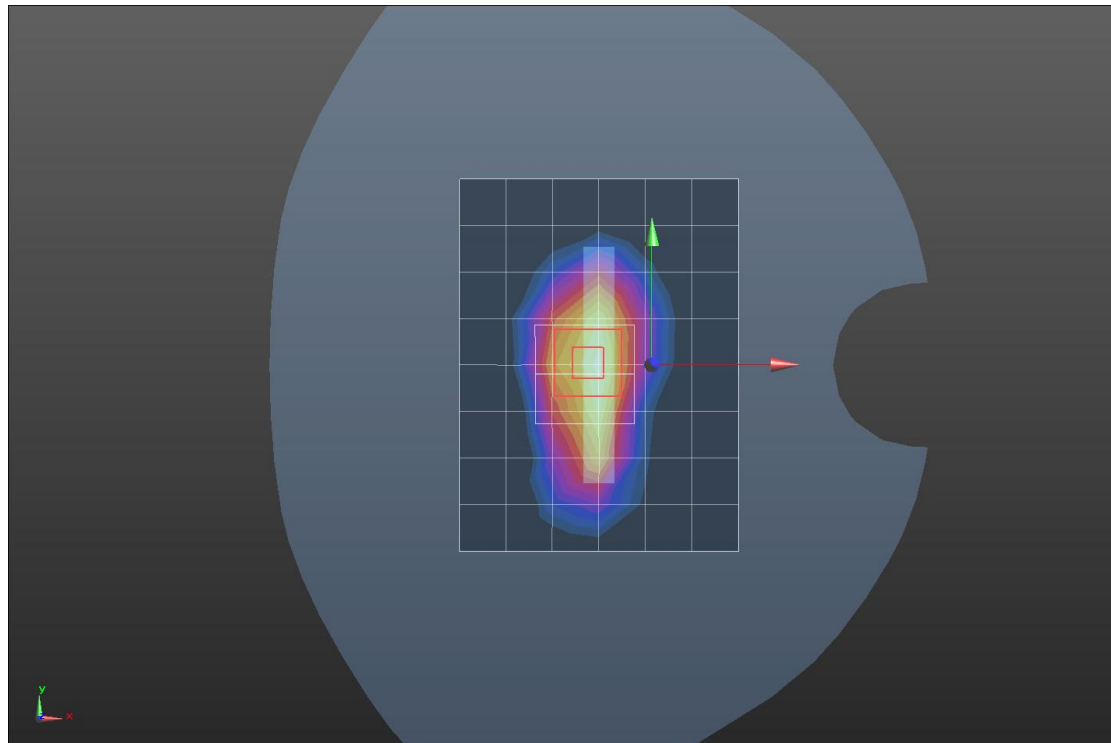

0 dB = 0.402 W/kg = -3.96 dBW/kg

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

4182ch / WCDMA Band V

DUT: Smart Phone; Type: SH-01G; Serial: 00440115221216

Frequency: 836.4 MHz; Duty Cycle: 1:1

Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 42.414$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.36, 6.36, 6.36); Calibrated: 8/15/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn508; Calibrated: 11/27/2013
- Phantom: SAM v4.0 SN1194; Type: QD000P40CA; Serial: TP 1194
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Head/Left Touched/Area Scan (11x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.397 W/kg

Head/Left Touched/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm



Reference Value = 21.58 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.492 W/kg

SAR(1 g) = 0.401 W/kg; SAR(10 g) = 0.308 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.423 W/kg

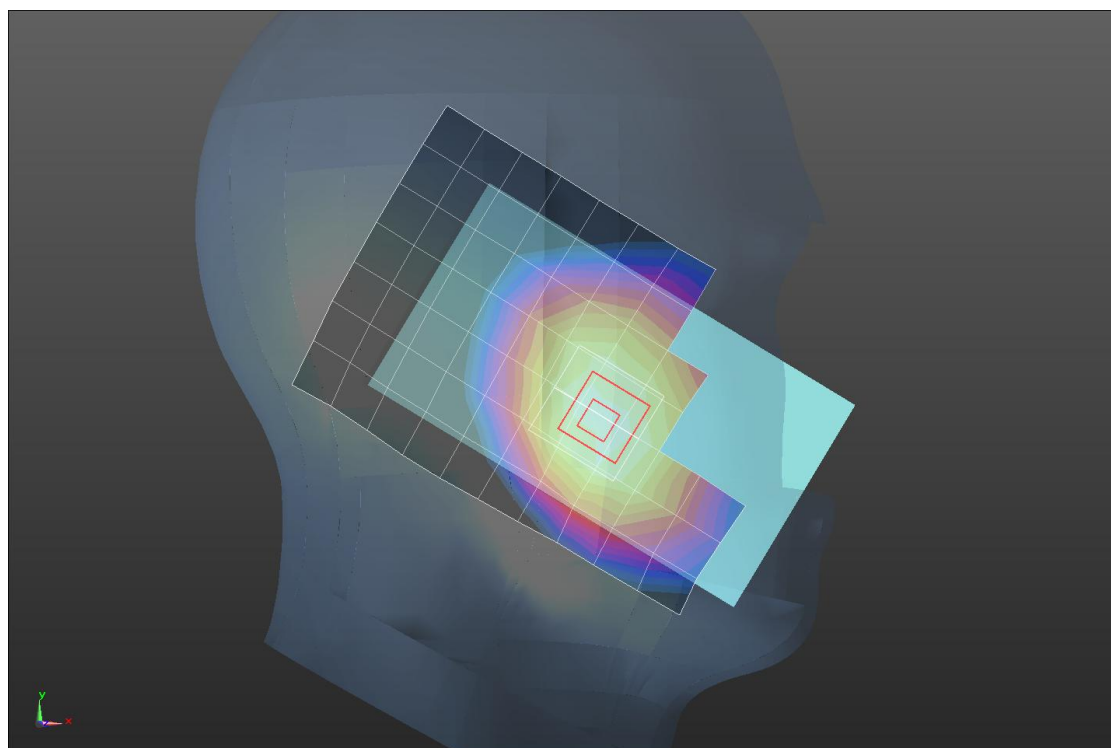

0 dB = 0.423 W/kg = -3.74 dBW/kg

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

4182ch / WCDMA Band V

DUT: Smart Phone; Type: SH-01G; Serial: 00440115221216

Frequency: 836.4 MHz; Duty Cycle: 1:1

Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.985$ S/m; $\epsilon_r = 54.688$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.11, 6.11, 6.11); Calibrated: 8/15/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn508; Calibrated: 11/27/2013
- Phantom: SAM v4.0 SN1194; Type: QD000P40CA; Serial: TP 1194
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Body/Rear/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.641 W/kg

Body/Rear/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm



Reference Value = 23.25 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.821 W/kg

SAR(1 g) = 0.631 W/kg; SAR(10 g) = 0.462 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.667 W/kg

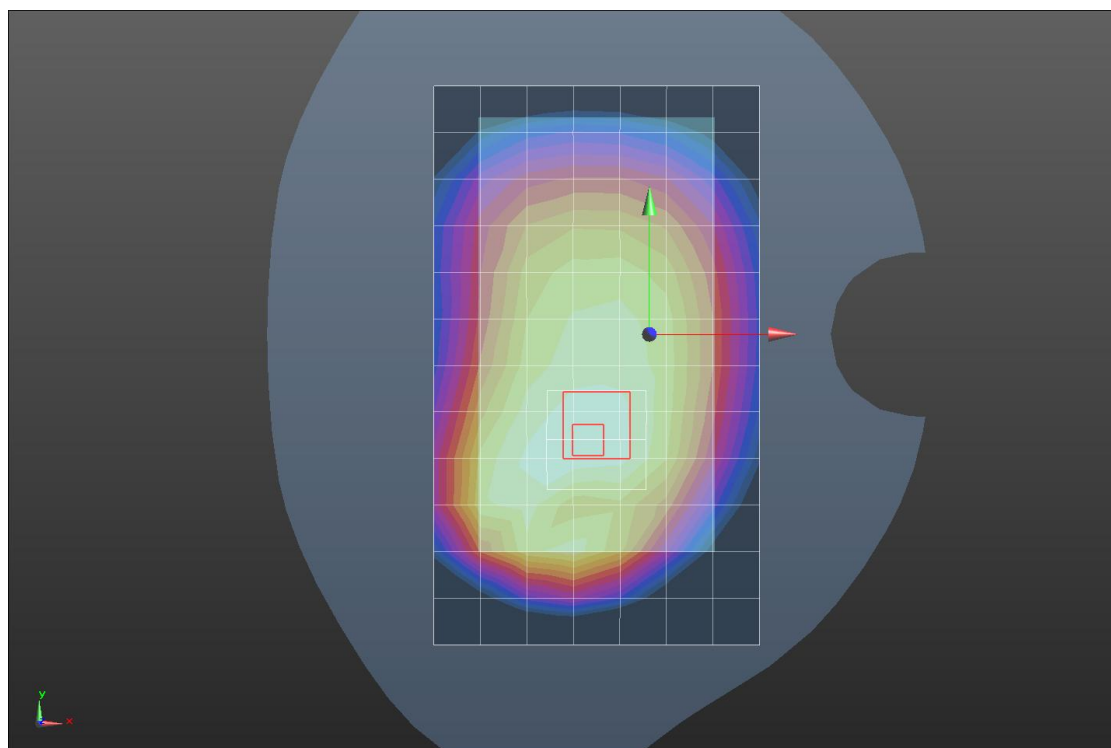

0 dB = 0.667 W/kg = -1.76 dBW/kg

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

11ch / 802.11b 1Mbps

DUT: Smart Phone; Type: SH-01G; Serial: 00440115221216

Frequency: 2462 MHz; Duty Cycle: 1:1

Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.839$ S/m; $\epsilon_r = 39.217$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3540; ConvF(7.4, 7.4, 7.4); Calibrated: 5/9/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn508; Calibrated: 11/27/2013
- Phantom: SAM v4.0 SN1194; Type: QD000P40CA; Serial: TP 1194
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Head/Right Touched/Area Scan (13x10x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.259 W/kg



Head/Right Touched/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.808 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.385 W/kg

SAR(1 g) = 0.180 W/kg; SAR(10 g) = 0.084 W/kg

Maximum value of SAR (measured) = 0.262 W/kg

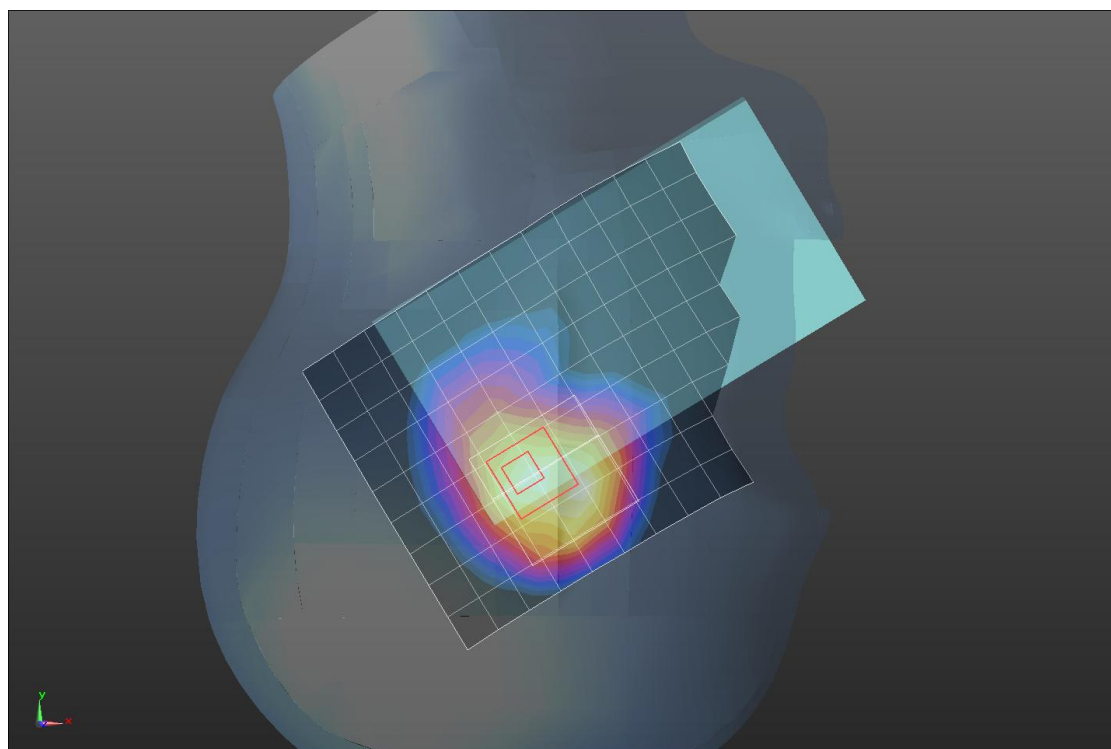

0 dB = 0.262 W/kg = -5.82 dBW/kg

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

11ch / 802.11b 1Mbps

DUT: Smart Phone; Type: SH-01G; Serial: 00440115221216

Frequency: 2462 MHz; Duty Cycle: 1:1

Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.956$ S/m; $\epsilon_r = 52.324$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3540; ConvF(7.73, 7.73, 7.73); Calibrated: 5/9/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn508; Calibrated: 11/27/2013
- Phantom: SAM v4.0 SN1194; Type: QD000P40CA; Serial: TP 1194
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Body/Rear/Area Scan (10x15x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.274 W/kg



Body/Rear/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.91 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.453 W/kg

SAR(1 g) = 0.206 W/kg; SAR(10 g) = 0.090 W/kg

Maximum value of SAR (measured) = 0.328 W/kg

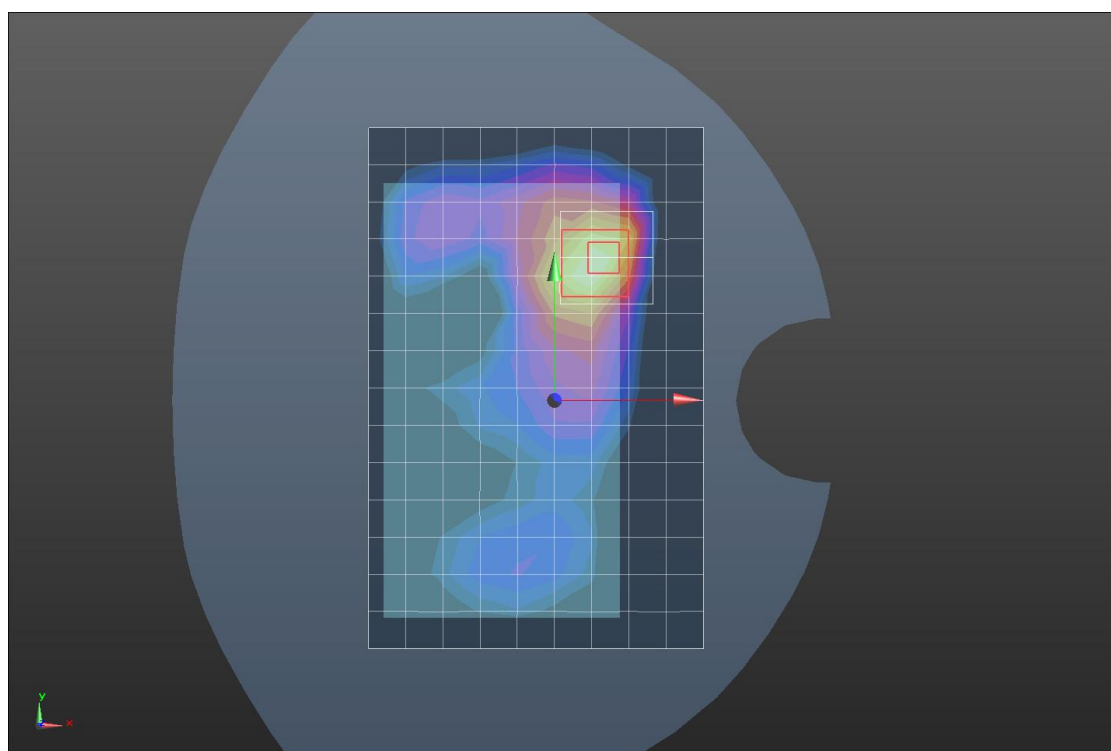

0 dB = 0.328 W/kg = -4.84 dBW/kg

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

40ch / 802.11a 6Mbps

DUT: Smart Phone; Type: SH-01G; Serial: 00440115221216

Frequency: 5200 MHz; Duty Cycle: 1:1

Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.636$ S/m; $\epsilon_r = 36.331$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3540; ConvF(4.8, 4.8, 4.8); Calibrated: 5/9/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn508; Calibrated: 11/27/2013
- Phantom: SAM v4.0 SN1194; Type: QD000P40CA; Serial: TP 1194
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Head/Right Touched/Area Scan (13x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0476 W/kg



Head/Right Touched/Zoom Scan (9x9x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.311 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.480 W/kg

SAR(1 g) = 0.035 W/kg; SAR(10 g) = 0.00871 W/kg

Maximum value of SAR (measured) = 0.0590 W/kg

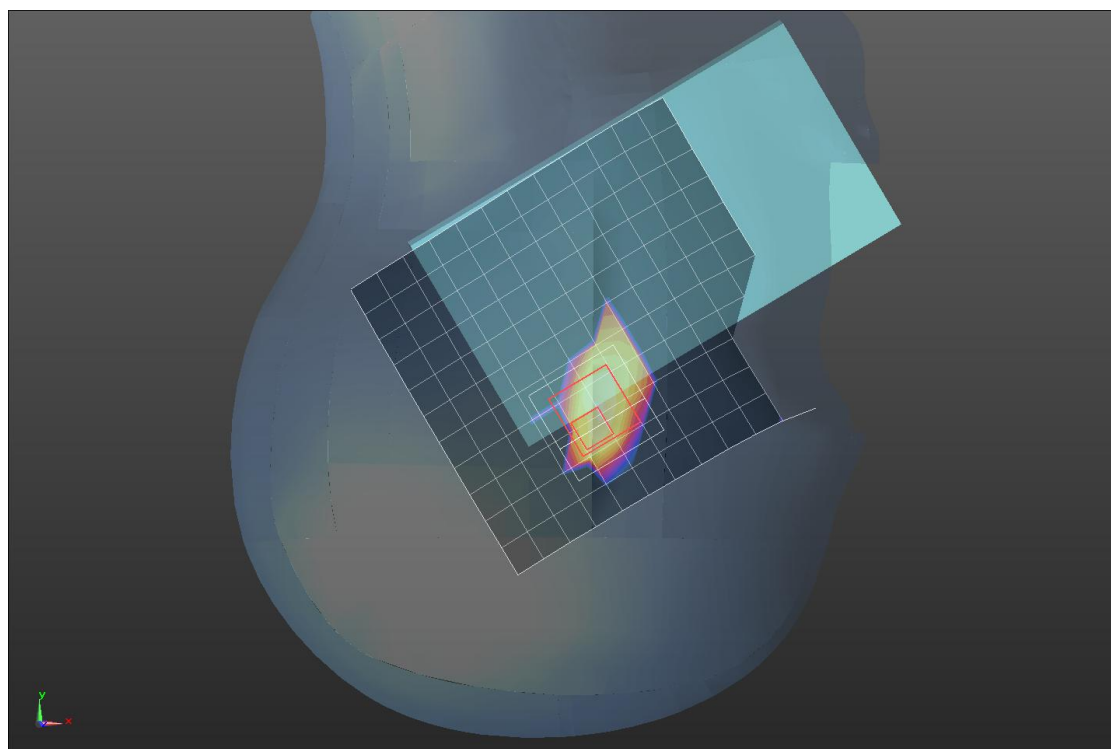

0 dB = 0.0590 W/kg = -12.29 dBW/kg

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

40ch / 802.11a 6Mbps

DUT: Smart Phone; Type: SH-01G; Serial: 004401115221216

Frequency: 5200 MHz; Duty Cycle: 1:1

Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.451$ S/m; $\epsilon_r = 47.663$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3540; ConvF(3.98, 3.98, 3.98); Calibrated: 5/9/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn508; Calibrated: 11/27/2013
- Phantom: SAM v4.0 SN1194; Type: QD000P40CA; Serial: TP 1194
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Body/Rear/Area Scan (12x17x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.117 W/kg


Body/Rear/Zoom Scan (8x9x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.127 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.284 W/kg

SAR(1 g) = 0.049 W/kg; SAR(10 g) = 0.015 W/kg

Maximum value of SAR (measured) = 0.128 W/kg

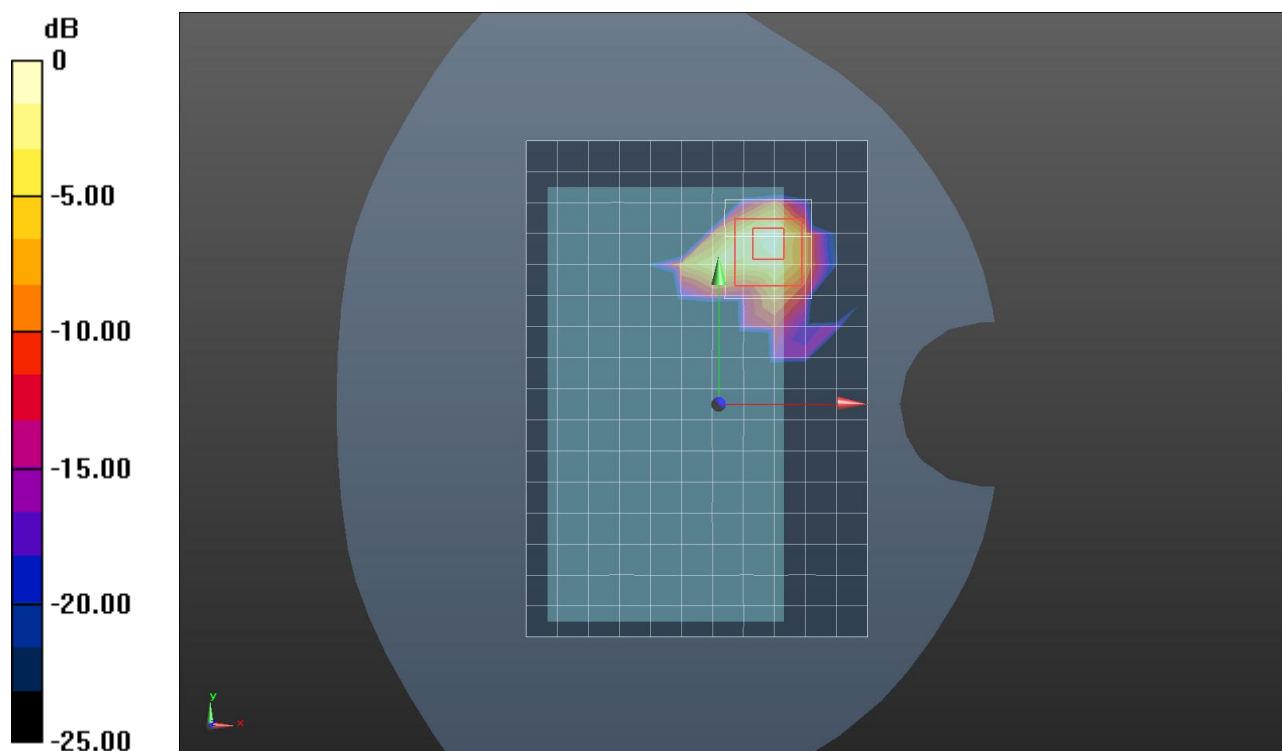

0 dB = 0.128 W/kg = -8.93 dBW/kg

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

64ch / 802.11a 6Mbps

DUT: Smart Phone; Type: SH-01G; Serial: 004401115221216

Frequency: 5320 MHz; Duty Cycle: 1:1

Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 5320$ MHz; $\sigma = 4.75$ S/m; $\epsilon_r = 36.169$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3540; ConvF(4.51, 4.51, 4.51); Calibrated: 5/9/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn508; Calibrated: 11/27/2013
- Phantom: SAM v4.0 SN1194; Type: QD000P40CA; Serial: TP 1194
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Head/Right Touched/Area Scan (13x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0285 W/kg



Head/Right Touched/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.309 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.265 W/kg

SAR(1 g) = 0.021 W/kg; SAR(10 g) = 0.00497 W/kg

Maximum value of SAR (measured) = 0.0311 W/kg

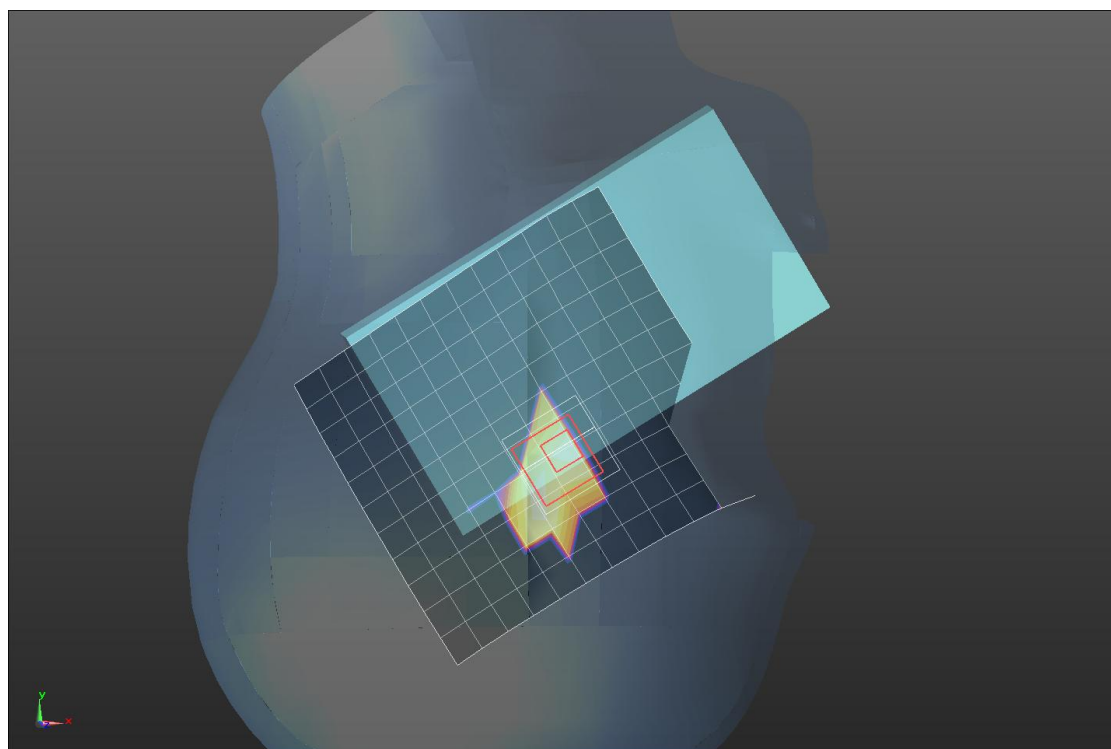

0 dB = 0.0311 W/kg = -15.07 dBW/kg

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

64ch / 802.11a 6Mbps

DUT: Smart Phone; Type: SH-01G; Serial: 004401115221216

Frequency: 5320 MHz; Duty Cycle: 1:1

Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 5320$ MHz; $\sigma = 5.607$ S/m; $\epsilon_r = 47.473$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3540; ConvF(3.81, 3.81, 3.81); Calibrated: 5/9/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn508; Calibrated: 11/27/2013
- Phantom: SAM v4.0 SN1194; Type: QD000P40CA; Serial: TP 1194
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Body/Rear/Area Scan (12x17x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0948 W/kg


Body/Rear/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.573 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.312 W/kg

SAR(1 g) = 0.040 W/kg; SAR(10 g) = 0.014 W/kg

Maximum value of SAR (measured) = 0.107 W/kg

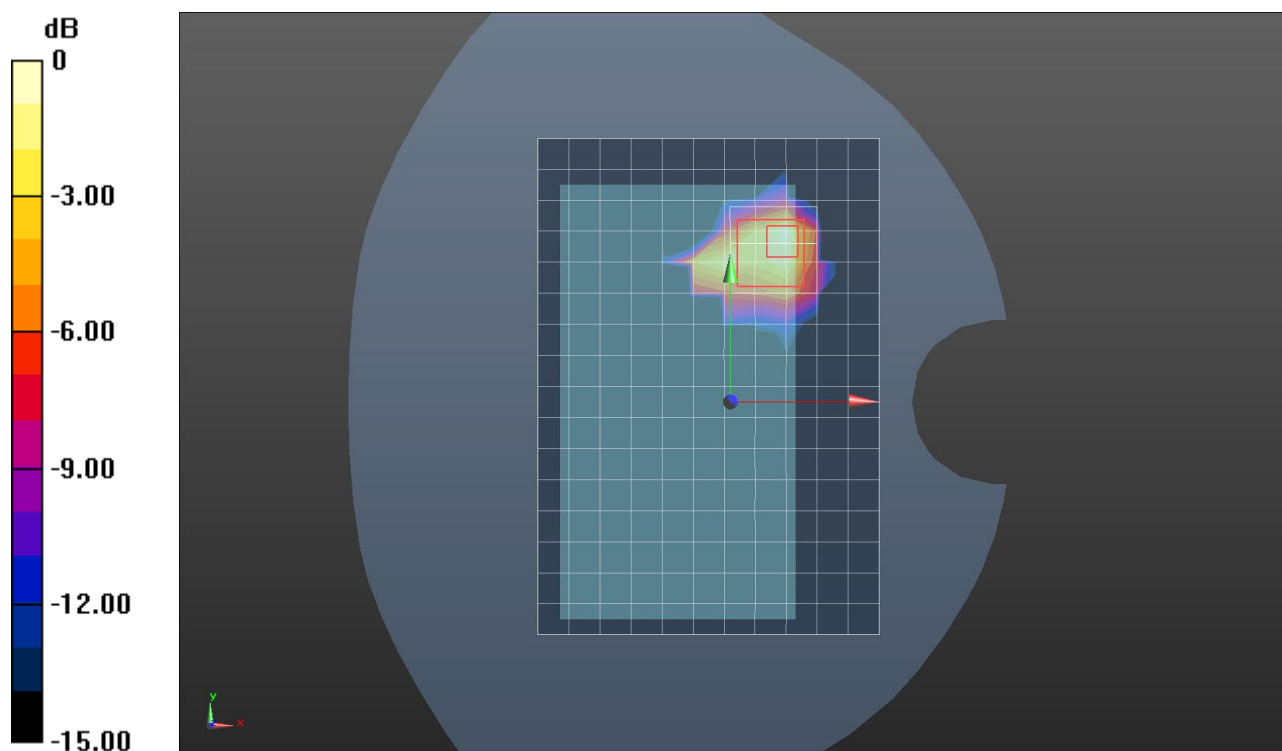

0 dB = 0.107 W/kg = -9.71 dBW/kg

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

104ch / 802.11a 6Mbps

DUT: Smart Phone; Type: SH-01G; Serial: 00440115221216

Frequency: 5520 MHz; Duty Cycle: 1:1

Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 5520$ MHz; $\sigma = 4.922$ S/m; $\epsilon_r = 35.922$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3540; ConvF(4.24, 4.24, 4.24); Calibrated: 5/9/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn508; Calibrated: 11/27/2013
- Phantom: SAM v4.0 SN1194; Type: QD000P40CA; Serial: TP 1194
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Head/Right Tilted/Area Scan (12x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0557 W/kg


Head/Right Tilted/Zoom Scan (9x9x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.458 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.413 W/kg

SAR(1 g) = 0.027 W/kg; SAR(10 g) = 0.00367 W/kg

Maximum value of SAR (measured) = 0.0515 W/kg

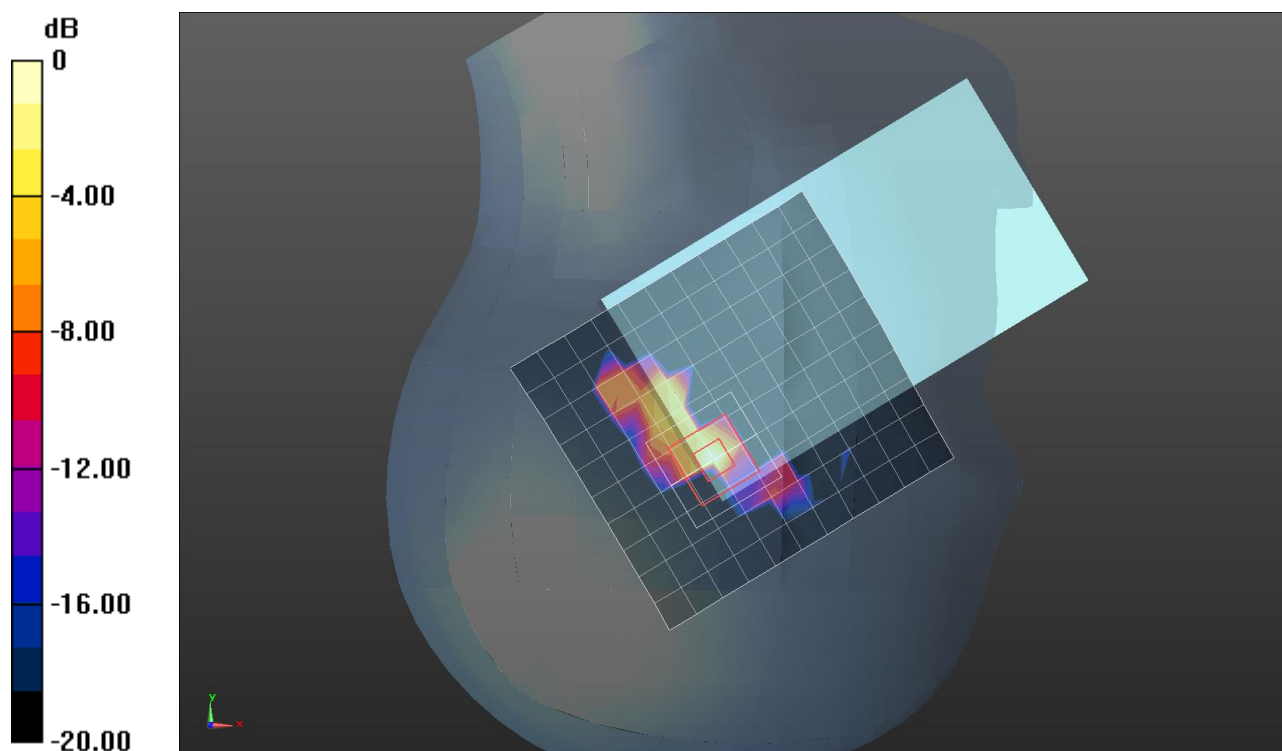

0 dB = 0.0515 W/kg = -12.88 dBW/kg

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

104ch / 802.11a 6Mbps

DUT: Smart Phone; Type: SH-01G; Serial: 00440115221216

Frequency: 5520 MHz; Duty Cycle: 1:1

Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 5520$ MHz; $\sigma = 5.861$ S/m; $\epsilon_r = 47.09$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3540; ConvF(3.68, 3.68, 3.68); Calibrated: 5/9/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn508; Calibrated: 11/27/2013
- Phantom: SAM v4.0 SN1194; Type: QD000P40CA; Serial: TP 1194
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Body/Rear/Area Scan (12x17x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0651 W/kg



Body/Rear/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.909 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.409 W/kg

SAR(1 g) = 0.038 W/kg; SAR(10 g) = 0.0088 W/kg

Maximum value of SAR (measured) = 0.0787 W/kg

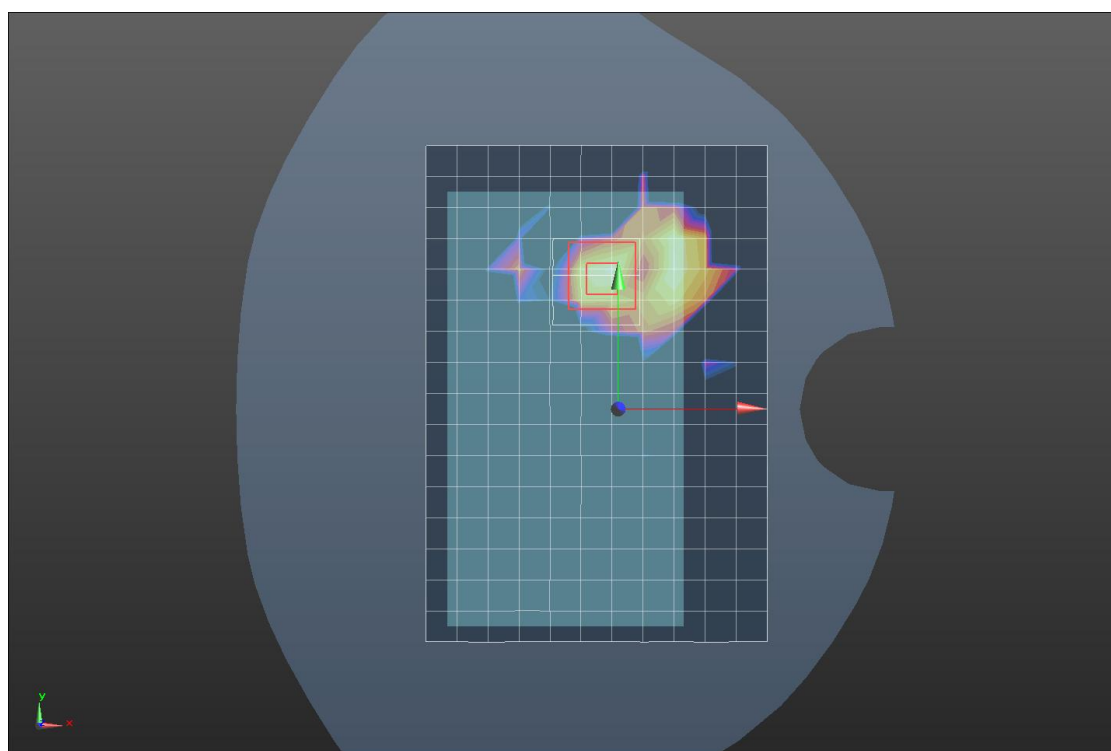

0 dB = 0.0787 W/kg = -11.04 dBW/kg