



Product Service

**Choose certainty.
Add value.**

Report On

FCC Testing of the
Sharp SHF32 Quad-band GSM (850/900/1800/1900) & Dual-band
UMTS (FDDI, FDDV) & Dual-band LTE (B1, B26) multi mode cellular
phone with Bluetooth, WLAN, SRD(FeliCa) and GPS
In accordance with FCC 47 CFR Part 15C

COMMERCIAL-IN-CONFIDENCE

FCC ID: APYHRO00224

Document 75930192 Report 10 Issue 1

June 2015



Product Service

TÜV SÜD Product Service, Octagon House, Concorde Way, Segensworth North,
Fareham, Hampshire, United Kingdom, PO15 5RL
Tel: +44 (0) 1489 558100. Website: www.tuv-sud.co.uk

COMMERCIAL-IN-CONFIDENCE

REPORT ON

FCC Testing of the
Sharp SHF32 Quad-band GSM (850/900/1800/1900) & Dual-band
UMTS (FDDI, FDDV) & Dual-band LTE (B1, B26) multi mode cellular
phone with Bluetooth, WLAN, SRD(FeliCa) and GPS
In accordance with FCC 47 CFR Part 15C

Document 75930192 Report 10 Issue 1

June 2015

PREPARED FOR

Sharp Communication Compliance Ltd
Inspired
Easthampstead Road
Bracknell
Berkshire
RG12 1NS

PREPARED BY

Natalie Bennett
Senior Administrator , Project Support

APPROVED BY

Simon Bennett
Authorised Signatory

DATED

19 June 2015

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 15C. The sample tested was found to comply with the requirements defined in the applied rules.

Test Engineer(s);

M Toubella

M Choudhury



T Guy

**CONTENTS**

Section		Page No
1	REPORT SUMMARY	3
1.1	Introduction	4
1.2	Brief Summary of Results	5
1.3	Product Technical Description	6
1.4	Product Information	6
1.5	Test Conditions	6
1.6	Deviations from the Standard	6
1.7	Modification Record	6
2	TEST DETAILS	7
2.1	20 dB Bandwidth.....	8
2.2	Field Strength of any Emission	10
2.3	Frequency Tolerance Under Temperature Variations	16
3	TEST EQUIPMENT USED	18
3.1	Test Equipment Used	19
3.2	Measurement Uncertainty	20
4	ACCREDITATION, DISCLAIMERS AND COPYRIGHT	21
4.1	Accreditation, Disclaimers and Copyright.....	22



Product Service

SECTION 1

REPORT SUMMARY

FCC Testing of the
Sharp SHF32 Quad-band GSM (850/900/1800/1900) & Dual-band UMTS (FDDI, FDDV) &
Dual-band LTE (B1, B26) multi mode cellular phone with Bluetooth, WLAN, SRD(FeliCa) and
GPS
In accordance with FCC 47 CFR Part 15C



Product Service

1.1 INTRODUCTION

The information contained in this report is intended to show the verification of FCC Testing of the Sharp SHF32 Quad-band GSM (850/900/1800/1900) & Dual-band UMTS (FDDI, FDDV) & Dual-band LTE (B1, B26) multi mode cellular phone with Bluetooth, WLAN, SRD(FeliCa) and GPS to the requirements of FCC 47 CFR Part 15C.

Objective	To perform FCC Testing to determine the Equipment Under Test's (EUT's) compliance with the Test Specification, for the series of tests carried out.
Manufacturer	Sharp Corporation
Model Number(s)	SHF32
Serial Number(s)	IMEI 004401115362390
Number of Samples Tested	1
Test Specification/Issue/Date	FCC 47 CFR Part 15C (2014)
Disposal	Held Pending Disposal
Reference Number	Not Applicable
Date	Not Applicable
Order Number	10534
Date	17 April 2015
Start of Test	4 June 2015
Finish of Test	8 June 2015
Name of Engineer(s)	M Toubella M Choudhury T Guy
Related Document(s)	ANSI C63.10: 2009



Product Service

1.2 BRIEF SUMMARY OF RESULTS

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15C is shown below.

Section	Specification Clause	Test Description	Result	Comments/Base Standard
FeliCa				
2.1	15.225 and 15.215 (c)	20 dB Bandwidth	Pass	
2.2	15.225 (a)(b)(c)(d)	Field Strength of any Emission	Pass	
2.3	15.225 (e)	Frequency Tolerance Under Temperature Variations	Pass	



Product Service

1.3 PRODUCT TECHNICAL DESCRIPTION

Please refer to the SHF32 Model Description Form.

1.4 PRODUCT INFORMATION

1.4.1 Technical Description

The Equipment Under Test (EUT) was a Sharp SHF32 Quad-band GSM (850/900/1800/1900) & Dual-band UMTS (FDDI, FDDV) & Dual-band LTE (B1, B26) multi mode cellular phone with Bluetooth, WLAN, SRD(FeliCa) and GPS. A full technical description can be found in the manufacturer's documentation.

1.5 TEST CONDITIONS

For all tests the EUT was set up in accordance with the relevant test standard and to represent typical operating conditions. Tests were applied with the EUT situated in a shielded enclosure.

The EUT was powered from a 4.0 V DC supply (Integral Battery).

FCC Measurement Facility Registration Number
90987 Octagon House, Fareham Test Laboratory

1.6 DEVIATIONS FROM THE STANDARD

No deviations from the applicable test standard or test plan were made during testing.

1.7 MODIFICATION RECORD

Modification 0 - No modifications were made to the test sample during testing.



Product Service

SECTION 2

TEST DETAILS

FCC Testing of the
Sharp SHF32 Quad-band GSM (850/900/1800/1900) & Dual-band UMTS (FDDI, FDDV) &
Dual-band LTE (B1, B26) multi mode cellular phone with Bluetooth, WLAN, SRD(FeliCa) and
GPS
In accordance with FCC 47 CFR Part 15C



Product Service

2.1 20 dB BANDWIDTH**2.1.1 Specification Reference**

FCC 47 CFR Part 15C, Clause 15.225 and 15.215 (c)

2.1.2 Equipment Under Test and Modification State

SHF32 S/N: IMEI 004401115362390 - Modification State 0

2.1.3 Date of Test

4 June 2015

2.1.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.1.5 Test Procedure

The test was performed in accordance with ANSI C63.10, clause 6.9.1.

An RBW sufficiently small was used within the measurement instruments capabilities to demonstrate compliance with the requirements.

2.1.6 Environmental Conditions

Ambient Temperature	24.6°C
Relative Humidity	31.5%



Product Service


2.1.7 Test Results

4.0 V DC Supply

FeliCa, 20 dB Bandwidth Result

Frequency (MHz)	20 dB Bandwidth (Hz)
13.56	7.50

FeliCa, 20 dB Bandwidth Plot

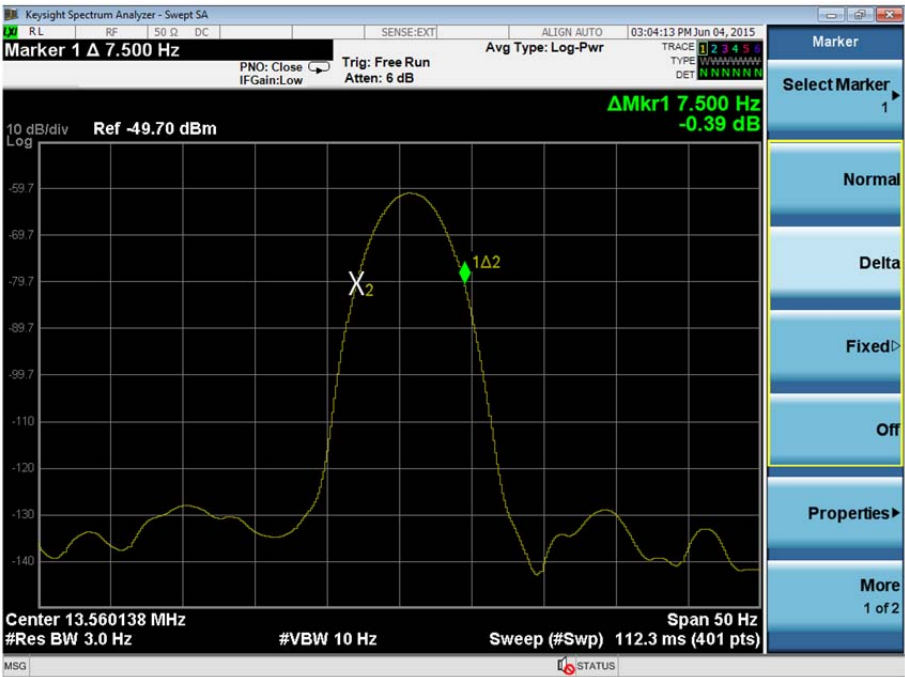

FCC 47 CFR Part 15, Limit Clause 15.215 (c)

The 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.



Product Service

2.2 FIELD STRENGTH OF ANY EMISSION**2.2.1 Specification Reference**

FCC 47 CFR Part 15C, Clause 15.225 (a)(b)(c)(d)

2.2.2 Equipment Under Test and Modification State

SHF32 S/N: IMEI 004401115362390 - Modification State 0

2.2.3 Date of Test

6 June 2015

2.2.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.2.5 Test Procedure

This test was performed in accordance with ANSI C63, clauses 6.3, 6.4 and 6.5.

Remarks

This measurement was performed at 3m and the limit was extrapolated by 40 dB/decade as per ANSI C63.10 clause 5.2 and 5.3.2.

2.2.6 Environmental Conditions

Ambient Temperature	20.7°C
Relative Humidity	34.0 - 43.0%



2.2.7 Test Results


4.0 V DC Supply

FeliCa, Carrier Results

Frequency (MHz)	Quasi-Peak Level (dB μ V/m) at 3m	Quasi-Peak Level (dB μ V/m) at 30m	Quasi-Peak Level (μ V/m) at 3m	Quasi-Peak Level (μ V/m) at 30m	Angle (°)	Height (m)	Polarisation
13.56	52.08	12.08	401.8	4.02	0	1	Vertical

*The level at 30m was calculated using the dB μ V/m measurement at 3m and extrapolating this result to produce a level at 30m. This value was then converted to obtain the value in μ V/m.

FeliCa, Carrier Plot

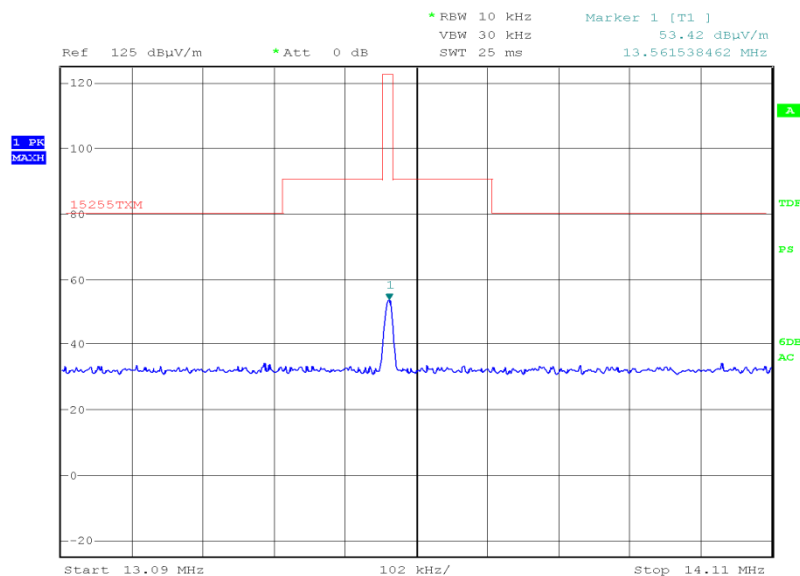

Date: 6.JUN.2015 12:27:26




Product Service

FeliCa, Field Strength of any Emission Results

Frequency (MHz)	Quasi-Peak Level (dBµV/m) at 3m	Quasi-Peak Level (dBµV/m) at 30m	Quasi-Peak Level (µV/m) at 3m	Quasi-Peak Level (µV/m) at 30m	Angle (°)	Height (m)	Polarisation
*							

*No emissions were detected within 10 dB of the limit.

FeliCa, 9 kHz to 150 kHz, Field Strength of any Emission Plot

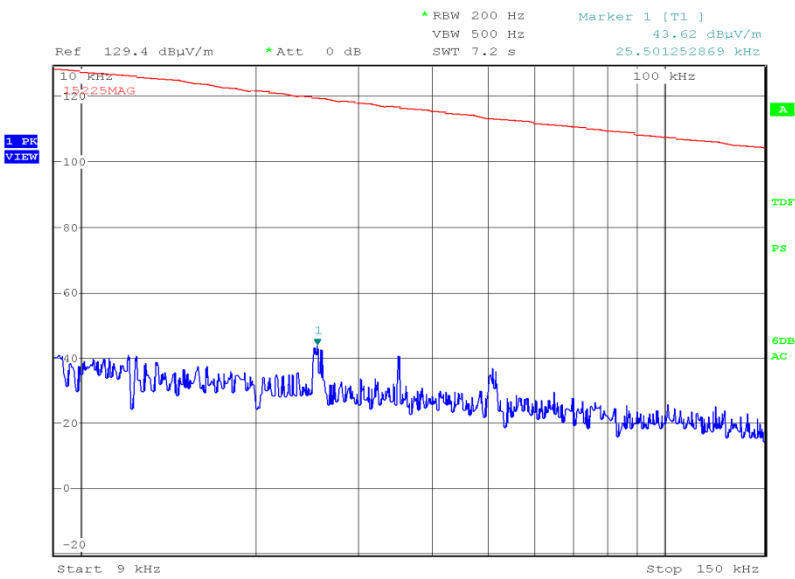


Date: 6.JUN.2015 12:21:11



Product Service

FeliCa, 150 kHz to 30 MHz, Field Strength of any Emission Plot

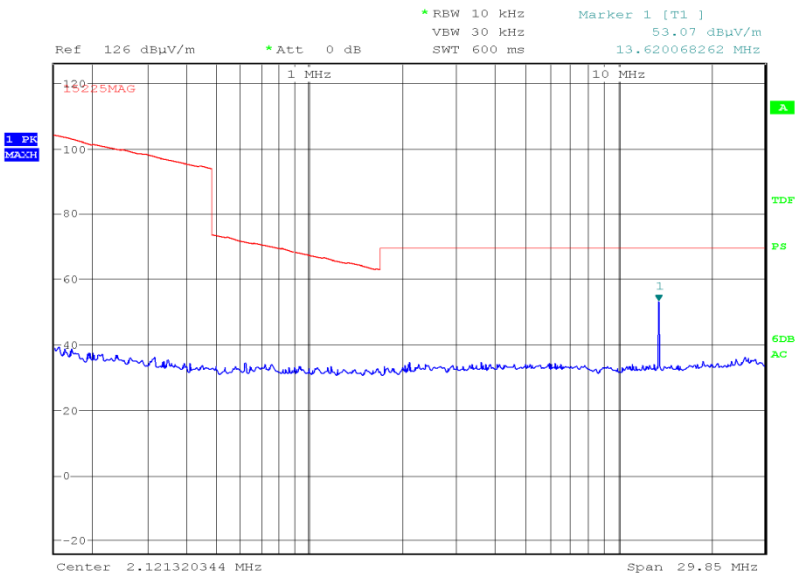


Date: 6.JUN.2015 11:43:49



FeliCa, 30 MHz to 1 GHz, Field Strength of any Emission Results

Frequency (MHz)	Quasi-Peak Level (dBμV/m)	Quasi-Peak Level (μV/m)	Quasi-Peak Margin (dμV/m)	Quasi-Peak Margin (μV/m)	Angle (°)	Height (m)	Polarisation
40.931	25.3	18.4	-14.7	-81.6	353	2.63	Vertical
54.238	26.2	20.4	-13.8	-79.6	294	1.00	Vertical
108.483	28.4	26.3	-15.1	-123.7	10	1.00	Vertical
135.602	30.8	34.7	-12.7	-115.3	337	1.00	Vertical
162.719	27.1	22.6	-16.4	-127.4	0	1.00	Vertical
379.688	33.5	47.3	-12.5	-152.7	27	1.19	Vertical
461.040	32.3	41.2	-13.7	-158.8	156	1.00	Vertical

FeliCa, 30 MHz to 1 GHz, Field Strength of any Emission Plot

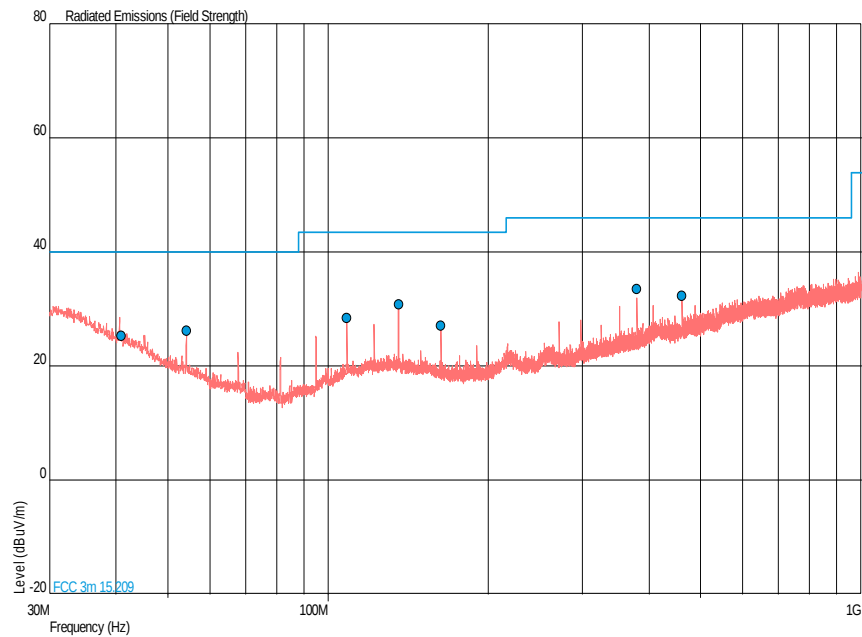



Product Service

FCC 47 CFR Part 15, Limit Clause 15.225 (a)(b)(c)(d)

(a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

(b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

(c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

(d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

FCC 47 CFR Part 15, Limit Clause 15.209

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 to 0.490	2400/F (kHz)	300
0.490 to 1.705	24000/F (kHz)	30
1705 to 30	30	30
30 to 88	100**	3
88 to 216	150**	3
216 to 960	200**	3
Above 960	500	5



Product Service

2.3 FREQUENCY TOLERANCE UNDER TEMPERATURE VARIATIONS

2.3.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.225 (e)

2.3.2 Equipment Under Test and Modification State

SHF32 S/N: IMEI 004401115362390 - Modification State 0

2.3.3 Date of Test

5 June 2015 & 8 June 2015

2.3.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.3.5 Test Procedure

The test was performed over the temperature variations using a fully charged battery as specified in FCC 15.225 (e). A spectrum analyser was used to monitor the frequency of the carrier signal.

2.3.6 Environmental Conditions

Ambient Temperature	22.6 - 25.0°C
Relative Humidity	31.0 - 34.0%



2.3.7 Test Results

FeliCa, Frequency Tolerance Under Temperature Variations Results

Temperature Interval	Voltage	Fundamental Frequency (MHz)	Fundamental Frequency Deviation (%)
-20 °C	4.0 V DC	13.560201	0.002
-10 °C	4.0 V DC	13.560226	0.002
0 °C	4.0 V DC	13.560219	0.002
+10 °C	4.0 V DC	13.560182	0.001
+20 °C	4.0 V DC	13.560147	0.001
+30 °C	4.0 V DC	13.560122	0.001
+40 °C	4.0 V DC	13.560093	0.001
+50 °C	4.0 V DC	13.560077	0.001

FCC 47 CFR Part 15, Limit Clause 15.225 (e)

The frequency tolerance of the carrier signal shall be maintained within ± 0.01 % of the operating frequency.



Product Service

SECTION 3

TEST EQUIPMENT USED



3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
Section 2.1 – 20 dB Bandwidth					
Attenuator 10dB/10W)	Trilithic	HFP-50N	454	12	15-Aug-2015
Hygrometer	Rotronic	I-1000	3220	12	24-Jul-2015
PXA Signal Analyser	Agilent Technologies	N9030A PXA	4409	12	16-Feb-2016
2 metre SMA Cable	IW Microwave	3PS-1806LC-788-3PS	4525	12	29-Jan-2016
Section 2.2 - Field Strength of any Emission					
Dual Power Supply Unit	Thurlby	PL320	288	-	TU
Antenna (Active Loop, 9kHz-30MHz)	Rohde & Schwarz	HFH2-Z2	333	24	28-Nov-2016
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Antenna (Bilog)	Chase	CBL6143	2904	24	10-Jun-2015
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	27-Oct-2015
Tilt Antenna Mast	matur GmbH	TAM 4.0-P	3916	-	TU
Mast Controller	matur GmbH	NCD	3917	-	TU
Section x.x Wireless Group - Frequency Tolerance Under Temperature Variations					
Climatic Chamber	Votsch	VT4002	161	-	O/P Mon
Multimeter	Fluke	75 Mk3	455	12	23-Jul-2015
Rubidium Standard	Rohde & Schwarz	XSRM	1316	6	28-Jul-2015
Digital Thermometer	Digitron	T208	2831	12	31-Jul-2015
Frequency Standard	Spectracom	Secure Sync 1200-0408-0601	4393	6	28-Jul-2015
PXA Signal Analyser	Agilent Technologies	N9030A PXA	4409	12	16-Feb-2016
2 metre SMA Cable	IW Microwave	3PS-1806LC-788-3PS	4524	12	29-Jan-2016

TU – Traceability Unscheduled

O/P MON – Output Monitored with Calibrated Equipment



Product Service

3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:-

Test Discipline	MU
Frequency Tolerance Under Temperature Variations	± 3.54 Hz
Field Strength of any Emission	9 kHz to 1 GHz: ± 5.1 dB
20 dB Bandwidth	± 16.74 kHz



Product Service

SECTION 4

ACCREDITATION, DISCLAIMERS AND COPYRIGHT



Product Service

4.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



This report relates only to the actual item/items tested.

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.

Results of tests not covered by our UKAS Accreditation Schedule are marked NUA
(Not UKAS Accredited).

This report must not be reproduced, except in its entirety, without the written permission of
TÜV SÜD Product Service

© 2015 TÜV SÜD Product Service