

TEST REPORT

Applicant : Sharp Corporation, Communication Systems Division
Address : 2-13-1, Iida Hachihonmatsu, Higashi-Hiroshima City, Hiroshima,
739-0192, Japan

Products : Smart Phone
Model No. : SH-02H
Serial No. : 004401115990842

FCC ID : APYHRO00228

Test Standard : CFR 47 FCC Rules and Regulations Part 15

Test Results : **Passed**

Date of Test : September 16 ~ October 7 , 2015



A handwritten signature in black ink, appearing to read 'K. Shibata'.

Kousei Shibata
Manager
Japan Quality Assurance Organization
KITA-KANSAI Testing Center
SAITO EMC Branch
7-3-10, Saito-asagi, Ibaraki-shi, Osaka 567-0085, Japan

-
- The measurement values stated in Test Report was made with traceable to National Institute of Advanced Industrial Science and Technology (AIST) of Japan and National Institute of Information and Communications Technology (NICT) of Japan.
 - The applicable standard, testing condition and testing method which were used for the tests are based on the request of the applicant.
 - The test results presented in this report relate only to the offered test sample.
 - The contents of this test report cannot be used for the purposes, such as advertisement for consumers.
 - This test report shall not be reproduced except in full without the written approval of JQA.
 - VLAC does not approve, certify or warrant the product by this test report.

TABLE OF CONTENTS

	Page
1 Description of the Equipment Under Test	3
2 Summary of Test Results	4
3 Test Procedure	5
4 Test Location	5
5 Recognition of Test Laboratory	5
6 Description of Test Setup	6
7 Test Requirements	8

DEFINITIONS FOR ABBREVIATION AND SYMBOLS USED IN THIS TEST REPORT

EUT : Equipment Under Test

AE : Associated Equipment

N/A : Not Applicable

N/T : Not Tested

EMC : Electromagnetic Compatibility

EMI : Electromagnetic Interference

EMS : Electromagnetic Susceptibility

☒ - indicates that the listed condition, standard or equipment is applicable for this report.

☐ - indicates that the listed condition, standard or equipment is not applicable for this report.

1 Description of the Equipment Under Test

1. Manufacturer : Sharp Corporation, Communication Systems Division
2-13-1, Iida Hachihonmatsu, Higashi-Hiroshima City, Hiroshima,
739-0192, Japan
2. Products : Smart Phone
3. Model No. : SH-02H
4. Serial No. : 004401115990842
5. Product Type : Pre-production
6. Date of Manufacture : July, 2015
7. Power Rating : 4.0VDC (Lithium-ion Battery 1UAF375986Z 2810mAh)
8. Grounding : None
9. Transmitting Frequency : 13.56 MHz
10. Receiving Frequency : 13.56 MHz
11. Antenna Type : Internal Antenna (Integral)
12. EUT Authorization : Certification
13. Received Date of EUT : September 11, 2015

2 Summary of Test Results

Applied Standard : CFR 47 FCC Rules and Regulations Part 15
Subpart C – Intentional Radiators

The EUT described in clause 1 was tested according to the applied standard shown above.

Details of the test configuration is shown in clause 6.

The conclusion for the test items of which are required by the applied standard is indicated under the test result.

- ☒ - The test result was **passed** for the test requirements of the applied standard.
- ☐ - The test result was **failed** for the test requirements of the applied standard.
- ☐ - The test result was **not judged** the test requirements of the applied standard.

In the approval of test results,

- Determining compliance with the limits in this report was based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.
- No deviations were employed from the applied standard.
- No modifications were conducted by JQA to achieve compliance to the limitations.

Reviewed by:

Tested by:



Shigeru Kinoshita
Assistant Manager
JQA KITA-KANSAI Testing Center
SAITO EMC Branch



Shigeru Osawa
Deputy Manager
JQA KITA-KANSAI Testing Center
SAITO EMC Branch

3 Test Procedure

Test Requirements : §15.225, §15.207 and §15.209

Test Procedure : ANSI C63.4-2003

4 Test Location

Japan Quality Assurance Organization (JQA)

KITA-KANSAI Testing Center

7-7, Ishimaru, 1-chome, Minoh-shi, Osaka, 562-0027, Japan

SAITO EMC Branch

7-3-10, Saito-asagi, Ibaraki-shi, Osaka 567-0085, Japan

5 Recognition of Test Laboratory

JQA KITA-KANSAI Testing Center SAITO EMC Branch is accredited under ISO/IEC 17025 by following accreditation bodies and the test facility is registered by the following bodies.

VLAC Accreditation No. : VLAC-001-2 (Expiry date : March 30, 2016)

VCCI Registration No. : A-0002 (Expiry date : March 30, 2016)

BSMI Registration No. : SL2-IS-E-6006, SL2-IN-E-6006, SL2-R1/R2-E-6006, SL2-A1-E-6006
(Expiry date : September 14, 2016)

IC Registration No. : 2079E-3, 2079E-4 (Expiry date : July 16, 2017)

Accredited as conformity assessment body for Japan electrical appliances and material law by METI.
(Expiry date : February 22, 2016)

6 Description of Test Setup

6.1 Test Configuration

The equipment under test (EUT) consists of :

	Item	Manufacturer	Model No.	Serial No.	FCC ID
A	Smart Phone	Sharp	SH-02H	004401115990842	APYHRO00228


The auxiliary equipment used for testing :

None

Type of Cable:

None

6.2 Test Arrangement (Drawings)



6.3 Operating Condition

Power Supply Voltage : 4.0 VDC (for Battery)

The test were carried under 4 mode shown as follows:

1. Felica (Modulation Type : ASK)
2. ISO/IEC14443 Type A (Modulation Type : ASK)
3. ISO/IEC14443 Type B (Modulation Type : ASK)
4. ISO/IEC15693 Type V (Modulation Type : ASK)

The Radiated Emission test were carried under 1 test configurations shown in clause 6.2.

In all tests, the fully charged battery is used for the EUT.

Detailed Transmitter portion:

Transmitter frequency : 13.560 MHz

Detailed Receiver portion:

Receiver frequency : 13.560 MHz

Other Clock Frequency

19.2MHz, 48MHz, 12MHz, 27.12MHz

The EUT was rotated through three orthogonal axis (X, Y and Z axis) in radiated measurement.

7 Test Requirements

7.0 Summary of the Test Results

Test Item	FCC Specification	Reference of the Test Report	Results	Remarks
Antenna Requirement	Section 15.203	Section 1.11	Passed	-
AC Powerline Conducted Emission	Section 15.207	Section 7.1	N/A *1)	-
Radiated Emission	Section 15.225(a)(b)(c)(d)	Section 7.2	Passed	-
Occupied Bandwidth	Section 15.215(c)	Section 7.3	Passed	-
Frequency Stability	Section 15.225(e)	Section 7.4	Passed	-

Note: 1) See Section 7.1.

7.1 AC Powerline Conducted Emission

For the requirements, ☐ - Applicable [☐ - Tested. ☐ - Not tested by applicant request.]
☒ - Not Applicable

Remarks : When the smart phone is connected to the AC Charger or Earphone, the RF(13.56MHz) communicating function is not available.

7.2 Radiated Emission

For the requirements, ☒ - Applicable [☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

7.2.1 Test Results

7.2.1.1 Radiated Emission (§15.225(a)(b)(c))

For the standard, ☒ - Passed ☐ - Failed ☐ - Not judged

Min. Limit Margin (Quasi-Peak) 57.1 dB at 13.553/13.567 MHz

Uncertainty of Measurement Results 9 kHz – 30 MHz ± 3.0 dB(2σ)

Remarks : The Radited Emission at 30m of 13.553/13.567 MHz is -6.6 dB(uV/m). Felica mode, Y axis position at 13.553MHz and Z axis position at 13.567MHz.

7.2.1.2 Radiated Emission (§15.225(d))

For the standard, ☒ - Passed ☐ - Failed ☐ - Not judged

Min. Limit Margin (Quasi-Peak) 7.7 dB at 108.48 MHz

Uncertainty of Measurement Results
9 kHz – 30 MHz ± 3.0 dB(2σ)
30 MHz – 300 MHz ± 3.8 dB(2σ)
300 MHz – 1000 MHz ± 4.8 dB(2σ)

Remarks : Feleca mode, X axis position. When the smart phone is connected to the AC Charger or Earphone, the RF(13.56MHz) communicating function is not available.

7.2.2 Test Instruments

Anechoic Chamber A2				
Type	Model	Serial No. (ID)	Manufacturer	Cal. Due
Test Receiver	ESU 26	100170 (A-6)	Rohde & Schwarz	2016/04/25
Loop Antenna	HFH2-Z2	872096/25 (C-2)	Rohde & Schwarz	2016/07/26
RF Cable	RG213/U	--- (H-28)	HUBER+SUHNER	2016/07/26
Pre-Amplifier	310N	304573 (A-17)	SONOMA	2016/04/15
Biconical Antenna	VHA9103/BBA9106	2355 (C-30)	Schwarzbeck	2016/05/24
Log-periodic Antenna	UHALP9108-A1	0694 (C-31)	Schwarzbeck	2016/05/24
RF Cable	S 10162 B-11 etc.	--- (H-4)	HUBER+SUHNER	2016/04/15

NOTE : The calibration interval of the above test instruments is 12 months.

7.2.3 Test Method and Test Setup (Diagrammatic illustration)


7.2.3.1 Radiated Emission 9 kHz – 30 MHz

The preliminary tests were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration(in X, Y and Z axis), cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for the final tests.

– Side View –

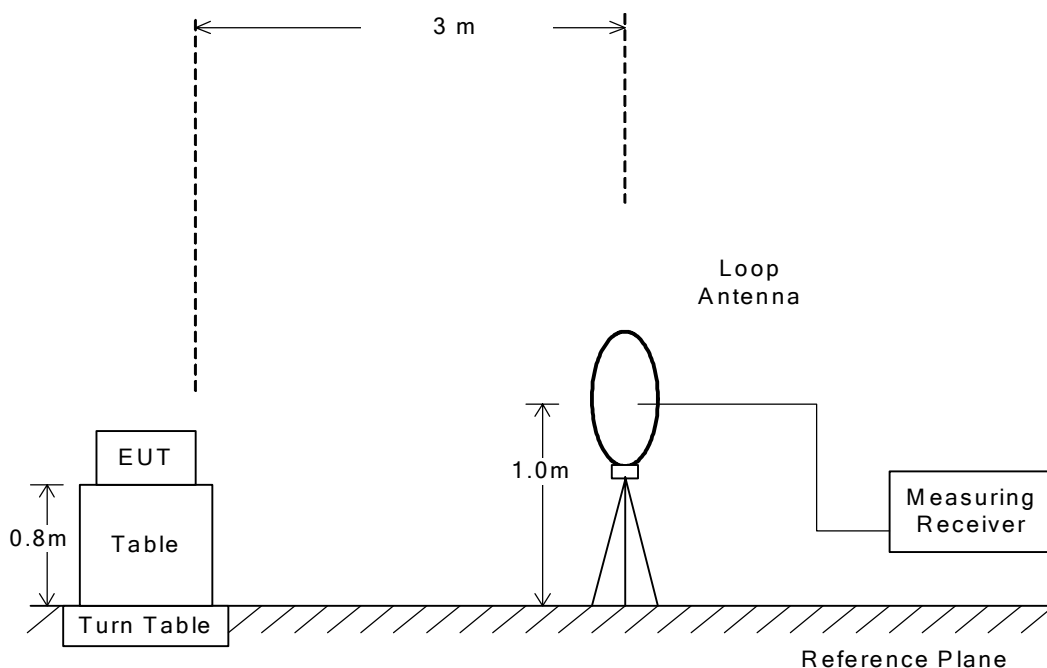


7.2.3.2 Radiated Emission 30 MHz – 1000 MHz

The preliminary tests were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration(in X, Y and Z axis), cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for the final tests.

– Side View –

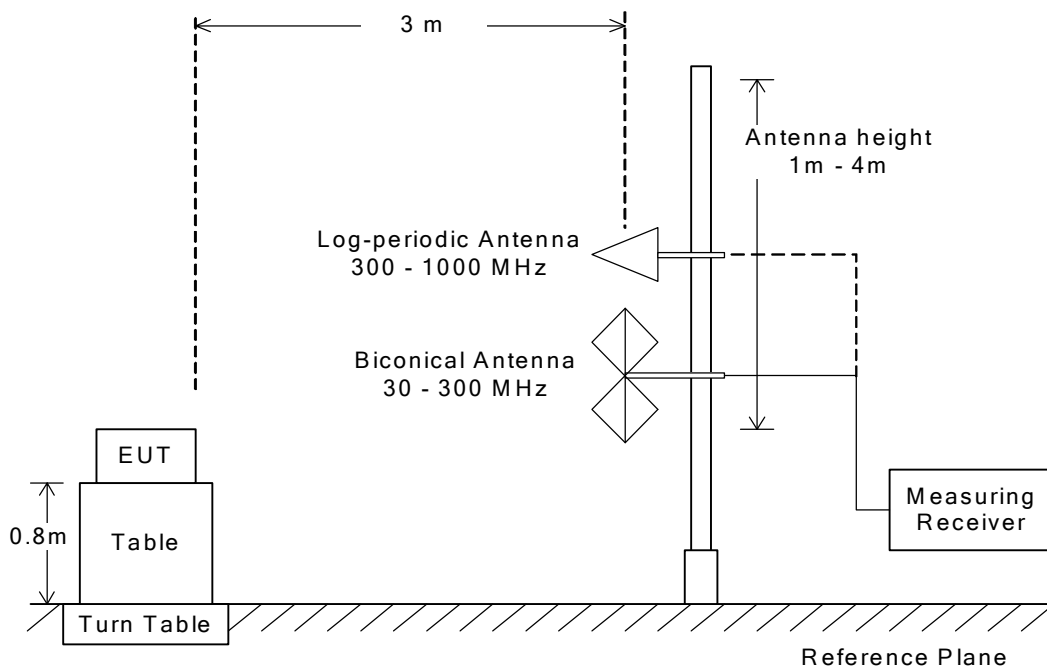

7.2.4 Test Data

7.2.4.1 Radiated Emission (§15.225(a)(b)(c) & §15.209(a))

Test Mode : Felica

Test condition : Transmitting(Felica)							Test Date: September 16, 2015
							Temp.: 23 °C, Humi: 66 %
Frequency [MHz]	Correction Factor [dB(1/m)]	Meter Readings at 3 m [dB(μV)]	Limits [dB(μV/m)]	Specified Distance [m]	Extrapolated Results [dB(μV/m)]	Margin [dB]	Remarks
13.410	19.8	< 10.0	40.5	30.0	< -10.2	> +50.7	-
13.553	19.8	13.6	50.5	30.0	- 6.6	+57.1	-
13.560	19.8	26.9	84.0	30.0	6.7	+77.3	-
13.567	19.8	13.6	50.5	30.0	- 6.6	+57.1	-
13.710	19.8	< 10.0	40.5	30.0	< -10.2	> +50.7	-
27.120	22.2	< 10.0	29.5	30.0	< - 7.8	> +37.3	-

NOTES

1. Test Distance : 3 m
2. The correction factor includes the antenna factor and the cable loss.
3. The symbol of "<" means "or less".
4. The symbol of ">" means "more than".
5. The testing loop antenna was rotated at the vertical and horizontal axis to maximize received emissions.
The above Meter Reading was maximum emission level.
6. Calculation:
For fundamental, the measured field strength was extrapolated to distance 30m, using the formula that field strength using the formula that field strength aries as the inverse distance square(40 dB per decade of distance).

Fundamental : Correction Factor + Meter Reading = 19.8 + 26.9 = 46.7 dB(μV/m)
 Result at 30 m = -40 + 46.7 = 6.7 dB(μV/m) (Conversion Factor : 40dB/decade)
 Limits for 13.553-13.567MHz(§15.225(a)) = 20log10(15848) = 84.0 dBμV/m
 Limits for 13.410-13.553,13.567-13.710MHz(§15.225(b)) = 20log10(334) = 50.5 dBμV/m
 Limits for 13.110-13.410,13.710-14.010MHz (§15.225(c)) = 20log10(106) = 40.5 dBμV/m
 Harmonics : Correction Factor + Meter Reading = 22.2 + <10.0 = <32.2 dB(μV/m)
 Result at 30 m = -40 + <32.2 = <-7.8 dB(μV/m) (Conversion Factor : 40dB/decade)
 Limits for Harmonics(§15.209(a)) = 20log10(30) = 29.5 dBμV/m

7. Test receiver setting(s) :
 Quasi-Peak Detector IF Bandwidth: 9kHz or 200Hz(Except for 9 kHz -90 kHz, 110 kHz -490 kHz)
 Average Detector, IF Bandwidth: 9kHz or 200Hz(9 kHz -90 kHz, 110 kHz -490 kHz)

Test Mode : ISO/IEC14443 Type A

Test Date: September 16, 2015

Temp.: 23 °C, Humi: 66 %

Test condition : Transmitting(Type A)

Frequency [MHz]	Correction Factor [dB(1/m)]	Meter Readings at 3 m [dB(μV)]	Limits [dB(μV/m)]	Specified Distance [m]	Extrapolated Results [dB(μV/m)]	Margin [dB]	Remarks
13.410	19.8	< 10.0	40.5	30.0	< -10.2	> +50.7	-
13.553	19.8	11.2	50.5	30.0	- 9.0	+59.5	-
13.560	19.8	25.0	84.0	30.0	4.8	+79.2	-
13.567	19.8	11.3	50.5	30.0	- 8.9	+59.4	-
13.710	19.8	< 10.0	40.5	30.0	< -10.2	> +50.7	-
27.120	22.2	< 10.0	29.5	30.0	< - 7.8	> +37.3	-

NOTES

1. Test Distance : 3 m

2. The correction factor includes the antenna factor and the cable loss.

3. The symbol of "<" means "or less".

4. The symbol of ">" means "more than".

5. The testing loop antenna was rotated at the vertical and horizontal axis to maximize received emissions.

The above Meter Reading was maximum emission level.

6. Calculation:

For fundamental, the measured field strength was extrapolated to distance 30m, using the formula that field strength using the formula that field strength aries as the inverse distance square(40 dB per decade of distance).

Fundamental : Correction Factor + Meter Reading = 19.8 + 25.0 = 44.8 dB(μV/m)

Result at 30 m = -40 + 44.8 = 4.8 dB(μV/m) (Conversion Factor : 40dB/decade)

Limits for 13.553-13.567MHz(§15.225(a)) = 20log10(15848) = 84.0 dBμV/m

Limits for 13.410-13.553,13.567-13.710MHz(§15.225(b)) = 20log10(334) = 50.5 dBμV/m

Limits for 13.110-13.410,13.710-14.010MHz (§15.225(c)) = 20log10(106) = 40.5 dBμV/m

Harmonics : Correction Factor + Meter Reading = 22.2 + <10.0 = <32.2 dB(μV/m)

Result at 30 m = -40 + <32.2 = <-7.8 dB(μV/m) (Conversion Factor : 40dB/decade)

Limits for Harmonics(§15.209(a)) = 20log10(30) = 29.5 dBμV/m

7. Test receiver setting(s) :

Quasi-Peak Detector IF Bandwidth: 9kHz or 200Hz(Except for 9 kHz -90 kHz, 110 kHz -490 kHz)

Average Detector, IF Bandwidth: 9kHz or 200Hz(9 kHz -90 kHz, 110 kHz -490 kHz)

Test Mode : ISO/IEC14443 Type B

Test Date: September 16, 2015

Temp.: 23 °C, Humi: 66 %

Test condition : Transmitting(Type B)

Frequency [MHz]	Correction Factor [dB(1/m)]	Meter Readings at 3 m [dB(μV)]	Limits [dB(μV/m)]	Specified Distance [m]	Extrapolated Results [dB(μV/m)]	Margin [dB]	Remarks
13.410	19.8	< 10.0	40.5	30.0	< -10.2	> +50.7	-
13.553	19.8	11.4	50.5	30.0	- 8.8	+59.3	-
13.560	19.8	25.0	84.0	30.0	4.8	+79.2	-
13.567	19.8	11.4	50.5	30.0	- 8.8	+59.3	-
13.710	19.8	< 10.0	40.5	30.0	< -10.2	> +50.7	-
27.120	22.2	< 10.0	29.5	30.0	< - 7.8	> +37.3	-

NOTES

1. Test Distance : 3 m

2. The correction factor includes the antenna factor and the cable loss.

3. The symbol of "<" means "or less".

4. The symbol of ">" means "more than".

5. The testing loop antenna was rotated at the vertical and horizontal axis to maximize received emissions.

The above Meter Reading was maximum emission level.

6. Calculation:

For fundamental, the measured field strength was extrapolated to distance 30m, using the formula that field strength using the formula that field strength aries as the inverse distance square(40 dB per decade of distance).

Fundamental : Correction Factor + Meter Reading = 19.8 + 25.0 = 44.8 dB(μV/m)

Result at 30 m = -40 + 44.8 = 4.8 dB(μV/m) (Conversion Factor : 40dB/decade)

Limits for 13.553-13.567MHz(§15.225(a)) = 20log10(15848) = 84.0 dBμV/m

Limits for 13.410-13.553,13.567-13.710MHz(§15.225(b)) = 20log10(334) = 50.5 dBμV/m

Limits for 13.110-13.410,13.710-14.010MHz (§15.225(c)) = 20log10(106) = 40.5 dBμV/m

Harmonics : Correction Factor + Meter Reading = 22.2 + <10.0 = <32.2 dB(μV/m)

Result at 30 m = -40 + <32.2 = <-7.8 dB(μV/m) (Conversion Factor : 40dB/decade)

Limits for Harmonics(§15.209(a)) = 20log10(30) = 29.5 dBμV/m

7. Test receiver setting(s) :

Quasi-Peak Detector IF Bandwidth: 9kHz or 200Hz(Except for 9 kHz -90 kHz, 110 kHz -490 kHz)

Average Detector, IF Bandwidth: 9kHz or 200Hz(9 kHz -90 kHz, 110 kHz -490 kHz)

Test Mode : ISO/IEC15693 Type V

Test Date: September 16, 2015

Temp.: 23 °C, Humi: 66 %

Test condition : Transmitting(Type V)

Frequency [MHz]	Correction Factor [dB(1/m)]	Meter Readings at 3 m [dB(μV)]	Limits [dB(μV/m)]	Specified Distance [m]	Extrapolated Results [dB(μV/m)]	Margin [dB]	Remarks
13.410	19.8	< 10.0	40.5	30.0	< -10.2	> +50.7	-
13.553	19.8	11.4	50.5	30.0	- 8.8	+59.3	-
13.560	19.8	25.3	84.0	30.0	5.1	+78.9	-
13.567	19.8	11.5	50.5	30.0	- 8.7	+59.2	-
13.710	19.8	< 10.0	40.5	30.0	< -10.2	> +50.7	-
27.120	22.2	< 10.0	29.5	30.0	< - 7.8	> +37.3	-

NOTES

1. Test Distance : 3 m

2. The correction factor includes the antenna factor and the cable loss.

3. The symbol of "<" means "or less".

4. The symbol of ">" means "more than".

5. The testing loop antenna was rotated at the vertical and horizontal axis to maximize received emissions.

The above Meter Reading was maximum emission level.

6. Calculation:

For fundamental, the measured field strength was extrapolated to distance 30m, using the formula that field strength using the formula that field strength aries as the inverse distance square(40 dB per decade of distance).

Fundamental : Correction Factor + Meter Reading = 19.8 + 25.3 = 45.1 dB(μV/m)

Result at 30 m = -40 + 45.1 = 5.1 dB(μV/m) (Conversion Factor : 40dB/decade)

Limits for 13.553-13.567MHz(§15.225(a)) = 20log10(15848) = 84.0 dBμV/m

Limits for 13.410-13.553,13.567-13.710MHz(§15.225(b)) = 20log10(334) = 50.5 dBμV/m

Limits for 13.110-13.410,13.710-14.010MHz (§15.225(c)) = 20log10(106) = 40.5 dBμV/m

Harmonics : Correction Factor + Meter Reading = 22.2 + <10.0 = <32.2 dB(μV/m)

Result at 30 m = -40 + <32.2 = <-7.8 dB(μV/m) (Conversion Factor : 40dB/decade)

Limits for Harmonics(§15.209(a)) = 20log10(30) = 29.5 dBμV/m

7. Test receiver setting(s) :

Quasi-Peak Detector IF Bandwidth: 9kHz or 200Hz(Except for 9 kHz -90 kHz, 110 kHz -490 kHz)

Average Detector, IF Bandwidth: 9kHz or 200Hz(9 kHz -90 kHz, 110 kHz -490 kHz)

7.2.4.2 Radiated Emission (§15.209(a))(9kHz – 30MHz)


Test Mode: All mode

Test condition : Transmitting

Test Date: September 16, 2015

Temp.: 23 °C, Humi: 66 %

Frequency [MHz]	Correction Factor [dB(1/m)]	Meter Readings at 3 m [dB(μV)]	Limits [dB(μV/m)]	Specified Distance [m]	Extrapolated Results [dB(μV/m)]	Margin [dB]	Remarks
0.009	29.6	< 15.0	48.5	300.0	< -35.4	> +83.9	-
0.01	28.8	< 15.0	47.6	300.0	< -36.2	> +83.8	-
0.05	21.1	< 15.0	33.6	300.0	< -43.9	> +77.5	-
0.10	20.3	< 15.0	27.6	300.0	< -44.7	> +72.3	-
0.50	19.8	< 10.0	33.6	30.0	< -10.2	> +43.8	-
1.00	19.7	< 10.0	27.6	30.0	< -10.3	> +37.9	-
5.00	19.7	< 10.0	29.5	30.0	< -10.3	> +39.8	-
10.00	19.6	< 10.0	29.5	30.0	< -10.4	> +39.9	-
20.00	20.9	< 10.0	29.5	30.0	< - 9.1	> +38.6	-
30.00	22.4	< 10.0	29.5	30.0	< - 7.6	> +37.1	-

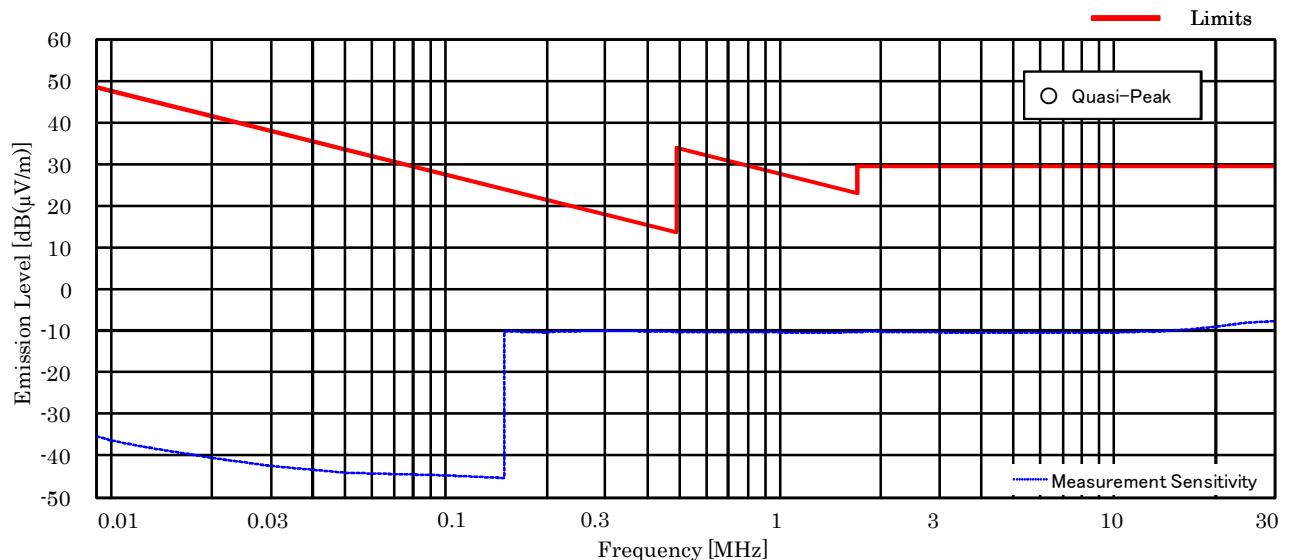

NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 9 kHz to 30 MHz.
3. The correction factor includes the antenna factor and the cable loss.
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. Calculated result at 30.00 MHz, as the worst point shown on underline:
Correction Factor + Meter Reading = 22.4 + <10.0 = <32.4 dB(μV/m)
Result at 30 m = -40.0 + <32.4 = <-7.6 dB(μV/m) (Conversion Factor : 40dB/decade)
7. Test receiver setting(s) :
Quasi-Peak Detector, IF Bandwidth: 9kHz or 200Hz(Except for 9 kHz -90 kHz, 110 kHz -490 kHz)
Average Detector, IF Bandwidth: 9kHz or 200Hz(9 kHz -90 kHz, 110 kHz -490 kHz)

7.2.4.3 Radiated Emission (§15.209(a))(30MHz – 1000MHz)


Test Mode :Felica (Worst case)

Test Date: September 16, 2015

Temp.: 23 °C, Humi: 66 %

Antenna pole : Horizontal

Frequency [MHz]	Antenna Factor [dB(1/m)]	Corr. Factor [dB]	Meter Readings [dB(μV)]	Limits [dB(μV/m)]	Results [dB(μV/m)]	Margin [dB]	Remarks
54.24	9.7	-27.2	36.6	40.0	19.1	+20.9	-
81.36	6.6	-26.8	48.2	40.0	28.0	+12.0	-
94.92	9.1	-26.7	31.9	43.5	14.3	+29.2	-
108.48	11.5	-26.5	45.7	43.5	30.7	+12.8	-
122.04	13.2	-26.4	28.4	43.5	15.2	+28.3	-
135.60	14.0	-26.3	30.7	43.5	18.4	+25.1	-

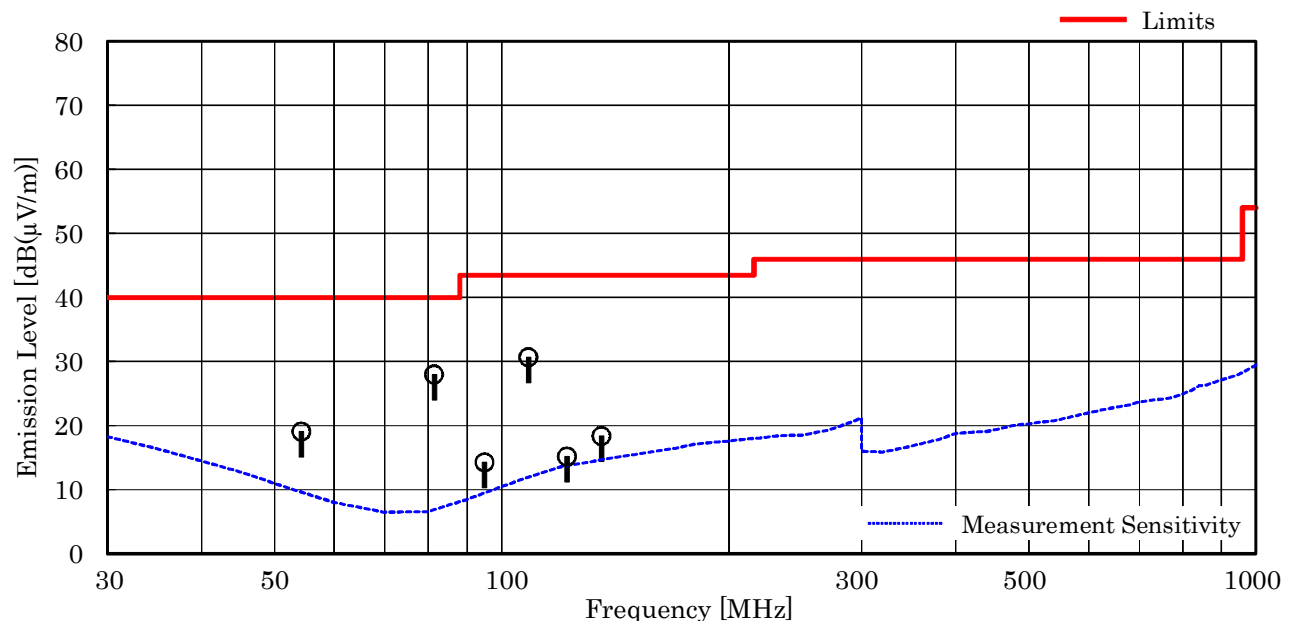

NOTES


1. Test Distance : 3 m
2. The spectrum was checked from 30 MHz to 1000 MHz.
3. The correction factor is composed of cable loss, pad attenuation and/or amplifier gain.
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. Calculated result at 81.36 MHz, as the worst point shown on underline:
Antenna Factor + Coorection Factor + Meter Reading = 6.6 + (-26.8) + 48.2 = 28.0 dB(μV/m)
Antenna Height : 2.41 m, Turntable Angle : 354 °
7. Test receiver setting(s) : CISPR QP 120 kHz (QP : Quasi-Peak)

Test Date: September 16, 2015

Temp.: 23 °C, Humi: 66 %

Antenna pole : Vertical

Frequency [MHz]	Antenna Factor [dB(1/m)]	Corr. Factor [dB]	Meter Readings [dB(μV)]	Limits [dB(μV/m)]	Results [dB(μV/m)]	Margin [dB]	Remarks
54.24	9.7	-27.2	43.1	40.0	25.6	+14.4	-
81.36	6.6	-26.8	50.5	40.0	30.3	+ 9.7	-
94.92	9.1	-26.7	33.9	43.5	16.3	+27.2	-
108.48	11.5	-26.5	50.8	43.5	35.8	+ 7.7	-
122.04	13.2	-26.4	28.5	43.5	15.3	+28.2	-
135.60	14.0	-26.3	30.6	43.5	18.3	+25.2	-

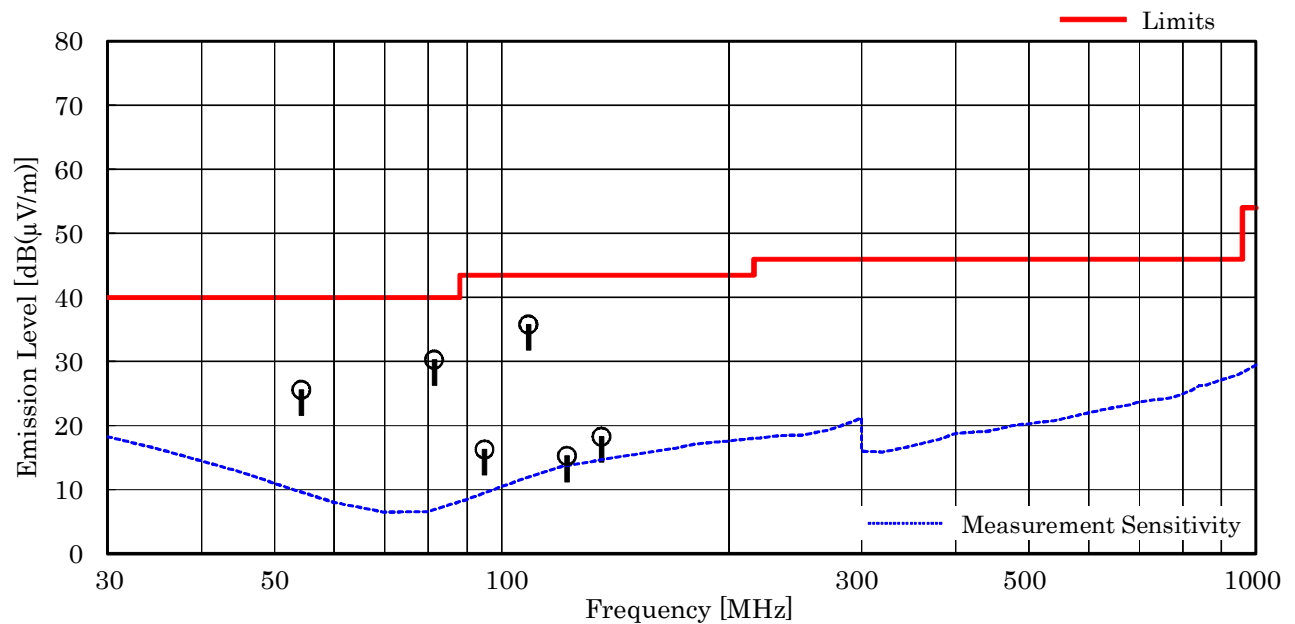

NOTES

- Test Distance : 3 m
- The spectrum was checked from 30 MHz to 1000 MHz.
- The correction factor is composed of cable loss, pad attenuation and/or amplifier gain.
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- Calculated result at 108.48 MHz, as the worst point shown on underline:
 Antenna Factor + Coorection Factor + Meter Reading = 11.5 + (-26.5) + 50.8 = 35.8 dB(μV/m)
 Antenna Height : 1.00 m, Turntable Angle : 0 °
- Test receiver setting(s) : CISPR QP 120 kHz (QP : Quasi-Peak)

7.3 Occupied Bandwidth

For the requirements, ☒ - Applicable [☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

7.3.1 Test Results

For the standard, ☒ - Passed ☐ - Failed ☐ - Not judged

Uncertainty of Measurement Results ± 0.9 %(2 σ)

Remarks : _____


7.3.2 Test Instruments

Shielded Room S4				
Type	Model	Serial No. (ID)	Manufacturer	Cal. Due
Spectrum Analyzer	E4446A	US44300388 (A-39)	Agilent	2016/08/11
Loop Antenna	LU-100A	--- (C-33)	TEXIO	N/A

NOTE : The calibration interval of the above test instruments is 12 months.

7.3.3 Test Method and Test Setup (Diagrammatic illustration)

The test system is shown as follows:

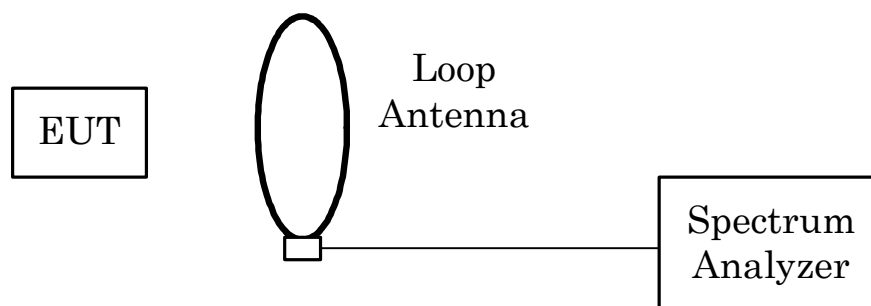

The setting of the spectrum analyzer are shown as follows:


Res. Bandwidth	1 kHz
Video Bandwidth	3 kHz
Span	50 kHz
Sweep Time	AUTO
Trace	Maxhold

7.3.4 Test Data


Test Date : October 2, 2015

Temp.:25°C, Humi:60%


Test Mode : Felica

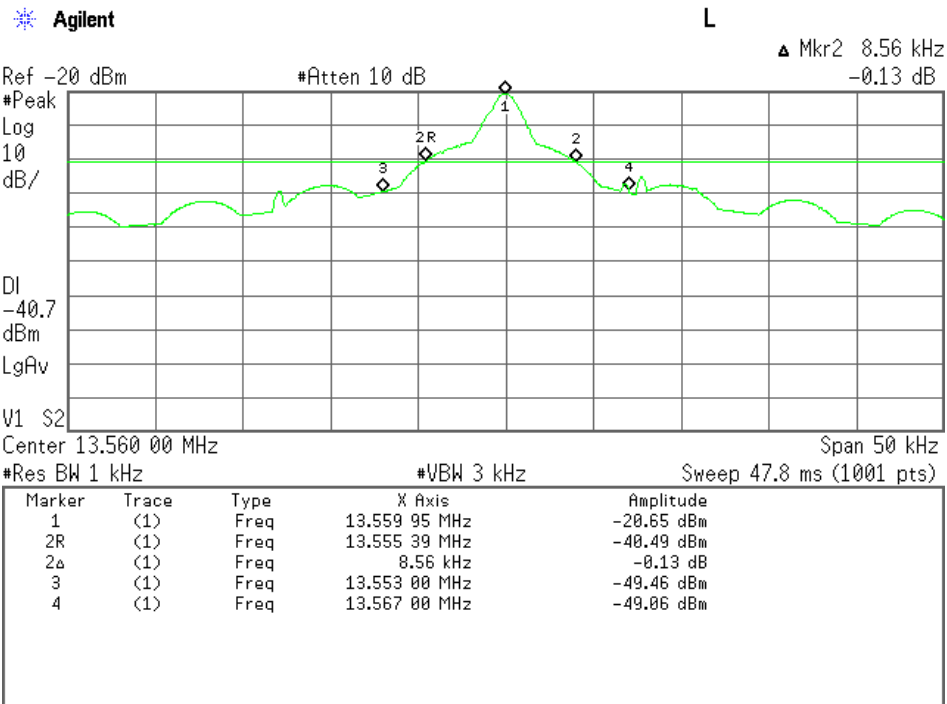


Test Mode : ISO/IEC14443 Type A

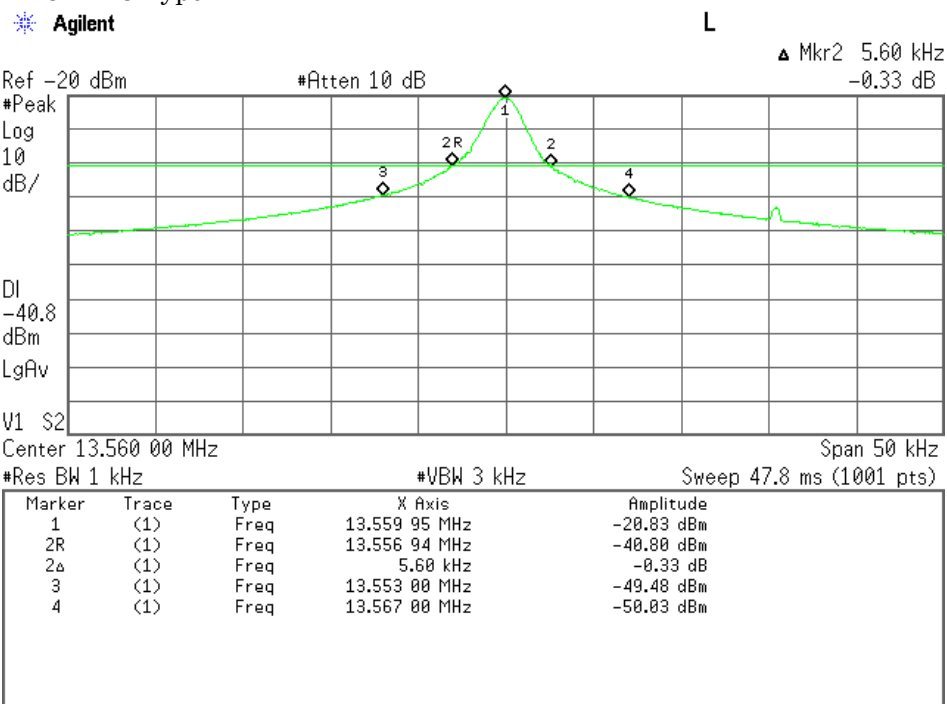

Test Mode : ISO/IEC14443 Type B

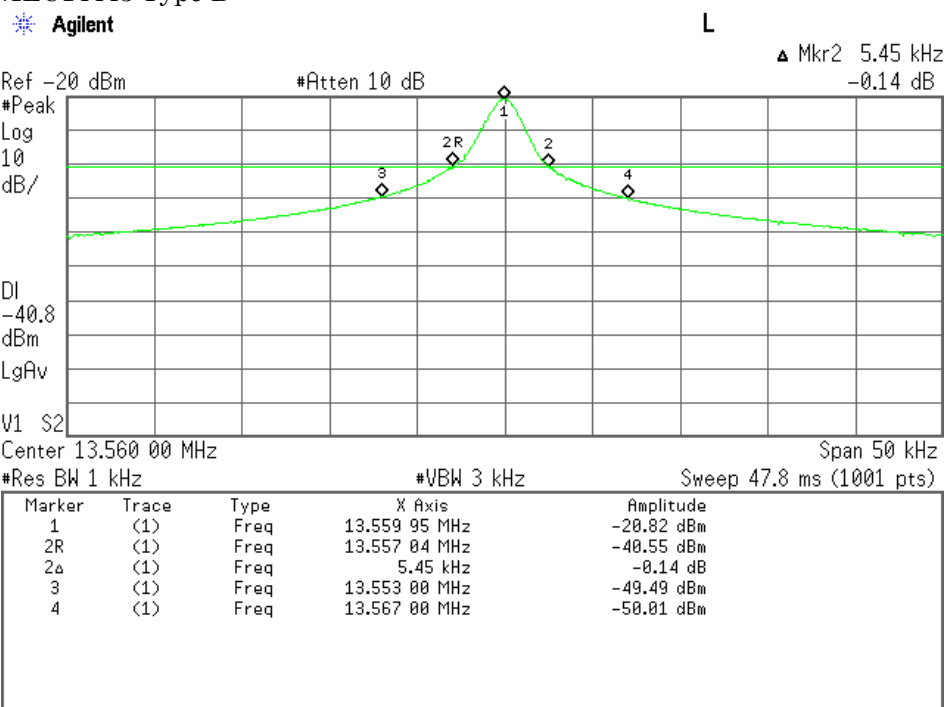

Test Mode : ISO/IEC15693 Type V

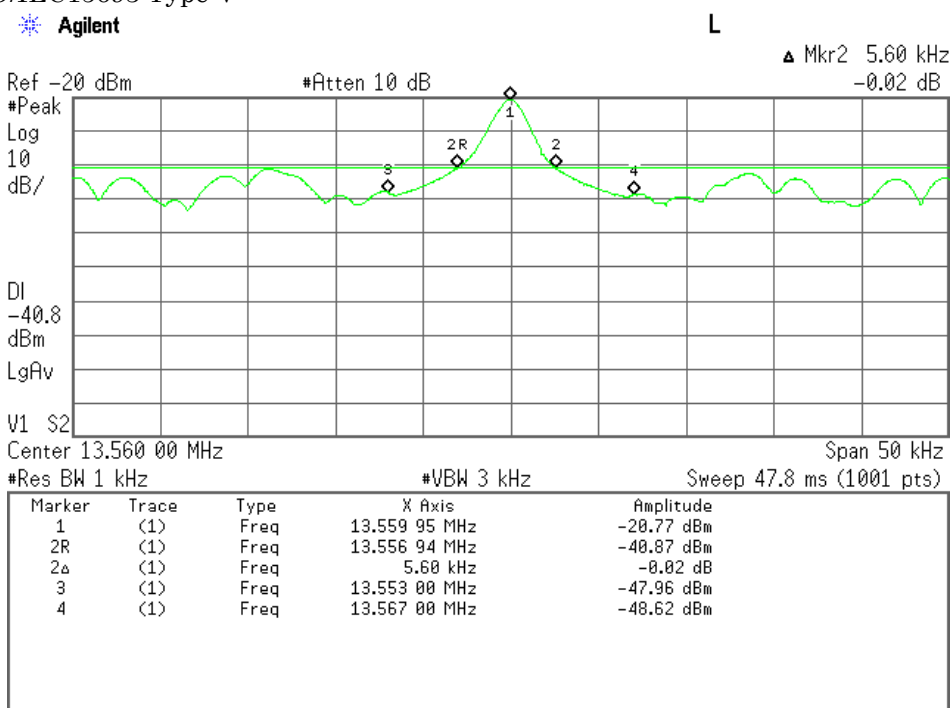

7.4 Frequency Stability

For the requirements, ☒ - Applicable [☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

7.4.1 Test Results

For the standard, ☒ - Passed ☐ - Failed ☐ - Not judged

The Frequency Stability level is -0.000538 % at 13.560 MHz

Min. Limit Margin +0.009462 % at 13.560 MHz

Uncertainty of Measurement Results ± 1.3 ppm(2σ)

Remarks : _____

7.4.2 Test Instruments


Shielded Room S4				
Type	Model	Serial No. (ID)	Manufacturer	Cal. Due
Spectrum Analyzer	E4446A	US44300388 (A-39)	Agilent	2016/08/11
Loop Antenna	LU-100A	--- (C-33)	TEXIO	N/A
Environmental Chamber	SH-641	92010990 (F-32)	ESPEC	2016/07/06

NOTE : The calibration interval of the above test instruments is 12 months.

7.4.3 Test Method and Test Setup (Diagrammatic illustration)

Frequency Stability versus Temperature

The EUT was placed in an environmental chamber and was tested in the range from -30 to $+50$ degrees Celsius. The EUT was stabilized at each temperature. The power (4.0VDC) supplied was applied to the transmitter and allowed to stabilize for 10 minutes. The transmitting frequency was measured at startup and 2 minutes, 5 minutes and 10 minutes after startup. This procedure was repeated from -20 , $+20$ and $+50$ degrees Celsius.

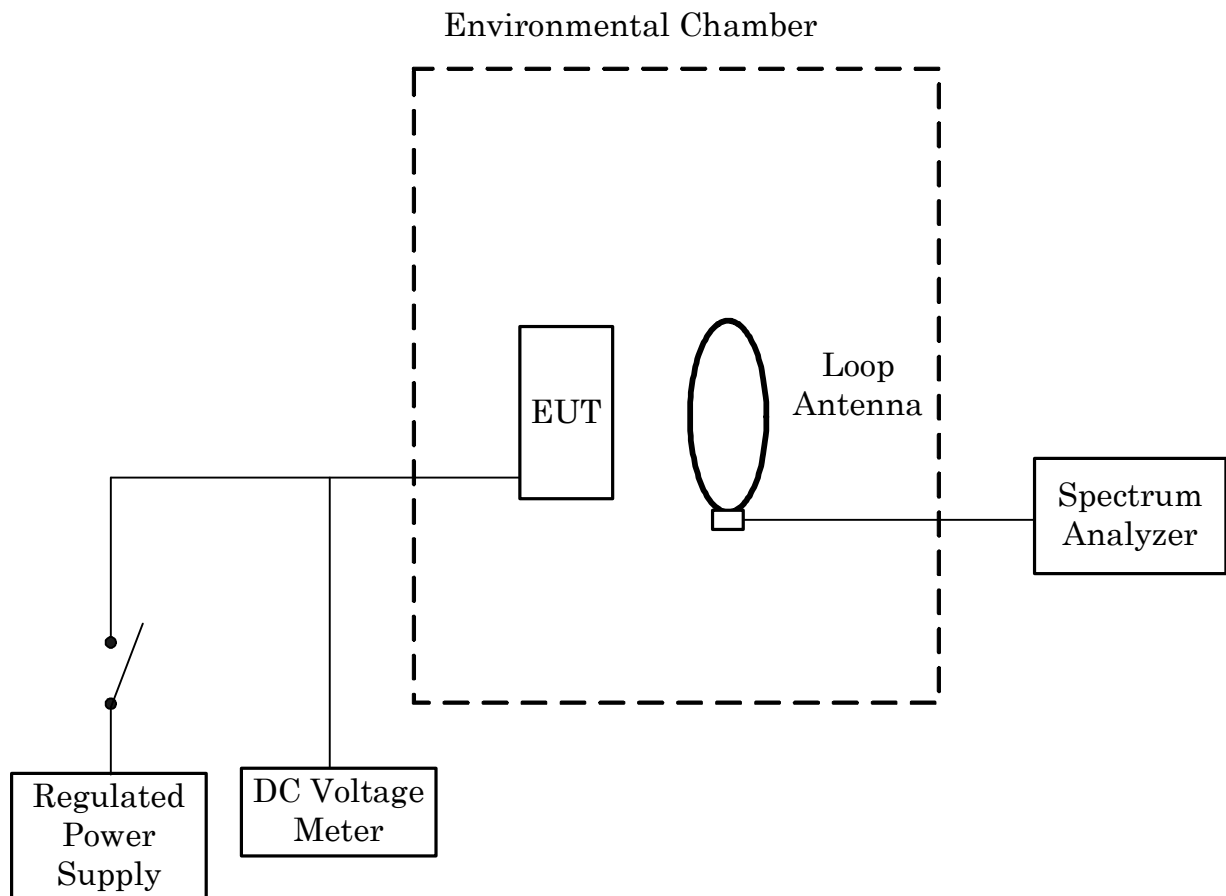

7.4.4 Test Data

Frequency Stability Measurement

Test Date: October 5, 2015

- October 7, 2015

Transmitting Frequency : 13.560 MHz
DC Supply Voltage : 4.0 VDC

Ambient Temperature [°C]	Startup	Frequency with time elapse [MHz]			Limits [%]	Margin [%]
		2 minutes	5 minutes	10 minutes		
-20	13.560059	13.560061	13.560057	13.560052		
20	13.560002	13.560002	13.560004	13.560003		
50	13.559929	13.559928	13.559927	13.559927		
Ambient Temperature [°C]	Startup	Deviation with time elapse [%]			Limits [%]	Margin [%]
		2 minutes	5 minutes	10 minutes		
-20	+ 0.000435	+ 0.000450	+ 0.000420	+ 0.000383	0.01	+ 0.009550
20	+ 0.000015	+ 0.000015	+ 0.000029	+ 0.000022	0.01	+ 0.009971
50	- 0.000524	- 0.000531	- 0.000538	- 0.000538	0.01	+ 0.009462

Sample of calculated result at 13.560 MHz, as the Minimum Margin point:

Ambient Temperature : 50 °C / 5 minutes

DC Supply Voltage 4.0V

Minimum Margin: $0.010000 - 0.000538 = 0.009462$ (%)

The point shown on “ ” is the Minimum Margin Point. The Maximum Deviation Point is shown on a thick letter.

Note: The measurement were made after all of components of the oscillator sufficiently stabilized at each temperature.