

TEST REPORT

Applicant : SHARP CORPORATION, Consumer Electronics Company,
Communication Systems Division

Address : 2-13-1, Iida Hachihonmatsu, Higashi-Hiroshima City, Hiroshima,
739-0192, Japan

Products : Smart Phone

Model No. : HR229

Serial No. : 004401115636124
004401115636090

FCC ID : APYHRO00229

Test Standard : CFR 47 FCC Rules and Regulations Part 22

Test Results : **Passed**

Date of Test : October 26 ~ November 5, 2015



A handwritten signature in black ink, likely belonging to Kousei Shibata, the Manager of the testing center.

Kousei Shibata

Manager

Japan Quality Assurance Organization

KITA-KANSAI Testing Center

SAITO EMC Branch

7-3-10, Saito-asagi, Ibaraki-shi, Osaka 567-0085, Japan

-
- The measurement values stated in Test Report was made with traceable to National Institute of Advanced Industrial Science and Technology (AIST) of Japan and National Institute of Information and Communications Technology (NICT) of Japan.
 - The applicable standard, testing condition and testing method which were used for the tests are based on the request of the applicant.
 - The test results presented in this report relate only to the offered test sample.
 - The contents of this test report cannot be used for the purposes, such as advertisement for consumers.
 - This test report shall not be reproduced except in full without the written approval of JQA.
 - VLAC does not approve, certify or warrant the product by this test report.

TABLE OF CONTENTS

	Page
1 Description of the Equipment Under Test	3
2 Summary of Test Results	4
3 Test Procedure	5
4 Test Location	5
5 Recognition of Test Laboratory	5
6 Description of Test Setup	6
7 Test Requirements	11

DEFINITIONS FOR ABBREVIATION AND SYMBOLS USED IN THIS TEST REPORT

EUT : Equipment Under Test

AE : Associated Equipment

N/A : Not Applicable

N/T : Not Tested

EMC : Electromagnetic Compatibility

EMI : Electromagnetic Interference

EMS : Electromagnetic Susceptibility

☒ - indicates that the listed condition, standard or equipment is applicable for this report.

☐ - indicates that the listed condition, standard or equipment is not applicable for this report.

1 Description of the Equipment Under Test

1. Manufacturer : SHARP CORPORATION, Consumer Electronics Company,
Communication Systems Division
2-13-1, Iida Hachihonmatsu, Higashi-Hiroshima City, Hiroshima,
739-0192, Japan
2. Products : Smart Phone
3. Model No. : HR229
4. Serial No. : 004401115636124
004401115636090
5. Product Type : Pre-production
6. Date of Manufacture : September, 2015
7. Power Rating : 4.0VDC (Lithium-ion Battery 1UAF375986Z 2810mAh)
8. Grounding : None
9. Transmitting Frequency : Band 5 (824 MHz – 849 MHz)
10. Receiving Frequency : Band 5 (869 MHz – 894 MHz)
11. Emission Designations :

BW (MHz)	QPSK	16QAM
1.4	1M08G7D	1M08D7W
3	2M69G7D	2M68D7W
5	4M48G7D	4M47D7W
10	8M95G7D	8M93D7W

12. Max. RF Output Power :

BW (MHz)	QPSK (W ERP)	16QAM (W ERP)
1.4	0.178	0.151
3	0.182	0.155
5	0.178	0.148
10	0.162	0.141

13. Category : LTE FDD (Band 5)
14. EUT Authorization : Certification
15. Received Date of EUT : October 20, 2015
16. Channel Plan

The carrier spacing is 100 kHz.

The carrier frequency is designated by the absolute frequency channel number (ARFCN).

The carrier frequency is expressed in the equation shown as follows:

$$\text{Transmitting Frequency (in MHz)} = 824.7 + 0.1 \times (n - 20407)$$

where, n : channel number ($20407 \leq n \leq 20643$)

$$\text{Receiving Frequency (in MHz)} = 869.7 + 0.1 \times (n - 2407)$$

where, n : channel number ($2407 \leq n \leq 2643$)

2 Summary of Test Results

Applied Standard : CFR 47 FCC Rules and Regulations Part 22
Subpart H – Cellular Radiotelephone Service

The EUT described in clause 1 was tested according to the applied standard shown above.

Details of the test configuration is shown in clause 6.

The conclusion for the test items of which are required by the applied standard is indicated under the test result.

- ☒ - The test result was **passed** for the test requirements of the applied standard.
- ☐ - The test result was **failed** for the test requirements of the applied standard.
- ☐ - The test result was **not judged** the test requirements of the applied standard.

In the approval of test results,

- Determining compliance with the limits in this report was based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.
- No deviations were employed from the applied standard.
- No modifications were conducted by JQA to achieve compliance to the limitations.

Reviewed by:

Tested by:



Shigeru Kinoshita
Assistant Manager
JQA KITA-KANSAI Testing Center
SAITO EMC Branch



Shigeru Osawa
Deputy Manager
JQA KITA-KANSAI Testing Center
SAITO EMC Branch

3 Test Procedure

Test Requirements : CFR 47 FCC Rules and Regulations Part 2
§2.1046, §2.1047, §2.1049, §2.1051, §2.1053, §2.1055 and §2.1057

Test Procedure : ANSI C63.4–2014, ANSI/TIA–603-D-2010
FCC KDB 971168 D01 Power Meas License Digital Systems v02r02,
released October 17, 2014

4 Test Location

Japan Quality Assurance Organization (JQA)
KITA-KANSAI Testing Center
7-7, Ishimaru, 1-chome, Minoh-shi, Osaka, 562-0027, Japan
SAITO EMC Branch
7-3-10, Saito-asagi, Ibaraki-shi, Osaka 567-0085, Japan

5 Recognition of Test Laboratory

JQA KITA-KANSAI Testing Center SAITO EMC Branch is accredited under ISO/IEC 17025 by following accreditation bodies and the test facility is registered by the following bodies.

VLAC Accreditation No. : VLAC-001-2 (Expiry date : March 30, 2016)
VCCI Registration No. : A-0002 (Expiry date : March 30, 2016)
BSMI Registration No. : SL2-IS-E-6006, SL2-IN-E-6006, SL2-R1/R2-E-6006, SL2-A1-E-6006
(Expiry date : September 14, 2016)
IC Registration No. : 2079E-3, 2079E-4 (Expiry date : July 16, 2017)

Accredited as conformity assessment body for Japan electrical appliances and material law by METI.
(Expiry date : February 22, 2016)

6 Description of Test Setup

6.1 Test Configuration

The equipment under test (EUT) consists of :

	Item	Manufacturer	Model No.	Serial No.	FCC ID
A	Smart Phone	Sharp	HR229	004401115636124 *1) 004401115636090 *2)	APYHRO00229
B	AC Adapter	Hosiden	04	HS-SKA	N/A
C	Earphone	Softbank Mobile	ZTCAA1	--	N/A

*1) Used for Field Strength of Spurious Emission

*2) Used for Antenna Conducted Emission and Frequency Stability

The auxiliary equipment used for testing :


None

Type of Cable:


No.	Description	Identification (Manu. etc.)	Connector Shielded	Cable Shielded	Ferrite Core	Length (m)
1	USB conversion cable	--	--	NO	NO	1.5
2	Earphone Cable	--	--	NO	NO	0.5

6.2 Test Arrangement (Drawings)


a) Single Unit



b) AC Adapter used

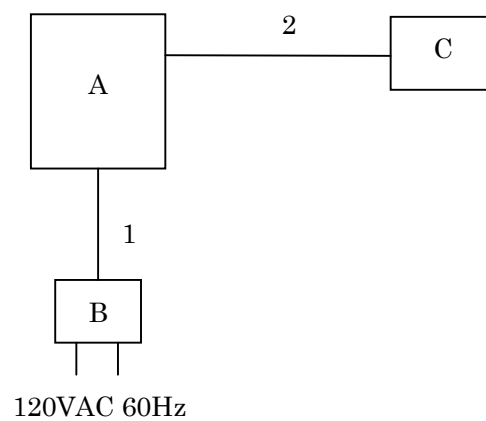

c) Earphone used

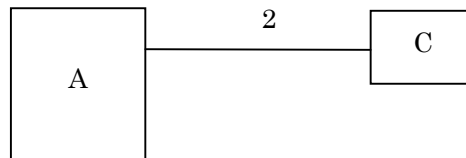

6.3 Operating Condition

Power Supply Voltage : 4.0 VDC (for Battery)
120 VAC, 60 Hz (For AC Adapter)

1. Bandwidth: 1.4 MHz/3 MHz/5 MHz/10 MHz
2. Modulation Type: QPSK/16QAM

The tests were carried under worst condition shown as follows:

Test Item	Bandwidth (MHz)	Modulation	RB Size
RF Power Output	1.4/3/5/10	QPSK/16QAM	1
ERP / EIRP RF Power Output	1.4/3/5/10	QPSK/16QAM	1
Occupied Bandwidth	1.4/3/5/10	QPSK/16QAM	Full
Spurious Emissions at Antenna Terminals	1.4/3/5/10	QPSK	1
Band-Edge Emission	1.4/3/5/10	QPSK/16QAM	1/Full
Field Strength of Spurious Radiation	1.4/3/5/10	QPSK	1

The Radiated Emission test were carried under 3 test configurations shown in clause 6.2.
In all tests, the fully charged battery is used for the EUT.

Other Clock Frequency
19.2MHz, 48MHz, 12MHz, 27.12MHz

The EUT was rotated through three orthogonal axis (X, Y and Z axis) in radiated measurement.
The EUT with temporary antenna port was used in conducted measurement.

RF Output Verification

The tests were conducted at the middle channel.

CH	Frequency (MHz)	BW (MHz)	Mode	RB Allocation	RB Offset	Target MPR	Conducted Average Power (dBm)
20525	836.5	1.4	QPSK	1	0	0	23.54
				1	3	0	23.57
				1	5	0	23.46
				3	0	0	23.40
				3	2	0	23.49
				3	3	0	23.42
				6	0	1	22.38
			16QAM	1	0	1	22.52
				1	3	1	22.76
				1	5	1	22.55
				3	0	1	22.45
				3	2	1	22.49
				3	3	1	22.45
				6	0	2	21.34

CH	Frequency (MHz)	BW (MHz)	Mode	RB Allocation	RB Offset	Target MPR	Conducted Average Power (dBm)
20525	836.5	3	QPSK	1	0	0	23.48
				1	8	0	23.53
				1	14	0	23.48
				8	0	1	22.47
				8	4	1	22.52
				8	7	1	22.43
				15	0	1	22.45
			16QAM	1	0	1	22.72
				1	8	1	22.94
				1	14	1	22.75
				8	0	2	21.45
				8	4	2	21.52
				8	7	2	21.46
				15	0	2	21.40

CH	Frequency (MHz)	BW (MHz)	Mode	RB Allocation	RB Offset	Target MPR	Conducted Average Power (dBm)
20525	836.5	5	QPSK	1	0	0	23.40
				1	13	0	23.52
				1	24	0	23.37
				12	0	1	22.34
				12	7	1	22.38
				12	13	1	22.27
				25	0	1	22.32
			16QAM	1	0	1	22.90
				1	13	1	22.87
				1	24	1	22.82
				12	0	2	21.40
				12	7	2	21.40
				12	13	2	21.33
				25	0	2	21.36

CH	Frequency (MHz)	BW (MHz)	Mode	RB Allocation	RB Offset	Target MPR	Conducted Average Power (dBm)
20525	836.5	10	QPSK	1	0	0	23.51
				1	25	0	23.53
				1	49	0	23.38
				25	0	1	22.42
				25	13	1	22.38
				25	25	1	22.31
				50	0	1	22.40
			16QAM	1	0	1	22.77
				1	25	1	22.79
				1	49	1	22.67
				25	0	2	21.41
				25	13	2	21.38
				25	25	2	21.33
				50	0	2	21.37

7 Test Requirements

7.0 Summary of the Test Results

Test Item	FCC Specification	Reference of the Test Report	Results	Remarks
RF Power Output	Section 22.913(a)(2)	Section 7.1	Passed	-
ERP / EIRP RF Power Output	Section 22.913(a)(2)	Section 7.2	Passed	-
Modulation Characteristics	-	-	-	-
Occupied Bandwidth	Section 22.917	Section 7.4	Passed	-
Spurious Emissions at Antenna Terminals	Section 22.917	Section 7.5	Passed	-
Band-Edge Emission	Section 22.917	Section 7.6	Passed	-
Field Strength of Spurious Radiation	Section 22.917	Section 7.7	Passed	-
Frequency Stability	Section 22.355	Section 7.8	Passed	-

7.1 RF Power Output (§2.1046)

For the requirements, ☒ - Applicable [☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

7.1.1 Test Results

For the standard, ☒ - Passed ☐ - Failed ☐ - Not judged

Transmitter Power of BW: 1.4 MHz(QPSK) is	<u>227.5</u>	mW	at	<u>836.500</u>	MHz
Transmitter Power of BW: 1.4 MHz(16QAM) is	<u>188.8</u>	mW	at	<u>836.500</u>	MHz
Transmitter Power of BW: 3 MHz(QPSK) is	<u>225.4</u>	mW	at	<u>836.500</u>	MHz
Transmitter Power of BW: 3 MHz(16QAM) is	<u>198.2</u>	mW	at	<u>825.500</u>	MHz
Transmitter Power of BW: 5 MHz(QPSK) is	<u>225.9</u>	mW	at	<u>826.500</u>	MHz
Transmitter Power of BW: 5 MHz(16QAM) is	<u>195.0</u>	mW	at	<u>836.500</u>	MHz
Transmitter Power of BW: 10 MHz(QPSK) is	<u>225.4</u>	mW	at	<u>836.500</u>	MHz
Transmitter Power of BW: 10 MHz(16QAM) is	<u>190.1</u>	mW	at	<u>836.500</u>	MHz

Uncertainty of Measurement Results ± 0.9 dB(2σ)

Remarks : _____


7.1.2 Test Instruments

Shielded Room S4				
Type	Model	Serial No. (ID)	Manufacturer	Cal. Due
Power Meter	ML2495A	1423001 (B-16)	Anritsu	2016/07/16
Power Sensor	MA2411B	1339136 (B-18)	Anritsu	2016/07/16
Spectrum Analyzer	E4446A	US44300388 (A-39)	Agilent	2016/08/11
Attenuator	43KC-20	1418003 (D-41)	Anritsu	2016/07/05
RF Cable	SUCOFLEX102	14253/2 (C-52)	HUBER+SUHNER	2016/08/16

NOTE : The calibration interval of the above test instruments is 12 months.

7.1.3 Test Method and Test Setup (Diagrammatic illustration)

The Conducted RF Power Output was measured with a power meter, one attenuator and a short, low loss cable.



7.1.4 Test Data

1-1) BW 1.4MHz(1RB)

Mode: QPSK

(LTE 1.4MHz)QPSK

Test Date: October 26, 2015
Temp.: 24 °C, Humi: 35 %

Transmitting Frequency CH	[MHz]	Correction Factor [dB]	Meter Reading (Average) [dBm]	Results (Average)	
				[dBm]	[mW]
20407	824.700	20.20	3.29	23.49	223.4
20525	836.500	20.20	3.37	23.57	227.5
20643	848.300	20.20	3.24	23.44	220.8

Calculated result at 836.500 MHz, as the maximum level point shown on underline:

Correction Factor	=	20.20	dB
+) Meter Reading	=	3.37	dBm
Result	=	23.57	dBm = 227.5 mW

NOTE : The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.

Mode: 16QAM

(LTE 1.4MHz)16QAM

Test Date: October 26, 2015
Temp.: 24 °C, Humi: 35 %

Transmitting Frequency CH	[MHz]	Correction Factor [dB]	Meter Reading (Average) [dBm]	Results (Average)	
				[dBm]	[mW]
20407	824.700	20.20	2.52	22.72	187.1
20525	836.500	20.20	2.56	22.76	188.8
20643	848.300	20.20	2.42	22.62	182.8

Calculated result at 836.500 MHz, as the maximum level point shown on underline:

Correction Factor	=	20.20	dB
+) Meter Reading	=	2.56	dBm
Result	=	22.76	dBm = 188.8 mW

NOTE : The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.

1-2) BW 3MHz(1RB)

Mode: QPSK

(LTE 3MHz)QPSK

Test Date: October 26, 2015

Temp.: 24 °C, Humi: 35 %

Transmitting Frequency CH	[MHz]	Correction Factor [dB]	Meter Reading (Average) [dBm]	Results (Average) [dBm]	[mW]
20415	825.500	20.20	3.32	23.52	224.9
20525	836.500	20.20	3.33	23.53	225.4
20635	847.500	20.20	3.18	23.38	217.8

Calculated result at 836.500 MHz, as the maximum level point shown on underline:

Correction Factor	=	20.20	dB
+) Meter Reading	=	3.33	dBm
Result	=	23.53	dBm = 225.4 mW

NOTE : The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.

Mode: 16QAM

(LTE 3MHz)16QAM

Test Date: October 26, 2015

Temp.: 24 °C, Humi: 35 %

Transmitting Frequency CH	[MHz]	Correction Factor [dB]	Meter Reading (Average) [dBm]	Results (Average) [dBm]	[mW]
20415	825.500	20.20	2.77	22.97	198.2
20525	836.500	20.20	2.74	22.94	196.8
20635	847.500	20.20	2.64	22.84	192.3

Calculated result at 825.500 MHz, as the maximum level point shown on underline:

Correction Factor	=	20.20	dB
+) Meter Reading	=	2.77	dBm
Result	=	22.97	dBm = 198.2 mW

NOTE : The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.

1-3) BW 5MHz(1RB)

Mode: QPSK

(LTE 5MHz)QPSK

Test Date: October 26, 2015
Temp.: 24 °C, Humi: 35 %

Transmitting Frequency CH	[MHz]	Correction Factor [dB]	Meter Reading (Average) [dBm]	Results (Average) [dBm]	[mW]
20425	826.500	20.20	3.34	23.54	225.9
20525	836.500	20.20	3.32	23.52	224.9
20625	846.500	20.20	3.22	23.42	219.8

Calculated result at 826.500 MHz, as the maximum level point shown on underline:

Correction Factor	=	20.20	dB
+) Meter Reading	=	3.34	dBm
Result	=	23.54	dBm = 225.9 mW

NOTE : The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.

Mode: 16QAM

(LTE 5MHz)16QAM

Test Date: October 26, 2015
Temp.: 24 °C, Humi: 35 %

Transmitting Frequency CH	[MHz]	Correction Factor [dB]	Meter Reading (Average) [dBm]	Results (Average) [dBm]	[mW]
20425	826.500	20.20	2.55	22.75	188.4
20525	836.500	20.20	2.70	22.90	195.0
20625	846.500	20.20	2.50	22.70	186.2

Calculated result at 836.500 MHz, as the maximum level point shown on underline:

Correction Factor	=	20.20	dB
+) Meter Reading	=	2.70	dBm
Result	=	22.90	dBm = 195.0 mW

NOTE : The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.

1-4) BW 10MHz(1RB)

Mode: QPSK

(LTE 10MHz)QPSK

Test Date: October 26, 2015
Temp.: 24 °C, Humi: 35 %

Transmitting Frequency CH	[MHz]	Correction Factor [dB]	Meter Reading (Average) [dBm]	Results (Average) [dBm]	[mW]
20450	829.000	20.20	3.31	23.51	224.4
20525	836.500	20.20	3.33	23.53	225.4
20600	844.000	20.20	3.30	23.50	223.9

Calculated result at 836.500 MHz, as the maximum level point shown on underline:

Correction Factor	=	20.20	dB
+) Meter Reading	=	3.33	dBm
Result	=	23.53	dBm = 225.4 mW

NOTE : The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.

Mode: 16QAM

(LTE 10MHz)16QAM

Test Date: October 26, 2015
Temp.: 24 °C, Humi: 35 %

Transmitting Frequency CH	[MHz]	Correction Factor [dB]	Meter Reading (Average) [dBm]	Results (Average) [dBm]	[mW]
20450	829.000	20.20	2.57	22.77	189.2
20525	836.500	20.20	2.59	22.79	190.1
20600	844.000	20.20	2.45	22.65	184.1

Calculated result at 836.500 MHz, as the maximum level point shown on underline:


Correction Factor	=	20.20	dB
+) Meter Reading	=	2.59	dBm
Result	=	22.79	dBm = 190.1 mW

NOTE : The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.


2) CCDF

Channel	Frequency (MHz)	BW (MHz)	Peak to Average Factor(CCDF 0.1%) [dB]		
			QPSK	16QAM	Limit
20525	836.50	1.4	5.79	6.51	--
20525	836.50	3	5.77	6.35	--
20525	836.50	5	5.75	6.40	--
20525	836.50	10	5.28	6.30	--


BW 1.4MHz QPSK

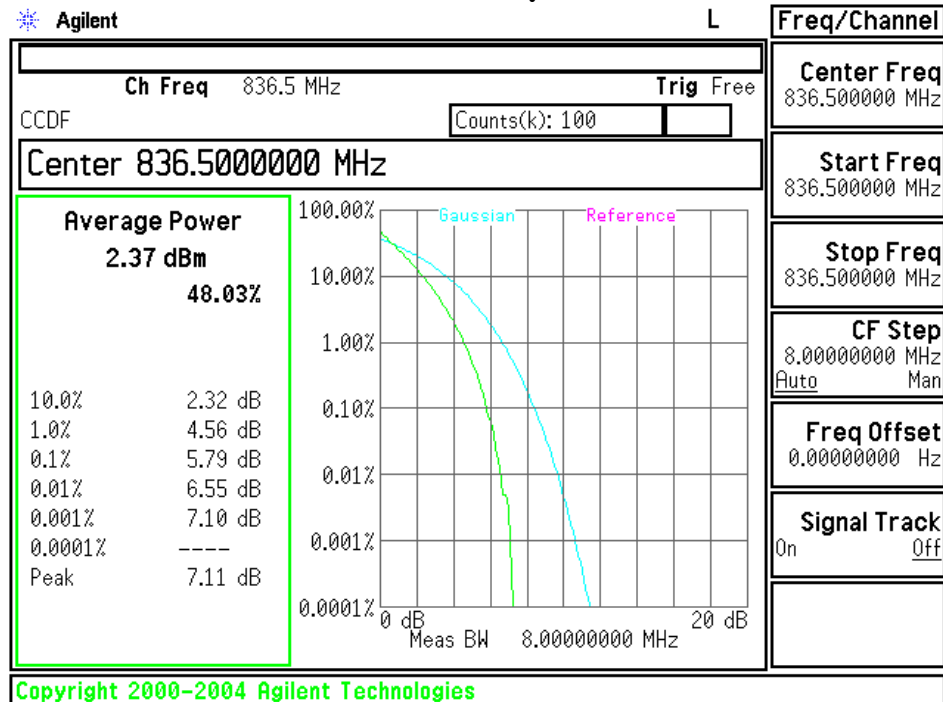


BW 1.4MHz 16QAM

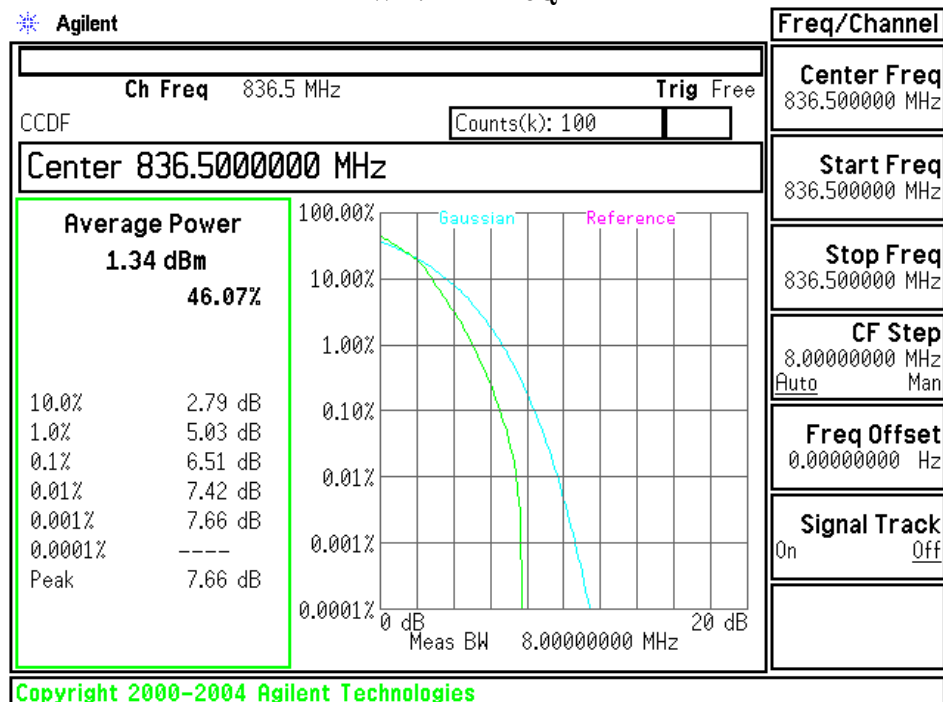


BW 3MHz QPSK

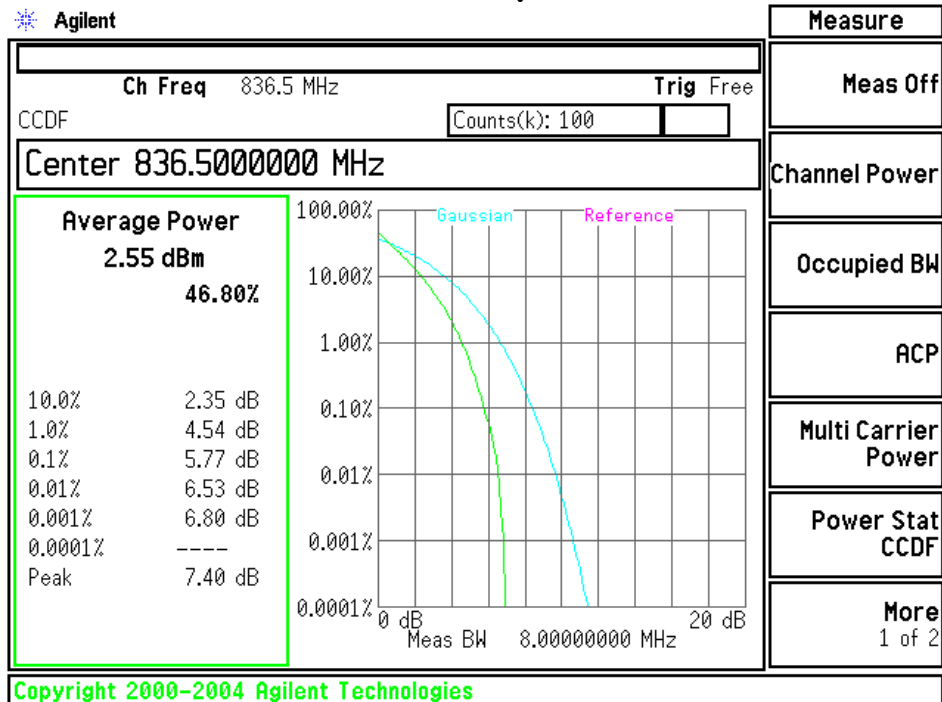


BW 3MHz 16QAM

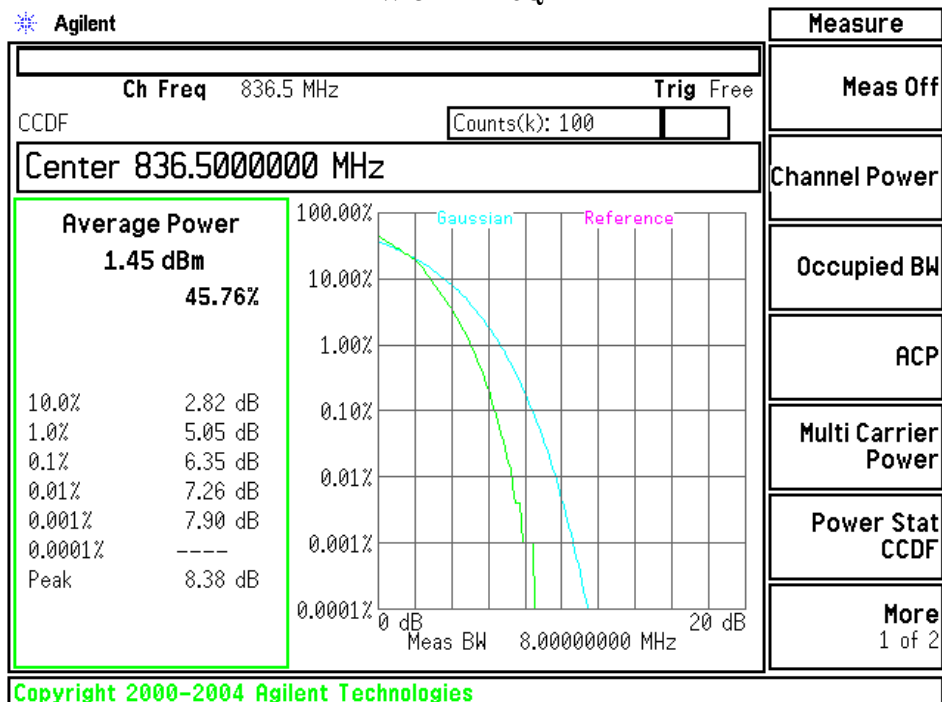


BW 5MHz QPSK

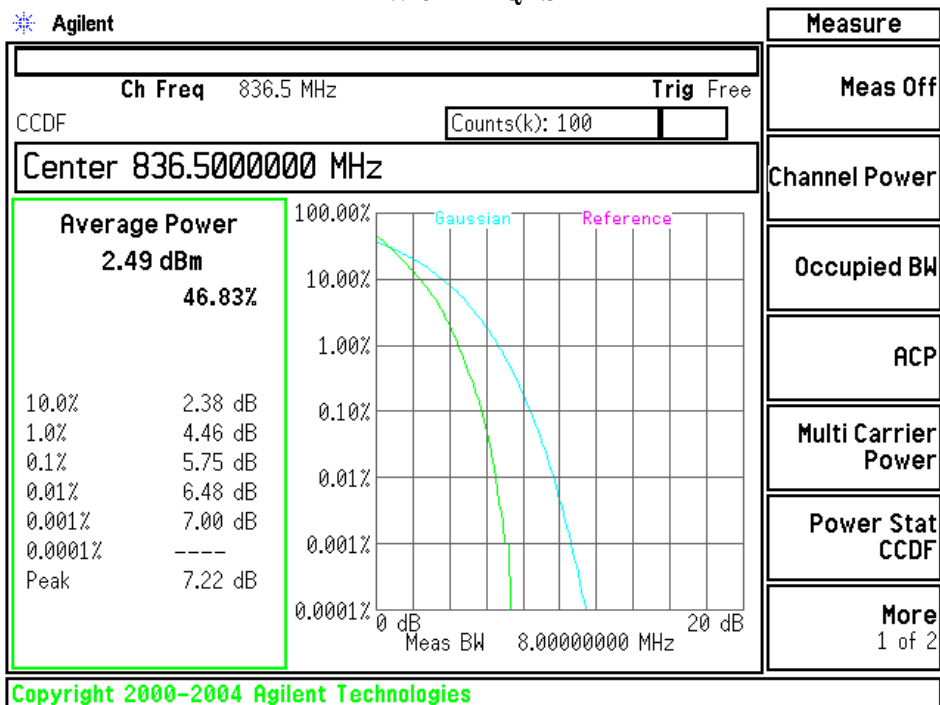


BW 5MHz 16QAM

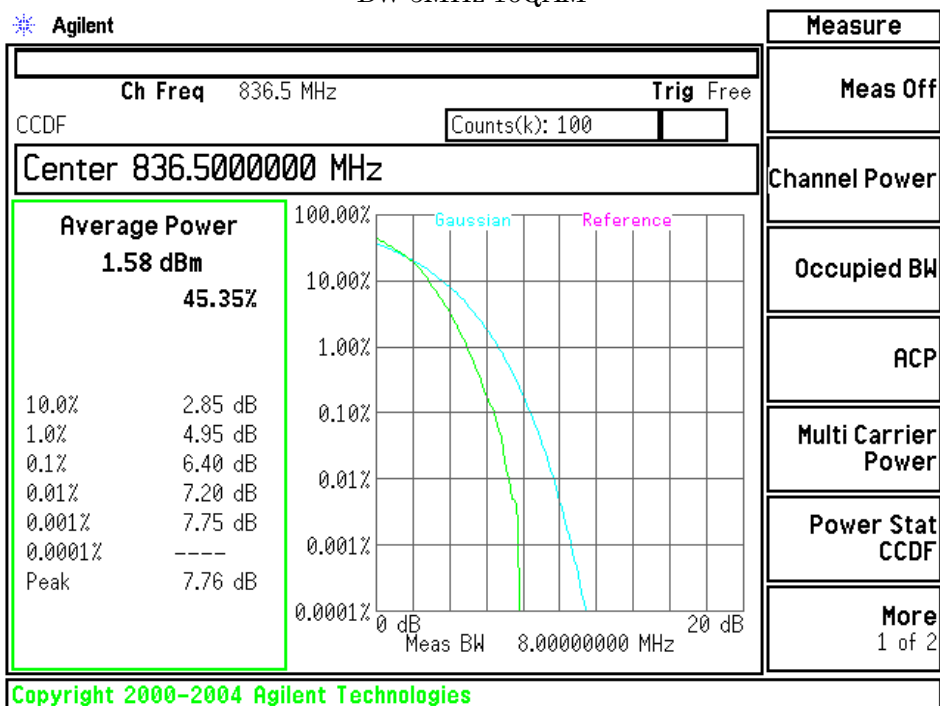

BW 10MHz QPSK

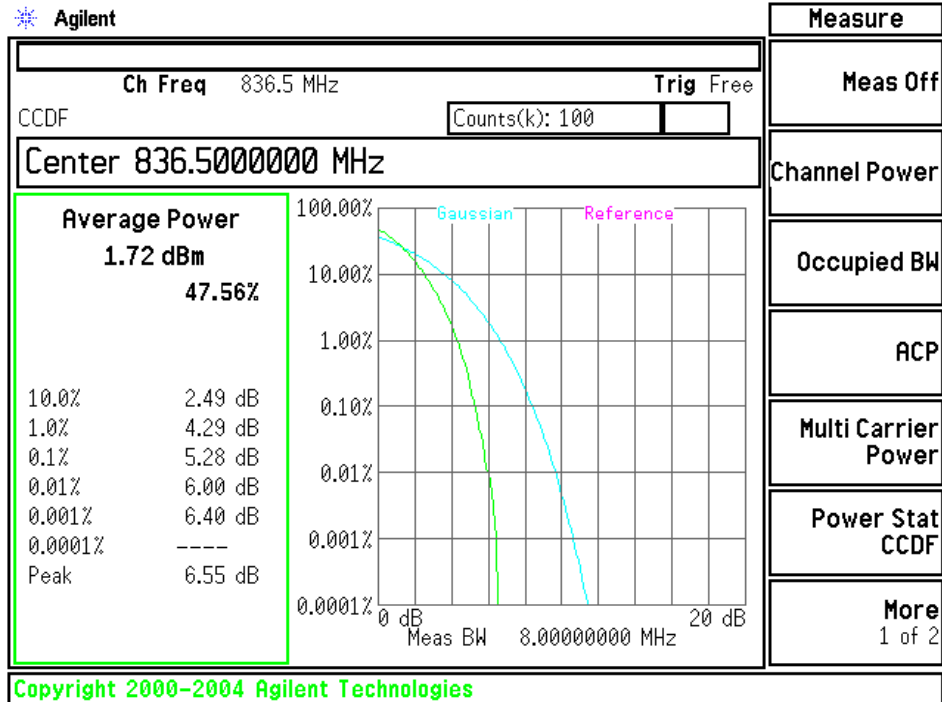

BW 10MHz 16QAM

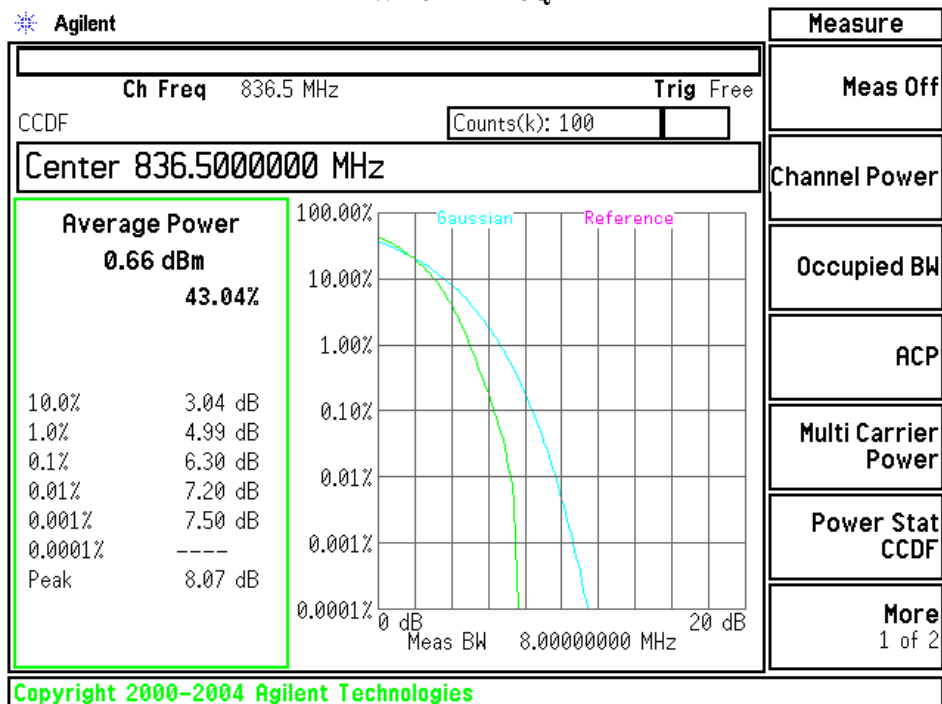

7.2 ERP / EIRP RF Power Output

For the requirements, ☒ - Applicable [☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

7.2.1 Test Results

For the standard, ☒ - Passed ☐ - Failed ☐ - Not judged

Min. Limit Margin 15.9 dB at 847.500 MHz

Uncertainty of Measurement Results ± 1.6 dB(2σ)

Remarks : The maximum ERP is 0.182 W at 847.500 MHz (BW 3MHz, QPSK). Z-axis position.

7.2.2 Test Instruments

Anechoic Chamber A2				
Type	Model	Serial No. (ID)	Manufacturer	Cal. Due
Test Receiver	ESU 26	100170 (A-6)	Rohde & Schwarz	2016/04/25
Signal Generator	E8257D	MY45140309 (B-39)	Agilent	2016/08/10
Power Meter	N1911A	GB45100291 (B-63)	Agilent	2016/07/16
Power Sensor	N1921A	US44510470 (B-64)	Agilent	2016/07/16
Log-periodic Antenna	UHALP9108-A1	0694 (C-31)	Schwarzbeck	2016/05/24
Attenuator (TX)	2-10	BA6214 (D-79)	Weinschel	2015/11/18
Dipole Antenna (TX)	KBA-611	0-248-2 (C-20)	Kyoritsu	2016/05/20

NOTE : The calibration interval of the above test instruments is 12 months.

7.2.3 Test Method and Test Setup (Diagrammatic illustration)

Step 1:

In order to obtain the maximum emission, the EUT was placed at the height 1.5 m on the non-conducted support and was varying at three orthogonal axes, at the distance 3 m from the receiving antenna and rotated around 360 degrees.

The receiving antenna height was varied from 1 m to 4 m.

The EUT on the table was placed to be maximum emission against at the receiving antenna polarized (vertical and horizontal).

Then the meter reading of the spectrum analyzer at the maximum emission was A dB(μ V).

Step 2:

The EUT was replaced to substitution antenna at the same polarized under the same condition as step 1.

The RF power was fed to the transmitting antenna through the RF amplifier from the signal generator.

In order to obtain the maximum emission level, the height of the receiving antenna was varied from 1 m to 4 m.

The level of maximum emission was A dB(μ V), same as the recorded level in the step 1.

Then the RF power into the substitution horn antenna was P (dBm).


The ERP/EIRP output power was calculated in the following equation.

$$\text{ERP (dBm)} = \text{P (dBm)} - \text{Balun loss of the tuned dipole antenna (dB)} + \text{Cable loss (dB)}$$


$$\text{EIRP (dBm)} = \text{P (dBm)} + \text{Gh (dBi)}$$

where, Gh (dBi) : Gain of the substitution horn antenna.

– Side View –

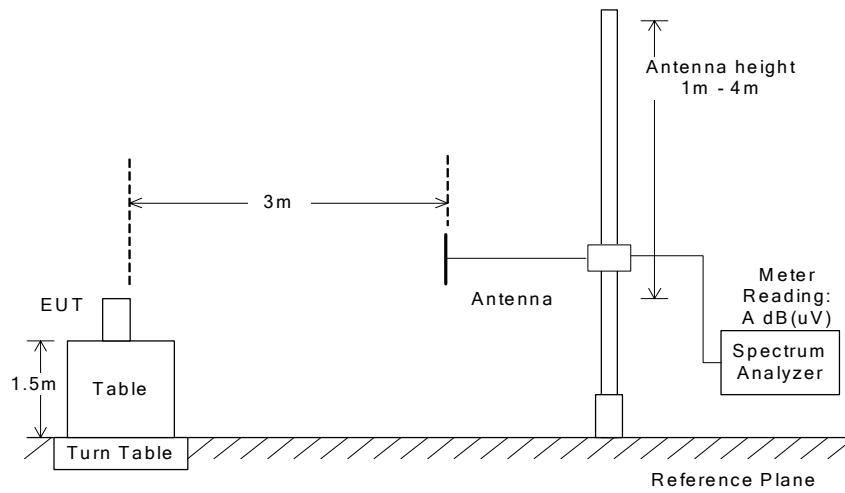

(a)EUT

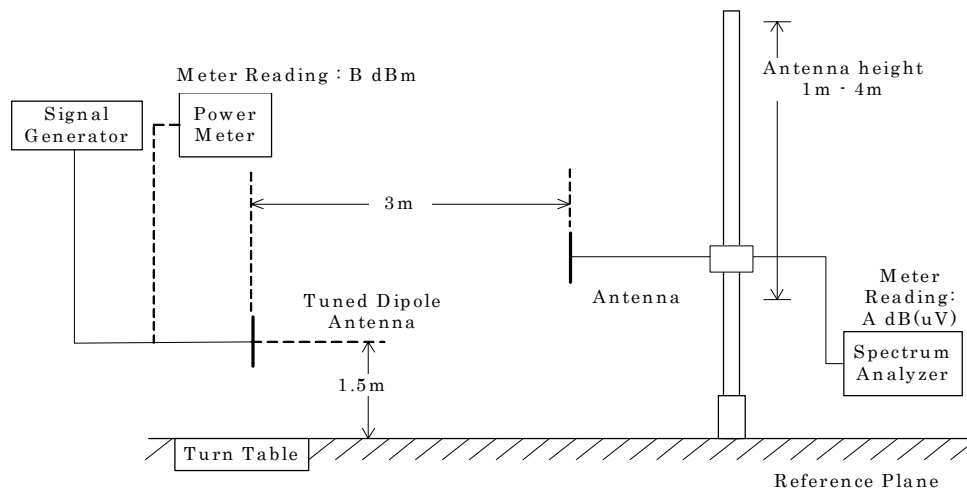

(b) Substitution Half-wave Dipole Antenna

7.2.4 Test Data

1-1) BW 1.4MHz(1RB)

Mode: QPSK

(LTE 1.4MHz)QPSK

Test Date: October 30, 2015

Temp: 22 °C, Humi: 43 %

1. Measurement Results

CH	Transmitting Frequency [MHz]	Emission Measurement [dB(uV)]		Substitution Measurement [dB(uV)]		Supplied Power to Substitution Antenna [dBm]	Balun Loss of Substitution Antenna [dB]
		Hori. (Mh)	Vert. (Mv)	Hori. (Msh)	Vert. (Msv)		
20407	824.700	94.9	94.1	67.3	66.0	- 5.0	1.3
20525	836.500	94.9	94.6	66.7	65.7	- 5.0	1.4
20643	848.300	94.5	93.8	66.8	64.8	- 5.0	1.5

2. Calculation Results

CH	Transmitting Frequency [MHz]	Average ERP [dBm]		Maximum Average ERP [W]	Limits [dBm]	Margin [dB]
		Hori. (ERPh)	Vert. (ERPv)			
20407	824.700	21.3	21.8	0.151	38.5	+16.7
20525	836.500	21.8	22.5	0.178	38.5	+16.0
20643	848.300	21.2	22.5	0.178	38.5	+16.0

Calculated result at 836.500 MHz, as the worst point shown on underline:

Emission Measurement (Mv)	=	94.6 dB(uV)
Substitution Measurement (Msv)	=	-65.7 dB(uV)
Supplied Power to Substitution Antenna	=	-5.0 dBm
+) Balun Loss of Substitution Antenna	=	-1.4 dB
Result (ERPv)	=	22.5 dBm = 0.178 W

Minimum Margin: 38.5 - 22.5 = 16.0 (dB)

NOTE : Setting of measuring instrument(s) :

Detector Function
RMS

1-2) BW 1.4MHz(1RB)

Mode: 16QAM

(LTE 1.4MHz)16QAM

Test Date: October 30, 2015
Temp.: 22 °C, Humi: 43 %

1. Measurement Results

CH	Transmitting Frequency [MHz]	Emission Measurement [dB(uV)]		Substitution Measurement [dB(uV)]		Supplied Power to Substitution Antenna [dBm]	Balun Loss of Substitution Antenna [dB]
		Hori. (Mh)	Vert. (Mv)	Hori. (Msh)	Vert. (Msv)		
20407	824.700	94.1	93.4	67.3	66.0	- 5.0	1.3
20525	836.500	94.0	93.8	66.7	65.7	- 5.0	1.4
20643	848.300	93.8	93.1	66.8	64.8	- 5.0	1.5

2. Calculation Results

CH	Transmitting Frequency [MHz]	Average ERP [dBm]		Maximum Average ERP [W]	Limits [dBm]	Margin [dB]
		Hori. (ERPh)	Vert. (ERPv)			
20407	824.700	20.5	21.1	0.129	38.5	+17.4
20525	836.500	20.9	21.7	0.148	38.5	+16.8
20643	848.300	20.5	21.8	0.151	38.5	+16.7

Calculated result at 848.300 MHz, as the worst point shown on underline:

Emission Measurement (Mv)	=	93.1 dB(uV)
Substitution Measurement (Msv)	=	-64.8 dB(uV)
Supplied Power to Substitution Antenna	=	-5.0 dBm
+) Balun Loss of Substitution Antenna	=	-1.5 dB
Result (ERPv)	=	21.8 dBm = 0.151 W

Minimum Margin: 38.5 - 21.8 = 16.7 (dB)

NOTE : Setting of measuring instrument(s) :

Detector Function
RMS

2-1) BW 3MHz(1RB)

Mode: QPSK

(LTE 3MHz)QPSK

Test Date: October 30, 2015
Temp.: 22 °C, Humi: 43 %

1. Measurement Results

CH	Transmitting Frequency [MHz]	Emission Measurement [dB(uV)]		Substitution Measurement [dB(uV)]		Supplied Power to Substitution Antenna [dBm]	Balun Loss of Substitution Antenna [dB]
		Hori. (Mh)	Vert. (Mv)	Hori. (Msh)	Vert. (Msv)		
20415	825.500	95.1	93.9	67.4	66.0	- 5.0	1.3
20525	836.500	94.6	94.1	66.7	65.7	- 5.0	1.4
20635	847.500	94.4	93.9	66.8	64.8	- 5.0	1.5

2. Calculation Results

CH	Transmitting Frequency [MHz]	Average ERP [dBm]		Maximum Average ERP [W]	Limits [dBm]	Margin [dB]
		Hori. (ERPh)	Vert. (ERPv)			
20415	825.500	21.4	21.6	0.145	38.5	+16.9
20525	836.500	21.5	22.0	0.158	38.5	+16.5
20635	847.500	21.1	22.6	0.182	38.5	+15.9

Calculated result at 847.500 MHz, as the worst point shown on underline:

Emission Measurement (Mv)	=	93.9 dB(uV)
Substitution Measurement (Msv)	=	-64.8 dB(uV)
Supplied Power to Substitution Antenna	=	-5.0 dBm
+) Balun Loss of Substitution Antenna	=	-1.5 dB
Result (ERPv)	=	22.6 dBm = 0.182 W

Minimum Margin: 38.5 - 22.6 = 15.9 (dB)

NOTE : Setting of measuring instrument(s) :

Detector Function
RMS

2-2) BW 3MHz(1RB)

Mode: 16QAM

(LTE 3MHz)16QAM

Test Date: October 30, 2015
Temp.: 22 °C, Humi: 43 %

1. Measurement Results

CH	Transmitting Frequency [MHz]	Emission Measurement [dB(uV)]		Substitution Measurement [dB(uV)]		Supplied Power to Substitution Antenna [dBm]	Balun Loss of Substitution Antenna [dB]
		Hori. (Mh)	Vert. (Mv)	Hori. (Msh)	Vert. (Msv)		
20415	825.500	94.4	93.2	67.4	66.0	- 5.0	1.3
20525	836.500	93.8	93.3	66.7	65.7	- 5.0	1.4
20635	847.500	93.7	93.2	66.8	64.8	- 5.0	1.5

2. Calculation Results

CH	Transmitting Frequency [MHz]	Average ERP [dBm]		Maximum Average ERP [W]	Limits [dBm]	Margin [dB]
		Hori. (ERPh)	Vert. (ERPv)			
20415	825.500	20.7	20.9	0.123	38.5	+17.6
20525	836.500	20.7	21.2	0.132	38.5	+17.3
20635	847.500	20.4	21.9	0.155	38.5	+16.6

Calculated result at 847.500 MHz, as the worst point shown on underline:

Emission Measurement (Mv)	=	93.2 dB(uV)
Substitution Measurement (Msv)	=	-64.8 dB(uV)
Supplied Power to Substitution Antenna	=	-5.0 dBm
+) Balun Loss of Substitution Antenna	=	-1.5 dB
Result (ERPv)	=	21.9 dBm = 0.155 W

Minimum Margin: 38.5 - 21.9 = 16.6 (dB)

NOTE : Setting of measuring instrument(s) :

Detector Function
RMS

3-1) BW 5MHz(1RB)

Mode: QPSK

(LTE 5MHz)QPSK

Test Date: October 30, 2015
Temp.: 22 °C, Humi: 43 %

1. Measurement Results

CH	Transmitting Frequency [MHz]	Emission Measurement [dB(uV)]		Substitution Measurement [dB(uV)]		Supplied Power to Substitution Antenna [dBm]	Balun Loss of Substitution Antenna [dB]
		Hori. (Mh)	Vert. (Mv)	Hori. (Msh)	Vert. (Msv)		
20425	826.500	95.1	93.8	67.3	65.9	- 5.0	1.3
20525	836.500	94.7	94.1	66.7	65.7	- 5.0	1.4
20625	846.500	94.5	93.9	66.9	64.9	- 5.0	1.5

2. Calculation Results

CH	Transmitting Frequency [MHz]	Average ERP [dBm]		Maximum Average ERP [W]	Limits [dBm]	Margin [dB]
		Hori. (ERPh)	Vert. (ERPv)			
20425	826.500	21.5	21.6	0.145	38.5	+16.9
20525	836.500	21.6	22.0	0.158	38.5	+16.5
20625	846.500	21.1	22.5	0.178	38.5	+16.0

Calculated result at 846.500 MHz, as the worst point shown on underline:

Emission Measurement (Mv)	=	93.9 dB(uV)
Substitution Measurement (Msv)	=	-64.9 dB(uV)
Supplied Power to Substitution Antenna	=	-5.0 dBm
+) Balun Loss of Substitution Antenna	=	-1.5 dB
Result (ERPv)	=	22.5 dBm = 0.178 W

Minimum Margin: 38.5 - 22.5 = 16.0 (dB)

NOTE : Setting of measuring instrument(s) :

Detector Function
RMS

3-2) BW 5MHz(1RB)

Mode: 16QAM

(LTE 5MHz)16QAM

Test Date: October 30, 2015
Temp.: 22 °C, Humi: 43 %

1. Measurement Results

CH	Transmitting Frequency [MHz]	Emission Measurement [dB(uV)]		Substitution Measurement [dB(uV)]		Supplied Power to Substitution Antenna [dBm]	Balun Loss of Substitution Antenna [dB]
		Hori. (Mh)	Vert. (Mv)	Hori. (Msh)	Vert. (Msv)		
20425	826.500	94.4	93.1	67.3	65.9	- 5.0	1.3
20525	836.500	93.8	93.2	66.7	65.7	- 5.0	1.4
20625	846.500	93.7	93.1	66.9	64.9	- 5.0	1.5

2. Calculation Results

CH	Transmitting Frequency [MHz]	Average ERP [dBm]		Maximum Average ERP [W]	Limits [dBm]	Margin [dB]
		Hori. (ERPh)	Vert. (ERPv)			
20425	826.500	20.8	20.9	0.123	38.5	+17.6
20525	836.500	20.7	21.1	0.129	38.5	+17.4
20625	846.500	20.3	21.7	0.148	38.5	+16.8

Calculated result at 846.500 MHz, as the worst point shown on underline:

Emission Measurement (Mv)	=	93.1 dB(uV)
Substitution Measurement (Msv)	=	-64.9 dB(uV)
Supplied Power to Substitution Antenna	=	-5.0 dBm
+) Balun Loss of Substitution Antenna	=	-1.5 dB
Result (ERPv)	=	21.7 dBm = 0.148 W

Minimum Margin: 38.5 - 21.7 = 16.8 (dB)

NOTE : Setting of measuring instrument(s) :

Detector Function
RMS

4-1) BW 10MHz(1RB)

Mode: QPSK

(LTE 10MHz)QPSK

Test Date: October 30, 2015
Temp.: 22 °C, Humi: 43 %

1. Measurement Results

CH	Transmitting Frequency [MHz]	Emission Measurement [dB(uV)]		Substitution Measurement [dB(uV)]		Supplied Power to Substitution Antenna [dBm]	Balun Loss of Substitution Antenna [dB]
		Hori. (Mh)	Vert. (Mv)	Hori. (Msh)	Vert. (Msv)		
20450	829.000	94.9	93.6	67.2	65.9	- 5.0	1.4
20525	836.500	94.7	93.9	66.7	65.7	- 5.0	1.4
20600	844.000	94.5	93.5	66.7	65.0	- 5.0	1.4

2. Calculation Results

CH	Transmitting Frequency [MHz]	Average ERP [dBm]		Maximum Average ERP [W]	Limits [dBm]	Margin [dB]
		Hori. (ERPh)	Vert. (ERPv)			
20450	829.000	21.3	21.3	0.135	38.5	+17.2
20525	836.500	21.6	21.8	0.151	38.5	+16.7
20600	844.000	21.4	22.1	0.162	38.5	+16.4

Calculated result at 844.000 MHz, as the worst point shown on underline:

Emission Measurement (Mv)	=	93.5 dB(uV)
Substitution Measurement (Msv)	=	-65.0 dB(uV)
Supplied Power to Substitution Antenna	=	-5.0 dBm
+) Balun Loss of Substitution Antenna	=	-1.4 dB
Result (ERPv)	=	22.1 dBm = 0.162 W

Minimum Margin: 38.5 - 22.1 = 16.4 (dB)

NOTE : Setting of measuring instrument(s) :

Detector Function
RMS

4-2) BW 10MHz(1RB)

Mode: 16QAM

(LTE 10MHz) 16QAM

Test Date: October 30, 2015
Temp.: 22 °C, Humi: 43 %

1. Measurement Results

CH	Transmitting Frequency [MHz]	Emission Measurement [dB(uV)]		Substitution Measurement [dB(uV)]		Supplied Power to Substitution Antenna [dBm]	Balun Loss of Substitution Antenna [dB]
		Hori. (Mh)	Vert. (Mv)	Hori. (Msh)	Vert. (Msv)		
20450	829.000	94.0	93.0	67.2	65.9	- 5.0	1.4
20525	836.500	93.7	92.9	66.7	65.7	- 5.0	1.4
20600	844.000	93.7	92.9	66.7	65.0	- 5.0	1.4

2. Calculation Results

CH	Transmitting Frequency [MHz]	Average ERP [dBm]		Maximum Average ERP [W]	Limits [dBm]	Margin [dB]
		Hori. (ERPh)	Vert. (ERPv)			
20450	829.000	20.4	20.7	0.117	38.5	+17.8
20525	836.500	20.6	20.8	0.120	38.5	+17.7
20600	844.000	20.6	21.5	0.141	38.5	+17.0

Calculated result at 844.000 MHz, as the worst point shown on underline:

Emission Measurement (Mv)	=	92.9 dB(uV)
Substitution Measurement (Msv)	=	-65.0 dB(uV)
Supplied Power to Substitution Antenna	=	-5.0 dBm
+) Balun Loss of Substitution Antenna	=	-1.4 dB
Result (ERPv)	=	21.5 dBm = 0.141 W

Minimum Margin: 38.5 - 21.5 = 17.0 (dB)

NOTE : Setting of measuring instrument(s) :

Detector Function
RMS

7.3 Modulation Characteristics (§2.1047)

For the requirements, ☐ - Applicable [☐ - Tested. ☐ - Not tested by applicant request.]
☒ - Not Applicable

7.4 Occupied Bandwidth (§2.1049)

For the requirements, ☒ - Applicable [☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

7.4.1 Test Results

For the standard, ☒ - Passed ☐ - Failed ☐ - Not judged

The 99% Bandwidth of BW: 1.4 MHz(QPSK) is	<u>1.08</u>	MHz	at	<u>824.7/836.5/848.3</u> MHz
The 99% Bandwidth of BW: 1.4 MHz(16QAM) is	<u>1.08</u>	MHz	at	<u>824.7/836.5/848.3</u> MHz
The 99% Bandwidth of BW: 3 MHz(QPSK) is	<u>2.69</u>	MHz	at	<u>825.5/836.5/847.5</u> MHz
The 99% Bandwidth of BW: 3 MHz(16QAM) is	<u>2.68</u>	MHz	at	<u>825.5/836.5/847.5</u> MHz
The 99% Bandwidth of BW: 5 MHz(QPSK) is	<u>4.48</u>	MHz	at	<u>836.5/846.5</u> MHz
The 99% Bandwidth of BW: 5 MHz(16QAM) is	<u>4.47</u>	MHz	at	<u>826.5/836.5</u> MHz
The 99% Bandwidth of BW: 10 MHz(QPSK) is	<u>8.95</u>	MHz	at	<u>829.0</u> MHz
The 99% Bandwidth of BW: 10 MHz(16QAM) is	<u>8.93</u>	MHz	at	<u>836.5</u> MHz
The 26dB Bandwidth of BW: 1.4 MHz(QPSK) is	<u>1.22</u>	MHz	at	<u>848.3</u> MHz
The 26dB Bandwidth of BW: 1.4 MHz(16QAM) is	<u>1.22</u>	MHz	at	<u>824.7/836.5/848.3</u> MHz
The 26dB Bandwidth of BW: 3 MHz(QPSK) is	<u>2.96</u>	MHz	at	<u>825.5/836.5/847.5</u> MHz
The 26dB Bandwidth of BW: 3 MHz(16QAM) is	<u>2.94</u>	MHz	at	<u>836.5</u> MHz
The 26dB Bandwidth of BW: 5 MHz(QPSK) is	<u>4.87</u>	MHz	at	<u>826.5</u> MHz
The 26dB Bandwidth of BW: 5 MHz(16QAM) is	<u>4.85</u>	MHz	at	<u>826.5/846.5</u> MHz
The 26dB Bandwidth of BW: 10 MHz(QPSK) is	<u>9.68</u>	MHz	at	<u>829.0</u> MHz
The 26dB Bandwidth of BW: 10 MHz(16QAM) is	<u>9.72</u>	MHz	at	<u>829.0</u> MHz

Uncertainty of Measurement Results ± 0.9 %(2σ)

Remarks : _____


7.4.2 Test Instruments

Shielded Room S4				
Type	Model	Serial No. (ID)	Manufacturer	Cal. Due
Spectrum Analyzer	E4446A	US44300388 (A-39)	Agilent	2016/08/11
Attenuator	43KC-20	1418003 (D-41)	Anritsu	2016/07/05
RF Cable	SUCOFLEX102	14253/2 (C-52)	HUBER+SUHNER	2016/08/16

NOTE : The calibration interval of the above test instruments is 12 months.

7.4.3 Test Method and Test Setup (Diagrammatic illustration)

The test system is shown as follows:



The setting of the spectrum analyzer are shown as follows:

LTE Bandwidth	1.4 MHz	3 MHz	5 MHz	10 MHz
Res. Bandwidth	20 kHz	30 kHz	51 kHz	100 kHz
Video Bandwidth	62 kHz	100 kHz	160 kHz	300 kHz
Span	3 MHz	6 MHz	10 MHz	20 MHz
Sweep Time	AUTO	AUTO	AUTO	AUTO
Trace	Maxhold	Maxhold	Maxhold	Maxhold

7.4.4 Test Data

The resolution bandwidth was set to about 1 – 5 % of emission bandwidth, -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

Test Date :October 26, 2015


Temp.:24°C, Humi:35%

1-1) BW 1.4MHz(Full RB)

Mode: QPSK

Channel	Frequency (MHz)	99% Bandwidth (MHz)	-26dBc Bandwidth (MHz)
20407	824.70	1.08	1.21
20525	836.50	1.08	1.21
20643	848.30	1.08	1.22


Low Channel

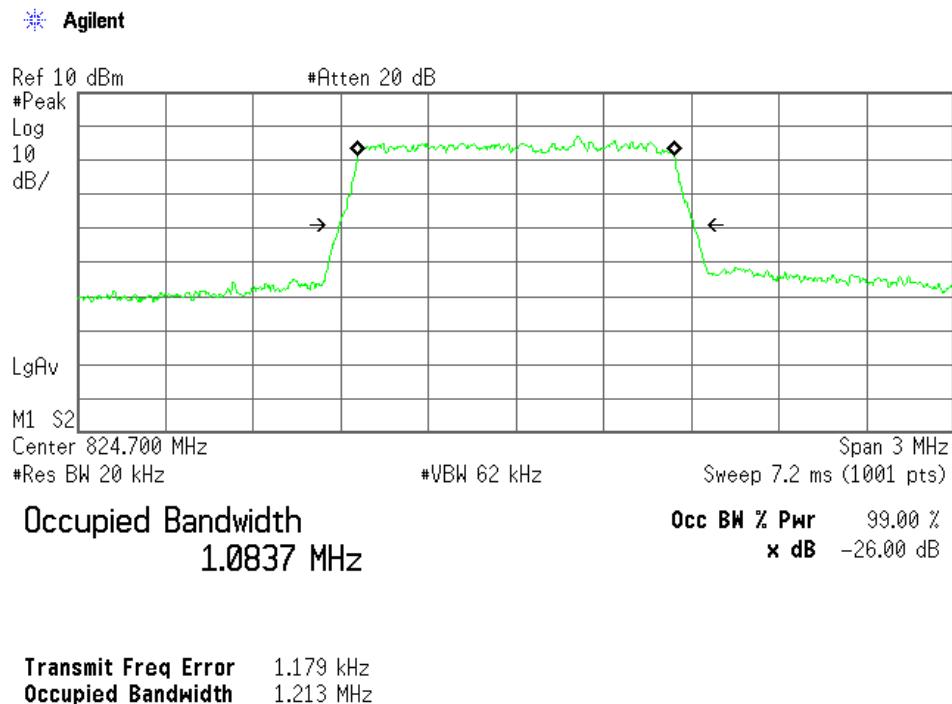

Middle Channel

Agilent

L

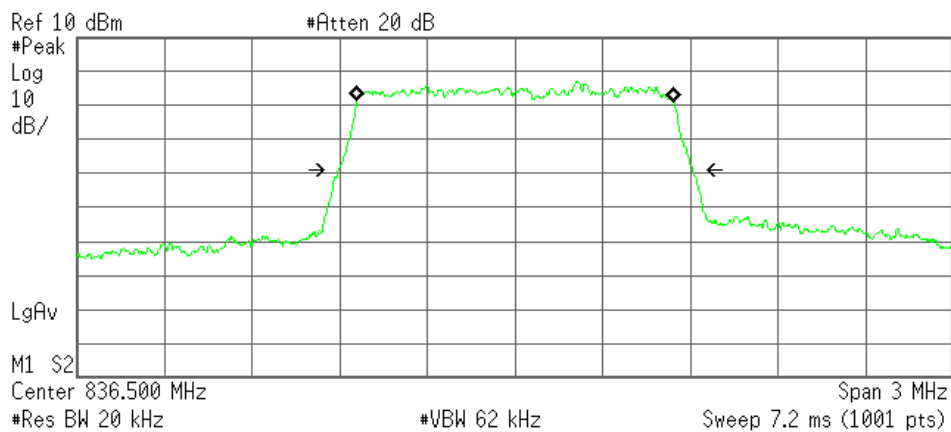

Occupied Bandwidth
1.0846 MHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error 2.067 kHz
Occupied Bandwidth 1.214 MHz

High Channel

Agilent

L

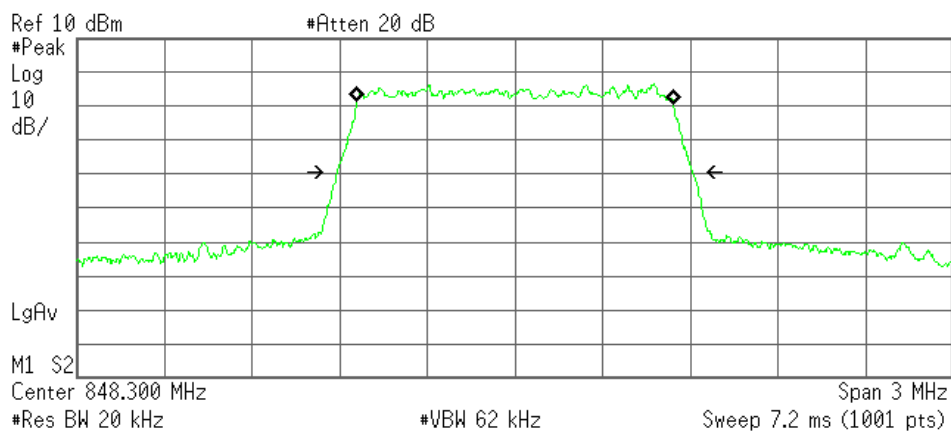

Occupied Bandwidth
1.0831 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB


Transmit Freq Error 641.855 Hz
Occupied Bandwidth 1.218 MHz

1-2) BW 1.4MHz(Full RB)


Mode: 16QAM

Channel	Frequency (MHz)	99% Bandwidth (MHz)	-26dBc Bandwidth (MHz)
20407	824.70	1.08	1.22
20525	836.50	1.08	1.22
20643	848.30	1.08	1.22

Low Channel

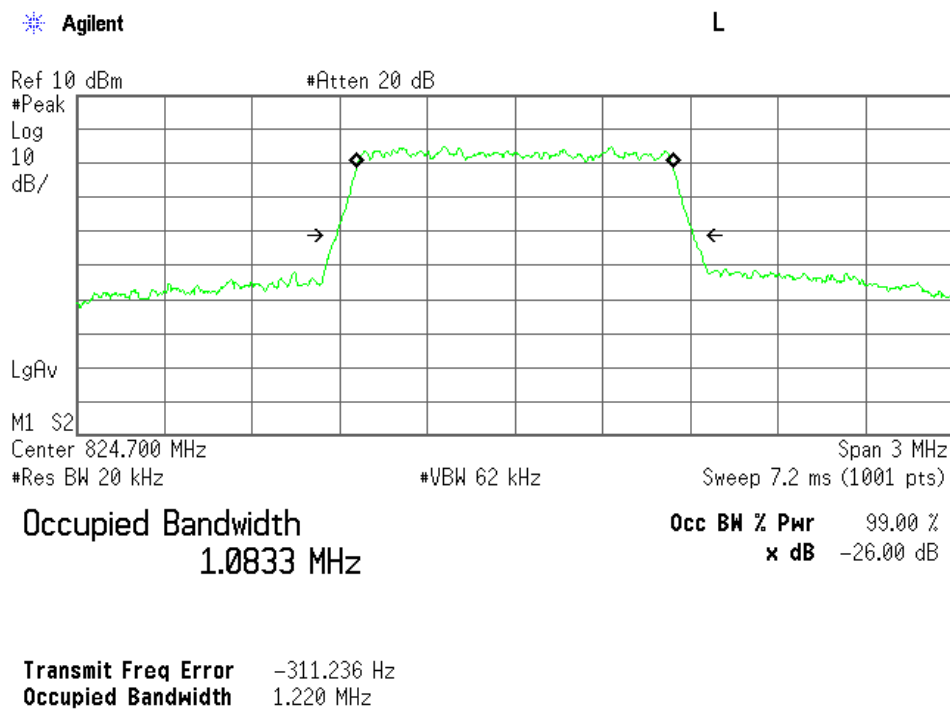


Middle Channel

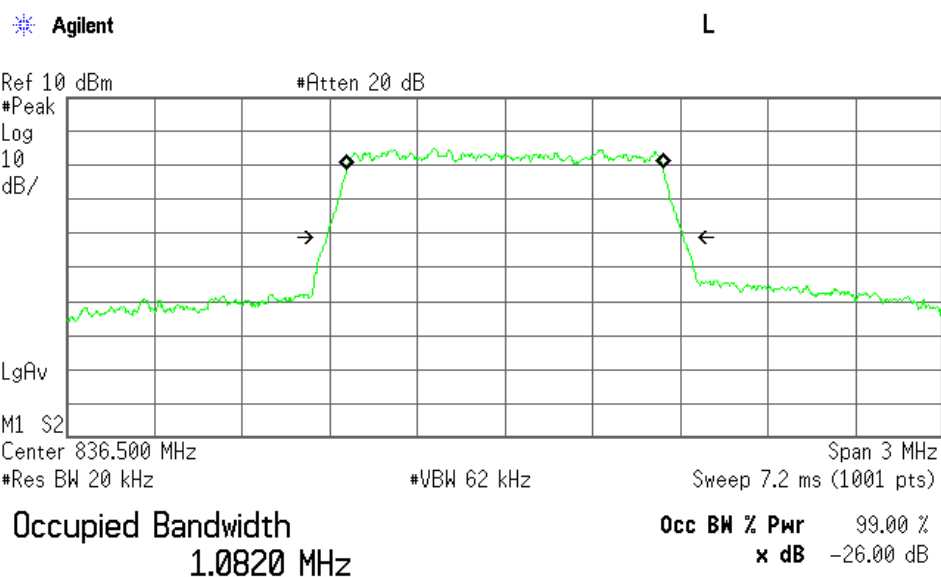

Transmit Freq Error -15.700 Hz
Occupied Bandwidth 1.221 MHz

High Channel

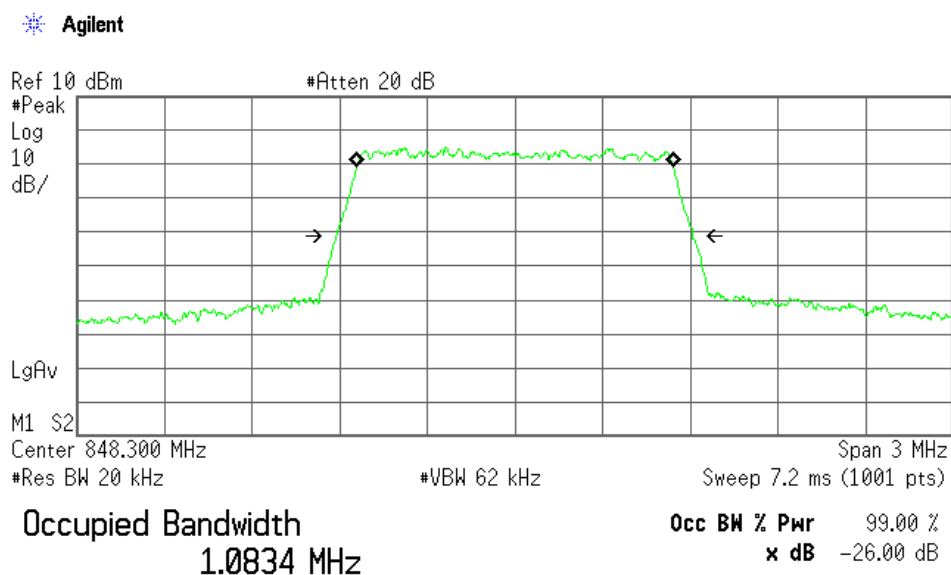


Transmit Freq Error -130.483 Hz
Occupied Bandwidth 1.221 MHz

2-1) BW 3MHz(Full RB)


Mode: QPSK

Channel	Frequency (MHz)	99% Bandwidth (MHz)	-26dBc Bandwidth (MHz)
20415	825.50	2.69	2.96
20525	836.50	2.69	2.96
20635	847.50	2.69	2.96

Low Channel

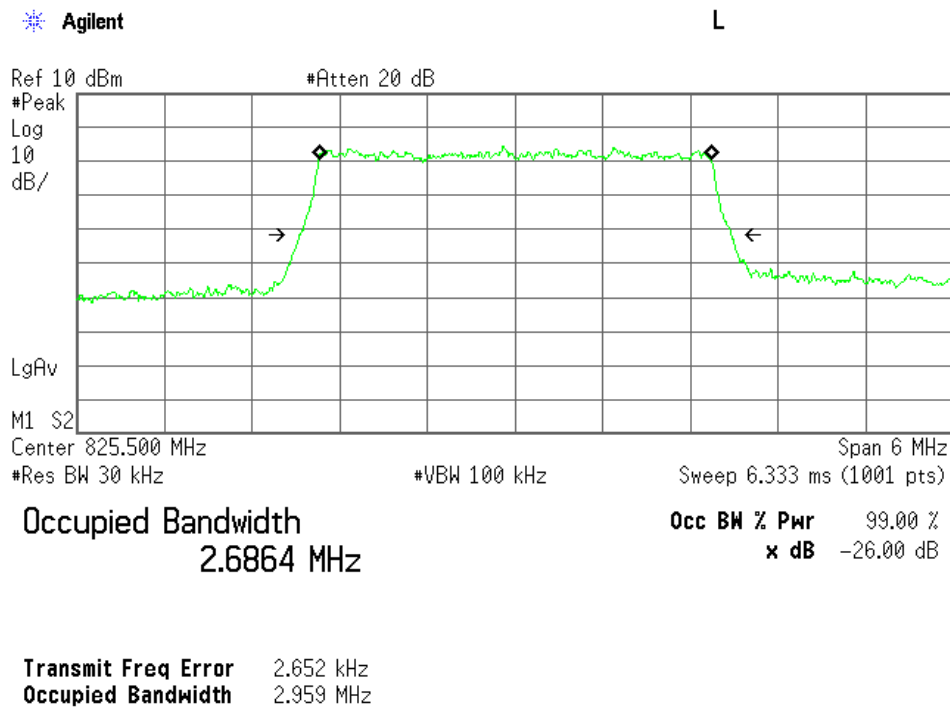


Middle Channel

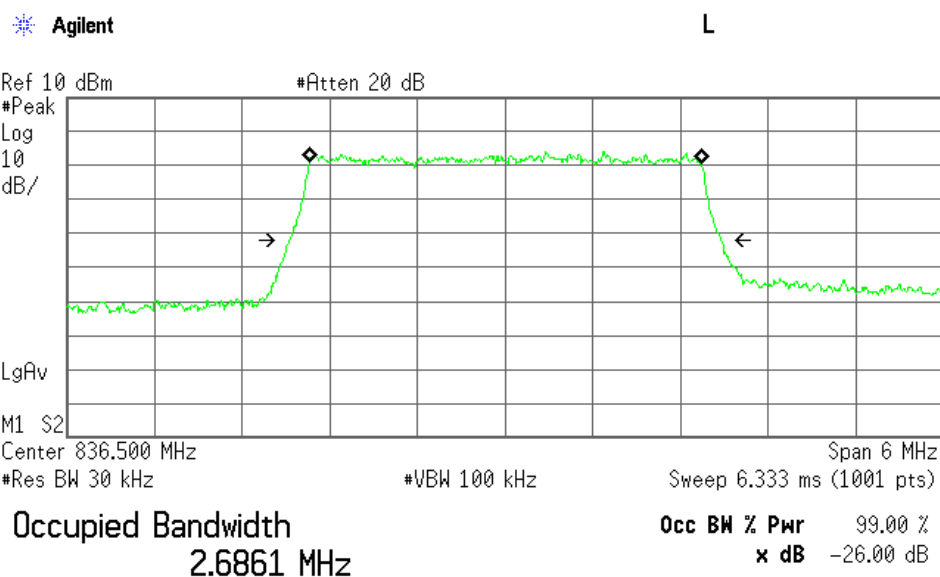

Transmit Freq Error 3.483 kHz
Occupied Bandwidth 2.960 MHz

High Channel

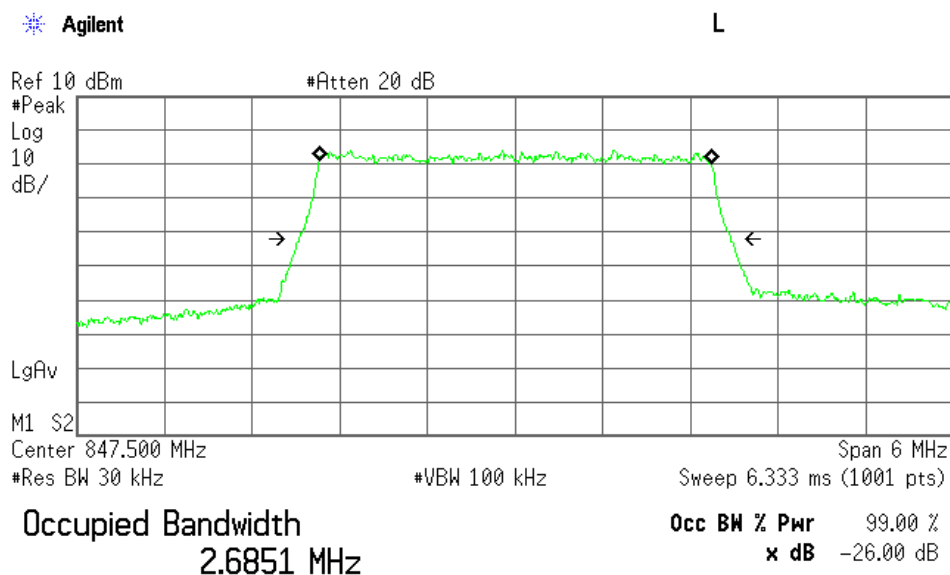


Transmit Freq Error 2.002 kHz
Occupied Bandwidth 2.957 MHz

2-2) BW 3MHz(Full RB)

Mode: 16QAM

Channel	Frequency (MHz)	99% Bandwidth (MHz)	-26dBc Bandwidth (MHz)
20415	825.50	2.68	2.93
20525	836.50	2.68	2.94
20635	847.50	2.68	2.93


Low Channel

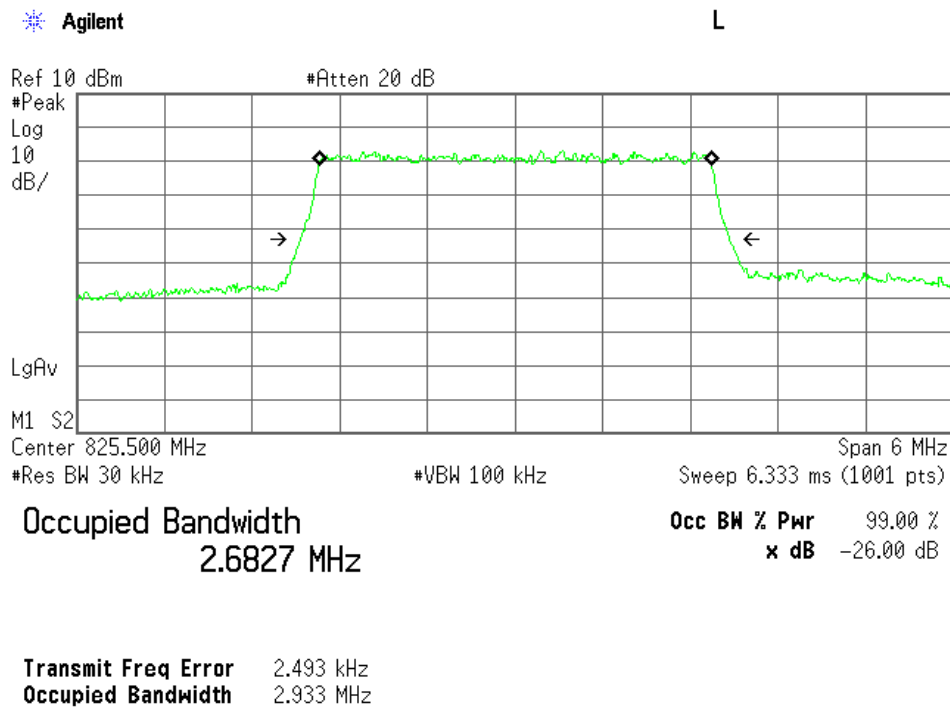

Middle Channel

Agilent


L

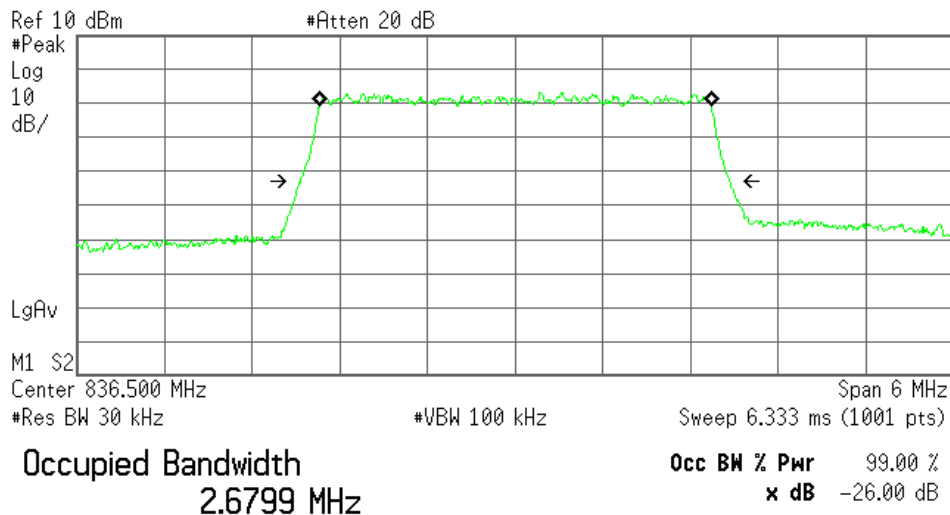

Transmit Freq Error 2.438 kHz
Occupied Bandwidth 2.937 MHz

High Channel

Agilent

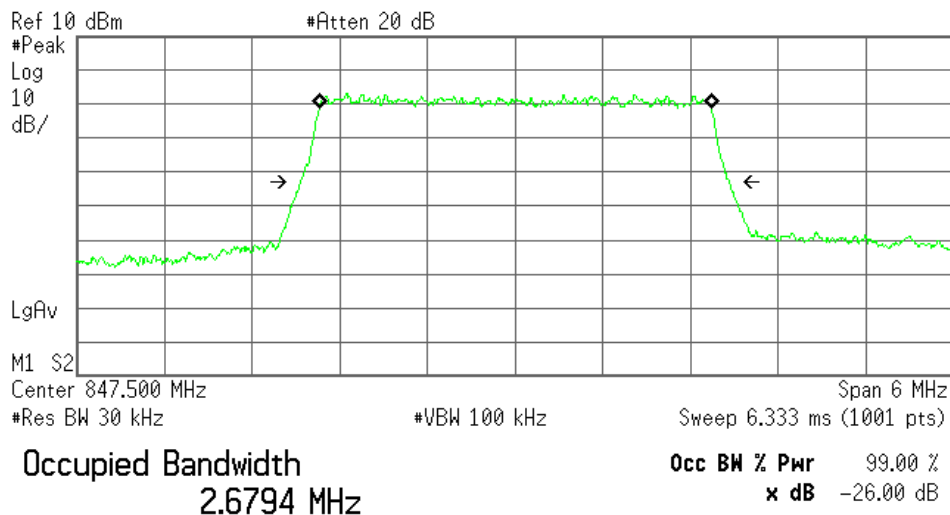


Transmit Freq Error 1.330 kHz
Occupied Bandwidth 2.927 MHz

3-1) BW 5MHz(Full RB)

Mode: QPSK

Channel	Frequency (MHz)	99% Bandwidth (MHz)	-26dBc Bandwidth (MHz)
20425	826.50	4.47	4.87
20525	836.50	4.48	4.86
20625	846.50	4.48	4.86


Low Channel

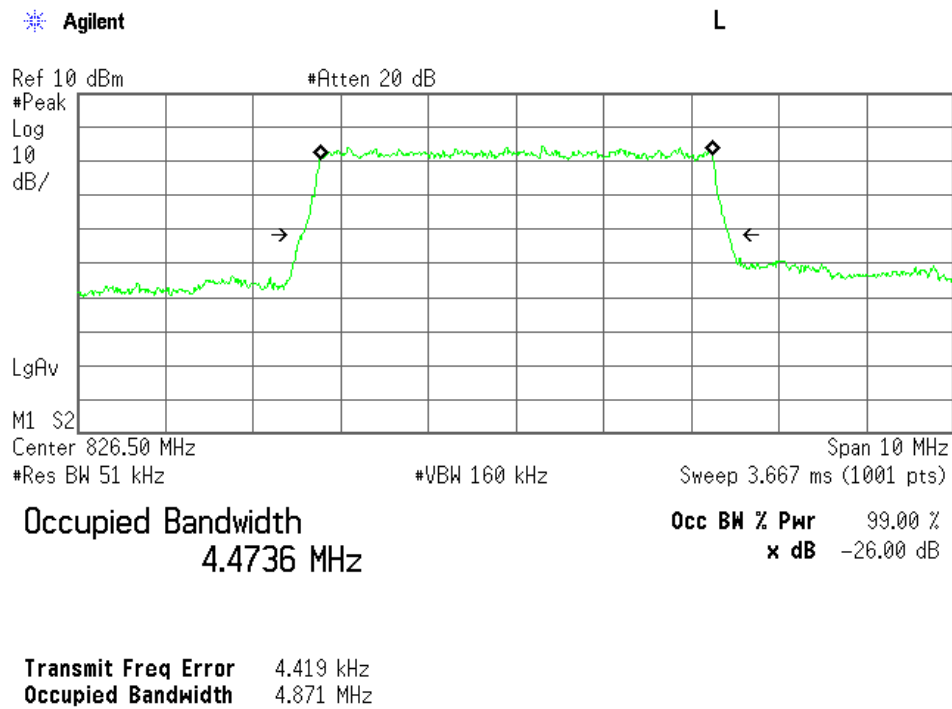

Middle Channel

Agilent

L

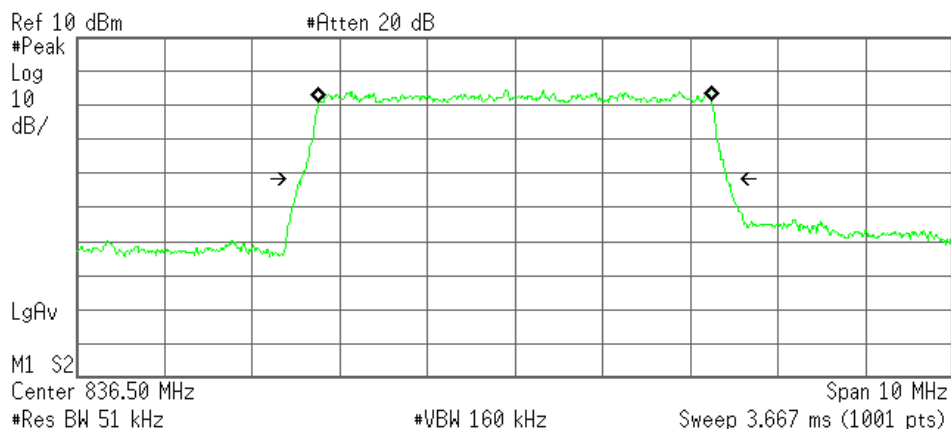

Occupied Bandwidth
4.4792 MHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error 1.871 kHz
Occupied Bandwidth 4.856 MHz

High Channel

Agilent

L

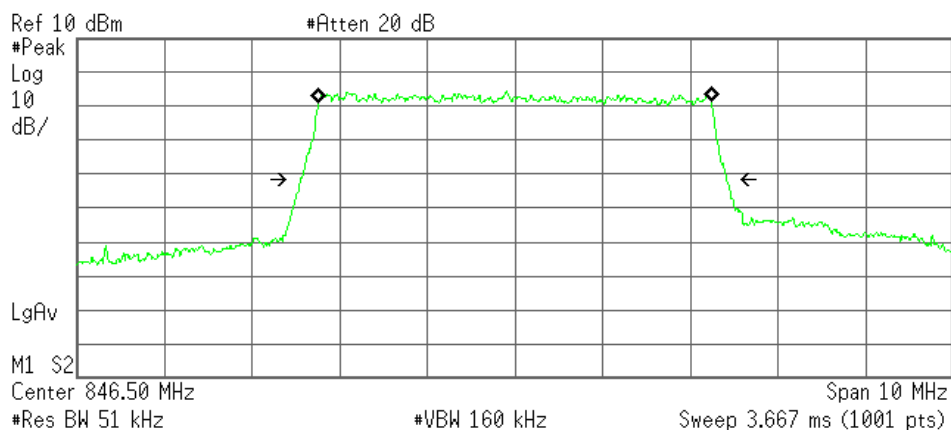

Occupied Bandwidth
4.4754 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB


Transmit Freq Error 226.351 Hz
Occupied Bandwidth 4.864 MHz

3-2) BW 5MHz(Full RB)

Mode: 16QAM

Channel	Frequency (MHz)	99% Bandwidth (MHz)	-26dBc Bandwidth (MHz)
20425	826.50	4.47	4.85
20525	836.50	4.47	4.84
20625	846.50	4.46	4.85


Low Channel

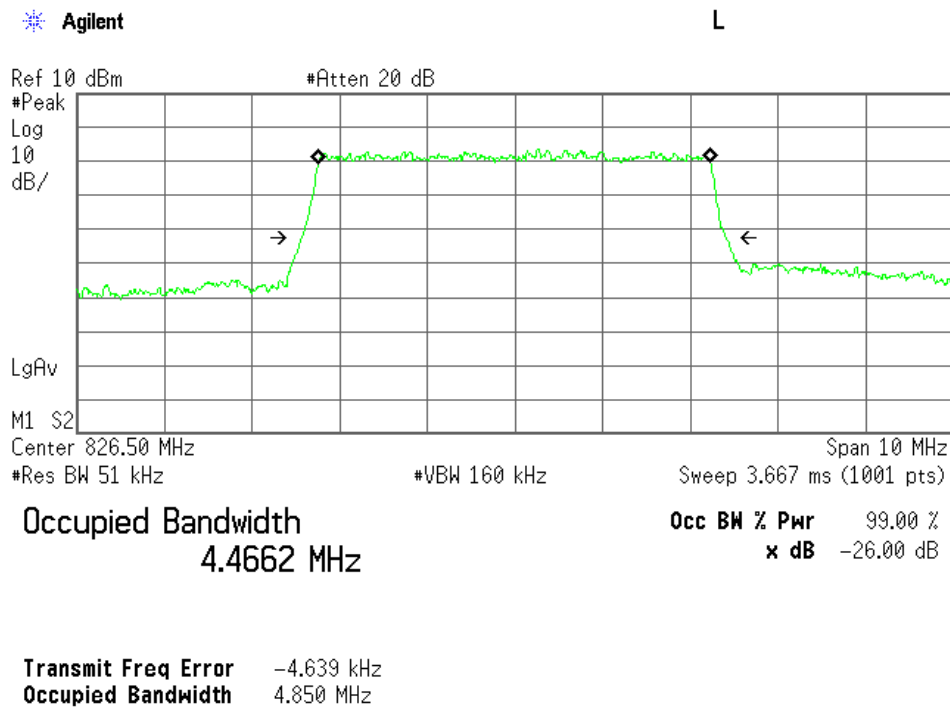

Middle Channel

Agilent


L

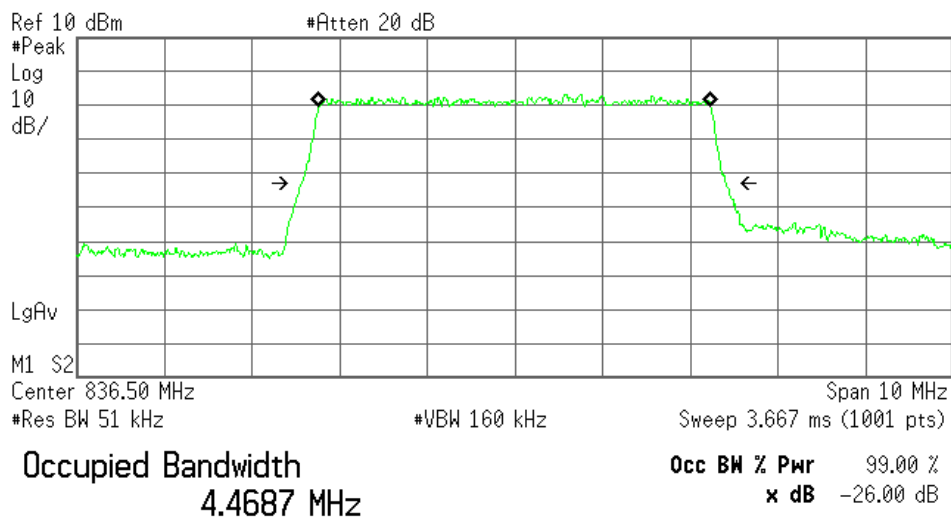

Transmit Freq Error -3.715 kHz
Occupied Bandwidth 4.840 MHz

High Channel

Agilent

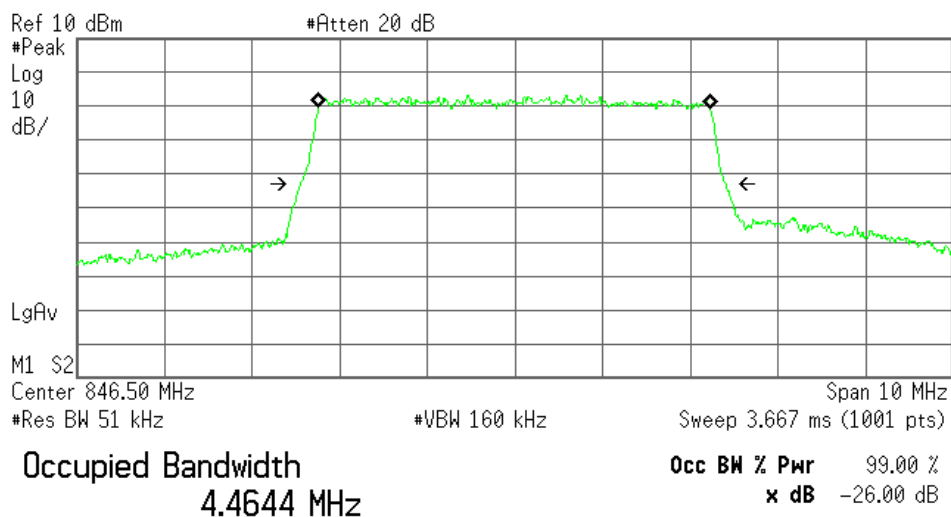


Transmit Freq Error -5.256 kHz
Occupied Bandwidth 4.852 MHz

4-1) BW 10MHz(Full RB)


Mode: QPSK

Channel	Frequency (MHz)	99% Bandwidth (MHz)	-26dBc Bandwidth (MHz)
20450	829.00	8.95	9.68
20525	836.50	8.92	9.67
20600	844.00	8.91	9.66

Low Channel

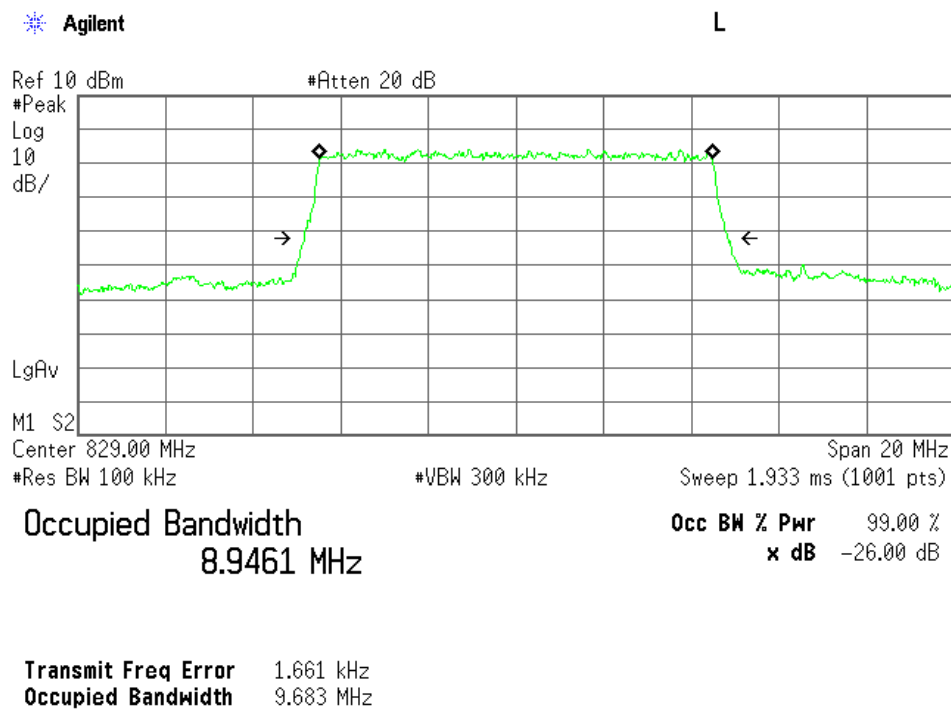


Middle Channel

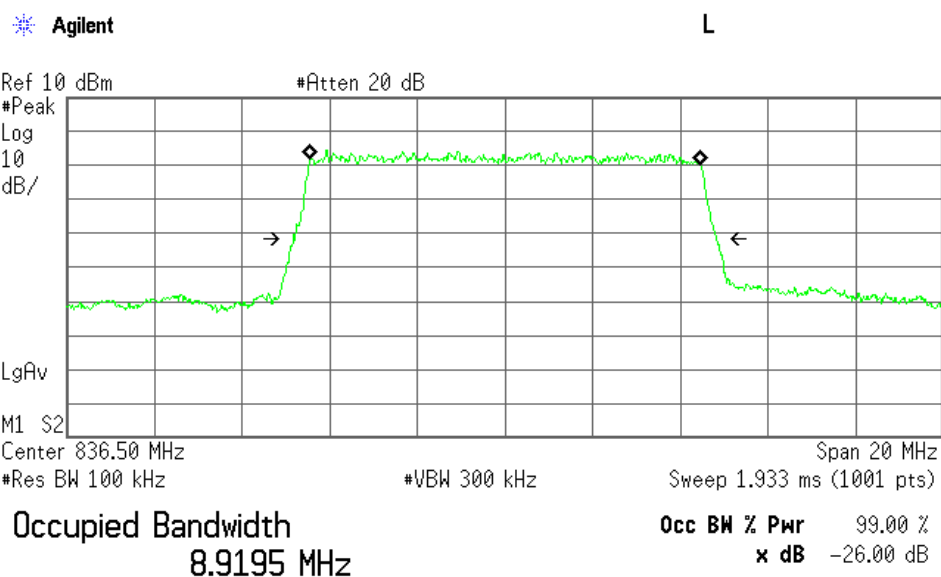

Transmit Freq Error 4.800 kHz
Occupied Bandwidth 9.671 MHz

High Channel

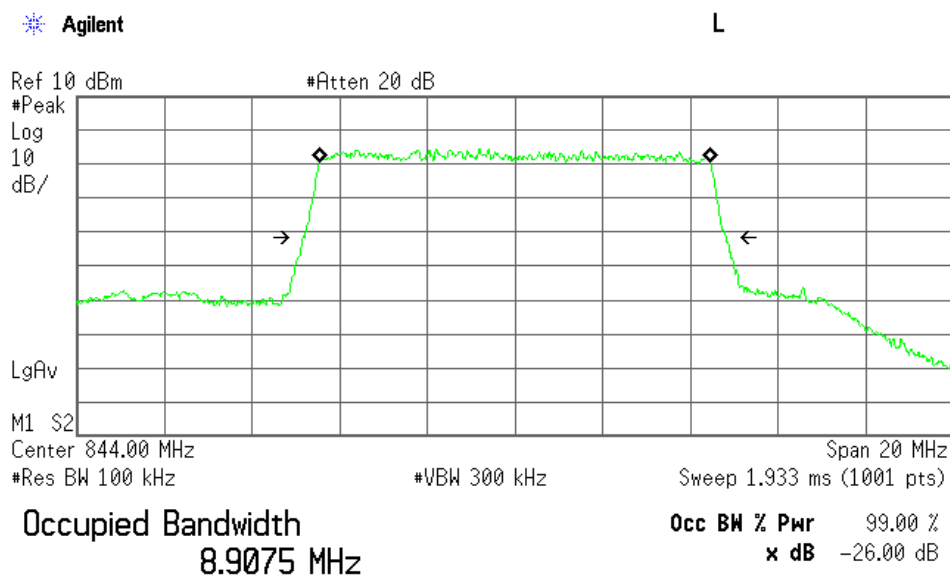


Transmit Freq Error -969.603 Hz
Occupied Bandwidth 9.663 MHz

4-2) BW 10MHz(Full RB)

Mode: 16QAM

Channel	Frequency (MHz)	99% Bandwidth (MHz)	-26dBc Bandwidth (MHz)
20450	829.00	8.92	9.72
20525	836.50	8.93	9.70
20600	844.00	8.92	9.67


Low Channel

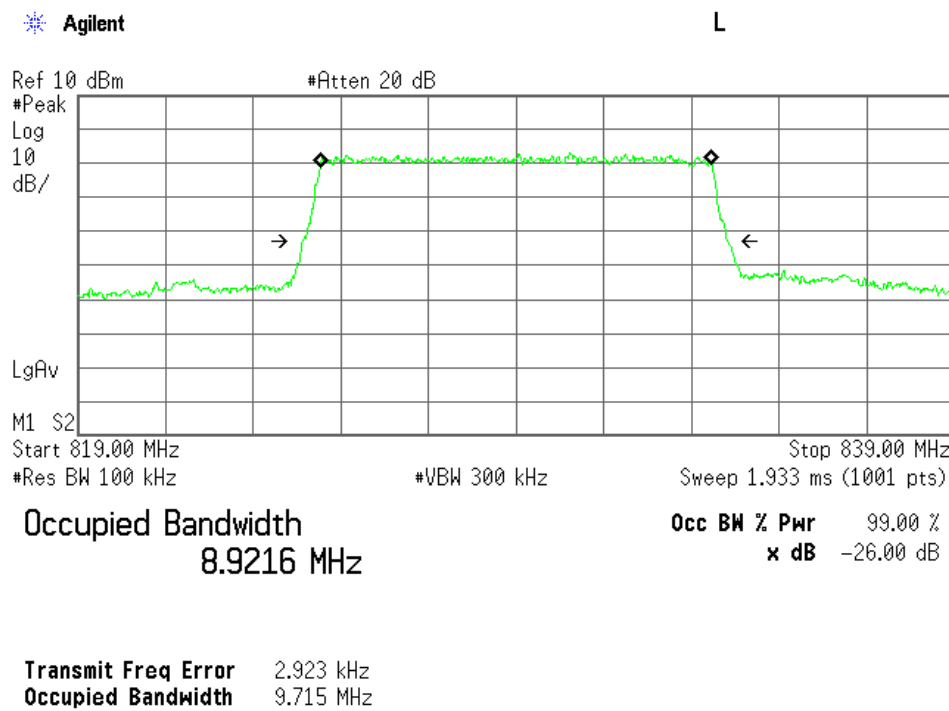

Middle Channel

Agilent


L

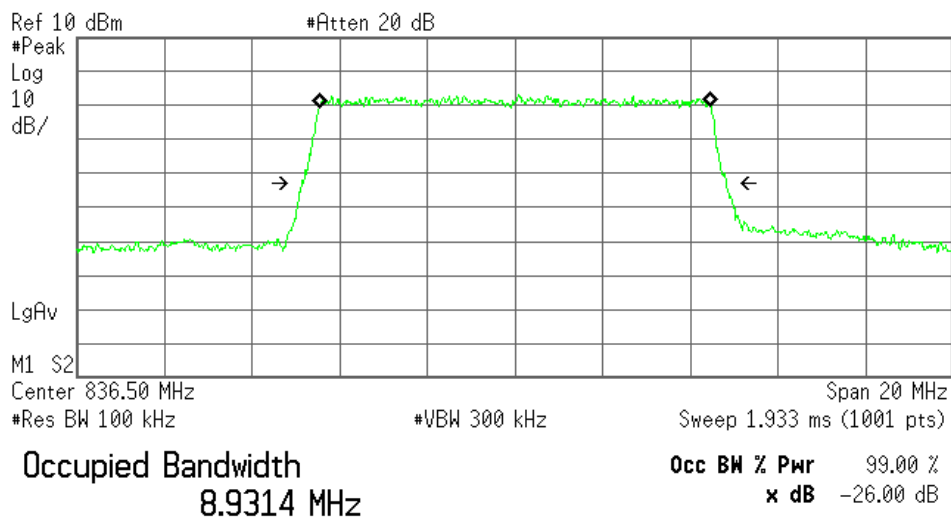

Transmit Freq Error -1.343 kHz
Occupied Bandwidth 9.696 MHz

High Channel

Agilent

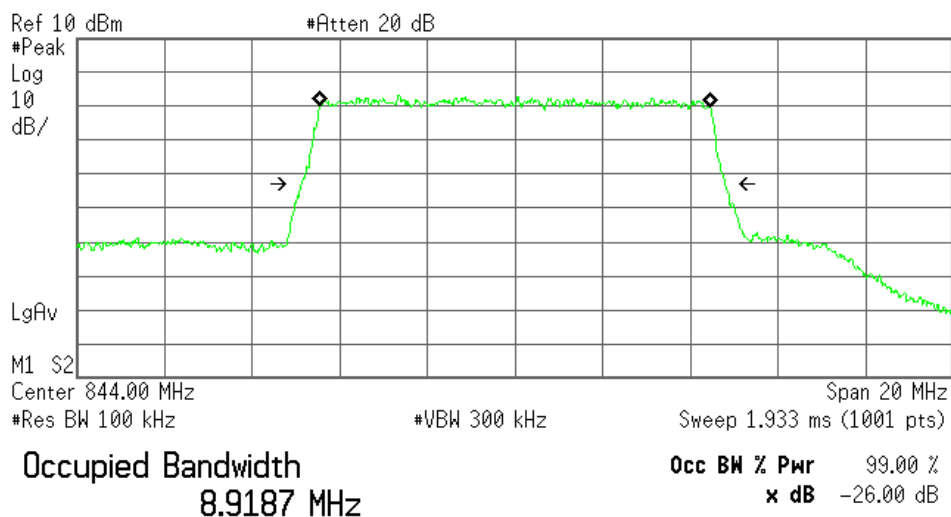

Transmit Freq Error -1.835 kHz
Occupied Bandwidth 9.670 MHz

7.5 Spurious Emissions at Antenna Terminals (§2.1051)

For the requirements, ☒ - Applicable [☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

7.5.1 Test Results

For the standard, ☒ - Passed ☐ - Failed ☐ - Not judged

Min. Limit Margin 33.6 dB at 4220.000 MHz

Uncertainty of Measurement Results
9 kHz – 1 GHz ± 1.4 dB(2σ)
1 GHz – 18 GHz ± 1.7 dB(2σ)
18 GHz – 40 GHz ± 2.3 dB(2σ)

Remarks : BW 10 MHz

7.5.2 Test Instruments


Shielded Room S4				
Type	Model	Serial No. (ID)	Manufacturer	Cal. Due
Spectrum Analyzer	E4446A	US44300388 (A-39)	Agilent	2016/08/11
Attenuator	43KC-20	1418003 (D-41)	Anritsu	2016/07/05
RF Cable	SUCOFLEX102	14253/2 (C-52)	HUBER+SUHNER	2016/08/16
High Pass Filter	HPM50108	010 (D-94)	MICRO-TRONICS	2016/02/08

NOTE : The calibration interval of the above test instruments is 12 months.


7.5.3 Test Method and Test Setup (Diagrammatic illustration)

The Antenna Conducted Emission was measured with a spectrum analyzer. The test system is shown as follows:

- a) Frequency Range: 9 kHz – 1.2 GHz



- b) Frequency Range: 1.2 GHz – 10 GHz



The setting of the spectrum analyzer are shown as follows:

Frequency Range	9 kHz - 150 kHz	150 kHz - 30 MHz	30 MHz - 10 GHz
Res. Bandwidth	200 Hz	10 kHz	1 MHz
Video Bandwidth	1 kHz	30 kHz	3 MHz
Sweep Time	AUTO	AUTO	AUTO
Trace	Maxhold	Maxhold	Maxhold

7.5.4 Test Data

1) BW 1.4MHz(1RB)

(LTE 1.4MHz)

Test Date: October 26, 2015

Temp.: 24 °C, Humi: 35 %

Transmitting Frequency CH [MHz]		Measured Frequency [MHz]	Corr. Factor [dB]	Meter Readings [dBm]	Limits [dBm]	Results [dBm]	Margin [dB]	Remarks
20407	824.700	1649.400	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		2474.100	20.9	< -70.0	-13.0	< -49.1	> +36.1	C
		3298.800	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		4123.500	21.1	< -70.0	-13.0	< -48.9	> +35.9	C
		4948.200	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		5772.900	21.2	< -70.0	-13.0	< -48.8	> +35.8	C
		6597.600	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		7422.300	21.4	< -70.0	-13.0	< -48.6	> +35.6	C
		8247.000	21.5	< -70.0	-13.0	< -48.5	> +35.5	C
20525	836.500	1673.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		2509.500	20.9	< -70.0	-13.0	< -49.1	> +36.1	C
		3346.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		4182.500	21.1	< -70.0	-13.0	< -48.9	> +35.9	C
		5019.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		5855.500	21.2	< -70.0	-13.0	< -48.8	> +35.8	C
		6692.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		7528.500	21.4	< -70.0	-13.0	< -48.6	> +35.6	C
		8365.000	21.5	< -70.0	-13.0	< -48.5	> +35.5	C
20643	848.300	1696.600	21.2	< -70.0	-13.0	< -48.8	> +35.8	C
		2544.900	20.9	< -70.0	-13.0	< -49.1	> +36.1	C
		3393.200	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		4241.500	21.1	-68.0	-13.0	-46.9	+33.9	C
		5089.800	21.1	< -70.0	-13.0	< -48.9	> +35.9	C
		5938.100	21.2	< -70.0	-13.0	< -48.8	> +35.8	C
		6786.400	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		7634.700	21.4	< -70.0	-13.0	< -48.6	> +35.6	C
		8483.000	21.6	< -70.0	-13.0	< -48.4	> +35.4	C

Calculated result at 4241.5 MHz, as the worst point shown on underline:

Corr. Factor	=	21.1 dB
+) <u>Meter Reading</u>	=	<u>-68.0 dBm</u>
Result	=	-46.9 dBm


Minimum Margin: -13.0 - (-46.9) = 33.9 (dB)

NOTES


- The spectrum was checked from 9 kHz to 10 GHz.
- Applied limits : $-13.0 \text{ [dBm]} = 10\log(\text{TP[mW]}) - (43 + 10\log(\text{tp[W]})) = 10\log(\text{TP[mW]}) - (43 + (10\log(\text{TP[mW]}) - 30))$
where, $\text{tp[W]} = \text{TP[mW]} / 1000$: Transmitter power at antenna terminal
- The correction factor is shown as follows:
Corr. Factor [dB] = Cable Loss + 10dB Pad Att. [dB] (9 kHz - 1.2 GHz)
Corr. Factor [dB] = Cable Loss + 10dB Pad Att. + High Pass Filter Loss (D-94) [dB] (over 1.2 GHz)
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- Setting of measuring instrument(s) :

	Detector Function	RES B.W.	V.B.W.	Sweep Time
A	Peak	200 Hz	1 kHz	AUTO
B	Peak	10 kHz	30 kHz	AUTO
C	Peak	1 MHz	3 MHz	AUTO


Low Channel, Out-Of-Band Emissions (9 kHz – 150 kHz)

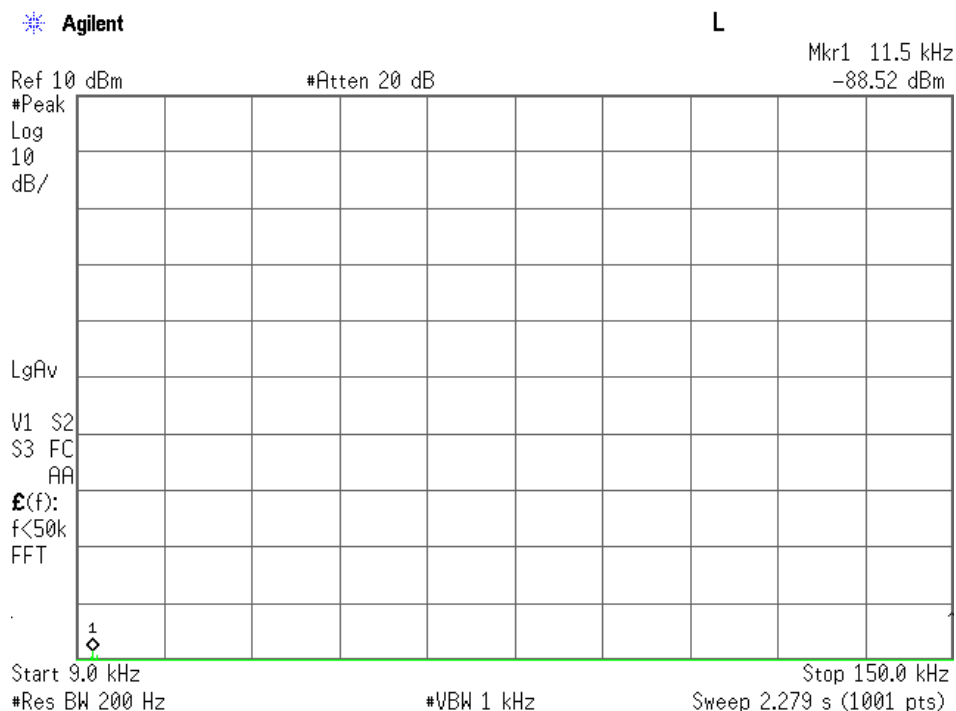


Low Channel, Out-Of-Band Emissions (150 kHz – 30 MHz)

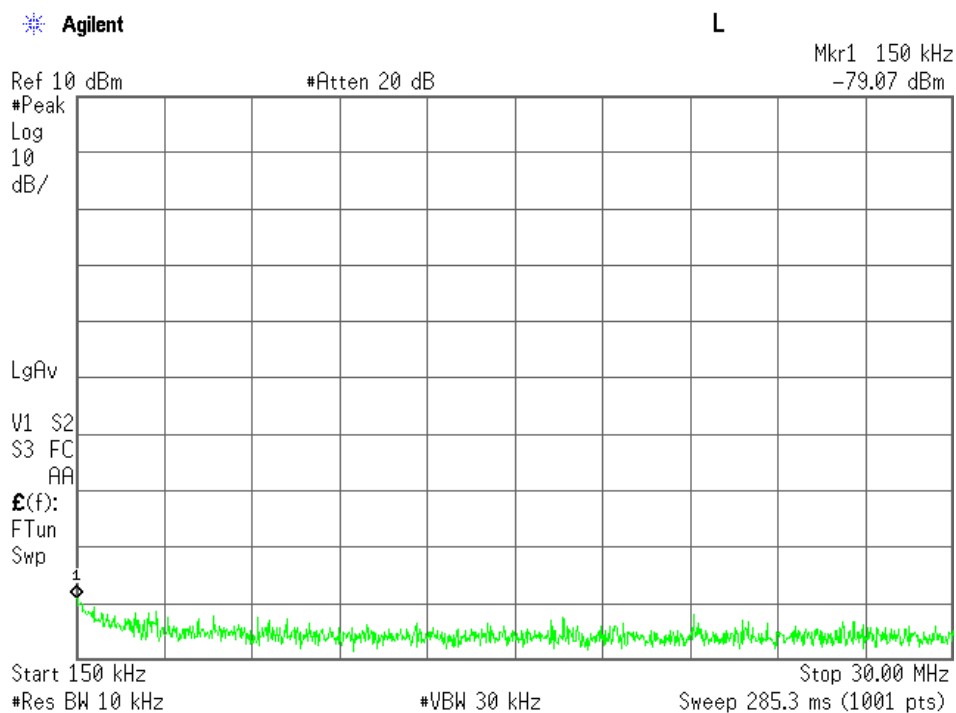


Low Channel, Out-Of-Band Emissions (30 MHz – 1.2 GHz)

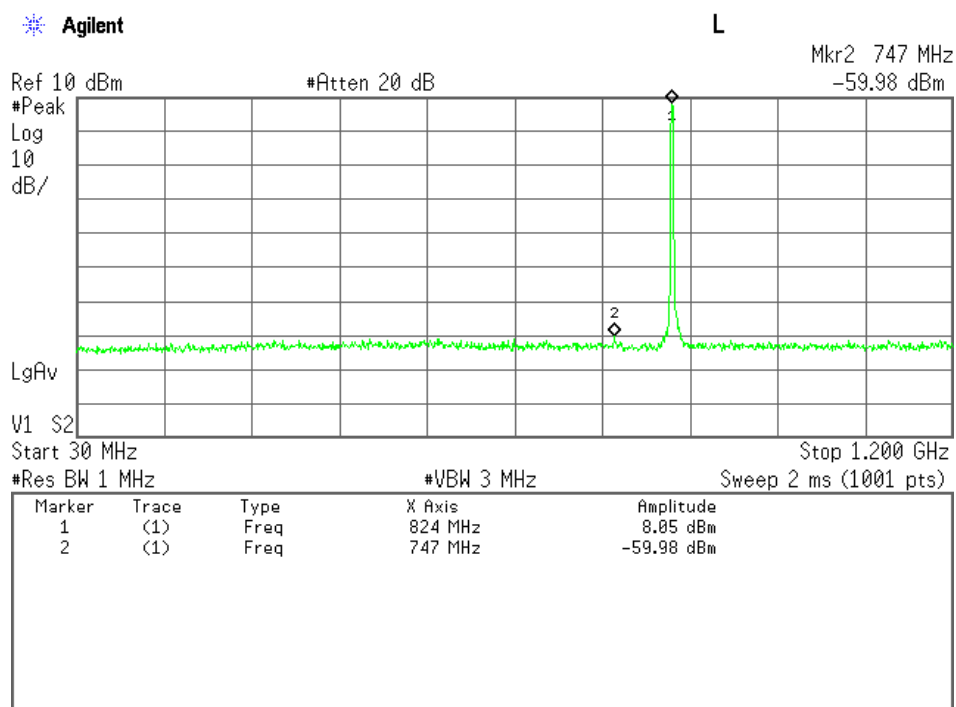


Low Channel, Out-Of-Band Emissions (1.2 GHz – 100 GHz)

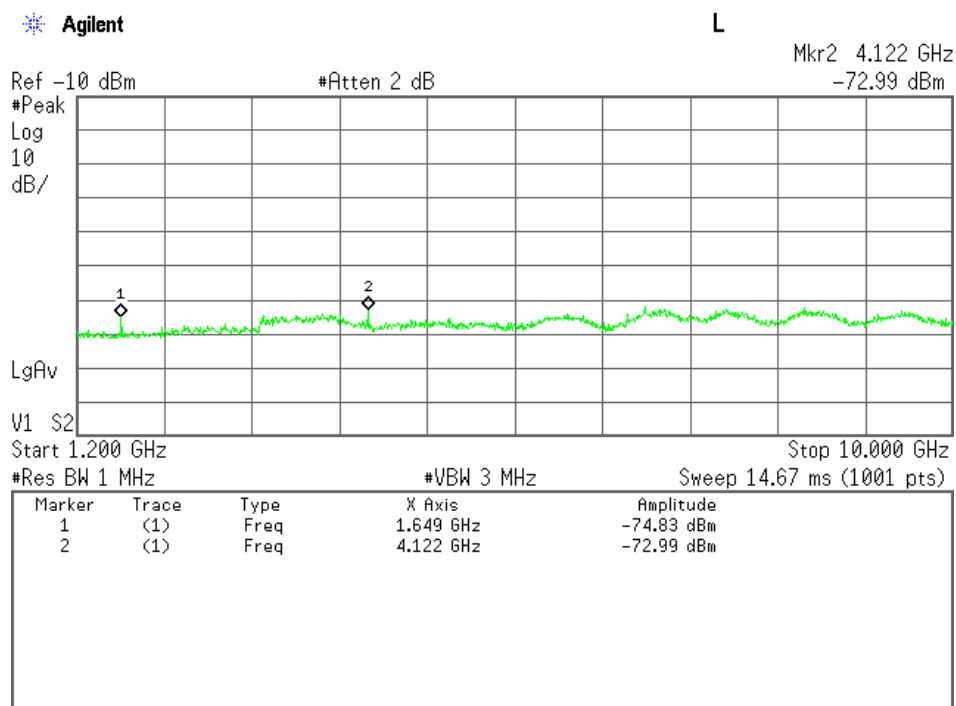


Middle Channel, Out-Of-Band Emissions (9 kHz – 150 kHz)

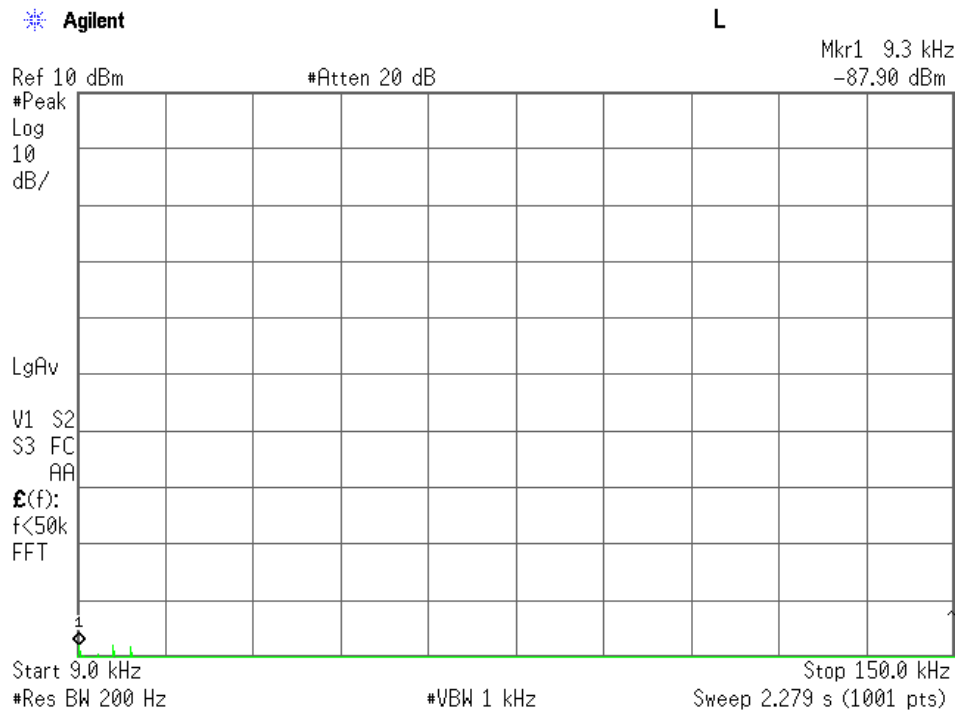


Middle Channel, Out-Of-Band Emissions (150 kHz – 30 MHz)

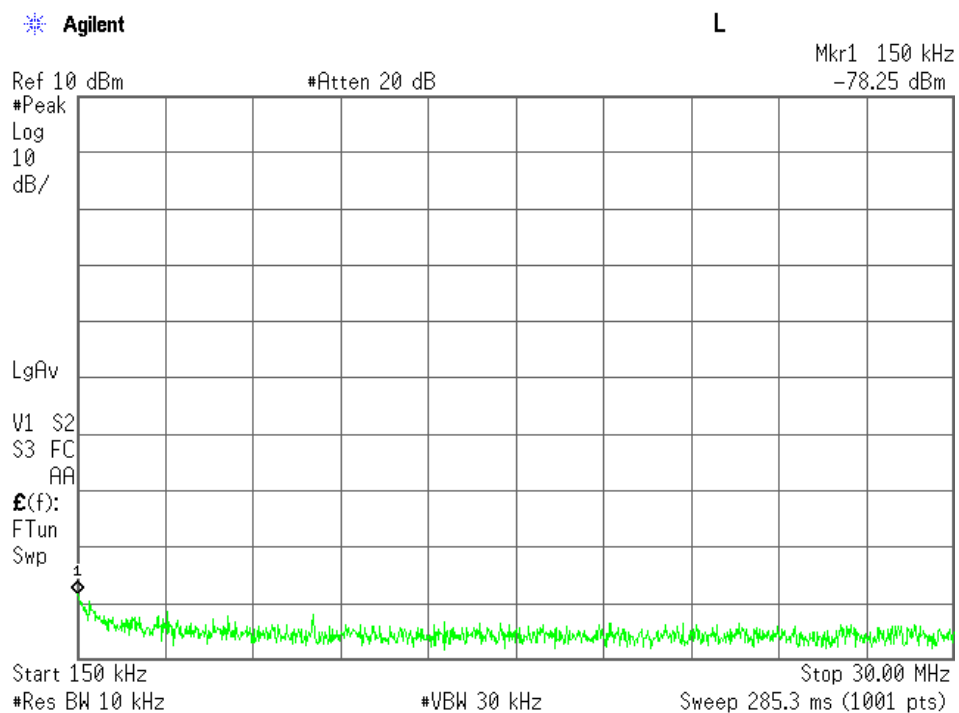


Middle Channel, Out-Of-Band Emissions (30 MHz – 1.2 GHz)

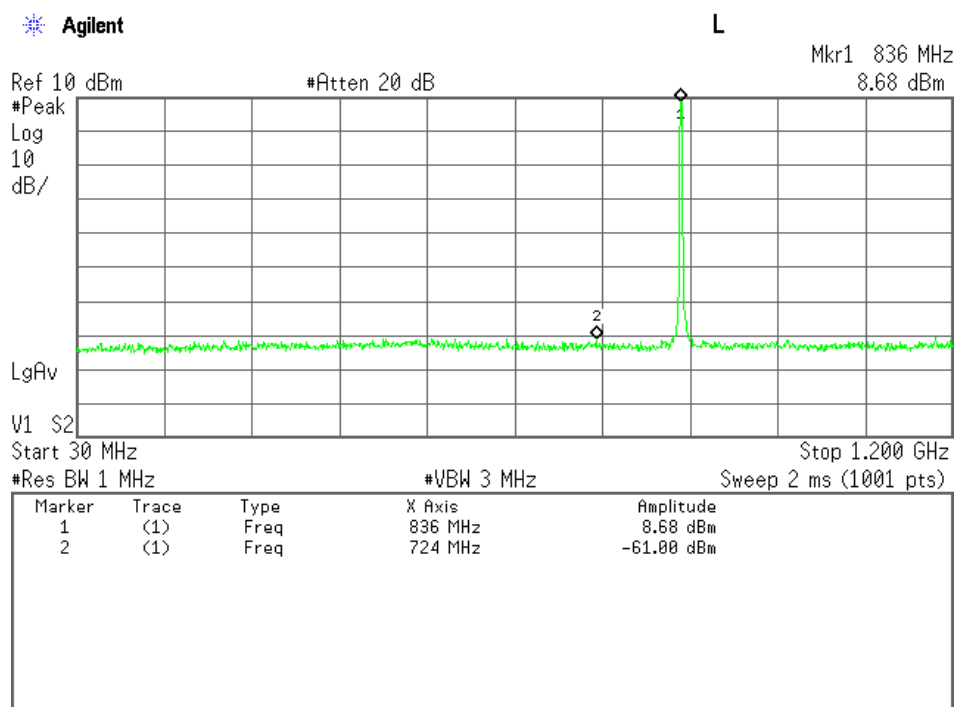


Middle Channel, Out-Of-Band Emissions (1.2 GHz – 10 GHz)

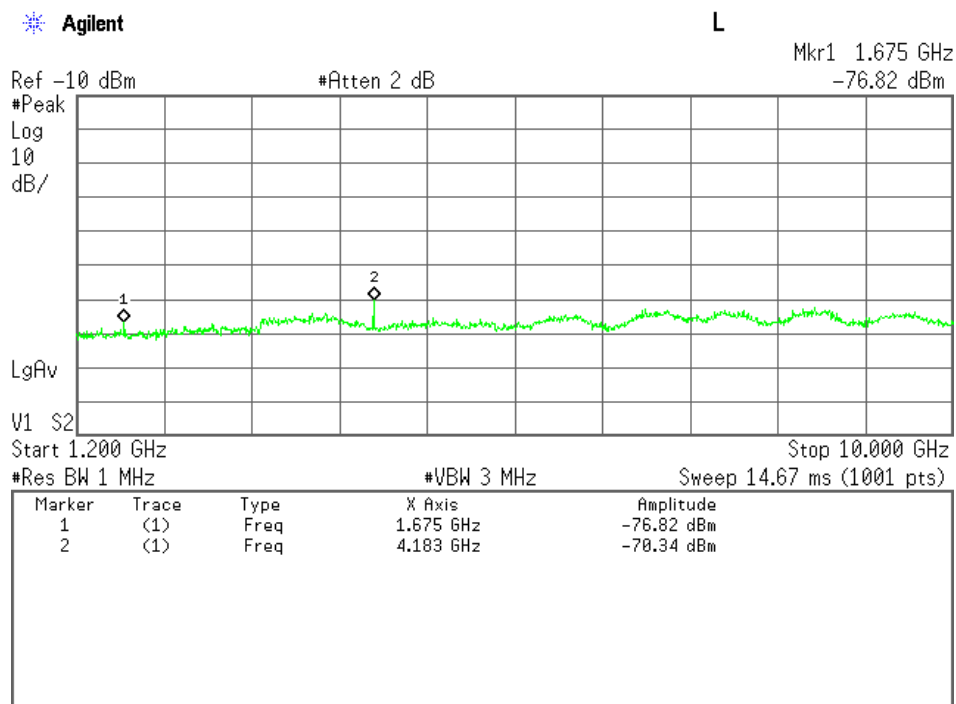


High Channel, Out-Of-Band Emissions (9 kHz – 150 kHz)

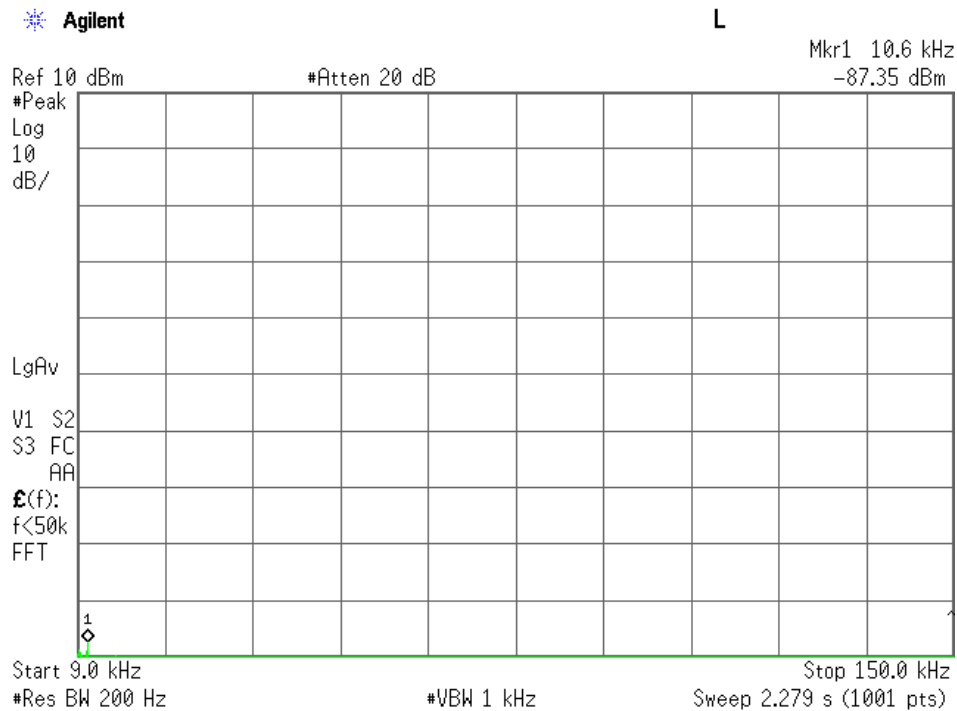


High Channel, Out-Of-Band Emissions (150 kHz – 30 MHz)

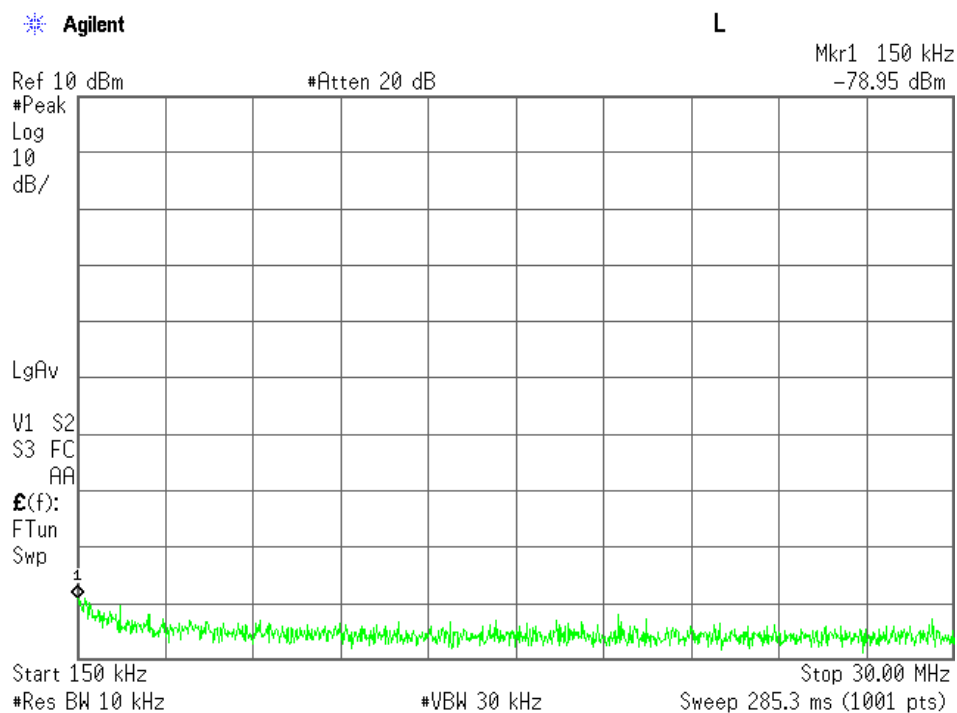

High Channel, Out-Of-Band Emissions (30 MHz – 1.2 GHz)

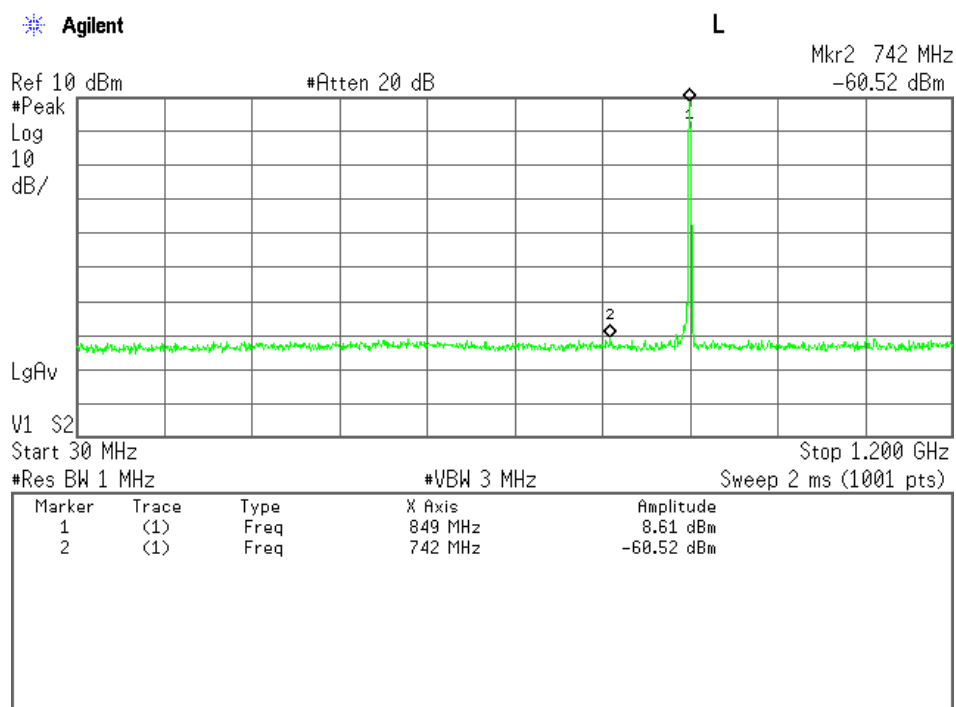

High Channel, Out-Of-Band Emissions (1.2 GHz – 10 GHz)

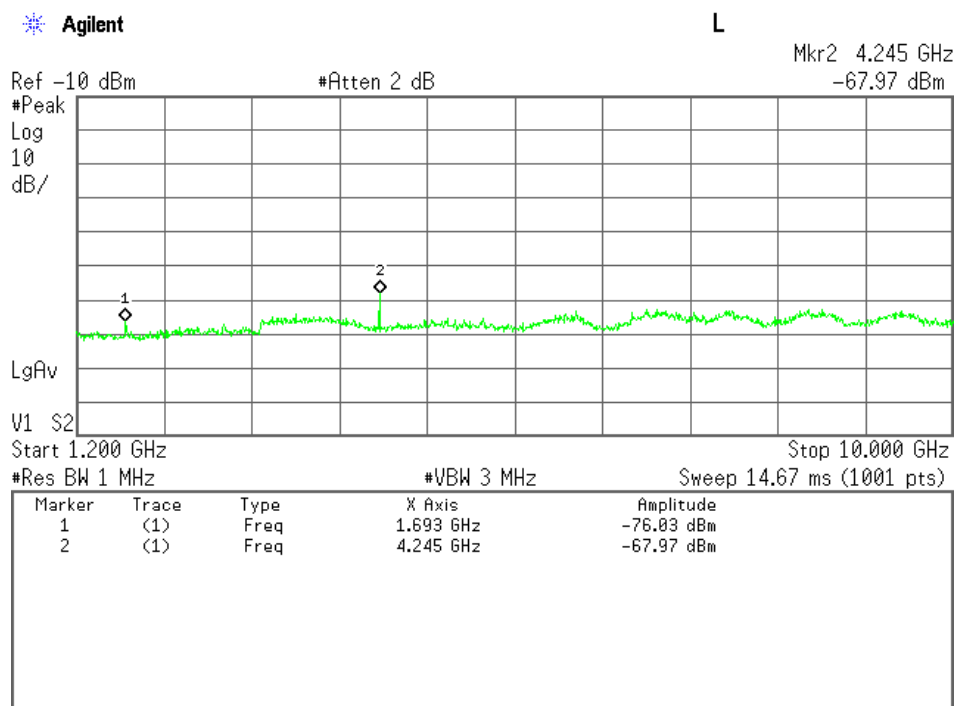

2) BW 3MHz(1RB)

(LTE 3MHz)

Test Date: October 26, 2015

Temp.: 24 °C, Humi: 35 %

Transmitting Frequency CH	Frequency [MHz]	Measured Frequency [MHz]	Corr. Factor [dB]	Meter Readings [dBm]	Limits [dBm]	Results [dBm]	Margin [dB]	Remarks
20415	825.500	1651.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		2476.500	20.9	< -70.0	-13.0	< -49.1	> +36.1	C
		3302.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		4127.500	21.1	< -70.0	-13.0	< -48.9	> +35.9	C
		4953.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		5778.500	21.2	< -70.0	-13.0	< -48.8	> +35.8	C
		6604.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		7429.500	21.4	< -70.0	-13.0	< -48.6	> +35.6	C
		8255.000	21.5	< -70.0	-13.0	< -48.5	> +35.5	C
20525	836.500	1673.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		2509.500	20.9	< -70.0	-13.0	< -49.1	> +36.1	C
		3346.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		4182.500	21.1	< -70.0	-13.0	< -48.9	> +35.9	C
		5019.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		5855.500	21.2	< -70.0	-13.0	< -48.8	> +35.8	C
		6692.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		7528.500	21.4	< -70.0	-13.0	< -48.6	> +35.6	C
		8365.000	21.5	< -70.0	-13.0	< -48.5	> +35.5	C
20635	847.500	1695.000	21.2	< -70.0	-13.0	< -48.8	> +35.8	C
		2542.500	20.9	< -70.0	-13.0	< -49.1	> +36.1	C
		3390.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		4237.500	21.1	-69.0	-13.0	-47.9	+34.9	C
		5085.000	21.1	< -70.0	-13.0	< -48.9	> +35.9	C
		5932.500	21.2	< -70.0	-13.0	< -48.8	> +35.8	C
		6780.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		7627.500	21.4	< -70.0	-13.0	< -48.6	> +35.6	C
		8475.000	21.6	< -70.0	-13.0	< -48.4	> +35.4	C

Calculated result at 4237.5 MHz, as the worst point shown on underline:

Corr. Factor	=	21.1 dB
+) <u>Meter Reading</u>	=	<u>-69.0 dBm</u>
Result	=	-47.9 dBm


Minimum Margin: -13.0 - (-47.9) = 34.9 (dB)

NOTES


- The spectrum was checked from 9 kHz to 10 GHz.
- Applied limits : $-13.0 \text{ [dBm]} = 10\log(\text{TP[mW]}) - (43 + 10\log(\text{tp[W]})) = 10\log(\text{TP[mW]}) - (43 + (10\log(\text{TP[mW]}) - 30))$
where, $\text{tp[W]} = \text{TP[mW]} / 1000$: Transmitter power at antenna terminal
- The correction factor is shown as follows:
Corr. Factor [dB] = Cable Loss + 10dB Pad Att. [dB] (9 kHz - 1.2 GHz)
Corr. Factor [dB] = Cable Loss + 10dB Pad Att. + High Pass Filter Loss (D-94) [dB] (over 1.2 GHz)
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- Setting of measuring instrument(s) :

	Detector Function	RES B.W.	V.B.W.	Sweep Time
A	Peak	200 Hz	1 kHz	AUTO
B	Peak	10 kHz	30 kHz	AUTO
C	Peak	1 MHz	3 MHz	AUTO


Low Channel, Out-Of-Band Emissions (9 kHz – 150 kHz)

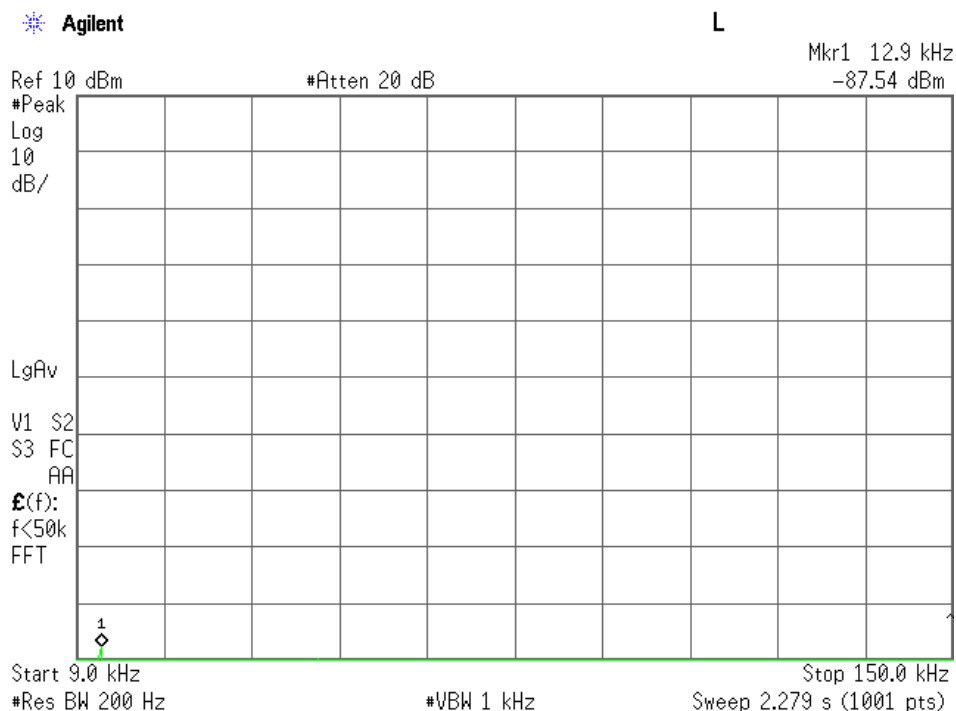


Low Channel, Out-Of-Band Emissions (150 kHz – 30 MHz)

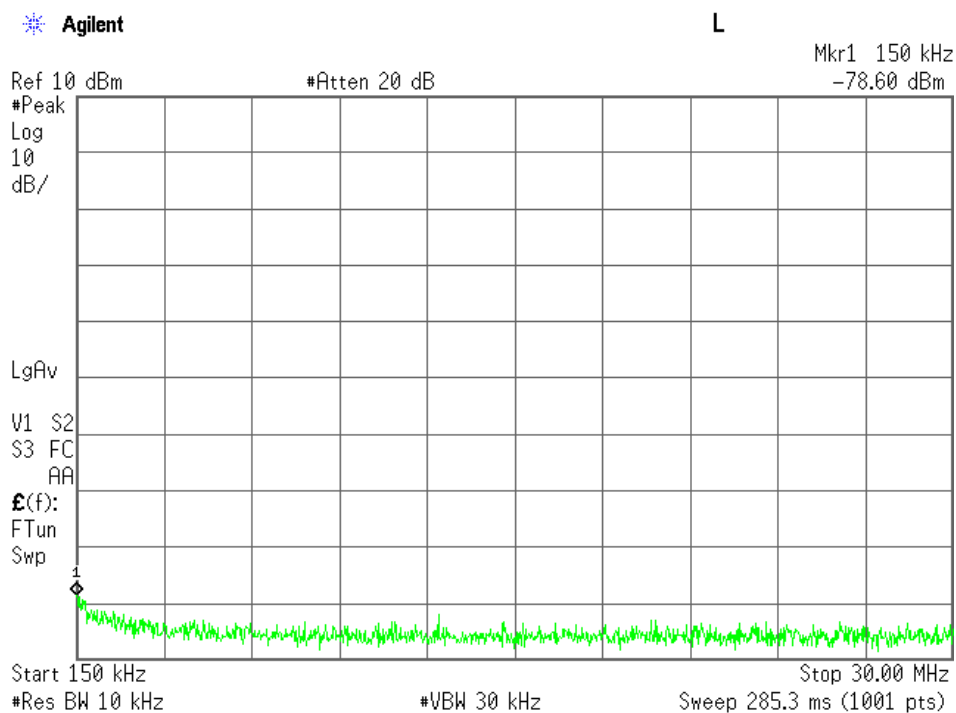


Low Channel, Out-Of-Band Emissions (30 MHz – 1.2 GHz)

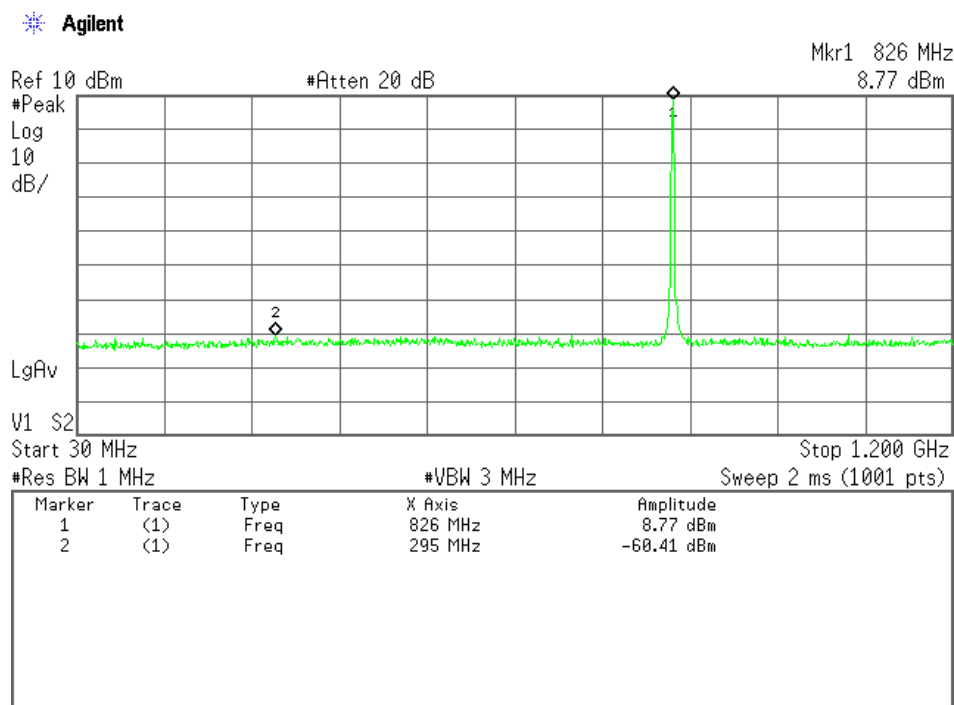


Low Channel, Out-Of-Band Emissions (1.2 GHz – 100 GHz)

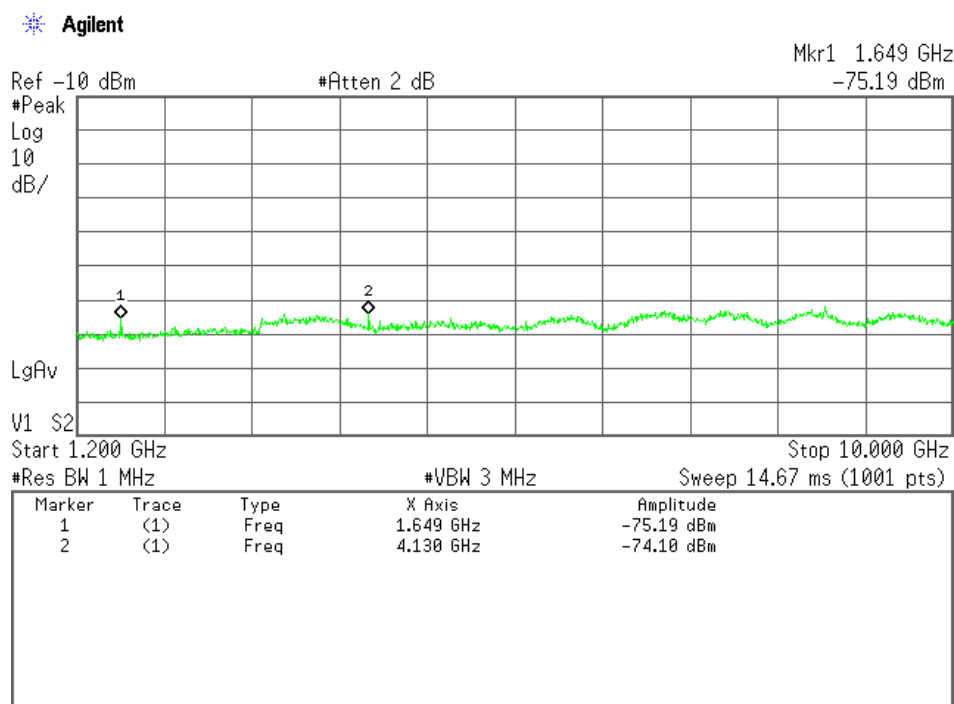


Middle Channel, Out-Of-Band Emissions (9 kHz – 150 kHz)

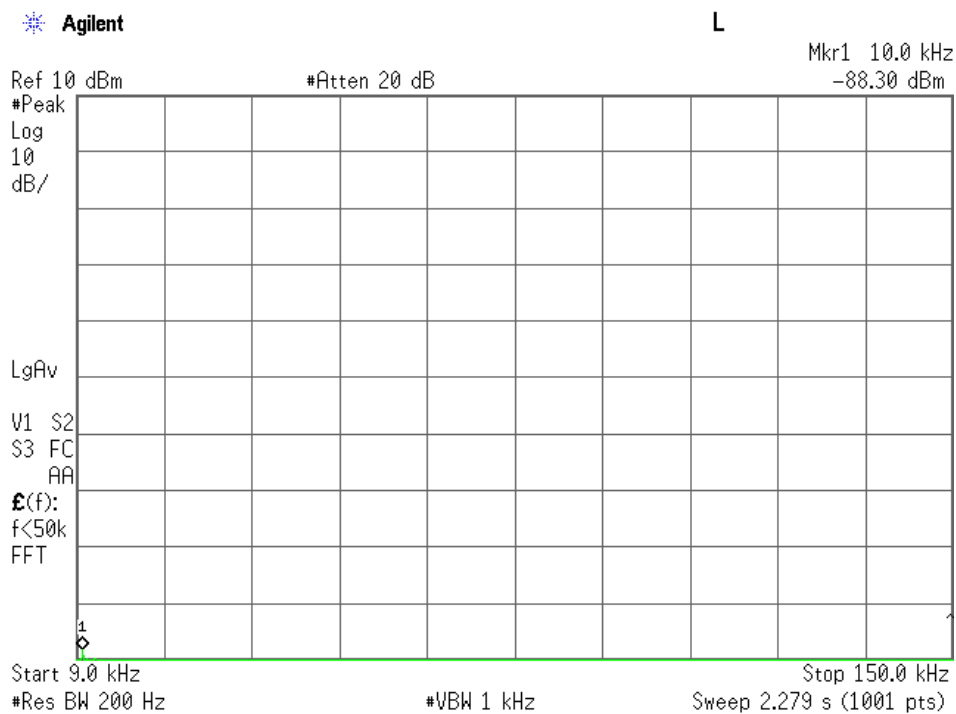


Middle Channel, Out-Of-Band Emissions (150 kHz – 30 MHz)

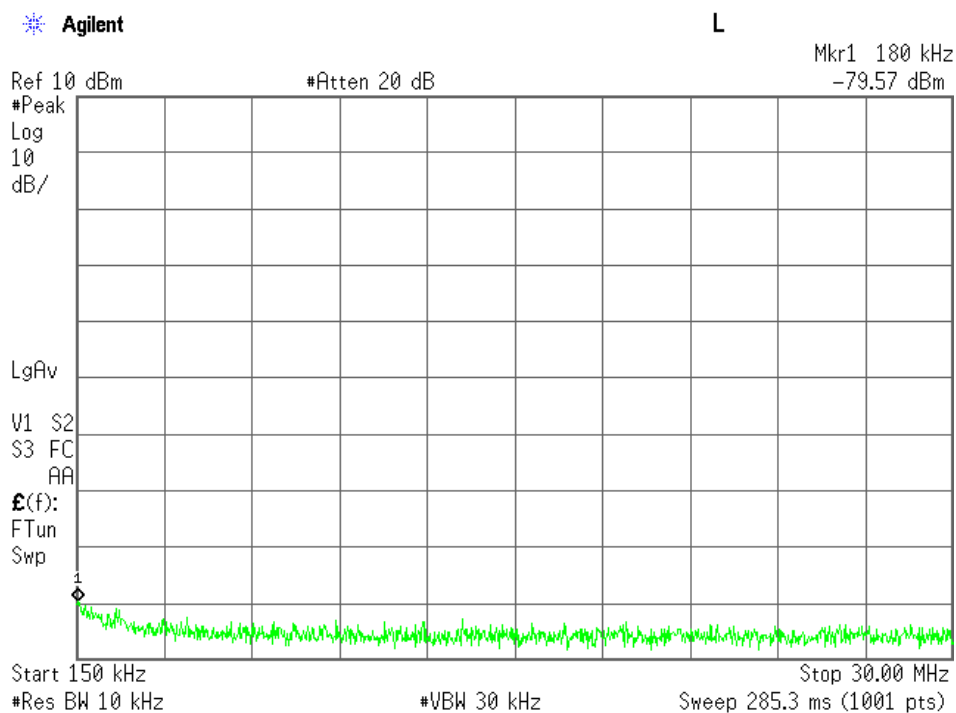


Middle Channel, Out-Of-Band Emissions (30 MHz – 1.2 GHz)

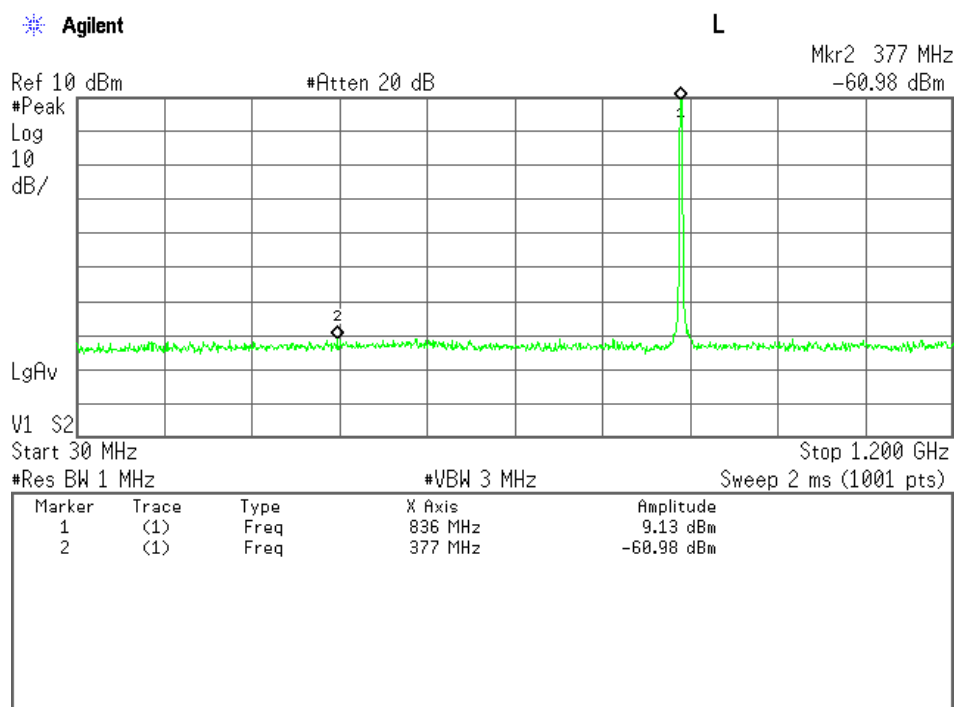


Middle Channel, Out-Of-Band Emissions (1.2 GHz – 10 GHz)

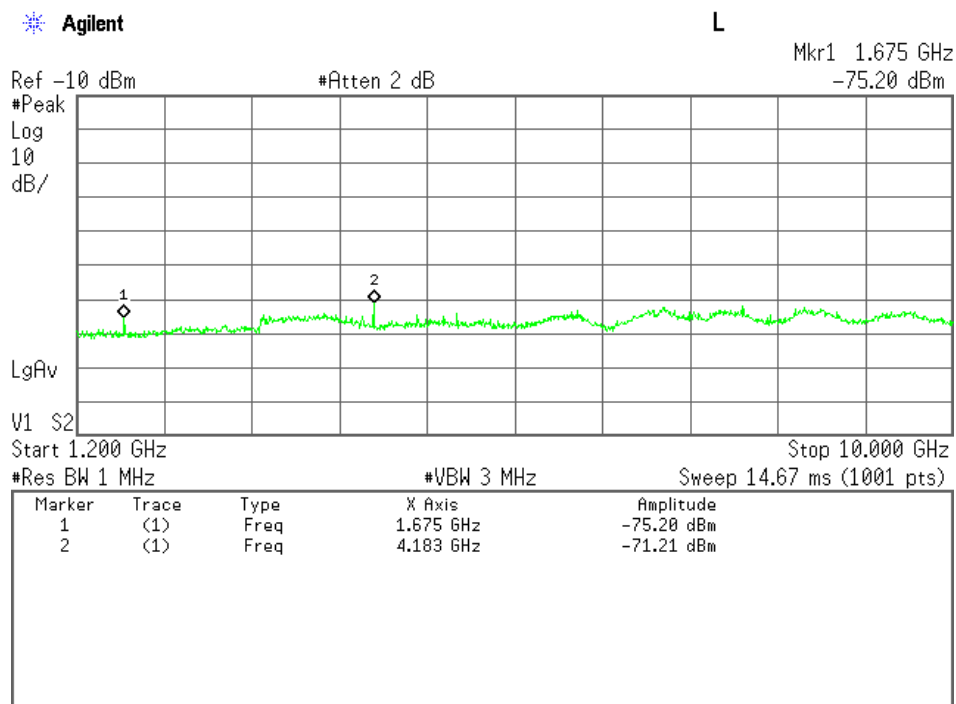


High Channel, Out-Of-Band Emissions (9 kHz – 150 kHz)

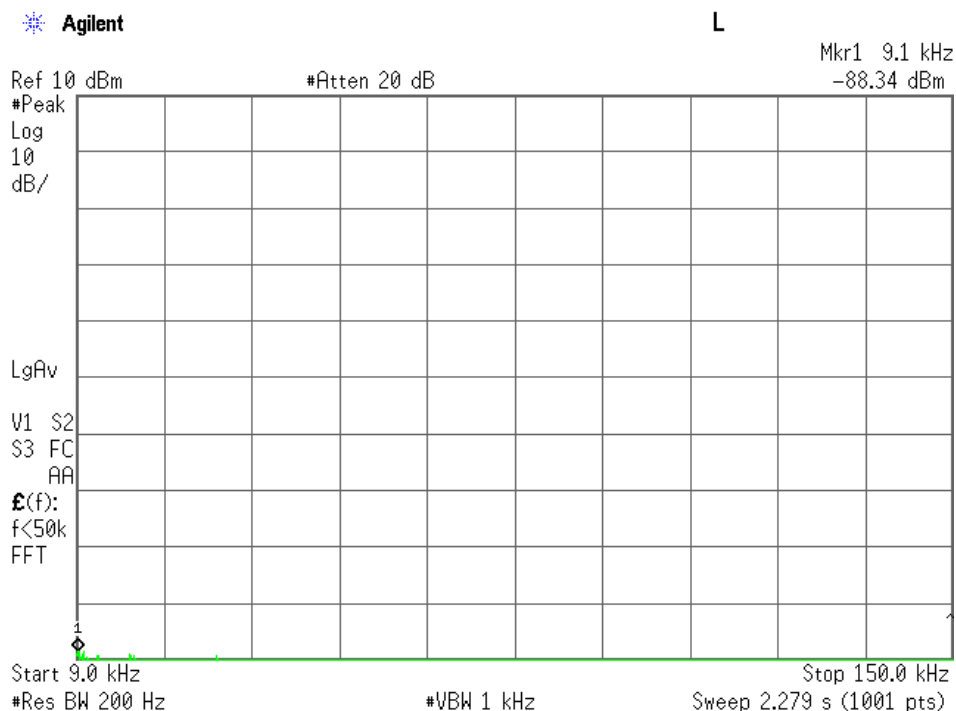


High Channel, Out-Of-Band Emissions (150 kHz – 30 MHz)

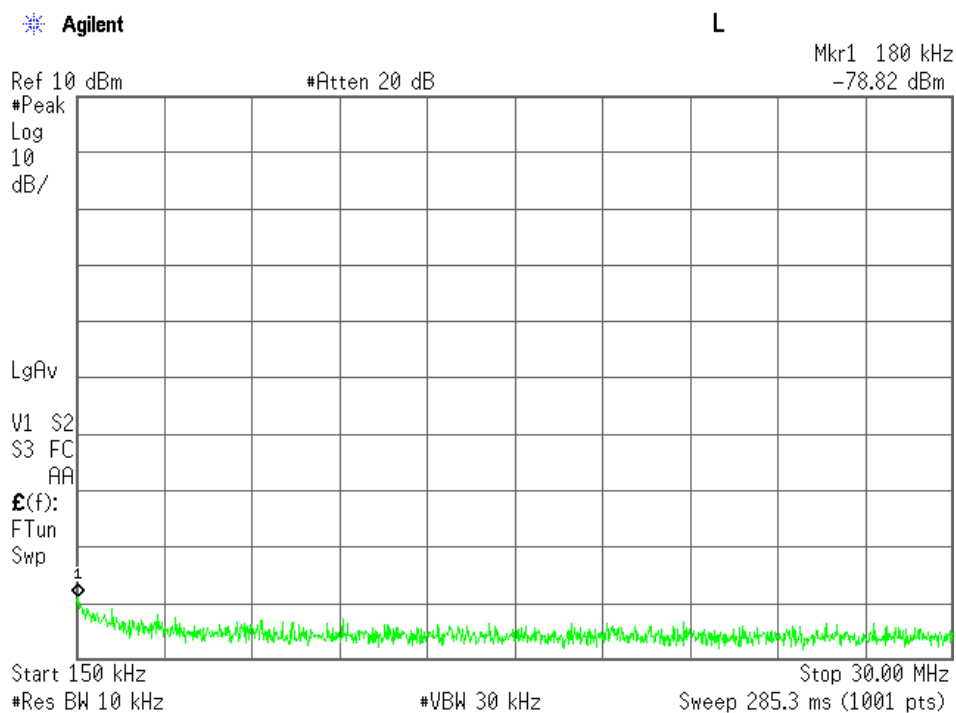

High Channel, Out-Of-Band Emissions (30 MHz – 1.2 GHz)

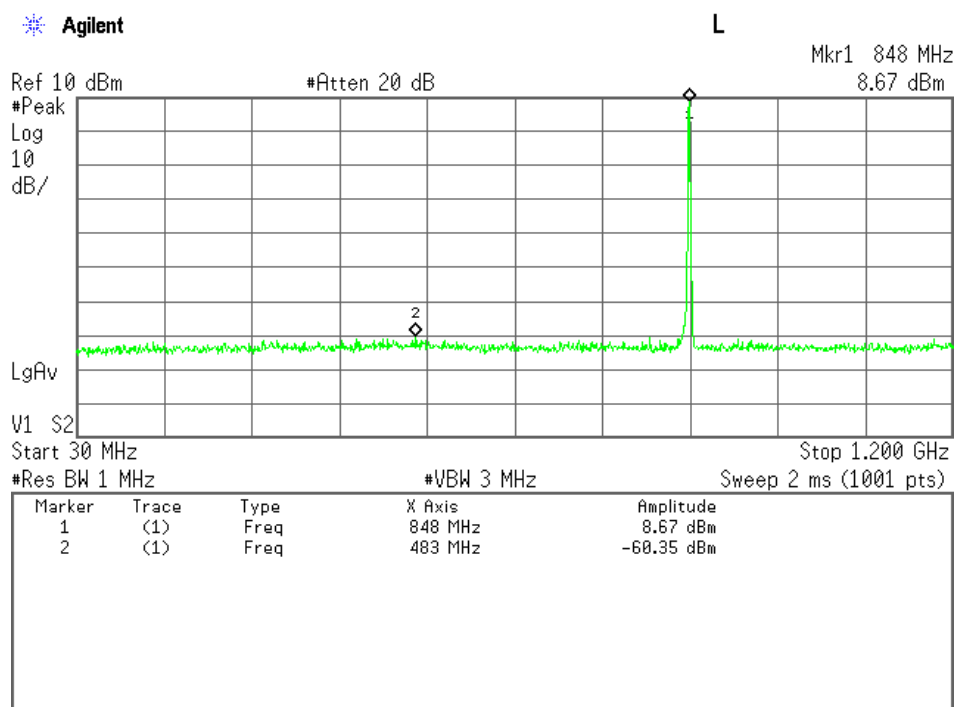

High Channel, Out-Of-Band Emissions (1.2 GHz – 10 GHz)

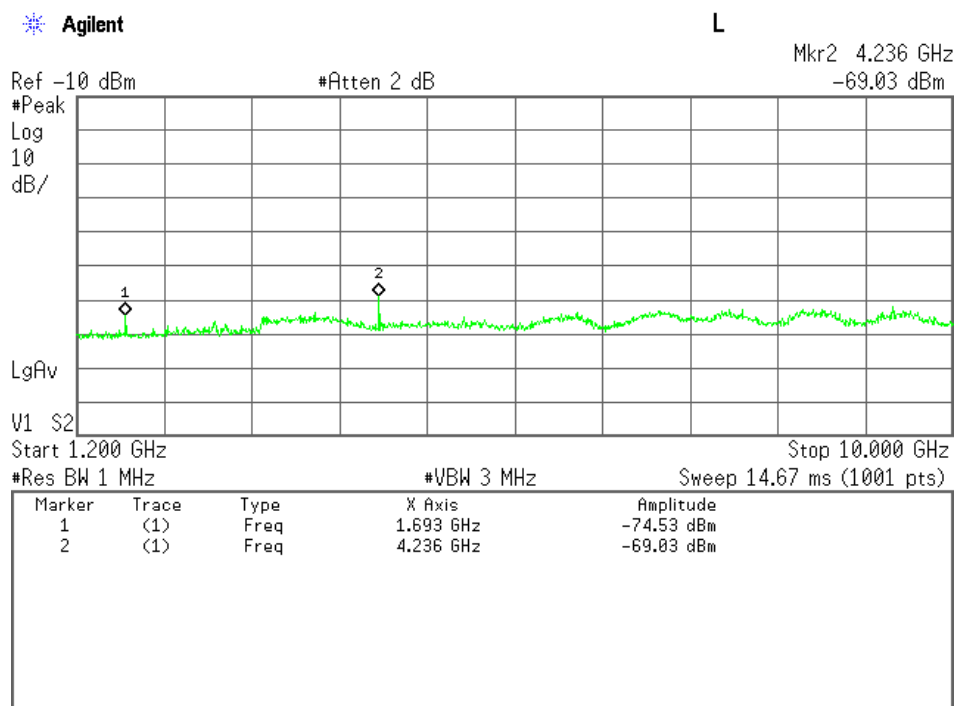

3) BW 5MHz(1RB)

(LTE 5MHz)

Test Date: October 26, 2015

Temp.: 24 °C, Humi: 35 %

Transmitting Frequency CH	Measured Frequency [MHz]	Corr. Factor [dB]	Meter Readings [dBm]	Limits [dBm]	Results [dBm]	Margin [dB]	Remarks	
20425	826.500	1653.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		2479.500	20.9	< -70.0	-13.0	< -49.1	> +36.1	C
		3306.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		4132.500	21.1	< -70.0	-13.0	< -48.9	> +35.9	C
		4959.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		5785.500	21.2	< -70.0	-13.0	< -48.8	> +35.8	C
		6612.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		7438.500	21.4	< -70.0	-13.0	< -48.6	> +35.6	C
		8265.000	21.5	< -70.0	-13.0	< -48.5	> +35.5	C
20525	836.500	1673.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		2509.500	20.9	< -70.0	-13.0	< -49.1	> +36.1	C
		3346.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		4182.500	21.1	< -70.0	-13.0	< -48.9	> +35.9	C
		5019.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		5855.500	21.2	< -70.0	-13.0	< -48.8	> +35.8	C
		6692.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		7528.500	21.4	< -70.0	-13.0	< -48.6	> +35.6	C
		8365.000	21.5	< -70.0	-13.0	< -48.5	> +35.5	C
20625	846.500	1693.000	21.2	< -70.0	-13.0	< -48.8	> +35.8	C
		2539.500	20.9	< -70.0	-13.0	< -49.1	> +36.1	C
		3386.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		4232.500	21.1	< -70.0	-13.0	< -48.9	> +35.9	C
		5079.000	21.1	< -70.0	-13.0	< -48.9	> +35.9	C
		5925.500	21.2	< -70.0	-13.0	< -48.8	> +35.8	C
		6772.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		7618.500	21.4	< -70.0	-13.0	< -48.6	> +35.6	C
		8465.000	21.6	< -70.0	-13.0	< -48.4	> +35.4	C

Calculated result at 8465.0 MHz, as the worst point shown on underline:

Corr. Factor	=	21.6 dB
+) <u>Meter Reading</u>	=	<u><-70.0 dBm</u>
Result	=	<-48.4 dBm


Minimum Margin: -13.0 - (<-48.4) = >35.4 (dB)

NOTES


- The spectrum was checked from 9 kHz to 10 GHz.
- Applied limits : $-13.0 \text{ [dBm]} = 10\log(\text{TP[mW]}) - (43 + 10\log(\text{tp[W]})) = 10\log(\text{TP[mW]}) - (43 + (10\log(\text{TP[mW]}) - 30))$
where, $\text{tp[W]} = \text{TP[mW]} / 1000$: Transmitter power at antenna terminal
- The correction factor is shown as follows:
Corr. Factor [dB] = Cable Loss + 10dB Pad Att. [dB] (9 kHz - 1.2 GHz)
Corr. Factor [dB] = Cable Loss + 10dB Pad Att. + High Pass Filter Loss (D-94) [dB] (over 1.2 GHz)
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- Setting of measuring instrument(s) :

	Detector Function	RES B.W.	V.B.W.	Sweep Time
A	Peak	200 Hz	1 kHz	AUTO
B	Peak	10 kHz	30 kHz	AUTO
C	Peak	1 MHz	3 MHz	AUTO


Low Channel, Out-Of-Band Emissions (9 kHz – 150 kHz)

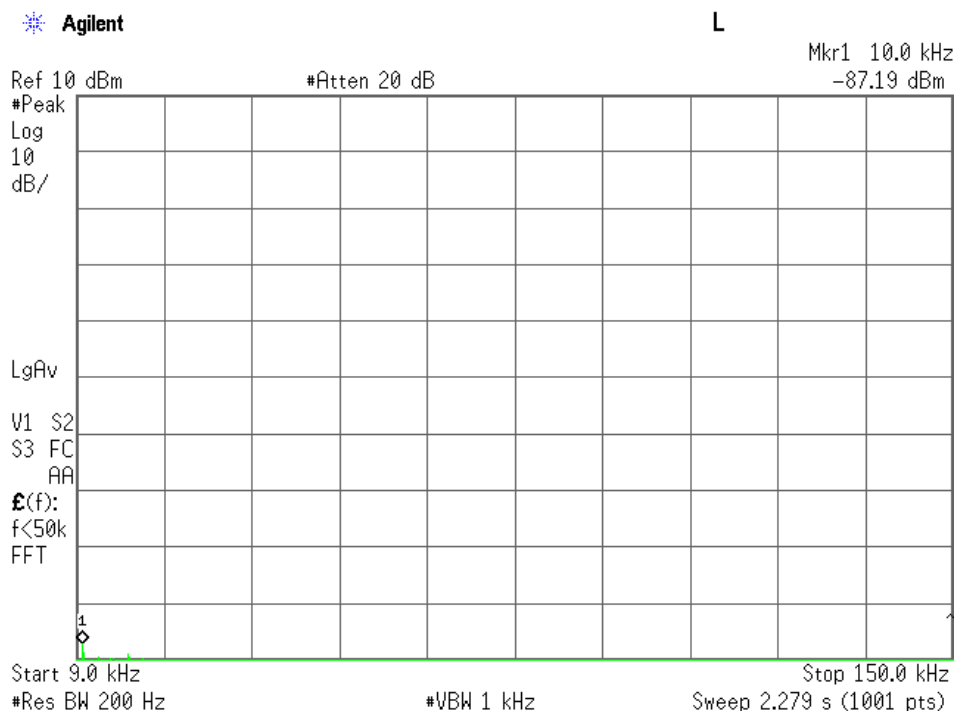


Low Channel, Out-Of-Band Emissions (150 kHz – 30 MHz)

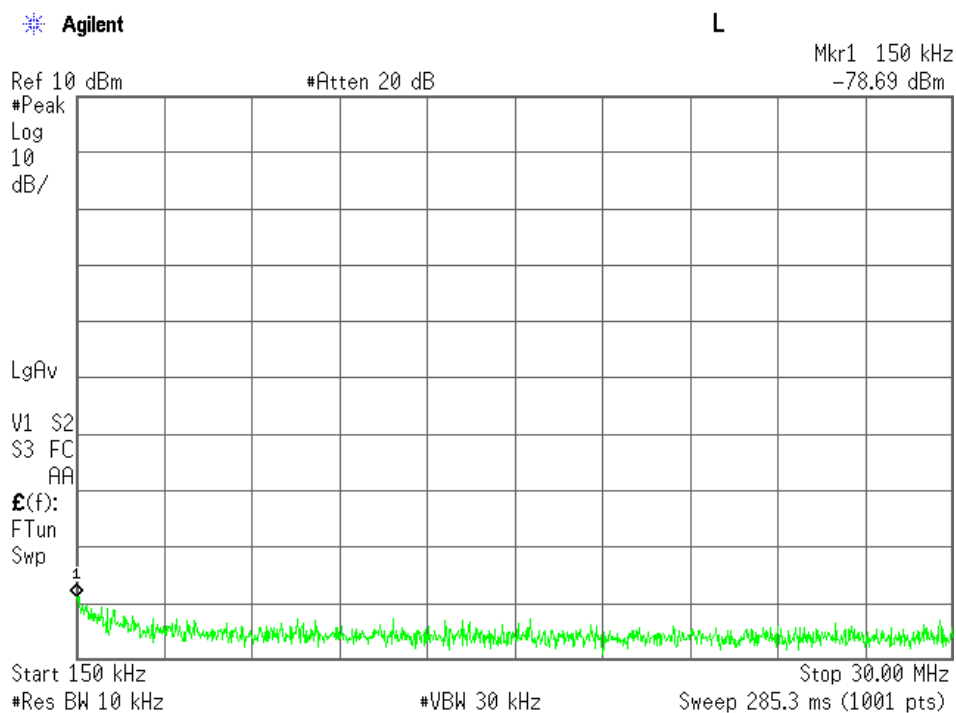


Low Channel, Out-Of-Band Emissions (30 MHz – 1.2 GHz)

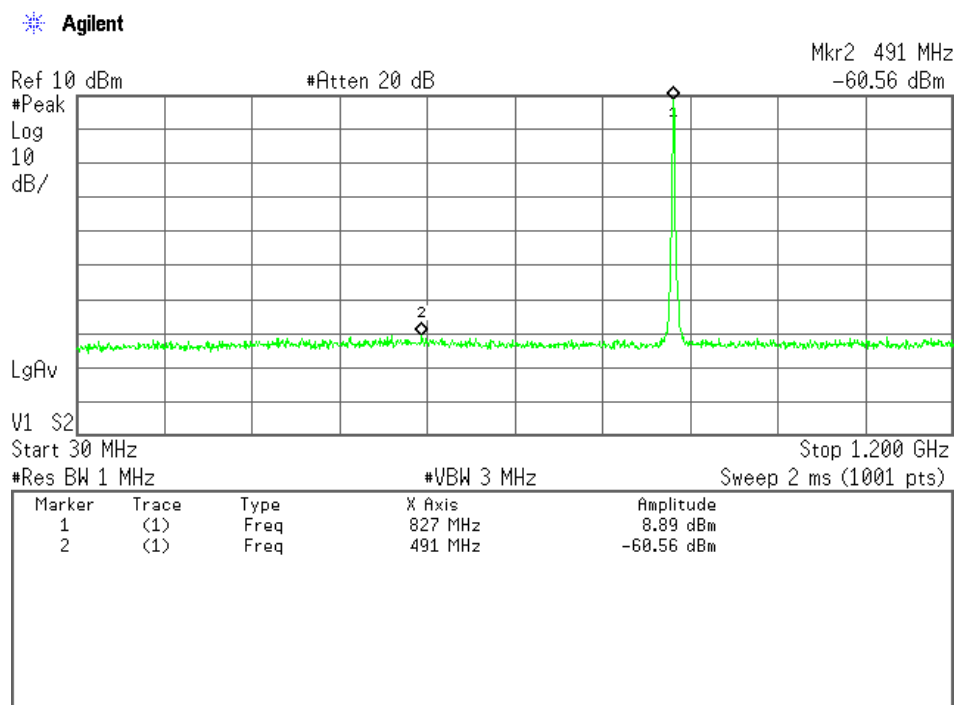


Low Channel, Out-Of-Band Emissions (1.2 GHz – 100 GHz)

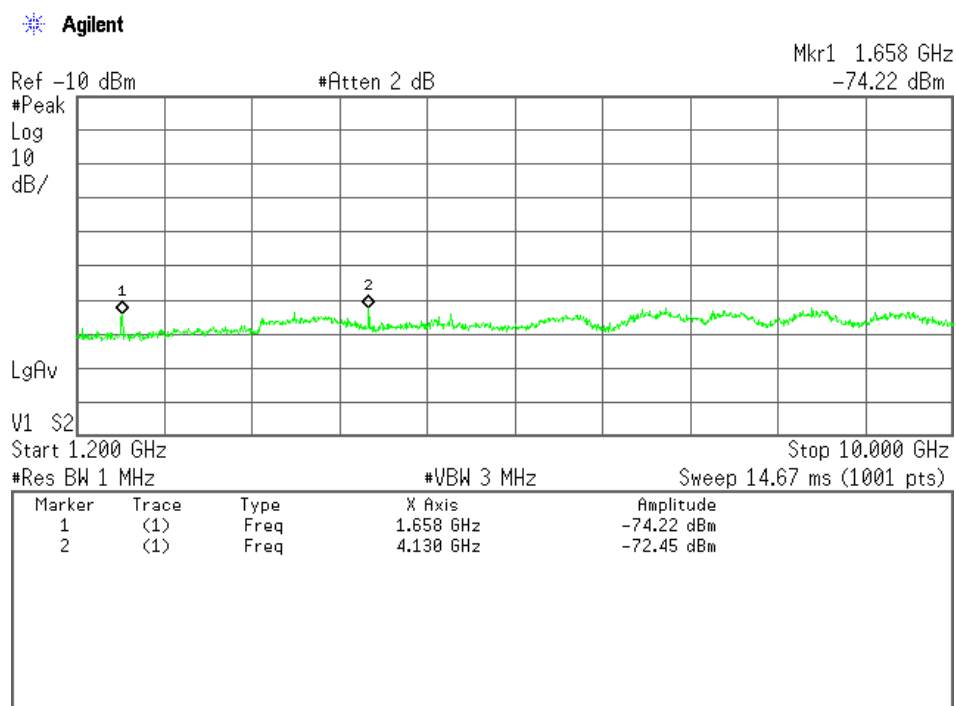


Middle Channel, Out-Of-Band Emissions (9 kHz – 150 kHz)

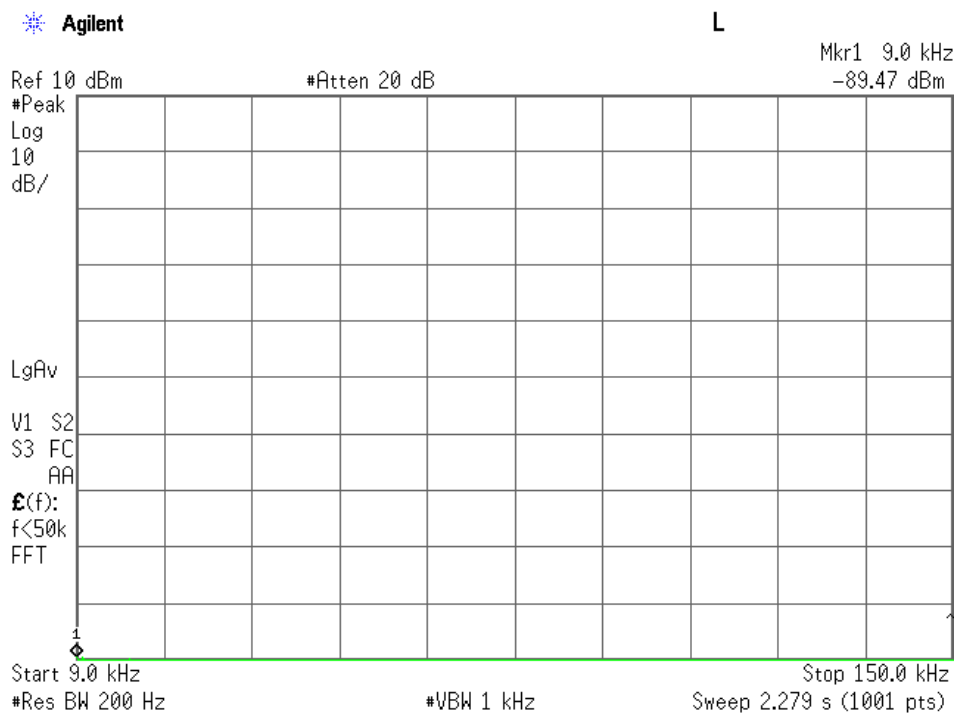


Middle Channel, Out-Of-Band Emissions (150 kHz – 30 MHz)

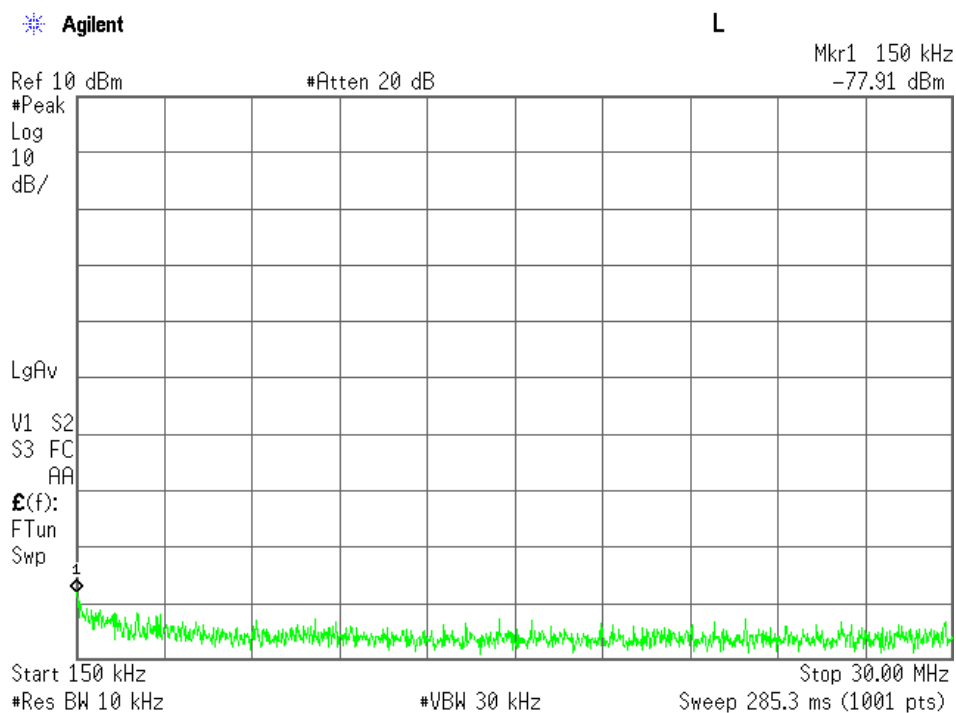


Middle Channel, Out-Of-Band Emissions (30 MHz – 1.2 GHz)

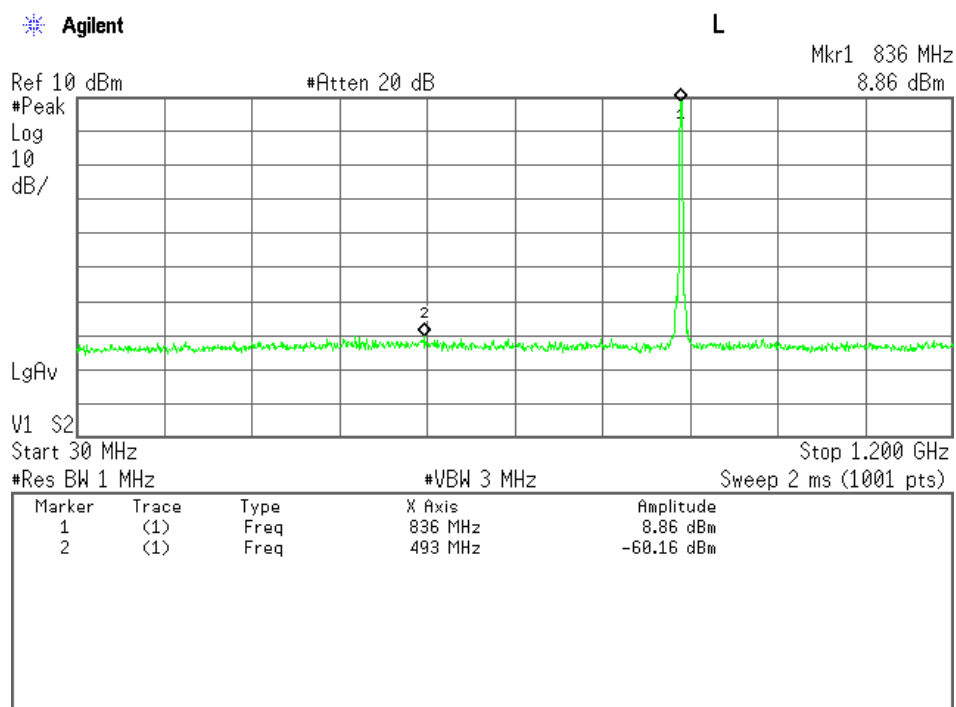


Middle Channel, Out-Of-Band Emissions (1.2 GHz – 10 GHz)

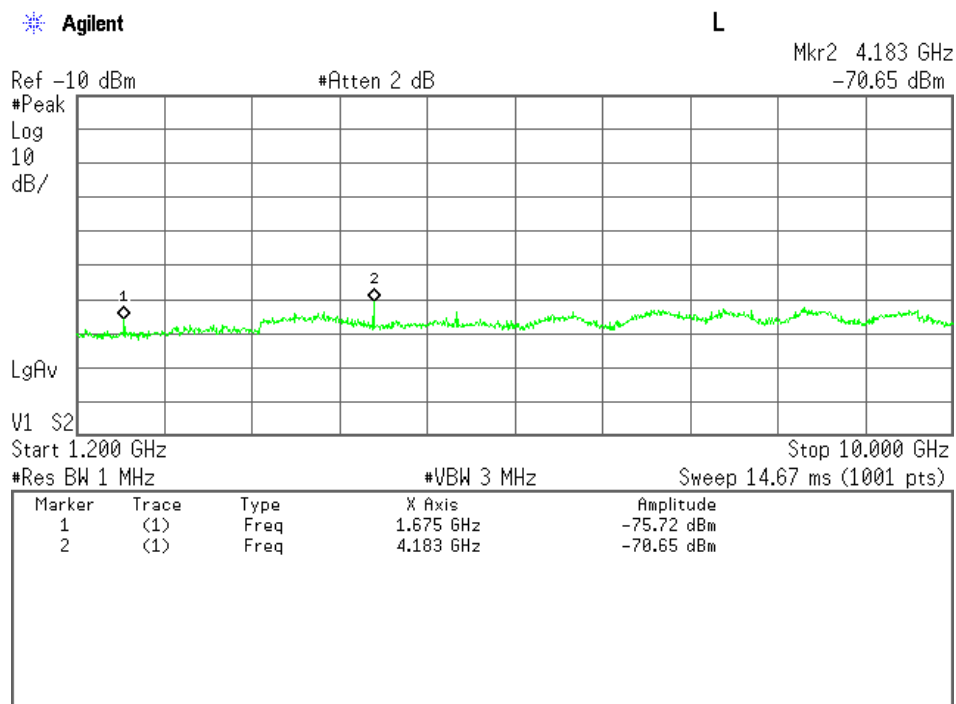


High Channel, Out-Of-Band Emissions (9 kHz – 150 kHz)

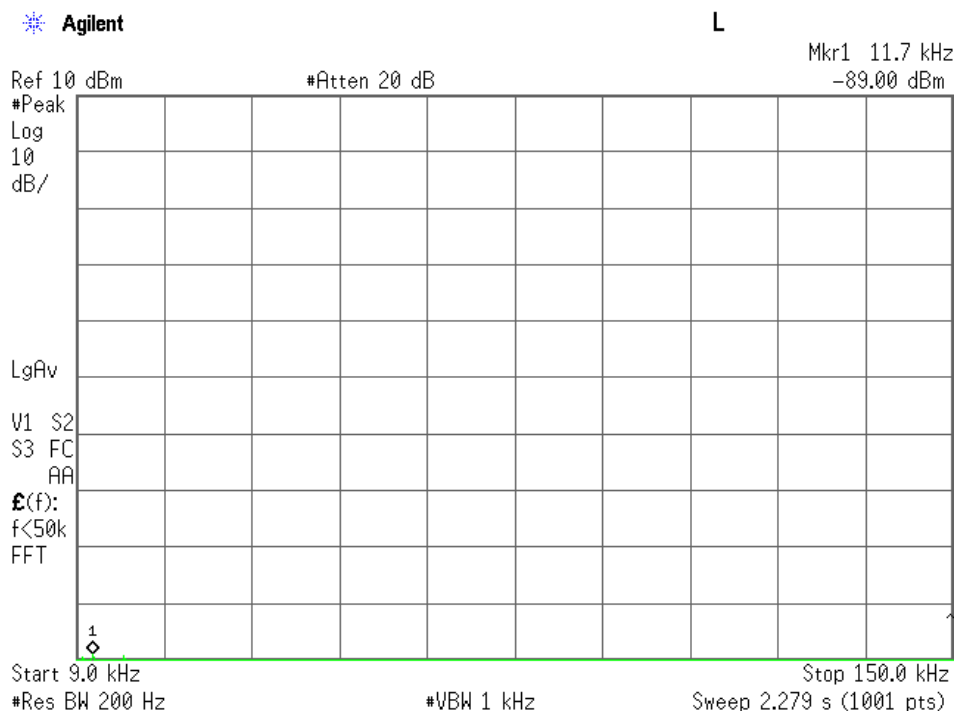


High Channel, Out-Of-Band Emissions (150 kHz – 30 MHz)

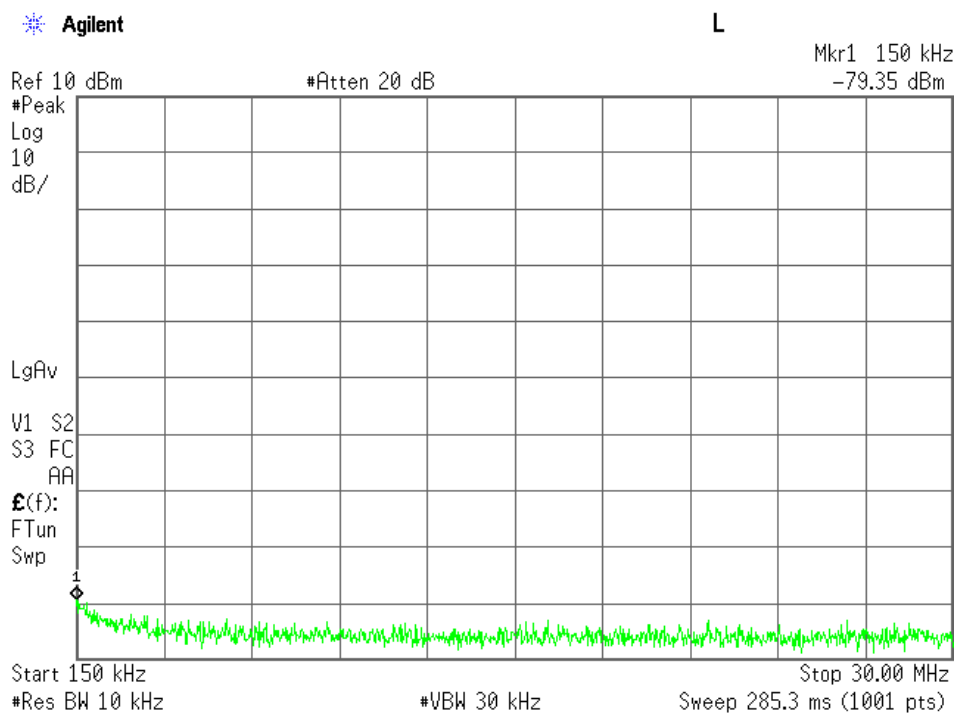

High Channel, Out-Of-Band Emissions (30 MHz – 1.2 GHz)

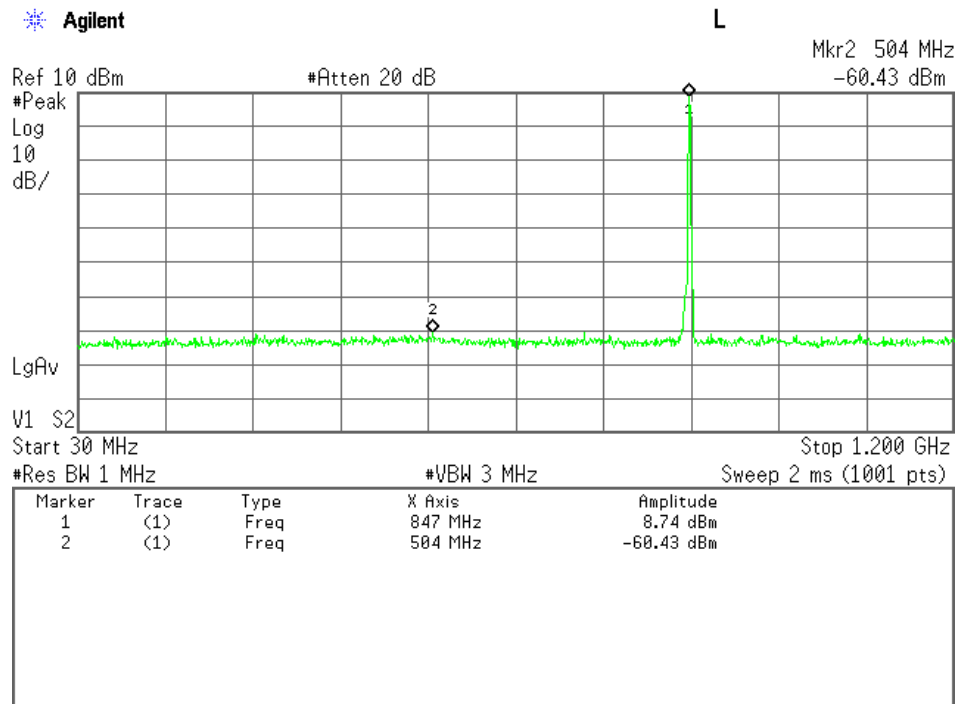

High Channel, Out-Of-Band Emissions (1.2 GHz – 10 GHz)

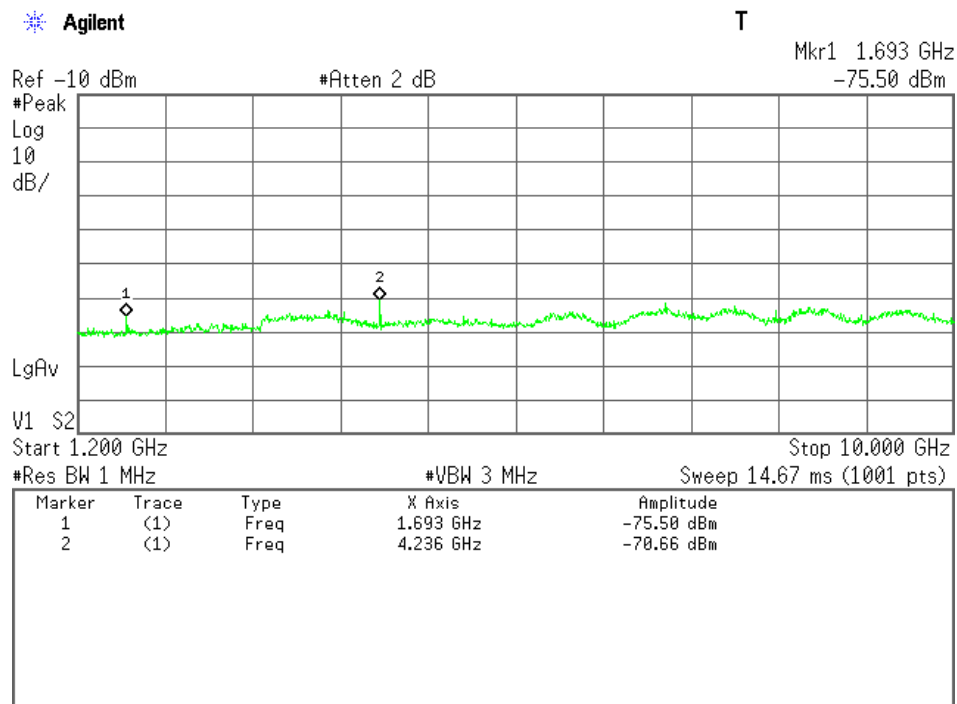

4) BW 10MHz(1RB)

(LTE 10MHz)

Test Date: October 26, 2015

Temp.: 24 °C, Humi: 35 %

Transmitting Frequency CH	Frequency [MHz]	Measured Frequency [MHz]	Corr. Factor [dB]	Meter Readings [dBm]	Limits [dBm]	Results [dBm]	Margin [dB]	Remarks
20450	829.000	1658.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		2487.000	20.9	< -70.0	-13.0	< -49.1	> +36.1	C
		3316.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		4145.000	21.1	< -70.0	-13.0	< -48.9	> +35.9	C
		4974.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		5803.000	21.2	< -70.0	-13.0	< -48.8	> +35.8	C
		6632.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		7461.000	21.4	< -70.0	-13.0	< -48.6	> +35.6	C
		8290.000	21.5	< -70.0	-13.0	< -48.5	> +35.5	C
20525	836.500	1673.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		2509.500	20.9	< -70.0	-13.0	< -49.1	> +36.1	C
		3346.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		4182.500	21.1	< -70.0	-13.0	< -48.9	> +35.9	C
		5019.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		5855.500	21.2	< -70.0	-13.0	< -48.8	> +35.8	C
		6692.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		7528.500	21.4	< -70.0	-13.0	< -48.6	> +35.6	C
		8365.000	21.5	< -70.0	-13.0	< -48.5	> +35.5	C
20600	844.000	1688.000	21.2	< -70.0	-13.0	< -48.8	> +35.8	C
		2532.000	20.9	< -70.0	-13.0	< -49.1	> +36.1	C
		3376.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		4220.000	21.1	-67.7	-13.0	-46.6	+33.6	C
		5064.000	21.0	< -70.0	-13.0	< -49.0	> +36.0	C
		5908.000	21.2	< -70.0	-13.0	< -48.8	> +35.8	C
		6752.000	21.3	< -70.0	-13.0	< -48.7	> +35.7	C
		7596.000	21.4	< -70.0	-13.0	< -48.6	> +35.6	C
		8440.000	21.5	< -70.0	-13.0	< -48.5	> +35.5	C

Calculated result at 4220.0 MHz, as the worst point shown on underline:

Corr. Factor	=	21.1 dB
+) <u>Meter Reading</u>	=	<u>-67.7 dBm</u>
Result	=	-46.6 dBm


Minimum Margin: -13.0 - (-46.6) = 33.6 (dB)

NOTES


- The spectrum was checked from 9 kHz to 10 GHz.
- Applied limits : $-13.0 \text{ [dBm]} = 10\log(\text{TP[mW]}) - (43 + 10\log(\text{tp[W]})) = 10\log(\text{TP[mW]}) - (43 + (10\log(\text{TP[mW]}) - 30))$
where, $\text{tp[W]} = \text{TP[mW]} / 1000$: Transmitter power at antenna terminal
- The correction factor is shown as follows:
Corr. Factor [dB] = Cable Loss + 10dB Pad Att. [dB] (9 kHz - 1.2 GHz)
Corr. Factor [dB] = Cable Loss + 10dB Pad Att. + High Pass Filter Loss (D-94) [dB] (over 1.2 GHz)
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- Setting of measuring instrument(s) :

	Detector Function	RES B.W.	V.B.W.	Sweep Time
A	Peak	200 Hz	1 kHz	AUTO
B	Peak	10 kHz	30 kHz	AUTO
C	Peak	1 MHz	3 MHz	AUTO


Low Channel, Out-Of-Band Emissions (9 kHz – 150 kHz)

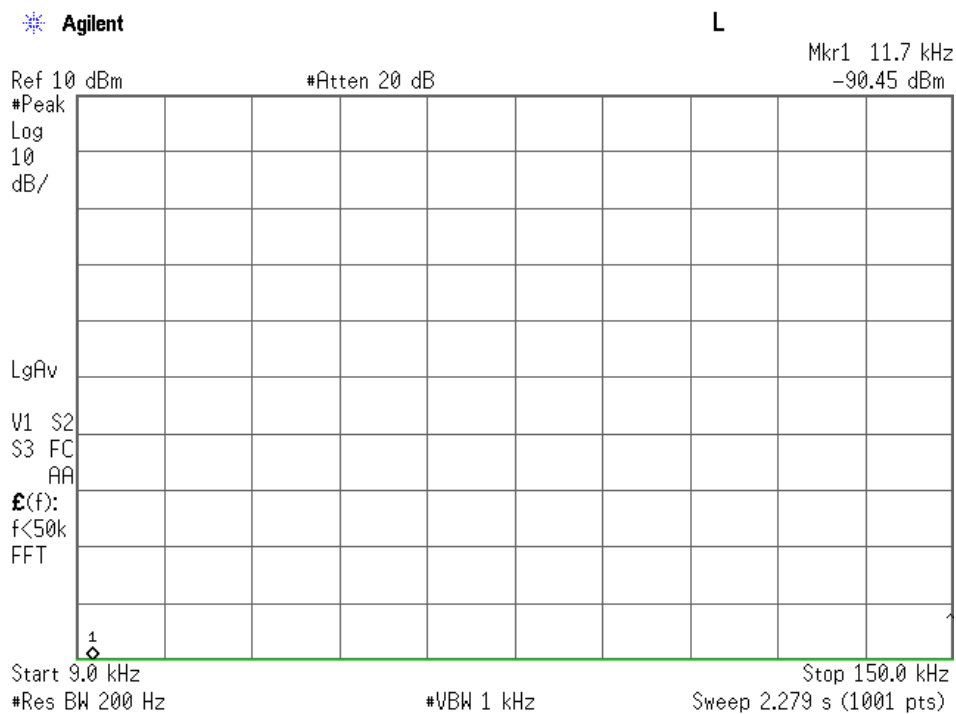


Low Channel, Out-Of-Band Emissions (150 kHz – 30 MHz)

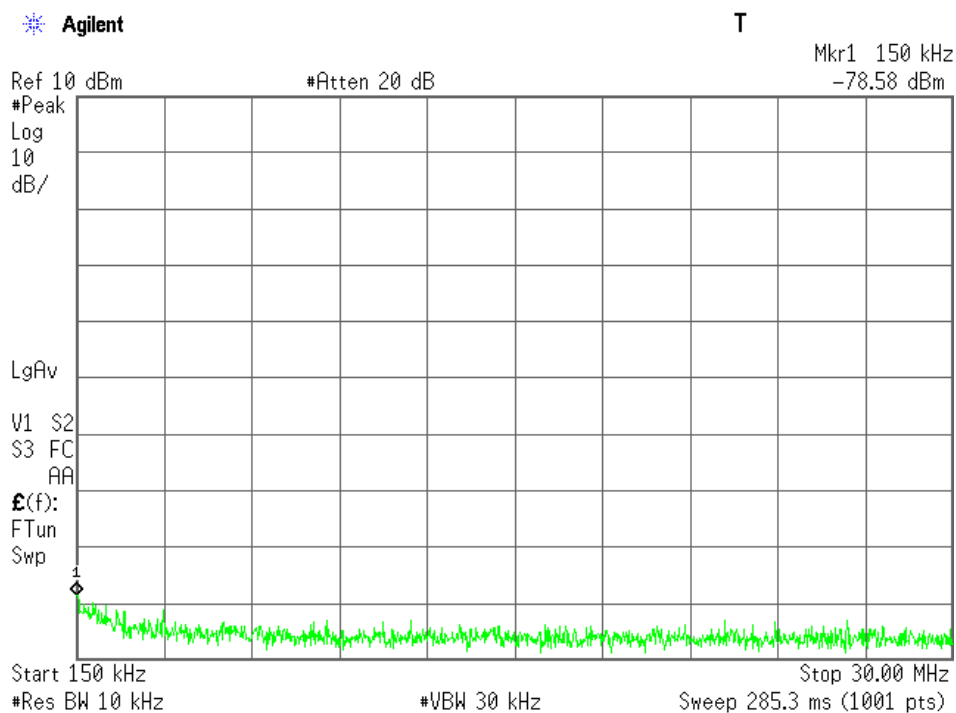


Low Channel, Out-Of-Band Emissions (30 MHz – 1.2 GHz)

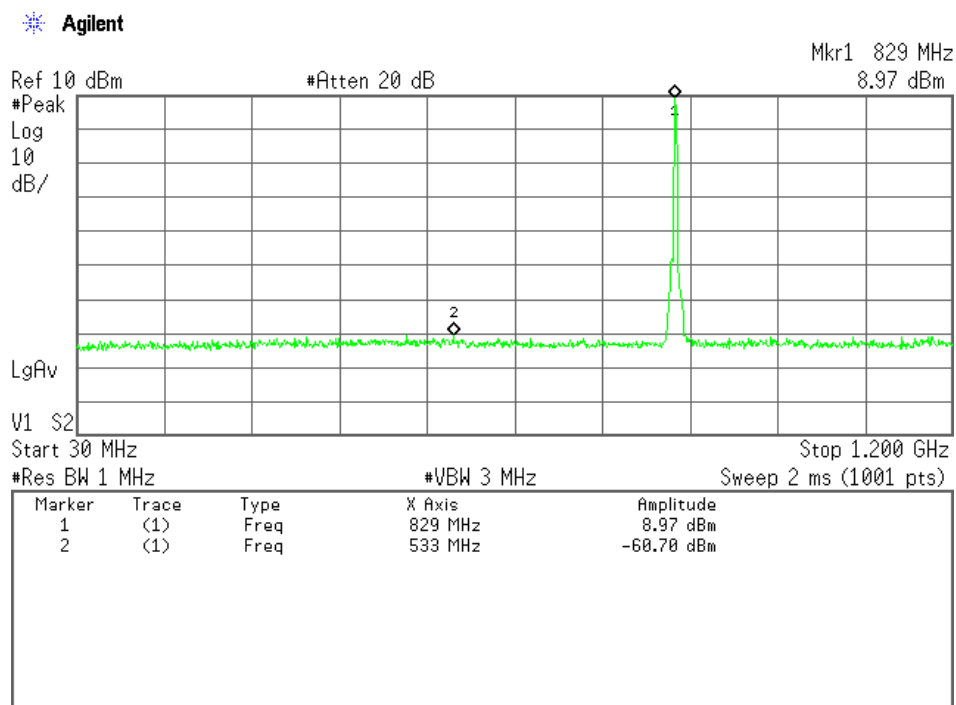


Low Channel, Out-Of-Band Emissions (1.2 GHz – 100 GHz)

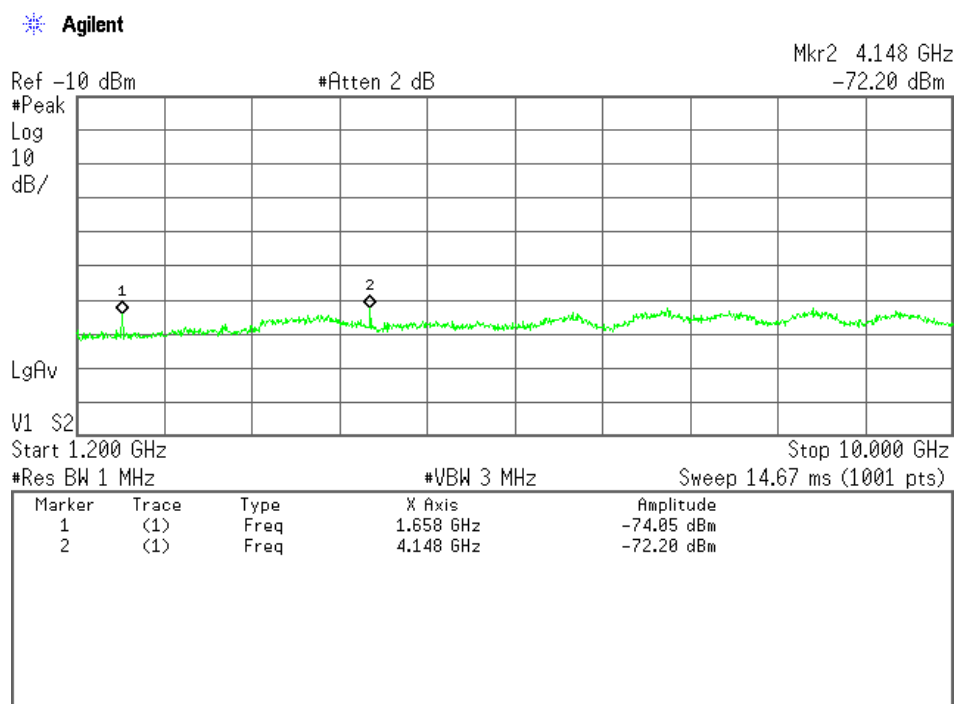


Middle Channel, Out-Of-Band Emissions (9 kHz – 150 kHz)

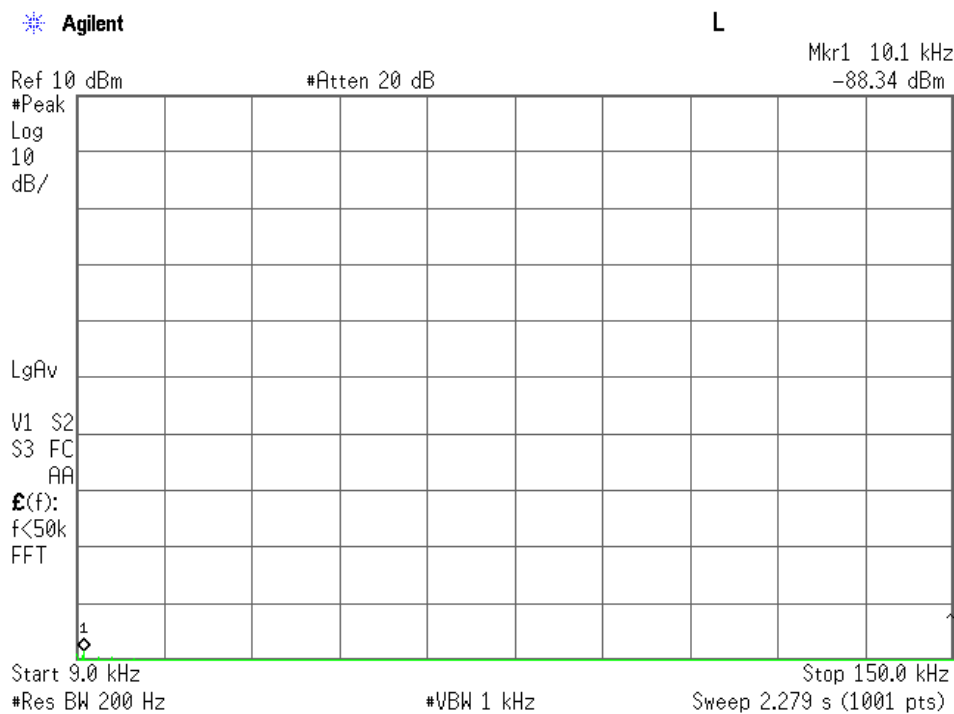


Middle Channel, Out-Of-Band Emissions (150 kHz – 30 MHz)

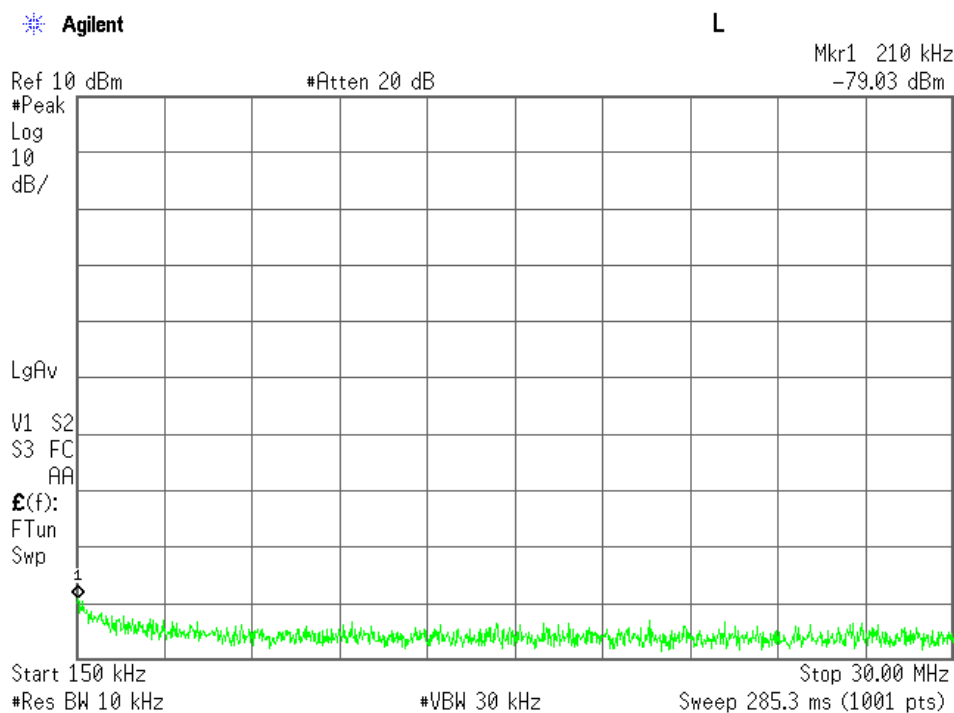


Middle Channel, Out-Of-Band Emissions (30 MHz – 1.2 GHz)

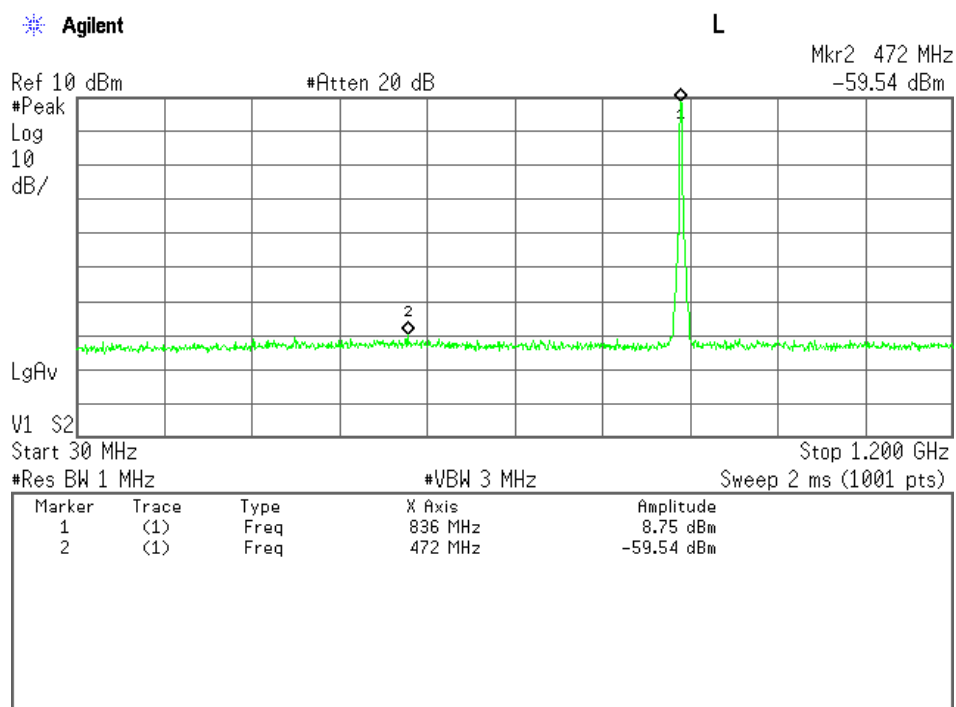


Middle Channel, Out-Of-Band Emissions (1.2 GHz – 10 GHz)

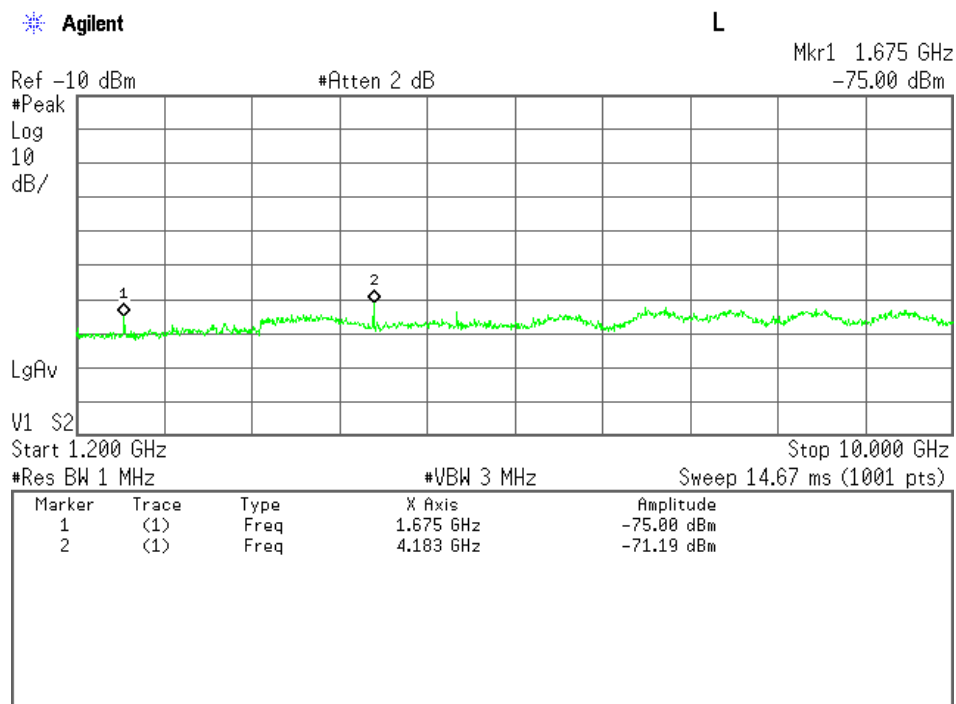


High Channel, Out-Of-Band Emissions (9 kHz – 150 kHz)

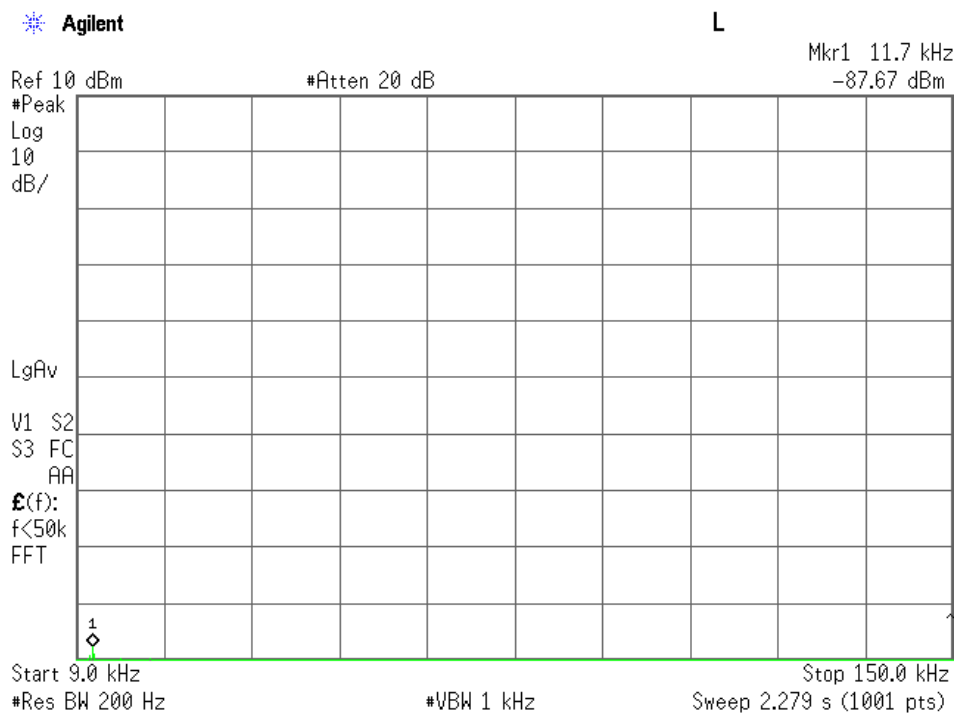


High Channel, Out-Of-Band Emissions (150 kHz – 30 MHz)

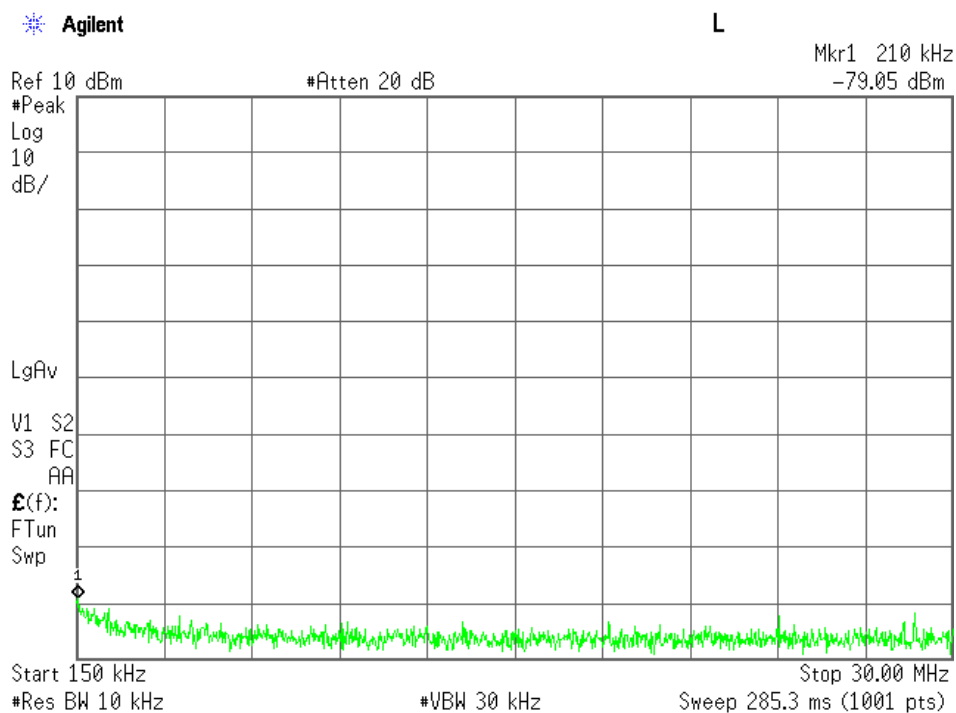

High Channel, Out-Of-Band Emissions (30 MHz – 1.2 GHz)

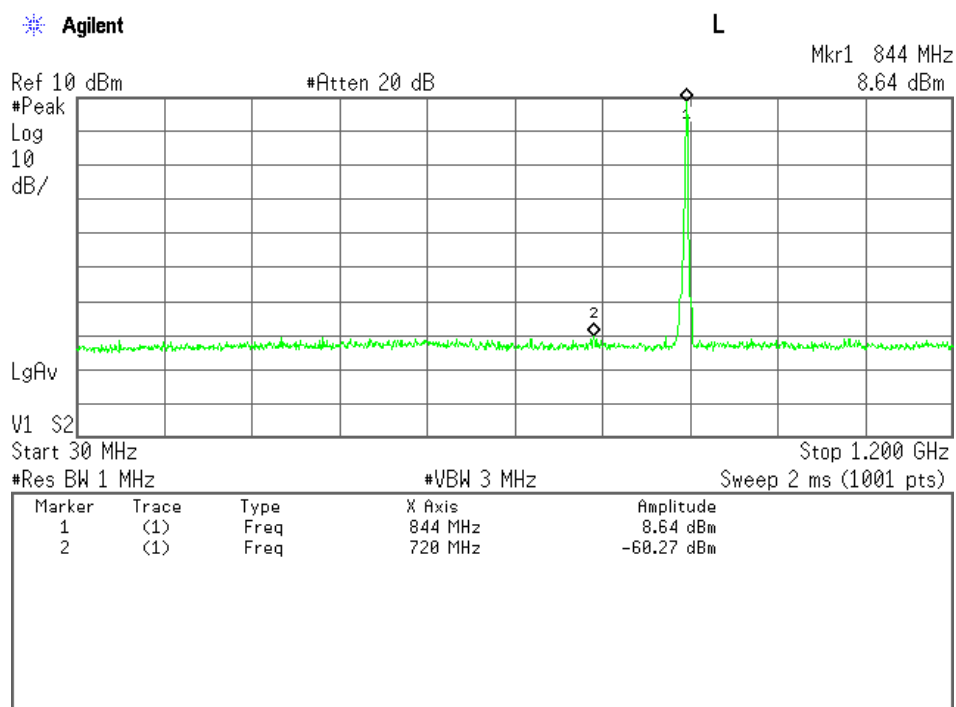

High Channel, Out-Of-Band Emissions (1.2 GHz – 10 GHz)

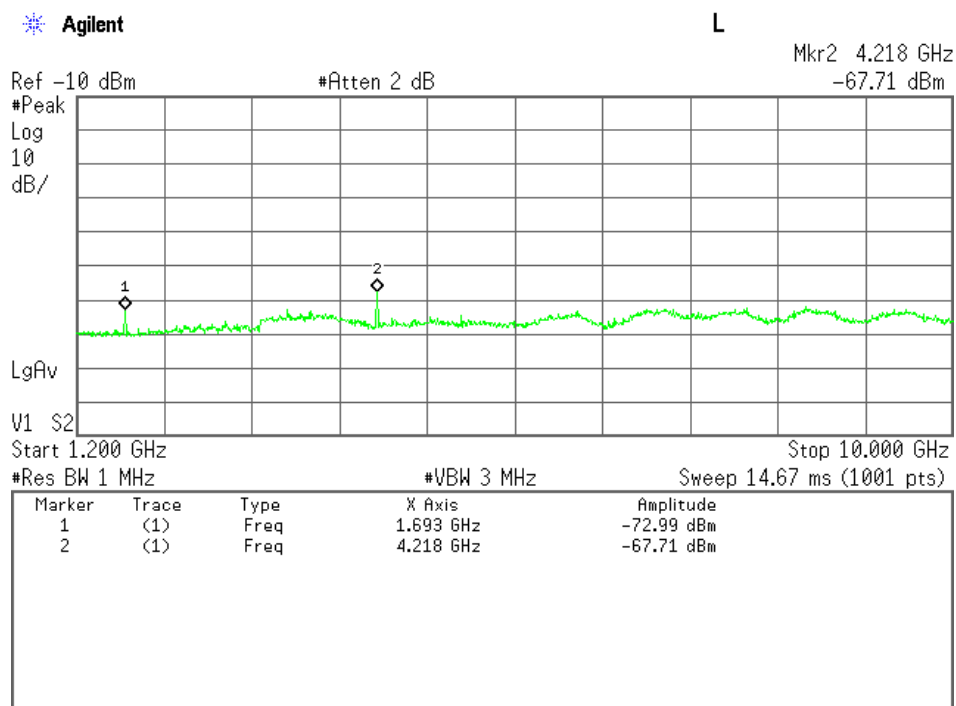

7.6 Band-Edge Emission (§2.1051)

For the requirements, ☒ - Applicable [☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

7.6.1 Test Results

For the standard, ☒ - Passed ☐ - Failed ☐ - Not judged

Min. Limit Margin 7.4 dB at 824.0 MHz

The Band-Edge level is -20.4 dBm at 824.0 MHz

Uncertainty of Measurement Results ± 1.4 dB(2 σ)

Remarks : BW 3MHz QPSK


7.6.2 Test Instruments

Shielded Room S4				
Type	Model	Serial No. (ID)	Manufacturer	Cal. Due
Spectrum Analyzer	E4446A	US44300388 (A-39)	Agilent	2016/08/11
Attenuator	43KC-20	1418003 (D-41)	Anritsu	2016/07/05
RF Cable	SUCOFLEX102	14253/2 (C-52)	HUBER+SUHNER	2016/08/16

NOTE : The calibration interval of the above test instruments is 12 months.

7.6.3 Test Method and Test Setup (Diagrammatic illustration)

The test system is shown as follows:



The setting of the spectrum analyzer are shown as follows:

LTE Bandwidth	1.4 MHz	3 MHz	5 MHz	10 MHz
Band-Edge Frequency	824 MHz / 849 MHz			
Res. Bandwidth	20 kHz	30 kHz	51 kHz	100 kHz
Video Bandwidth	62 kHz	100 kHz	160 kHz	300 kHz
Span	5 MHz	10 MHz	20 MHz	20 MHz
Sweep Time	100 ms			
Detector	Power Average(RMS)			
Trace	Average			

7.6.4 Test Data

Test Date :October 26, 2015


Temp.:24°C, Humi:35%

1-1) BW 1.4MHz


Mode: QPSK

Channel	Frequency (MHz)	Band-Edge Frequency (MHz)	Level (dBm)	Limits (dBm)	Margin (dB)
20407	824.70	824.0	-25.8 (at 824.0 MHz)	-13.0	+12.8
20643	848.30	849.0	-36.5 (at 849.0 MHz)	-13.0	+23.5


Low Channel(1RB Offset 0), Band-Edge Emission

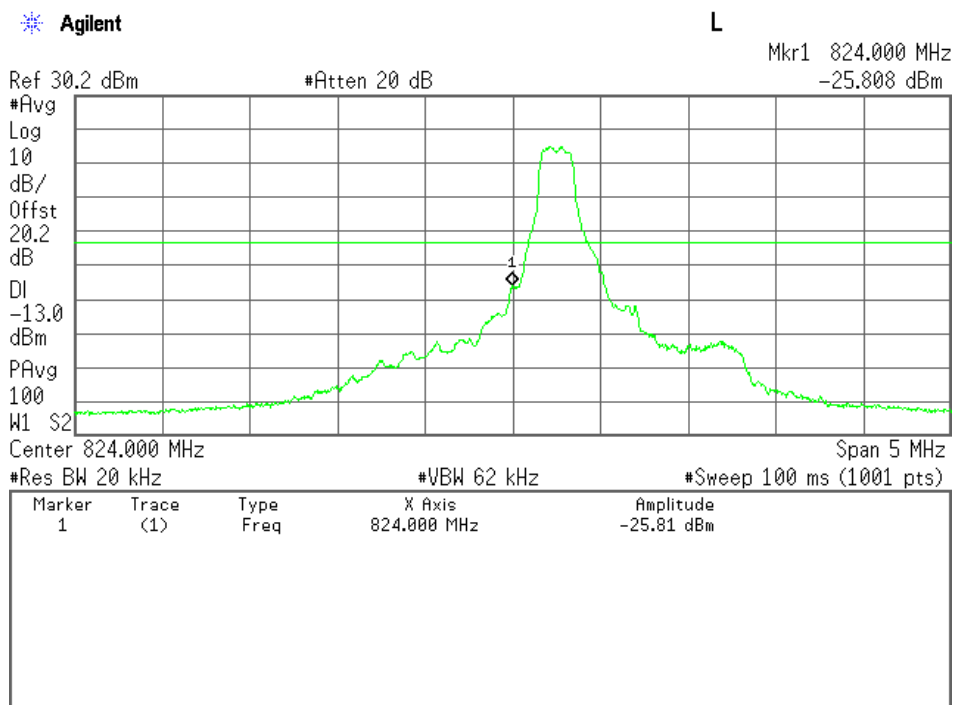


Low Channel(Full RB), Band-Edge Emission

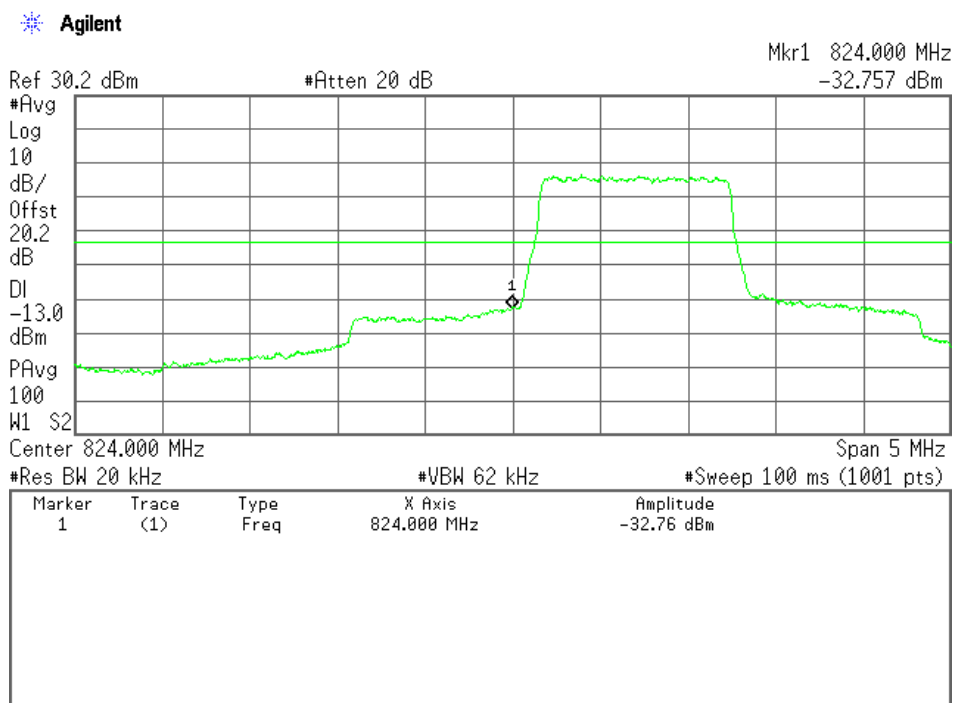

High Channel(1RB Offset Max), Band-Edge Emission

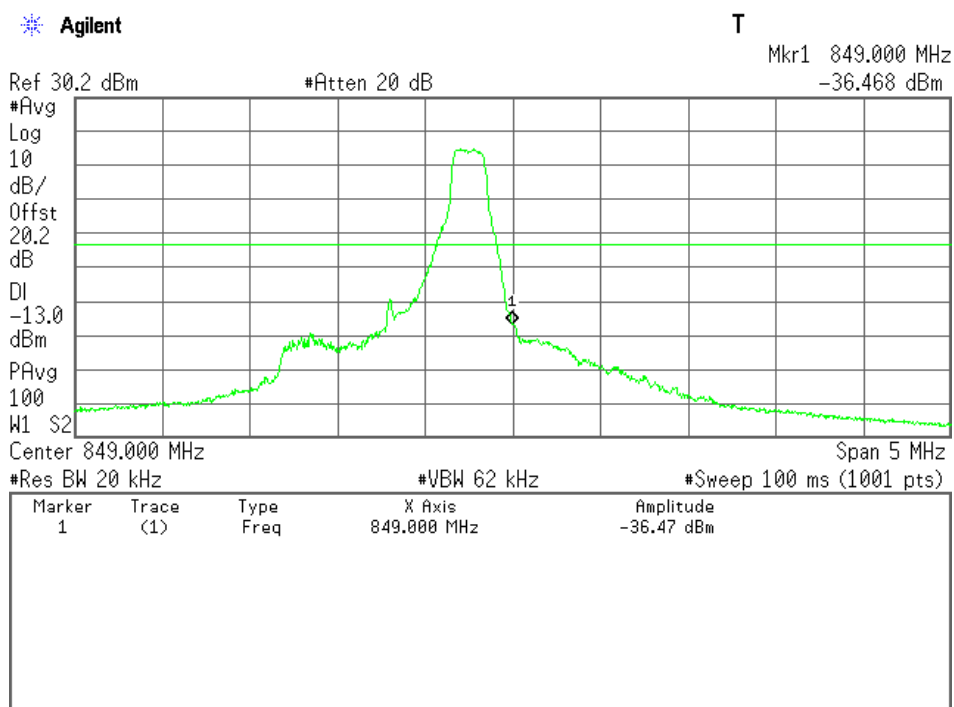

High Channel(Full RB), Band-Edge Emission

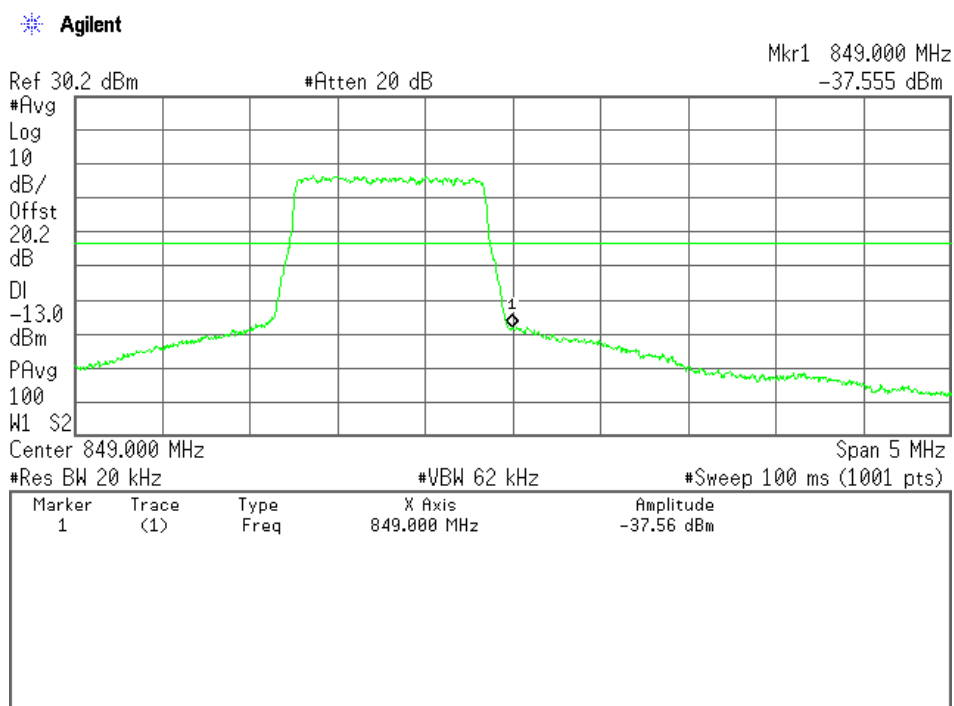


1-2) BW 1.4MHz


Mode:16 QAM

Channel	Frequency (MHz)	Band-Edge Frequency (MHz)	Level (dBm)	Limits (dBm)	Margin (dB)
20407	824.70	824.0	-30.7 (at 824.0 MHz)	-13.0	+17.7
20643	848.30	849.0	-37.2 (at 849.0 MHz)	-13.0	+24.2

Low Channel(1RB Offset 0), Band-Edge Emission

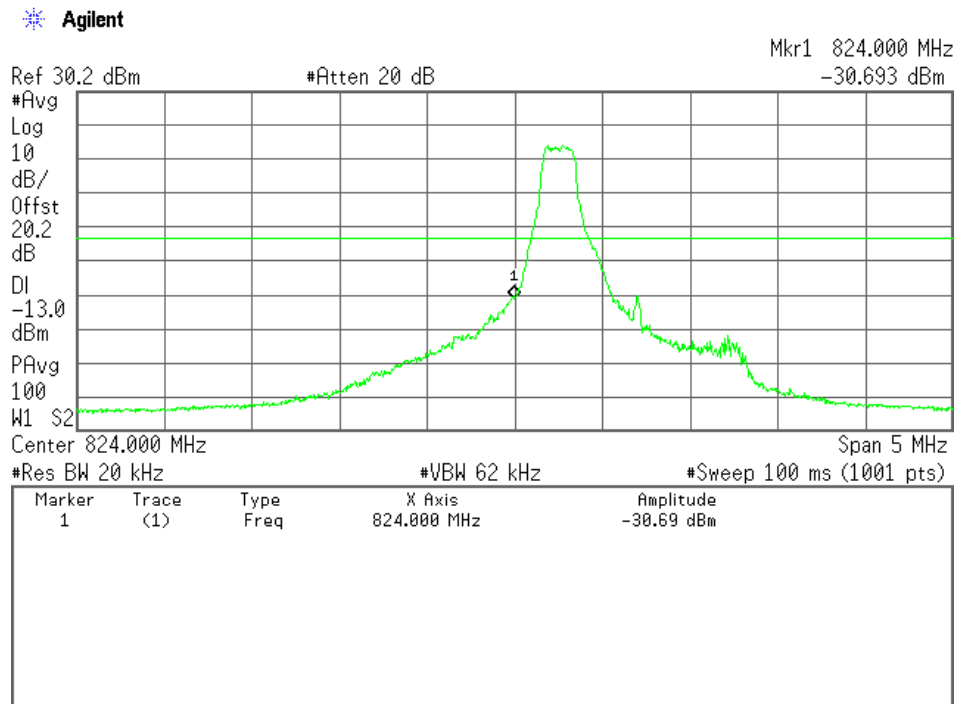


Low Channel(Full RB), Band-Edge Emission

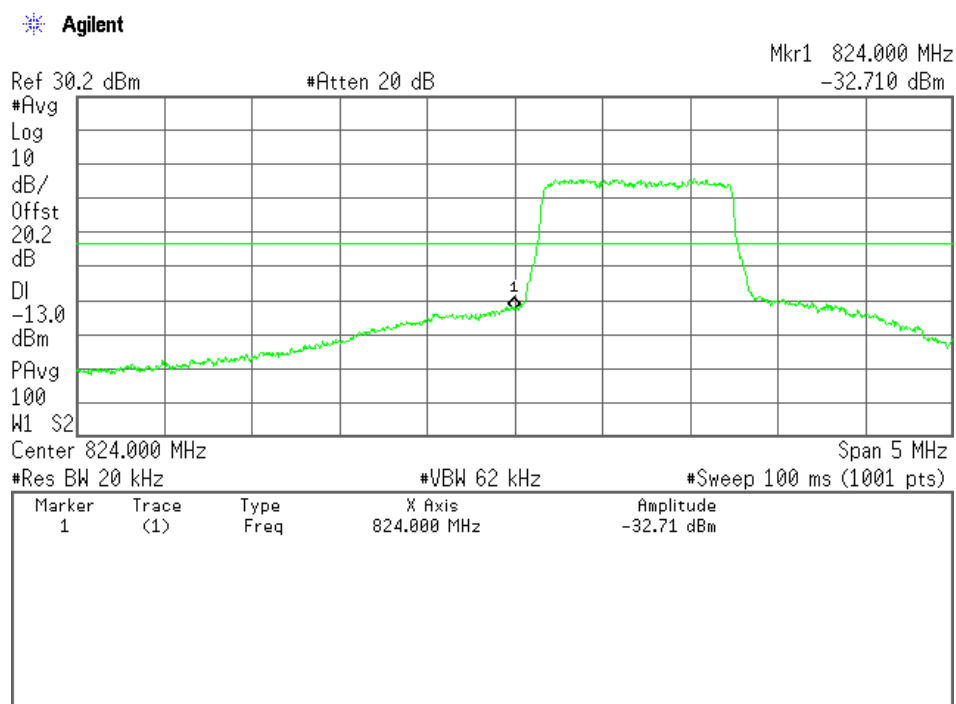


High Channel(1RB Offset Max), Band-Edge Emission

Agilent

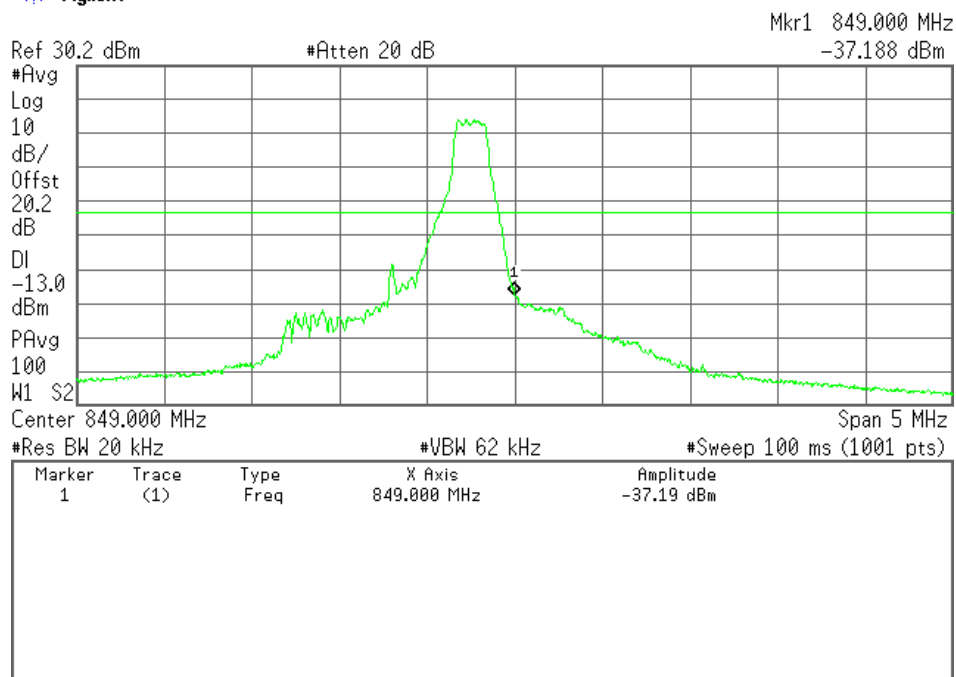

High Channel(Full RB), Band-Edge Emission

Agilent

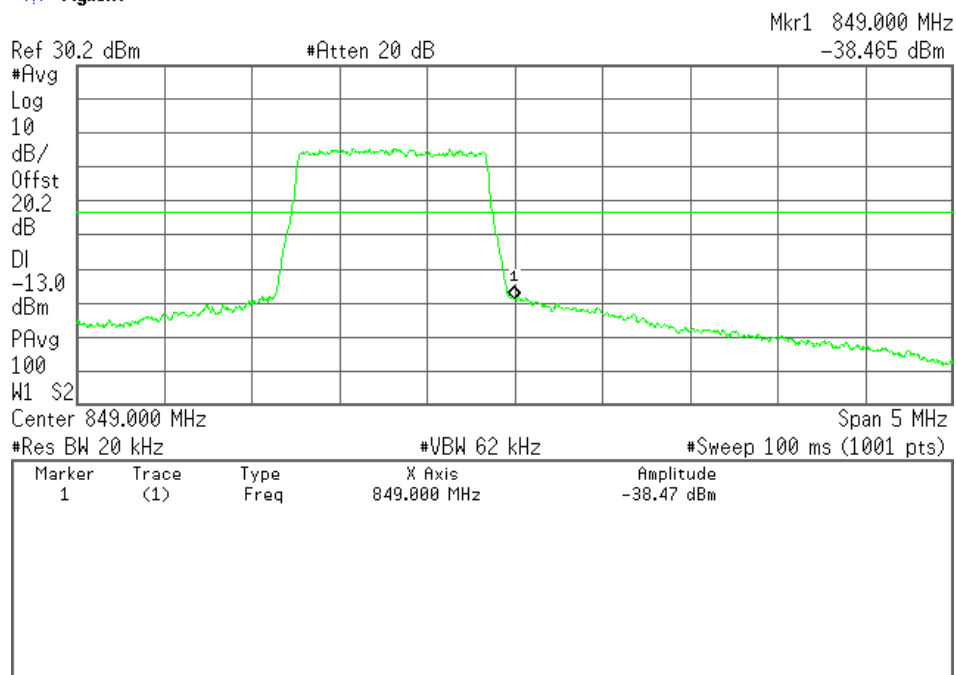


2-1) BW 3MHz


Mode: QPSK

Channel	Frequency (MHz)	Band-Edge Frequency (MHz)	Level (dBm)	Limits (dBm)	Margin (dB)
20415	825.50	824.0	-20.4 (at 824.0 MHz)	-13.0	+7.4
20635	847.50	849.0	-23.5 (at 849.0 MHz)	-13.0	+10.5

Low Channel(1RB Offset 0), Band-Edge Emission

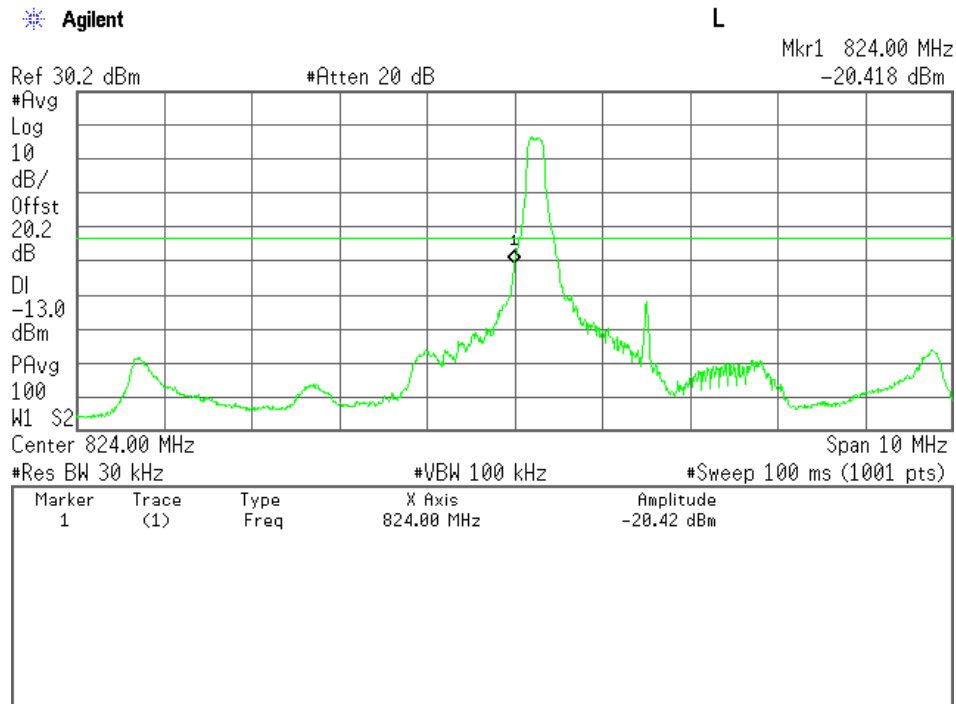


Low Channel(Full RB), Band-Edge Emission

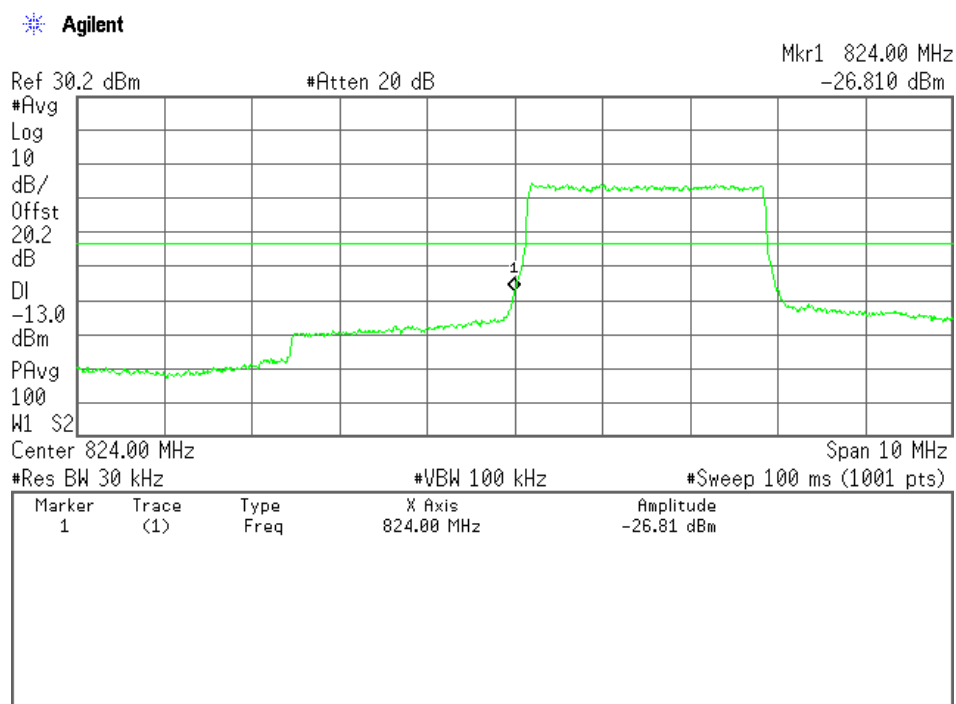


High Channel(1RB Offset Max), Band-Edge Emission

Agilent

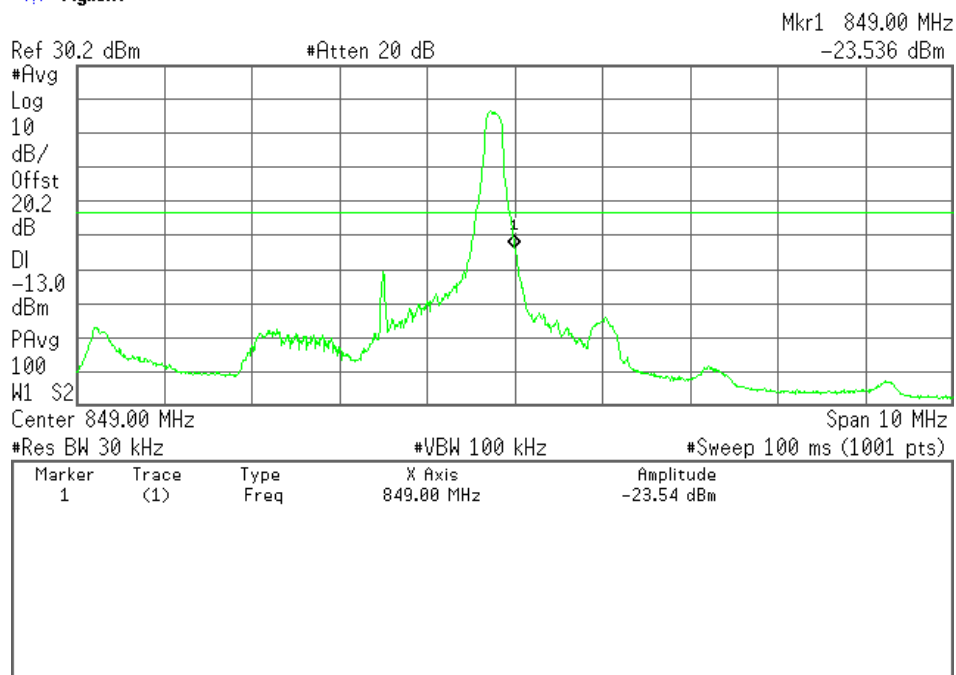

High Channel(Full RB), Band-Edge Emission

Agilent

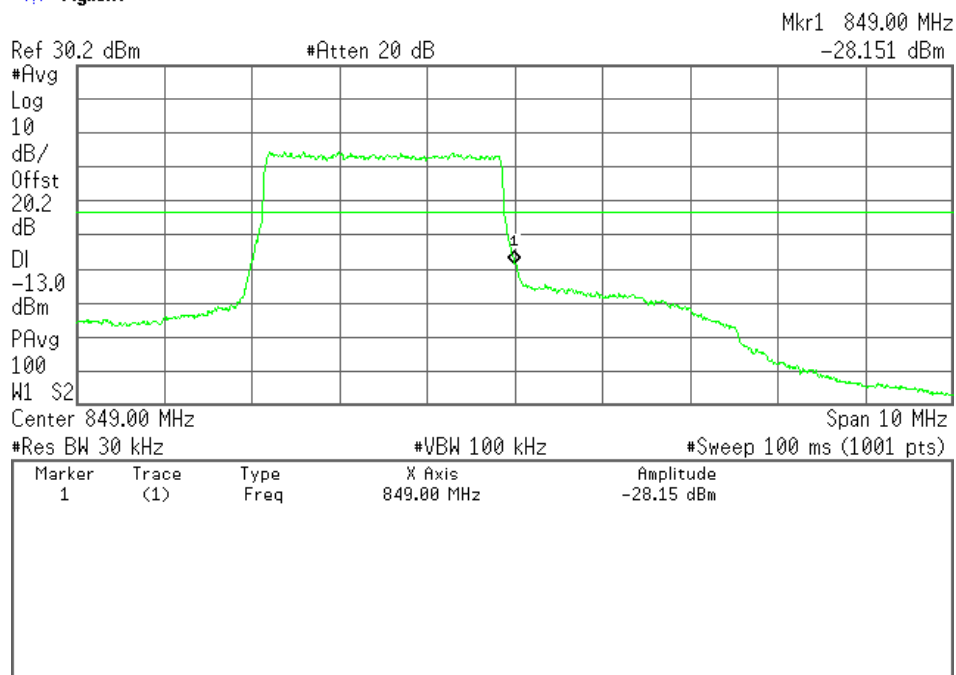


2-2) BW 3MHz


Mode:16 QAM

Channel	Frequency (MHz)	Band-Edge Frequency (MHz)	Level (dBm)	Limits (dBm)	Margin (dB)
20415	825.50	824.0	-20.8 (at 824.0 MHz)	-13.0	+7.8
20635	847.50	849.0	-24.5 (at 849.0 MHz)	-13.0	+11.5

Low Channel(1RB Offset 0), Band-Edge Emission

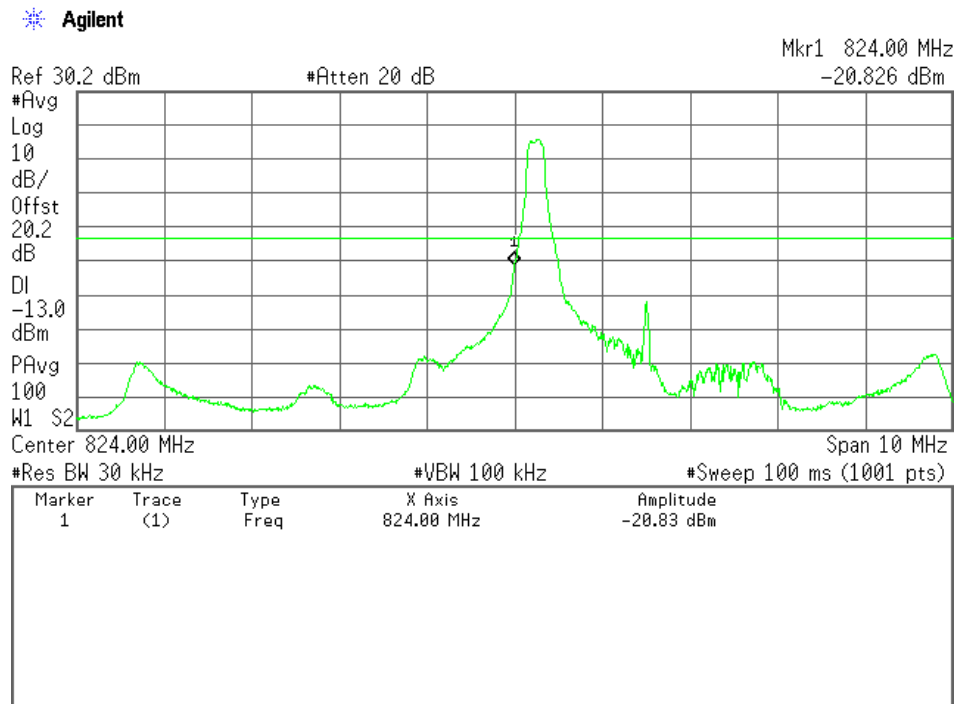


Low Channel(Full RB), Band-Edge Emission

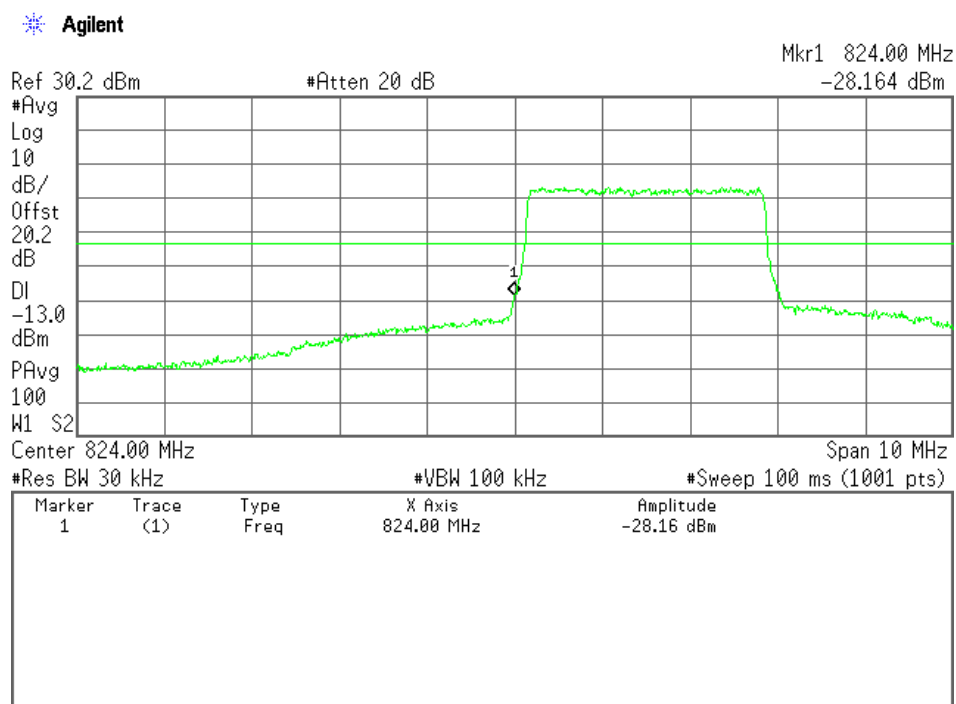


High Channel(1RB Offset Max), Band-Edge Emission

Agilent

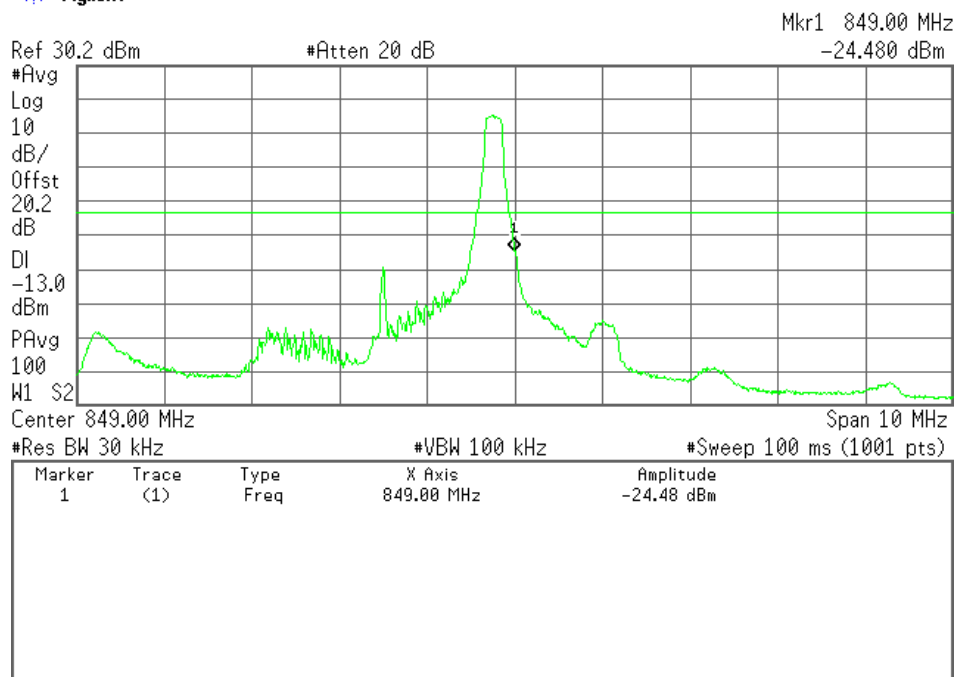

High Channel(Full RB), Band-Edge Emission

Agilent

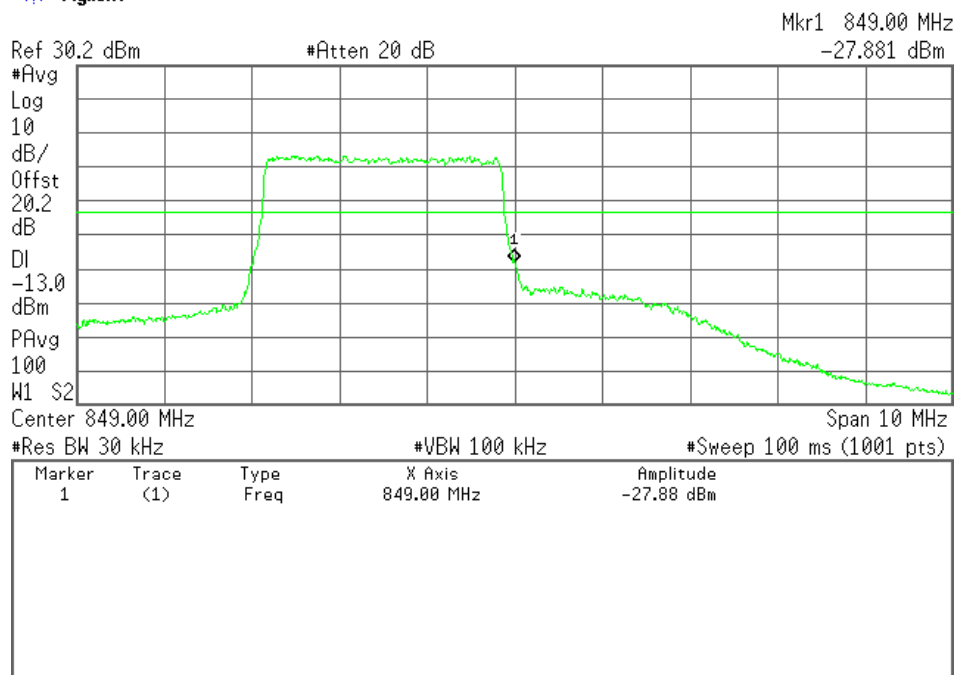


3-1) BW 5MHz


Mode: QPSK

Channel	Frequency (MHz)	Band-Edge Frequency (MHz)	Level (dBm)	Limits (dBm)	Margin (dB)
20425	826.50	824.0	-24.5 (at 824.0 MHz)	-13.0	+11.5
20625	846.50	849.0	-24.6 (at 849.0 MHz)	-13.0	+11.6

Low Channel(1RB Offset 0), Band-Edge Emission

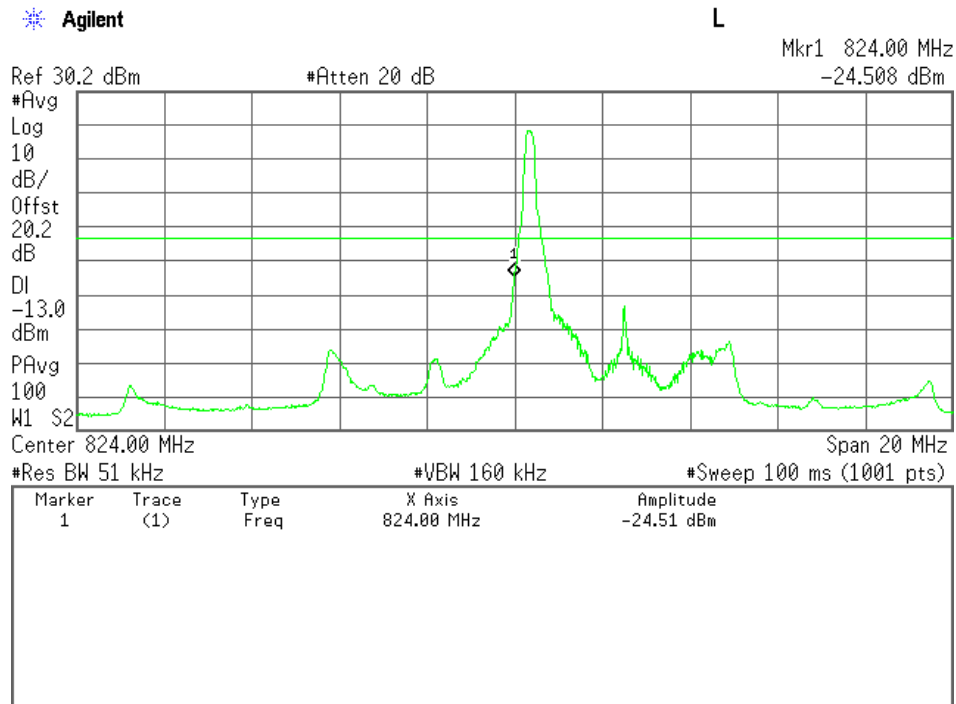


Low Channel(Full RB), Band-Edge Emission

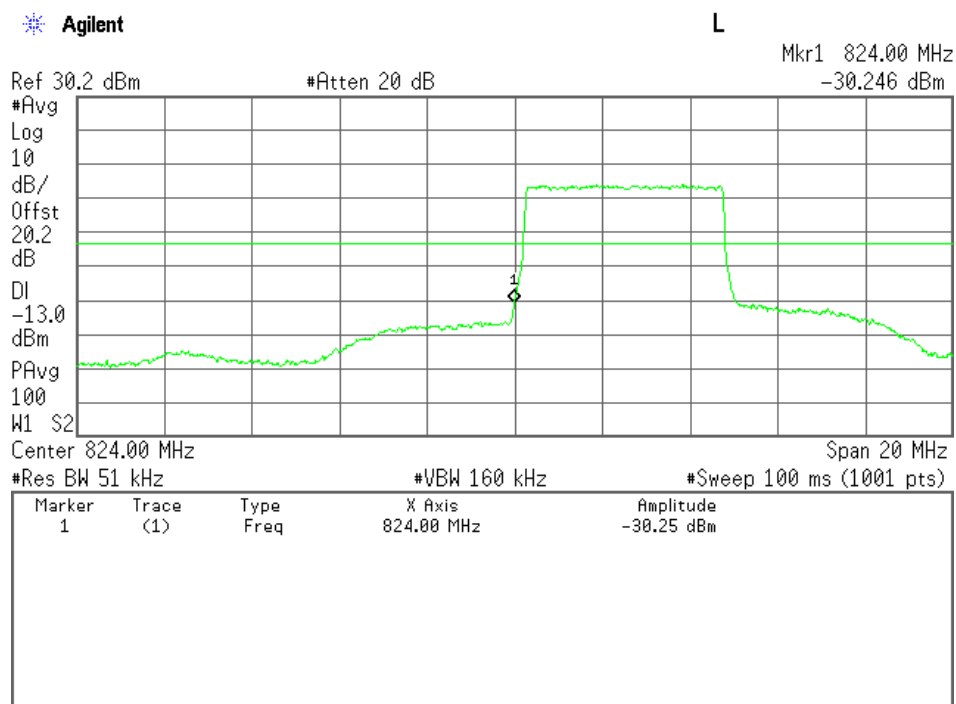


High Channel(1RB Offset Max), Band-Edge Emission

Agilent

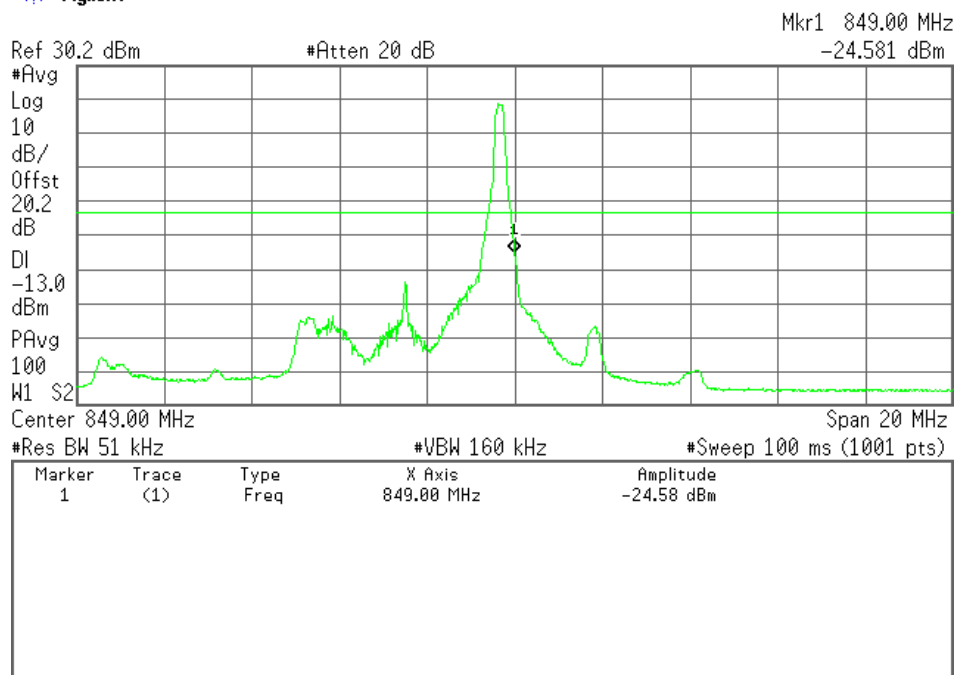

High Channel(Full RB), Band-Edge Emission

Agilent

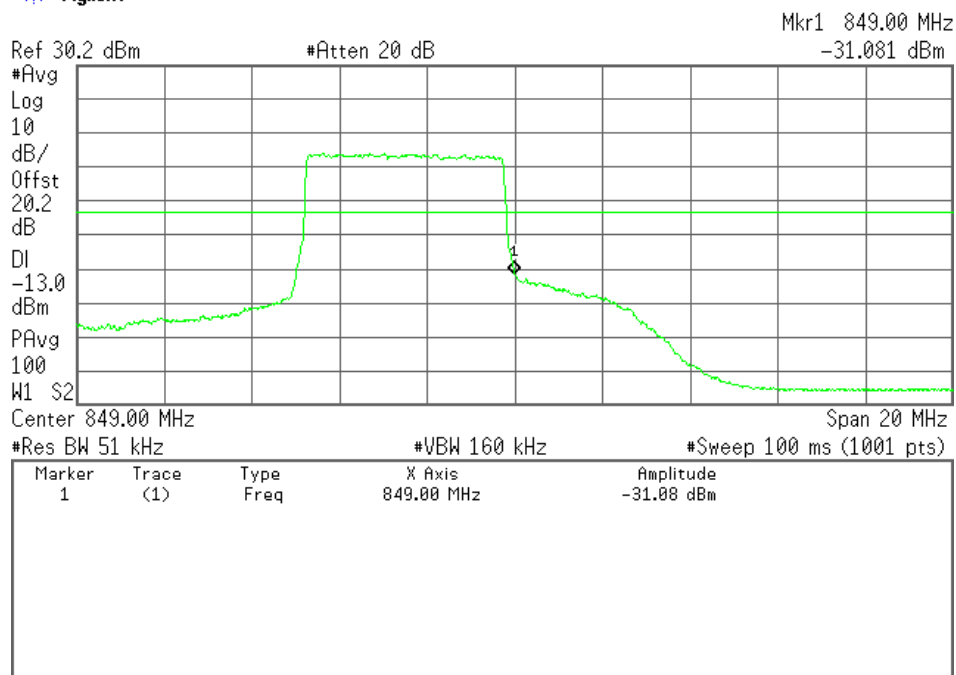


3-2) BW 5MHz


Mode:16 QAM

Channel	Frequency (MHz)	Band-Edge Frequency (MHz)	Level (dBm)	Limits (dBm)	Margin (dB)
20425	826.50	824.0	-24.4 (at 824.0 MHz)	-13.0	+11.4
20625	846.50	849.0	-24.2 (at 849.0 MHz)	-13.0	+11.2

Low Channel(1RB Offset 0), Band-Edge Emission

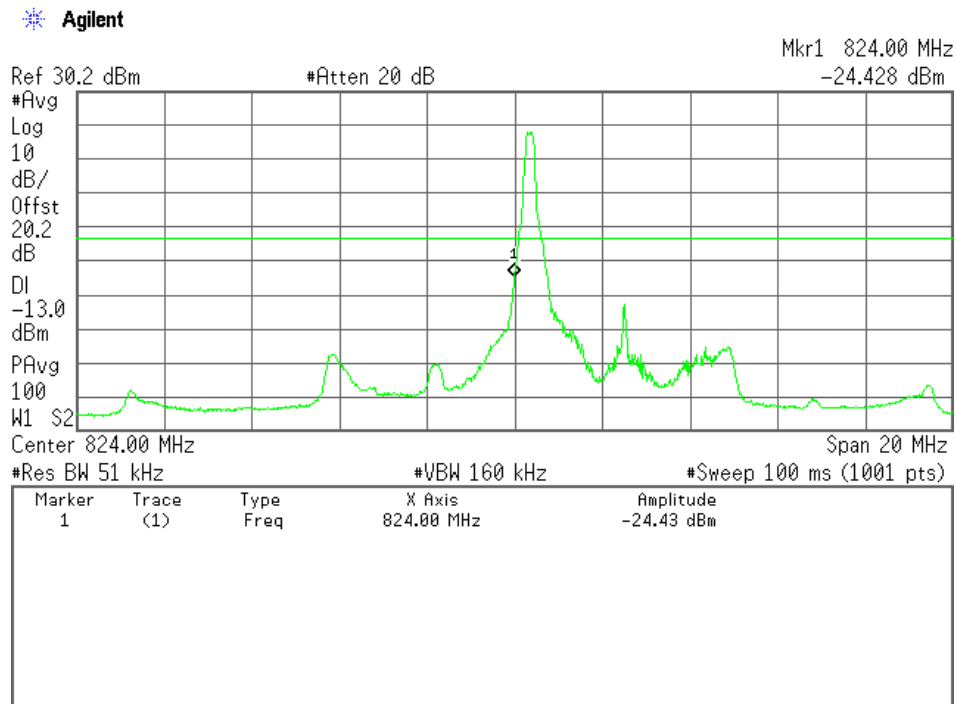


Low Channel(Full RB), Band-Edge Emission

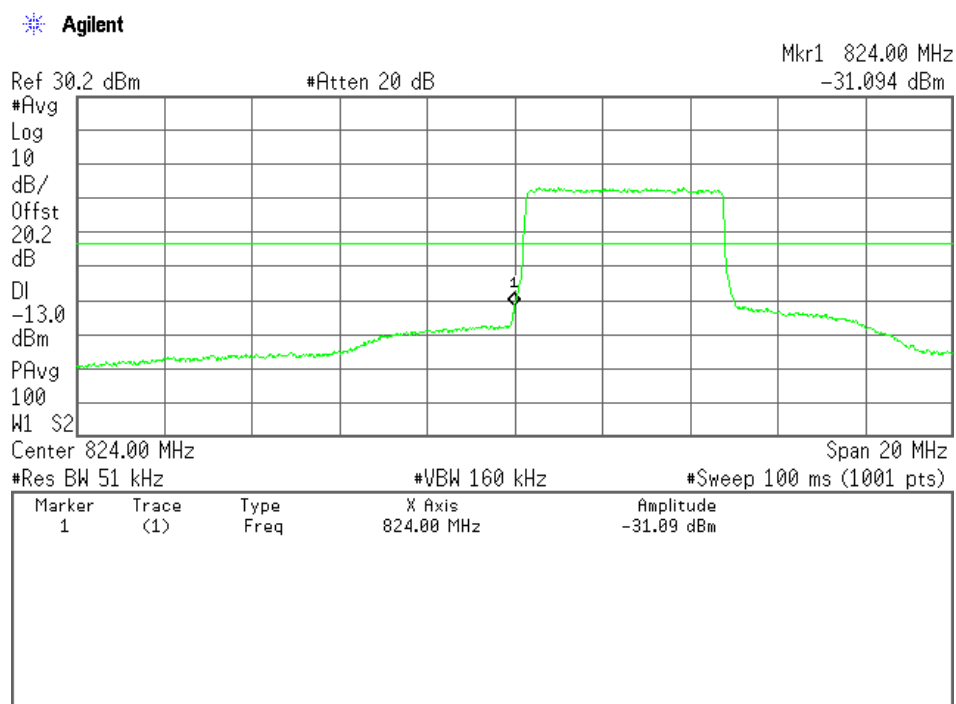


High Channel(1RB Offset Max), Band-Edge Emission

Agilent

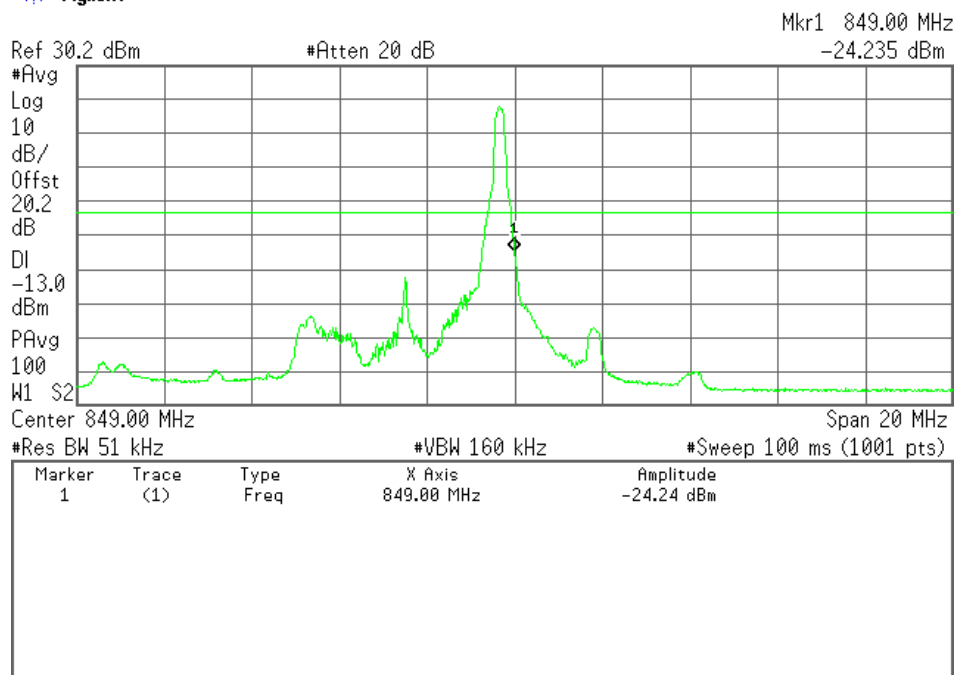

High Channel(Full RB), Band-Edge Emission

Agilent

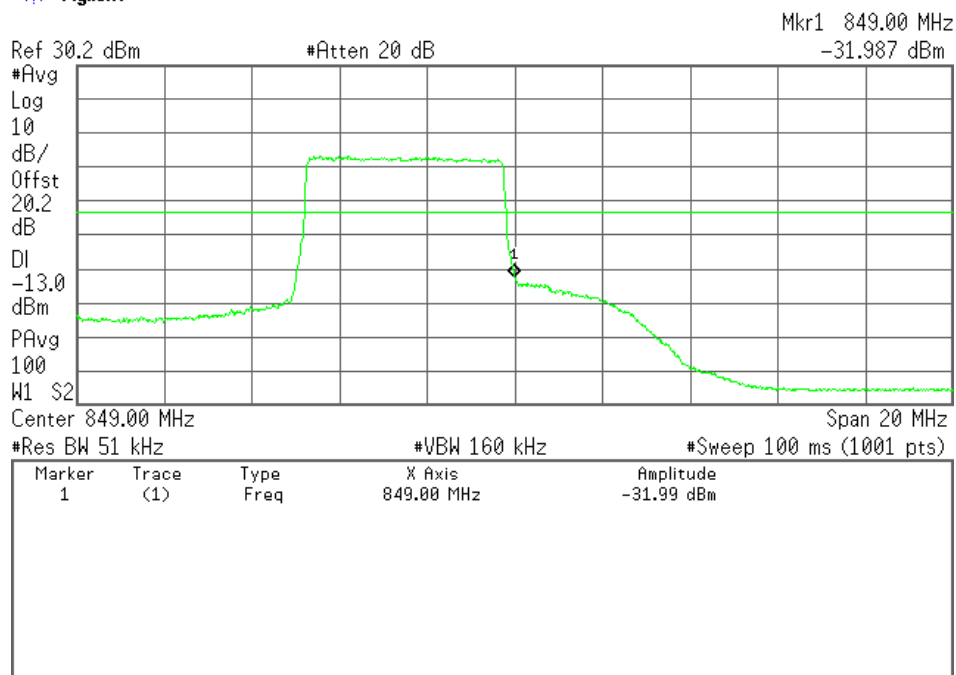


4-1) BW 10MHz


Mode: QPSK

Channel	Frequency (MHz)	Band-Edge Frequency (MHz)	Level (dBm)	Limits (dBm)	Margin (dB)
20450	829.00	824.0	-32.5 (at 824.0 MHz)	-13.0	+19.5
20600	844.00	849.0	-33.7 (at 849.0 MHz)	-13.0	+20.7

Low Channel(1RB Offset 0), Band-Edge Emission

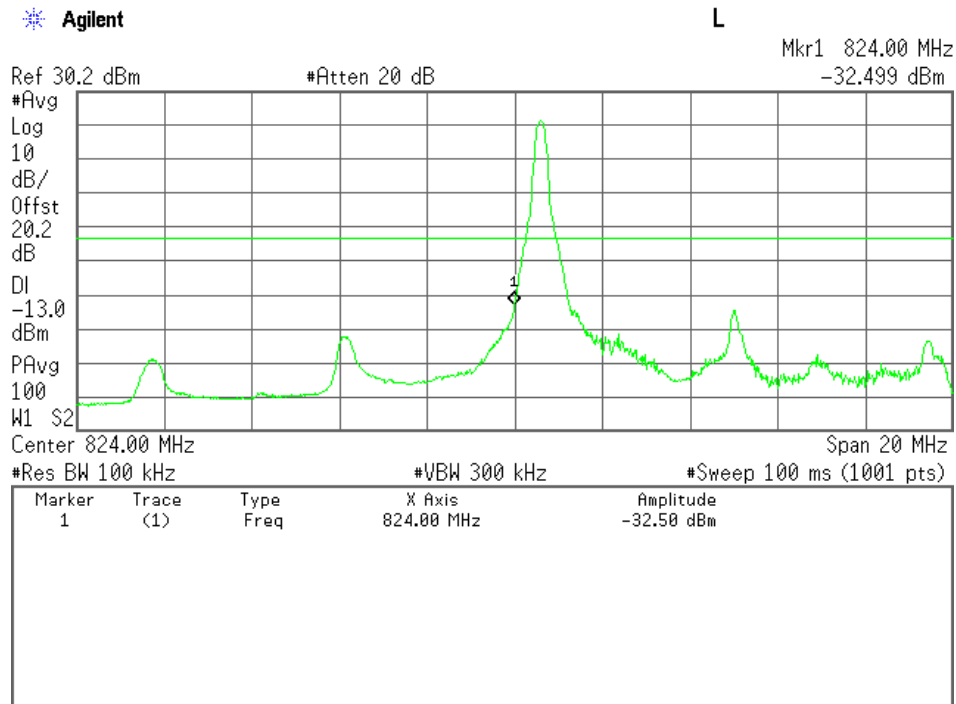


Low Channel(Full RB), Band-Edge Emission

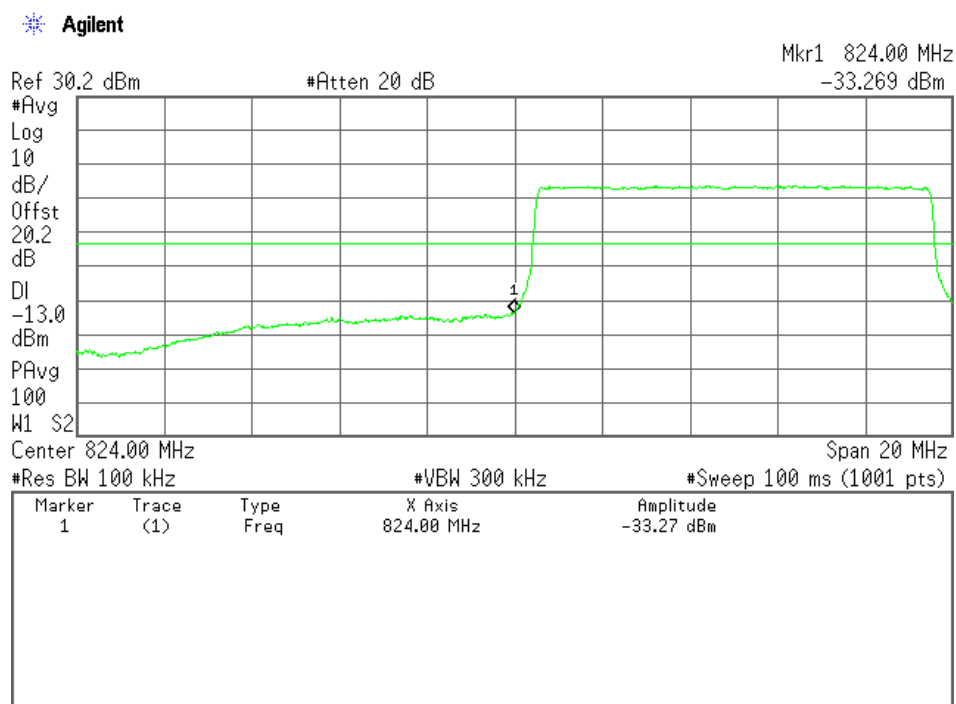


High Channel(1RB Offset Max), Band-Edge Emission

Agilent

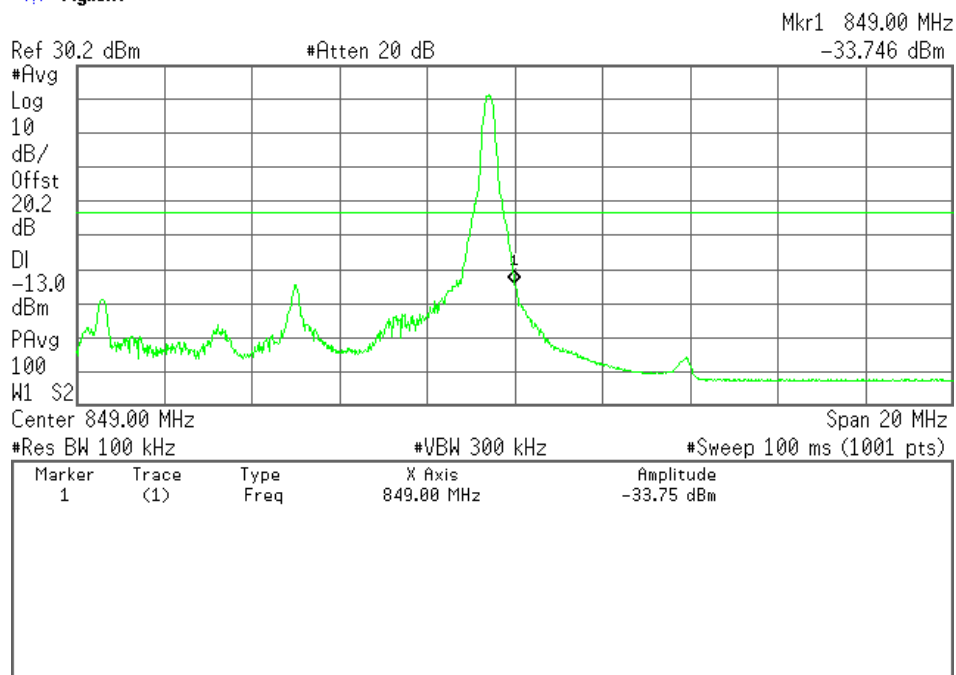

High Channel(Full RB), Band-Edge Emission

Agilent

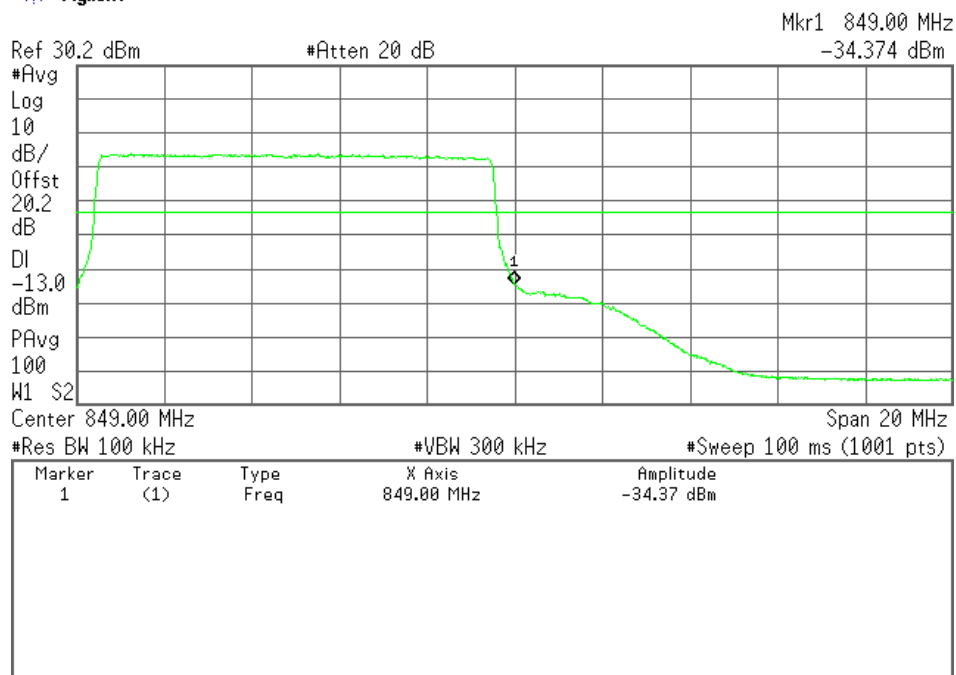


4-2) BW 10MHz


Mode:16 QAM

Channel	Frequency (MHz)	Band-Edge Frequency (MHz)	Level (dBm)	Limits (dBm)	Margin (dB)
20450	829.00	824.0	-32.2 (at 824.0 MHz)	-13.0	+19.2
20600	844.00	849.0	-34.7 (at 849.0 MHz)	-13.0	+21.7


Low Channel(1RB Offset 0), Band-Edge Emission

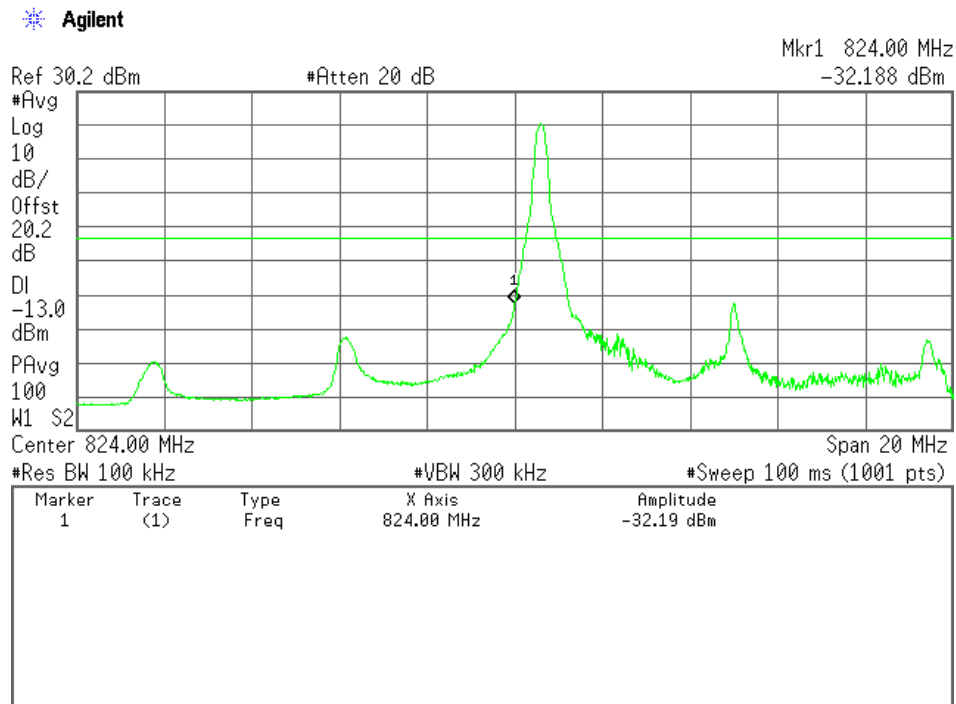


Low Channel(Full RB), Band-Edge Emission

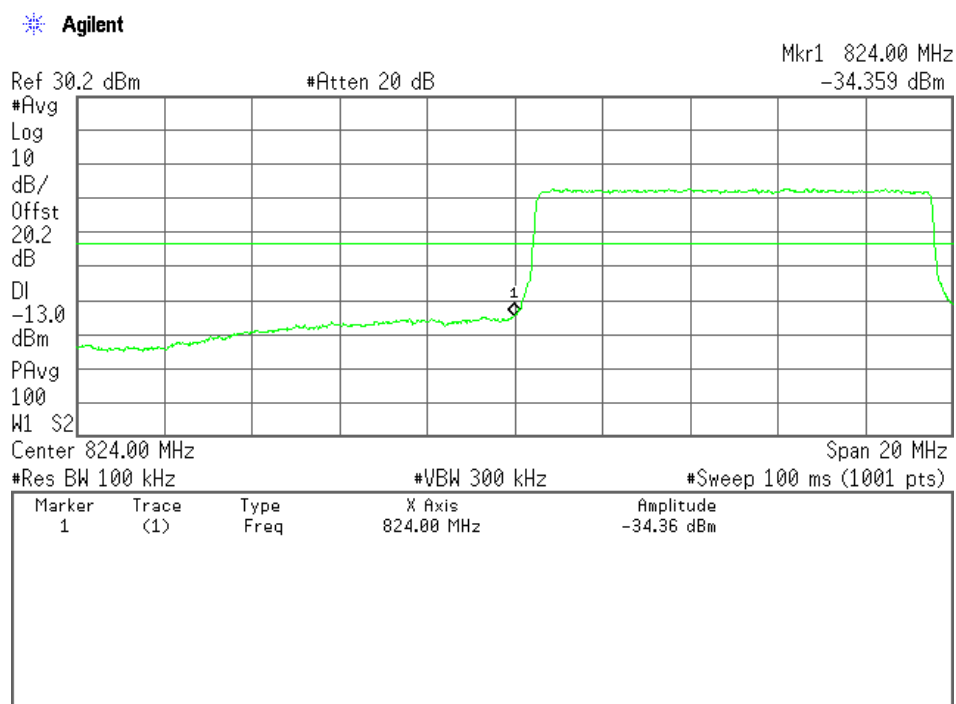

High Channel(1RB Offset Max), Band-Edge Emission

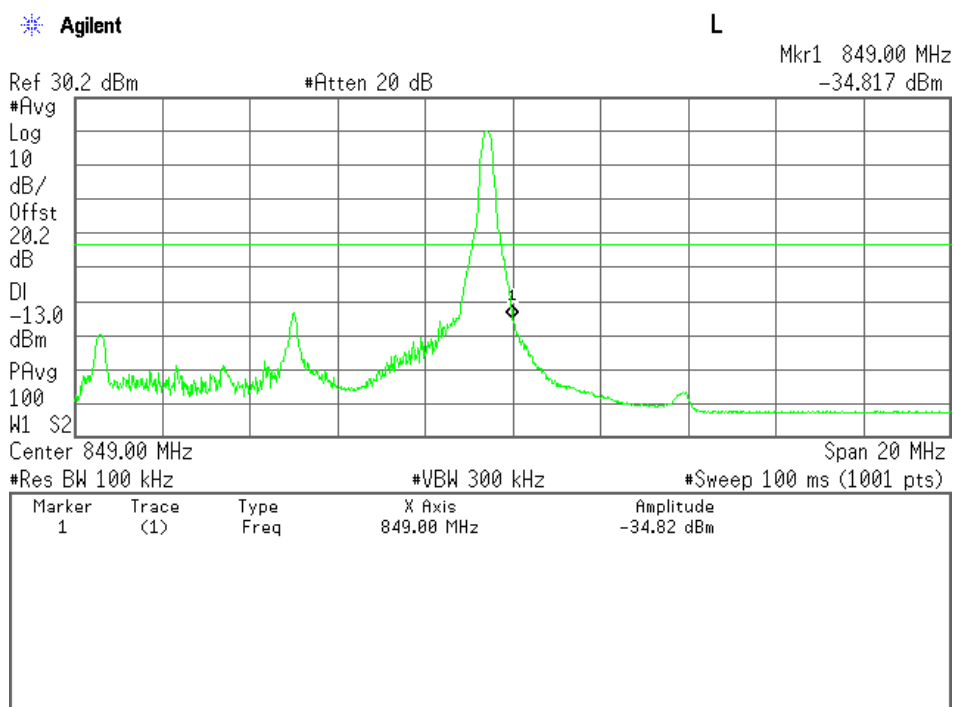

High Channel(Full RB), Band-Edge Emission

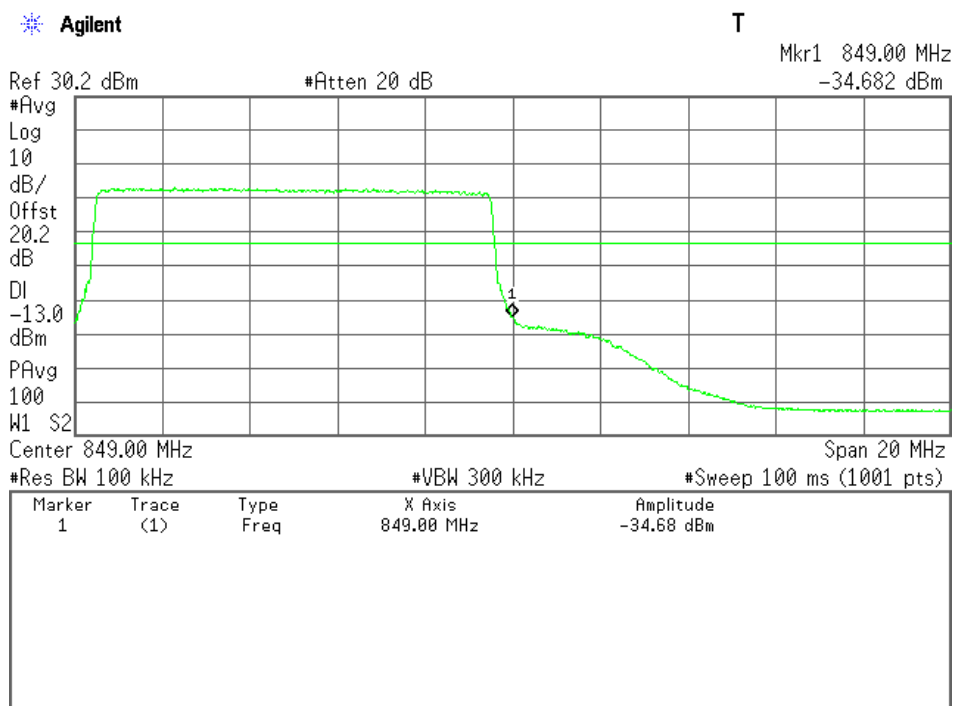

7.7 Field Strength of Spurious Radiation (§2.1053)

For the requirements, ☒ - Applicable [☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

7.7.1 Test Results

For the standard, ☒ - Passed ☐ - Failed ☐ - Not judged

Min. Limit Margin	<u>>29.6</u> dB	at	<u>8255/8475</u> MHz
		at	<u>8265/8465</u> MHz
		at	<u>8290/8440</u> MHz

Uncertainty of Measurement Results	30 MHz – 1000 MHz	<u>± 1.6</u> dB(2 σ)
	1 GHz – 18 GHz	<u>± 1.8</u> dB(2 σ)

Remarks : _____

7.7.2 Test Instruments

Anechoic Chamber A2				
Type	Model	Serial No. (ID)	Manufacturer	Cal. Due
Test Receiver	ESU 26	100170 (A-6)	Rohde & Schwarz	2016/04/25
Signal Generator	E8257D	MY45140309 (B-39)	Agilent	2016/08/10
Power Meter	N1911A	GB45100291 (B-63)	Agilent	2016/07/16
Power Sensor	N1921A	US44510470 (B-64)	Agilent	2016/07/16
Biconical Antenna	VHA9103/BBA9106	2355 (C-30)	Schwarzbeck	2016/05/24
Log-periodic Antenna	UHALP9108-A1	0694 (C-31)	Schwarzbeck	2016/05/24
Dipole Antenna (TX)	KBA-511A	0-273-2 (C-17)	Kyoritsu	2016/05/20
Dipole Antenna (TX)	KBA-611	0-248-2 (C-20)	Kyoritsu	2016/05/20
RF Cable	S 10162 B-11 etc.	--- (H-4)	HUBER+SUHNER	2016/04/15
Pre-Amplifier	TPA0118-36	1010 (A-37)	TOYO	2016/05/11
Horn Antenna	91888-2	562 (C-41-1)	EATON	2016/06/16
Horn Antenna	91889-2	568 (C-41-2)	EATON	2016/06/16
Horn Antenna	3160-04	9903-1053 (C-55)	EMCO	2016/06/29
Horn Antenna	3160-05	9902-1061 (C-56)	EMCO	2016/06/29
Horn Antenna	3160-06	9712-1045 (C-57)	EMCO	2016/06/29
Horn Antenna	3160-07	9902-1113 (C-58)	EMCO	2016/06/29
Attenuator	2-10	AW7937 (D-40)	Weinschel	2016/10/12
Attenuator	54A-10	W5713 (D-29)	Weinschel	2016/08/16
Attenuator	2-10	BA6214 (D-79)	Weinschel	2015/11/18
RF Cable	SUCOFLEX102E	6683/2E (C-70)	HUBER+SUHNER	2015/11/18
RF Cable	SUCOFLEX104	267479/4 (C-66)	HUBER+SUHNER	2016/01/19
RF Cable	SUCOFLEX104	267414/4 (C-67)	HUBER+SUHNER	2016/01/19
High Pass Filter	HPM50108	010 (D-94)	MICRO-TRONICS	2016/02/08

NOTE : The calibration interval of the above test instruments is 12 months.

7.7.3 Test Method and Test Setup (Diagrammatic illustration)

Step 1) The spurious radiation for transmitter were measured at the distance 3 m away from the EUT which was placed on a non-conducted support 0.8 m in height and was varying at three orthogonal axes. The receiving antenna was oriented for vertical polarization and varied from 1 m to 4 m until the maximum emission level was detected on the measuring instrument. The EUT was rotated 360 degrees until the maximum emission was received. The measurement was also repeated with the receiving antenna in the horizontal polarization.

This test was carried out using the half-wave dipole antenna for up to 1GHz and using the horn antenna for above 1 GHz.

Step 2)

A) Up to 1 GHz

The ERP measurement was carried out with according to Step 2 in Clause 7.2.3. Then the RF power in the substitution antenna half-wave dipole antenna for up to 1 GHz and the substitution horn antenna for above 1 GHz.

The ERP is calculated in the following equation.

$$\text{ERP(dBm)} = P(\text{dBm}) - (\text{Balun Loss of the half-wave dipole Ant. (dB)}) + \text{Cable Loss (dB)}$$

B) Above 1 GHz

The ERP is calculated from the maximum emission level by the following formula.

$$\frac{e^2}{120\pi} = \frac{\text{eirp}}{4\pi d^2} \quad \text{----(Eq.1)}$$

$$\text{erp} = \text{eirp} - Gd \quad \text{----(Eq.2)}$$

Where, $e[V/m]$: Field Strength at measuring distance($d=3m$)

$\text{eirp}[W]$: Equivalent Isotropic Radiated Power

$\text{erp}[W]$: Effective Radiated Power

$Gd(dBi)$: Gain of the substitution half-wave dipole antenna(2.15dBi)

$$\text{eirp} = \frac{(de)^2}{30} = \frac{3}{10} e^2$$

$$\therefore 10 \log(\text{eirp}) = 20 \log(e) + 10 \log(3/10) = 20 \log(e) - 5.23$$

$$10 \log(\text{eirp}) = \text{EIRP}[dBm] - 30$$


$$20 \log(e) = E[dB(\mu V/m)] - 120$$

$$\therefore \text{EIRP} = E - 120 + 30 - 5.23 = E - 95.23$$


$$\therefore \text{ERP}[dBm] = \text{EIRP} - 2.15 = E - 97.38$$

The respective calculated ERP of the spurious and harmonics were compared with the ERP of fundamental frequency by specified attenuation limits, $43+10\log_{10}(TP \text{ in watt})[dB]$. Where, TP = Transmitter power at the ANT OUT under test configuration as the hands free unit used.

Radiated Emission 30 MHz to 1000 MHz

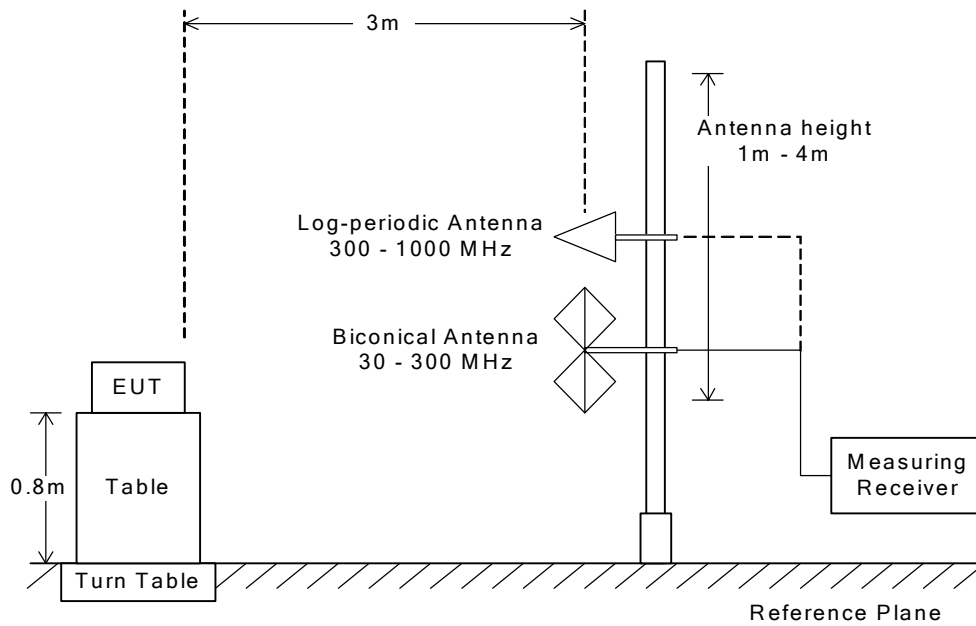


Radiated Emission above 1 GHz

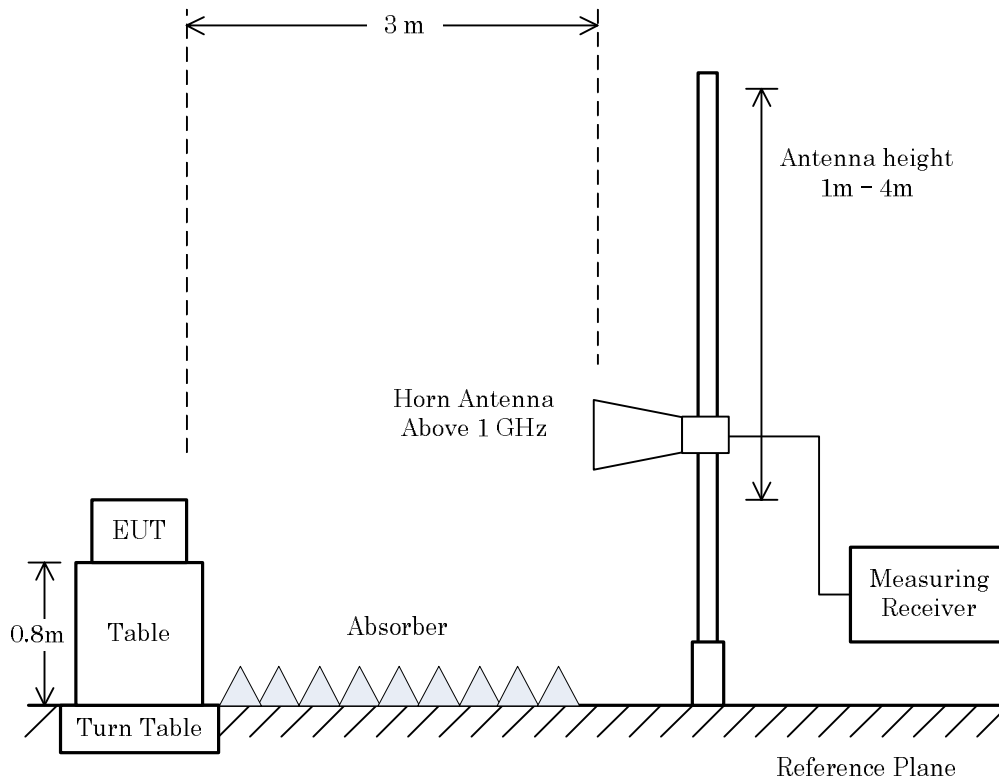

NOTE

The antenna height is scanned depending on the EUT's size and mounting height.

Radiated Emission 30 to 1000 MHz – Substitution Method

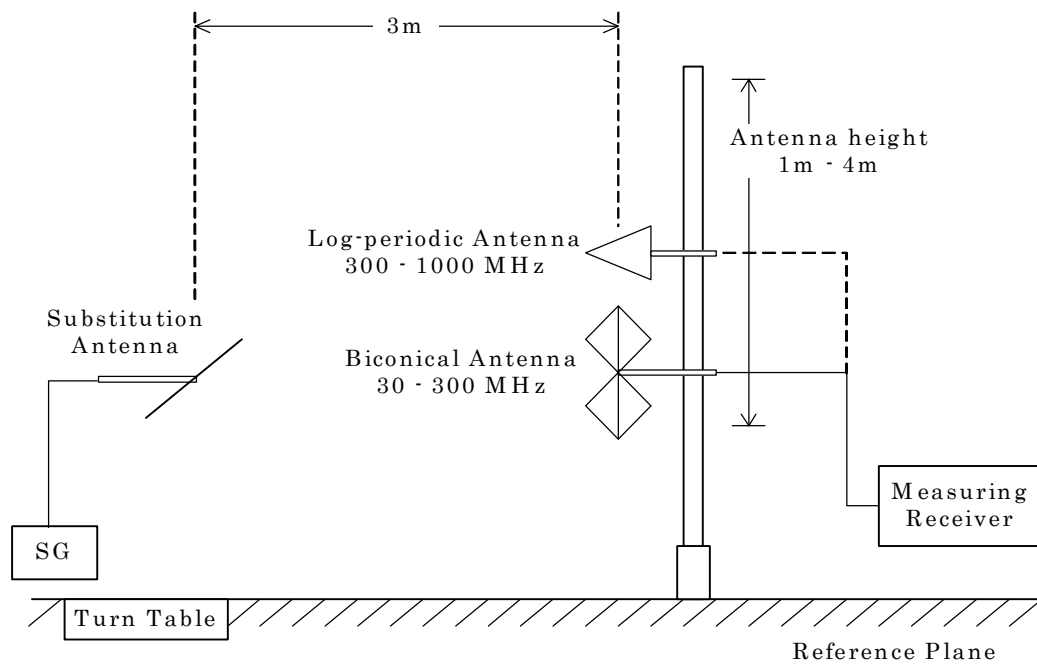

7.7.4 Test Data

1) BW 1.4MHz(1RB)

(LTE 1.4MHz)

Test Configuration : Single Unit

Test Date: November 2, 2015

Temp.: 20 °C, Humi: 52 %

CH	Transmitting Frequency [MHz]	Measured Frequency [MHz]	ERP [dBm]		Limits [dBm]	Margin [dB]	Remarks
			Hori.	Vert.			
20407	824.700	1649.400	-53.4	-53.4	-13.0	+40.4	C
		2474.100	-55.2	< -56.2	-13.0	+42.2	C
		3298.800	< -55.1	< -55.1	-13.0	> +42.1	C
		4123.500	-44.8	-43.7	-13.0	+30.7	C
		4948.200	< -47.9	< -47.9	-13.0	> +34.9	C
		5772.900	< -47.5	< -47.5	-13.0	> +34.5	C
		6597.600	< -45.7	< -45.7	-13.0	> +32.7	C
		7422.300	< -45.9	< -45.9	-13.0	> +32.9	C
		8247.000	< -42.7	< -42.7	-13.0	> +29.7	C
20525	836.500	1673.000	-52.6	-53.7	-13.0	+39.6	C
		2509.500	-54.5	< -56.1	-13.0	+41.5	C
		3346.000	< -55.1	< -55.1	-13.0	> +42.1	C
		4182.500	-45.4	-44.4	-13.0	+31.4	C
		5019.000	< -47.9	< -47.9	-13.0	> +34.9	C
		5855.500	< -45.2	< -45.2	-13.0	> +32.2	C
		6692.000	< -45.9	< -45.9	-13.0	> +32.9	C
		7528.500	< -45.9	< -45.9	-13.0	> +32.9	C
		8365.000	< -42.7	< -42.7	-13.0	> +29.7	C
20643	848.300	1696.600	-53.4	-54.3	-13.0	+40.4	C
		2544.900	-53.2	< -56.2	-13.0	+40.2	C
		3393.200	< -54.7	< -54.7	-13.0	> +41.7	C
		4241.500	-45.5	-44.5	-13.0	+31.5	C
		5089.800	< -47.8	< -47.8	-13.0	> +34.8	C
		5938.100	< -45.3	< -45.3	-13.0	> +32.3	C
		6786.400	< -45.8	< -45.8	-13.0	> +32.8	C
		7634.700	< -45.9	< -45.9	-13.0	> +32.9	C
		8483.000	< -42.7	< -42.7	-13.0	> +29.7	C

Calculated result at 8247.0 MHz, as the worst point shown on underline:

Minimum Margin: $-13.0 - (<-42.7) = >29.7$ (dB)

NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 30 MHz to 10 GHz.
3. All emissions not reported were more than 20 dB below the applied limits.
4. Applied limits : -13.0 [dBm] = $10\log(TP[mW]) - (43 + 10\log(tp[W])) = 10\log(TP[mW]) - (43 + (10\log(TP[mW]) - 30))$
where, $tp[W] = TP[mW] / 1000$: Transmitter power at antenna terminal
5. The symbol of "<" means "or less".
6. The symbol of ">" means "more than".
7. Setting of measuring instrument(s) :

	Detector Function	RES B.W.	V.B.W.	Sweep Time
A	Peak	10 kHz	30 kHz	20 msec.
B	Peak	100 kHz	300 kHz	20 msec.
C	Peak	1 MHz	3 MHz	20 msec.

2) BW 3MHz(1RB)

(LTE 3MHz)

Test Date: November 2, 2015

Temp.: 20 °C, Humi: 52 %

Test Configuration : Single Unit

CH	Transmitting Frequency [MHz]	Measured Frequency [MHz]	ERP [dBm]		Limits [dBm]	Margin [dB]	Remarks
			Hori.	Vert.			
20415	825.500	1651.000	-51.9	-52.8	-13.0	+38.9	C
		2476.500	-54.7	< -56.2	-13.0	+41.7	C
		3302.000	< -55.2	< -55.2	-13.0	> +42.2	C
		4127.500	-44.3	-43.4	-13.0	+30.4	C
		4953.000	< -47.9	< -47.9	-13.0	> +34.9	C
		5778.500	< -47.5	< -47.5	-13.0	> +34.5	C
		6604.000	< -45.7	< -45.7	-13.0	> +32.7	C
		7429.500	< -45.9	< -45.9	-13.0	> +32.9	C
		8255.000	< -42.6	< -42.6	-13.0	> +29.6	C
20525	836.500	1673.000	-52.2	-54.1	-13.0	+39.2	C
		2509.500	-53.6	< -56.1	-13.0	+40.6	C
		3346.000	< -55.1	< -55.1	-13.0	> +42.1	C
		4182.500	-45.6	-44.5	-13.0	+31.5	C
		5019.000	< -47.9	< -47.9	-13.0	> +34.9	C
		5855.500	< -45.2	< -45.2	-13.0	> +32.2	C
		6692.000	< -45.9	< -45.9	-13.0	> +32.9	C
		7528.500	< -45.9	< -45.9	-13.0	> +32.9	C
		8365.000	< -42.7	< -42.7	-13.0	> +29.7	C
20635	847.500	1695.000	-51.9	-53.7	-13.0	+38.9	C
		2542.500	-54.3	-54.9	-13.0	+41.3	C
		3390.000	< -54.8	< -54.8	-13.0	> +41.8	C
		4237.500	-46.1	-45.0	-13.0	+32.0	C
		5085.000	< -47.8	< -47.8	-13.0	> +34.8	C
		5932.500	< -45.3	< -45.3	-13.0	> +32.3	C
		6780.000	< -45.8	< -45.8	-13.0	> +32.8	C
		7627.500	< -45.9	< -45.9	-13.0	> +32.9	C
		8475.000	< -42.6	< -42.6	-13.0	> +29.6	C

Calculated result at 8255.0 MHz, as the worst point shown on underline:

Minimum Margin: $-13.0 - (<-42.6) = >29.6$ (dB)

NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 30 MHz to 10 GHz.
3. All emissions not reported were more than 20 dB below the applied limits.
4. Applied limits : -13.0 [dBm] = $10\log(TP[mW]) - (43 + 10\log(tp[W])) = 10\log(TP[mW]) - (43 + (10\log(TP[mW]) - 30))$
where, $tp[W] = TP[mW] / 1000$: Transmitter power at antenna terminal
5. The symbol of "<" means "or less".
6. The symbol of ">" means "more than".
7. Setting of measuring instrument(s) :

	Detector Function	RES B.W.	V.B.W.	Sweep Time
A	Peak	10 kHz	30 kHz	20 msec.
B	Peak	100 kHz	300 kHz	20 msec.
C	Peak	1 MHz	3 MHz	20 msec.

3) BW 5MHz(1RB)

(LTE 5MHz)

Test Configuration : Single Unit

Test Date: November 2, 2015

Temp.: 20 °C, Humi: 52 %

CH	Transmitting Frequency [MHz]	Measured Frequency [MHz]	ERP [dBm]		Limits [dBm]	Margin [dB]	Remarks
			Hori.	Vert.			
20425	826.500	1653.000	-51.3	-52.5	-13.0	+38.3	C
		2479.500	-55.0	-55.4	-13.0	+42.0	C
		3306.000	< -55.2	< -55.2	-13.0	> +42.2	C
		4132.500	-43.0	-44.3	-13.0	+30.0	C
		4959.000	< -47.9	< -47.9	-13.0	> +34.9	C
		5785.500	< -47.6	< -47.6	-13.0	> +34.6	C
		6612.000	< -45.7	< -45.7	-13.0	> +32.7	C
		7438.500	< -45.9	< -45.9	-13.0	> +32.9	C
		8265.000	< -42.6	< -42.6	-13.0	> +29.6	C
20525	836.500	1673.000	-52.0	-53.9	-13.0	+39.0	C
		2509.500	-53.2	< -56.1	-13.0	+40.2	C
		3346.000	< -55.1	< -55.1	-13.0	> +42.1	C
		4182.500	-43.8	-44.8	-13.0	+30.8	C
		5019.000	< -47.9	< -47.9	-13.0	> +34.9	C
		5855.500	< -45.2	< -45.2	-13.0	> +32.2	C
		6692.000	< -45.9	< -45.9	-13.0	> +32.9	C
		7528.500	< -45.9	< -45.9	-13.0	> +32.9	C
		8365.000	< -42.7	< -42.7	-13.0	> +29.7	C
20625	846.500	1693.000	-51.1	-52.2	-13.0	+38.1	C
		2539.500	-53.8	-54.9	-13.0	+40.8	C
		3386.000	< -54.8	< -54.8	-13.0	> +41.8	C
		4232.500	-42.7	-43.8	-13.0	+29.7	C
		5079.000	< -47.8	< -47.8	-13.0	> +34.8	C
		5925.500	< -45.4	< -45.4	-13.0	> +32.4	C
		6772.000	< -45.8	< -45.8	-13.0	> +32.8	C
		7618.500	< -45.9	< -45.9	-13.0	> +32.9	C
		8465.000	< -42.6	< -42.6	-13.0	> +29.6	C

Calculated result at 8265.0 MHz, as the worst point shown on underline:

Minimum Margin: $-13.0 - (<-42.6) = >29.6$ (dB)

NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 30 MHz to 10 GHz.
3. All emissions not reported were more than 20 dB below the applied limits.
4. Applied limits : -13.0 [dBm] = $10\log(TP[mW]) - (43 + 10\log(tp[W])) = 10\log(TP[mW]) - (43 + (10\log(TP[mW]) - 30))$
where, $tp[W] = TP[mW] / 1000$: Transmitter power at antenna terminal
5. The symbol of "<" means "or less".
6. The symbol of ">" means "more than".
7. Setting of measuring instrument(s) :

	Detector Function	RES B.W.	V.B.W.	Sweep Time
A	Peak	10 kHz	30 kHz	20 msec.
B	Peak	100 kHz	300 kHz	20 msec.
C	Peak	1 MHz	3 MHz	20 msec.

4) BW 10MHz(1RB)

(LTE 10MHz)

Test Date: November 2, 2015

Temp.: 20 °C, Humi: 52 %

Test Configuration : Single Unit

CH	Transmitting Frequency [MHz]	Measured Frequency [MHz]	ERP [dBm]		Limits [dBm]	Margin [dB]	Remarks
			Hori.	Vert.			
20450	829.000	1658.000	-52.3	-52.7	-13.0	+39.3	C
		2487.000	-54.2	-54.9	-13.0	+41.2	C
		3316.000	< -55.2	< -55.2	-13.0	> +42.2	C
		4145.000	-45.6	-45.7	-13.0	+32.6	C
		4974.000	< -47.9	< -47.9	-13.0	> +34.9	C
		5803.000	< -47.6	< -47.6	-13.0	> +34.6	C
		6632.000	< -45.8	< -45.8	-13.0	> +32.8	C
		7461.000	< -45.9	< -45.9	-13.0	> +32.9	C
		8290.000	< -42.6	< -42.6	-13.0	> +29.6	C
20525	836.500	1673.000	-52.6	-53.6	-13.0	+39.6	C
		2509.500	-54.4	< -56.1	-13.0	+41.4	C
		3346.000	< -55.1	< -55.1	-13.0	> +42.1	C
		4182.500	-43.8	-44.0	-13.0	+30.8	C
		5019.000	< -47.9	< -47.9	-13.0	> +34.9	C
		5855.500	< -45.2	< -45.2	-13.0	> +32.2	C
		6692.000	< -45.9	< -45.9	-13.0	> +32.9	C
		7528.500	< -45.9	< -45.9	-13.0	> +32.9	C
		8365.000	< -42.7	< -42.7	-13.0	> +29.7	C
20600	844.000	1688.000	-51.4	-53.2	-13.0	+38.4	C
		2532.000	-55.3	< -56.1	-13.0	+42.3	C
		3376.000	< -54.9	< -54.9	-13.0	> +41.9	C
		4220.000	-45.8	-45.6	-13.0	+32.6	C
		5064.000	< -47.9	< -47.9	-13.0	> +34.9	C
		5908.000	< -45.4	< -45.4	-13.0	> +32.4	C
		6752.000	< -45.9	< -45.9	-13.0	> +32.9	C
		7596.000	< -46.0	< -46.0	-13.0	> +33.0	C
		8440.000	< -42.6	< -42.6	-13.0	> +29.6	C

Calculated result at 8290.0 MHz, as the worst point shown on underline:

Minimum Margin: $-13.0 - (<-42.6) = >29.6$ (dB)

NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 30 MHz to 10 GHz.
3. All emissions not reported were more than 20 dB below the applied limits.
4. Applied limits : -13.0 [dBm] = $10\log(TP[mW]) - (43 + 10\log(tp[W])) = 10\log(TP[mW]) - (43 + (10\log(TP[mW]) - 30))$
where, $tp[W] = TP[mW] / 1000$: Transmitter power at antenna terminal
5. The symbol of "<" means "or less".
6. The symbol of ">" means "more than".
7. Setting of measuring instrument(s) :

	Detector Function	RES B.W.	V.B.W.	Sweep Time
A	Peak	10 kHz	30 kHz	20 msec.
B	Peak	100 kHz	300 kHz	20 msec.
C	Peak	1 MHz	3 MHz	20 msec.

7.8 Frequency Stability (§2.1055)

For the requirements, ☒ - Applicable [☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

7.8.1 Test Results

For the standard, ☒ - Passed ☐ - Failed ☐ - Not judged

The Frequency Stability level is +/-0.01 ppm at 836.500 MHz

Uncertainty of Measurement Results ± 0.03 ppm(2σ)

Remarks : _____

7.8.2 Test Instruments

Shielded Room S4				
Type	Model	Serial No. (ID)	Manufacturer	Cal. Due
Base Station Simulator	MT8815B	6200711439 (B-69)	Anritsu	2016/08/13
Environmental Chamber	SH-641	92010990 (F-32)	ESPEC	2016/07/06
DC Voltage Meter	2011	02247S (B-33)	YOKOGAWA	2016/04/07
DC Power Supply	NL035-10	35883293 (F-4)	TAKASAGO	N/A

NOTE : The calibration interval of the above test instruments is 12 months.


7.8.3 Test Method and Test Setup (Diagrammatic illustration)

Frequency Stability versus Temperature

The EUT was placed in an environmental chamber and was tested in the range from –30 to +50 degrees Celsius. The EUT was stabilized at each temperature. The power (4.0VDC) supplied was applied to the transmitter and allowed to stabilize for 10 minutes. The transmitting frequency was measured at startup and 2 minutes, 5 minutes and 10 minutes after startup. This procedure was repeated from –30 to +50 degrees Celsius at the interval of 10 degrees.

Frequency Stability versus Power Supply Voltage

The EUT was placed in an environmental chamber and was tested at the temperature of +20 degrees Celsius. The EUT was stabilized at the temperature. The power (4.0VDC) and the power (3.7VDC, the ending voltage) was applied to the EUT allowed to stabilize for 10 minutes. The transmitting frequency was measured at startup and 2 minutes, 5 minutes and 10 minutes after startup.

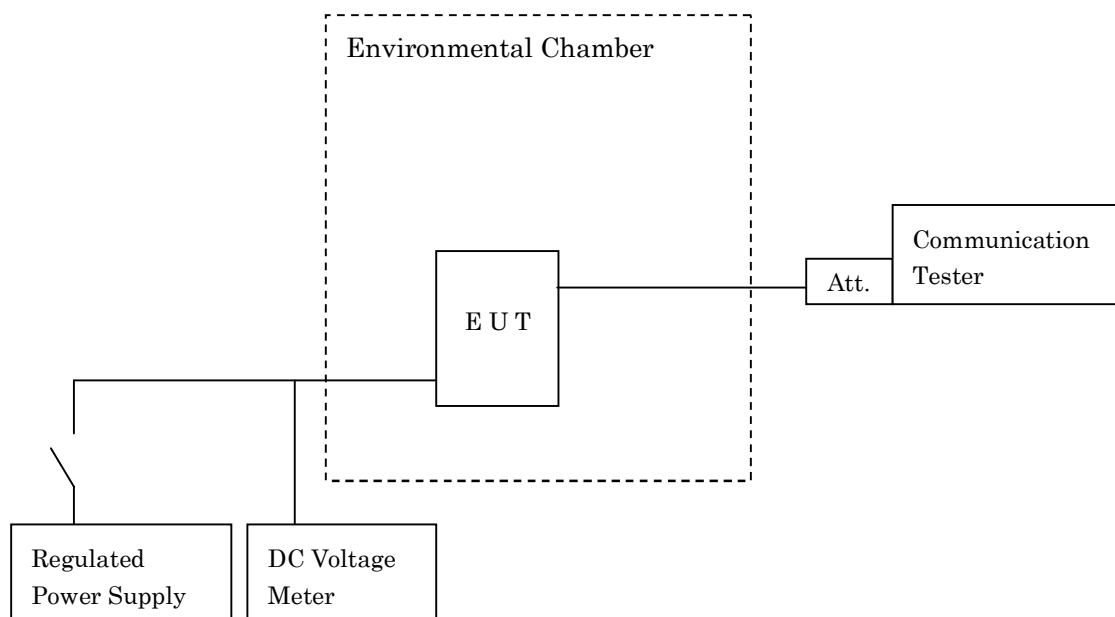

7.8.4 Test Data

(LTE)

Test Date: November 4, 2015
- November 5, 2015

1. Frequency Stability Measurement versus Temperature

Transmitting Frequency : 836.500 MHz (20525 ch)
DC Supply Voltage : 4.0 VDC

Ambient Temperature [°C]	Startup	Deviation [ppm]			Limits [ppm]	Margin [ppm]
		2 minutes	5 minutes	10 minutes		
-30	+ 0.00	+ 0.00	+ 0.00	+ 0.00	2.50	2.50
-20	+ 0.00	+ 0.00	<u>+ 0.01</u>	<u>+ 0.01</u>	2.50	2.49
-10	+ 0.00	+ 0.00	<u>+ 0.01</u>	<u>+ 0.01</u>	2.50	2.49
0	<u>+ 0.01</u>	+ 0.00	<u>+ 0.01</u>	+ 0.00	2.50	2.49
10	+ 0.00	<u>+ 0.01</u>	<u>+ 0.01</u>	<u>+ 0.01</u>	2.50	2.49
20	+ 0.00	+ 0.00	<u>+ 0.01</u>	+ 0.00	2.50	2.49
30	+ 0.00	+ 0.00	<u>- 0.01</u>	<u>- 0.01</u>	2.50	2.49
40	+ 0.00	<u>- 0.01</u>	+ 0.00	+ 0.00	2.50	2.49
50	+ 0.00	<u>- 0.01</u>	+ 0.00	<u>- 0.01</u>	2.50	2.49

2. Frequency Stability Measurement versus Power Supply Voltage

Transmitting Frequency : 836.500 MHz (20525 ch)
Ambient Temperature: : 20 °C

DC Supply Voltage [V]	Startup	Deviation [ppm]			Limits [ppm]	Margin [ppm]
		2 minutes	5 minutes	10 minutes		
4.0	+ 0.00	+ 0.00	<u>+ 0.01</u>	+ 0.00	2.50	2.49
3.7(Ending)	+ 0.00	+ 0.00	<u>+ 0.01</u>	+ 0.00	2.50	2.49

Test condition example as the maximum deviation point shown on underline:

Ambient Temperature : -20 °C / 5 minutes

DC Supply Voltage : 4 VDC

NOTE : The measurement were made after all of components of the oscillator sufficiently stabilized at each temperature.