

TEST REPORT

Applicant : SHARP CORPORATION, Consumer Electronics Company,
Communication Systems Division

Address : 2-13-1, Iida Hachihonmatsu, Higashi-Hiroshima City, Hiroshima,
739-0192, Japan

Products : Smart Phone

Model No. : 506SH

Serial No. : 004401/11/570776/8
004401/11/570796/6

FCC ID : APYHRO00233

Test Standard : CFR 47 FCC Rules and Regulations Part 15

Test Results : **Passed**

Date of Test : March 19 ~ 29, 2016



A handwritten signature in black ink, likely belonging to Kousei Shibata.

Kousei Shibata

Manager

Japan Quality Assurance Organization

KITA-KANSAI Testing Center

SAITO EMC Branch

7-3-10, Saito-asagi, Ibaraki-shi, Osaka 567-0085, Japan

-
- The measurement values stated in Test Report was made with traceable to National Institute of Advanced Industrial Science and Technology (AIST) of Japan and National Institute of Information and Communications Technology (NICT) of Japan.
 - The applicable standard, testing condition and testing method which were used for the tests are based on the request of the applicant.
 - The test results presented in this report relate only to the offered test sample.
 - The contents of this test report cannot be used for the purposes, such as advertisement for consumers.
 - This test report shall not be reproduced except in full without the written approval of JQA.
 - VLAC does not approve, certify or warrant the product by this test report.

TABLE OF CONTENTS

	Page
1 Description of the Equipment Under Test	3
2 Summary of Test Results	4
3 Test Procedure	5
4 Test Location	5
5 Recognition of Test Laboratory	5
6 Description of Test Setup	6
7 Test Requirements	10

DEFINITIONS FOR ABBREVIATION AND SYMBOLS USED IN THIS TEST REPORT

EUT : Equipment Under Test

AE : Associated Equipment

N/A : Not Applicable

N/T : Not Tested

EMC : Electromagnetic Compatibility

EMI : Electromagnetic Interference

EMS : Electromagnetic Susceptibility

☒ - indicates that the listed condition, standard or equipment is applicable for this report.

☐ - indicates that the listed condition, standard or equipment is not applicable for this report.

1 Description of the Equipment Under Test

1. Manufacturer : SHARP CORPORATION, Consumer Electronics Company,
Communication Systems Division
2-13-1, Iida Hachihonmatsu, Higashi-Hiroshima City, Hiroshima,
739-0192, Japan
2. Products : Smart Phone
3. Model No. : 506SH
4. Serial No. : 004401/11/570776/8
004401/11/570796/6
5. Product Type : Pre-production
6. Date of Manufacture : February, 2016
7. Power Rating : 4.0VDC (Lithium-ion Battery UBATIA269AFN1 3000mAh)
8. Grounding : None
9. Transmitting Frequency : WLAN: 2412.0 MHz(01CH) –2462.0MHz(11CH)
Bluetooth LE: 2402.0 MHz(00CH) – 2480.0MHz(39CH)
10. Receiving Frequency : WLAN: 2412.0 MHz(01CH) –2462.0MHz(11CH)
Bluetooth LE: 2402.0 MHz(00CH) – 2480.0MHz(39CH)
11. Max. RF Output Power : 15.79 dBm(Measure Value of IEEE802.11b)
24.37 dBm(Measure Value of IEEE802.11g)
24.65 dBm(Measure Value of IEEE802.11n)
4.31 dBm(Measure Value of Bluetooth LE)
12. Antenna Type : Inverted-L Type Antenna (Integral)
13. Antenna Gain : 0 dBi (Main/Sub)
14. Category : DTS
15. EUT Authorization : Certification
16. Received Date of EUT : March 18, 2016

17. Channel Plan**WLAN:**

The carrier spacing is 5 MHz.

The carrier frequency is designated by the absolute frequency channel number (ARFCN).

The carrier frequency is expressed in the equation shown as follows:

Transmitting Frequency (in MHz) = $2407.0 + 5 \cdot n$

Receiving Frequency (in MHz) = $2407.0 + 5 \cdot n$

where, n : channel number ($1 \leq n \leq 11$)

Bluetooth Low Energy Mode:

The carrier spacing is 2 MHz.

The carrier frequency is designated by the absolute frequency channel number (ARFCN).

The carrier frequency is expressed in the equation shown as follows:

Transmitting Frequency (in MHz) = $2402.0 + 2 \cdot n$

Receiving Frequency (in MHz) = $2402.0 + 2 \cdot n$

where, n : channel number ($0 \leq n \leq 39$)

2 Summary of Test Results

Applied Standard : CFR 47 FCC Rules and Regulations Part 15
Subpart C – Intentional Radiators

The EUT described in clause 1 was tested according to the applied standard shown above.

Details of the test configuration is shown in clause 6.

The conclusion for the test items of which are required by the applied standard is indicated under the test result.

- ☒ - The test result was **passed** for the test requirements of the applied standard.
- ☐ - The test result was **failed** for the test requirements of the applied standard.
- ☐ - The test result was **not judged** the test requirements of the applied standard.

In the approval of test results,

- Determining compliance with the limits in this report was based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.
- No deviations were employed from the applied standard.
- No modifications were conducted by JQA to achieve compliance to the limitations.

Reviewed by:

Tested by:



Shigeru Kinoshita
Assistant Manager
JQA KITA-KANSAI Testing Center
SAITO EMC Branch



Shigeru Osawa
Deputy Manager
JQA KITA-KANSAI Testing Center
SAITO EMC Branch

3 Test Procedure

Test Requirements : §15.247, §15.207 and §15.209

Test Procedure : ANSI C63.10–2013
Testing unlicensed wireless devices.

KDB 558074 D01
DTS Meas Guidance v03r03: June 9, 2015.

KDB 662911 D01
Multiple Transmitter Output v02r01: October 31, 2013

4 Test Location

Japan Quality Assurance Organization (JQA)
KITA-KANSAI Testing Center
7-7, Ishimaru, 1-chome, Minoh-shi, Osaka, 562-0027, Japan
SAITO EMC Branch
7-3-10, Saito-asagi, Ibaraki-shi, Osaka 567-0085, Japan

5 Recognition of Test Laboratory

JQA KITA-KANSAI Testing Center SAITO EMC Branch is accredited under ISO/IEC 17025 by following accreditation bodies and the test facility is registered by the following bodies.

VLAC Accreditation No. : VLAC-001-2 (Expiry date : March 30, 2018)
VCCI Registration No. : A-0002 (Expiry date : March 30, 2018)
BSMI Registration No. : SL2-IS-E-6006, SL2-IN-E-6006, SL2-R1/R2-E-6006, SL2-A1-E-6006
(Expiry date : September 14, 2016)
IC Registration No. : 2079E-3, 2079E-4 (Expiry date : July 16, 2017)

Accredited as conformity assessment body for Japan electrical appliances and material law by METI.
(Expiry date : February 22, 2019)

6 Description of Test Setup

6.1 Test Configuration

The equipment under test (EUT) consists of :

	Item	Manufacturer	Model No.	Serial No.	FCC ID
A	Smart Phone	Sharp	506SH	004401/11/570776/8 *1) 004401/11/570796/6 *2)	APYHRO00233
B	AC Adapter	Sharp	SHCEJ1	--	N/A
C	Earphone	Softbank	ZTCAA1	--	N/A
D	DTV Antenna	Sharp	--	--	N/A

*1) Used for AC Powerline Conducted Emission and Field Strength of Spurious Emission.

*2) Used for Antenna Conducted Emission.

The auxiliary equipment used for testing :


None

Type of Cable:


No.	Description	Identification (Manu. etc.)	Connector Shielded	Cable Shielded	Ferrite Core	Length (m)
1	USB conversion cable	--	--	NO	NO	1.5
2	Earphone Cable	--	--	NO	NO	0.5
3	DTV Antenna Cable	--	--	NO	NO	0.1

6.2 Test Arrangement (Drawings)


a) Single Unit



b) AC Adapter used

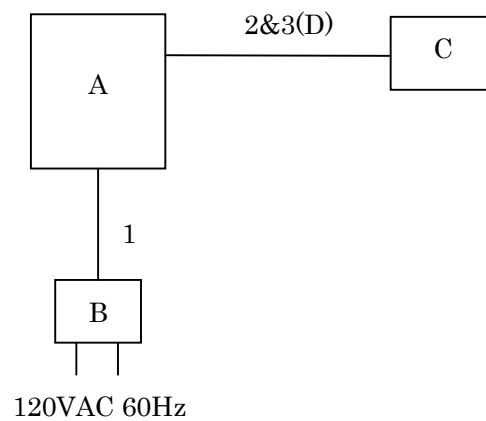

c) Earphone used

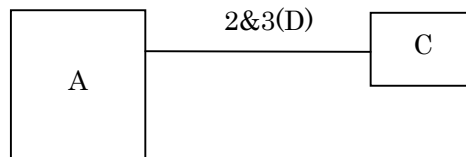

6.3 Operating Condition

Power Supply Voltage : 4.0 VDC (for Battery)
120 VAC, 60 Hz (For AC Adapter)

Transmitting/Receiving

WLAN:

Transmitting frequency : 2412.0 MHz(1CH) – 2462.0 MHz(11CH)
Receiver frequency : 2412.0 MHz(1CH) – 2462.0 MHz(11CH)

Bluetooth Low Energy Mode(Bluetooth 4.0 + EDR + LE):

Transmitting frequency : 2402.0 MHz(0CH) – 2480.0 MHz(39CH)
Receiver frequency : 2402.0 MHz(0CH) – 2480.0 MHz(39CH)

Modulation Type

1. 802.11b : DSSS
2. 802.11g : OFDM
3. 802.11n : OFDM
4. LE Packet (Modulation Type : GFSK)

The equipment has two antennas(Main Antenna[ANT0]/Sub Antenna[ANT1]), and uses the MIMO technology.

This equipment works only in 2TX(Main+Sub) mode, and it does not operate in 1TX mode.
Therefore, the radiated emission tests were carried out in the following mode.

2TX (Main+Sub)

The tests were performed in the following worst condition.

Mode	Condition
IEEE802.11b	11 Mbps
IEEE802.11g	48 Mbps
IEEE802.11n	MCS4 (39 Mbps)

Note: The worst condition was determined based on the test result of Maximum Peak Output Power(Mid channel). (Main Antenna)

The EUT was rotated through three orthogonal axis (X, Y and Z axis) in radiated measurement.
The EUT with temporary antenna port was used in conducted measurement.

The test were carried out using the following test program supplied by applicant;

- Software Name: WLAN_BT Manual test mode operation
- Software Version: -- (Dated 2016/03/10)
- Storage Location: Controller PC(supplied by applicant)

DIRECTIONAL ANTENNA GAIN

For Power: The TX chains are uncorrelated and the antenna gain is the same for each chain. The directional gain is equal to the antenna gain.

ANT0	ANT1	Uncorrelated Chains
Antenna	Antenna	Directional
Gain	Gain	Gain
[dBi]	[dBi]	[dBi]
0.00	0.00	0.00

For PSD: The TX chains are correlated. The directional gain is:

ANT0	ANT1	Correlated Chains
Antenna	Antenna	Directional
Gain	Gain	Gain
[dBi]	[dBi]	[dBi]
0.00	0.00	3.01

7 Test Requirements

7.0 Summary of the Test Results

Test Item	FCC Specification	Reference of the Test Report	Results	Remarks
Antenna Requirement	Section 15.203	Section 1.12	Passed	-
Channel Separation	Section 15.247(a)(1)	-	-	-
Minimum Hopping Channel	Section 15.247(a)(1)(iii)	-	-	-
Occupied Bandwidth	Section 15.247(a)(2)	Section 7.3	Passed	-
Dwell Time	Section 15.247(a)(1)(iii)	-	-	-
Peak Output Power (Conduction)	Section 15.247(b)(3)	Section 7.5	Passed	-
Peak Power Density (Conduction)	Section 15.247(e)	Section 7.6	Passed	-
Spurious Emissions (Conduction)	Section 15.247(d)	Section 7.7	Passed	-
AC Powerline Conducted Emission	Section 15.207	Section 7.8	Passed	-
Radiated Emission	Section 15.247(d)	Section 7.9	Passed	-

7.1 Channel Separation

For the requirements, ☐ - Applicable [☐ - Tested. ☐ - Not tested by applicant request.]
☒ - Not Applicable

Remarks : _____

7.2 Minimum Hopping Channel

For the requirements, ☐ - Applicable [☐ - Tested. ☐ - Not tested by applicant request.]
☒ - Not Applicable

Remarks : _____

7.3 Occupied Bandwidth

For the requirements, ☒ - Applicable [☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

7.3.1 Test Results

For the standard, ☒ - Passed ☐ - Failed ☐ - Not judged

The 99% Bandwidth of IEEE802.11b is	<u>12.980</u>	MHz	at	<u>2462.0</u>	MHz
The 99% Bandwidth of IEEE802.11g is	<u>16.454</u>	MHz	at	<u>2462.0</u>	MHz
The 99% Bandwidth of IEEE802.11n is	<u>17.651</u>	MHz	at	<u>2437.0</u>	MHz
The 99% Bandwidth of Bluetooth LE is	<u>1095.9</u>	kHz	at	<u>2440.0</u>	MHz
The 6dB Bandwidth of IEEE802.11b is	<u>8.919</u>	MHz	at	<u>2437.0</u>	MHz
The 6dB Bandwidth of IEEE802.11g is	<u>16.521</u>	MHz	at	<u>2412/2462</u>	MHz
The 6dB Bandwidth of IEEE802.11n is	<u>17.733</u>	MHz	at	<u>2462.0</u>	MHz
The 6dB Bandwidth of Bluetooth LE is	<u>671.6</u>	kHz	at	<u>2402.0</u>	MHz

Uncertainty of Measurement Results ± 0.9 %(2σ)

Remarks : _____


7.3.2 Test Instruments

Shielded Room S4				
Type	Model	Serial No. (ID)	Manufacturer	Cal. Due
Spectrum Analyzer	E4446A	US44300388 (A-39)	Agilent	2016/08/11
Attenuator	54A-10	W5675 (D-28)	Weinschel	2016/08/16
RF Cable	SUCOFLEX102	14253/2 (C-52)	HUBER+SUHNER	2016/08/16

NOTE : The calibration interval of the above test instruments is 12 months.

7.3.3 Test Method and Test Setup (Diagrammatic illustration)

The test system is shown as follows:



The setting of the spectrum analyzer are shown as follows:

	WLAN	Bluetooth
Res. Bandwidth	100 kHz	100 kHz
Video Bandwidth	300 kHz	300 kHz
Span	30 MHz	3 MHz
Sweep Time	AUTO	AUTO
Trace	Maxhold	Maxhold

7.3.4 Test Data

Mode of EUT : WLAN

Test Date : March 28, 2016


Temp.: 22°C, Humi: 34%

The resolution bandwidth was set to 100 kHz, -6dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

A) IEEE 802.11b

1) Main Antenna


Channel	Frequency (MHz)	99% Bandwidth (MHz)	-6dBc Bandwidth (MHz)	Minimum -6dBc Bandwidth Limit (kHz)
01	2412.0	12.930	7.686	500
06	2437.0	12.808	8.265	500
11	2462.0	12.980	7.702	500

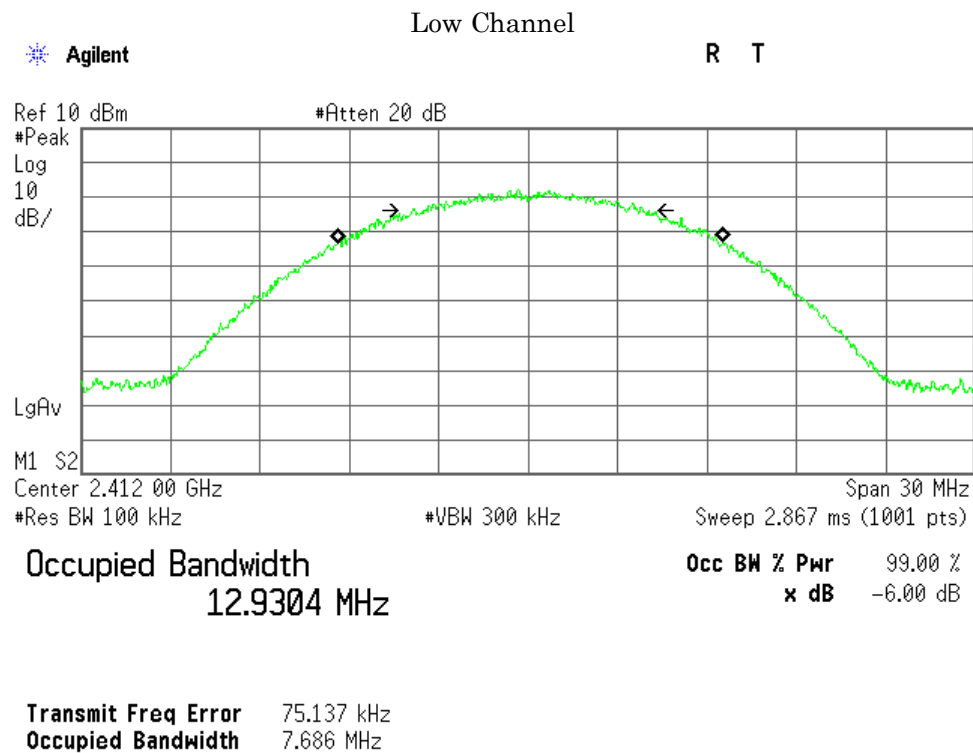

Middle Channel

Agilent

R L

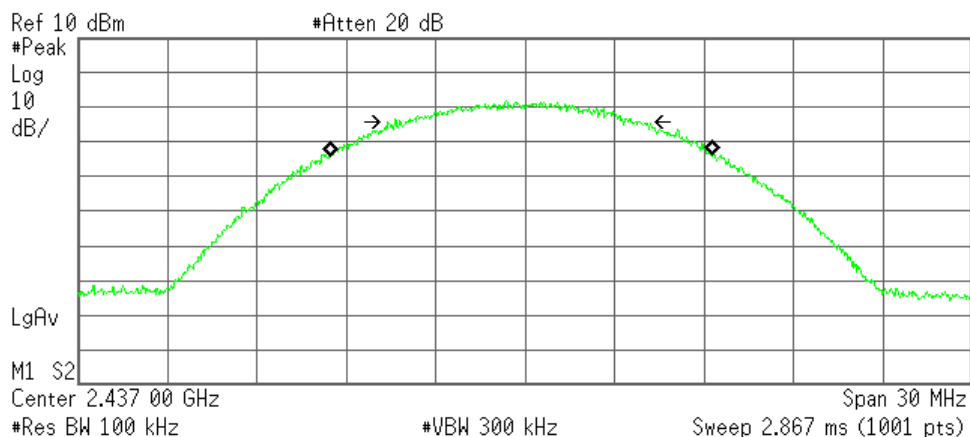

Occupied Bandwidth
12.8082 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error -128.743 kHz
Occupied Bandwidth 8.265 MHz

High Channel

Agilent

R L

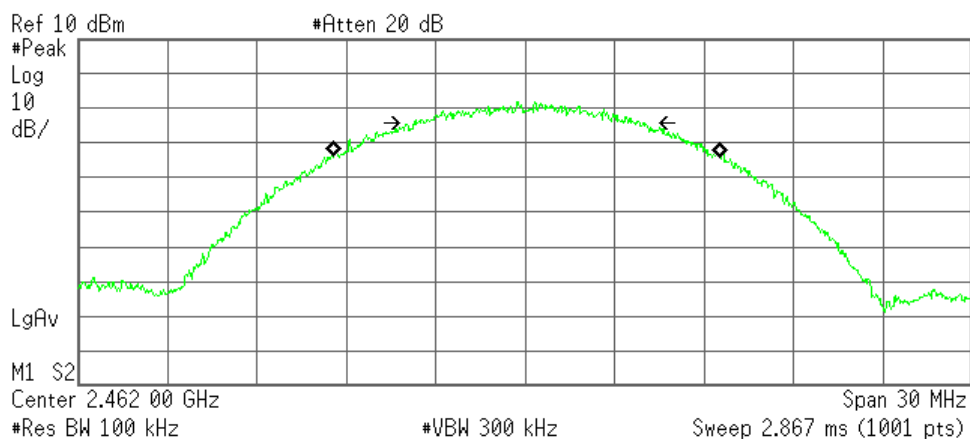


Occupied Bandwidth
12.9802 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error 57.405 kHz
Occupied Bandwidth 7.702 MHz

2) Sub Antenna


Channel	Frequency (MHz)	99% Bandwidth (MHz)	-6dBc Bandwidth (MHz)	Minimum -6dBc Bandwidth Limit (kHz)
01	2412.0	12.852	8.236	500
06	2437.0	12.879	8.919	500
11	2462.0	12.950	8.056	500

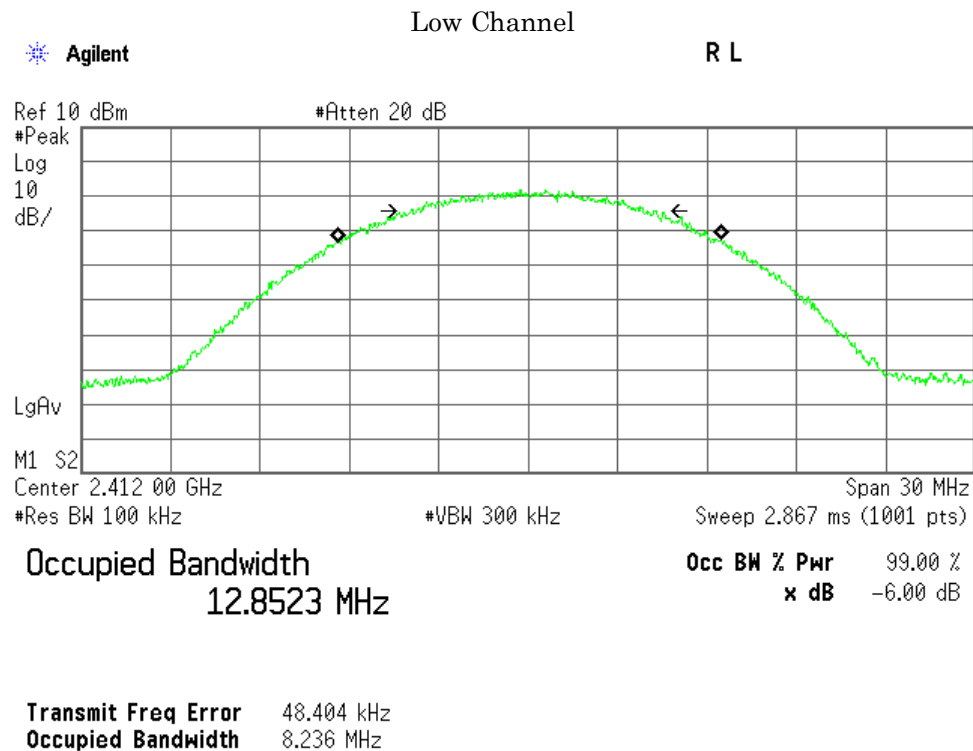

Middle Channel

Agilent

R T

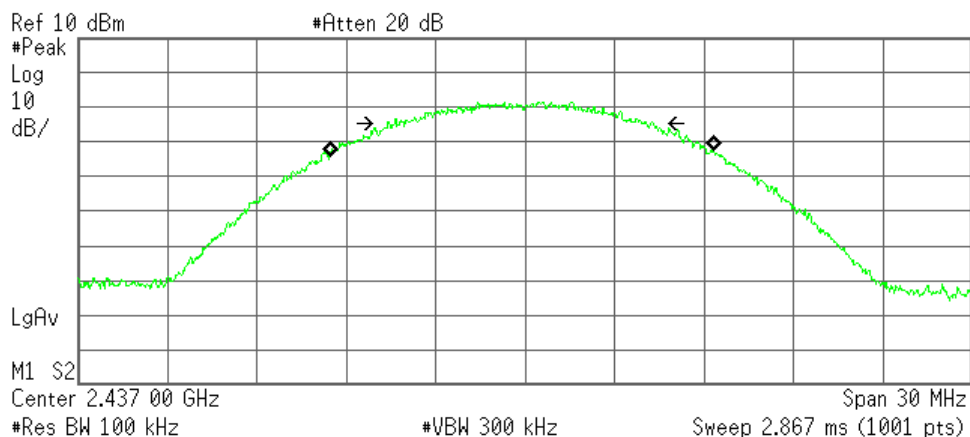

Occupied Bandwidth
12.8786 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error -111.777 kHz
Occupied Bandwidth 8.919 MHz

High Channel

Agilent

R L

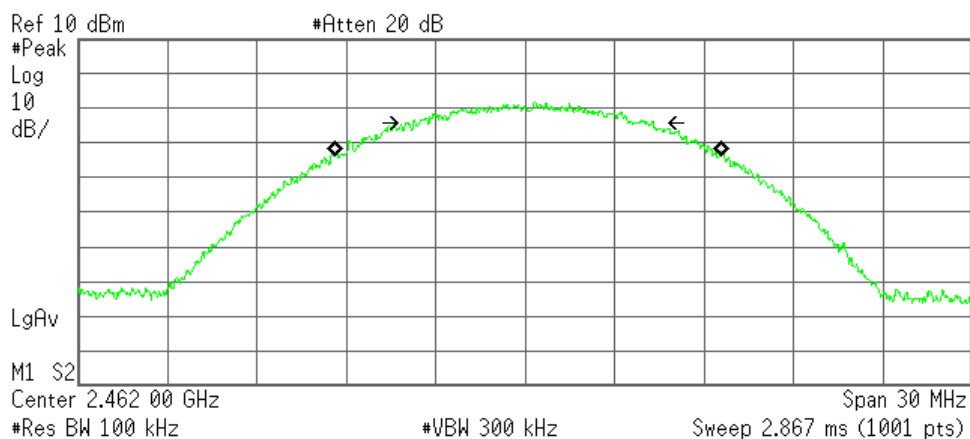

Occupied Bandwidth
12.9502 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB


Transmit Freq Error 94.814 kHz
Occupied Bandwidth 8.056 MHz



B) IEEE 802.11g

1) Main Antenna

Channel	Frequency (MHz)	99% Bandwidth (MHz)	-6dBc Bandwidth (MHz)	Minimum -6dBc Bandwidth Limit (kHz)
01	2412.0	16.441	16.479	500
06	2437.0	16.449	16.483	500
11	2462.0	16.454	16.521	500


Low Channel

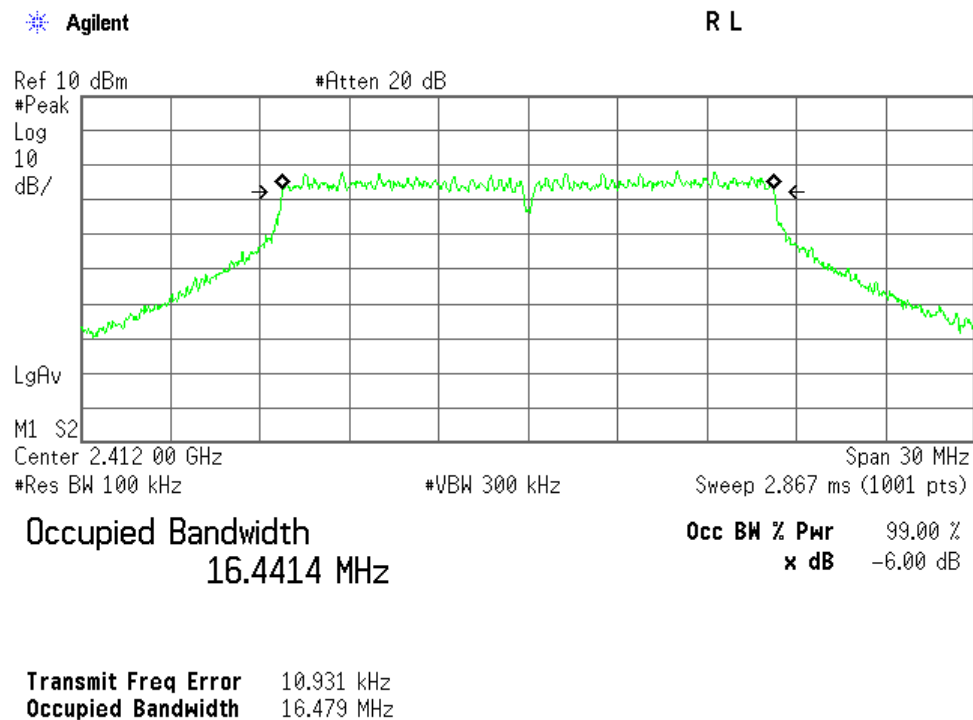

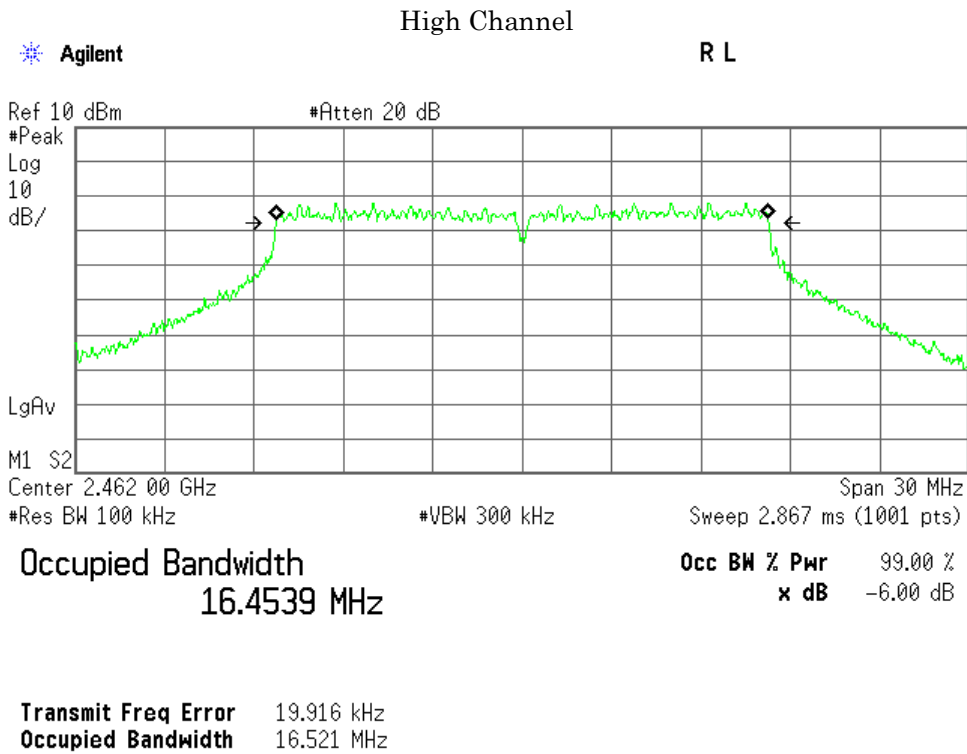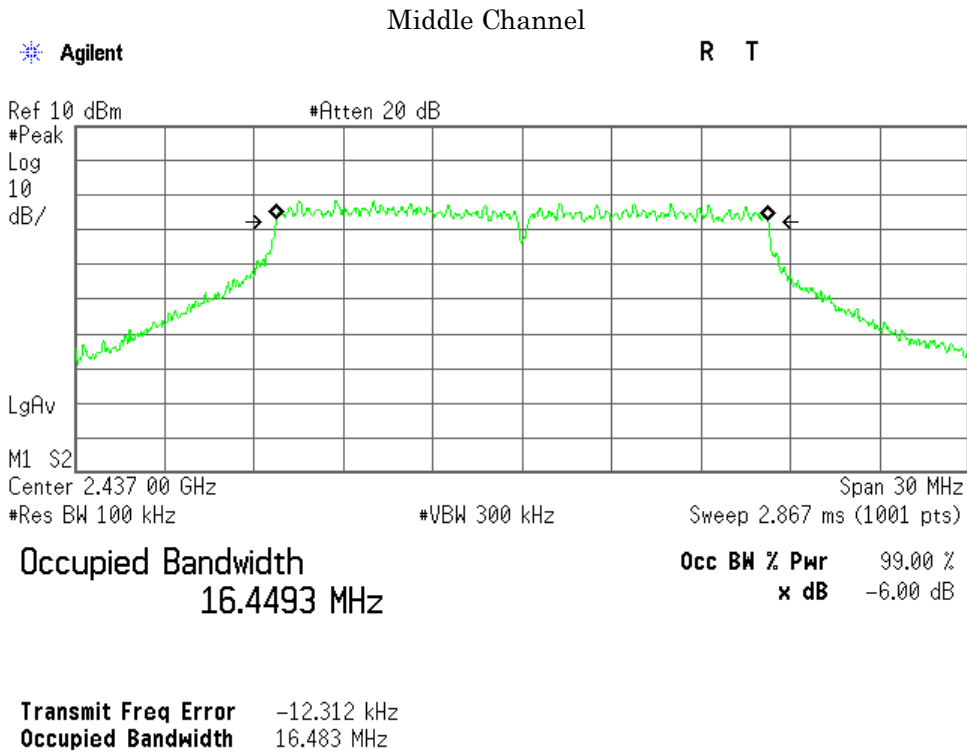

2) Sub Antenna


Channel	Frequency (MHz)	99% Bandwidth (MHz)	-6dBc Bandwidth (MHz)	Minimum -6dBc Bandwidth Limit (kHz)
01	2412.0	16.442	16.521	500
06	2437.0	16.443	16.490	500
11	2462.0	16.441	16.519	500

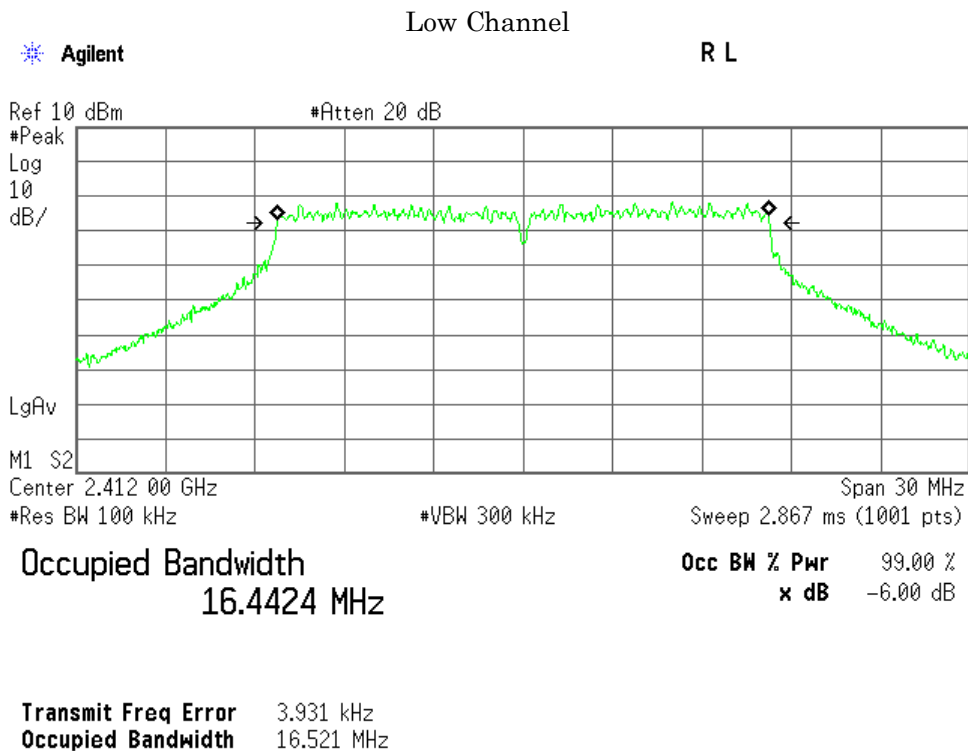

Middle Channel

Agilent

R L

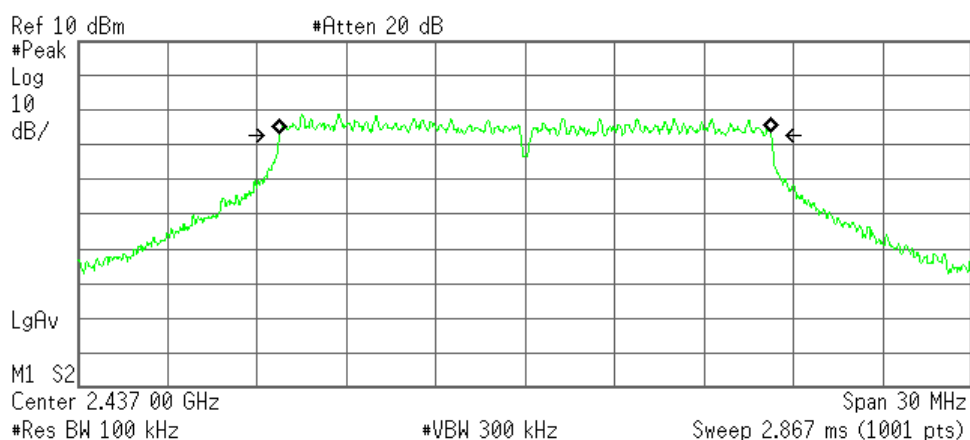

Occupied Bandwidth
16.4427 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error -7.773 kHz
Occupied Bandwidth 16.490 MHz

High Channel

Agilent

R L

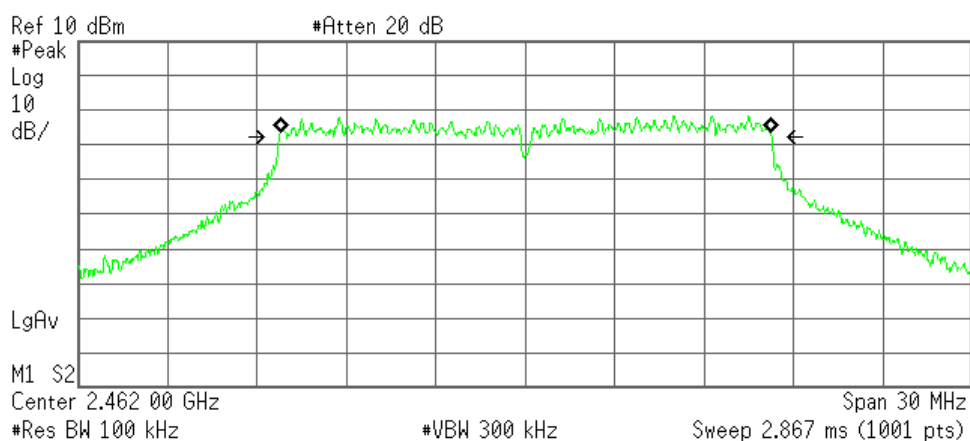

Occupied Bandwidth
16.4408 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB


Transmit Freq Error 17.831 kHz
Occupied Bandwidth 16.519 MHz

C) IEEE 802.11n

1) Main Antenna

Channel	Frequency (MHz)	99% Bandwidth (MHz)	-6dBc Bandwidth (MHz)	Minimum -6dBc Bandwidth Limit (kHz)
01	2412.0	17.650	17.731	500
06	2437.0	17.634	17.673	500
11	2462.0	17.648	17.733	500


Low Channel

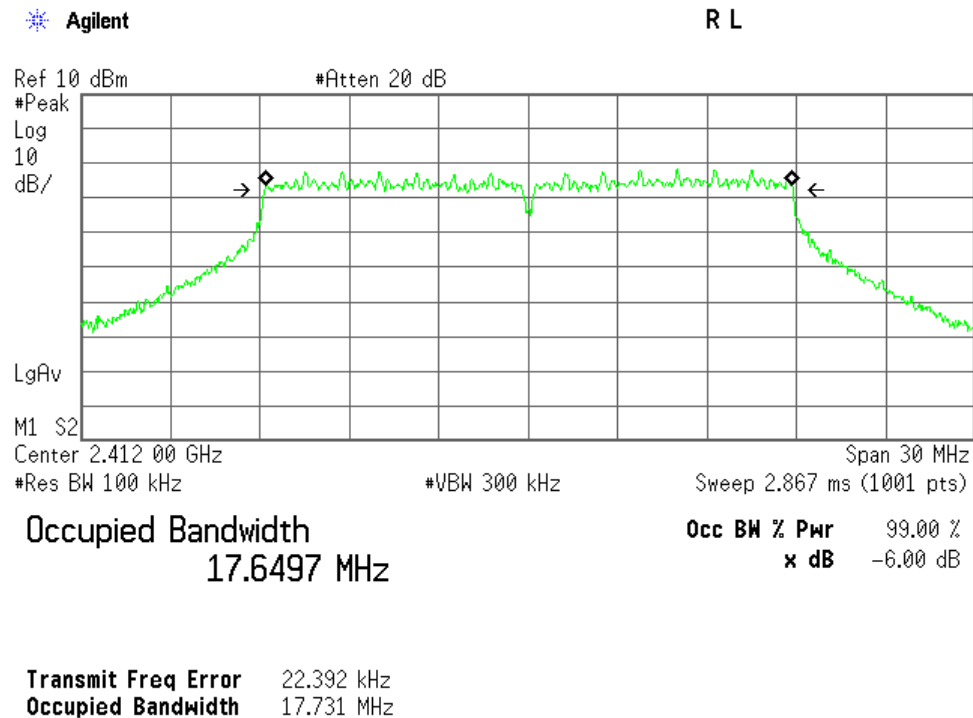

Middle Channel

Agilent

R L

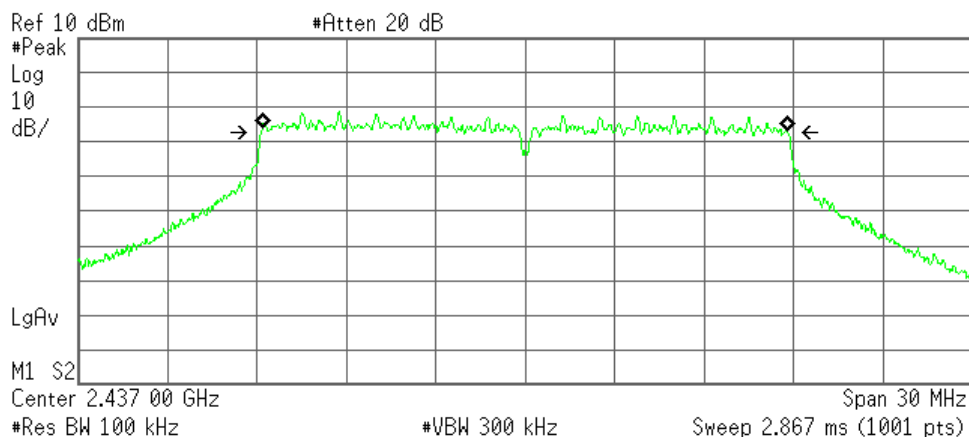

Occupied Bandwidth
17.6344 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error -11.433 kHz
Occupied Bandwidth 17.673 MHz

High Channel

Agilent

R T

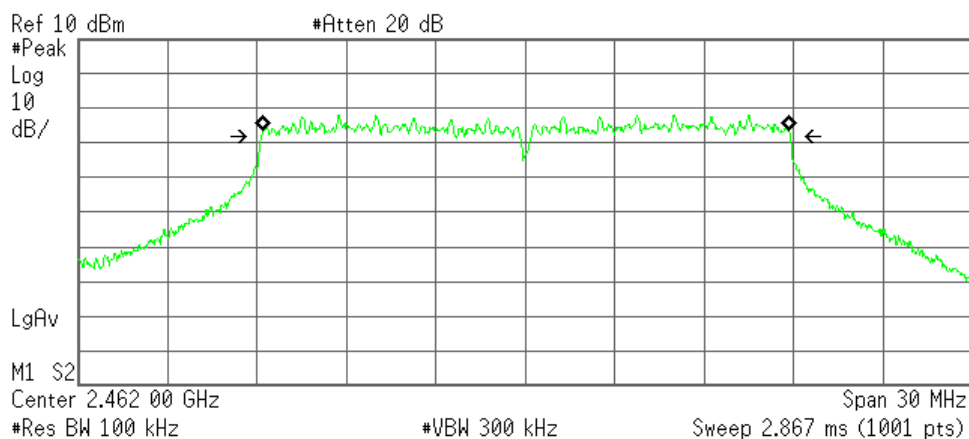


Occupied Bandwidth
17.6479 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error 21.679 kHz
Occupied Bandwidth 17.733 MHz

2) Sub Antenna


Channel	Frequency (MHz)	99% Bandwidth (MHz)	-6dBc Bandwidth (MHz)	Minimum -6dBc Bandwidth Limit (kHz)
01	2412.0	17.644	17.726	500
06	2437.0	17.651	17.698	500
11	2462.0	17.625	17.634	500

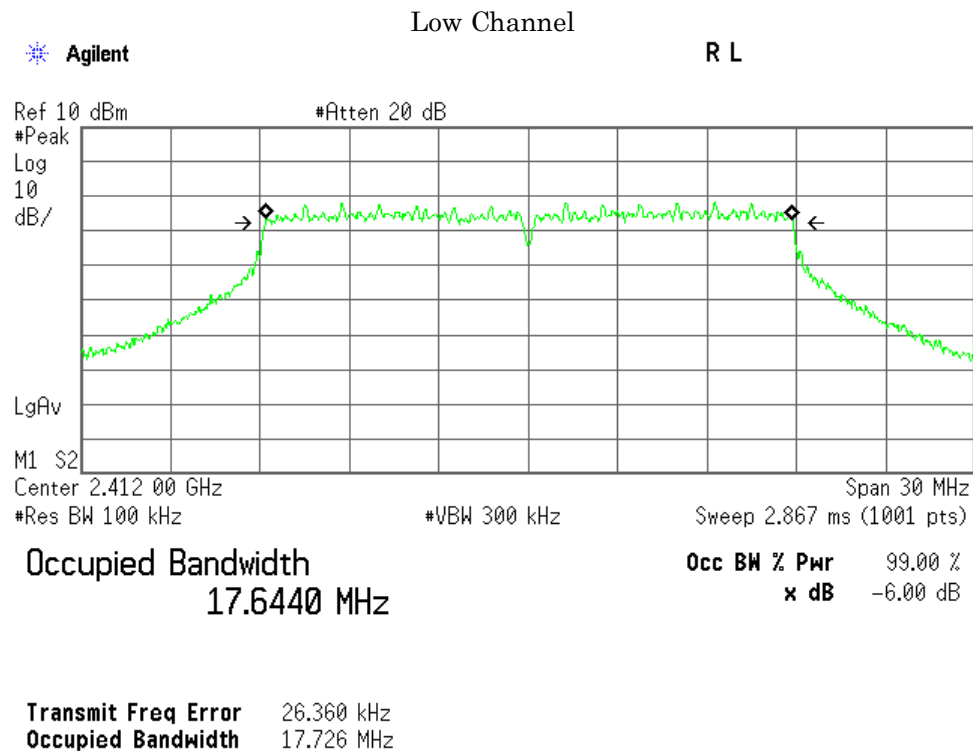

Middle Channel

Agilent

R T

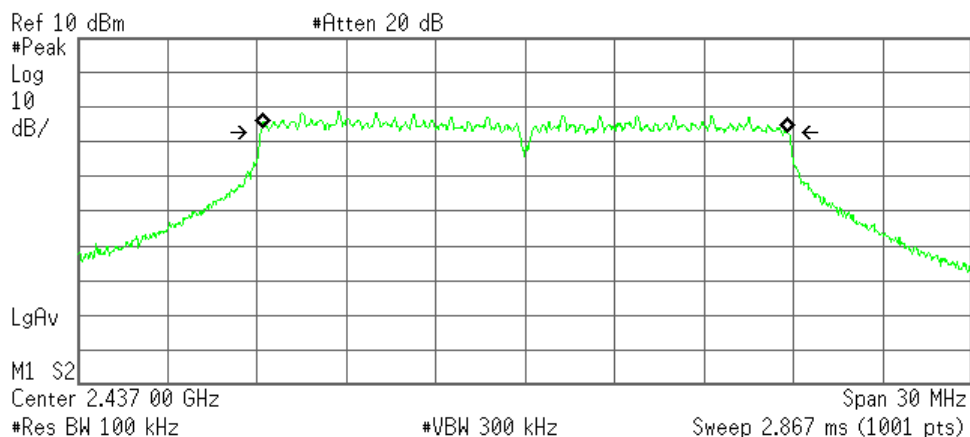

Occupied Bandwidth
17.6510 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error -7.162 kHz
Occupied Bandwidth 17.698 MHz

High Channel

Agilent

R T

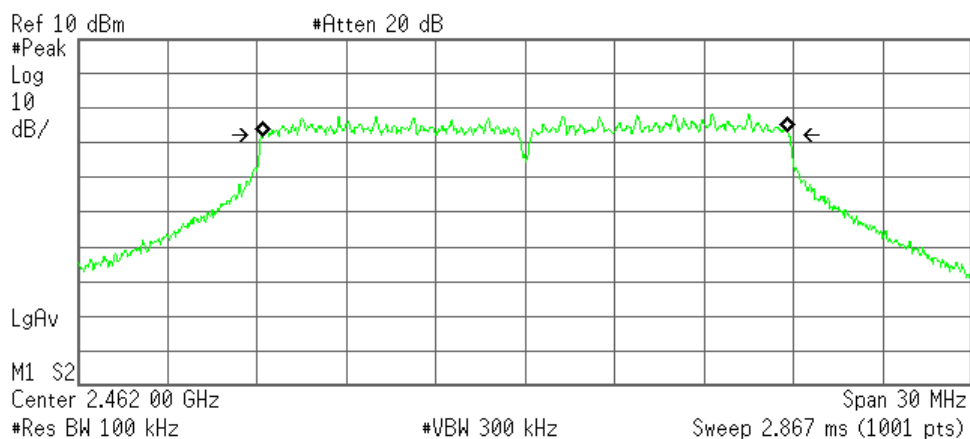

Occupied Bandwidth
17.6246 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error 15.850 kHz
Occupied Bandwidth 17.634 MHz

Mode of EUT : Bluetooth Low Energy

Test Date : March 29, 2016

Temp.:22°C, Humi:34%

The resolution bandwidth was set to 100 kHz, -6dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

1)Packet Setting : LE (Modulation type : GFSK)


Channel	Frequency (MHz)	99% Bandwidth (kHz)	-6dBc Bandwidth (kHz)	Minimum -6dBc Bandwidth Limit (kHz)
00	2402.0	1094.7	671.6	500
19	2440.0	1095.9	671.0	500
39	2480.0	1094.8	663.6	500

1)Packet Setting : LE (Modulation type : GFSK)

Low Channel

Agilent



R L

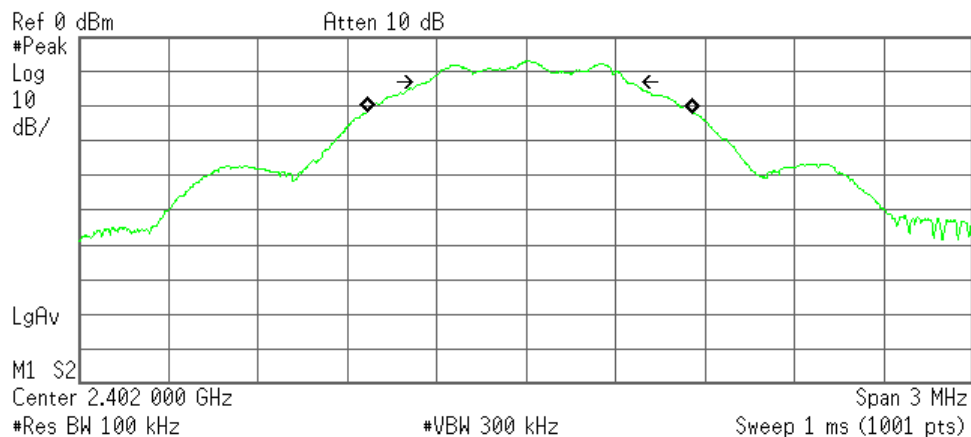

Occupied Bandwidth
1.0947 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error 11.869 kHz
Occupied Bandwidth 671.590 kHz

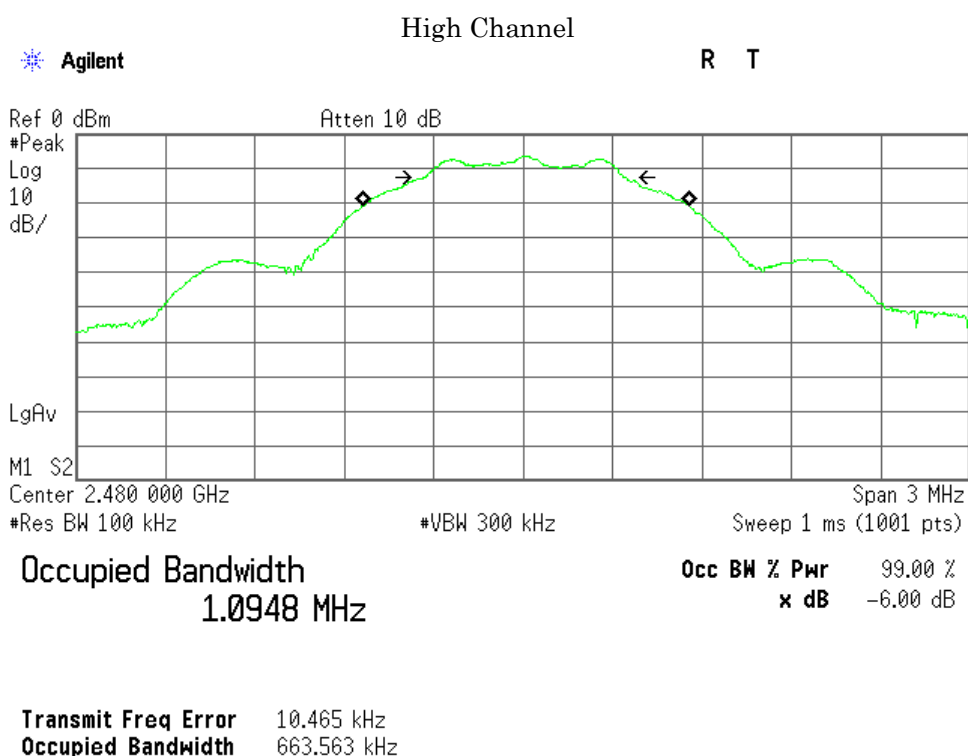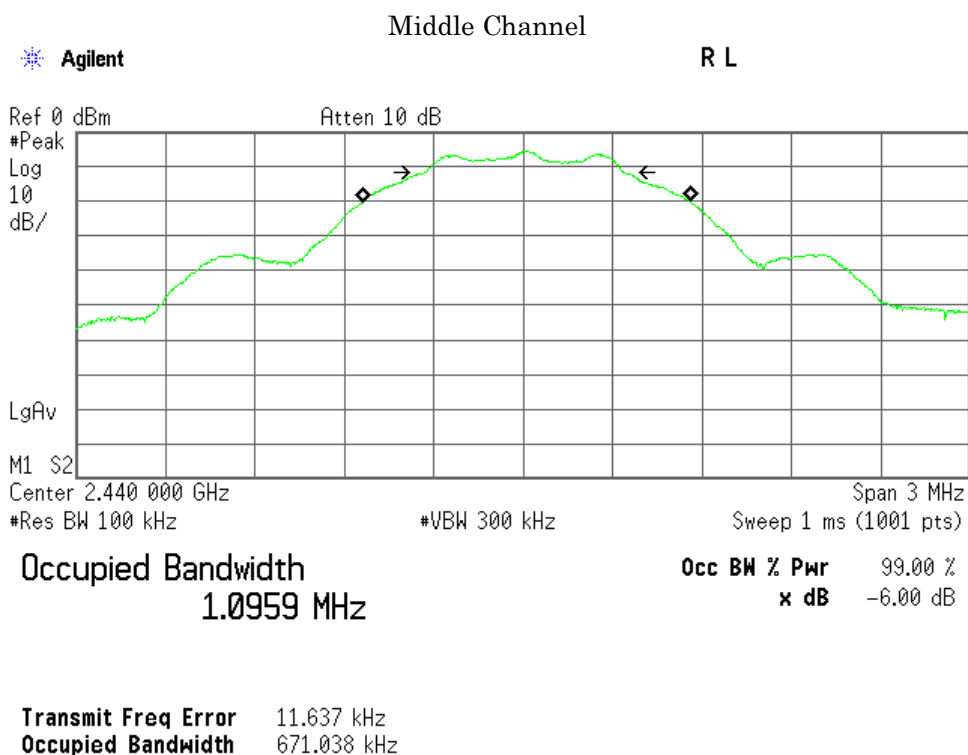

7.4 Dwell Time

For the requirements, ☐ - Applicable [☐ - Tested. ☐ - Not tested by applicant request.]
☒ - Not Applicable

Remarks : _____

7.5 Peak Output Power(Conduction)

For the requirements, ☒ - Applicable [☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

7.5.1 Test Results

For the standard, ☒ - Passed ☐ - Failed ☐ - Not judged

Peak Output Power of IEEE802.11b is	<u>15.79</u>	dBm	at	<u>2412.0</u>	MHz
Peak Output Power of IEEE802.11g is	<u>24.37</u>	dBm	at	<u>2412.0</u>	MHz
Peak Output Power of IEEE802.11n is	<u>24.65</u>	dBm	at	<u>2462.0</u>	MHz
Peak Output Power of Bluetooth LE is	<u>4.31</u>	dBm	at	<u>2440.0</u>	MHz

Uncertainty of Measurement Results ± 0.9 dB(2 σ)

Remarks : _____


7.5.2 Test Instruments

Shielded Room S4				
Type	Model	Serial No. (ID)	Manufacturer	Cal. Due
Power Meter	N1911A	GB45100291 (B-63)	Agilent	2016/07/16
Power Sensor	N1921A	US44510470 (B-64)	Agilent	2016/07/16
Attenuator	54A-10	W5675 (D-28)	Weinschel	2016/08/16
RF Cable	SUCOFLEX102	14253/2 (C-52)	HUBER+SUHNER	2016/08/16

NOTE : The calibration interval of the above test instruments is 12 months.

7.5.3 Test Method and Test Setup (Diagrammatic illustration)

The Conducted RF Power Output was measured with a power meter, one attenuator and a short, low loss cable.



7.5.4 Test Data

1) IEEE 802.11b

Data Rate : 11Mbps

Test Date: March 25, 2016

Temp.: 22 °C, Humi: 25 %

Transmitting Frequency		Correction	Meter Reading			Conducted		Limits	Margin
CH	[MHz]	Factor [dB]	ANT0 [dBm]	ANT1 [dBm]	Total [dBm]	Peak Output Power [dBm]	[mW]	[dBm]	[dB]
01	2412	10.06	2.74	2.70	5.73	15.79	37.93	30.00	+14.21
06	2437	10.08	2.67	2.71	5.70	15.78	37.84	30.00	+14.22
11	2462	10.08	2.59	2.68	5.65	15.73	37.41	30.00	+14.27

Calculated result at 2412.000 MHz, as the worst point shown on underline:

Correction Factor	=	10.06 dB
+) Meter Reading	=	5.73 dBm
Result	=	15.79 dBm = 37.93 mW

Minimum Margin: 30.00 - 15.79 = 14.21 (dB)

NOTES

- The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
- Setting of measuring instrument(s) :

Detector Function	Video B.W.
Peak	OFF

CH [MHz]
06 2437

Rate	Meter Reading [dBm]	Remark
1Mbps	2.60	
2Mbps	2.60	
5.5Mbps	2.63	
11Mbps	2.67	*

* : Worst Rate

All comparison were performed on the same measurement condition.

2) IEEE 802.11g

Data Rate : 48Mbps

Test Date: March 25, 2016

Temp.: 22 °C, Humi: 25 %

Transmitting Frequency		Correction	Meter Reading			Conducted		Limits	Margin
CH	[MHz]	Factor [dB]	ANT0 [dBm]	ANT1 [dBm]	Total [dBm]	Peak Output Power [dBm]	[mW]	[dBm]	[dB]
01	2412	10.06	11.28	11.31	14.31	24.37	273.53	30.00	+ 5.63
06	2437	10.08	11.02	11.32	14.18	24.26	266.69	30.00	+ 5.74
11	2462	10.08	11.12	11.37	14.26	24.34	271.64	30.00	+ 5.66

Calculated result at 2412.000 MHz, as the worst point shown on underline:

Correction Factor	=	10.06 dB
+) Meter Reading	=	14.31 dBm
Result	=	24.37 dBm = 273.53 mW

Minimum Margin: 30.00 - 24.37 = 5.63 (dB)

NOTES

- The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
- Setting of measuring instrument(s) :

Detector Function	Video B.W.
Peak	OFF

CH
06 [MHz]
2437

Rate	Meter Reading [dBm]	Remark
6Mbps	5.47	
9Mbps	5.41	
12Mbps	5.42	
18Mbps	5.60	
24Mbps	10.92	
36Mbps	10.57	
48Mbps	11.02	*
54Mbps	10.60	

* : Worst Rate

All comparison were performed on the same measurement condition.

3) IEEE 802.11n

Data Rate : MCS4

Test Date: March 25, 2016

Temp.: 22 °C, Humi: 25 %

Transmitting Frequency		Correction	Meter Reading			Conducted		Limits	Margin
CH	[MHz]	Factor [dB]	ANT0 [dBm]	ANT1 [dBm]	Total [dBm]	Peak Output Power [dBm]	[mW]	[dBm]	[dB]
01	2412	10.06	11.40	11.62	14.52	24.58	287.08	30.00	+ 5.42
06	2437	10.08	11.32	11.37	14.36	24.44	277.97	30.00	+ 5.56
11	2462	10.08	11.51	11.60	14.57	24.65	291.74	30.00	+ 5.35

Calculated result at 2462.000 MHz, as the worst point shown on underline:

Correction Factor	=	10.08 dB
+) Meter Reading	=	14.57 dBm
Result	=	24.65 dBm = 291.74 mW

Minimum Margin: 30.00 - 24.65 = 5.35 (dB)

NOTES

- The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
- Setting of measuring instrument(s) :

Detector Function	Video B.W.
Peak	OFF

CH
06 [MHz]
2437

Rate	Meter Reading [dBm]	Remark
MCS0	5.51	
MCS1	5.43	
MCS2	5.60	
MCS3	10.44	
MCS4	11.32	*
MCS5	10.05	
MCS6	10.65	
MCS7	10.25	

* : Worst Rate

All comparison were performed on the same measurement condition.

4) Bluetooth LE(Modulation type : GFSK)

Test Date: March 29, 2016

Temp.: 22 °C, Humi: 34 %

Transmitting Frequency		Correction Factor	Meter Reading	Conducted Peak Output Power		Limits	Margin
CH	[MHz]	[dB]	[dBm]	[dBm]	[mW]	[dBm]	[dB]
00	2402	10.06	-7.03	3.03	2.01	30.00	+26.97
19	2440	10.08	-5.77	4.31	2.70	30.00	+25.69
39	2480	10.08	-6.55	3.53	2.25	30.00	+26.47

Calculated result at 2440.000 MHz, as the worst point shown on underline:

Correction Factor	=	10.08 dB
+) Meter Reading	=	-5.77 dBm
Result	=	4.31 dBm = 2.70 mW

Minimum Margin: 30.00 - 4.31 = 25.69 (dB)

NOTES

1. The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.

2. Setting of measuring instrument(s) :

Detector Function	Video B.W.
Peak	Off

7.6 Peak Power Density(Conduction)

For the requirements, ☒ - Applicable [☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

7.6.1 Test Results

For the standard, ☒ - Passed ☐ - Failed ☐ - Not judged

Peak Power Density of IEEE802.11b is	<u>0.26</u>	dBm	at	<u>2412.0</u>	MHz
Peak Power Density of IEEE802.11g is	<u>-2.81</u>	dBm	at	<u>2462.0</u>	MHz
Peak Power Density of IEEE802.11n is	<u>-3.39</u>	dBm	at	<u>2462.0</u>	MHz
Peak Power Density of Bluetooth LE is	<u>3.77</u>	dBm	at	<u>2440.0</u>	MHz

Uncertainty of Measurement Results ± 1.7 dB(2σ)

Remarks : _____


7.6.2 Test Instruments

Shielded Room S4				
Type	Model	Serial No. (ID)	Manufacturer	Cal. Due
Spectrum Analyzer	E4446A	US44300388 (A-39)	Agilent	2016/08/11
Attenuator	54A-10	W5675 (D-28)	Weinschel	2016/08/16
RF Cable	SUCOFLEX102	14253/2 (C-52)	HUBER+SUHNER	2016/08/16

NOTE : The calibration interval of the above test instruments is 12 months.

7.6.3 Test Method and Test Setup (Diagrammatic illustration)

The test system is shown as follows:



7.6.4 Test Data

1) IEEE 802.11b

Data Rate : 11Mbps

Test Date: March 28, 2016

Temp.: 22 °C, Humi: 34 %

Transmitting Frequency		Correction Factor [dB]	Meter Reading			Conducted Peak Power Density		Limits [dBm]	Margin [dB]
CH	[MHz]		ANT0 [dBm]	ANT1 [dBm]	Total [dBm]	[dBm]	[mW]		
01	2412	10.06	-12.78	-12.85	-9.80	0.26	1.06	8.00	+ 7.74
06	2437	10.08	-13.09	-12.73	-9.90	0.18	1.04	8.00	+ 7.82
11	2462	10.08	-12.78	-12.91	-9.83	0.25	1.06	8.00	+ 7.75

Calculated result at 2412.000 MHz, as the worst point shown on underline:

Correction Factor	=	10.06 dB
+) Meter Reading	=	-9.80 dBm
Result	=	0.26 dBm = 1.06 mW


Minimum Margin: 8.00 - 0.26 = 7.74 (dB)


NOTES

- The peak power density complied with the limit using 30 kHz resolution bandwidth of Spectrum Analyzer.
- The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
- Setting of measuring instrument(s) :




Detector Function	RES B.W.	Video B.W.
Peak	30kHz	100kHz

a) Main Antenna (ANT0)

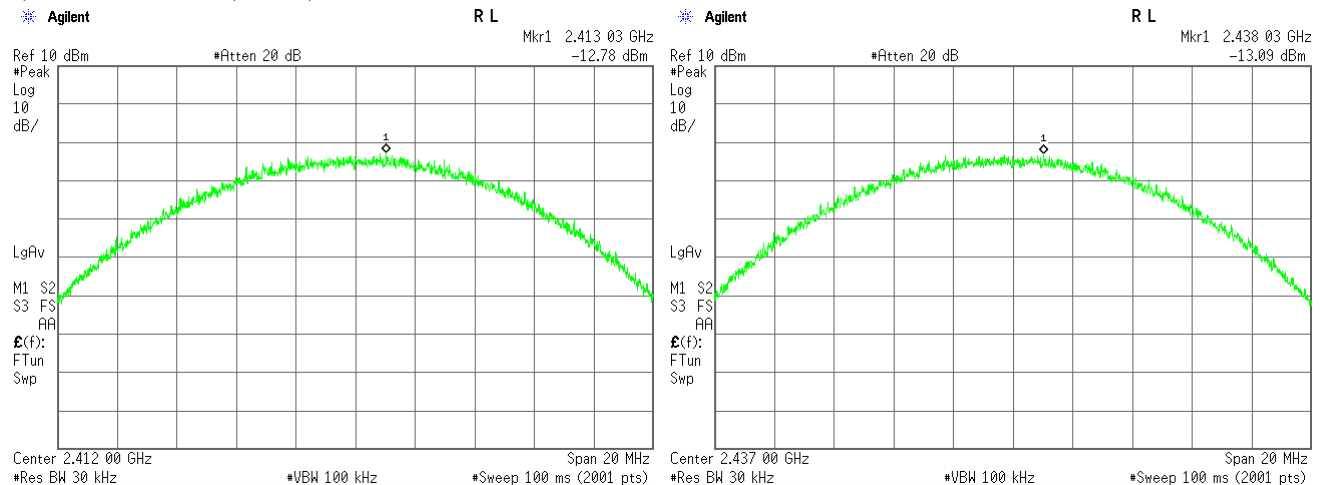

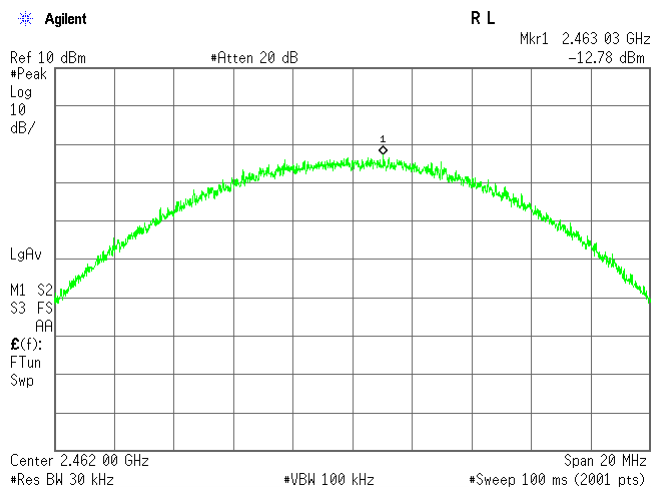

b) Sub Antenna (ANT1)

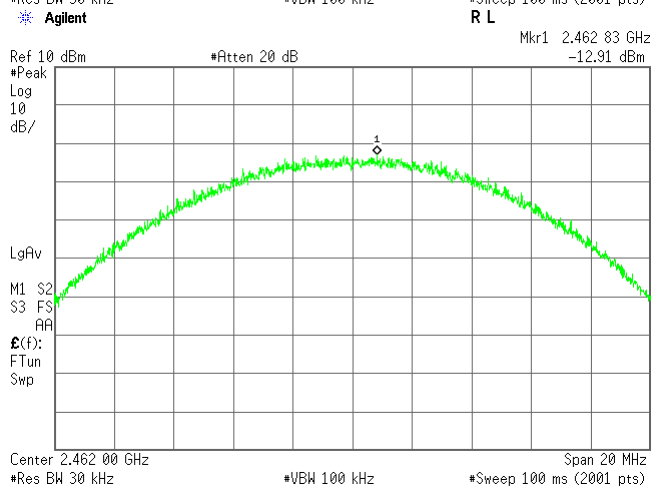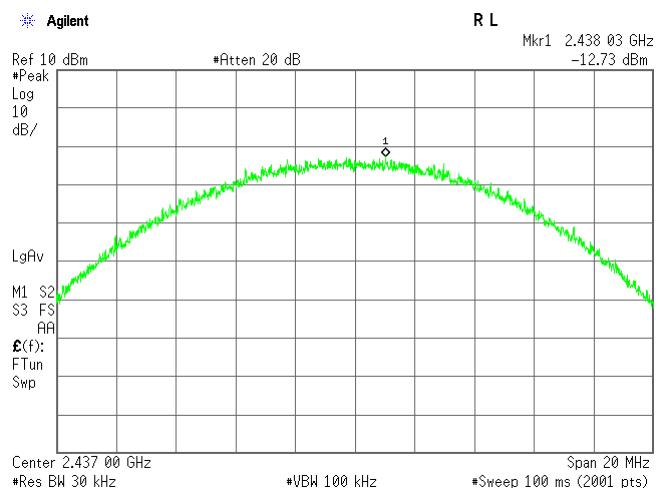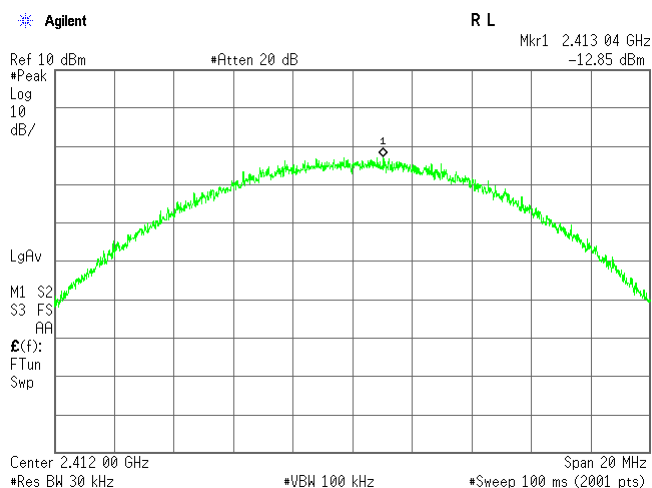

2) IEEE 802.11g

Data Rate : 48Mbps

Test Date: March 28, 2016

Temp.: 22 °C, Humi: 34 %

Transmitting Frequency		Correction Factor	Meter Reading			Conducted		Limits	Margin
CH	[MHz]		ANT0 [dBm]	ANT1 [dBm]	Total [dBm]	Peak Power Density [dBm]	[mW]		
01	2412	10.06	-16.07	-16.56	-13.30	-3.24	0.47	8.00	+11.24
06	2437	10.08	-16.21	-16.08	-13.13	-3.05	0.50	8.00	+11.05
11	2462	10.08	-16.06	-15.74	-12.89	-2.81	0.52	8.00	+10.81

Calculated result at 2462.000 MHz, as the worst point shown on underline:

Correction Factor	=	10.08 dB
+) Meter Reading	=	-12.89 dBm
Result	=	-2.81 dBm = 0.52 mW


Minimum Margin: 8.00 - -2.81 = 10.81 (dB)


NOTES

- The peak power density complied with the limit using 30 kHz resolution bandwidth of Spectrum Analyzer.
- The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
- Setting of measuring instrument(s) :




Detector Function	RES B.W.	Video B.W.
Peak	30kHz	100kHz

a) Main Antenna (ANT0)

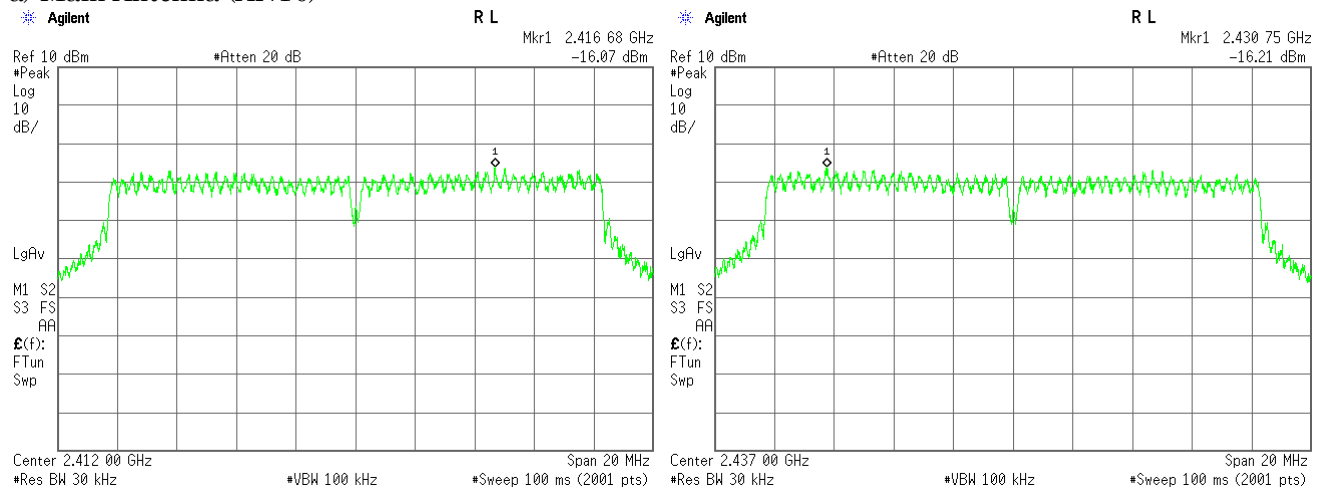

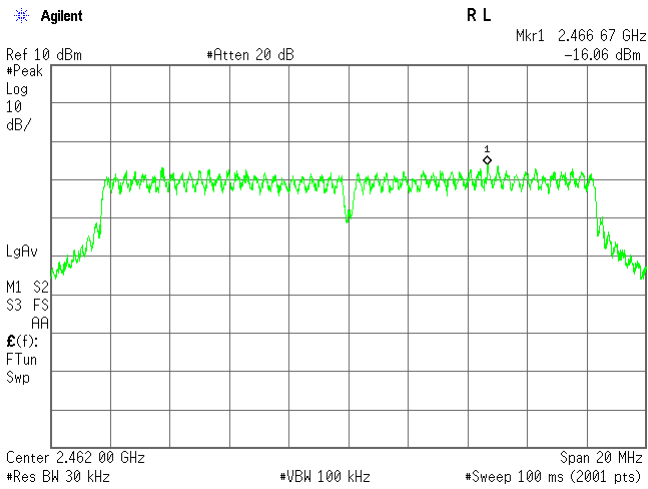

b) Sub Antenna (ANT1)

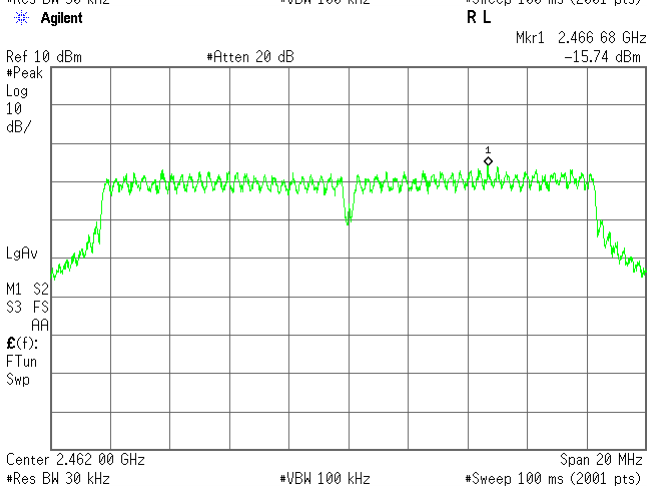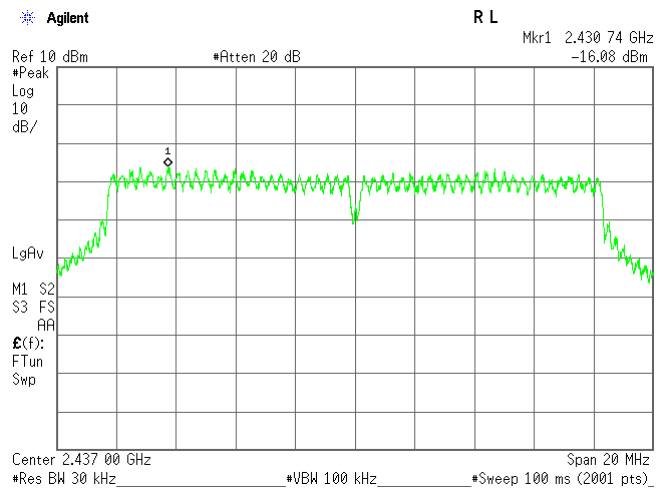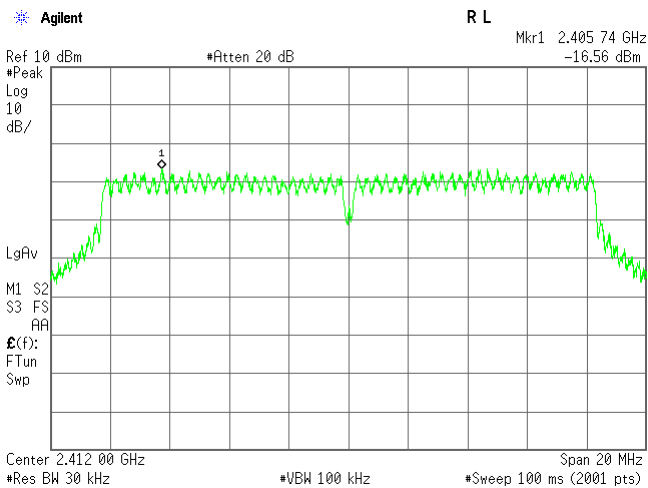

3) IEEE 802.11n

Data Rate : MCS4

Test Date: March 28, 2016

Temp.: 22 °C, Humi: 34 %

Transmitting Frequency		Correction Factor [dB]	Meter Reading			Conducted		Limits [dBm]	Margin [dB]
CH	[MHz]		ANT0 [dBm]	ANT1 [dBm]	Total [dBm]	Peak Power Density [dBm]	[mW]		
01	2412	10.06	-16.60	-16.55	-13.56	-3.50	0.45	8.00	+11.50
06	2437	10.08	-16.23	-16.93	-13.56	-3.48	0.45	8.00	+11.48
11	2462	10.08	-16.54	-16.43	-13.47	-3.39	0.46	8.00	+11.39

Calculated result at 2462.000 MHz, as the worst point shown on underline:

Correction Facto	=	10.08 dB
+) Meter Reading	=	-13.47 dBm
Result	=	-3.39 dBm = 0.46 mW


Minimum Margin: 8.00 - -3.39 = 11.39 (dB)


NOTES

1. The peak power density complied with the limit using 30 kHz resolution bandwidth of Spectrum Analyzer.
2. The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
3. Setting of measuring instrument(s) :




Detector Function	RES B.W.	Video B.W.
Peak	30kHz	100kHz

a) Main Antenna (ANT0)

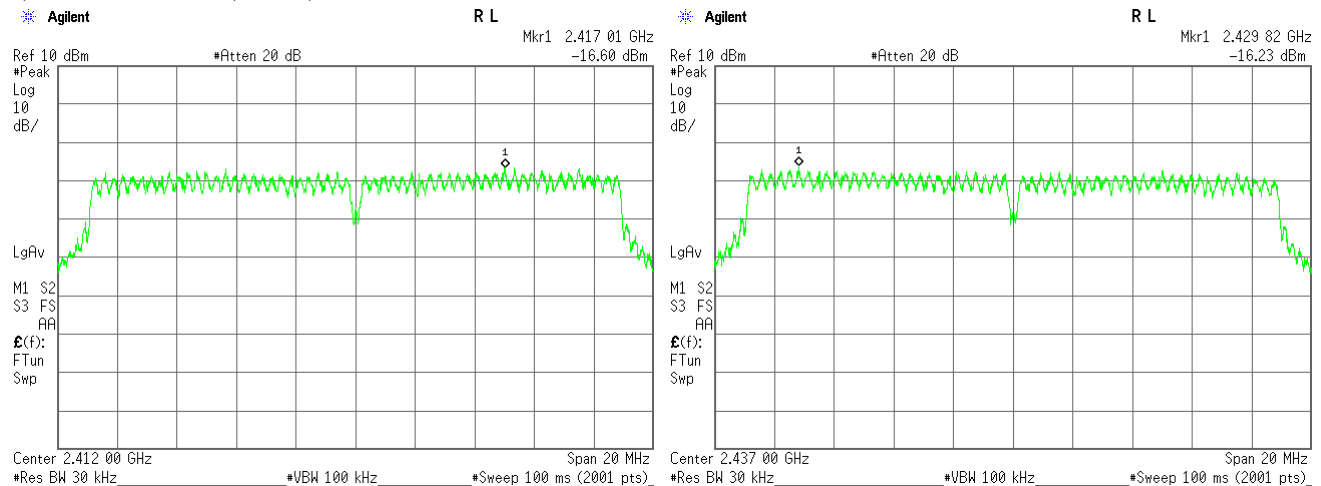

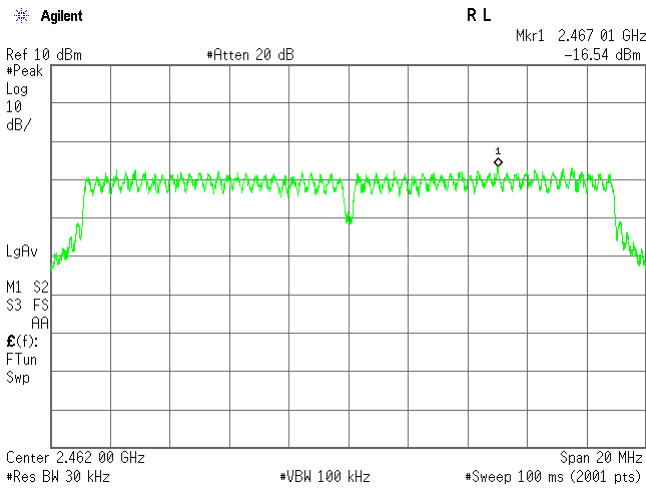

b) Sub Antenna (ANT1)

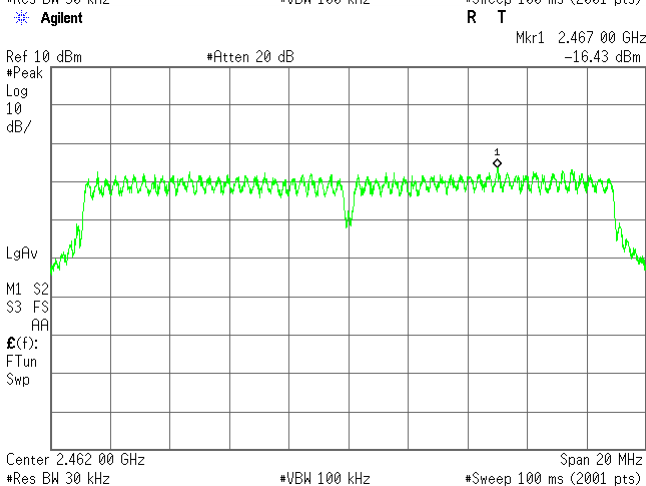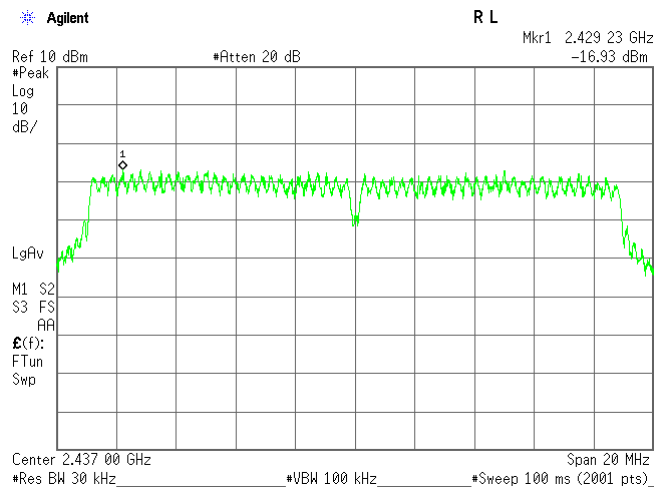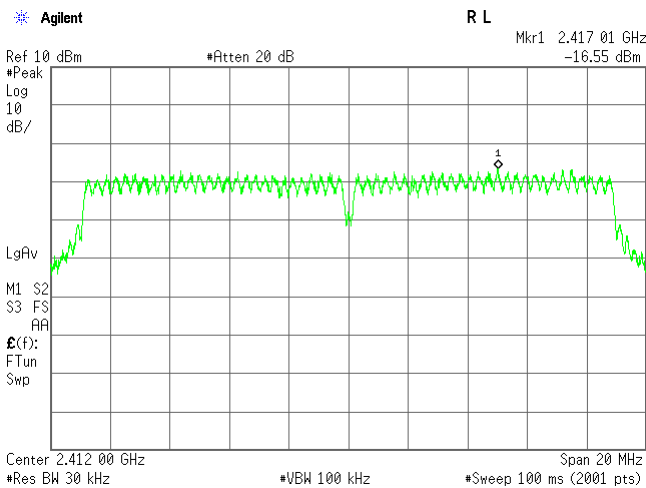

4) Bluetooth LE(Modulation type : GFSK)

Test Date: March 29, 2016

Temp.: 22 °C, Humi: 34 %

Transmitting Frequency		Correction	Meter Reading	Conducted		Limits	Margin
		Factor		Peak Power Density			
CH	[MHz]	[dB]	[dBm]	[dBm]	[mW]	[dBm]	[dB]
00	2402	10.06	-7.62	2.44	1.75	8.00	+ 5.56
19	2440	10.08	-6.31	3.77	2.38	8.00	+ 4.23
39	2480	10.08	-7.06	3.02	2.00	8.00	+ 4.98

Calculated result at 2440.000 MHz, as the worst point shown on underline:



Correction Factor	=	10.08 dB
+) Meter Reading	=	-6.31 dBm
Result	=	3.77 dBm = 2.38 mW


Minimum Margin: 8.00 - 3.77 = 4.23 (dB)

NOTES

1. The peak power density complied with the limit using 30 kHz resolution bandwidth of Spectrum Analyzer.
2. The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
3. Setting of measuring instrument(s) :

Detector Function	RES B.W.	Video B.W.
Peak	30kHz	100kHz

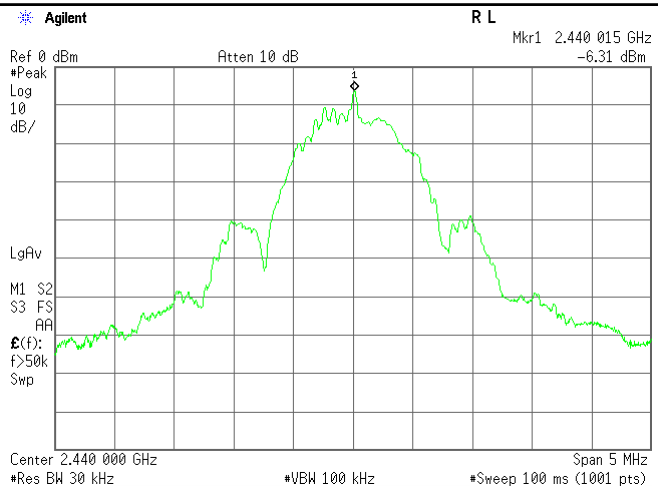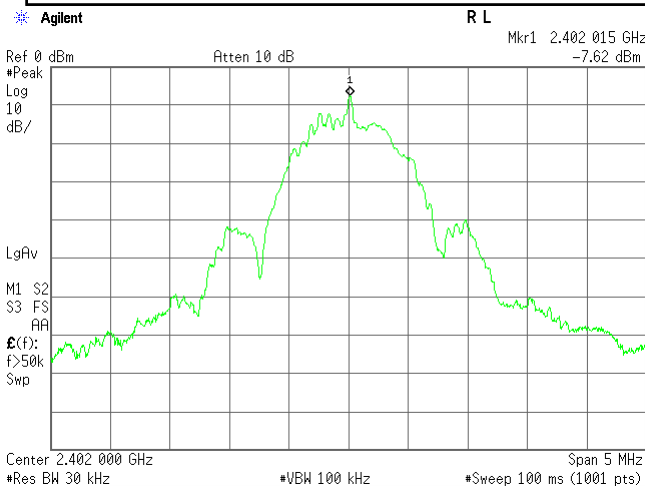

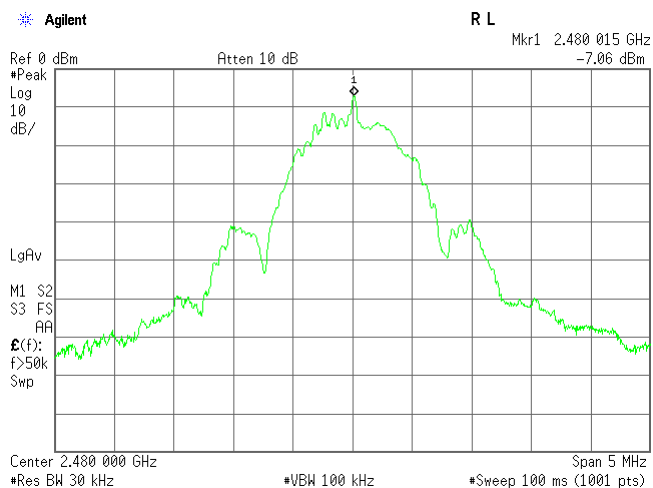

7.7 Spurious Emissions(Conduction)

For the requirements, ☒ - Applicable [☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

7.7.1 Test Results

For the standard, ☒ - Passed ☐ - Failed ☐ - Not judged

Uncertainty of Measurement Results

9 kHz – 1 GHz	± 1.4	dB(2 σ)
1 GHz – 18 GHz	± 1.7	dB(2 σ)
18 GHz – 40 GHz	± 2.3	dB(2 σ)

Remarks : _____


7.7.2 Test Instruments

Shielded Room S4				
Type	Model	Serial No. (ID)	Manufacturer	Cal. Due
Spectrum Analyzer	E4446A	US44300388 (A-39)	Agilent	2016/08/11
Attenuator	54A-10	W5675 (D-28)	Weinschel	2016/08/16
RF Cable	SUCOFLEX102	14253/2 (C-52)	HUBER+SUHNER	2016/08/16

NOTE : The calibration interval of the above test instruments is 12 months.

7.7.3 Test Method and Test Setup (Diagrammatic illustration)

The test system is shown as follows:



The setting of the spectrum analyzer are shown as follows:

Frequency Range	30 MHz - 25 GHz	Band-Edge
Res. Bandwidth	100 kHz	100 kHz
Video Bandwidth	300 kHz	300 kHz
Sweep Time	AUTO	AUTO
Trace	Maxhold	Maxhold


7.7.4 Test Data

Test Date : March 28, 2016


Temp.: 22°C, Humi: 34%

1-1) IEEE 802.11b (Main Antenna)


Low Channel

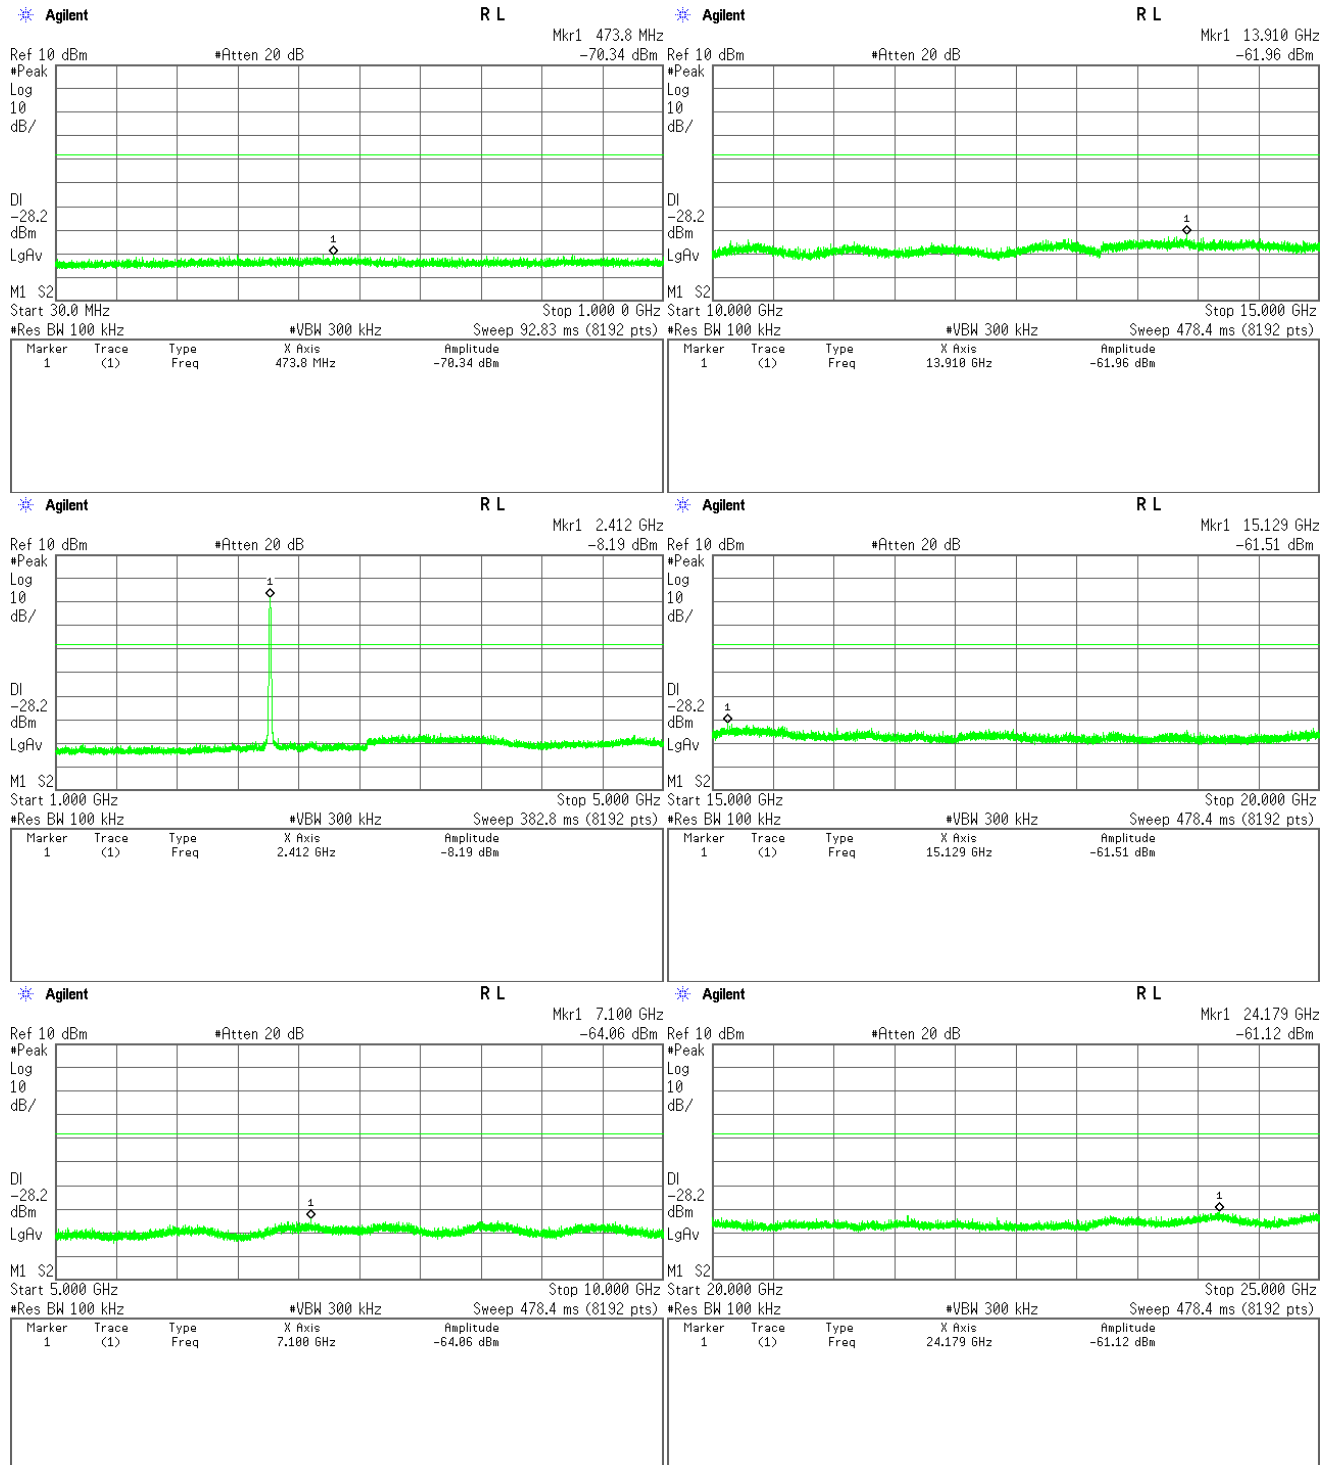

Middle Channel

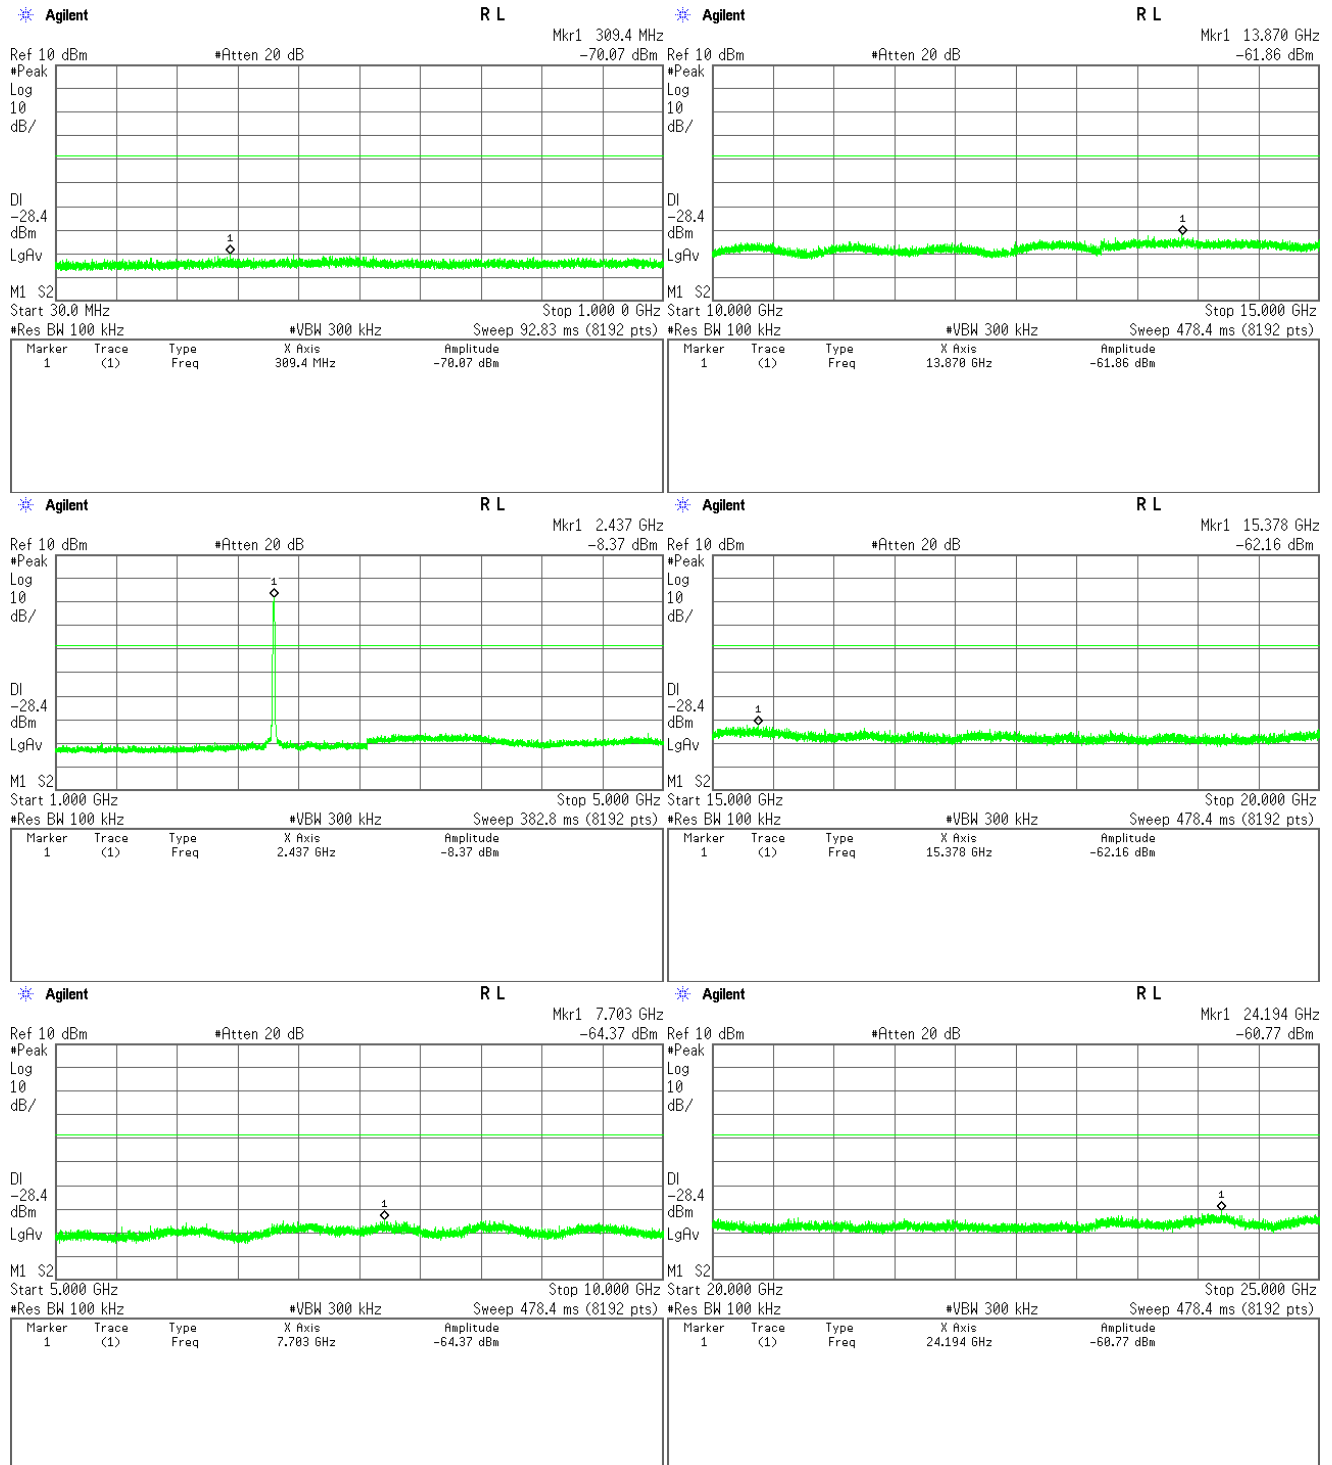


High Channel

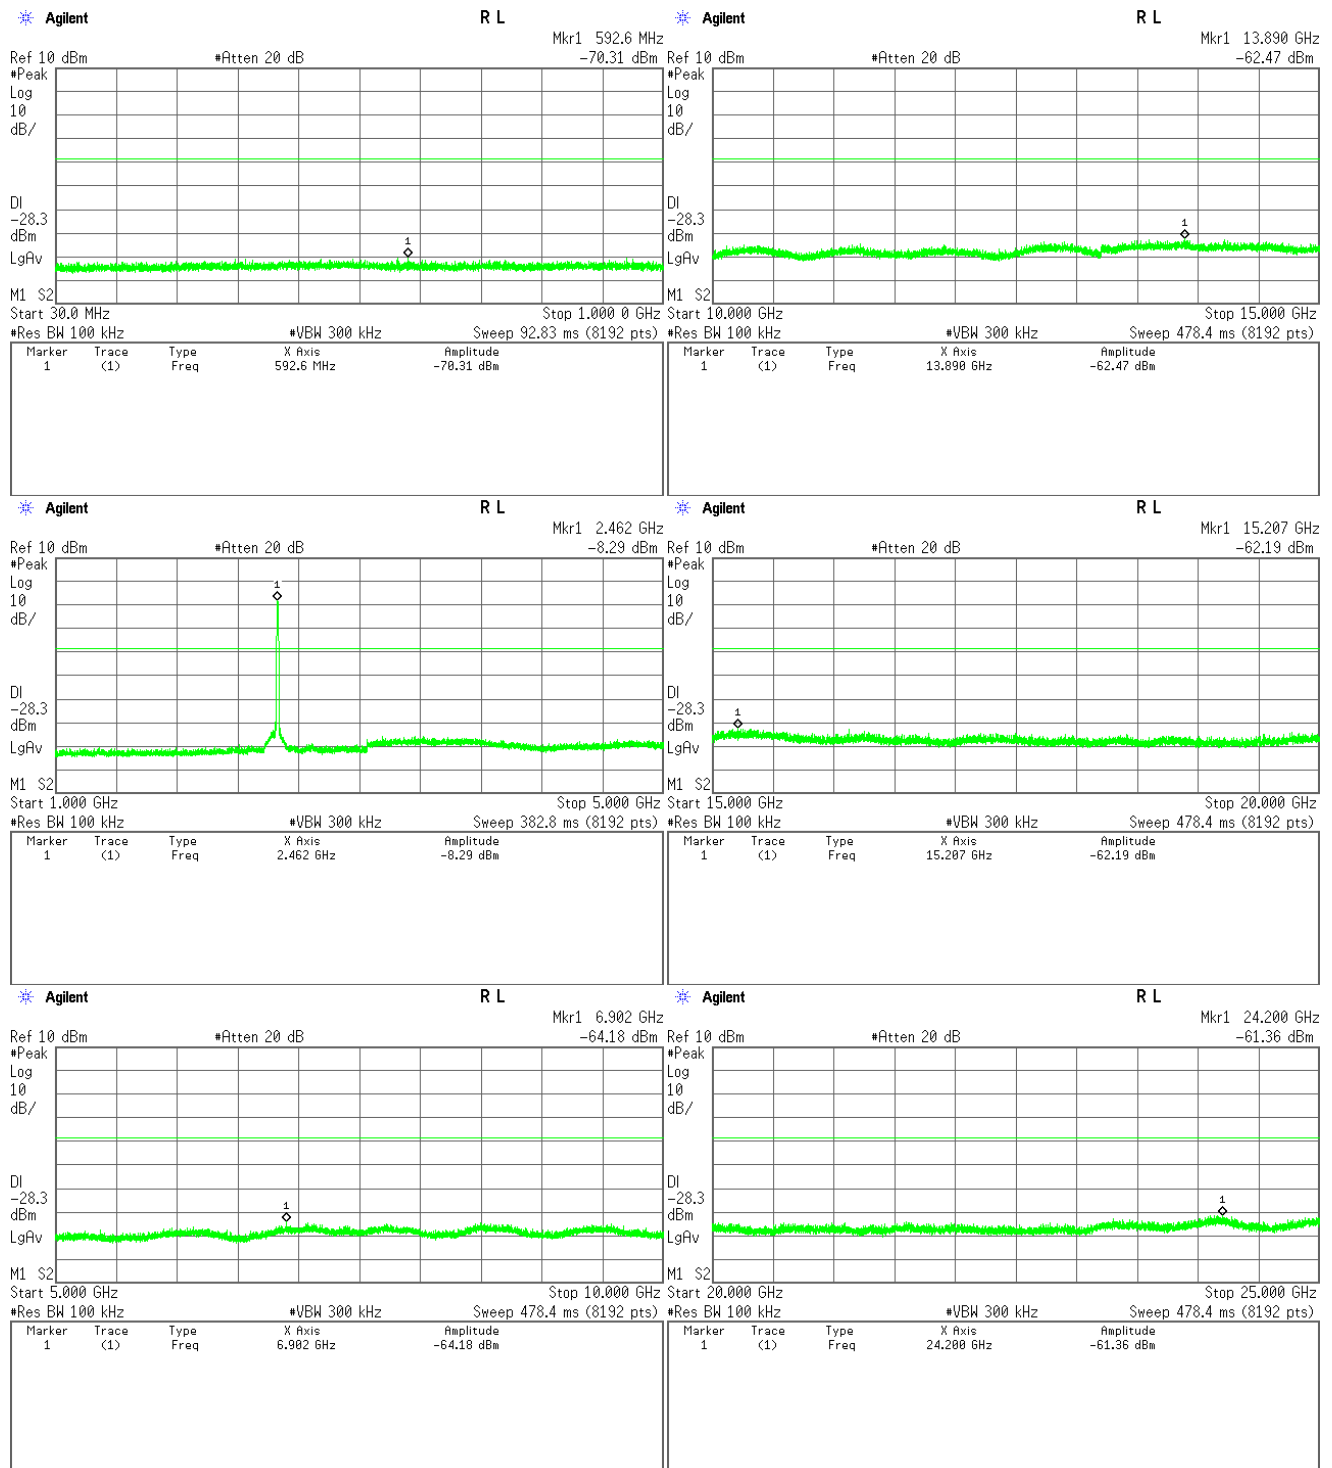


1-2) IEEE 802.11b (Sub Antenna)


Low Channel

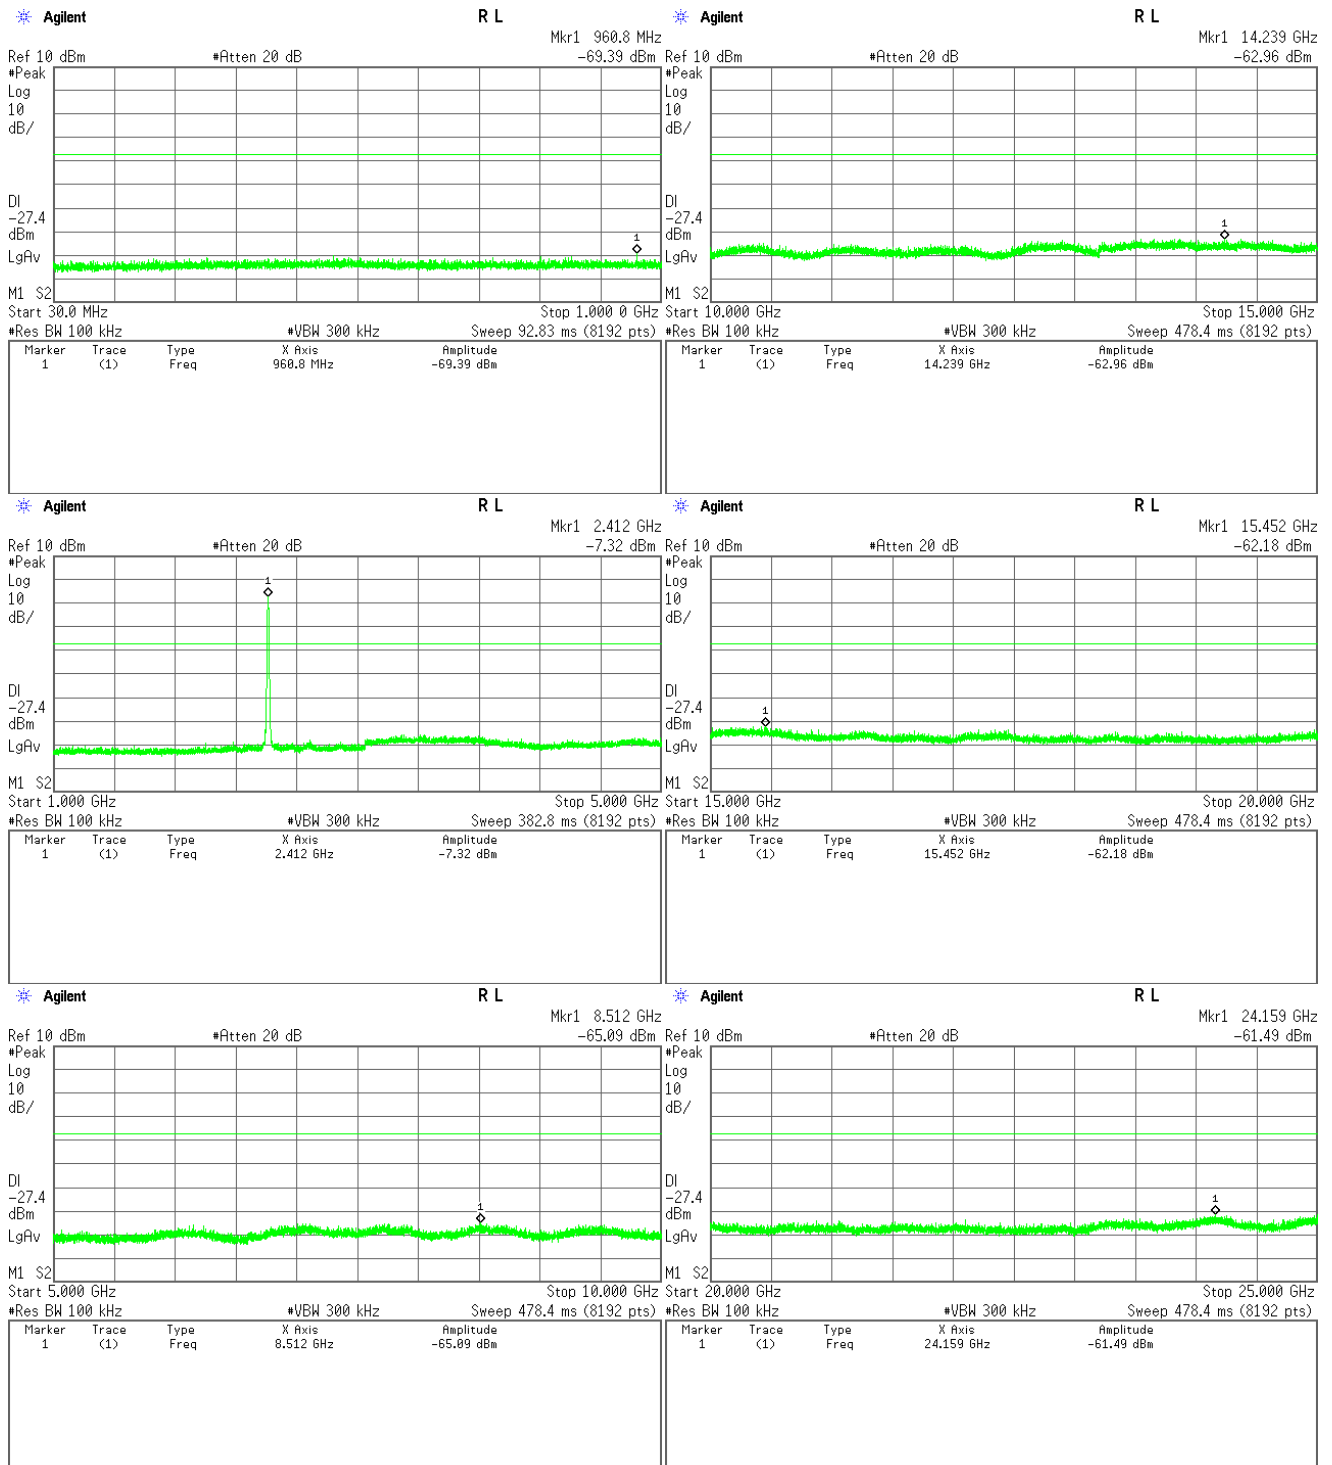

Middle Channel

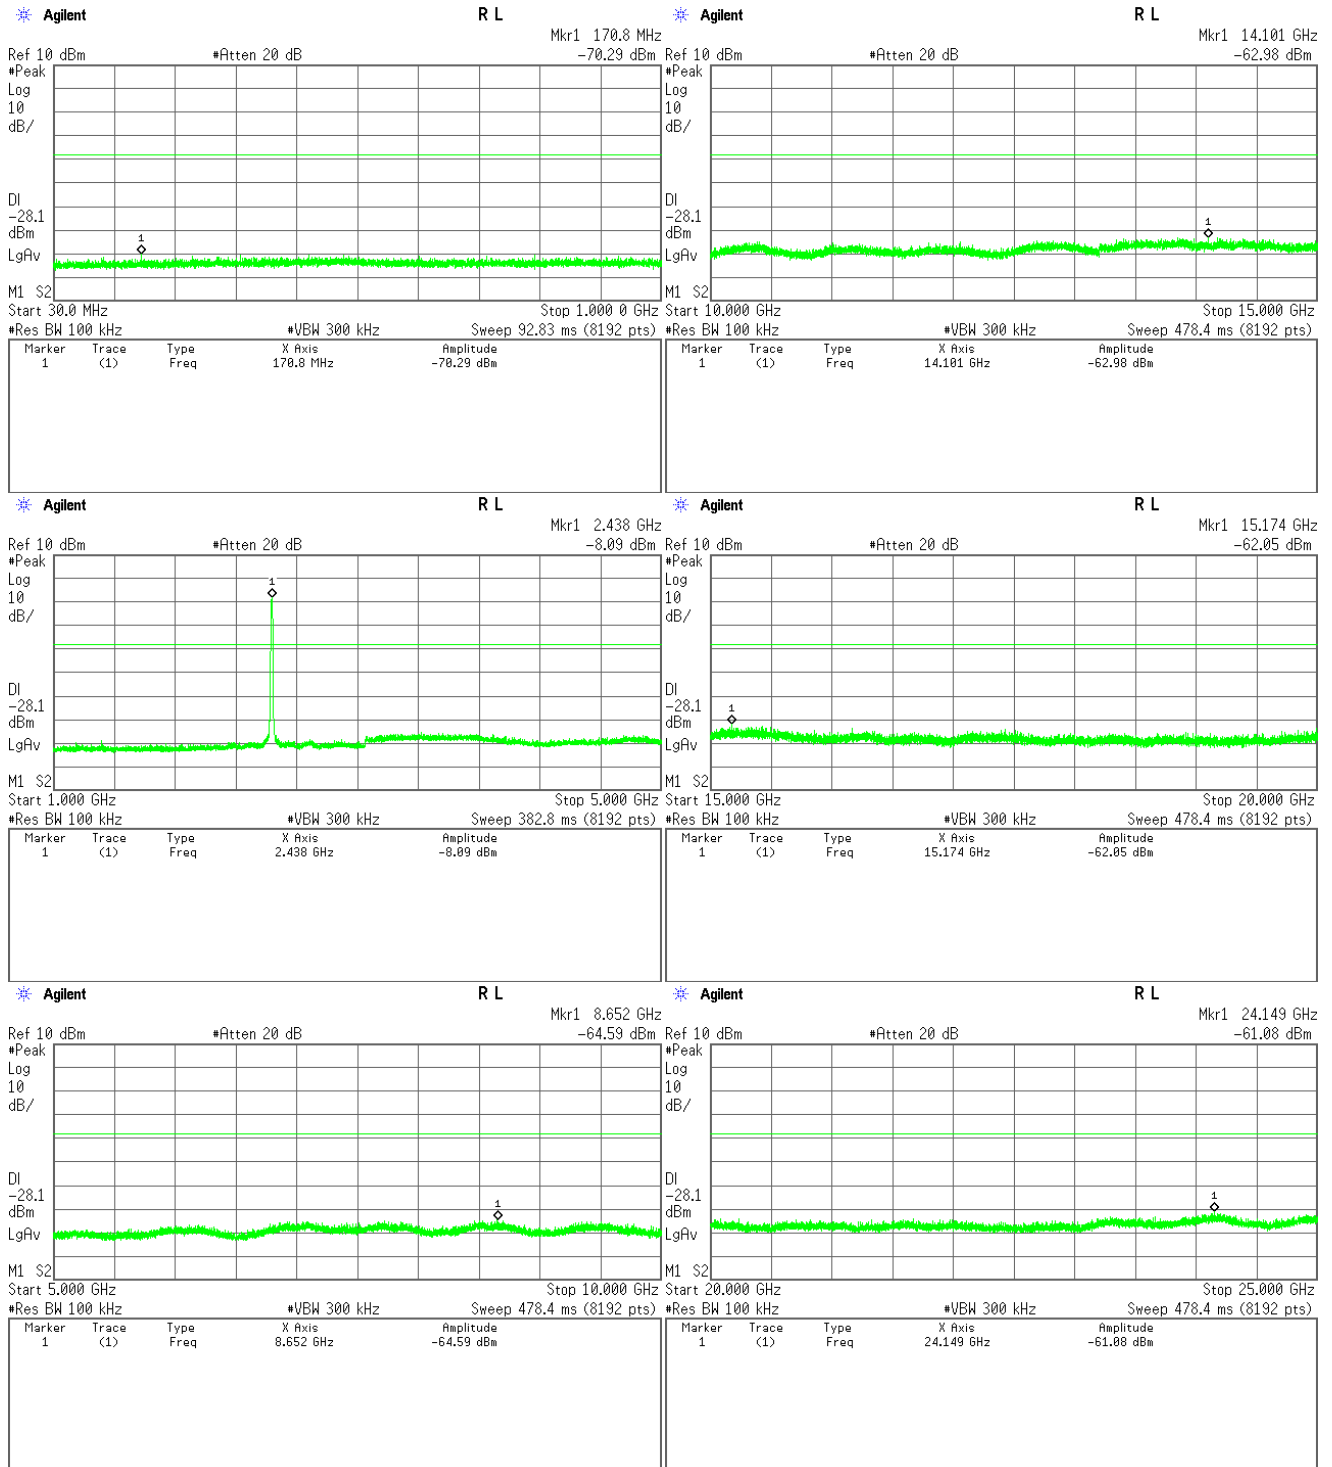


High Channel

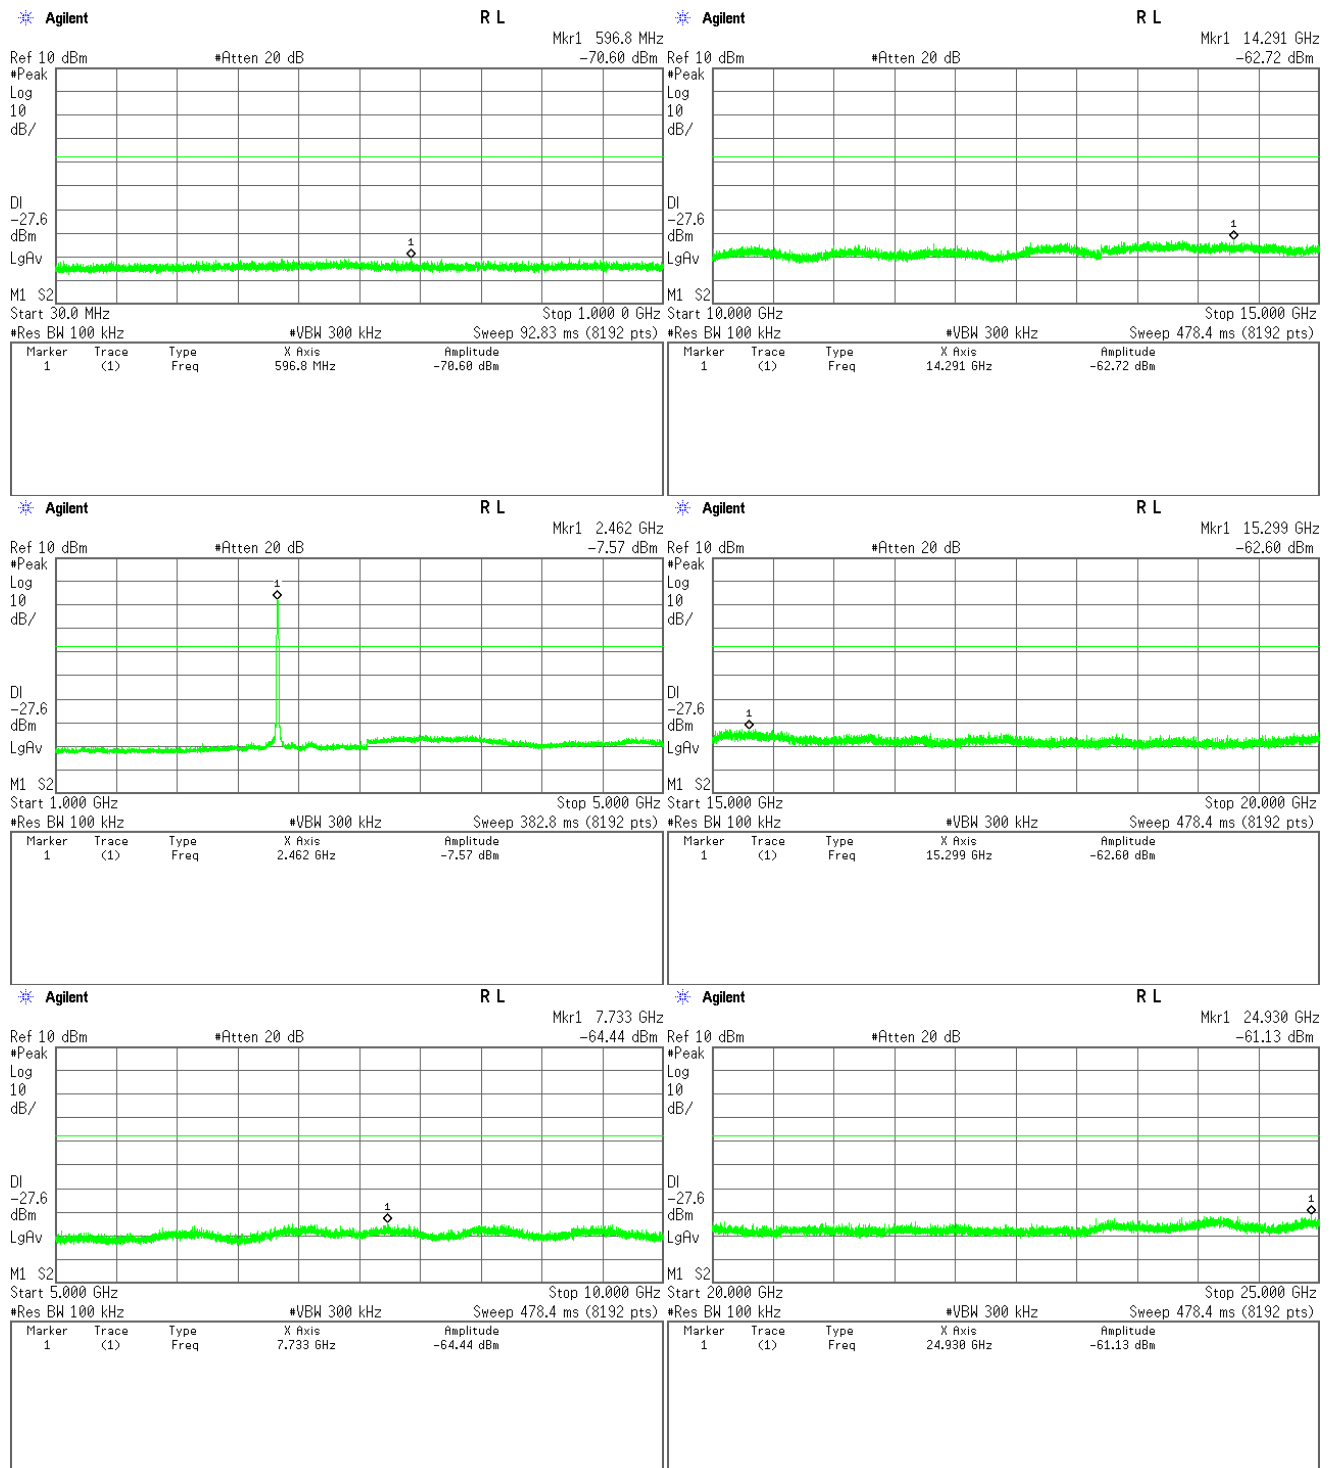


2-1) IEEE 802.11g (Main Antenna)


Low Channel

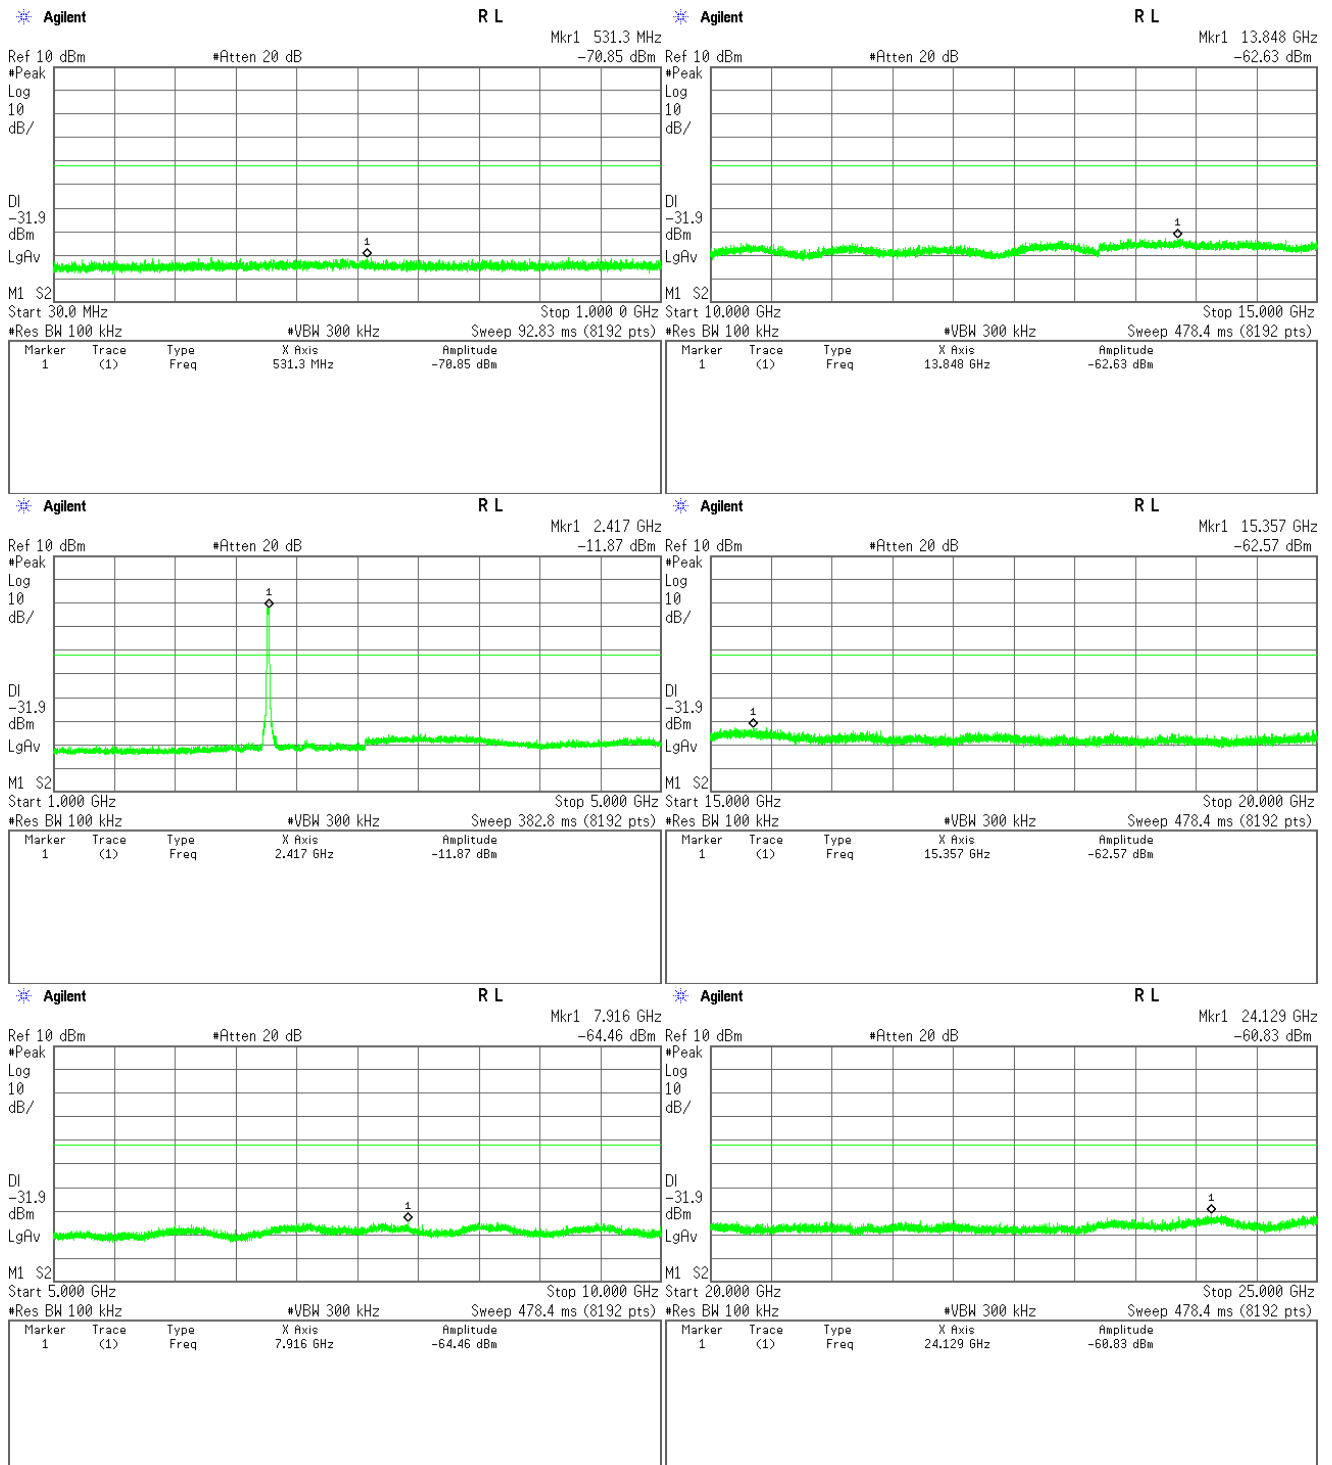

Middle channel

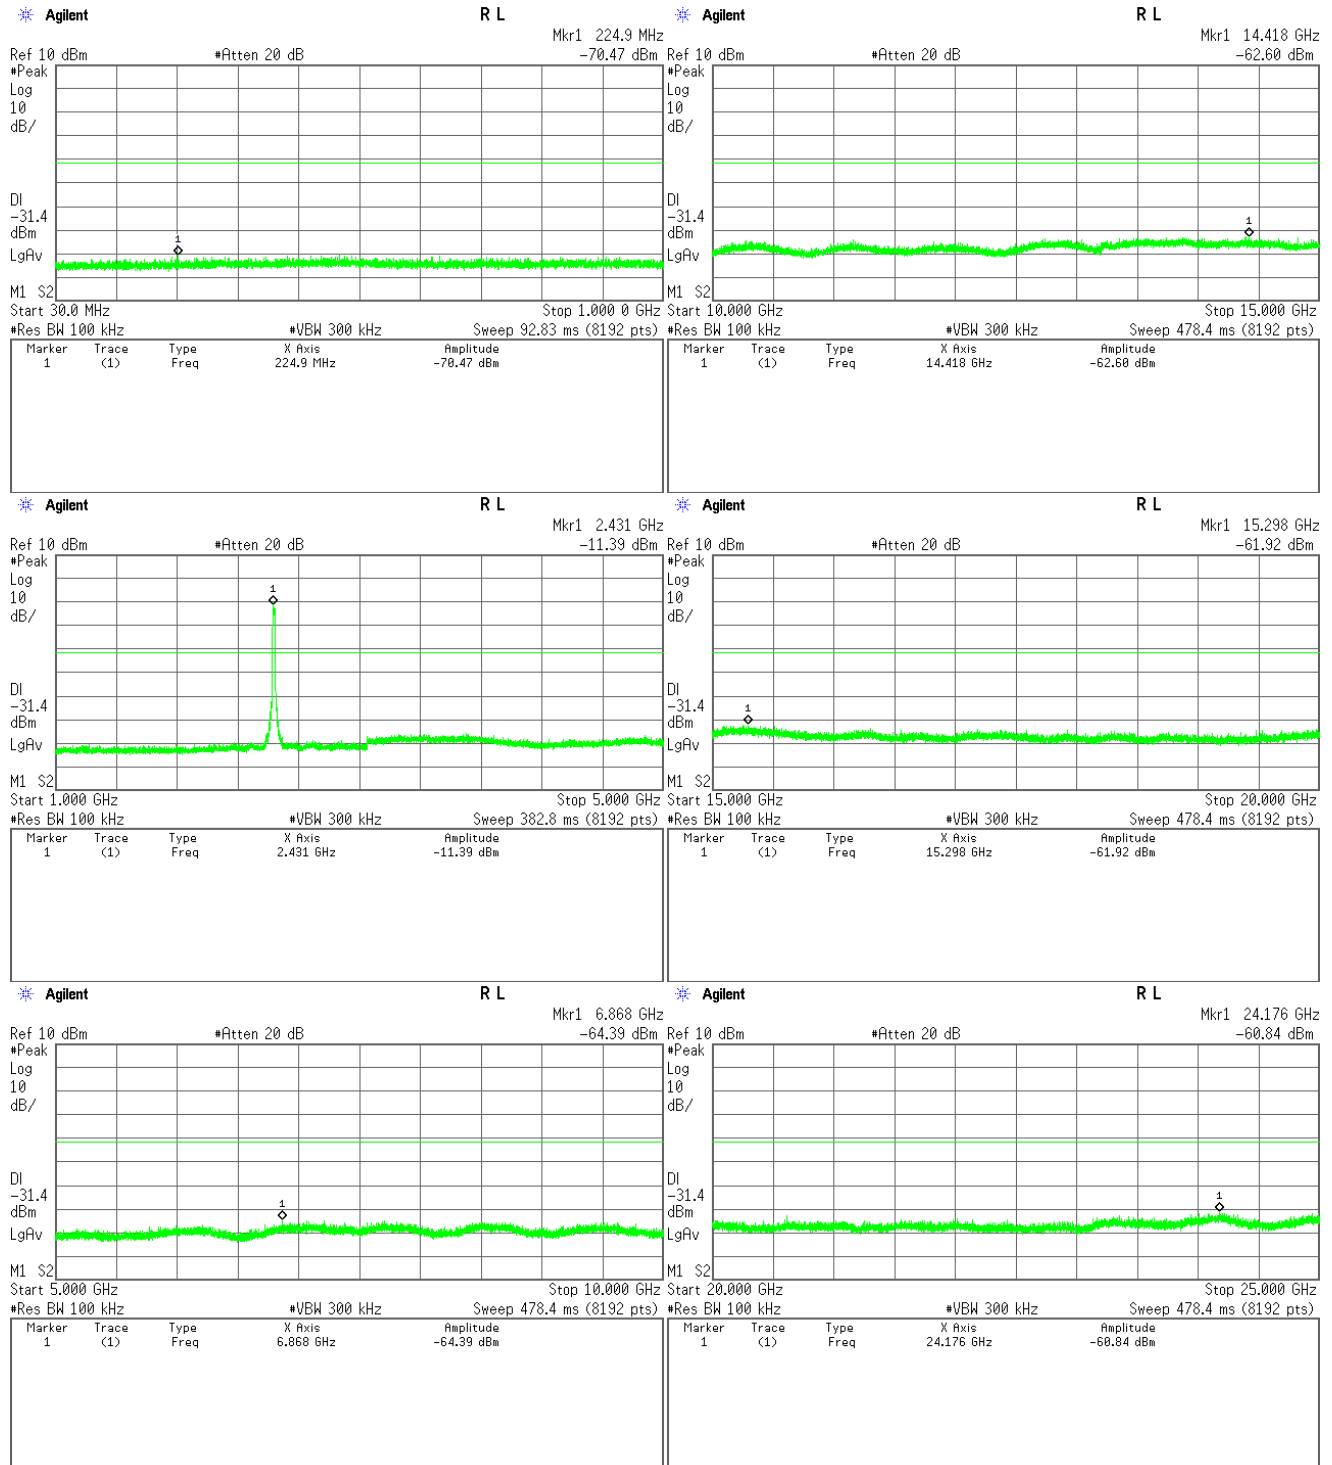


High Channel

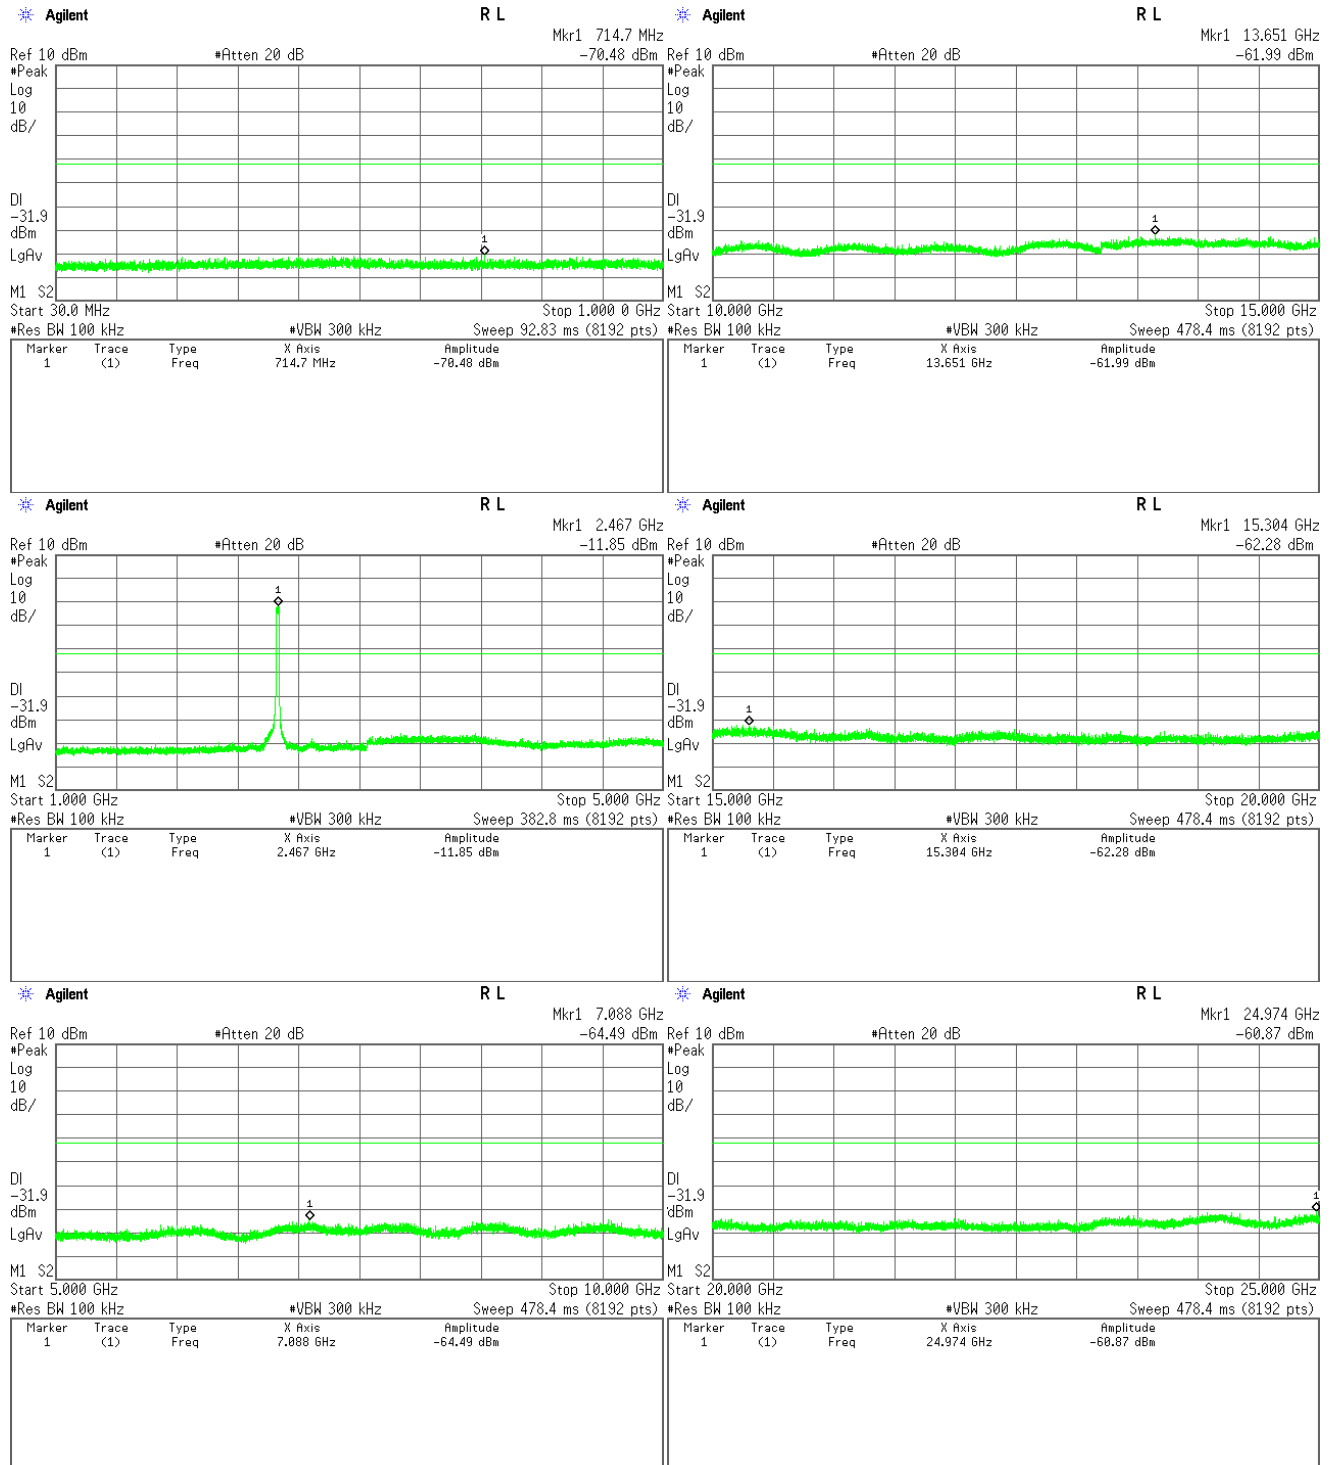


2-2) IEEE 802.11g (Sub Antenna)


Low Channel

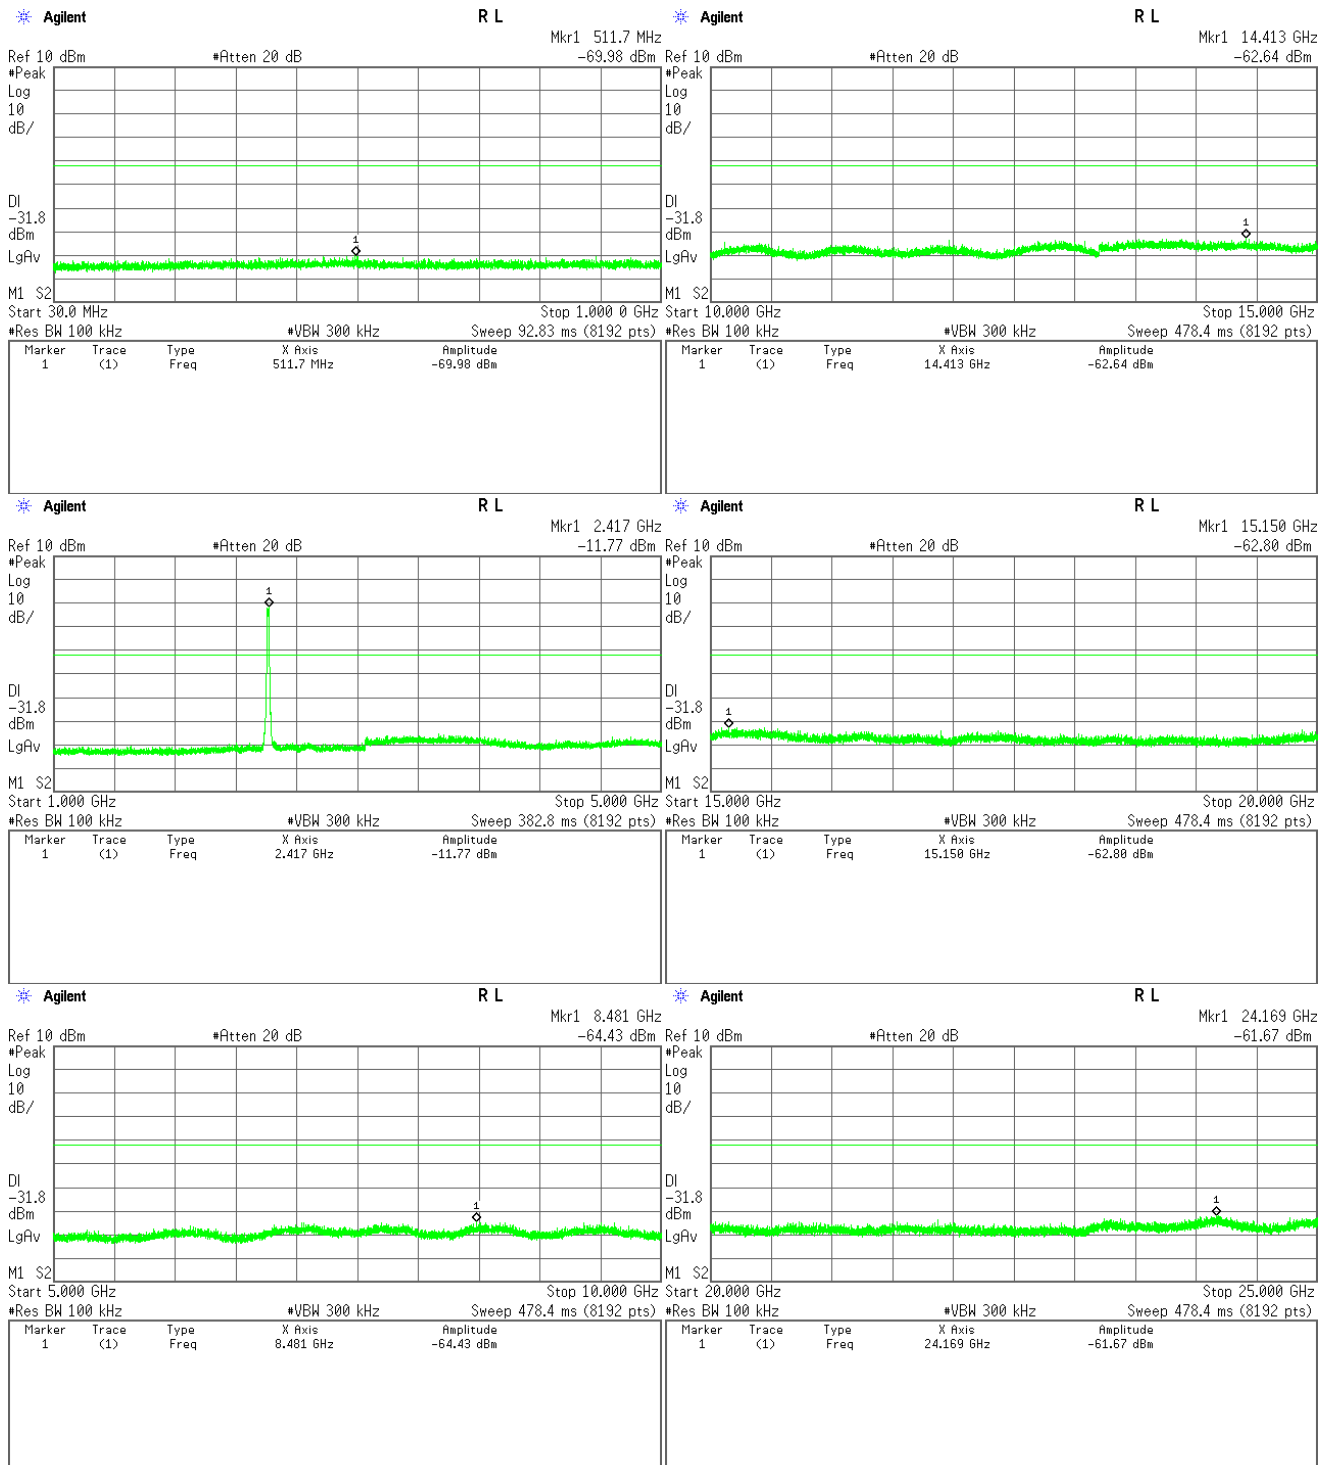

Middle channel

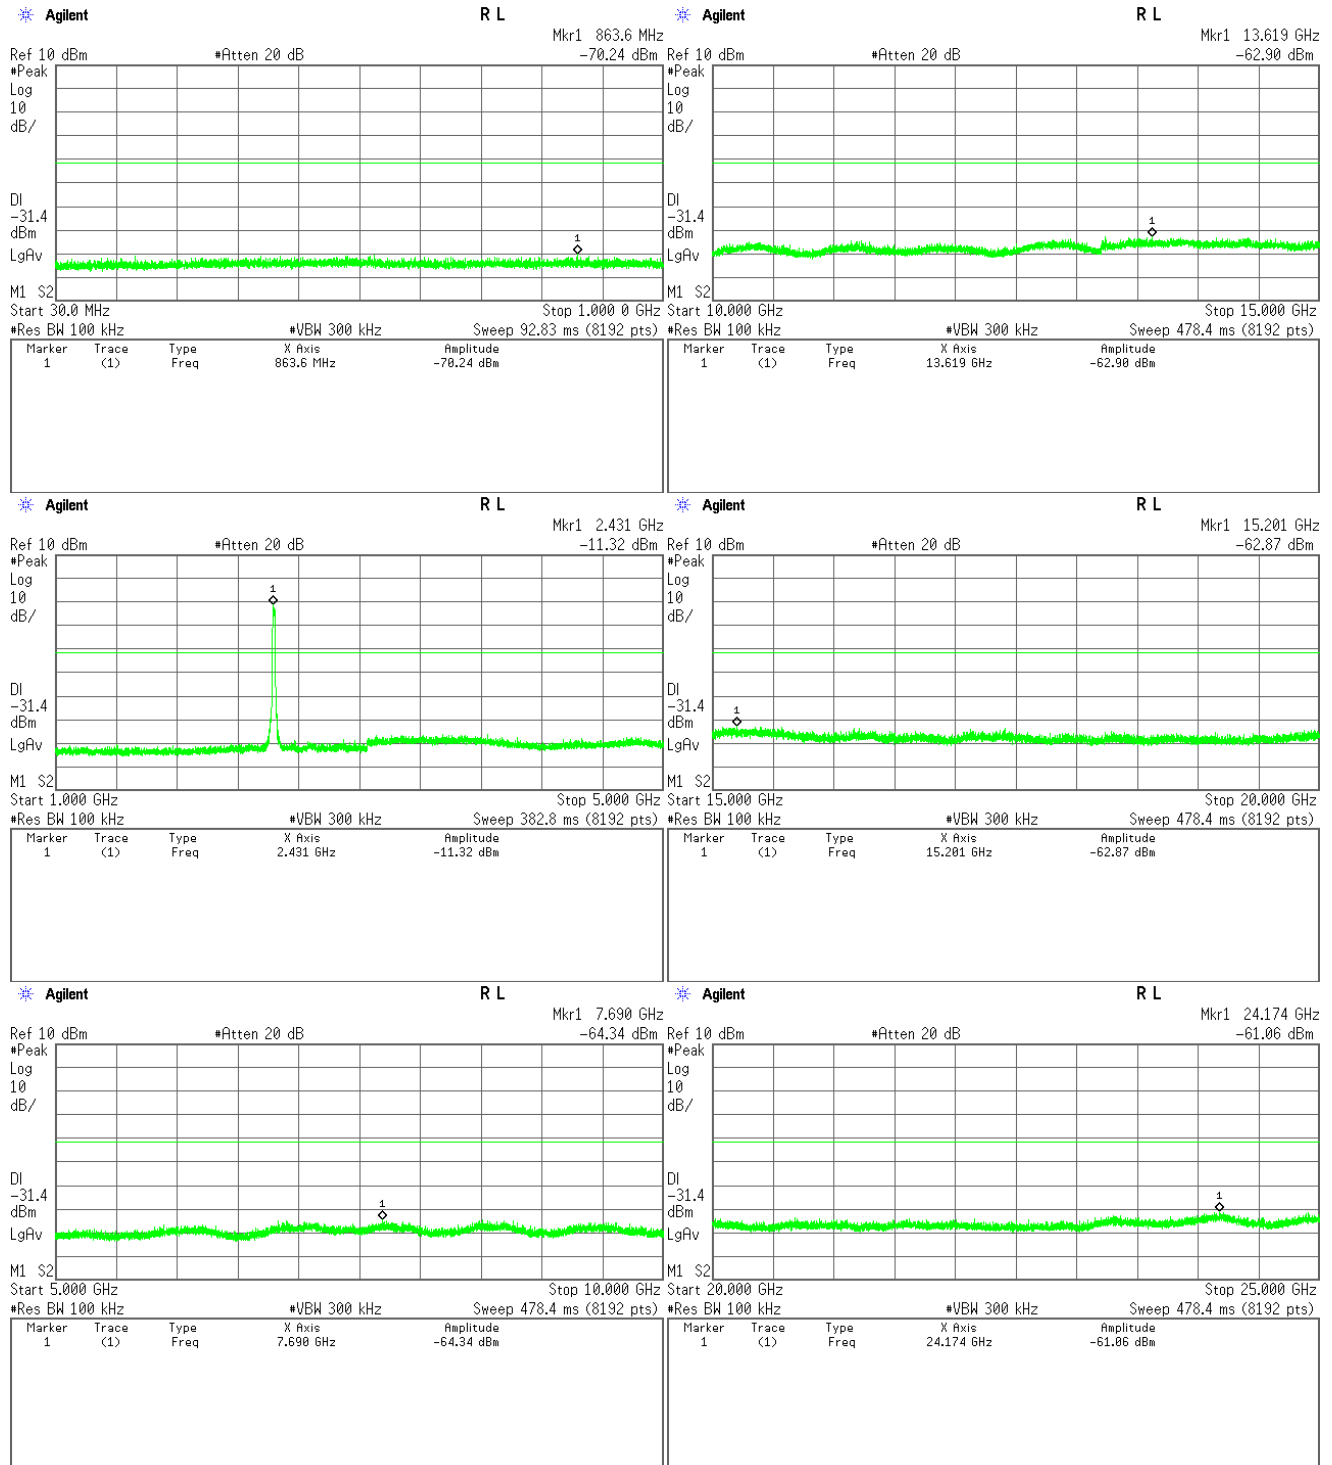


High Channel

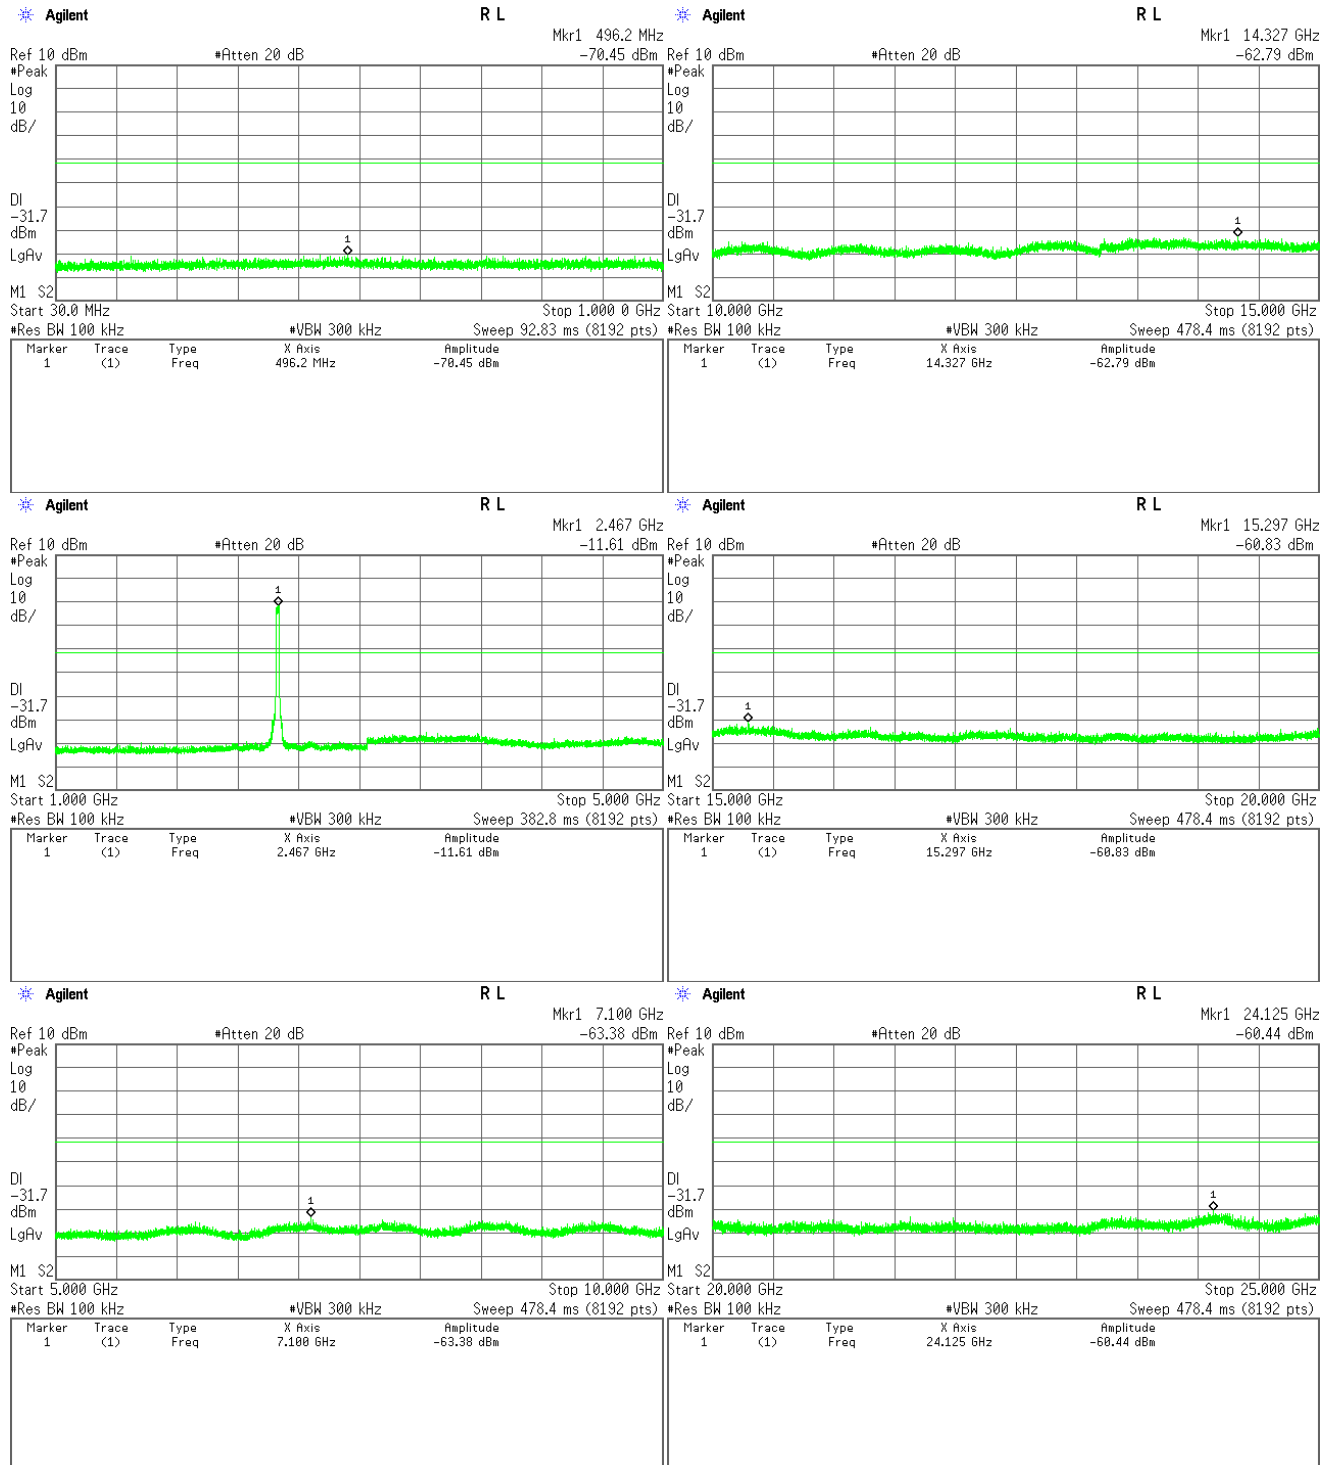


3-1) IEEE 802.11n (Main Antenna)


Low Channel

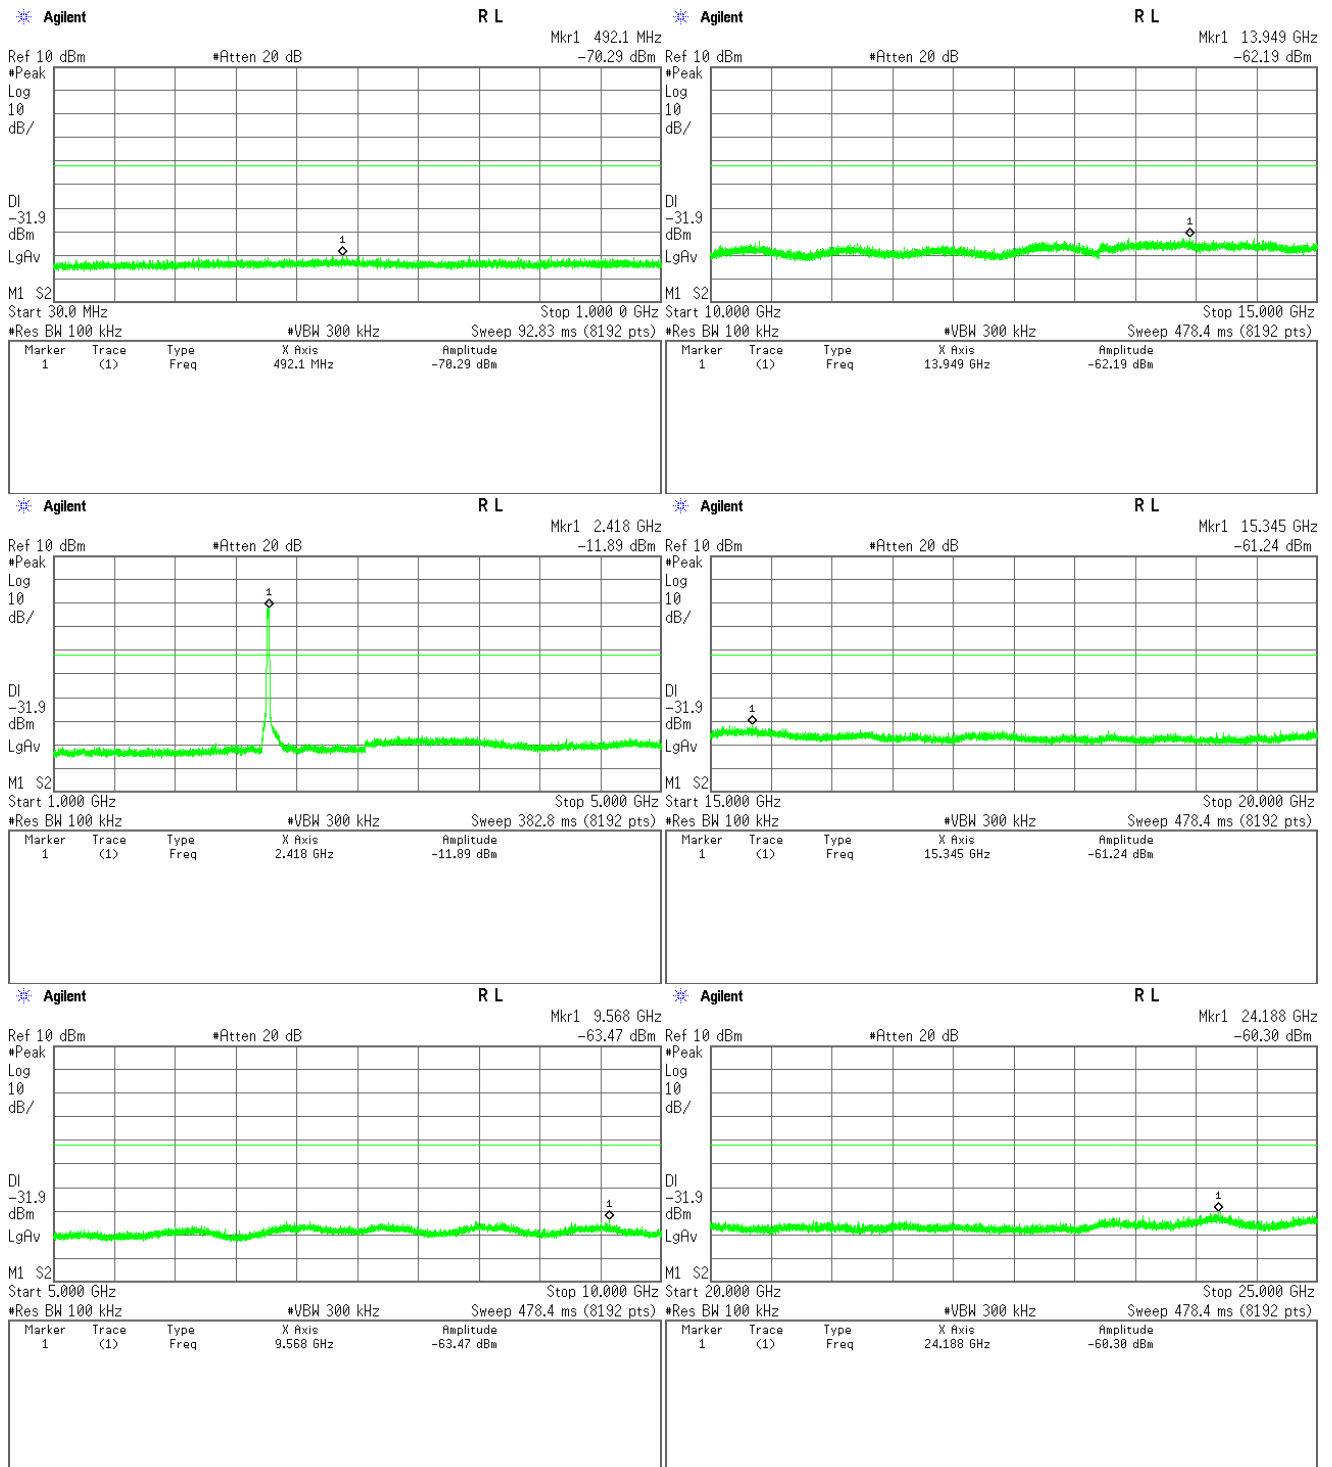

Middle Channel

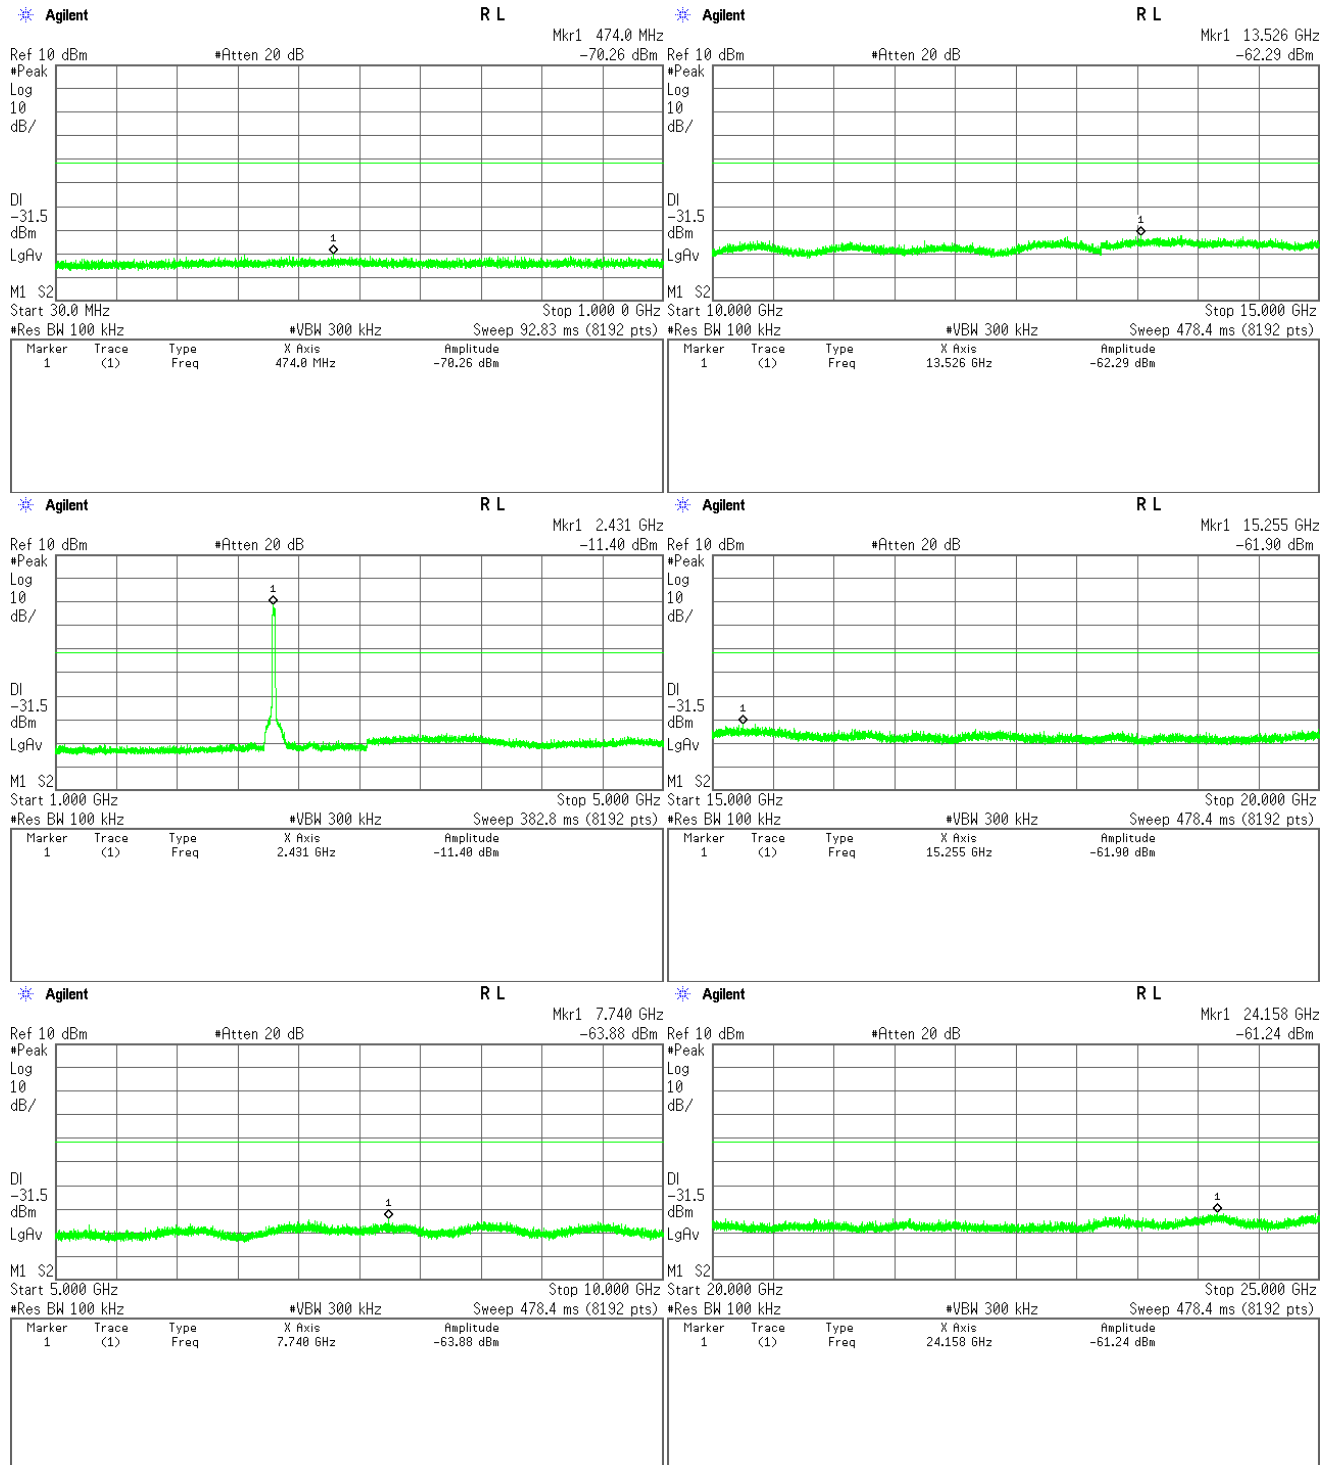


High Channel

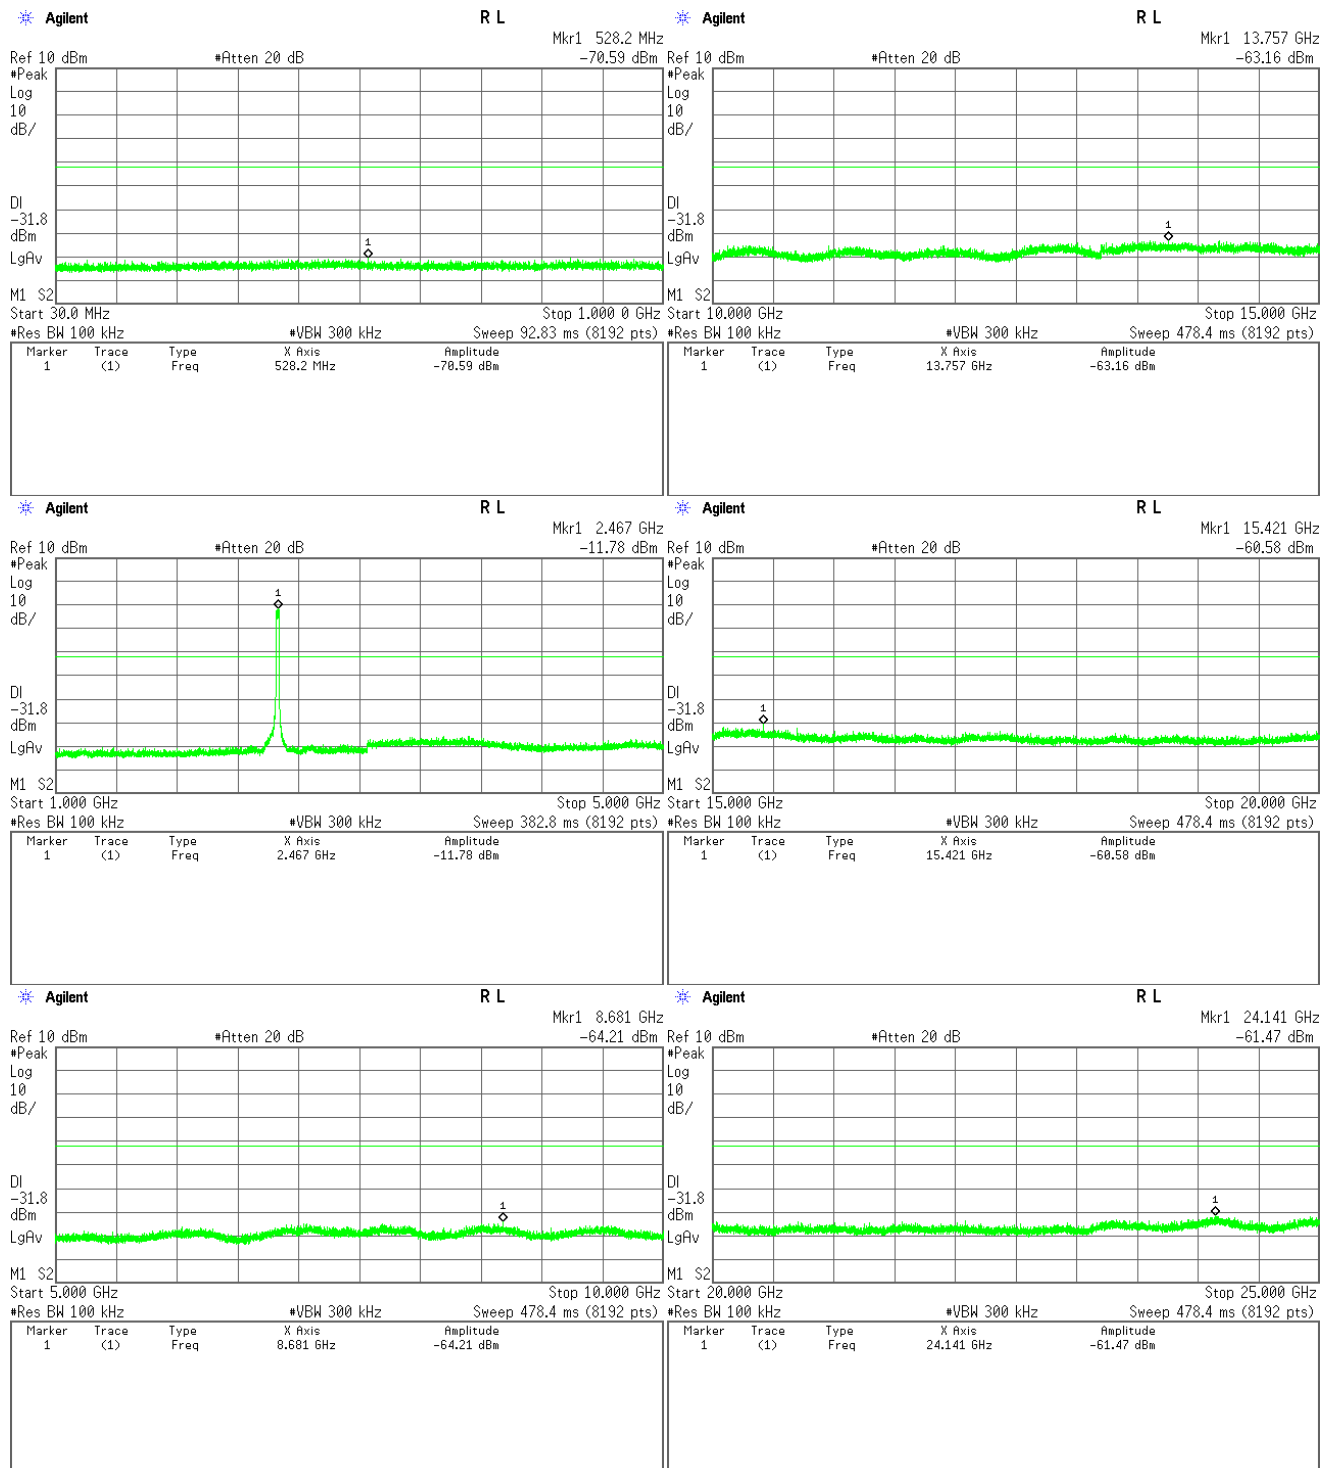


3-2) IEEE 802.11n (Sub Antenna)


Low Channel

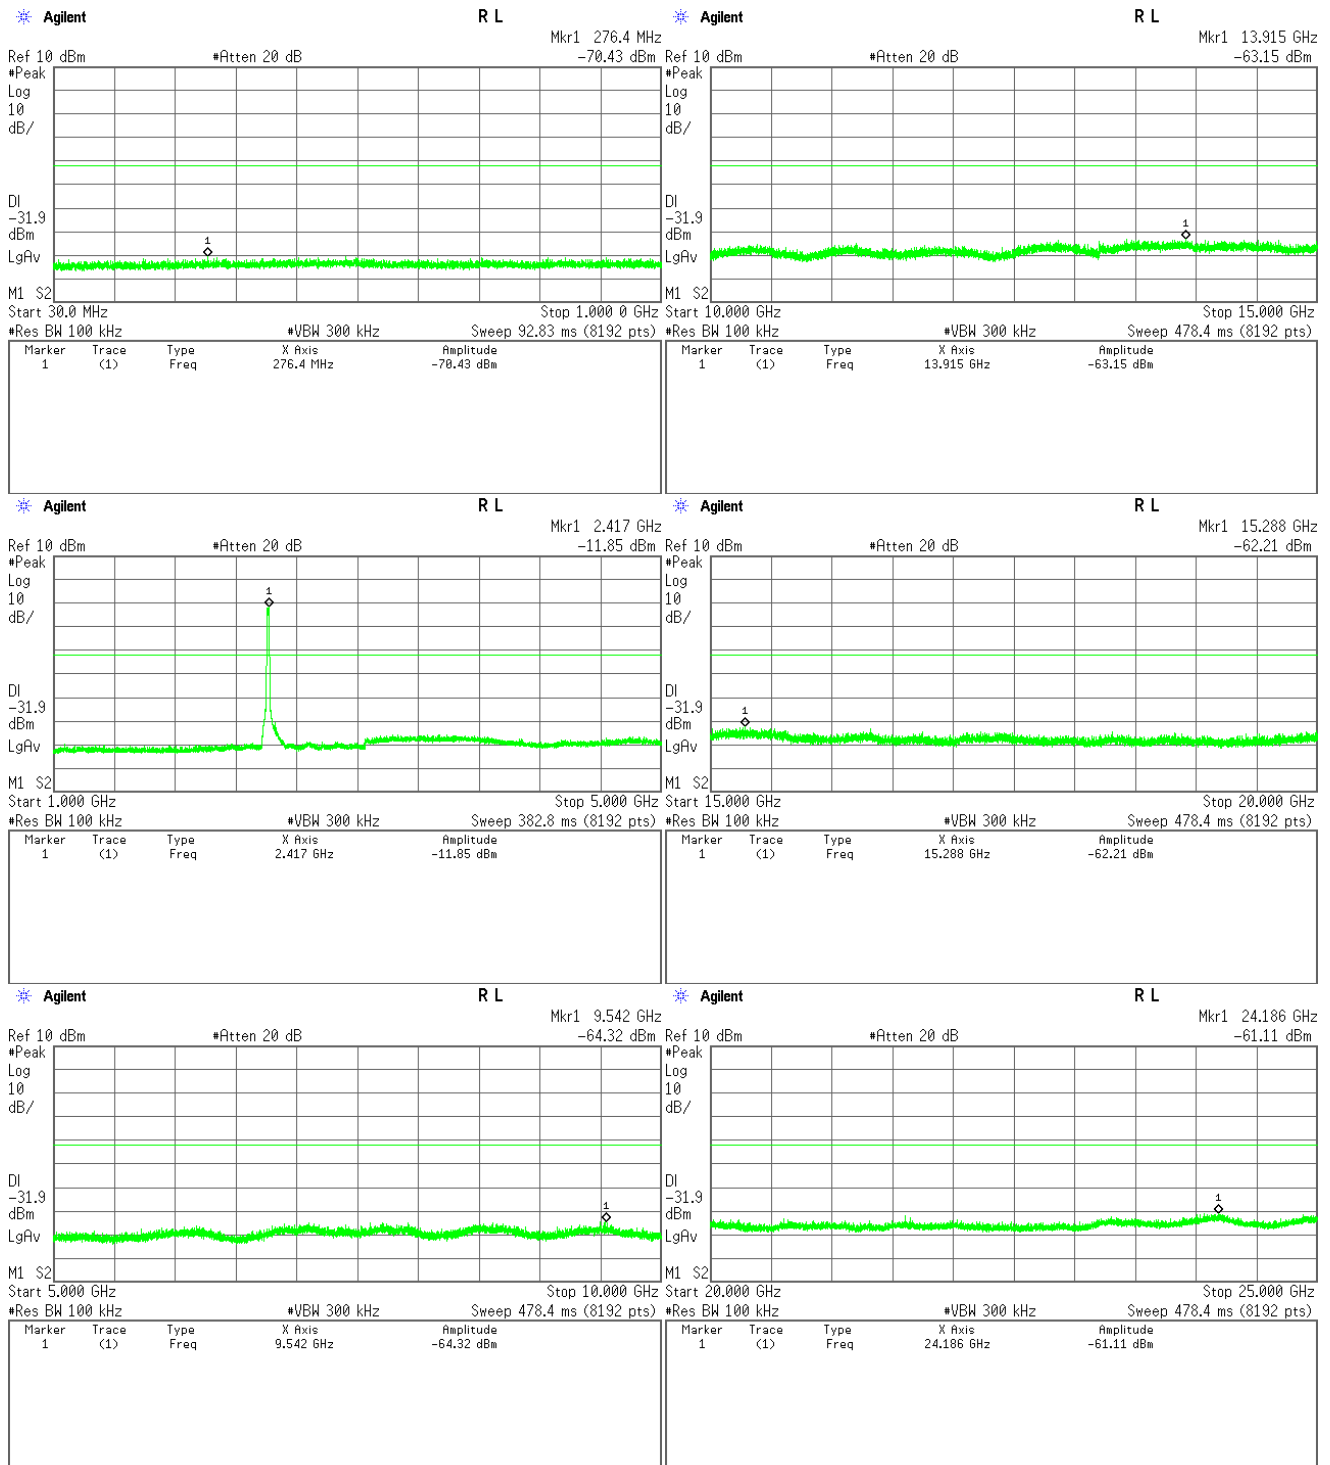

Middle Channel

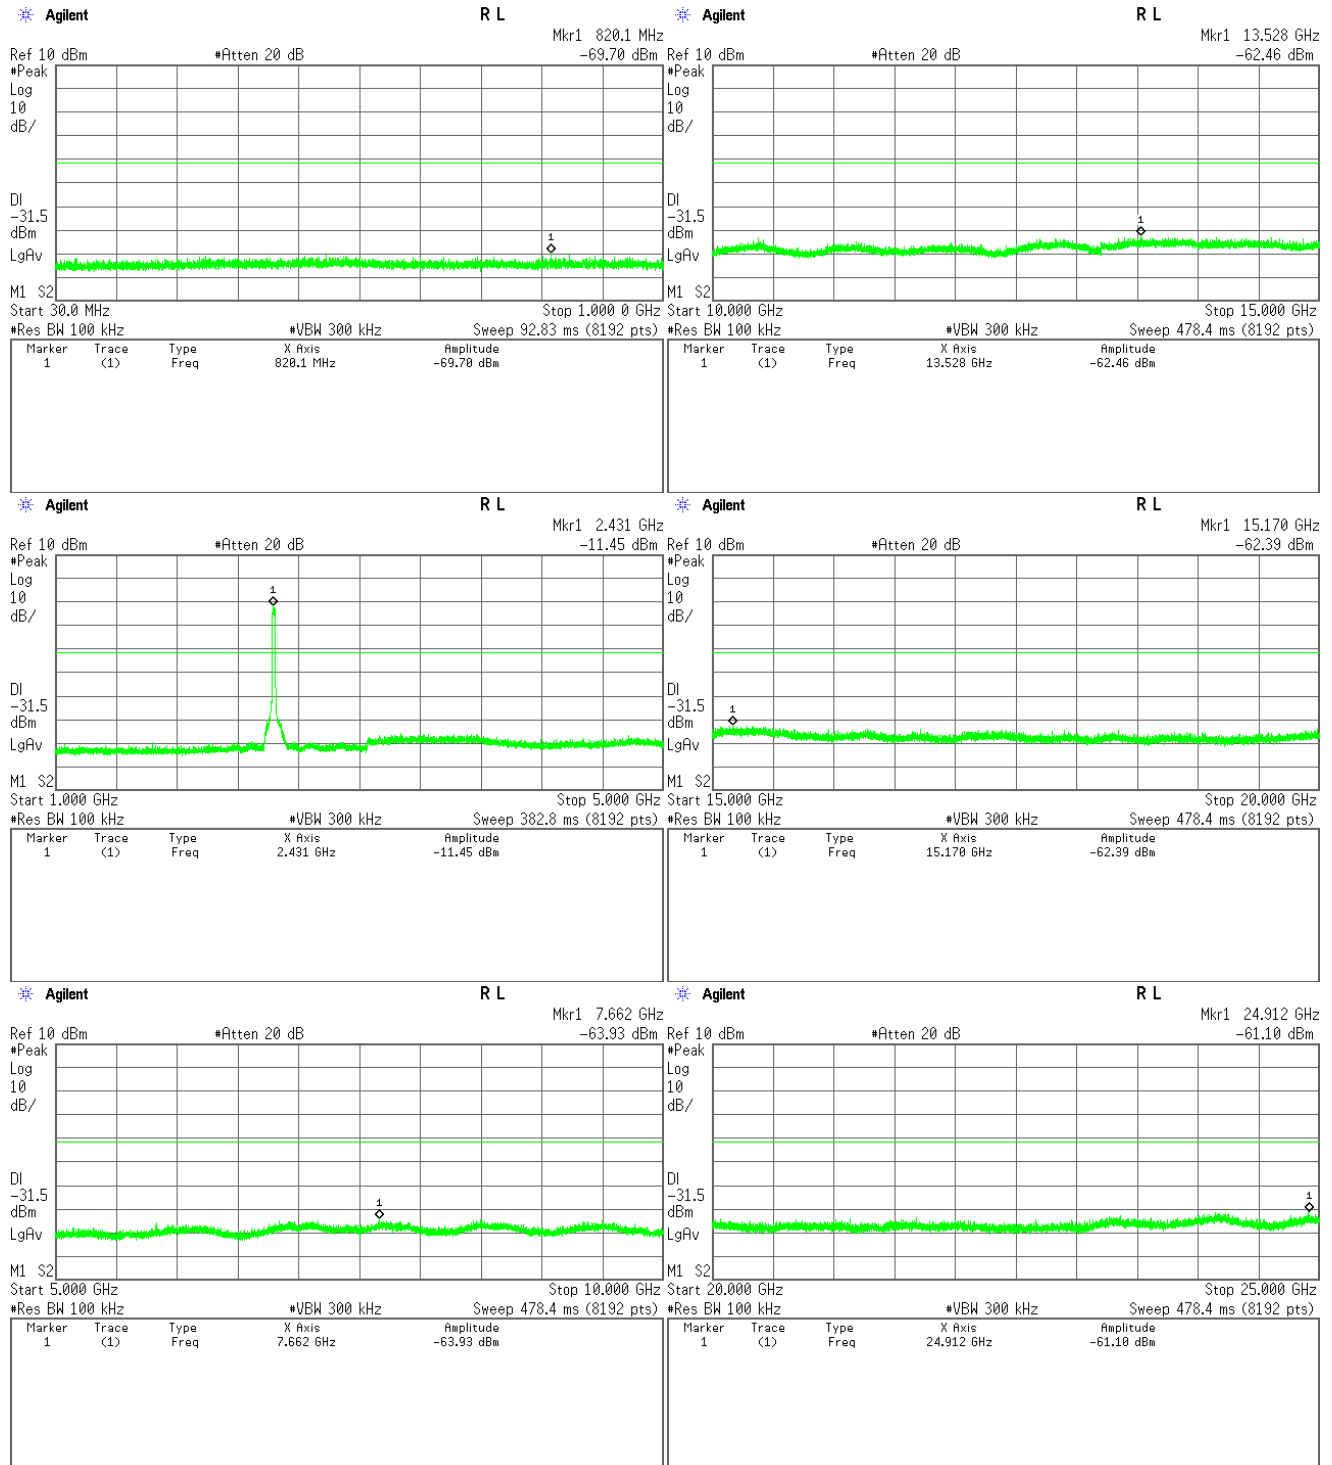


High Channel

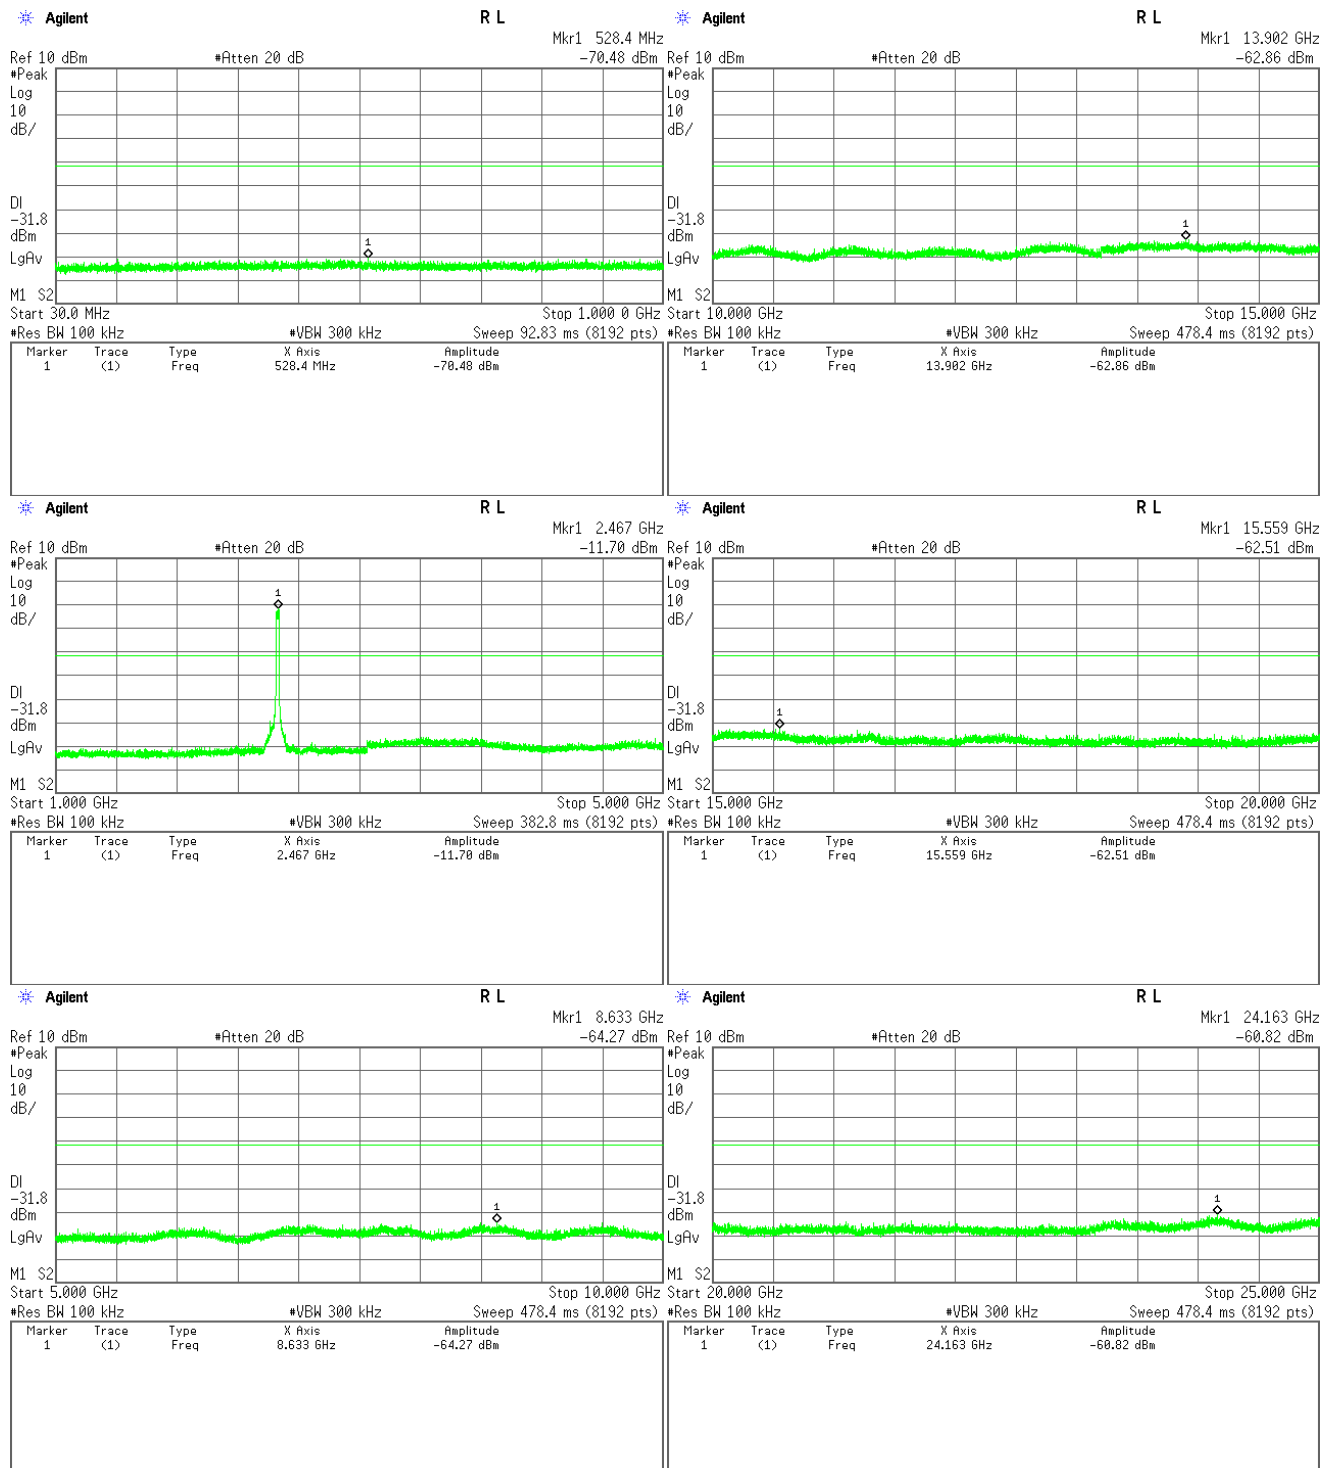


4) Bluetooth Low Energy


Low Channel

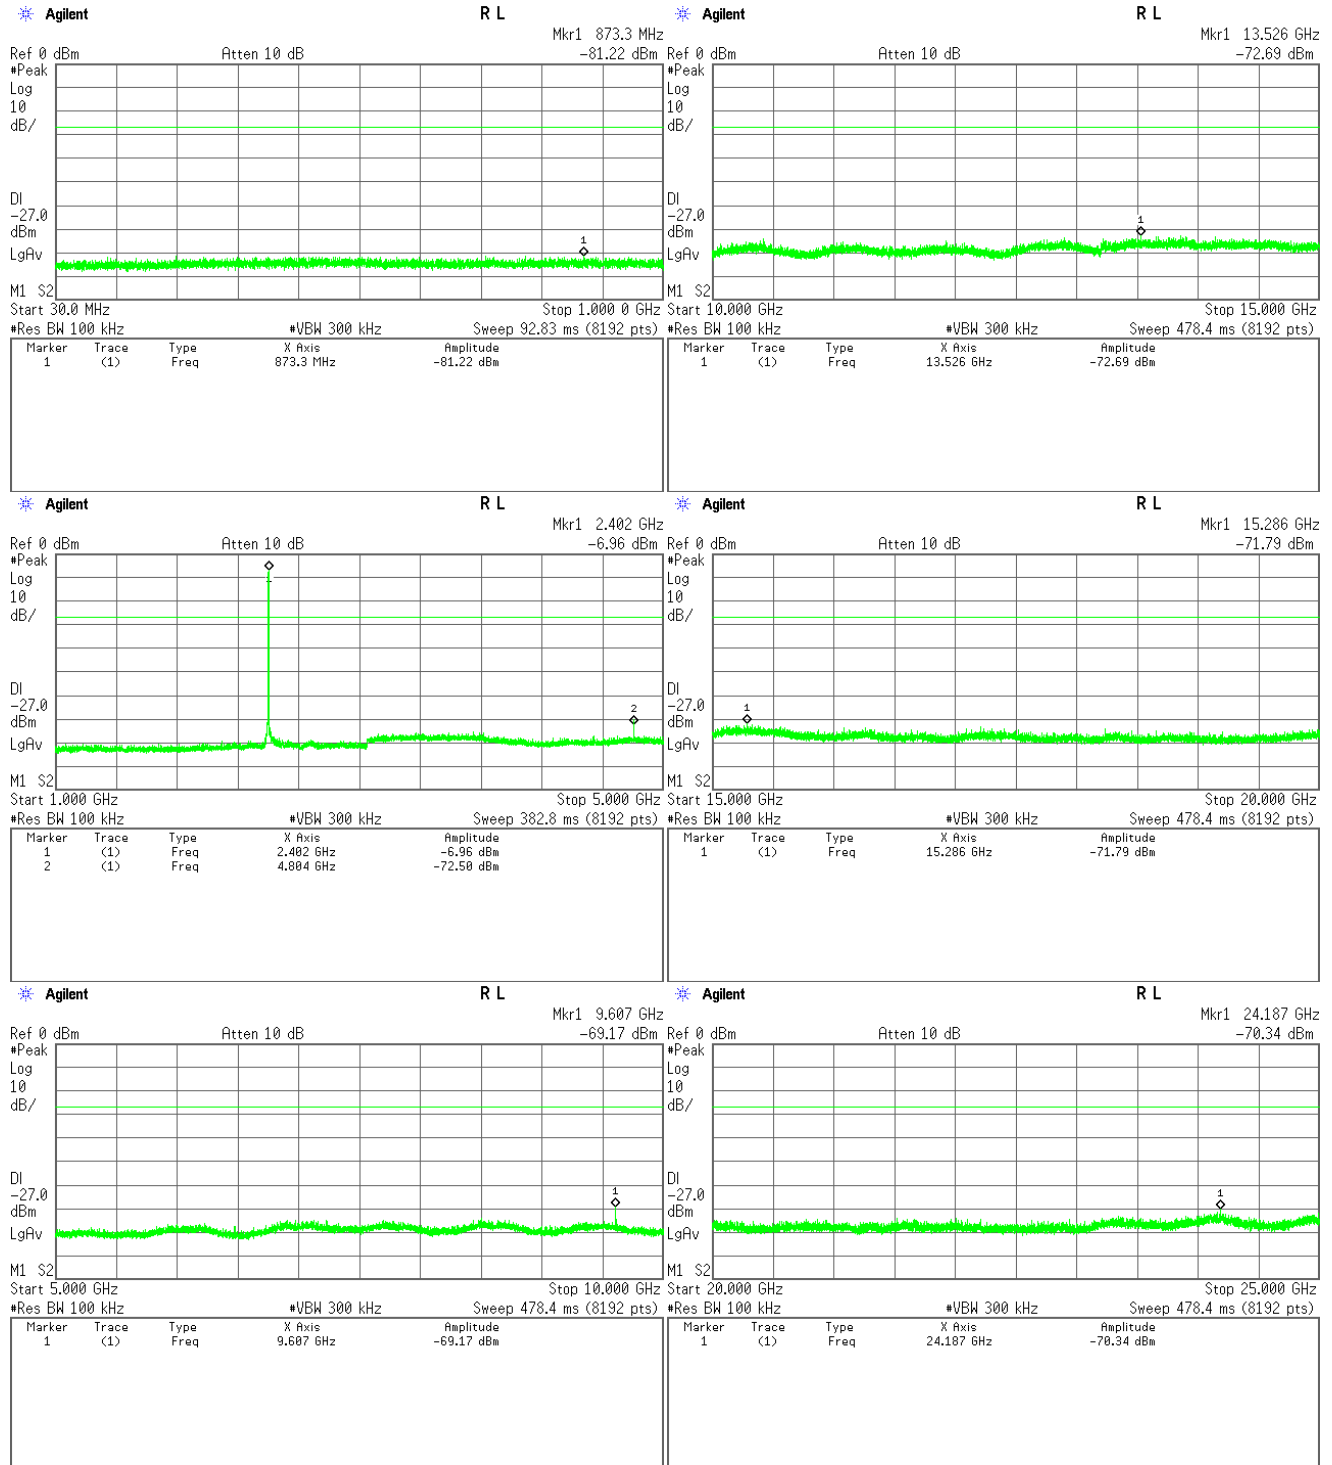

Middle Channel

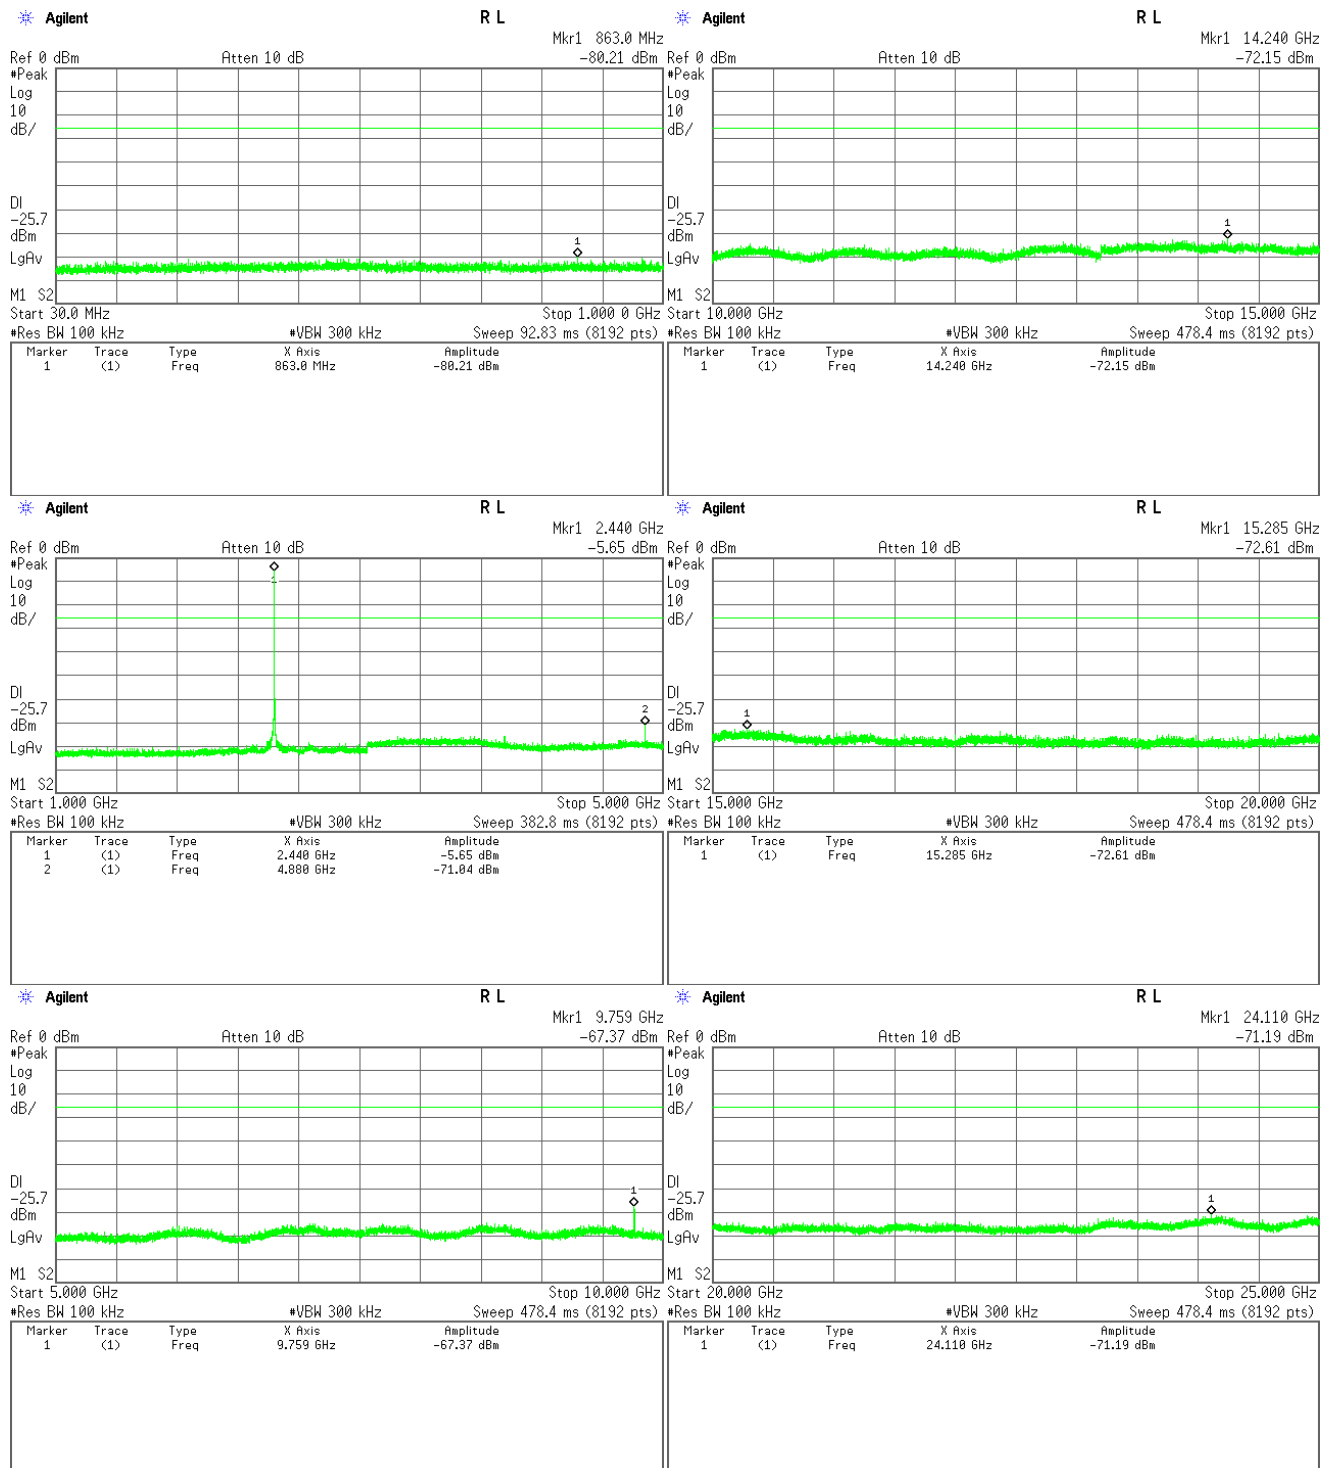

High Channel

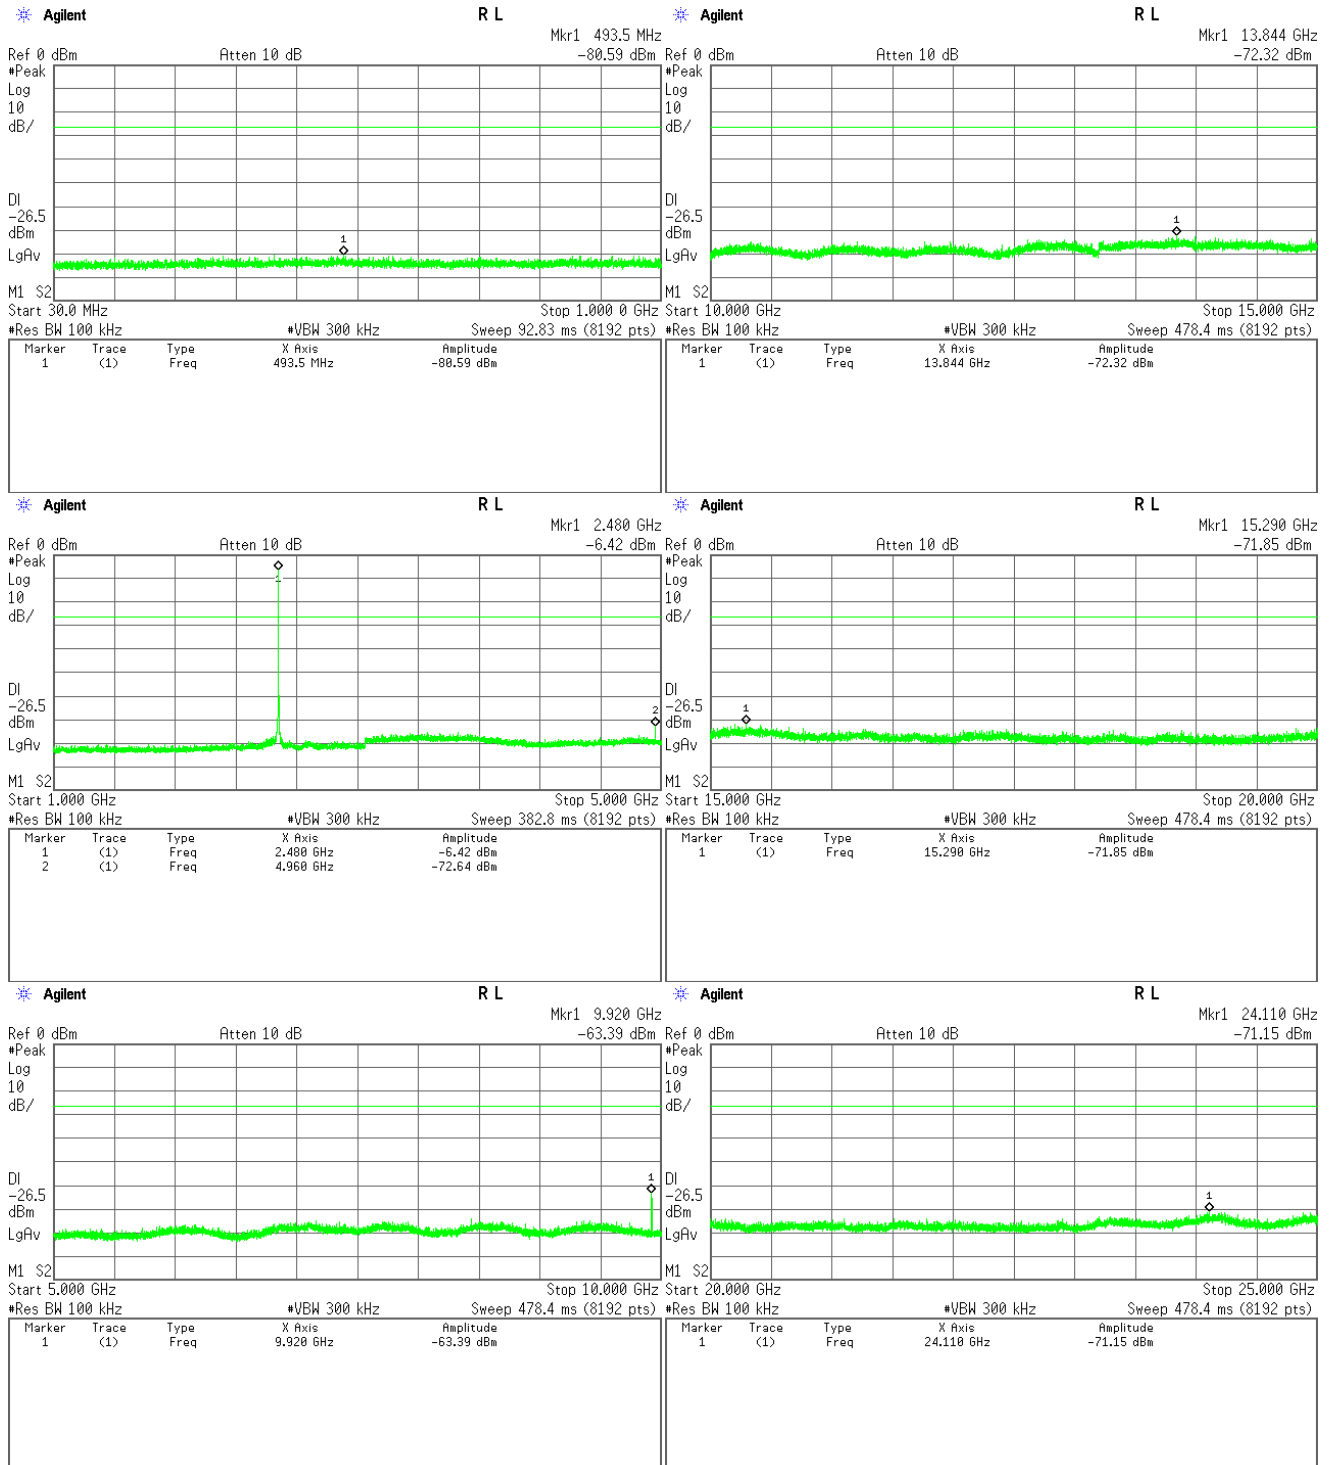


Band-Edge Emission

Test Date : March 28, 2016


Temp.: 22°C, Humi: 34%

1-1) IEEE 802.11b (Main Antenna)

Low Channel

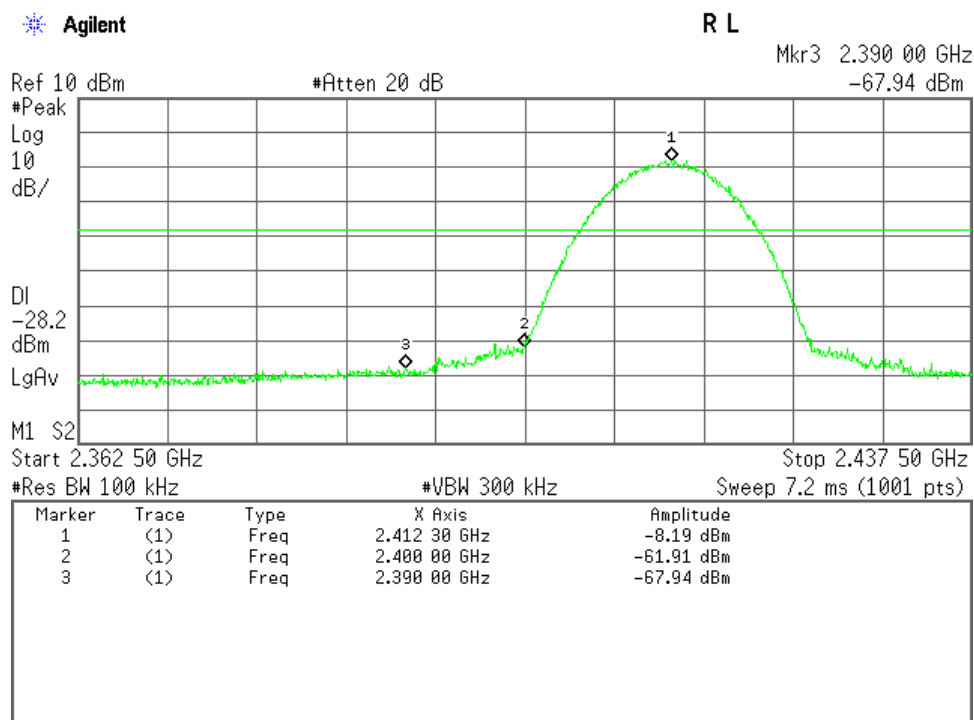


High Channel

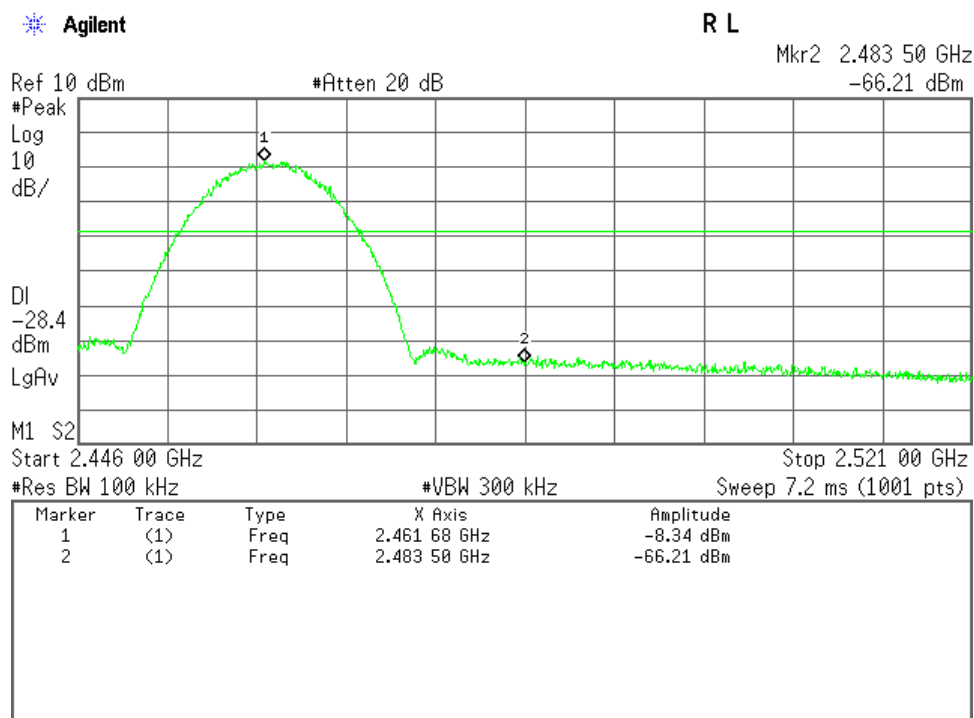


1-2) IEEE 802.11b (Sub Antenna)

Low Channel

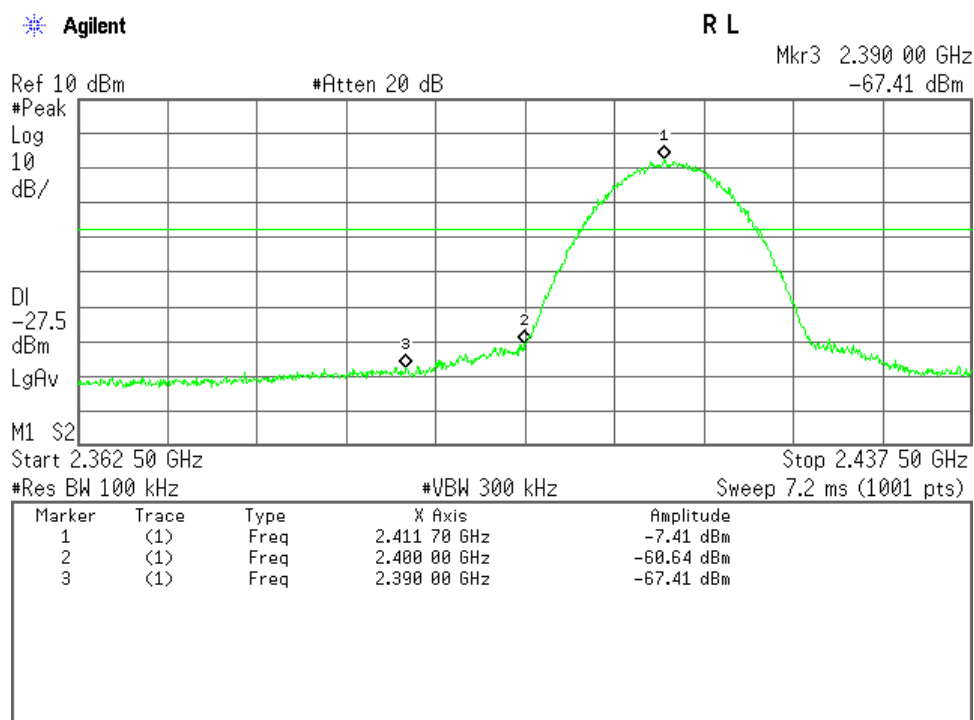


High Channel

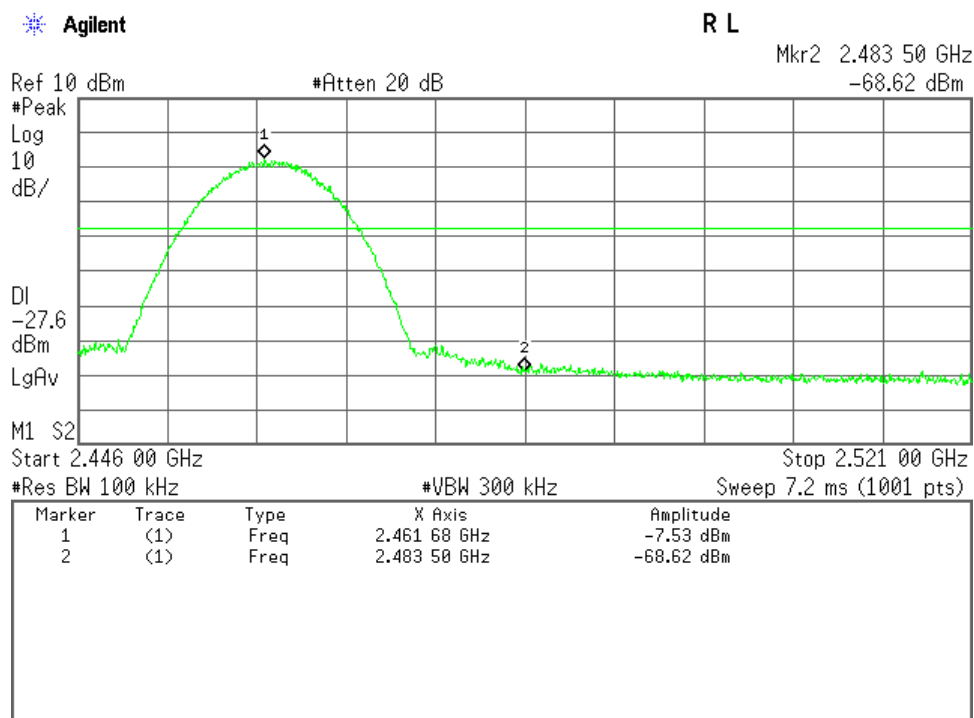


2-1) IEEE 802.11g (Main Antenna)

Low Channel

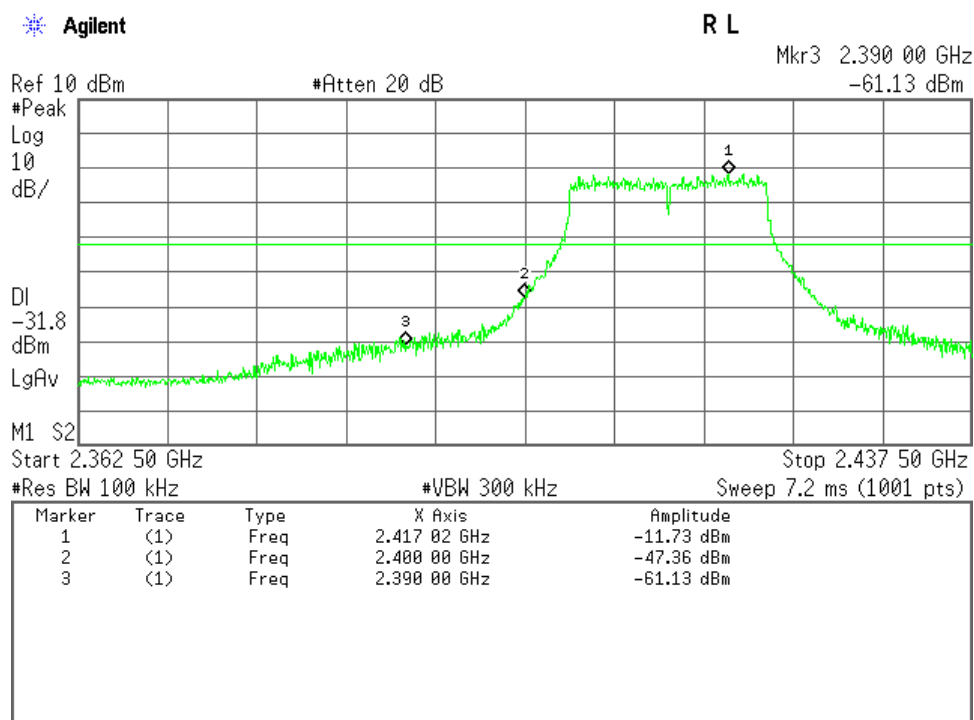


High Channel

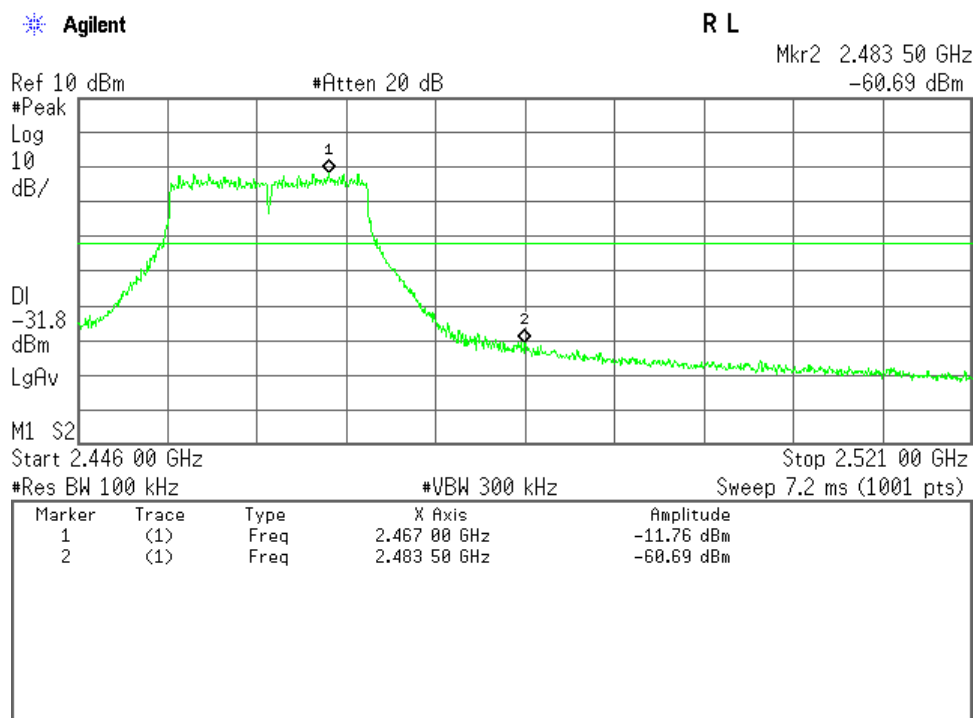


2-2) IEEE 802.11g (Sub Antenna)

Low Channel

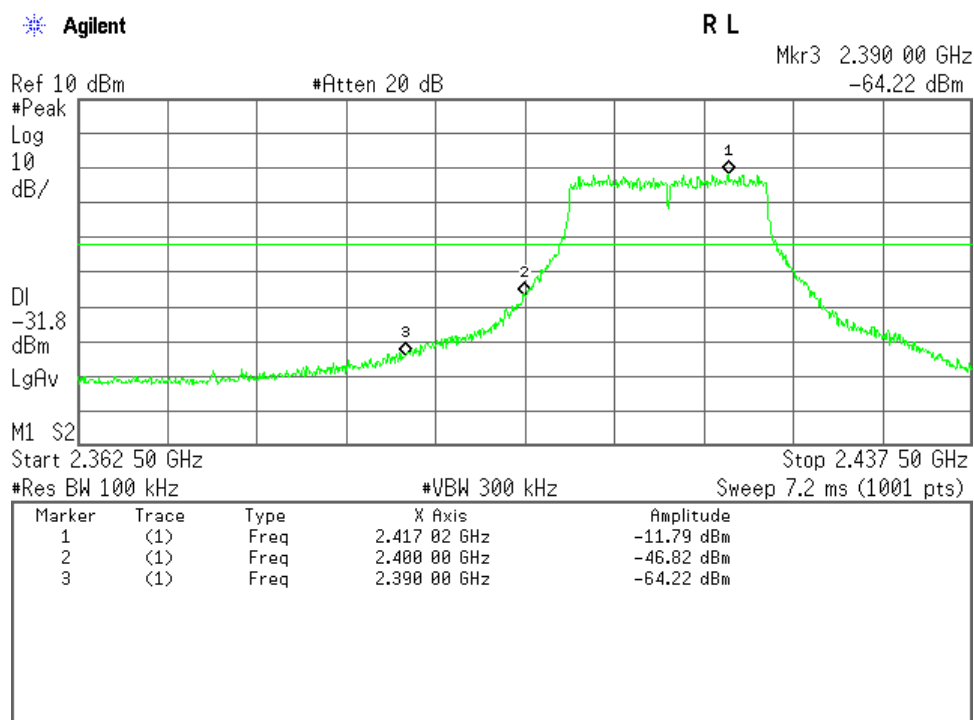


High Channel

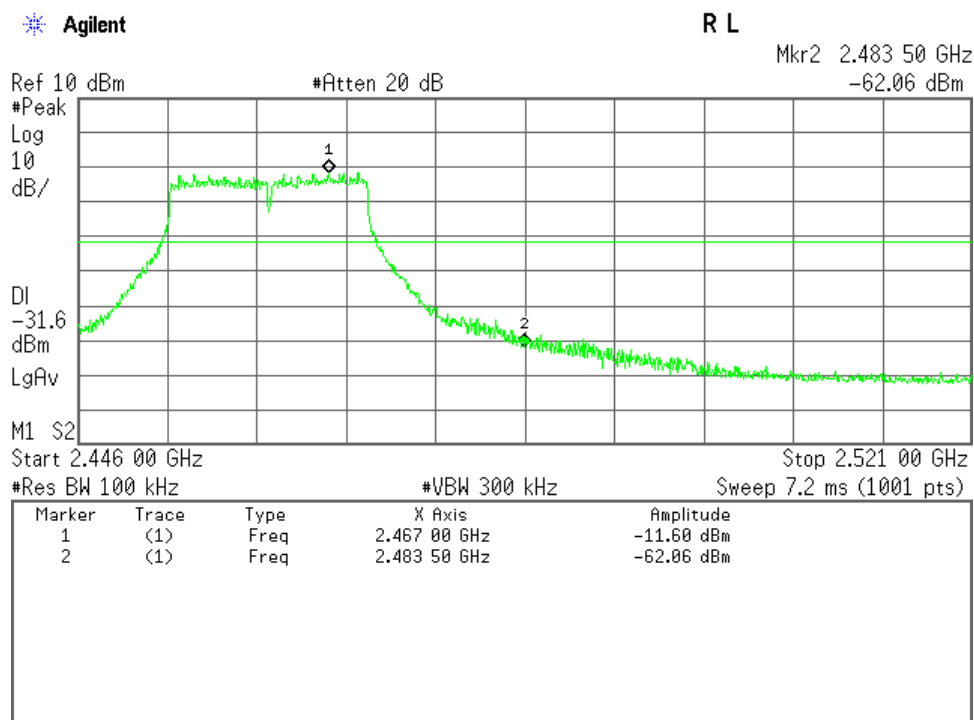


3-1) IEEE 802.11n (Main Antenna)

Low Channel

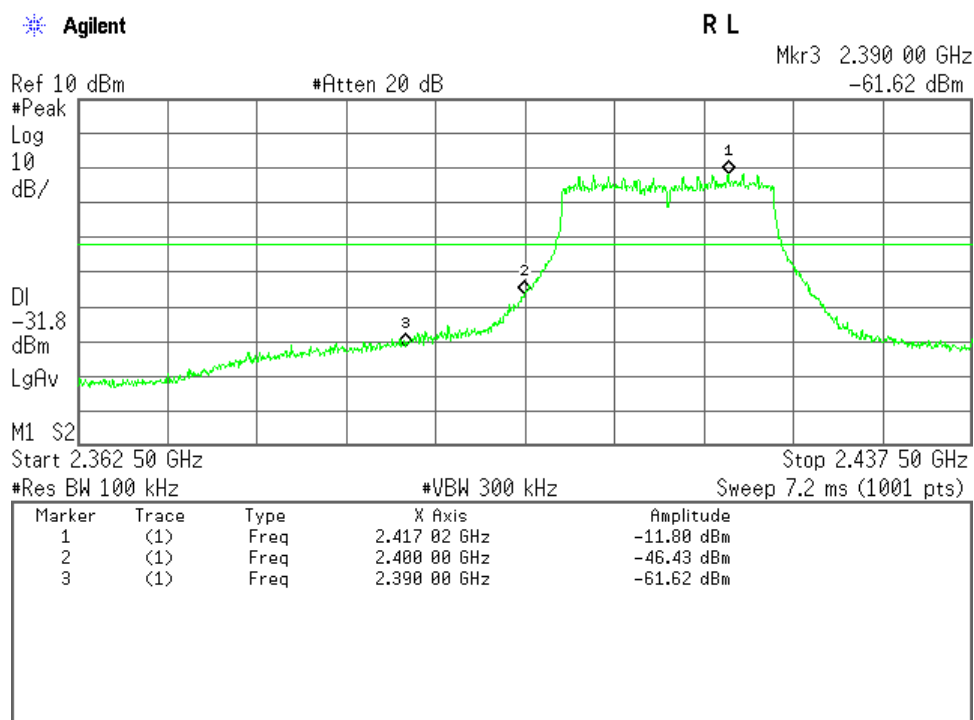


High Channel

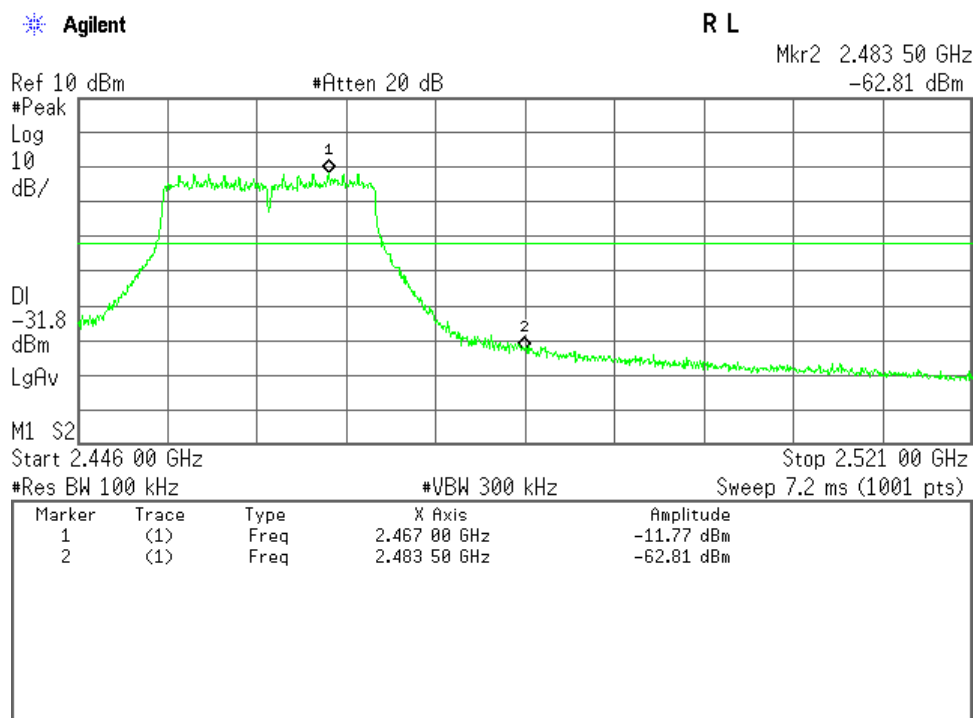


3-2) IEEE 802.11n (Sub Antenna)

Low Channel

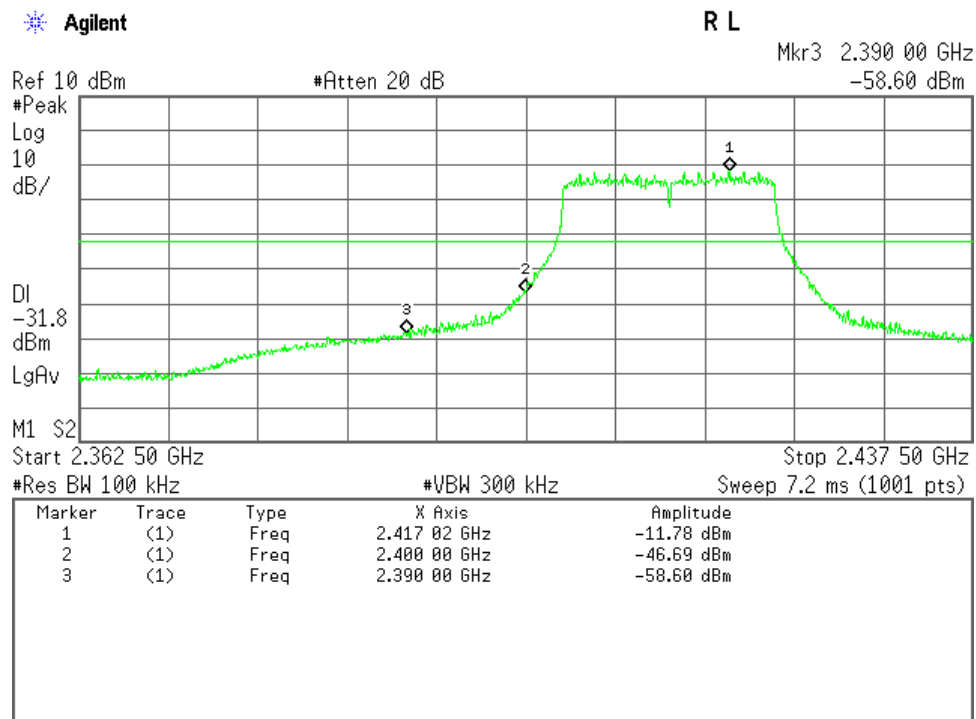


High Channel

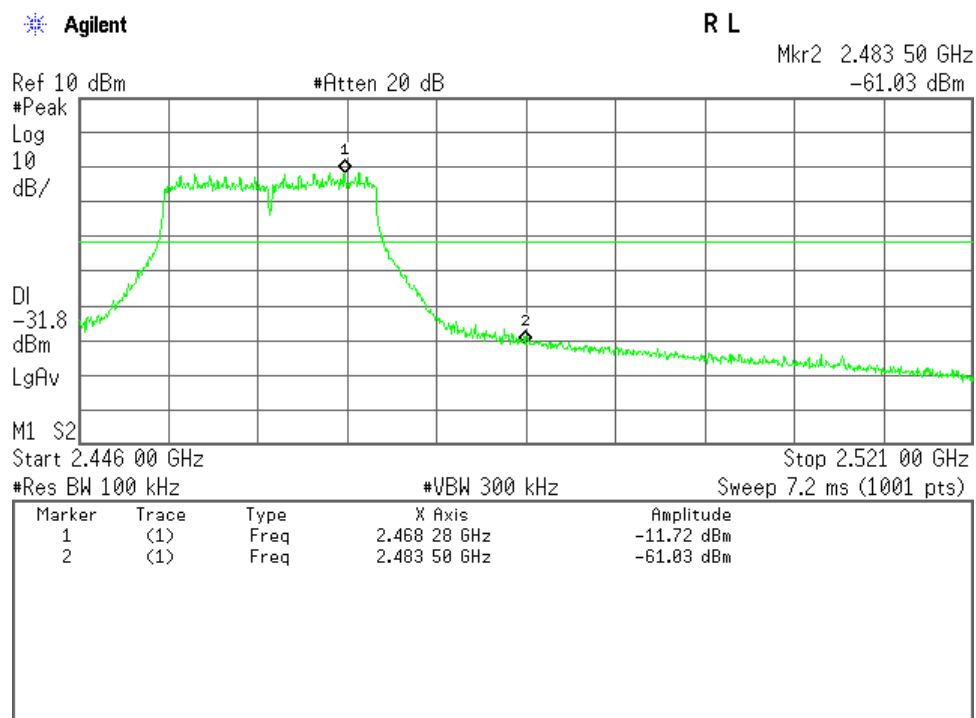


4) Bluetooth Low Energy

Low Channel

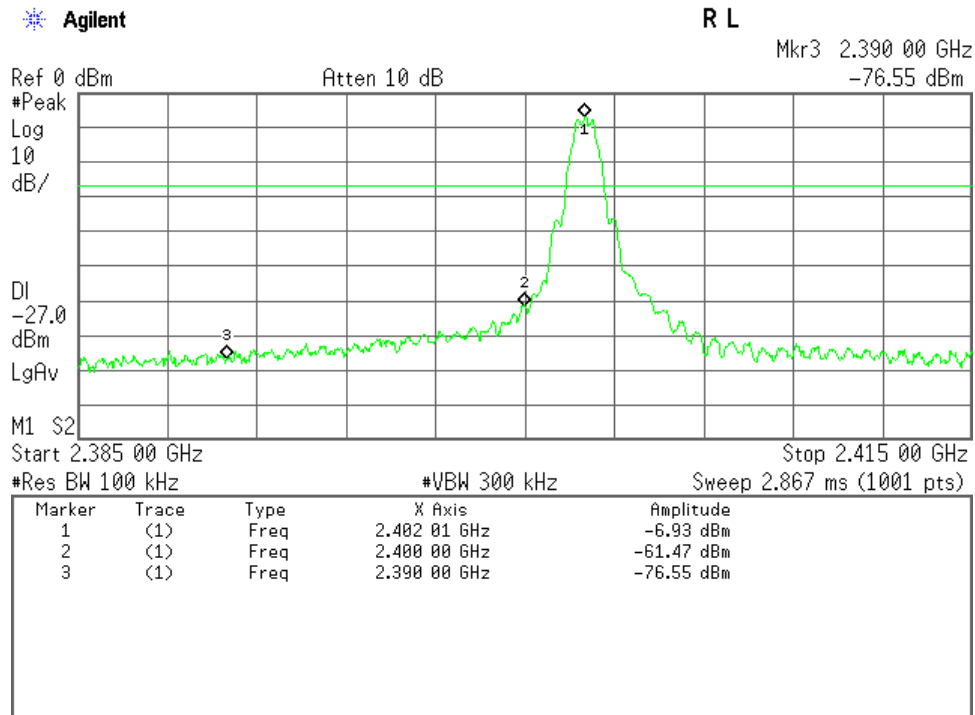

High Channel

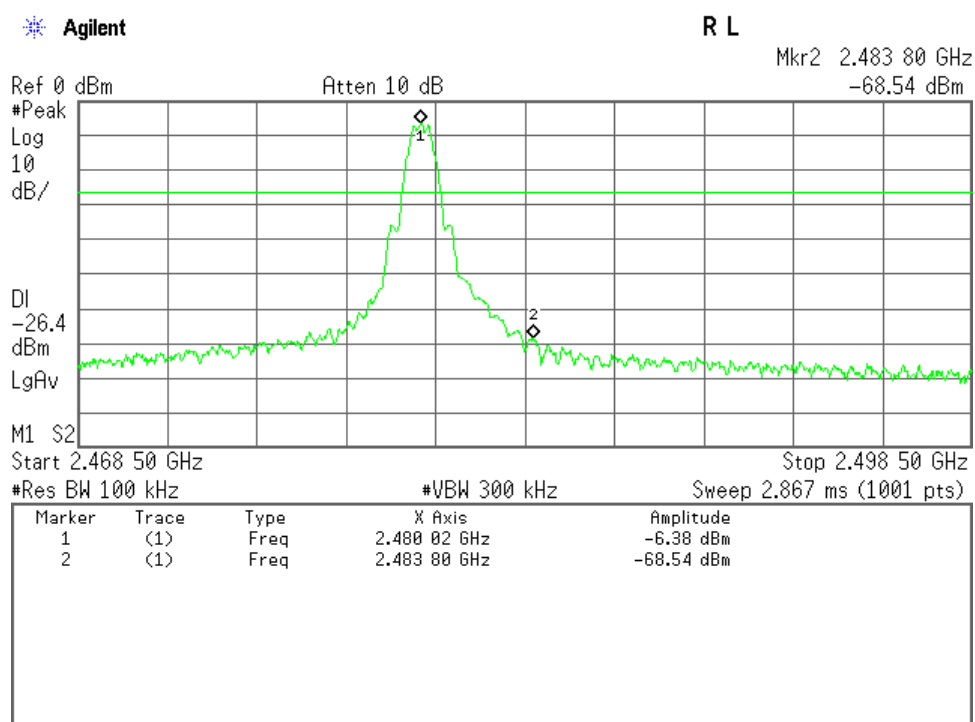

7.8 AC Powerline Conducted Emission

For the requirements, ☒ - Applicable [☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

7.8.1 Test Results

For the standard, ☒ - Passed ☐ - Failed ☐ - Not judged

Min. Limit Margin (Quasi-Peak) 9.8 dB at 2.591 MHz

Uncertainty of Measurement Results ± 2.6 dB(2σ)

Remarks : Bluetooth mode

7.8.2 Test Instruments

Measurement Room M2				
Type	Model	Serial No. (ID)	Manufacturer	Cal. Due
Test Receiver	ESU 26	100170 (A-6)	Rohde & Schwarz	2016/04/25
AMN (main)	KNW-407FR	8-2019-1 (D-103)	Kyoritsu	2016/10/15
RF Cable	RG223/U	--- (H-34)	HUBER+SUHNER	2016/06/04

NOTE : The calibration interval of the above test instruments is 12 months.


7.8.3 Test Method and Test Setup (Diagrammatic illustration)

The preliminary tests were performed using the scan mode of test receiver or spectrum analyzer to observe the emissions characteristics of the EUT.

The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for final tests.

– Side View –

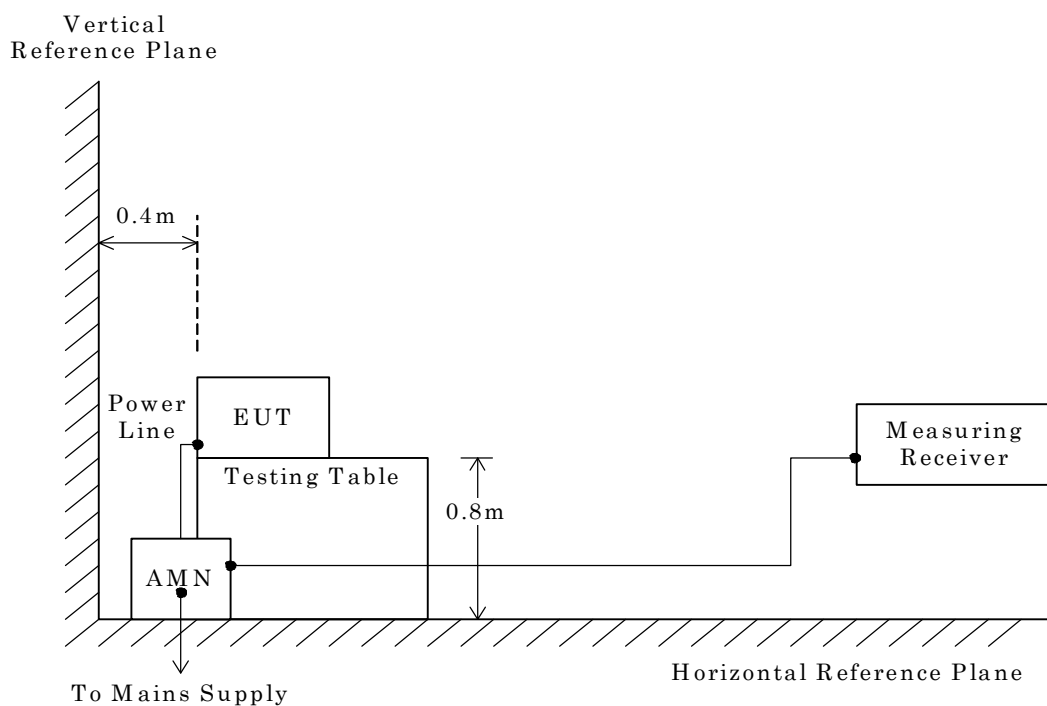

NOTE

AMN : Artificial Mains Network

7.8.4 Test Data

- 1) Mode of EUT : (WLAN) All modes have been investigated and the worst case mode for channel (06ch: 2437MHz / IEEE 802.11b, IEEE 802.11g and IEEE 802.11n) has been listed.


Test voltage : AC120V, 60Hz

Test Date: March 29, 2016

Temp.: 22 °C, Humi.: 38 %

Measured phase : L1

Frequency [MHz]	Corr. Factor [dB]	Meter Readings [dB(μV)]		Limits [dB(μV)]		Results [dB(μV)]		Margin [dB]		Remarks
		QP	AVE	QP	AVE	QP	AVE	QP	AVE	
0.210	10.3	37.6	--	63.2	53.2	47.9	--	+15.3	--	-
0.323	10.2	33.2	--	59.6	49.6	43.4	--	+16.2	--	-
0.647	10.2	33.2	13.0	56.0	46.0	43.4	23.2	+12.6	+22.8	-
0.755	10.2	33.5	12.7	56.0	46.0	43.7	22.9	+12.3	+23.1	-
1.088	10.3	33.6	11.3	56.0	46.0	43.9	21.6	+12.1	+24.4	-
1.503	10.3	33.5	15.4	56.0	46.0	43.8	25.7	+12.2	+20.3	-
2.602	10.4	35.1	15.6	56.0	46.0	45.5	26.0	+10.5	+20.0	-
3.035	10.4	33.8	14.7	56.0	46.0	44.2	25.1	+11.8	+20.9	-
19.576	11.2	32.2	--	60.0	50.0	43.4	--	+16.6	--	-

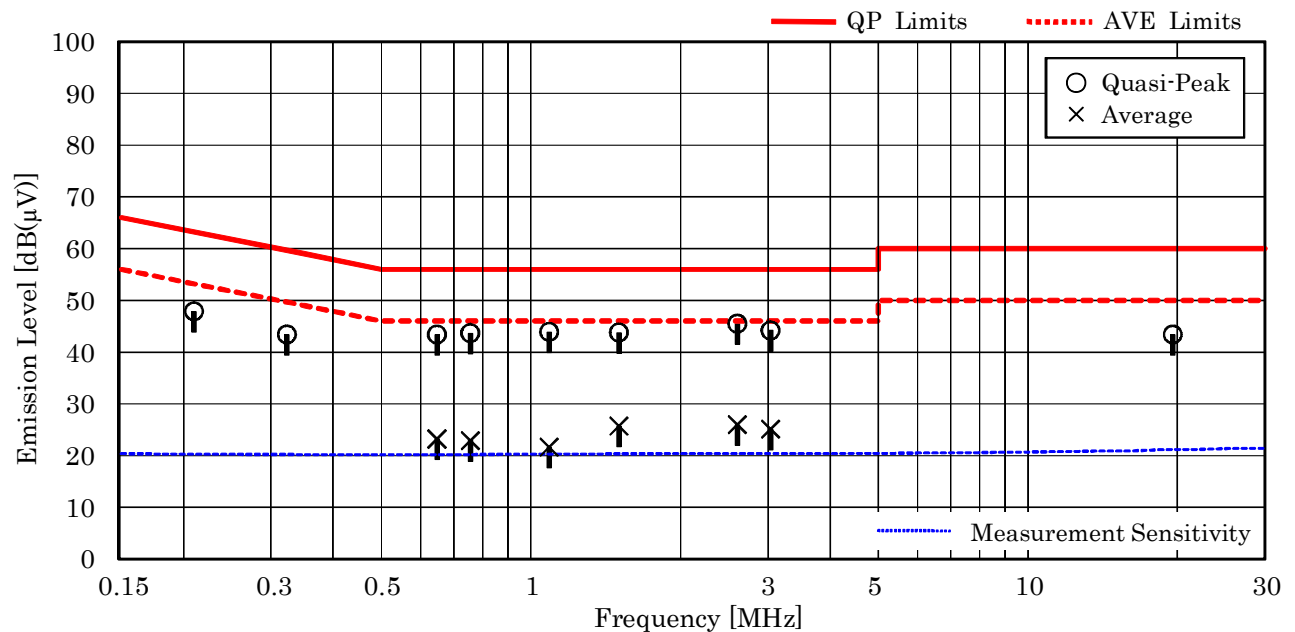

NOTES

- The spectrum was checked from 150 kHz to 30 MHz.
- The correction factor includes the AMN insertion loss and the cable loss.
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- The symbol of "--" means "not applicable".
- Calculated result at 2.602 MHz, as the worst point shown on underline:
Correction Factor + Meter Reading (QP) = 10.4 + 35.1 = 45.5 dB(μV)
- QP : Quasi-Peak Detector / AVE : Average Detector
- Test receiver setting(s) : CISPR QP 9 kHz / Average 9 kHz


Test voltage : AC120V, 60Hz

Test Date: March 29, 2016

Temp.: 22 °C, Humi.: 38 %

Measured phase : L2

Frequency [MHz]	Corr. Factor [dB]	Meter Readings [dB(μV)]		Limits [dB(μV)]		Results [dB(μV)]		Margin [dB]		Remarks
		QP	AVE	QP	AVE	QP	AVE	QP	AVE	
0.210	10.2	33.9	--	63.2	53.2	44.1	--	+19.1	--	-
0.323	10.2	27.6	--	59.6	49.6	37.8	--	+21.8	--	-
0.647	10.2	26.3	--	56.0	46.0	36.5	--	+19.5	--	-
0.755	10.2	25.8	--	56.0	46.0	36.0	--	+20.0	--	-
1.088	10.3	28.4	--	56.0	46.0	38.7	--	+17.3	--	-
1.503	10.3	30.7	--	56.0	46.0	41.0	--	+15.0	--	-
2.602	10.4	21.3	--	56.0	46.0	31.7	--	+24.3	--	-
3.035	10.4	20.1	--	56.0	46.0	30.5	--	+25.5	--	-
19.576	11.3	22.3	--	60.0	50.0	33.6	--	+26.4	--	-

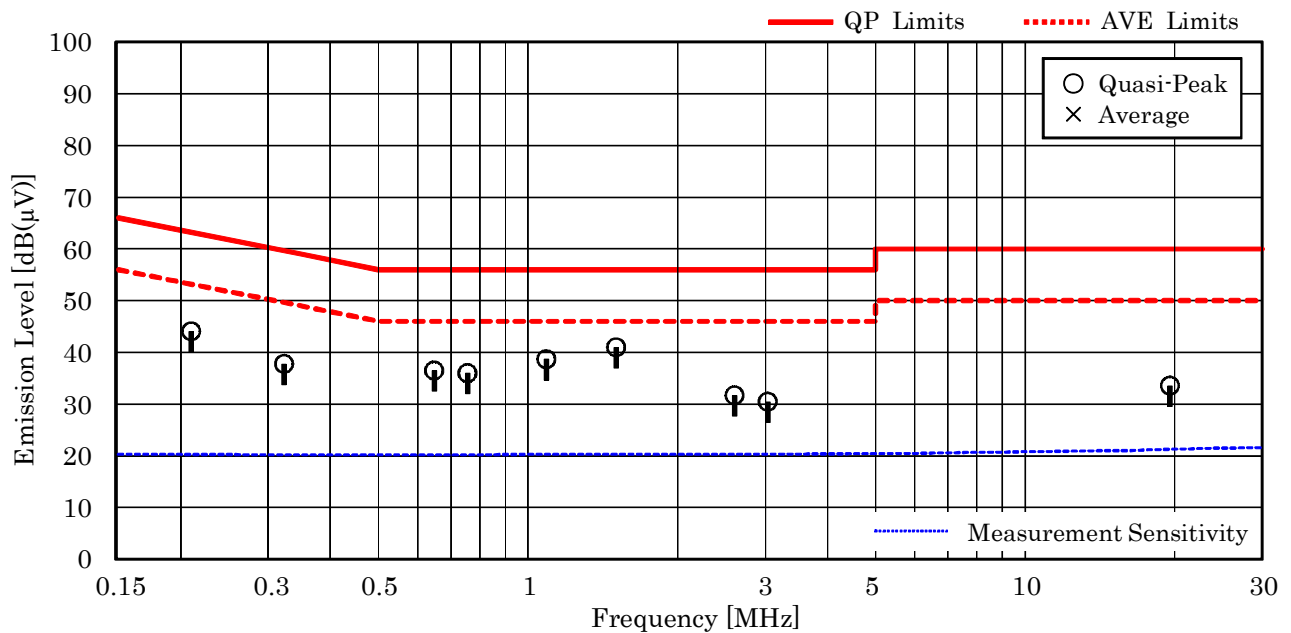

NOTES

1. The spectrum was checked from 150 kHz to 30 MHz.
2. The correction factor includes the AMN insertion loss and the cable loss.
3. The symbol of "<" means "or less".
4. The symbol of ">" means "more than".
5. The symbol of "--" means "not applicable".
6. Calculated result at 1.503 MHz, as the worst point shown on underline:
Correction Factor + Meter Reading (QP) = 10.3 + 30.7 = 41.0 dB(μV)
7. QP : Quasi-Peak Detector / AVE : Average Detector
8. Test receiver setting(s) : CISPR QP 9 kHz / Average 9 kHz

2) Mode of EUT : Bluetooth Low Energy


Test voltage : AC120V, 60Hz

Test Date: March 29, 2016

Temp.: 22 °C, Humi.: 38 %

Measured phase : L1

Frequency [MHz]	Corr. Factor [dB]	Meter Readings [dB(μV)]		Limits [dB(μV)]		Results [dB(μV)]		Margin [dB]		Remarks
		QP	AVE	QP	AVE	QP	AVE	QP	AVE	
0.207	10.3	37.5	--	63.3	53.3	47.8	--	+15.5	--	-
0.314	10.2	33.1	--	59.9	49.9	43.3	--	+16.6	--	-
0.645	10.2	33.2	14.2	56.0	46.0	43.4	24.4	+12.6	+21.6	-
0.739	10.2	33.4	12.5	56.0	46.0	43.6	22.7	+12.4	+23.3	-
1.167	10.3	34.3	11.0	56.0	46.0	44.6	21.3	+11.4	+24.7	-
1.528	10.3	33.8	12.0	56.0	46.0	44.1	22.3	+11.9	+23.7	-
2.591	10.4	35.8	15.5	56.0	46.0	46.2	25.9	+ 9.8	+20.1	-
3.018	10.4	35.3	15.0	56.0	46.0	45.7	25.4	+10.3	+20.6	-
20.099	11.2	31.6	--	60.0	50.0	42.8	--	+17.2	--	-

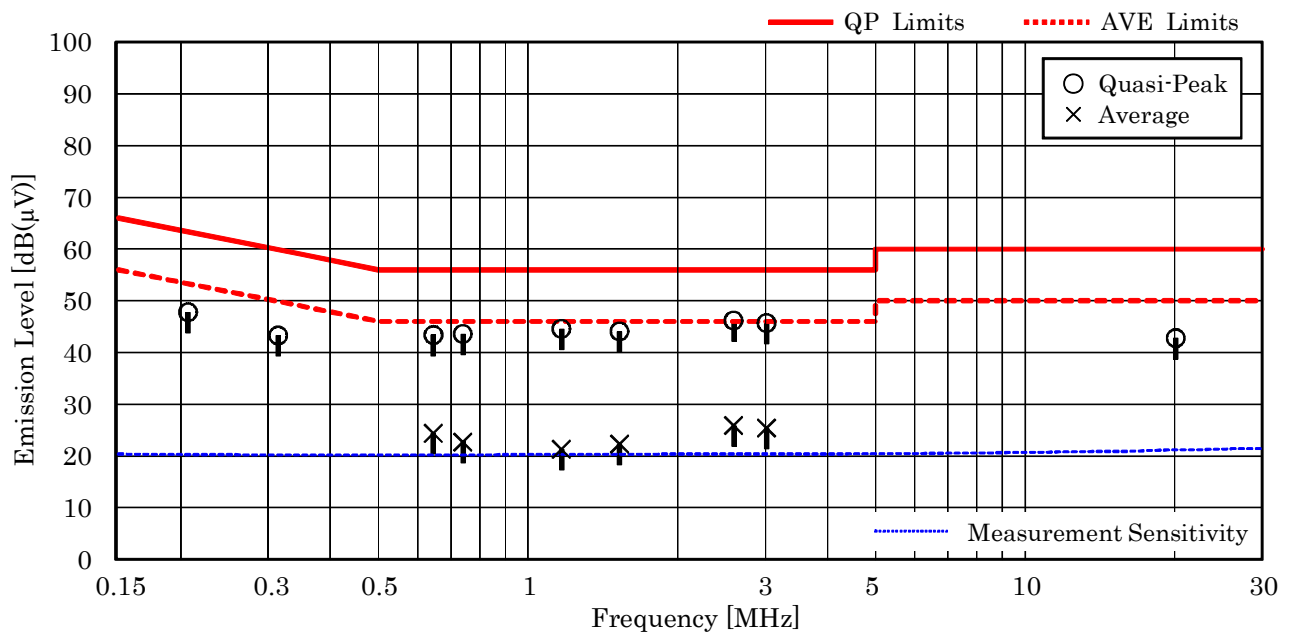

NOTES

1. The spectrum was checked from 150 kHz to 30 MHz.
2. The correction factor includes the AMN insertion loss and the cable loss.
3. The symbol of "<" means "or less".
4. The symbol of ">" means "more than".
5. The symbol of "--" means "not applicable".
6. Calculated result at 2.591 MHz, as the worst point shown on underline:
Correction Factor + Meter Reading (QP) = 10.4 + 35.8 = 46.2 dB(μV)
7. QP : Quasi-Peak Detector / AVE : Average Detector
8. Test receiver setting(s) : CISPR QP 9 kHz / Average 9 kHz


Test voltage : AC120V, 60Hz

Test Date: March 29, 2016

Temp.: 22 °C, Humi.: 38 %

Measured phase : L2

Frequency [MHz]	Corr. Factor [dB]	Meter Readings [dB(μV)]		Limits [dB(μV)]		Results [dB(μV)]		Margin [dB]		Remarks
		QP	AVE	QP	AVE	QP	AVE	QP	AVE	
0.207	10.2	33.7	--	63.3	53.3	43.9	--	+19.4	--	-
0.314	10.2	27.5	--	59.9	49.9	37.7	--	+22.2	--	-
0.645	10.2	26.4	--	56.0	46.0	36.6	--	+19.4	--	-
0.739	10.2	25.4	--	56.0	46.0	35.6	--	+20.4	--	-
1.167	10.3	29.7	--	56.0	46.0	40.0	--	+16.0	--	-
1.528	10.3	29.3	--	56.0	46.0	39.6	--	+16.4	--	-
2.591	10.4	22.8	--	56.0	46.0	33.2	--	+22.8	--	-
3.018	10.4	21.5	--	56.0	46.0	31.9	--	+24.1	--	-
20.099	11.3	21.2	--	60.0	50.0	32.5	--	+27.5	--	-

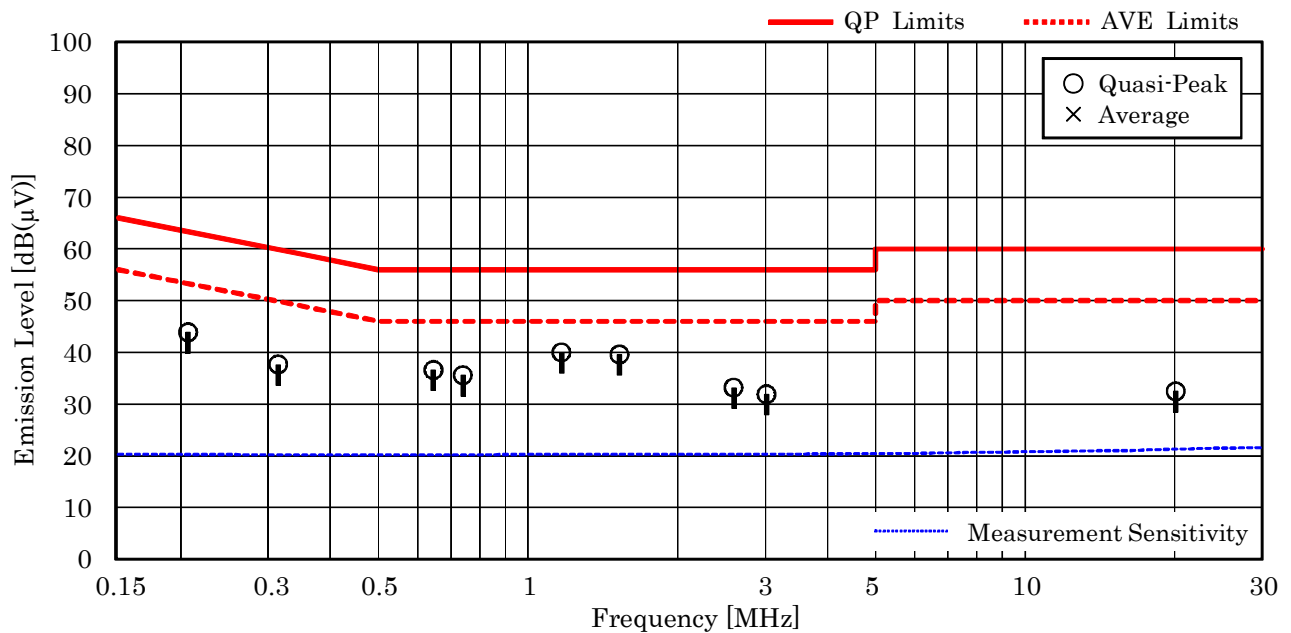

NOTES

1. The spectrum was checked from 150 kHz to 30 MHz.
2. The correction factor includes the AMN insertion loss and the cable loss.
3. The symbol of "<" means "or less".
4. The symbol of ">" means "more than".
5. The symbol of "--" means "not applicable".
6. Calculated result at 1.167 MHz, as the worst point shown on underline:
Correction Factor + Meter Reading (QP) = 10.3 + 29.7 = 40.0 dB(μV)
7. QP : Quasi-Peak Detector / AVE : Average Detector
8. Test receiver setting(s) : CISPR QP 9 kHz / Average 9 kHz

7.9 Radiated Emission

For the requirements, ☒ - Applicable [☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

7.9.1 Test Results

For the standard, ☒ - Passed ☐ - Failed ☐ - Not judged

Min. Limit Margin (Average) 6.9 dB at 2389.8 MHz

Uncertainty of Measurement Results	9 kHz – 30 MHz	<u>± 3.0</u>	dB(2 σ)
	30 MHz – 300 MHz	<u>± 3.8</u>	dB(2 σ)
	300 MHz – 1000 MHz	<u>± 4.8</u>	dB(2 σ)
	1 GHz – 6 GHz	<u>± 4.7</u>	dB(2 σ)
	6 GHz – 18 GHz	<u>± 4.6</u>	dB(2 σ)
	18 GHz – 40 GHz	<u>± 5.5</u>	dB(2 σ)

Remarks : IEEE802.11n mode, X axis position.

7.9.2 Test Instruments

Anechoic Chamber A2				
Type	Model	Serial No. (ID)	Manufacturer	Cal. Due
Test Receiver	ESU 26	100170 (A-6)	Rohde & Schwarz	2016/04/25
Loop Antenna	HFH2-Z2	872096/25 (C-2)	Rohde & Schwarz	2016/07/26
RF Cable	RG213/U	--- (H-28)	HUBER+SUHNER	2016/07/26
Pre-Amplifier	310N	304573 (A-17)	SONOMA	2016/04/15
Biconical Antenna	VHA9103/BBA9106	2355 (C-30)	Schwarzbeck	2016/05/24
Log-periodic Antenna	UHALP9108-A1	0694 (C-31)	Schwarzbeck	2016/05/24
RF Cable	S 10162 B-11 etc.	--- (H-4)	HUBER+SUHNER	2016/04/15
Site Attenuation	--	--- (H-15)	----	2017/01/03
Pre-Amplifier	TPA0118-36	1010 (A-37)	TOYO	2016/05/11
Horn Antenna	91888-2	562 (C-41-1)	EATON	2016/06/16
Horn Antenna	91889-2	568 (C-41-2)	EATON	2016/06/16
Horn Antenna	3160-04	9903-1053 (C-55)	EMCO	2016/06/29
Horn Antenna	3160-05	9902-1061 (C-56)	EMCO	2016/06/29
Horn Antenna	3160-06	9712-1045 (C-57)	EMCO	2016/06/29
Horn Antenna	3160-07	9902-1113 (C-58)	EMCO	2016/06/29
Horn Antenna	3160-08	9904-1099 (C-59)	EMCO	2016/06/29
Horn Antenna	3160-09	9808-1117 (C-48)	EMCO	2016/06/28
Attenuator	54A-10	W5713 (D-29)	Weinschel	2016/08/16
Attenuator	2-10	BA6214 (D-79)	Weinschel	2016/11/19
RF Cable	SUCOFLEX104	267479/4 (C-66)	HUBER+SUHNER	2017/01/06
RF Cable	SUCOFLEX104	267414/4 (C-67)	HUBER+SUHNER	2017/01/06
RF Cable	SUCOFLEX102EA	3041/2EA (C-69)	HUBER+SUHNER	2017/01/06
Band Rejection Filter	BRM50701	029 (D-93)	MICRO-TRONICS	2017/02/17
SVSWR	--	--- (H-19)	----	2017/03/03

NOTE : The calibration interval of the above test instruments is 12 months.

7.9.3 Test Method and Test Setup (Diagrammatic illustration)

7.9.3.1 Radiated Emission 9 kHz – 30 MHz


The preliminary tests were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration(in X, Y and Z axis), cable configuration and mode of operation were determined for producing the maximum level of emissions.

The measurement were performed about three antenna orientations (parallel, perpendicular, and ground-parallel).

This configurations was used for the final tests.

– Side View –

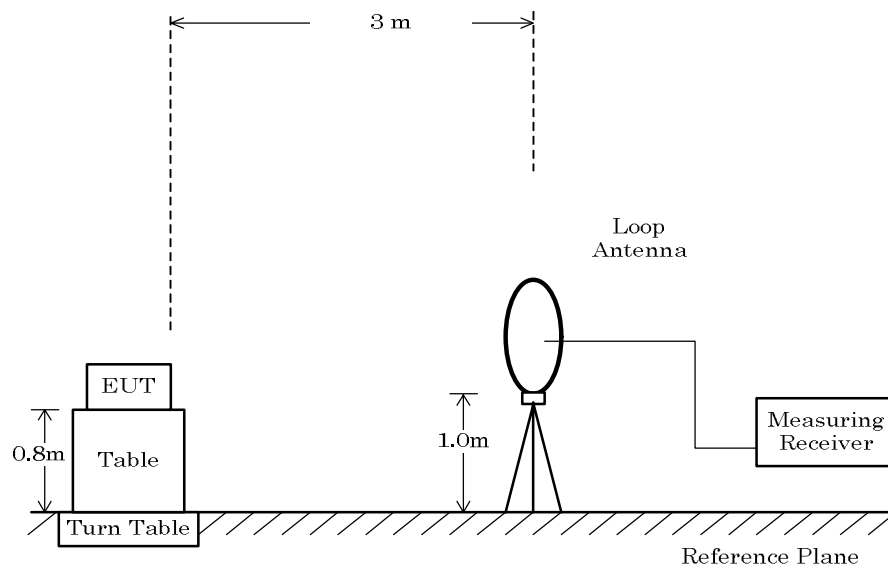


7.9.3.2 Radiated Emission 30 MHz – 1000 MHz

The preliminary tests were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration(in X, Y and Z axis), cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for the final tests.

– Side View –

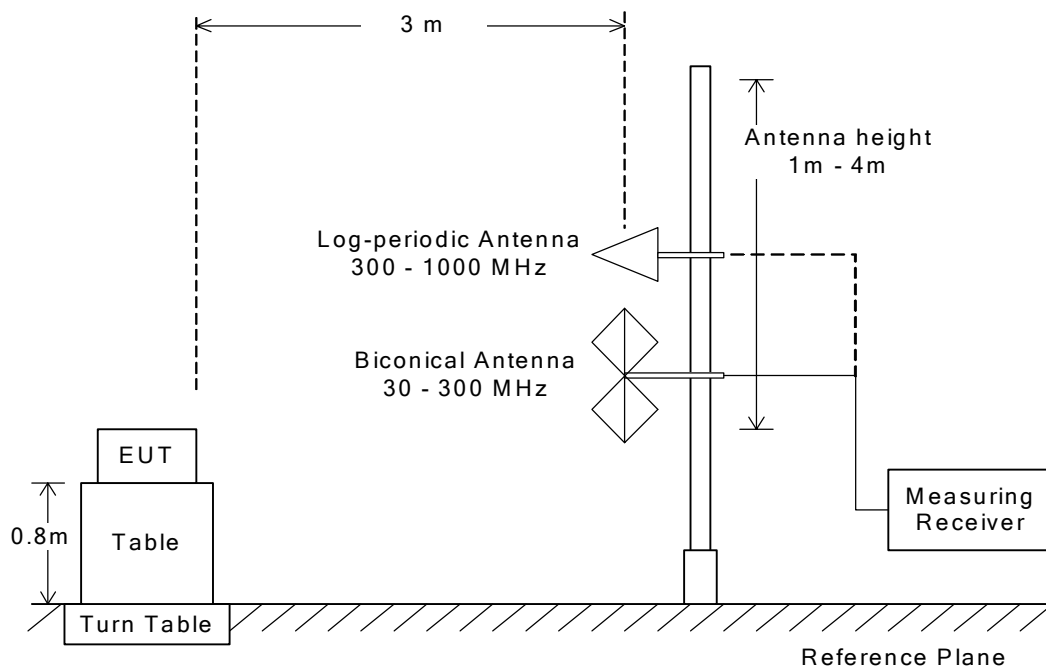

7.9.3.3 Radiated Emission above 1 GHz

The preliminary tests were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration(in X, Y and Z axis), cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for the final tests.

The setting of the measuring instruments are shown as follows:


Type	Peak	Average
Detector Function	Peak	Peak
Res. Bandwidth	1 MHz	1 MHz
Video Bandwidth	3 MHz	$\geq 1/T * 1)$
Video Filtering	Linear Voltage	Linear Voltage
Sweep Time	AUTO	AUTO
Trace	Max Hold	Max Hold

Note: 1. T: Minimum transmission duration

Average (VBW) Setting:

Mode	Interval	Cycle	Duty cycle	Burst on period(T)	Min. VBW(1/T)	VBW Setting
	(msec)	(msec)	(%)	(msec)	(kHz)	(kHz)
IEEE802.11b(11Mbps)	0.10	1.39	92.8%	1.29	0.78	1.00
IEEE802.11g(48Mbps)	0.11	0.38	71.1%	0.27	3.70	5.00
IEEE802.11n(39Mbps(MCS4))	0.11	0.45	75.6%	0.34	2.94	3.00
Bluetooth LE	0.22	0.62	64.5%	0.40	2.50	3.00

– Side View –

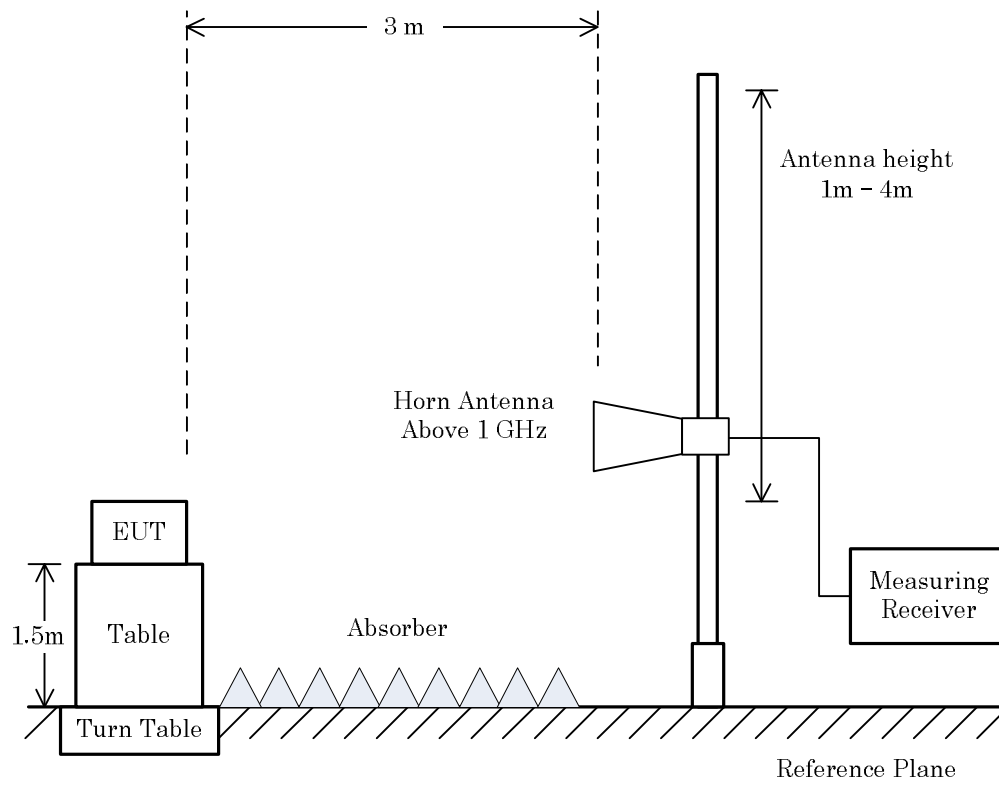

NOTE

When the EUT is manipulated through three different orientations, the scan height upper range for the measurement antenna is limited to 2.5 m or 0.5 m above the top of the EUT.

7.9.4 Test Data


7.9.4.1 Band-edge Compliance

Test Date : March 28, 2016

Temp.: 22°C, Humi: 38%

Mode of EUT : 2TX: Main+Sub (1ch: 2412 MHz, (IEEE 802.11b))


Antenna Polarization : Horizontal

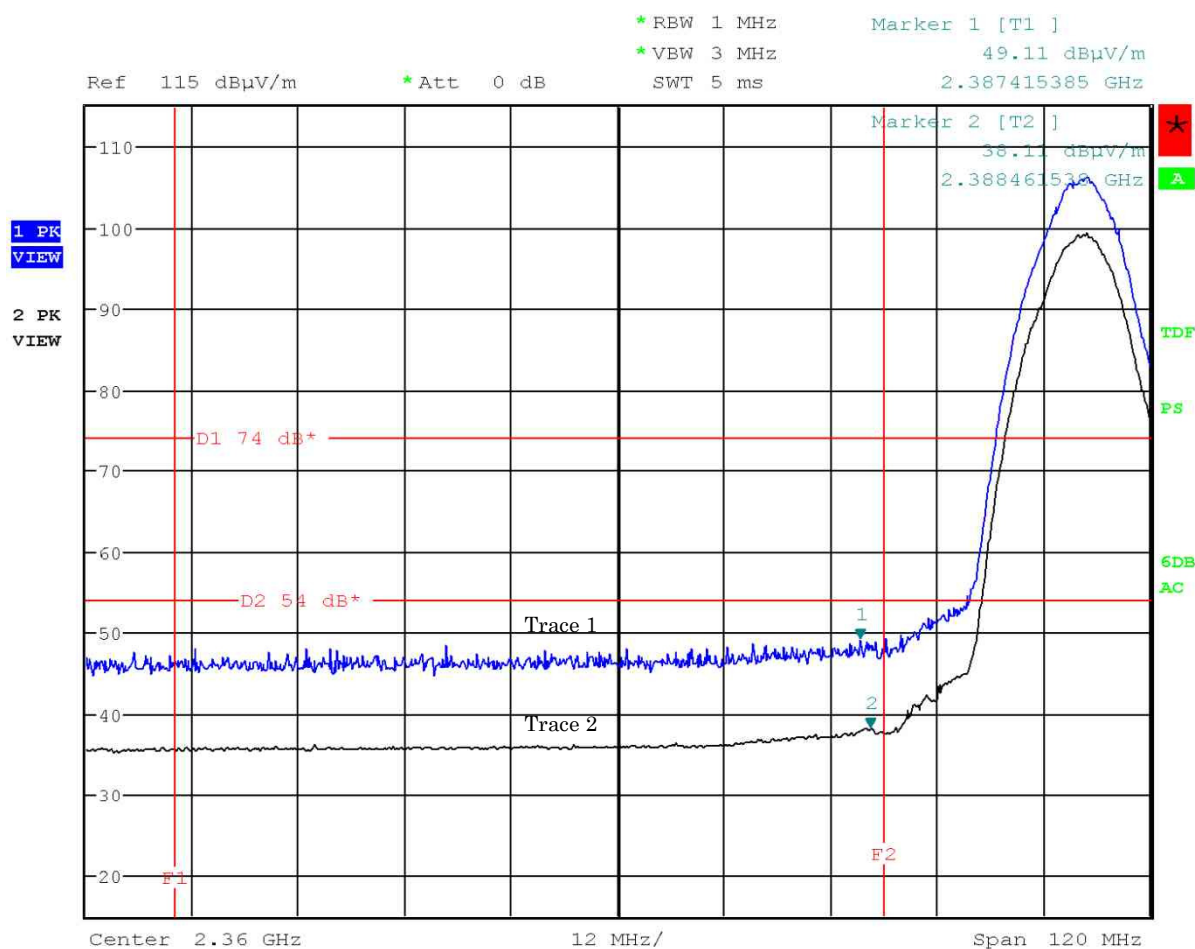

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : 2TX: Main+Sub (1ch: 2412 MHz, (IEEE 802.11b))


Antenna Polarization : Vertical

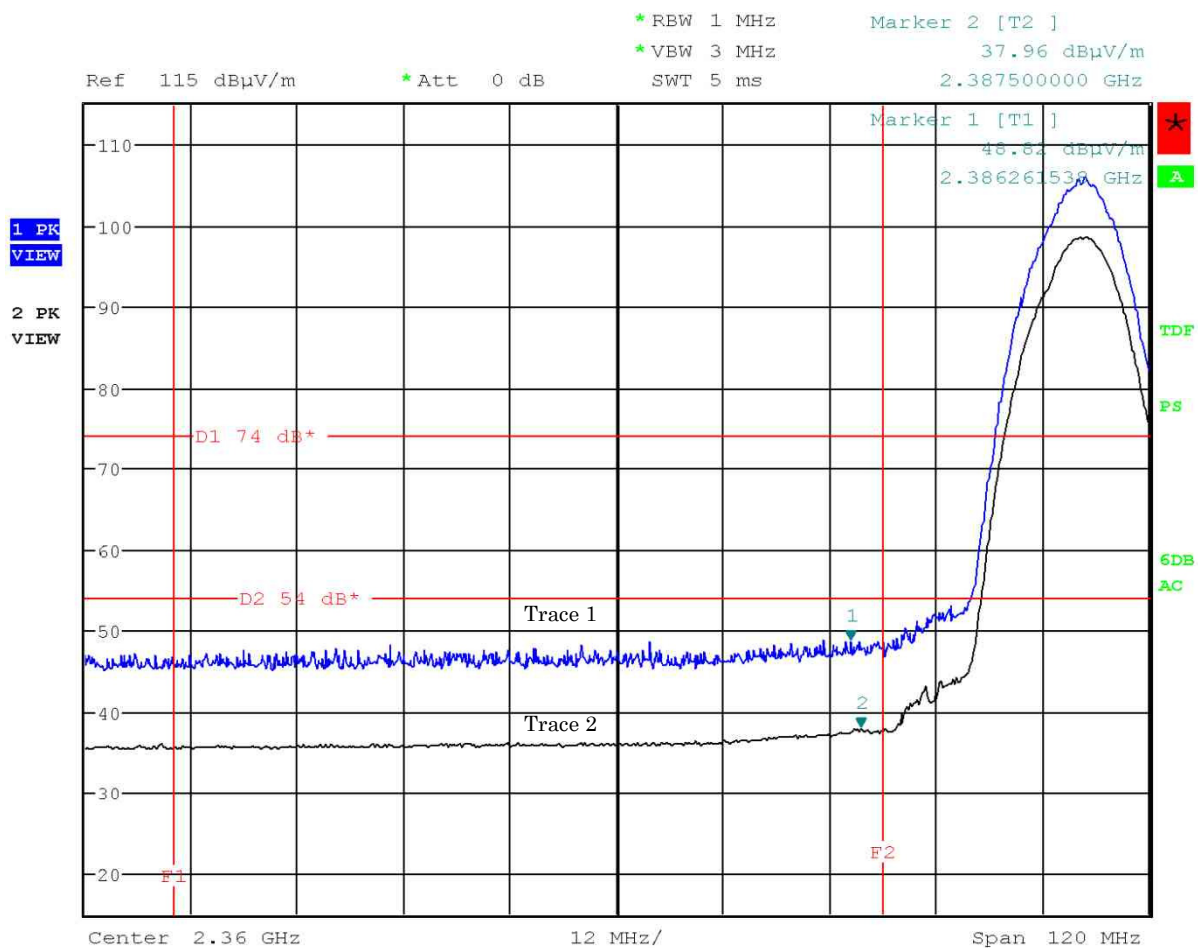

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : 2TX: Main+Sub (11ch: 2462 MHz, (IEEE 802.11b))


Antenna Polarization : Horizontal

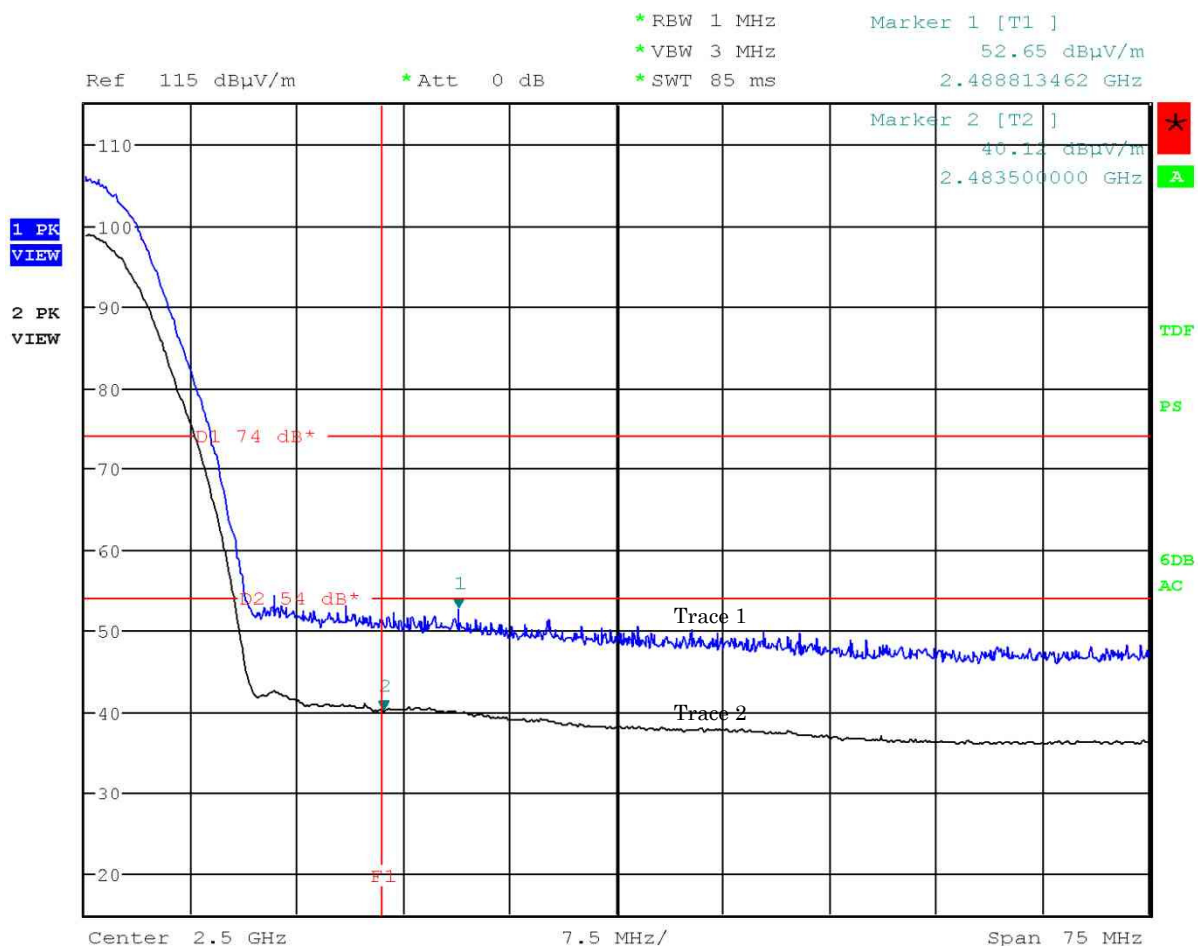

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : 2TX: Main+Sub (11ch: 2462 MHz, (IEEE 802.11b))


Antenna Polarization : Vertical

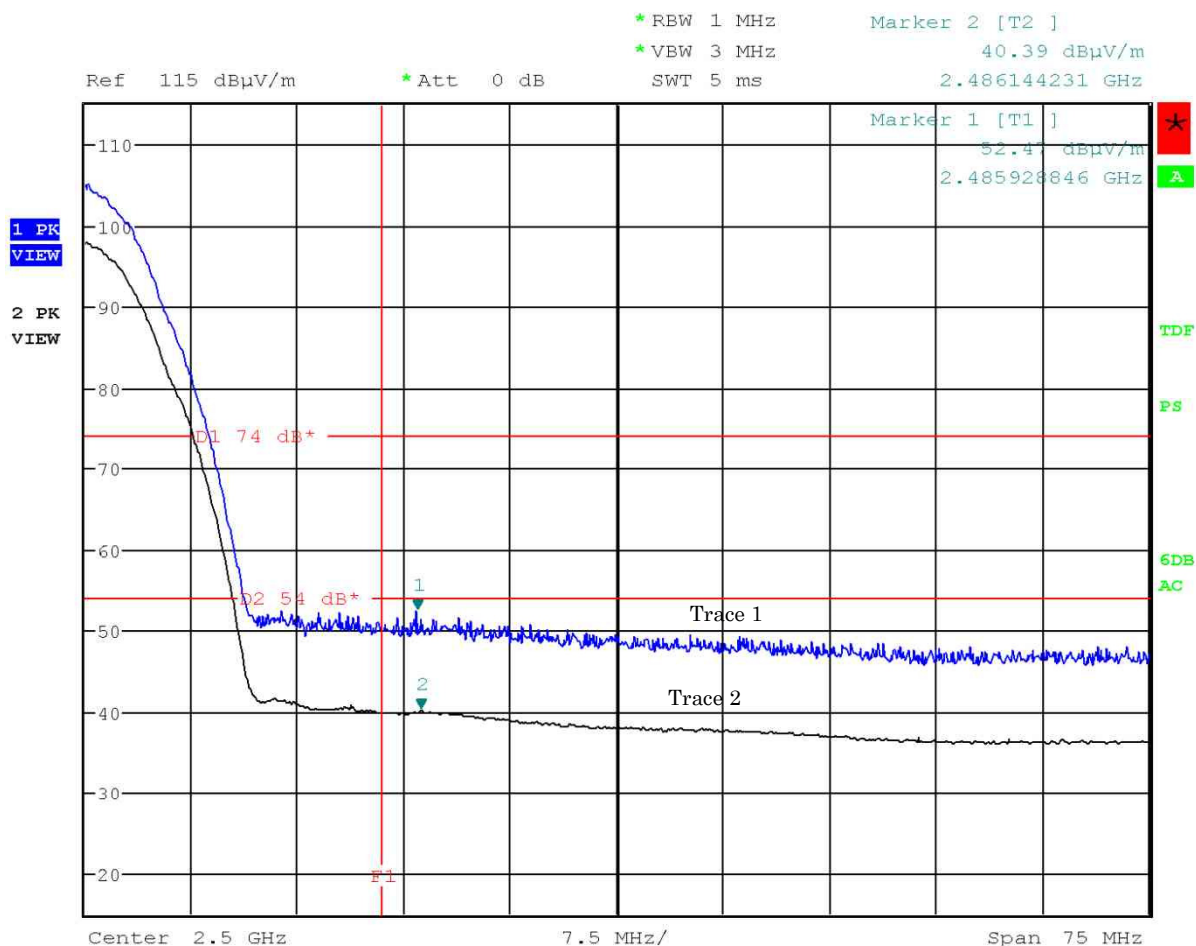

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : 2TX: Main+Sub (1ch: 2412 MHz, (IEEE 802.11g))


Antenna Polarization : Horizontal

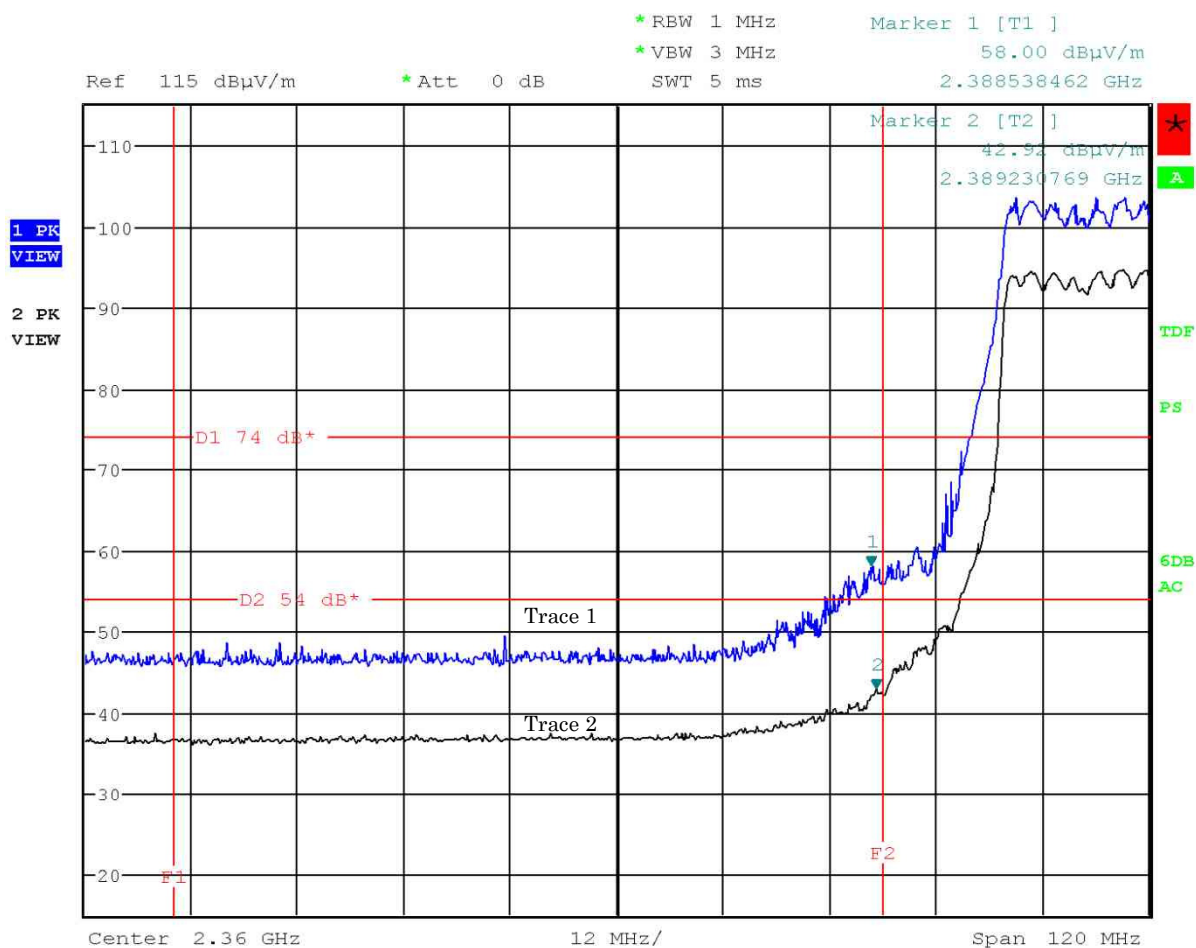

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : 2TX: Main+Sub (1ch: 2412 MHz, (IEEE 802.11g))


Antenna Polarization : Vertical

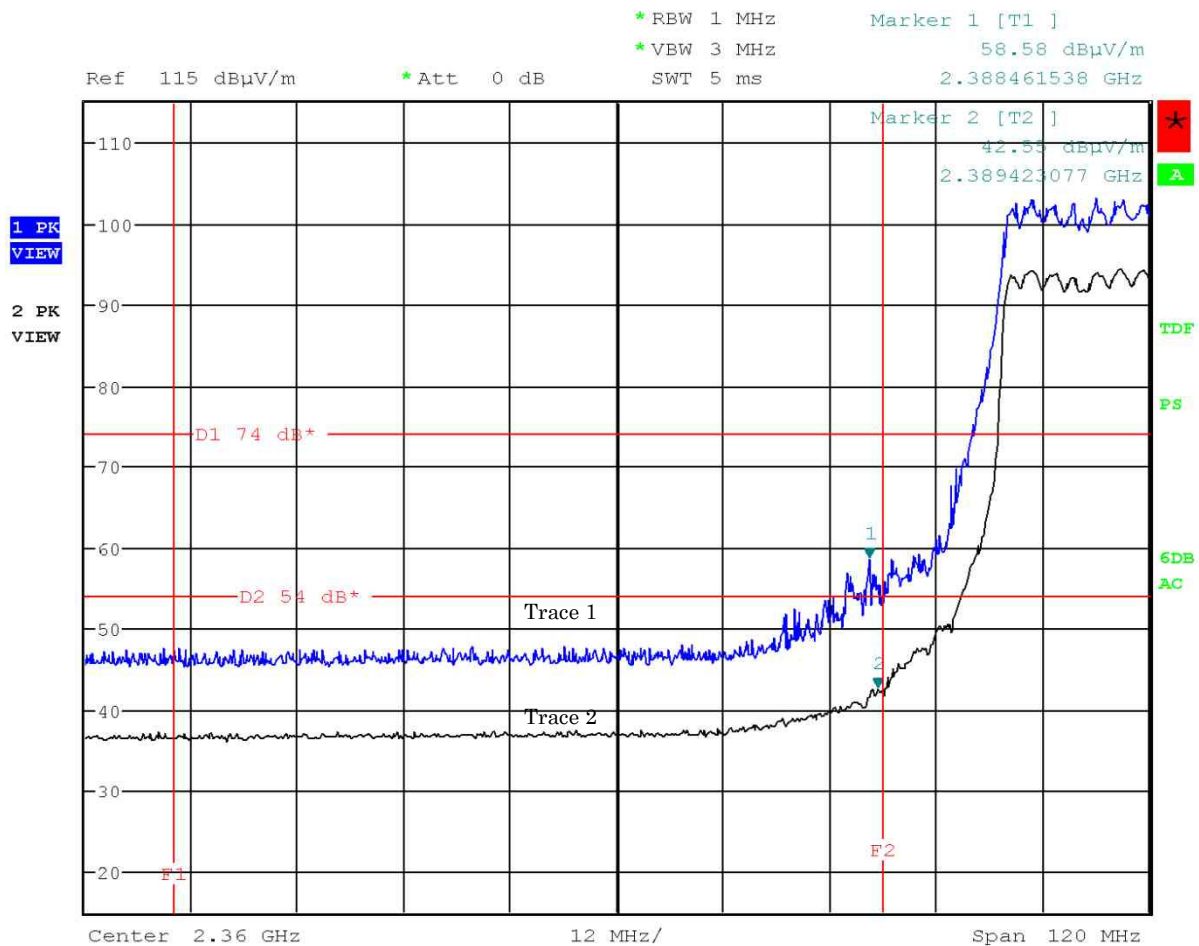

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : 2TX: Main+Sub (11ch: 2462 MHz, (IEEE 802.11g))


Antenna Polarization : Horizontal

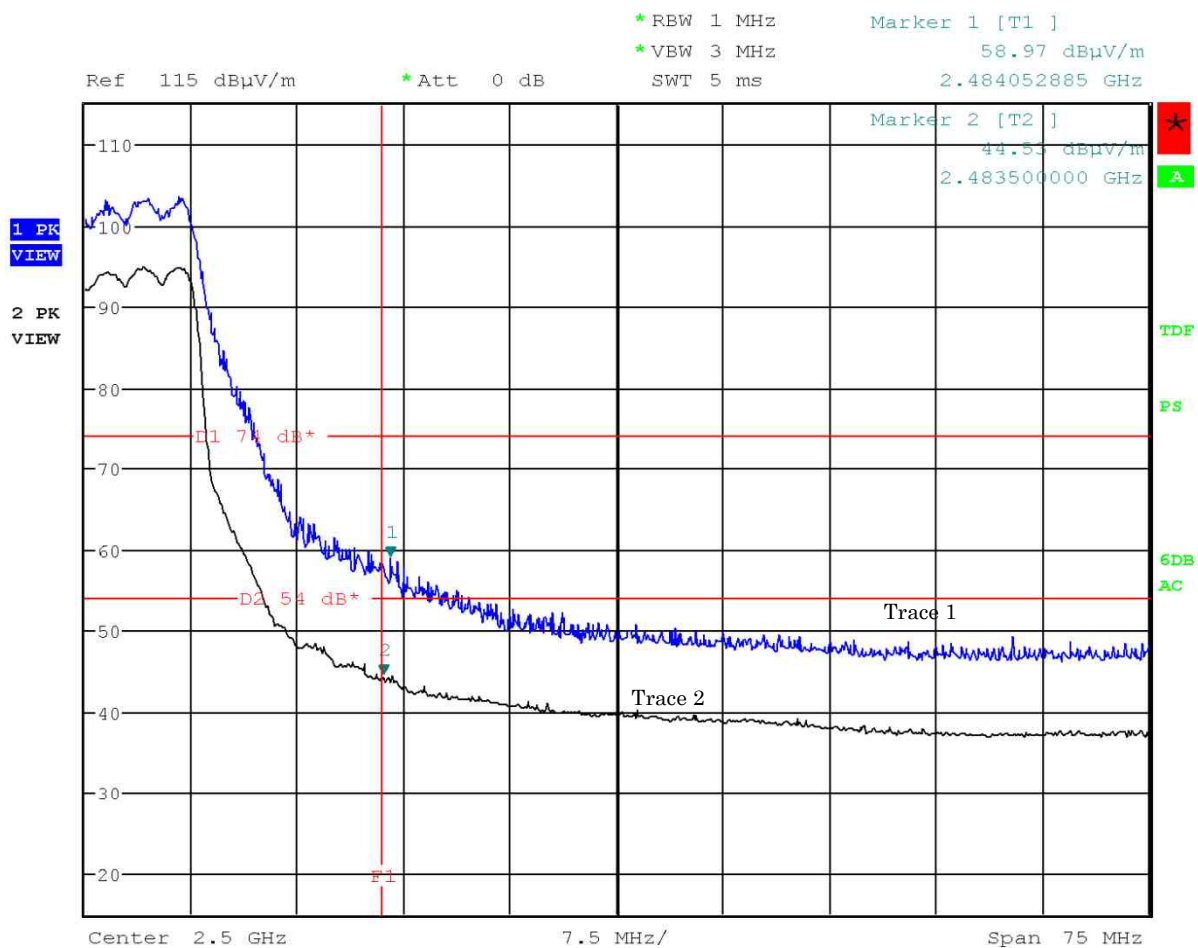

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : 2TX: Main+Sub (11ch: 2462 MHz, (IEEE 802.11g))


Antenna Polarization : Vertical

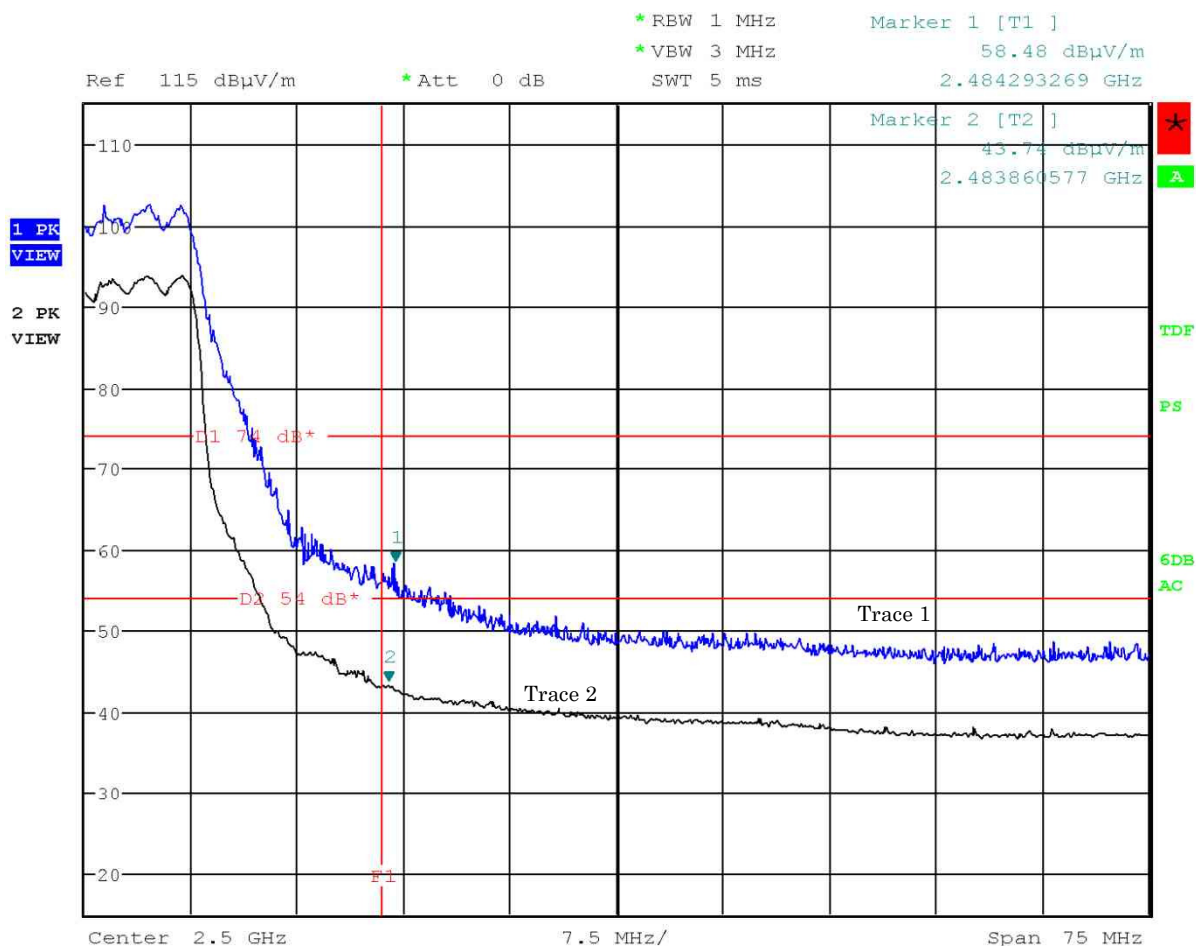

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : 2TX: Main+Sub (1ch: 2412 MHz, (IEEE 802.11n))


Antenna Polarization : Horizontal

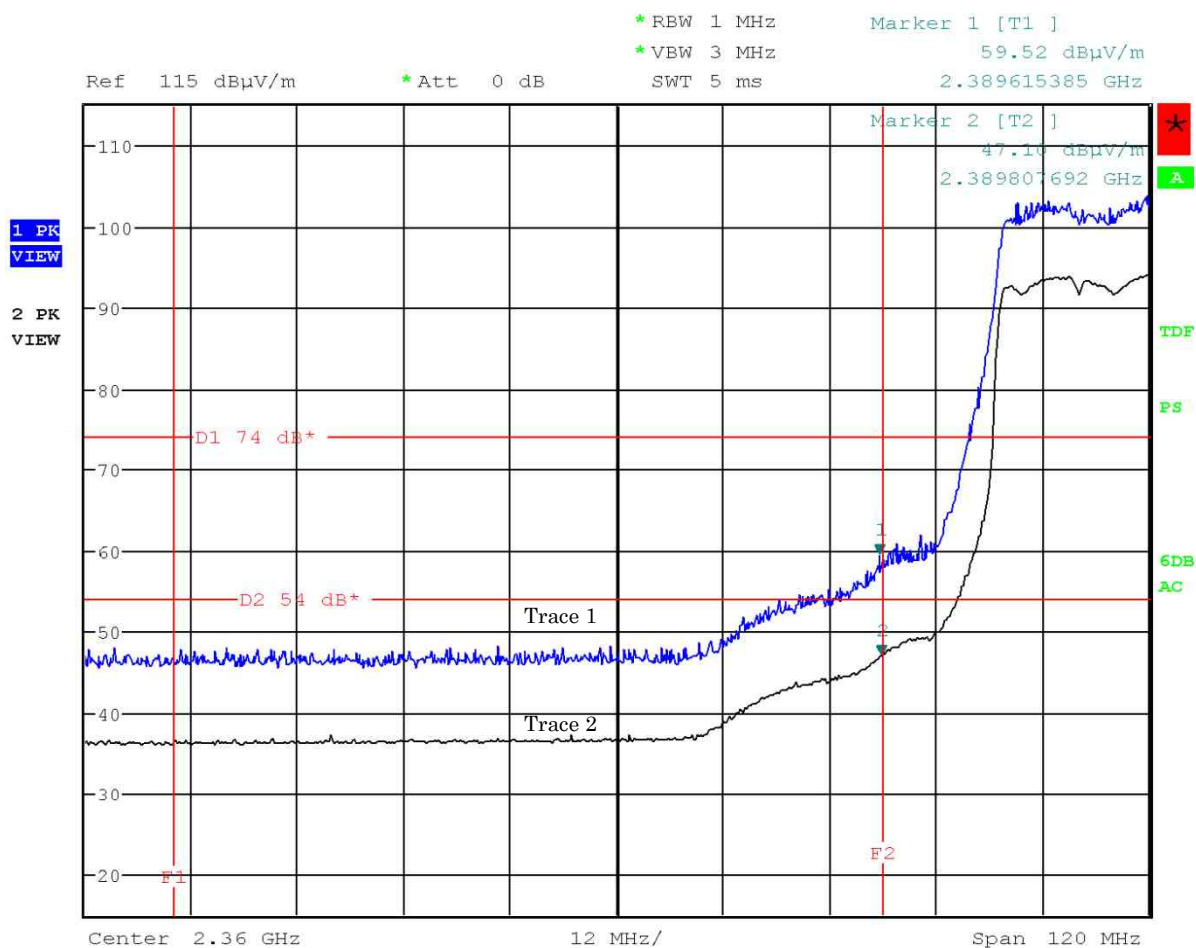

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : 2TX: Main+Sub (1ch: 2412 MHz, (IEEE 802.11n))


Antenna Polarization : Vertical

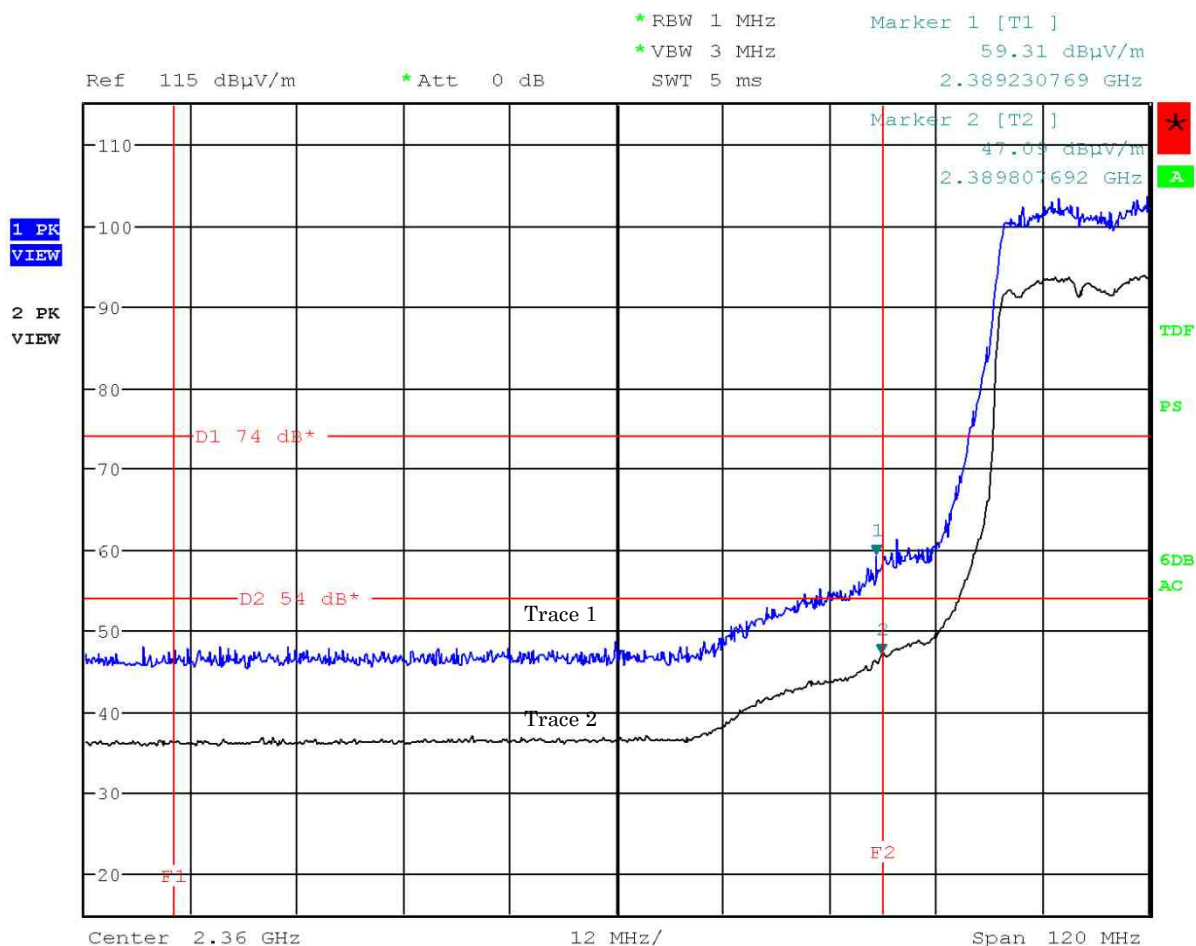

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : 2TX: Main+Sub (11ch: 2462 MHz, (IEEE 802.11n))


Antenna Polarization : Horizontal

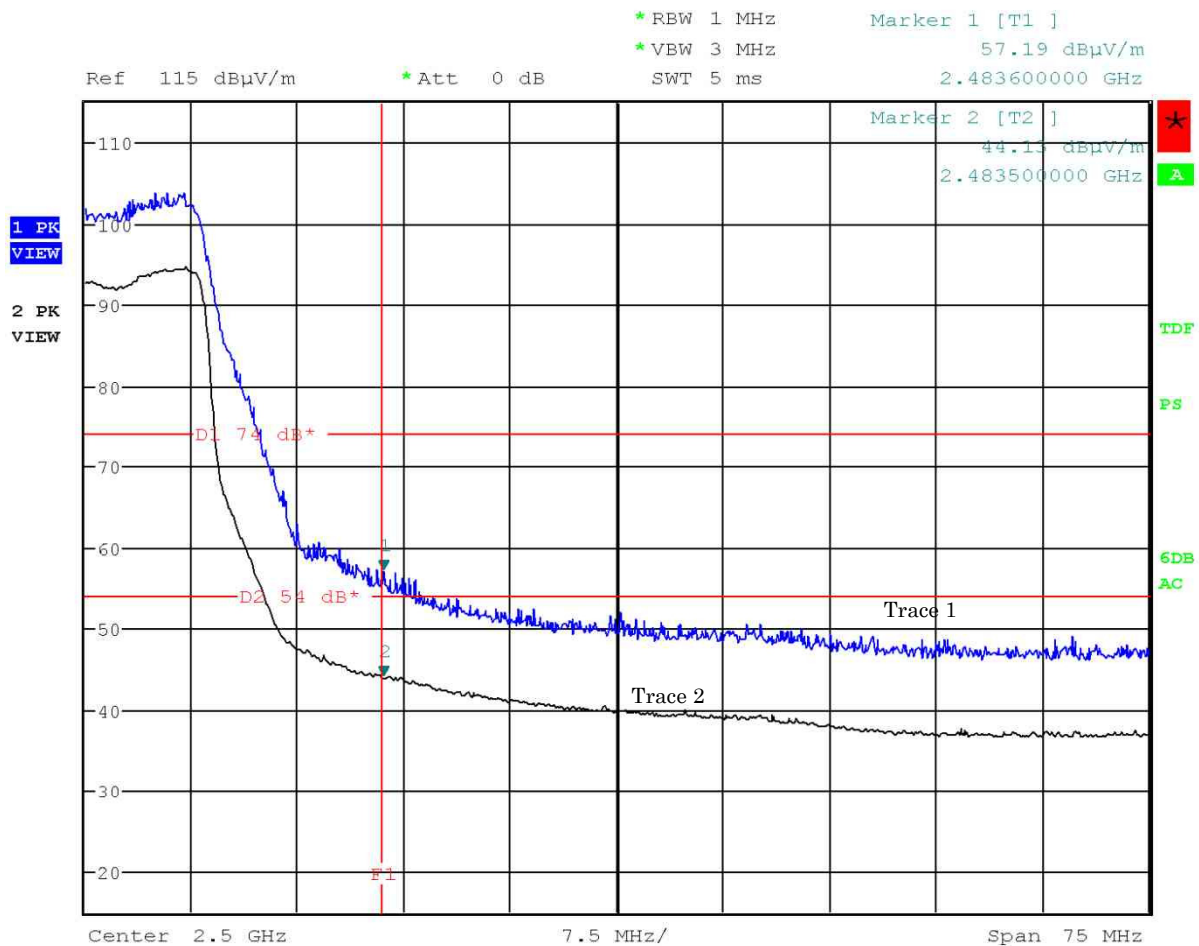

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : 2TX: Main+Sub (11ch: 2462 MHz, (IEEE 802.11n))

Antenna Polarization : Vertical

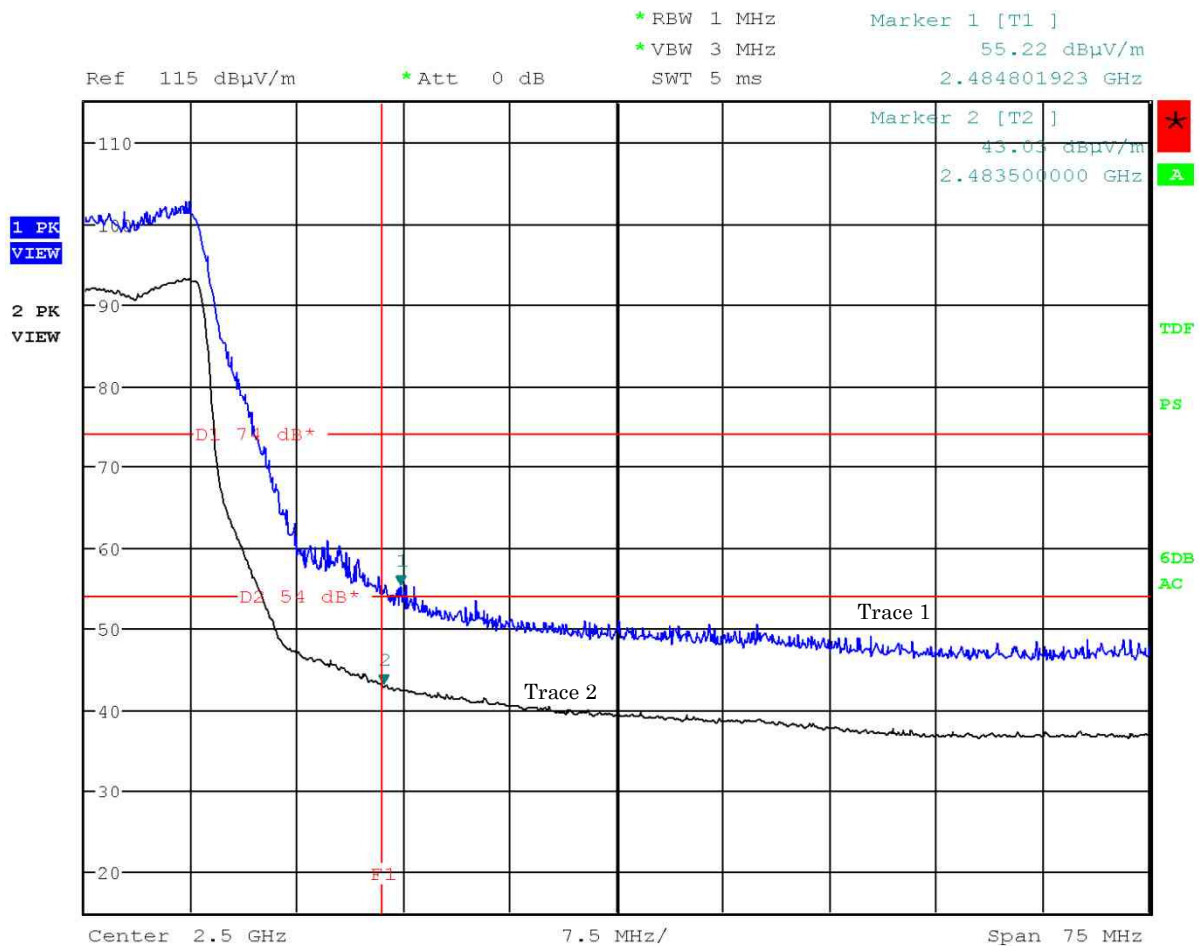


Note: The trace 1 is Peak . The trace 2 is Average.

Test Date : March 24, 2016

Temp.: 20°C, Humi: 36%

Mode of EUT : Bluetooth Low Energy, Hopping off (0ch: 2402 MHz)


Antenna Polarization : Horizontal

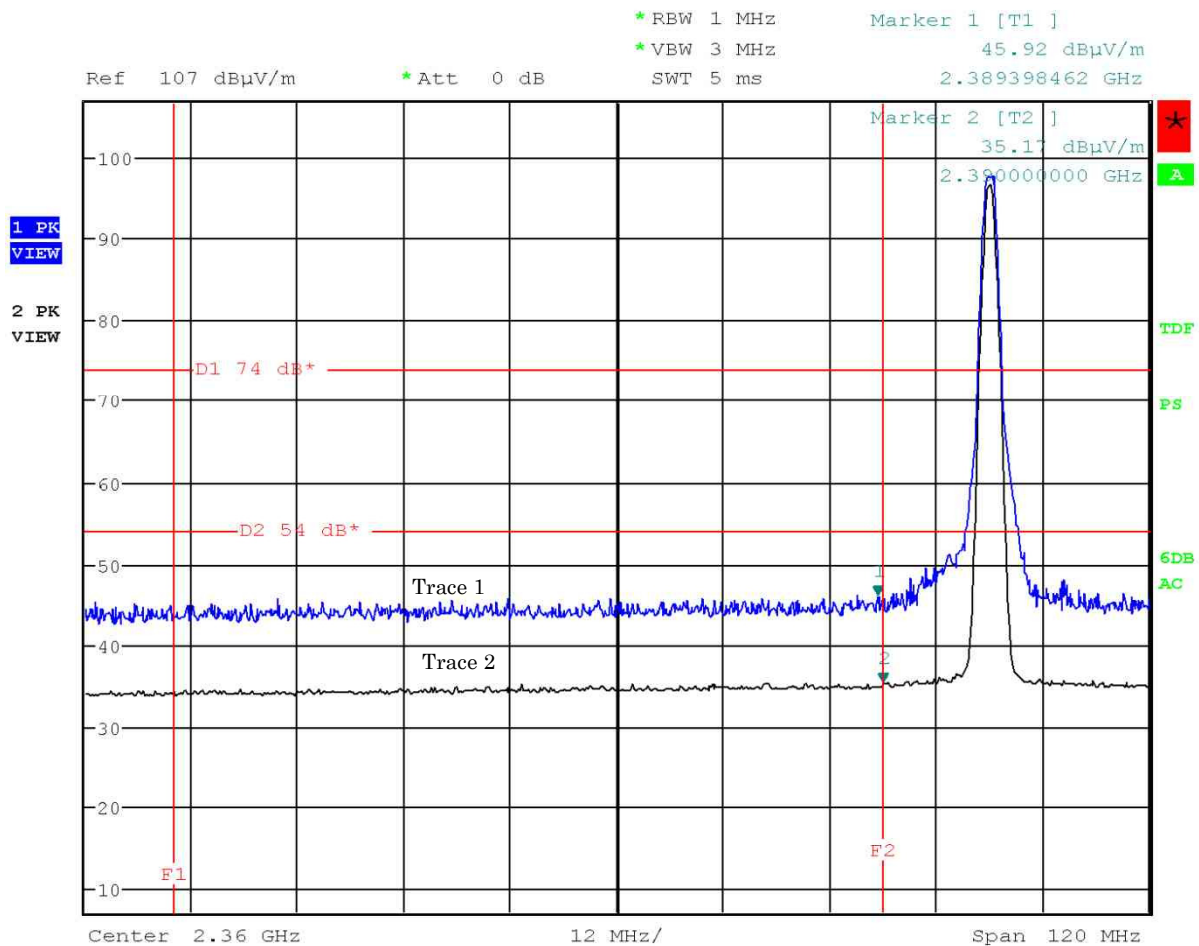

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : Bluetooth Low Energy, Hopping off (0ch: 2402 MHz)


Antenna Polarization : Vertical

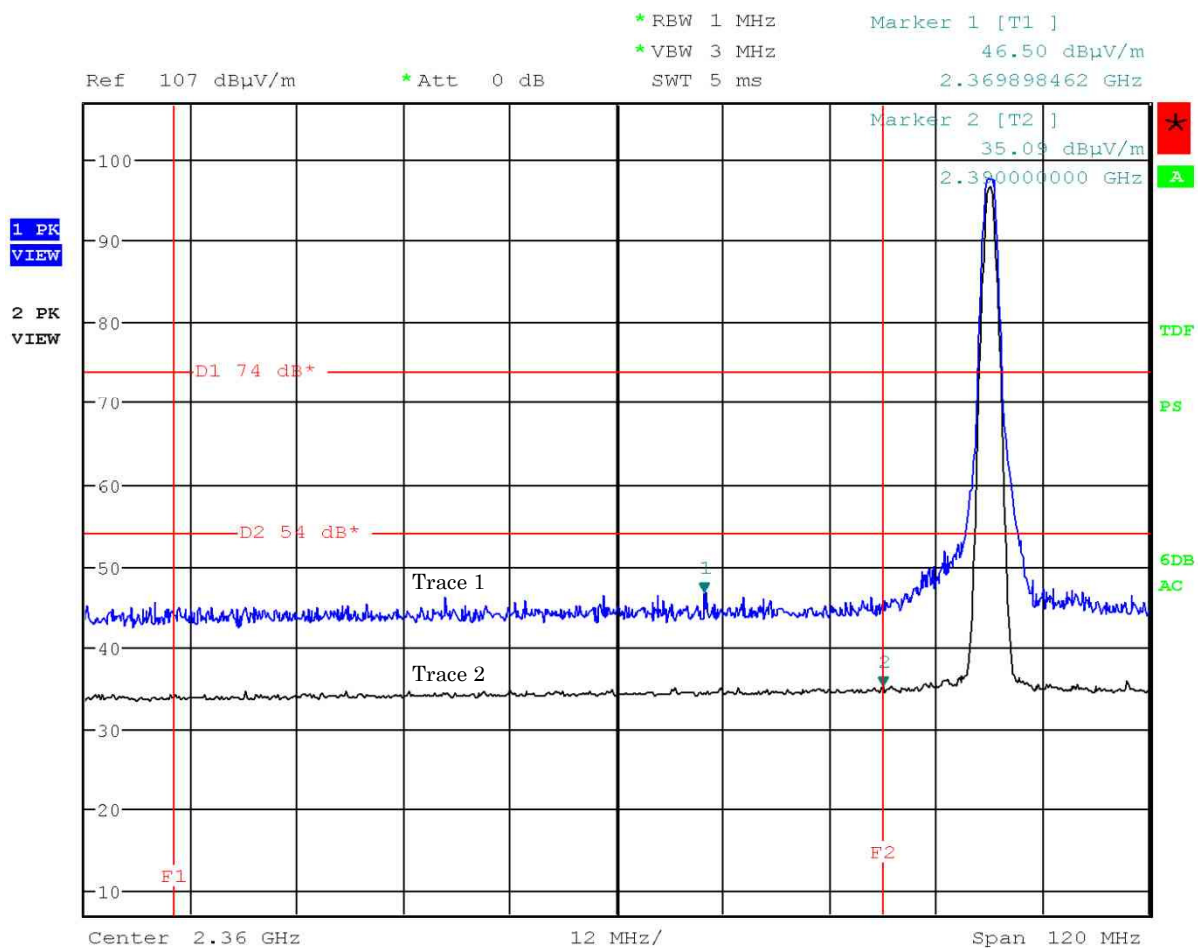

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : Bluetooth Low Energy, Hopping off (39ch: 2480 MHz)


Antenna Polarization : Horizontal

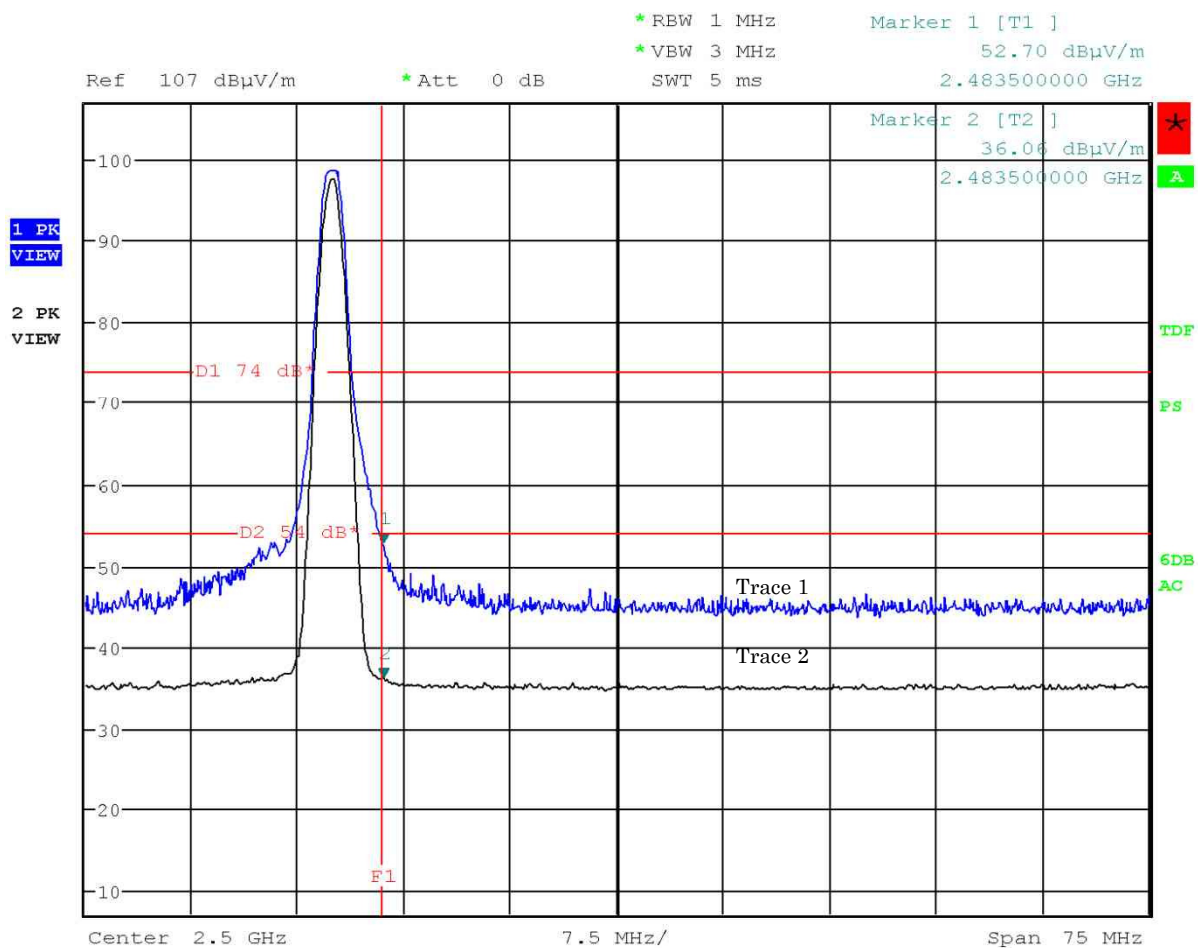

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : Bluetooth Low Energy, Hopping off (39ch: 2480 MHz)

Antenna Polarization : Vertical

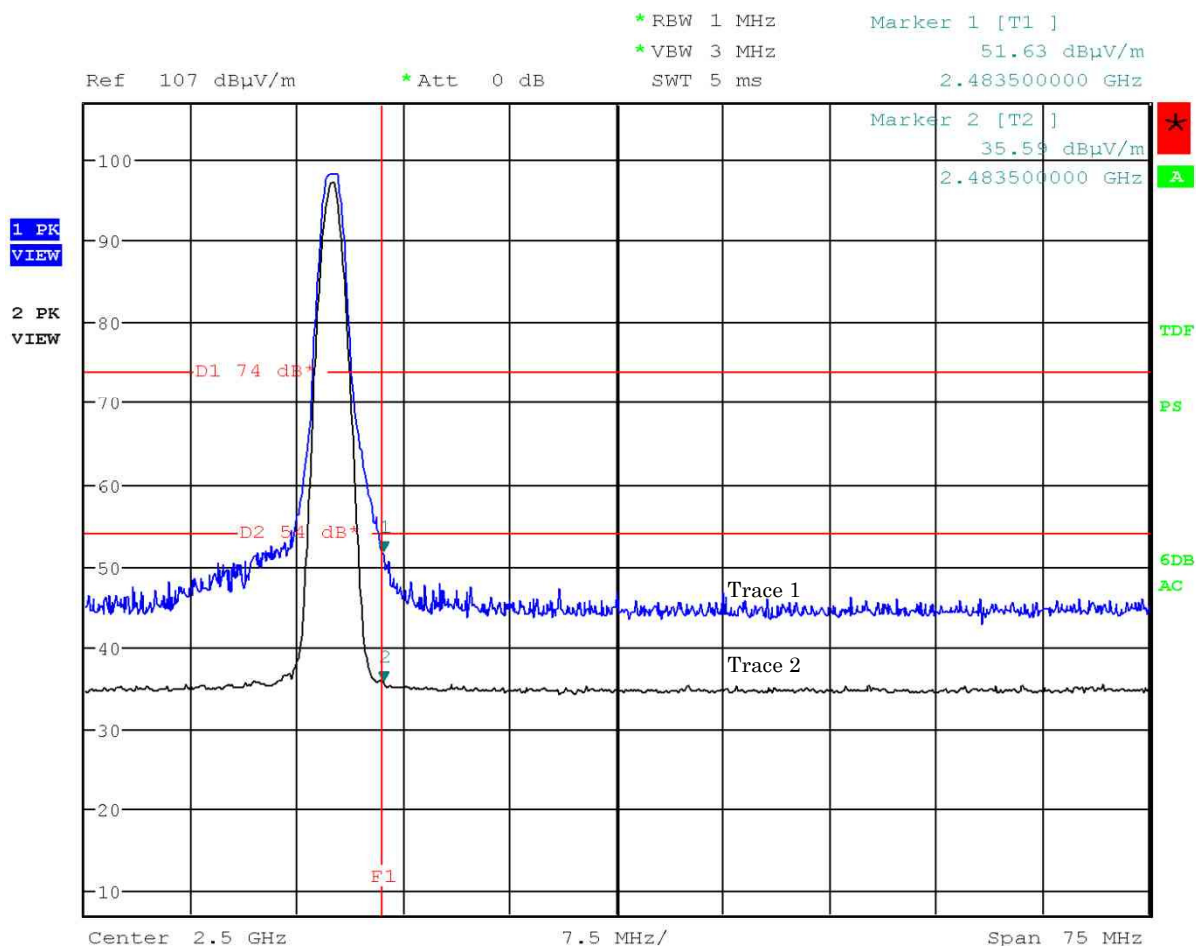

Note: The trace 1 is Peak . The trace 2 is Average.

7.9.4.2 Other Spurious Emission (9kHz – 30MHz)

Test Date : March 19, 2016

Temp.: 20°C, Humi: 55%

Mode of EUT : WLAN/Bluetooth LE

Results : No spurious emissions in the range 20dB below the limit.

7.9.4.3 Other Spurious Emission (30MHz – 1000MHz)


Mode of EUT : (WLAN) All modes have been investigated and the worst case mode for channel (06ch: 2437MHz / IEEE802.11b, IEEE802.11g and IEEE802.11n) has been listed.

Test Date: March 19, 2016

Temp.: 20 °C, Humi: 55 %

Antenna pole : Horizontal

Frequency [MHz]	Antenna Factor [dB(1/m)]	Corr. Factor [dB]	Meter Readings [dB(μV)]	Limits [dB(μV/m)]	Results [dB(μV/m)]	Margin [dB]	Remarks
134.40	14.0	-26.3	32.9	43.5	20.6	+22.9	-
153.60	14.8	-26.2	32.0	43.5	20.6	+22.9	-
172.80	15.6	-26.0	31.6	43.5	21.2	+22.3	-

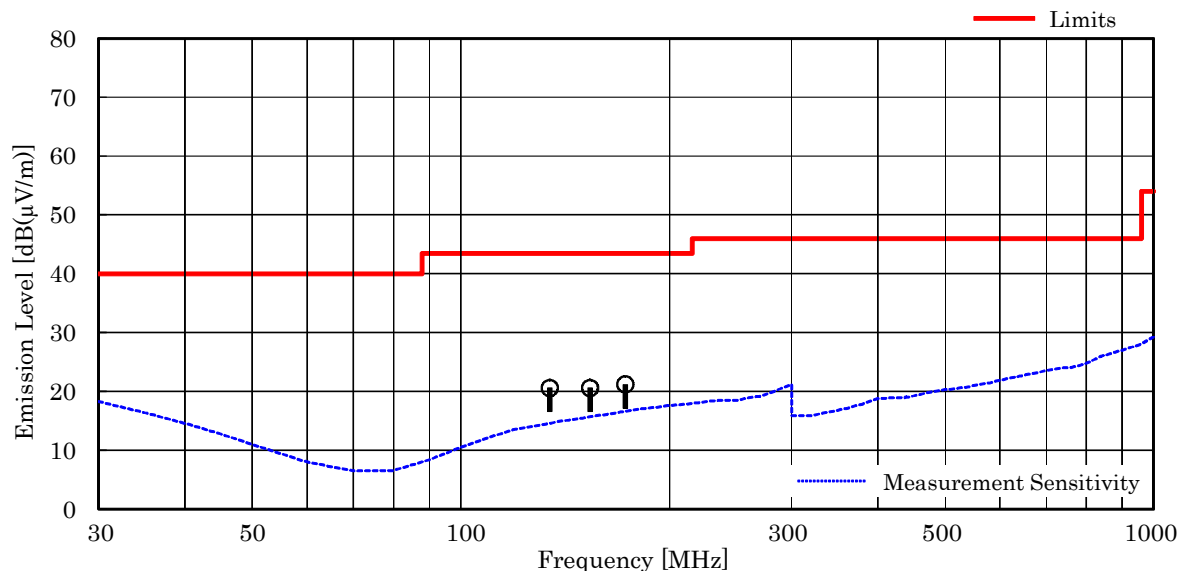

NOTES


1. Test Distance : 3 m
2. The spectrum was checked from 30 MHz to 1000 MHz.
3. The correction factor is composed of cable loss, pad attenuation and/or amplifier gain.
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. Calculated result at 172.80 MHz, as the worst point shown on underline:
Antenna Factor + Coorection Factor + Meter Reading = 15.6 + (-26.0) + 31.6 = 21.2 dB(μV/m)
Antenna Height : 176 cm, Turntable Angle : 232 °
7. Test receiver setting(s) : CISPR QP 120 kHz [QP : Quasi-Peak]

Test Date: March 19, 2016

Temp.: 20 °C, Humi: 55 %

Antenna pole : Vertical

Frequency [MHz]	Antenna Factor [dB(1/m)]	Corr. Factor [dB]	Meter Readings [dB(μV)]	Limits [dB(μV/m)]	Results [dB(μV/m)]	Margin [dB]	Remarks
30.30	18.7	-27.5	32.4	40.0	23.6	+16.4	-
32.13	17.9	-27.5	33.7	40.0	24.1	+15.9	-
96.00	9.3	-26.7	34.3	43.5	16.9	+26.6	-
134.40	14.0	-26.3	30.8	43.5	18.5	+25.0	-
153.60	14.8	-26.2	28.1	43.5	16.7	+26.8	-
172.80	15.6	-26.0	29.5	43.5	19.1	+24.4	-

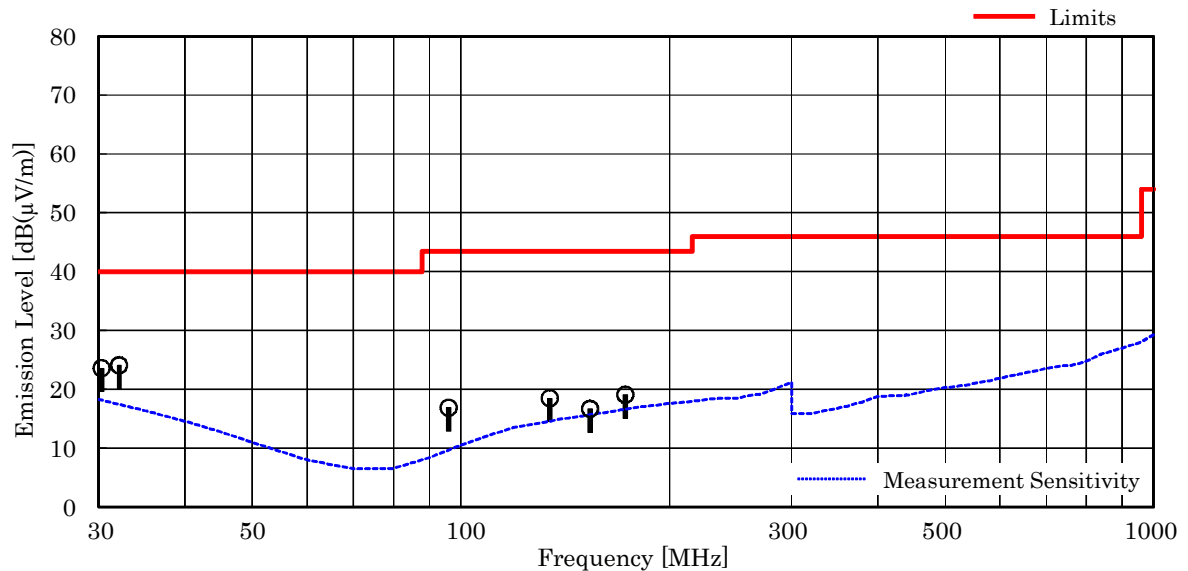

NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 30 MHz to 1000 MHz.
3. The correction factor is composed of cable loss, pad attenuation and/or amplifier gain.
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. Calculated result at 32.13 MHz, as the worst point shown on underline:
 Antenna Factor + Coorection Factor + Meter Reading = 17.9 + (-27.5) + 33.7 = 24.1 dB(μV/m)
 Antenna Height : 100 cm, Turntable Angle : 335 °
7. Test receiver setting(s) : CISPR QP 120 kHz [QP: Quasi-Peak]


Mode of EUT : Bluetooth Low Energy

Test Date: March 19, 2016

Temp.: 20 °C, Humi: 55 %

Antenna pole : Horizontal

Frequency [MHz]	Antenna Factor [dB(1/m)]	Corr. Factor [dB]	Meter Readings [dB(μV)]	Limits [dB(μV/m)]	Results [dB(μV/m)]	Margin [dB]	Remarks
115.20	12.4	-26.5	30.1	43.5	16.0	+27.5	-
134.40	14.0	-26.3	33.4	43.5	21.1	+22.4	-
153.60	14.8	-26.2	34.3	43.5	22.9	+20.6	-
172.80	15.6	-26.0	32.9	43.5	22.5	+21.0	-

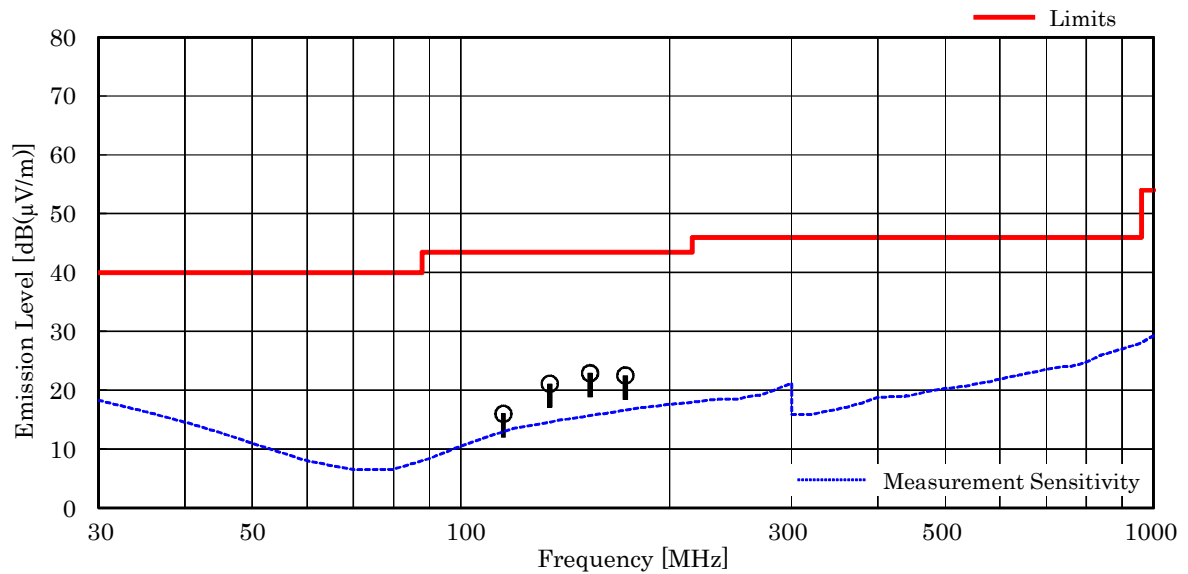

NOTES


1. Test Distance : 3 m
2. The spectrum was checked from 30 MHz to 1000 MHz.
3. The correction factor is composed of cable loss, pad attenuation and/or amplifier gain.
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. Calculated result at 153.60 MHz, as the worst point shown on underline:
Antenna Factor + Coorection Factor + Meter Reading = 14.8 + (-26.2) + 34.3 = 22.9 dB(μV/m)
Antenna Height : 202 cm, Turntable Angle : 282 °
7. Test receiver setting(s) : CISPR QP 120 kHz [QP : Quasi-Peak]

Test Date: March 19, 2016

Temp.: 20 °C, Humi: 55 %

Antenna pole : Vertical

Frequency [MHz]	Antenna Factor [dB(1/m)]	Corr. Factor [dB]	Meter Readings [dB(μV)]	Limits [dB(μV/m)]	Results [dB(μV/m)]	Margin [dB]	Remarks
30.36	18.7	-27.5	30.4	40.0	21.6	+18.4	-
32.34	17.8	-27.5	30.5	40.0	20.8	+19.2	-
115.20	12.4	-26.5	33.3	43.5	19.2	+24.3	-
134.40	14.0	-26.3	27.3	43.5	15.0	+28.5	-
153.60	14.8	-26.2	30.0	43.5	18.6	+24.9	-
172.80	15.6	-26.0	< 27.0	43.5	< 16.6	> +26.9	-

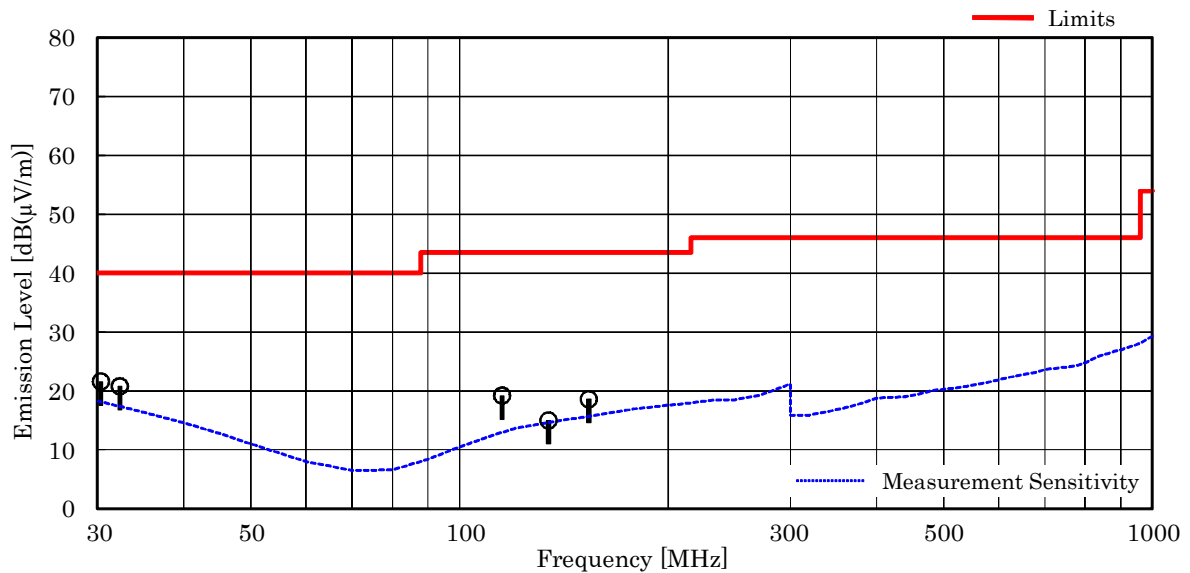

NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 30 MHz to 1000 MHz.
3. The correction factor is composed of cable loss, pad attenuation and/or amplifier gain.
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. Calculated result at 30.36 MHz, as the worst point shown on underline:

$$\text{Antenna Factor} + \text{Coorection Factor} + \text{Meter Reading} = 18.7 + (-27.5) + 30.4 = 21.6 \text{ dB}(\mu\text{V/m})$$
 Antenna Height : 100 cm, Turntable Angle : 327 °
7. Test receiver setting(s) : CISPR QP 120 kHz [QP : Quasi-Peak]

7.9.4.4 Other Spurious Emission (Above 1000MHz)

Mode of EUT : IEEE802.11b [2TX (Main+Sub)]

Test Date: March 24, 2016

Temp.: 20 °C, Humi: 36 %

Frequency	Antenna Factor	Corr. Factor	Meter Readings [dB(μV)]				Limits		Results		Margin	Remarks
			Horizontal		Vertical		[dB(μV/m)]		[dB(μV/m)]			
[MHz]	[dB(1/m)]	[dB]	PK	AVE	PK	AVE	PK	AVE	PK	AVE	[dB]	
Test condition : Tx Low Ch												
4824.0	27.3	-15.9	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.4	< 39.4	> +14.6	
12060.0	33.6	-25.7	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 45.9	< 35.9	> +18.1	
14472.0	37.0	-26.5	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 48.5	< 38.5	> +15.5	
19296.0	40.5	-42.7	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.8	< 37.8	> +16.2	
Test condition : TX Middle Ch												
4874.0	27.3	-15.8	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.5	< 39.5	> +14.5	
7311.0	29.9	-16.3	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 51.6	< 41.6	> +12.4	
12185.0	33.5	-25.9	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 45.6	< 35.6	> +18.4	
19496.0	40.5	-42.7	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.8	< 37.8	> +16.2	
Test condition : TX High Ch												
4924.0	27.3	-15.8	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.5	< 39.5	> +14.5	
7386.0	29.8	-16.4	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 51.4	< 41.4	> +12.6	
12310.0	33.4	-26.2	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 45.2	< 35.2	> +18.8	
19696.0	40.5	-42.7	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.8	< 37.8	> +16.2	
22158.0	40.6	-43.1	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.5	< 37.5	> +16.5	

Calculated result at 7311.0 MHz, as the worst point shown on underline:

Antenna Factor	=	29.9 dB(1/m)
Corr. Factor	=	-16.3 dB
+) Meter Reading	=	<28.0 dB(μV)
Result	=	<41.6 dB(μV/m)


Minimum Margin: 54.0 - <41.6 = >12.4 (dB)

NOTES

- Test Distance : 3 m
- The spectrum was checked from 1 GHz to 25 GHz (10th harmonic of the highest fundamental frequency).
- The correction factor is shown as follows:
 - Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
 - Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)
 - Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (over 18 GHz)
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- PK : Peak / AVE : Average

Mode of EUT : IEEE802.11g [2TX (Main+Sub)]

TX Low/Middle/High ch (Horizontal/Vertical)

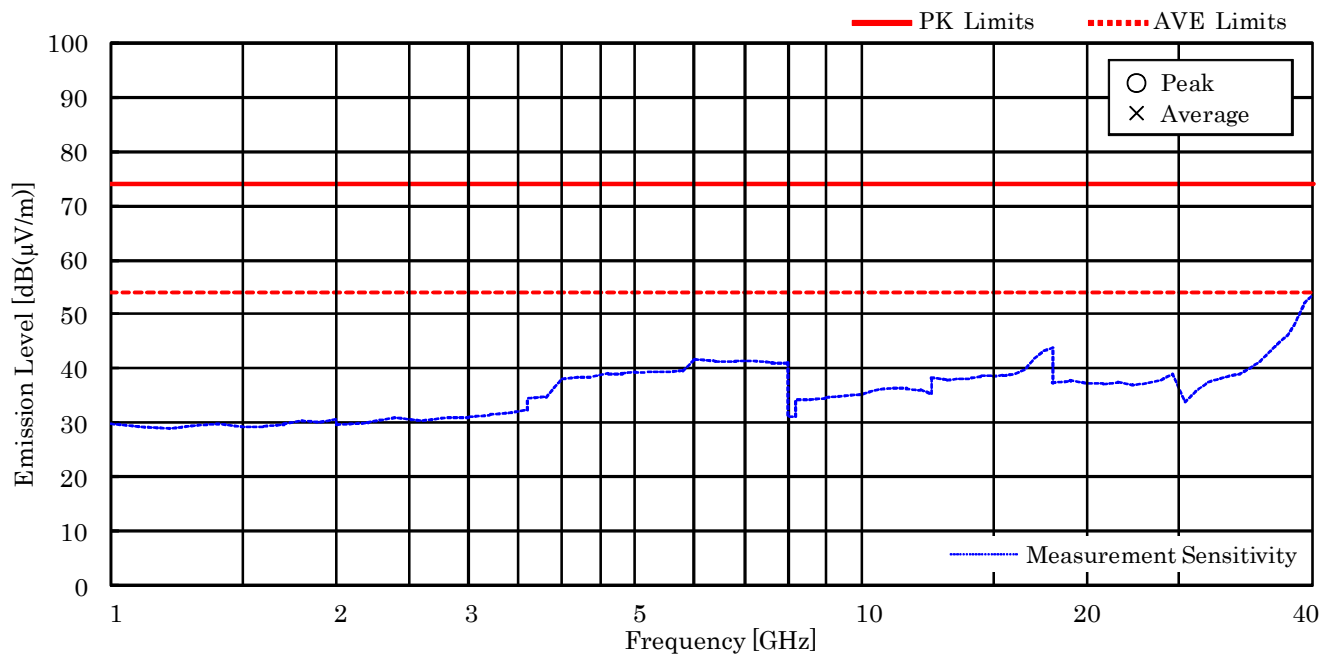

Mode of EUT : IEEE802.11g [2TX (Main+Sub)]

Test Date: March 24, 2016

Temp.: 20 °C, Humi: 36 %

Frequency	Antenna Factor	Corr. Factor	Meter Readings [dB(μV)]				Limits		Results		Margin [dB]	Remarks
			Horizontal		Vertical		[dB(μV/m)]		[dB(μV/m)]			
[MHz]	[dB(1/m)]	[dB]	PK	AVE	PK	AVE	PK	AVE	PK	AVE		
Test condition : Tx Low Ch												
4824.0	27.3	-15.9	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.4	< 39.4	> +14.6	
12060.0	33.6	-25.7	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 45.9	< 35.9	> +18.1	
14472.0	37.0	-26.5	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 48.5	< 38.5	> +15.5	
19296.0	40.5	-42.7	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.8	< 37.8	> +16.2	
Test condition : TX Middle Ch												
4874.0	27.3	-15.8	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.5	< 39.5	> +14.5	
7311.0	29.9	-16.3	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 51.6	< 41.6	> +12.4	
12185.0	33.5	-25.9	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 45.6	< 35.6	> +18.4	
19496.0	40.5	-42.7	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.8	< 37.8	> +16.2	
Test condition : TX High Ch												
4924.0	27.3	-15.8	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.5	< 39.5	> +14.5	
7386.0	29.8	-16.4	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 51.4	< 41.4	> +12.6	
12310.0	33.4	-26.2	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 45.2	< 35.2	> +18.8	
19696.0	40.5	-42.7	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.8	< 37.8	> +16.2	
22158.0	40.6	-43.1	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.5	< 37.5	> +16.5	

Calculated result at 7311.0 MHz, as the worst point shown on underline:

Antenna Factor	=	29.9 dB(1/m)
Corr. Factor	=	-16.3 dB
+) Meter Reading	=	<28.0 dB(μV)
Result	=	<41.6 dB(μV/m)


Minimum Margin: 54.0 - <41.6 = >12.4 (dB)

NOTES

- Test Distance : 3 m
- The spectrum was checked from 1 GHz to 25 GHz (10th harmonic of the highest fundamental frequency).
- The correction factor is shown as follows:
 - Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
 - Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)
 - Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (over 18 GHz)
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- PK : Peak / AVE : Average

Mode of EUT : IEEE802.11g [2TX (Main+Sub)]

TX Low/Middle/High ch (Horizontal/Vertical)

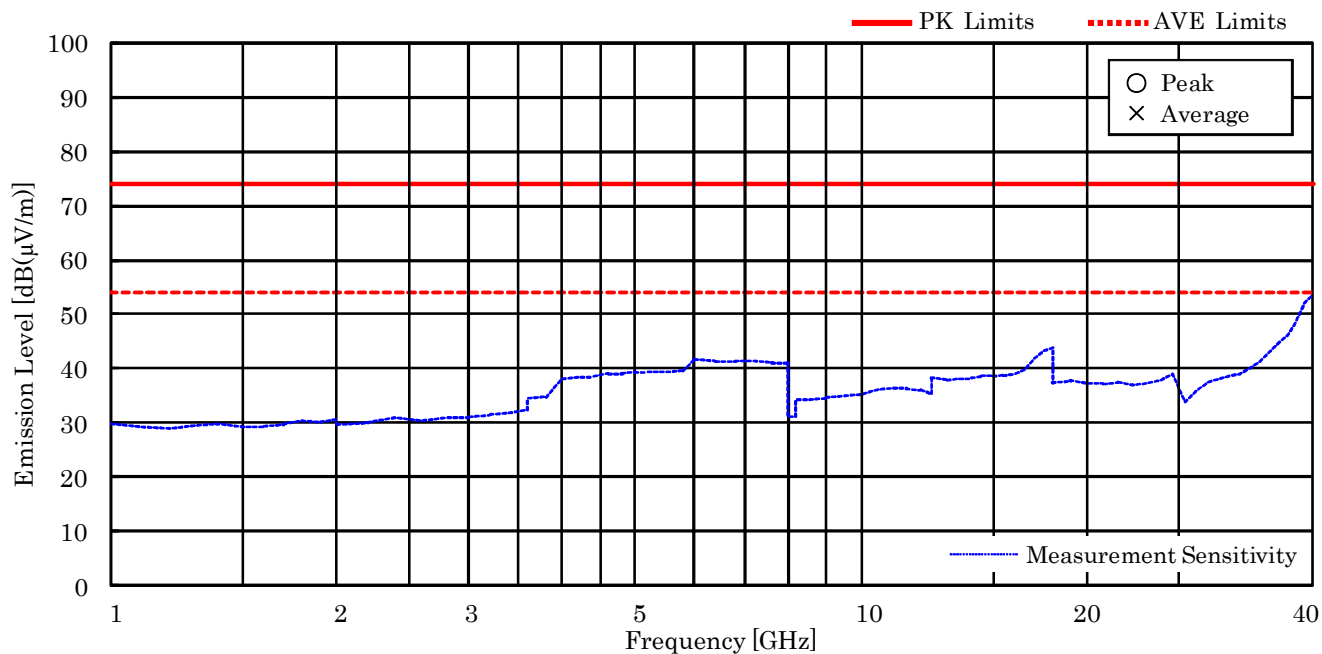

Mode of EUT : IEEE802.11n [2TX (Main+Sub)]

Test Date: March 24, 2016

Temp.: 20 °C, Humi: 36 %

Frequency	Antenna Factor	Corr. Factor	Meter Readings [dB(μV)]				Limits		Results		Margin [dB]	Re marks
			Horizontal		Vertical		[dB(μV/m)]		[dB(μV/m)]			
[MHz]	[dB(1/m)]	[dB]	PK	AVE	PK	AVE	PK	AVE	PK	AVE		
Test condition : Tx Low Ch												
4824.0	27.3	-15.9	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.4	< 39.4	> +14.6	
12060.0	33.6	-25.7	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 45.9	< 35.9	> +18.1	
14472.0	37.0	-26.5	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 48.5	< 38.5	> +15.5	
19296.0	40.5	-42.7	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.8	< 37.8	> +16.2	
Test condition : TX Middle Ch												
4874.0	27.3	-15.8	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.5	< 39.5	> +14.5	
7311.0	29.9	-16.3	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 51.6	< 41.6	> +12.4	
12185.0	33.5	-25.9	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 45.6	< 35.6	> +18.4	
19496.0	40.5	-42.7	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.8	< 37.8	> +16.2	
Test condition : TX High Ch												
4924.0	27.3	-15.8	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.5	< 39.5	> +14.5	
7386.0	29.8	-16.4	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 51.4	< 41.4	> +12.6	
12310.0	33.4	-26.2	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 45.2	< 35.2	> +18.8	
19696.0	40.5	-42.7	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.8	< 37.8	> +16.2	
22158.0	40.6	-43.1	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.5	< 37.5	> +16.5	

Calculated result at 7311.0 MHz, as the worst point shown on underline:

Antenna Factor	=	29.9 dB(1/m)
Corr. Factor	=	-16.3 dB
+) Meter Reading	=	<28.0 dB(μV)
Result	=	<41.6 dB(μV/m)


Minimum Margin: 54.0 - <41.6 = >12.4 (dB)

NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 1 GHz to 25 GHz (10th harmonic of the highest fundamental frequency).
3. The correction factor is shown as follows:
 - Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
 - Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)
 - Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (over 18 GHz)
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. PK : Peak / AVE : Average

Mode of EUT : IEEE802.11n [2TX (Main+Sub)]

TX Low/Middle/High ch (Horizontal/Vertical)

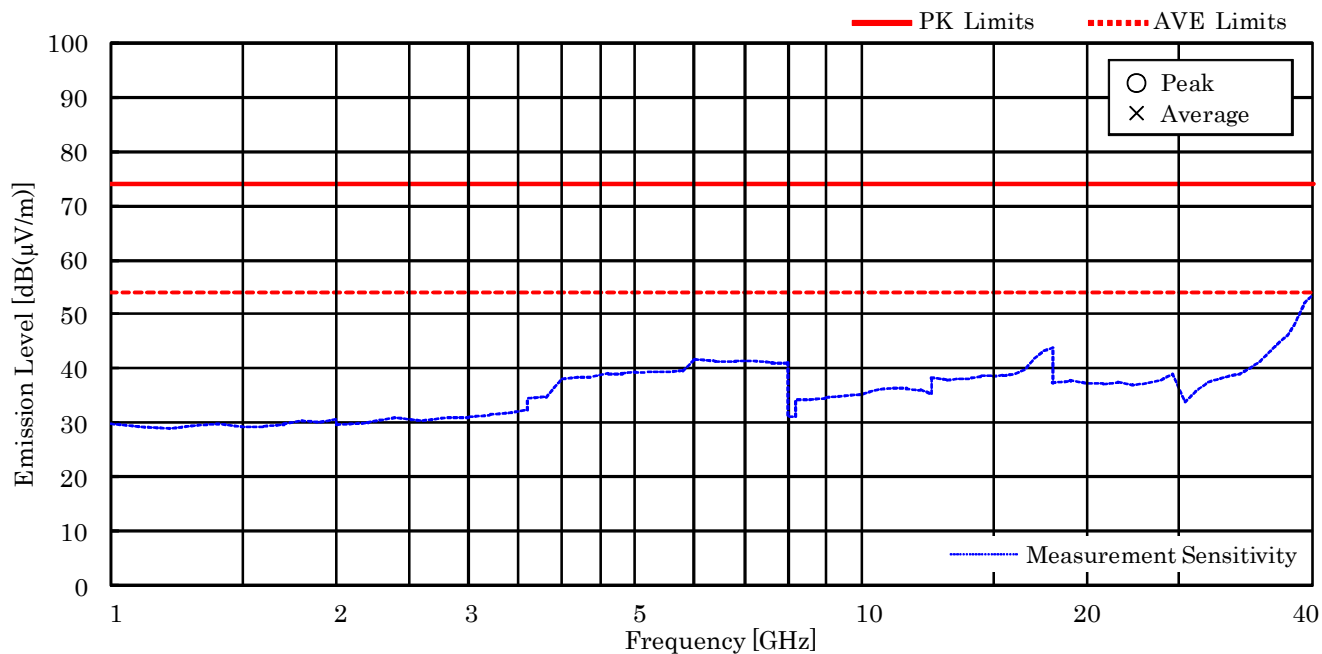

Mode of EUT : Bluetooth Low Energy

Test Date: March 24, 2016

Temp.: 20 °C, Humi: 36 %

Frequency	Antenna Factor	Corr. Factor	Meter Readings [dB(μV)]				Limits		Results		Margin	Remarks
			Horizontal		Vertical		[dB(μV/m)]		[dB(μV/m)]			
	[MHz]	[dB(1/m)]	[dB]	PK	AVE	PK	AVE	PK	AVE	PK	AVE	
Test condition : Tx Low Ch												
4804.0	27.3	-15.9	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.4	< 39.4	> +14.6	
12010.0	33.6	-25.6	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 46.0	< 36.0	> +18.0	
19216.0	40.5	-42.8	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.7	< 37.7	> +16.3	
Test condition : TX Middle Ch												
4880.0	27.3	-15.8	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.5	< 39.5	> +14.5	
7320.0	29.9	-16.3	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 51.6	< 41.6	> +12.4	
12200.0	33.5	-25.9	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 45.6	< 35.6	> +18.4	
19520.0	40.4	-42.7	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.7	< 37.7	> +16.3	
Test condition : TX High Ch												
4960.0	27.3	-15.8	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.5	< 39.5	> +14.5	
7440.0	29.8	-16.4	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 51.4	< 41.4	> +12.6	
12400.0	33.6	-26.4	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 45.2	< 35.2	> +18.8	
19840.0	40.4	-42.8	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.6	< 37.6	> +16.4	
22320.0	40.6	-43.2	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.4	< 37.4	> +16.6	

Calculated result at 7320.0 MHz, as the worst point shown on underline:

Antenna Factor	=	29.9 dB(1/m)
Corr. Factor	=	-16.3 dB
+) Meter Reading	=	<28.0 dB(μV)
Result	=	<41.6 dB(μV/m)

Minimum Margin: 54.0 - <41.6 =>12.4 (dB)

NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 1 GHz to 25 GHz (10th harmonic of the highest fundamental frequency).
3. The correction factor is shown as follows:
 - Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
 - Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)
 - Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (over 18 GHz)
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. PK : Peak / AVE : Average

Mode of EUT : Bluetooth Low Energy

TX Low/Middle/High ch (Horizontal/Vertical)

