


FCC SAR Test Report

APPLICANT : SHARP CORPORATION
EQUIPMENT : Smart Phone
TYPE NAME : Type-A
Type-B
FCC ID : APYHRO00249
STANDARD : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013

We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Eric Huang / Manager



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Taoyuan City, Taiwan (R.O.C.)



Table of Contents

1. Statement of Compliance	4
2. Administration Data	5
3. Guidance Applied.....	5
4. Equipment Under Test (EUT) Information.....	6
4.1 General Information	6
4.2 General LTE SAR Test and Reporting Considerations	7
5. RF Exposure Limits.....	9
5.1 Uncontrolled Environment.....	9
5.2 Controlled Environment.....	9
6. Specific Absorption Rate (SAR).....	10
6.1 Introduction	10
6.2 SAR Definition.....	10
7. System Description and Setup	11
7.1 E-Field Probe	12
7.2 Data Acquisition Electronics (DAE)	12
7.3 Phantom.....	13
7.4 Device Holder.....	14
8. Measurement Procedures	15
8.1 Spatial Peak SAR Evaluation.....	15
8.2 Power Reference Measurement.....	16
8.3 Area Scan	16
8.4 Zoom Scan.....	17
8.5 Volume Scan Procedures.....	17
8.6 Power Drift Monitoring.....	17
9. Test Equipment List.....	18
10. System Verification	19
10.1 Tissue Simulating Liquids.....	19
10.2 Tissue Verification	20
10.3 System Performance Check Results.....	21
11. RF Exposure Positions	22
11.1 Ear and handset reference point	22
11.2 Definition of the cheek position.....	23
11.3 Definition of the tilt position.....	24
11.4 Body Worn Accessory	24
11.5 Product Specific	25
11.6 Wireless Router.....	25
12. Conducted RF Output Power (Unit: dBm).....	26
13. Bluetooth Exclusions Applied	56
14. Antenna Location	57
15. SAR Test Results	58
15.1 Head SAR	60
15.2 Hotspot SAR	63
15.3 Product Specific Accessory SAR.....	66
15.4 Body Worn Accessory SAR.....	67
16. Simultaneous Transmission Analysis.....	69
16.1 Head Exposure Conditions	70
16.2 Hotspot Exposure Conditions.....	72
16.3 Product Specific Exposure Conditions	74
16.4 Body-Worn Accessory Exposure Conditions	75
17. Spot Check Verification Data Section	76
18. Uncertainty Assessment	77
19. References.....	80
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	



Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA740121	Rev. 01	Initial issue of report	Jun. 12, 2017

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for SHARP CORPORATION, Smart Phone, Type-A, Type-B are as follows.

<Type-A>

Equipment Class	Frequency Band	Highest SAR Summary				Highest Simultaneous Transmission 1g SAR (W/kg)
		Head (Separation 0mm)	Body-worn (Separation 15mm)	Hotspot (Separation 10mm)	Product Specific (Separation 0mm)	
		1g SAR (W/kg)			10g SAR (W/kg)	
Licensed	GSM850	0.38	0.36	0.46		1.04
	GSM1900	0.09	0.41	0.60	1.24	
	WCDMA II	0.11	0.49	0.97	2.23	
	WCDMA IV	0.12	0.45	0.85	1.33	
	LTE Band 2	0.11	0.52	1.04	1.86	
	LTE Band 4	0.11	0.45	0.83	1.36	
	LTE Band 17	0.10	0.15	0.19		
DTS	2.4GHz WLAN	0.52	0.03	0.07		1.04
NII	5GHz WLAN	0.42	0.15		0.53	0.91
Date of Testing:		2017/4/23 ~ 2017/5/4				

<Type-B>

Equipment Class	Frequency Band	Highest SAR Summary				Highest Simultaneous Transmission 1g SAR (W/kg)
		Head (Separation 0mm)	Body-worn (Separation 15mm)	Hotspot (Separation 10mm)	Product Specific (Separation 0mm)	
		1g SAR (W/kg)			10g SAR (W/kg)	
Licensed	GSM850	0.38	0.36	0.46		1.11
	GSM1900	0.09	0.41	0.60	1.24	
	WCDMA V	0.34	0.38	0.42		
	LTE Band 5	0.33	0.40	0.58		
	LTE Band 13	0.28	0.41	0.52		
	LTE Band 17	0.10	0.15	0.19		
	LTE Band 38	0.12	0.29	1.10		
DTS	2.4GHz WLAN	0.52	0.03	0.07		1.11
NII	5GHz WLAN	0.42	0.15		0.53	0.91
Date of Testing:		2017/4/23 ~ 2017/5/4				

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body, 4.0 W/kg for Product Specific) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

2. Administration Data

Testing Laboratory	
Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978

Applicant	
Company Name	SHARP CORPORATION
Address	2-13-1, Hachihonmatsu-lida, Higashi-hiroshima-shi, Hiroshima, 739-0192, Japan

Manufacturer	
Company Name	SHARP CORPORATION
Address	2-13-1, Hachihonmatsu-lida, Higashi-hiroshima-shi, Hiroshima, 739-0192, Japan

3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01

4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification	
Equipment Name	Smart Phone
Type Name	Type-A Type-B
FCC ID	APYHRO00249
IMEI Code	004401116044799
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 13: 779.5 MHz ~ 784.5 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5700 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC : 13.56 MHz
Mode	GSM/GPRS RMC/AMR 12.2Kbps HSDPA HSUPA LTE: QPSK, 16QAM WLAN 2.4GHz : 802.11b/g/n/ac HT20/HT40/VHT20/VHT40 WLAN 5GHz : 802.11a/n/ac HT20/HT40/VHT20/VHT40 Bluetooth BR/EDR/LE NFC:ASK
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Identical Prototype
Remark: - In the operational description, the APYHRO00249 has the identical design as APYHRO00248 in 2.4GHz WLAN / Bluetooth and 5GHz WLAN, and for those frequency bands the SAR test results are leveraged from the test report of APYHRO00248. To justify the leverage additional verification on the worst configurations was performed and reported in the section 17 of this test report - This device 2.4GHz WLAN supports Hotspot operation. - When hotspot mode is enabled, power reduction will be activated to limit the maximum power of GSM1900 , WCDMA B2 / B4 and LTE B2 / B4. - This device has 2 versions, one is Type-A, and another one is Type-B, and support band as following : - Type-A : GSM 850 / 1900, WCDMA B2 / B4, LTE B2 / B4 / B17, 2.4GHz WLAN / Bluetooth and 5GHz WLAN. - Type-B : GSM 850 / 1900, WCDMA B5, LTE B5 / B13 / B17 / B38, 2.4GHz WLAN / Bluetooth and 5GHz WLAN.	

4.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																					
FCC ID	APYHRO00249																																																				
Equipment Name	Smart Phone																																																				
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 13: 779.5 MHz ~ 784.5 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz																																																				
Channel Bandwidth	LTE Band 02:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 04:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 05:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz																																																				
uplink modulations used	QPSK, and 16QAM																																																				
LTE Voice / Data requirements	Voice and Data																																																				
LTE MPR permanently built-in by design	<table><tr><th colspan="8">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3</th></tr><tr><th rowspan="2">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (RB)</th><th rowspan="2">MPR (dB)</th></tr><tr><th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr><tr><td>QPSK</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 2</td></tr></table>							Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3								Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3																																																					
Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)																																														
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																															
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																														
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																														
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																														
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests (Maximum TTI)																																																				
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																				
Power reduction applied to satisfy SAR compliance	1. Yes, when operating in hotspot mode that LTE B2 / B4 power reduction applied to satisfy SAR compliance.																																																				



Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5				
H	20643	848.3	20635	847.5	20625	846.5	20600	844				
LTE Band 13												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)					
L	23205		779.5		23230		782					
M	23230		782									
H	23255		784.5									
LTE Band 17												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Freq.(MHz)		Channel #		Freq. (MHz)					
L	23755		706.5		23780		709					
M	23790		710		23790		710					
H	23825		713.5		23800		711					
LTE Band 38												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580				
M	38000	2595	38000	2595	38000	2595	38000	2595				
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610				
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680				

5. RF Exposure Limits

5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

6. Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

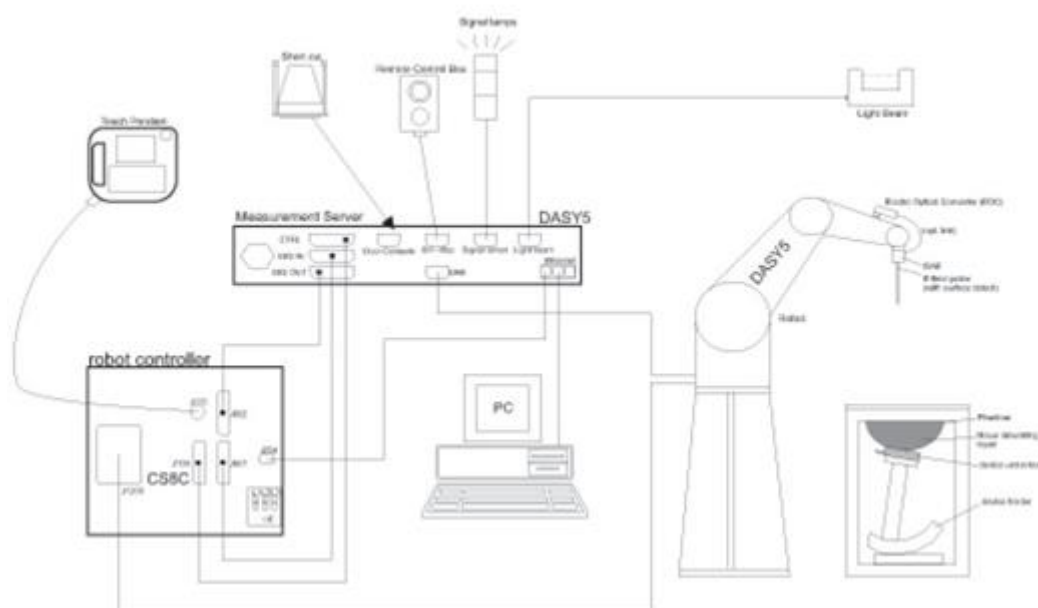

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

7.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – 4 GHz; Linearity: ± 0.2 dB (30 MHz – 4 GHz)	
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g – >100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

7.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.1 Photo of DAE

7.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

7.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

8. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

8.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

8.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm $2 - 3$ GHz: ≤ 5 mm*	$3 - 4$ GHz: ≤ 5 mm* $4 - 6$ GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	$3 - 4$ GHz: ≤ 4 mm $4 - 5$ GHz: ≤ 3 mm $5 - 6$ GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	$3 - 4$ GHz: ≤ 3 mm $4 - 5$ GHz: ≤ 2.5 mm $5 - 6$ GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	$3 - 4$ GHz: ≥ 28 mm $4 - 5$ GHz: ≥ 25 mm $5 - 6$ GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

8.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1012	May. 18, 2016	May. 17, 2017
SPEAG	835MHz System Validation Kit	D835V2	499	Mar. 21, 2017	Mar. 20, 2018
SPEAG	1750MHz System Validation Kit	D1750V2	1068	Nov. 16, 2016	Nov. 15, 2017
SPEAG	1900MHz System Validation Kit	D1900V2	5d041	Sep. 30, 2016	Sep. 29, 2017
SPEAG	2450MHz System Validation Kit	D2450V2	926	Jul. 25, 2016	Jul. 24, 2017
SPEAG	2600MHz System Validation Kit	D2600V2	1008	Aug. 30, 2016	Aug. 29, 2017
SPEAG	5GHz System Validation Kit	D5GHzV2	1006	Sep. 27, 2016	Sep. 26, 2017
SPEAG	Data Acquisition Electronics	DAE3	495	May. 27, 2016	May. 26, 2017
SPEAG	Data Acquisition Electronics	DAE4	1399	Nov. 17, 2016	Nov. 16, 2017
SPEAG	Dosimetric E-Field Probe	EX3DV4	3925	May. 26, 2016	May. 25, 2017
SPEAG	Dosimetric E-Field Probe	EX3DV4	3955	Nov. 24, 2016	Nov. 23, 2017
Wisewind	Thermometer	HTC-1	TM225	Oct. 12, 2016	Oct. 11, 2017
Wisewind	Thermometer	HTC-1	TM560	Oct. 12, 2016	Oct. 11, 2017
Anritsu	Radio Communication Analyzer	MT8820C	6201381760	May. 10, 2016	May. 09, 2017
Agilent	Wireless Communication Test Set	E5515C	MY50266977	May. 17, 2016	May. 16, 2017
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Dec. 09, 2016	Dec. 08, 2017
Agilent	ENA Network Analyzer	E5071C	MY46316648	Jan. 04, 2017	Jan. 03, 2018
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Jul. 19, 2016	Jul. 18, 2017
LINE SEIKI	Digital Thermometer	LKMelectronic	DTM3000SPEZIAL	Sep. 05, 2016	Sep. 04, 2017
Anritsu	Power Meter	ML2495A	1438002	Dec. 06, 2016	Dec. 05, 2017
Anritsu	Power Sensor	MA2411B	1339195	Dec. 06, 2016	Dec. 05, 2017
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jun. 21, 2016	Jun. 20, 2017
Mini-Circuits	Power Amplifier	ZVE-8G+	D120604	Mar. 09, 2017	Mar. 08, 2018
Mini-Circuits	Power Amplifier	ZHL-42W+	QA1344002	Mar. 09, 2017	Mar. 08, 2018
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.

10. System Verification

10.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.

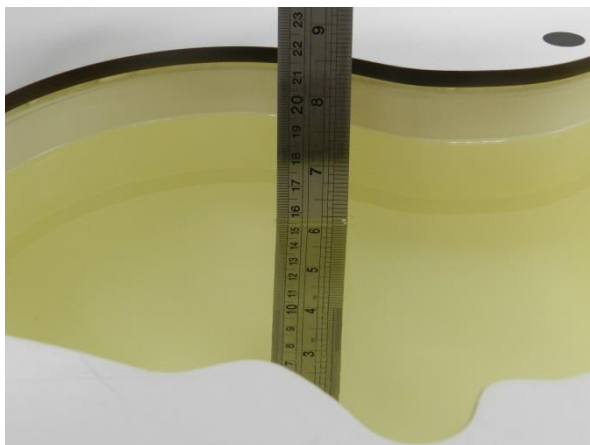


Fig 10.1Photo of Liquid Height for Head SAR



Fig 10.2 Photo of Liquid Height for Body SAR

**10.2 Tissue Verification**

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
For Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
750	HSL	22.3	0.895	43.254	0.89	41.90	0.56	3.23	±5	2017/5/3
750	MSL	22.3	0.970	55.366	0.96	55.50	1.04	-0.24	±5	2017/5/1
835	HSL	22.5	0.876	42.351	0.90	41.50	-2.67	2.05	±5	2017/5/3
835	MSL	22.4	0.946	54.473	0.97	55.20	-2.47	-1.32	±5	2017/4/30
1750	HSL	22.5	1.366	40.597	1.37	40.10	-0.29	1.24	±5	2017/5/4
1750	MSL	22.3	1.483	55.402	1.49	53.40	-0.47	3.75	±5	2017/4/29
1750	MSL	22.3	1.491	55.352	1.49	53.40	0.07	3.66	±5	2017/4/30
1900	HSL	22.7	1.422	40.353	1.40	40.00	1.57	0.88	±5	2017/5/4
1900	MSL	22.1	1.551	55.309	1.52	53.30	2.04	3.77	±5	2017/4/29
2450	HSL	22.5	1.767	39.596	1.80	39.20	-1.83	1.01	±5	2017/4/23
2450	MSL	22.5	2.024	52.188	1.95	52.70	3.79	-0.97	±5	2017/4/23
2600	HSL	22.3	1.945	39.983	1.96	39.00	-0.77	2.52	±5	2017/5/3
2600	MSL	22.6	2.144	52.247	2.16	52.50	-0.74	-0.48	±5	2017/4/30
5250	HSL	22.2	4.690	36.100	4.71	35.95	-0.42	0.42	±5	2017/4/26
5250	MSL	22.3	5.430	47.300	5.36	48.95	1.31	-3.37	±5	2017/4/27
5600	HSL	22.2	5.030	35.600	5.07	35.50	-0.79	0.28	±5	2017/4/26
5600	MSL	22.3	5.890	46.700	5.77	48.50	2.08	-3.71	±5	2017/4/27

10.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2017/5/3	750	HSL	250	D750V3-1012	EX3DV4 - SN3925	DAE3 Sn495	2.07	8.21	8.28	0.85
2017/5/1	750	MSL	250	D750V3-1012	EX3DV4 - SN3925	DAE3 Sn495	2.12	8.72	8.48	-2.75
2017/5/3	835	HSL	250	D835V2-499	EX3DV4 - SN3925	DAE3 Sn495	2.43	9.45	9.72	2.86
2017/4/30	835	MSL	250	D835V2-499	EX3DV4 - SN3925	DAE3 Sn495	2.45	9.67	9.80	1.34
2017/5/4	1750	HSL	250	D1750V2-1068	EX3DV4 - SN3925	DAE3 Sn495	9.27	36.60	37.08	1.31
2017/4/29	1750	MSL	250	D1750V2-1068	EX3DV4 - SN3925	DAE3 Sn495	9.39	36.20	37.56	3.76
2017/4/30	1750	MSL	250	D1750V2-1068	EX3DV4 - SN3925	DAE3 Sn495	8.98	36.20	35.92	-0.77
2017/5/4	1900	HSL	250	D1900V2-5d041	EX3DV4 - SN3925	DAE3 Sn495	10.10	40.50	40.40	-0.25
2017/4/29	1900	MSL	250	D1900V2-5d041	EX3DV4 - SN3925	DAE3 Sn495	10.10	38.80	40.40	4.12
2017/4/23	2450	HSL	250	D2450V2-926	EX3DV4 - SN3955	DAE4 Sn1399	13.80	52.80	55.20	4.55
2017/4/23	2450	MSL	250	D2450V2-926	EX3DV4 - SN3955	DAE4 Sn1399	12.40	51.20	49.60	-3.13
2017/5/3	2600	HSL	250	D2600V2-1008	EX3DV4 - SN3925	DAE3 Sn495	14.10	56.80	56.4	-0.70
2017/4/30	2600	MSL	250	D2600V2-1008	EX3DV4 - SN3925	DAE3 Sn495	13.30	55.20	53.2	-3.62
2017/4/26	5250	HSL	100	D5GHzV2-1006	EX3DV4 - SN3955	DAE4 Sn1399	8.25	80.60	82.50	2.36
2017/4/27	5250	MSL	100	D5GHzV2-1006	EX3DV4 - SN3955	DAE4 Sn1399	7.38	75.50	73.80	-2.25
2017/4/26	5600	HSL	100	D5GHzV2-1006	EX3DV4 - SN3955	DAE4 Sn1399	8.54	83.80	85.40	1.91
2017/4/27	5600	MSL	100	D5GHzV2-1006	EX3DV4 - SN3955	DAE4 Sn1399	7.69	78.60	76.90	-2.16

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2017/4/29	1750	MSL	250	D1750V2-1068	EX3DV4 - SN3925	DAE3 Sn495	5.10	19.40	20.40	5.15
2017/4/30	1750	MSL	250	D1750V2-1068	EX3DV4 - SN3925	DAE3 Sn495	4.78	19.40	19.12	-1.44
2017/4/29	1900	MSL	250	D1900V2-5d041	EX3DV4 - SN3925	DAE3 Sn495	5.26	20.60	21.04	2.14
2017/4/27	5250	MSL	100	D5GHzV2-1006	EX3DV4 - SN3955	DAE4 Sn1399	2.03	21.20	20.30	-4.25
2017/4/27	5600	MSL	100	D5GHzV2-1006	EX3DV4 - SN3955	DAE4 Sn1399	2.07	22.00	20.70	-5.91

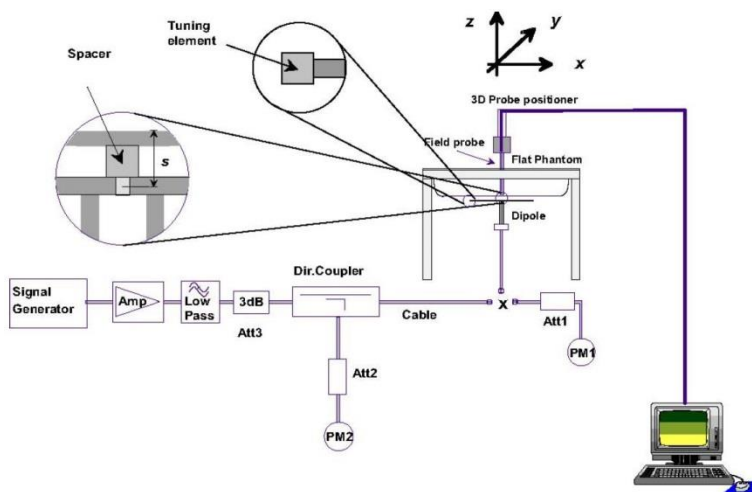


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

11. RF Exposure Positions

11.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled "M," the left ear reference point (ERP) is marked "LE," and the right ERP is marked "RE." Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

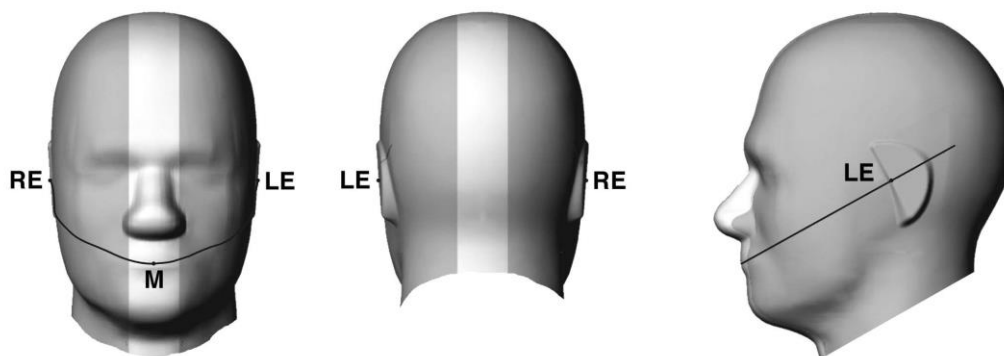


Fig 9.1.1 Front, back, and side views of SAM twin phantom

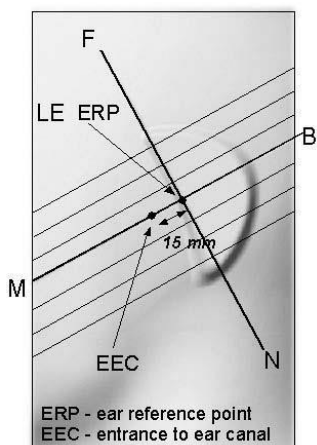


Fig 9.1.2 Close-up side view of phantom showing the ear region.

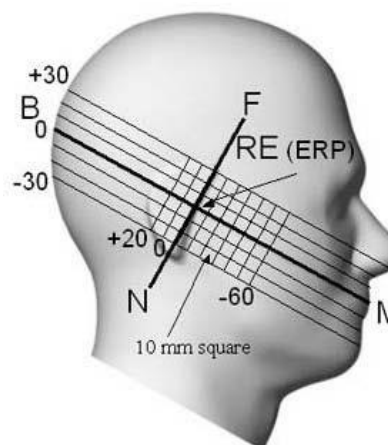


Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

11.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.

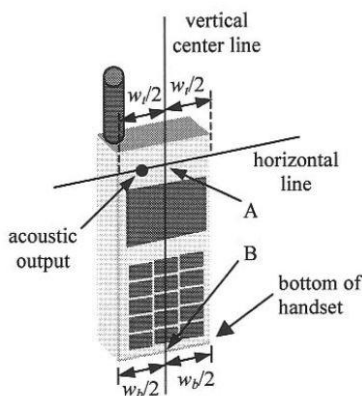


Fig 9.2.1 Handset vertical and horizontal reference lines—"fixed case"

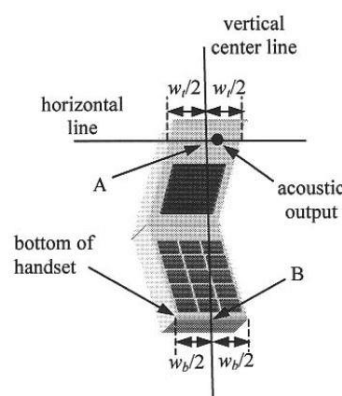


Fig 9.2.2 Handset vertical and horizontal reference lines—"clam-shell case"

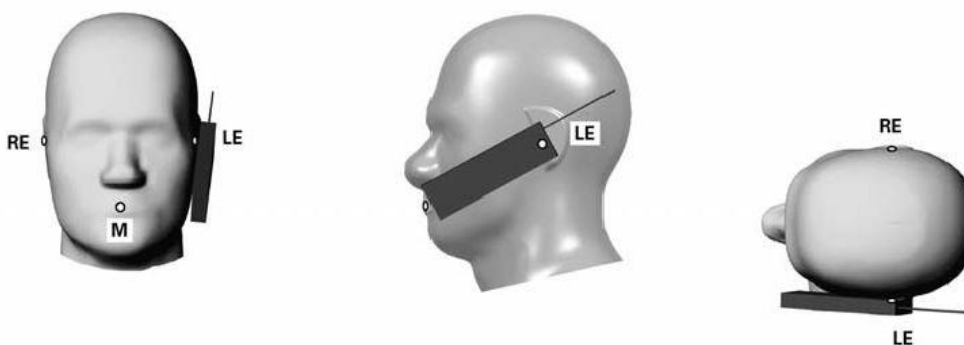


Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

11.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

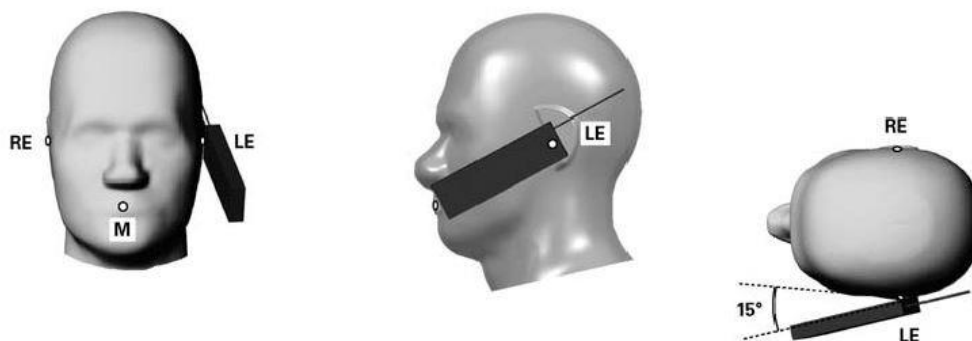


Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

11.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

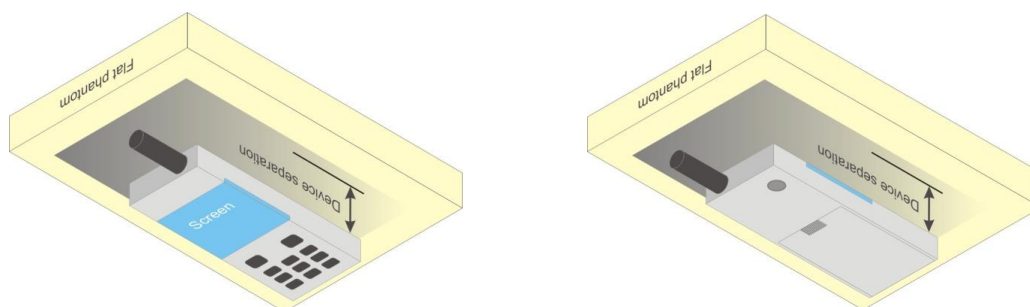


Fig 9.4 Body Worn Position



11.5 Product Specific

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.⁶ The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

11.6 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9$ cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

12. Conducted RF Output Power (Unit: dBm)

<GSM Conducted Power>

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode.
3. Other configurations of GSM / GPRS are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode
4. Power reduction which is triggered by hotspot mode is implemented in GSM1900 band, for hotspot mode SAR testing EUT was set in reduced power mode and GPRS 4 Tx slot due to its highest frame-average power.

<Default Power Mode>

GSM850	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel	128	189	251		128	189	251	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot	32.06	32.01	32.21	33.50	23.06	23.01	23.21	24.50
GPRS 1 Tx slot	32.08	32.04	32.24	33.50	23.08	23.04	23.24	24.50
GPRS 2 Tx slots	29.88	30.14	30.09	31.50	23.88	24.14	24.09	25.50
GPRS 3 Tx slots	28.66	28.55	28.47	30.00	24.40	24.29	24.21	25.74
GPRS 4 Tx slots	27.90	27.96	27.91	29.50	24.90	24.96	24.91	26.50

GSM1900	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	29.30	29.25	29.28	30.50	20.30	20.25	20.28	21.50
GPRS 1 Tx slot	29.32	29.27	29.30	30.50	20.32	20.27	20.30	21.50
GPRS 2 Tx slots	26.74	26.93	26.96	28.50	20.74	20.93	20.96	22.50
GPRS 3 Tx slots	24.86	24.86	24.85	26.50	20.60	20.60	20.59	22.24
GPRS 4 Tx slots	24.12	24.13	24.16	25.50	21.12	21.13	21.16	22.50

<Reduced Power Mode>

GSM1900	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	24.20	24.27	24.33	25.90	15.20	15.27	15.33	16.90
GPRS 1 Tx slot	24.21	24.35	24.35	25.90	15.21	15.35	15.35	16.90
GPRS 2 Tx slots	22.72	22.63	22.75	24.50	16.72	16.63	16.75	18.50
GPRS 3 Tx slots	20.81	20.81	21.00	22.80	16.55	16.55	16.74	18.54
GPRS 4 Tx slots	20.18	20.33	20.30	21.70	17.18	17.33	17.30	18.70

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_d/\beta_c = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration

<WCDMA Conducted Power>
General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA.

<Default Power Mode>

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)	WCDMA V			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	22.50	22.54	22.50	23.40	22.36	22.42	22.43	23.40	23.03	23.02	23.01	24.20
3GPP Rel 99	RMC 12.2Kbps	22.51	22.56	22.52	23.40	22.38	22.46	22.45	23.40	23.06	23.05	23.02	24.20
3GPP Rel 6	HSDPA Subtest-1	21.49	21.40	21.49	23.20	21.39	21.47	21.48	23.20	22.08	22.06	22.15	24.00
3GPP Rel 6	HSDPA Subtest-2	21.53	21.52	21.48	23.20	21.40	21.41	21.47	23.20	22.08	22.06	22.03	24.00
3GPP Rel 6	HSDPA Subtest-3	21.00	21.11	20.98	22.70	20.90	20.94	20.95	22.90	21.59	21.56	21.55	23.70
3GPP Rel 6	HSDPA Subtest-4	21.02	21.09	21.04	22.70	20.92	20.98	20.99	22.90	21.56	21.53	21.48	23.70
3GPP Rel 6	HSUPA Subtest-1	21.52	21.57	21.41	23.20	21.39	21.48	21.37	23.20	22.06	22.03	22.13	24.00
3GPP Rel 6	HSUPA Subtest-2	19.53	19.58	19.44	21.20	19.41	19.45	19.43	21.40	20.09	20.04	20.17	22.20
3GPP Rel 6	HSUPA Subtest-3	20.76	20.79	20.70	22.20	20.40	20.49	20.41	22.40	21.11	21.07	21.16	23.20
3GPP Rel 6	HSUPA Subtest-4	19.55	19.57	19.46	21.40	19.40	19.47	19.43	21.40	20.08	20.05	20.14	22.20
3GPP Rel 6	HSUPA Subtest-5	21.54	21.58	21.54	22.70	21.40	21.47	21.46	23.20	22.05	22.05	22.00	24.00

<Reduced Power Mode>

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513	
Rx Channel		9662	9800	9938		1537	1638	1738	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6	
3GPP Rel 99	AMR 12.2Kbps	19.25	19.29	19.27	20.40	19.18	19.21	19.22	20.40
3GPP Rel 99	RMC 12.2Kbps	19.27	19.30	19.25	20.40	19.16	19.24	19.23	20.40
3GPP Rel 6	HSDPA Subtest-1	18.26	18.29	18.22	20.20	18.26	18.33	18.35	20.20
3GPP Rel 6	HSDPA Subtest-2	18.24	18.33	18.23	20.20	18.28	18.35	18.34	20.20
3GPP Rel 6	HSDPA Subtest-3	17.82	17.84	17.77	19.70	18.06	18.04	18.09	19.90
3GPP Rel 6	HSDPA Subtest-4	17.81	17.83	17.78	19.70	18.05	18.06	17.90	19.90
3GPP Rel 6	HSUPA Subtest-1	18.29	18.33	18.24	20.20	18.32	18.39	18.34	20.20
3GPP Rel 6	HSUPA Subtest-2	16.33	16.36	16.29	18.20	16.49	16.53	16.51	18.40
3GPP Rel 6	HSUPA Subtest-3	17.26	17.32	17.24	19.20	17.41	17.45	17.40	19.40
3GPP Rel 6	HSUPA Subtest-4	16.49	16.51	16.46	18.40	16.51	16.55	16.56	18.40
3GPP Rel 6	HSUPA Subtest-5	18.29	18.31	18.25	19.70	18.27	18.33	18.30	20.20

**<LTE Conducted Power>****General Note:**

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B17 / B5 / B4 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Default Power Mode
<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	22.21	22.24	22.28	23.4	0
20	QPSK	1	49	21.82	21.85	22.01		
20	QPSK	1	99	21.96	21.91	21.93		
20	QPSK	50	0	21.03	21.06	21.24	22.4	1
20	QPSK	50	24	20.95	20.96	21.16		
20	QPSK	50	50	20.86	20.89	21.07		
20	QPSK	100	0	20.95	20.97	21.16	22.4	1
20	16QAM	1	0	21.53	21.58	21.55		
20	16QAM	1	49	21.12	21.18	21.30		
20	16QAM	1	99	21.29	21.21	21.23	21.4	2
20	16QAM	50	0	20.05	20.09	20.22		
20	16QAM	50	24	19.94	19.99	20.14		
20	16QAM	50	50	19.83	19.89	20.06	21.4	2
20	16QAM	100	0	19.95	19.98	20.14		
Channel				18675	18900	19125		
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	22.05	22.10	22.23	23.4	0
15	QPSK	1	37	21.87	21.87	22.01		
15	QPSK	1	74	21.79	21.84	21.97		
15	QPSK	36	0	21.02	21.03	21.19	22.4	1
15	QPSK	36	20	20.95	20.98	21.13		
15	QPSK	36	39	20.88	20.90	21.08		
15	QPSK	75	0	20.95	20.96	21.13	22.4	1
15	16QAM	1	0	21.34	21.39	21.48		
15	16QAM	1	37	21.15	21.19	21.32		
15	16QAM	1	74	21.07	21.16	21.25	21.4	2
15	16QAM	36	0	20.00	20.05	20.18		
15	16QAM	36	20	19.93	20.00	20.13		
15	16QAM	36	39	19.88	19.91	20.05	21.4	2
15	16QAM	75	0	19.94	19.97	20.12		
Channel				18650	18900	19150		
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	22.21	22.20	22.13	23.4	0
10	QPSK	1	25	21.88	21.89	22.01		
10	QPSK	1	49	22.02	22.03	21.99		
10	QPSK	25	0	20.97	21.00	21.13	22.4	1
10	QPSK	25	12	20.94	20.94	21.12		
10	QPSK	25	25	20.89	20.93	21.04		
10	QPSK	50	0	20.94	20.97	21.07	22.4	1
10	16QAM	1	0	21.48	21.51	21.41		
10	16QAM	1	25	21.15	21.18	21.29		
10	16QAM	1	49	21.29	21.32	21.21	21.4	2
10	16QAM	25	0	20.00	20.00	20.12		
10	16QAM	25	12	19.95	19.97	20.10		
10	16QAM	25	25	19.88	19.90	20.02	21.4	2
10	16QAM	50	0	19.96	19.97	20.08		



Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	21.96	21.94	22.07	23.4	0
5	QPSK	1	12	21.89	21.89	21.99		
5	QPSK	1	24	21.89	21.87	22.00		
5	QPSK	12	0	20.95	20.94	21.08	22.4	1
5	QPSK	12	7	20.93	20.95	21.11		
5	QPSK	12	13	20.90	20.91	21.07		
5	QPSK	25	0	20.92	20.94	21.07		
5	16QAM	1	0	21.25	21.27	21.35	22.4	1
5	16QAM	1	12	21.20	21.22	21.31		
5	16QAM	1	24	21.16	21.17	21.28		
5	16QAM	12	0	19.95	19.98	20.08	21.4	2
5	16QAM	12	7	19.97	19.98	20.10		
5	16QAM	12	13	19.91	19.93	20.03		
5	16QAM	25	0	19.93	19.94	20.06		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	21.91	21.84	21.96	23.4	0
3	QPSK	1	8	21.89	21.78	21.92		
3	QPSK	1	14	21.87	21.78	21.89		
3	QPSK	8	0	20.94	20.83	20.96	22.4	1
3	QPSK	8	4	20.95	20.84	20.98		
3	QPSK	8	7	20.94	20.80	20.95		
3	QPSK	15	0	20.93	20.82	20.93		
3	16QAM	1	0	21.20	21.12	21.23	22.4	1
3	16QAM	1	8	21.20	21.10	21.18		
3	16QAM	1	14	21.15	21.08	21.13		
3	16QAM	8	0	20.01	19.92	20.02	21.4	2
3	16QAM	8	4	20.00	19.91	20.03		
3	16QAM	8	7	19.96	19.87	19.97		
3	16QAM	15	0	19.93	19.87	19.98		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	21.84	21.77	21.85	23.4	0
1.4	QPSK	1	3	21.88	21.81	21.90		
1.4	QPSK	1	5	21.81	21.73	21.81		
1.4	QPSK	3	0	21.89	21.80	21.92		
1.4	QPSK	3	1	21.93	21.83	21.94		
1.4	QPSK	3	3	21.88	21.77	21.85		
1.4	QPSK	6	0	20.87	20.78	20.90	22.4	1
1.4	16QAM	1	0	21.15	21.03	21.14	22.4	1
1.4	16QAM	1	3	21.24	21.11	21.19		
1.4	16QAM	1	5	21.09	21.03	21.09		
1.4	16QAM	3	0	20.89	20.81	20.89		
1.4	16QAM	3	1	20.93	20.85	20.95		
1.4	16QAM	3	3	20.85	20.78	20.86		
1.4	16QAM	6	0	19.93	19.85	19.94	21.4	2

<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	22.33	22.41	22.37		
20	QPSK	1	49	22.09	22.16	22.12	23.4	0
20	QPSK	1	99	22.10	22.04	21.98		
20	QPSK	50	0	21.32	21.41	21.34		
20	QPSK	50	24	21.22	21.30	21.26	22.4	1
20	QPSK	50	50	21.26	21.20	21.19		
20	QPSK	100	0	21.23	21.32	21.27		
20	16QAM	1	0	21.65	21.72	21.67	22.4	1
20	16QAM	1	49	21.40	21.47	21.44		
20	16QAM	1	99	21.41	21.35	21.31		
20	16QAM	50	0	20.34	20.44	20.38	21.4	2
20	16QAM	50	24	20.23	20.33	20.28		
20	16QAM	50	50	20.27	20.23	20.16		
20	16QAM	100	0	20.22	20.29	20.25		
Channel				20025	20175	20325		
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	22.32	22.40	22.33		
15	QPSK	1	37	22.13	22.20	22.12	23.4	0
15	QPSK	1	74	22.16	22.13	22.05		
15	QPSK	36	0	21.28	21.36	21.33		
15	QPSK	36	20	21.25	21.29	21.27	22.4	1
15	QPSK	36	39	21.28	21.21	21.17		
15	QPSK	75	0	21.24	21.29	21.28		
15	16QAM	1	0	21.63	21.69	21.64	22.4	1
15	16QAM	1	37	21.43	21.51	21.43		
15	16QAM	1	74	21.45	21.43	21.33		
15	16QAM	36	0	20.33	20.38	20.31	21.4	2
15	16QAM	36	20	20.24	20.30	20.25		
15	16QAM	36	39	20.26	20.25	20.16		
15	16QAM	75	0	20.23	20.30	20.26		
Channel				20000	20175	20350		
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	22.26	22.30	22.26		
10	QPSK	1	25	22.14	22.20	22.13	23.4	0
10	QPSK	1	49	22.09	22.14	22.04		
10	QPSK	25	0	21.26	21.33	21.29		
10	QPSK	25	12	21.23	21.29	21.21	22.4	1
10	QPSK	25	25	21.18	21.24	21.20		
10	QPSK	50	0	21.22	21.29	21.23		
10	16QAM	1	0	21.56	21.60	21.54	22.4	1
10	16QAM	1	25	21.41	21.49	21.42		
10	16QAM	1	49	21.39	21.43	21.34		
10	16QAM	25	0	20.28	20.35	20.26	21.4	2
10	16QAM	25	12	20.25	20.32	20.25		
10	16QAM	25	25	20.20	20.25	20.16		
10	16QAM	50	0	20.25	20.30	20.23		



Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	22.21	22.24	22.17	23.4	0
5	QPSK	1	12	22.15	22.20	22.10		
5	QPSK	1	24	22.12	22.18	22.10		
5	QPSK	12	0	21.22	21.29	21.22	22.4	1
5	QPSK	12	7	21.25	21.32	21.21		
5	QPSK	12	13	21.20	21.23	21.16		
5	QPSK	25	0	21.22	21.28	21.17		
5	16QAM	1	0	21.50	21.57	21.47	22.4	1
5	16QAM	1	12	21.46	21.50	21.42		
5	16QAM	1	24	21.41	21.46	21.38		
5	16QAM	12	0	20.26	20.32	20.22	21.4	2
5	16QAM	12	7	20.24	20.32	20.21		
5	16QAM	12	13	20.18	20.27	20.17		
5	16QAM	25	0	20.23	20.29	20.22		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	22.28	22.24	22.12	23.4	0
3	QPSK	1	8	22.24	22.17	22.09		
3	QPSK	1	14	22.22	22.17	22.06		
3	QPSK	8	0	21.23	21.28	21.17	22.4	1
3	QPSK	8	4	21.23	21.29	21.17		
3	QPSK	8	7	21.18	21.26	21.16		
3	QPSK	15	0	21.19	21.28	21.18		
3	16QAM	1	0	21.47	21.51	21.39	22.4	1
3	16QAM	1	8	21.47	21.51	21.34		
3	16QAM	1	14	21.40	21.46	21.37		
3	16QAM	8	0	20.30	20.37	20.26	21.4	2
3	16QAM	8	4	20.32	20.37	20.26		
3	16QAM	8	7	20.29	20.31	20.25		
3	16QAM	15	0	20.25	20.29	20.18		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	22.18	22.15	22.02	23.4	0
1.4	QPSK	1	3	22.25	22.22	22.03		
1.4	QPSK	1	5	22.16	22.12	21.92		
1.4	QPSK	3	0	22.20	22.17	21.97		
1.4	QPSK	3	1	22.21	22.22	22.04		
1.4	QPSK	3	3	22.11	22.19	21.96		
1.4	QPSK	6	0	21.28	21.22	21.01	22.4	1
1.4	16QAM	1	0	21.38	21.44	21.25	22.4	1
1.4	16QAM	1	3	21.43	21.48	21.31		
1.4	16QAM	1	5	21.37	21.41	21.23		
1.4	16QAM	3	0	21.16	21.22	21.00		
1.4	16QAM	3	1	21.20	21.25	21.05		
1.4	16QAM	3	3	21.12	21.18	21.00		
1.4	16QAM	6	0	20.23	20.27	20.08	21.4	2



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600	24.2	0
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	22.55	22.58	22.53		
10	QPSK	1	25	22.57	22.57	22.55	23.2	1
10	QPSK	1	49	22.54	22.44	22.43		
10	QPSK	25	0	21.57	21.73	21.67		
10	QPSK	25	12	21.67	21.69	21.66	23.2	1
10	QPSK	25	25	21.60	21.57	21.63		
10	QPSK	50	0	21.52	21.63	21.53		
10	16QAM	1	0	21.80	21.81	21.82	23.2	1
10	16QAM	1	25	21.81	21.80	21.74		
10	16QAM	1	49	21.80	21.71	21.69		
10	16QAM	25	0	20.59	20.69	20.67	22.2	2
10	16QAM	25	12	20.67	20.69	20.66		
10	16QAM	25	25	20.56	20.58	20.61		
10	16QAM	50	0	20.64	20.63	20.69	24.2	0
Channel				20425	20525	20625		
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	22.51	22.57	22.50	24.2	0
5	QPSK	1	12	22.47	22.53	22.48		
5	QPSK	1	24	22.55	22.49	22.44		
5	QPSK	12	0	21.56	21.63	21.59	23.2	1
5	QPSK	12	7	21.56	21.64	21.62		
5	QPSK	12	13	21.61	21.61	21.53		
5	QPSK	25	0	21.54	21.60	21.60	23.2	1
5	16QAM	1	0	21.78	21.83	21.72		
5	16QAM	1	12	21.71	21.80	21.73		
5	16QAM	1	24	21.74	21.75	21.70	22.2	2
5	16QAM	12	0	20.60	20.65	20.58		
5	16QAM	12	7	20.55	20.67	20.57		
5	16QAM	12	13	20.61	20.63	20.51	24.2	0
5	16QAM	25	0	20.55	20.64	20.58		
Channel				20415	20525	20635		
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	22.51	22.53	22.50	24.2	0
3	QPSK	1	8	22.46	22.51	22.46		
3	QPSK	1	14	22.44	22.50	22.44		
3	QPSK	8	0	21.56	21.62	21.55	23.2	1
3	QPSK	8	4	21.57	21.61	21.58		
3	QPSK	8	7	21.55	21.56	21.55		
3	QPSK	15	0	21.54	21.58	21.54	23.2	1
3	16QAM	1	0	21.74	21.78	21.67		
3	16QAM	1	8	21.72	21.78	21.70		
3	16QAM	1	14	21.68	21.72	21.63	22.2	2
3	16QAM	8	0	20.62	20.68	20.59		
3	16QAM	8	4	20.62	20.67	20.60		
3	16QAM	8	7	20.58	20.61	20.59	22.2	2
3	16QAM	15	0	20.58	20.61	20.54		



Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	22.41	22.44	22.36	24.2	0
1.4	QPSK	1	3	22.43	22.50	22.45		
1.4	QPSK	1	5	22.38	22.45	22.34		
1.4	QPSK	3	0	22.49	22.50	22.41		
1.4	QPSK	3	1	22.53	22.55	22.44		
1.4	QPSK	3	3	22.47	22.49	22.41		
1.4	QPSK	6	0	21.47	21.55	21.44	23.2	1
1.4	16QAM	1	0	21.66	21.69	21.62	23.2	1
1.4	16QAM	1	3	21.71	21.76	21.68		
1.4	16QAM	1	5	21.63	21.70	21.60		
1.4	16QAM	3	0	21.48	21.53	21.44		
1.4	16QAM	3	1	21.53	21.55	21.48		
1.4	16QAM	3	3	21.45	21.51	21.43		
1.4	16QAM	6	0	20.53	20.61	20.52	22.2	2



<LTE Band 13>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23230				
Frequency (MHz)				782				
10	QPSK	1	0	22.70			24.2	0
10	QPSK	1	25	22.64				
10	QPSK	1	49	22.66				
10	QPSK	25	0	21.67			23.2	1
10	QPSK	25	12	21.60				
10	QPSK	25	25	21.65				
10	QPSK	50	0	21.58				
10	16QAM	1	0	21.82			23.2	1
10	16QAM	1	25	21.79				
10	16QAM	1	49	21.83				
10	16QAM	25	0	20.61			22.2	2
10	16QAM	25	12	20.62				
10	16QAM	25	25	20.63				
10	16QAM	50	0	20.60				
Channel				23205	23230	23255	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				779.5	782	784.5		
5	QPSK	1	0	22.48	22.54	22.60	24.2	0
5	QPSK	1	12	22.45	22.50	22.57		
5	QPSK	1	24	22.50	22.46	22.55		
5	QPSK	12	0	21.50	21.58	21.64	23.2	1
5	QPSK	12	7	21.49	21.56	21.75		
5	QPSK	12	13	21.54	21.50	21.68		
5	QPSK	25	0	21.44	21.56	21.74	23.2	1
5	16QAM	1	0	21.79	21.84	21.85		
5	16QAM	1	12	21.78	21.77	21.93		
5	16QAM	1	24	21.76	21.72	21.94	22.2	2
5	16QAM	12	0	20.53	20.60	20.63		
5	16QAM	12	7	20.52	20.58	20.76		
5	16QAM	12	13	20.56	20.53	20.72		
5	16QAM	25	0	20.48	20.55	20.70		



<LTE Band 17>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800		
Frequency (MHz)				709	710	711		
10	QPSK	1	0	22.28	22.50	22.26	24.2	0
10	QPSK	1	25	22.36	22.45	22.35		
10	QPSK	1	49	22.45	22.49	22.41		
10	QPSK	25	0	21.44	21.62	21.43	23.2	1
10	QPSK	25	12	21.43	21.52	21.47		
10	QPSK	25	25	21.46	21.61	21.54		
10	QPSK	50	0	21.44	21.53	21.42		
10	16QAM	1	0	21.51	21.72	21.51	23.2	1
10	16QAM	1	25	21.59	21.68	21.57		
10	16QAM	1	49	21.67	21.73	21.63		
10	16QAM	25	0	20.46	20.54	20.44	22.2	2
10	16QAM	25	12	20.47	20.56	20.48		
10	16QAM	25	25	20.46	20.61	20.53		
10	16QAM	50	0	20.45	20.57	20.45		
Channel				23755	23790	23825		
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	22.37	22.36	22.34	24.2	0
5	QPSK	1	12	22.40	22.39	22.33		
5	QPSK	1	24	22.43	22.38	22.44		
5	QPSK	12	0	21.46	21.56	21.44	23.2	1
5	QPSK	12	7	21.58	21.58	21.46		
5	QPSK	12	13	21.55	21.54	21.39		
5	QPSK	25	0	21.54	21.58	21.43		
5	16QAM	1	0	21.58	21.66	21.53	23.2	1
5	16QAM	1	12	21.72	21.77	21.58		
5	16QAM	1	24	21.68	21.69	21.67		
5	16QAM	12	0	20.48	20.60	20.47	22.2	2
5	16QAM	12	7	20.60	20.59	20.47		
5	16QAM	12	13	20.56	20.55	20.40		
5	16QAM	25	0	20.56	20.59	20.45		

Reduced Power Mode
<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	19.09	19.11	19.13	20.4	0
20	QPSK	1	49	18.73	18.76	18.95		
20	QPSK	1	99	18.90	18.78	18.82		
20	QPSK	50	0	18.93	18.88	19.04	20.4	0
20	QPSK	50	24	18.86	18.76	18.97		
20	QPSK	50	50	18.76	18.68	18.86		
20	QPSK	100	0	18.87	18.78	18.95		
20	16QAM	1	0	19.36	19.37	19.39	20.4	0
20	16QAM	1	49	19.01	18.96	19.10		
20	16QAM	1	99	19.19	19.00	19.04		
20	16QAM	50	0	18.99	18.90	19.06	20.4	0
20	16QAM	50	24	18.89	18.81	18.98		
20	16QAM	50	50	18.80	18.73	18.90		
20	16QAM	100	0	18.90	18.80	18.99		
Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	18.96	18.86	19.00	20.4	0
15	QPSK	1	37	18.75	18.67	18.81		
15	QPSK	1	74	18.70	18.63	18.81		
15	QPSK	36	0	18.90	18.82	18.99	20.4	0
15	QPSK	36	20	18.84	18.75	18.94		
15	QPSK	36	39	18.79	18.69	18.87		
15	QPSK	75	0	18.83	18.77	18.93		
15	16QAM	1	0	19.26	19.20	19.33	20.4	0
15	16QAM	1	37	19.04	18.99	19.12		
15	16QAM	1	74	19.02	18.93	19.10		
15	16QAM	36	0	18.94	18.86	19.01	20.4	0
15	16QAM	36	20	18.91	18.80	18.96		
15	16QAM	36	39	18.82	18.75	18.87		
15	16QAM	75	0	18.89	18.80	18.95		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	19.11	19.01	18.94	20.4	0
10	QPSK	1	25	18.76	18.69	18.82		
10	QPSK	1	49	18.91	18.85	18.77		
10	QPSK	25	0	18.87	18.78	18.93	20.4	0
10	QPSK	25	12	18.83	18.73	18.91		
10	QPSK	25	25	18.80	18.69	18.85		
10	QPSK	50	0	18.83	18.73	18.86		
10	16QAM	1	0	19.38	19.31	19.24	20.4	0
10	16QAM	1	25	19.05	18.98	19.11		
10	16QAM	1	49	19.22	19.14	19.07		
10	16QAM	25	0	18.90	18.83	18.93	20.4	0
10	16QAM	25	12	18.89	18.79	18.92		
10	16QAM	25	25	18.84	18.74	18.87		
10	16QAM	50	0	18.90	18.79	18.91		



Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	18.82	18.73	18.85	20.4	0
5	QPSK	1	12	18.76	18.65	18.77		
5	QPSK	1	24	18.76	18.66	18.76		
5	QPSK	12	0	18.86	18.74	18.88	20.4	0
5	QPSK	12	7	18.82	18.74	18.85		
5	QPSK	12	13	18.81	18.69	18.80		
5	QPSK	25	0	18.79	18.70	18.83		
5	16QAM	1	0	19.12	19.06	19.15	20.4	0
5	16QAM	1	12	19.06	19.00	19.11		
5	16QAM	1	24	19.04	18.95	19.06		
5	16QAM	12	0	18.87	18.79	18.88	20.4	0
5	16QAM	12	7	18.87	18.79	18.90		
5	16QAM	12	13	18.81	18.75	18.86		
5	16QAM	25	0	18.85	18.77	18.88		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	18.77	18.67	18.79	20.4	0
3	QPSK	1	8	18.74	18.66	18.75		
3	QPSK	1	14	18.72	18.64	18.75		
3	QPSK	8	0	18.79	18.71	18.80	20.4	0
3	QPSK	8	4	18.78	18.71	18.83		
3	QPSK	8	7	18.76	18.66	18.79		
3	QPSK	15	0	18.76	18.69	18.79		
3	16QAM	1	0	19.07	18.97	19.09	20.4	0
3	16QAM	1	8	19.05	18.96	19.06		
3	16QAM	1	14	18.98	18.94	19.04		
3	16QAM	8	0	18.88	18.81	18.91	20.4	0
3	16QAM	8	4	18.92	18.81	18.93		
3	16QAM	8	7	18.87	18.76	18.87		
3	16QAM	15	0	18.84	18.75	18.84		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	18.68	18.68	18.80	20.4	0
1.4	QPSK	1	3	18.72	18.75	18.88		
1.4	QPSK	1	5	18.64	18.67	18.78		
1.4	QPSK	3	0	18.74	18.72	18.83		
1.4	QPSK	3	1	18.77	18.78	18.90		
1.4	QPSK	3	3	18.68	18.71	18.82		
1.4	QPSK	6	0	18.72	18.75	18.86	20.4	0
1.4	16QAM	1	0	18.98	18.99	19.08	20.4	0
1.4	16QAM	1	3	19.04	19.06	19.14		
1.4	16QAM	1	5	18.96	18.98	19.07		
1.4	16QAM	3	0	18.74	18.75	18.88		
1.4	16QAM	3	1	18.79	18.79	18.81		
1.4	16QAM	3	3	18.75	18.75	18.80		
1.4	16QAM	6	0	18.81	18.80	18.87	20.4	0



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	19.21	19.29	19.28		
20	QPSK	1	49	18.98	19.06	19.04	20.4	0
20	QPSK	1	99	18.99	18.96	18.89		
20	QPSK	50	0	19.20	19.27	19.23		
20	QPSK	50	24	19.11	19.18	19.13	20.4	0
20	QPSK	50	50	19.13	19.07	19.05		
20	QPSK	100	0	19.10	19.17	19.16		
20	16QAM	1	0	19.48	19.47	19.44	20.4	0
20	16QAM	1	49	19.26	19.34	19.27		
20	16QAM	1	99	19.29	19.22	19.18		
20	16QAM	50	0	19.21	19.26	19.24	20.4	0
20	16QAM	50	24	19.12	19.18	19.15		
20	16QAM	50	50	19.15	19.06	19.04		
20	16QAM	100	0	19.11	19.16	19.14		
Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	19.22	19.29	19.20	20.4	0
15	QPSK	1	37	18.98	19.08	19.02		
15	QPSK	1	74	19.08	19.04	18.99		
15	QPSK	36	0	19.14	19.20	19.21	20.4	0
15	QPSK	36	20	19.11	19.14	19.13		
15	QPSK	36	39	19.16	19.08	19.06		
15	QPSK	75	0	19.10	19.15	19.13	20.4	0
15	16QAM	1	0	19.38	19.45	19.41		
15	16QAM	1	37	19.27	19.35	19.26		
15	16QAM	1	74	19.36	19.27	19.22	20.4	0
15	16QAM	36	0	19.16	19.21	19.21		
15	16QAM	36	20	19.10	19.15	19.11		
15	16QAM	36	39	19.13	19.11	19.03	20.4	0
15	16QAM	75	0	19.10	19.16	19.13		
Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	19.13	19.19	19.16	20.4	0
10	QPSK	1	25	19.01	19.07	19.01		
10	QPSK	1	49	18.97	19.01	18.95		
10	QPSK	25	0	19.12	19.17	19.13	20.4	0
10	QPSK	25	12	19.10	19.13	19.12		
10	QPSK	25	25	19.04	19.08	19.07		
10	QPSK	50	0	19.08	19.15	19.10	20.4	0
10	16QAM	1	0	19.39	19.47	19.38		
10	16QAM	1	25	19.26	19.33	19.28		
10	16QAM	1	49	19.25	19.27	19.23	20.4	0
10	16QAM	25	0	19.11	19.15	19.13		
10	16QAM	25	12	19.10	19.14	19.11		
10	16QAM	25	25	19.04	19.08	19.02	20.4	0
10	16QAM	50	0	19.08	19.15	19.09		



Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	19.08	19.13	19.07	20.4	0
5	QPSK	1	12	19.01	19.05	18.97		
5	QPSK	1	24	18.98	19.03	18.96		
5	QPSK	12	0	19.07	19.14	19.04	20.4	0
5	QPSK	12	7	19.09	19.12	19.07		
5	QPSK	12	13	19.05	19.09	19.01		
5	QPSK	25	0	19.05	19.11	19.02		
5	16QAM	1	0	19.32	19.43	19.33	20.4	0
5	16QAM	1	12	19.30	19.38	19.29		
5	16QAM	1	24	19.26	19.32	19.24		
5	16QAM	12	0	19.12	19.16	19.07	20.4	0
5	16QAM	12	7	19.08	19.13	19.06		
5	16QAM	12	13	19.02	19.11	19.02		
5	16QAM	25	0	19.07	19.12	19.05		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	19.12	19.06	18.88	20.4	0
3	QPSK	1	8	19.10	19.03	18.85		
3	QPSK	1	14	19.08	19.03	18.85		
3	QPSK	8	0	19.05	19.11	18.91	20.4	0
3	QPSK	8	4	19.08	19.10	18.92		
3	QPSK	8	7	19.05	19.09	18.88		
3	QPSK	15	0	19.05	19.09	18.88		
3	16QAM	1	0	19.29	19.36	19.17	20.4	0
3	16QAM	1	8	19.27	19.33	19.14		
3	16QAM	1	14	19.26	19.33	19.11		
3	16QAM	8	0	19.11	19.16	18.99	20.4	0
3	16QAM	8	4	19.12	19.16	18.99		
3	16QAM	8	7	19.07	19.15	18.94		
3	16QAM	15	0	19.03	19.08	18.91		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	18.90	18.97	18.90	20.4	0
1.4	QPSK	1	3	18.98	19.05	18.97		
1.4	QPSK	1	5	18.90	18.96	18.88		
1.4	QPSK	3	0	18.95	19.03	18.93		
1.4	QPSK	3	1	19.01	19.07	18.98		
1.4	QPSK	3	3	18.97	19.03	18.91		
1.4	QPSK	6	0	18.96	19.03	18.95	20.4	0
1.4	16QAM	1	0	19.19	19.26	19.18	20.4	0
1.4	16QAM	1	3	19.27	19.34	19.23		
1.4	16QAM	1	5	19.16	19.25	19.16		
1.4	16QAM	3	0	19.00	19.05	18.97		
1.4	16QAM	3	1	19.02	19.09	19.01		
1.4	16QAM	3	3	18.96	19.02	18.93		
1.4	16QAM	6	0	19.05	19.09	19.01	20.4	0

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- “special subframe S” contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

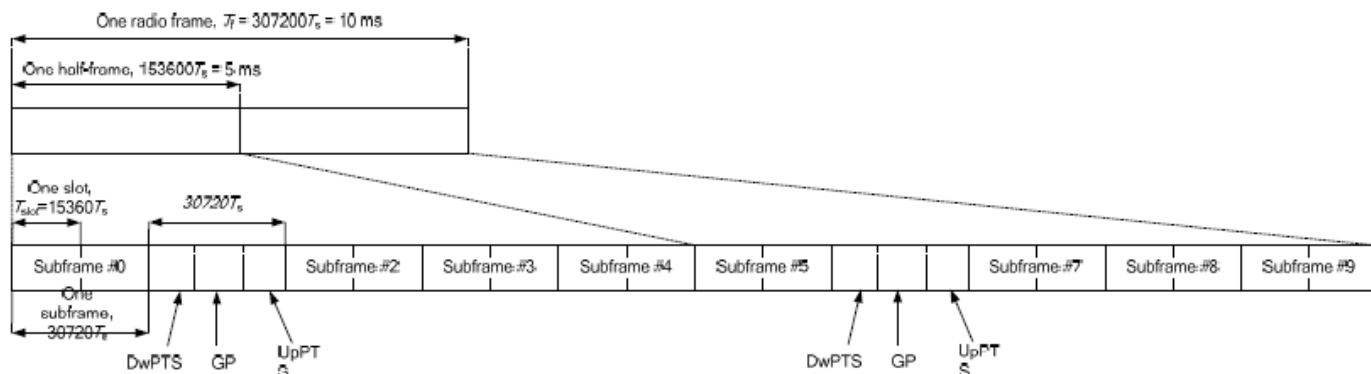


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$	-	-
8	$24144 \cdot T_s$			-		
9	$13168 \cdot T_s$			-		

Special subframe (30720·T _s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T _s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

- Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is:
 $(3+0.167)/5 = 63.3\%$
- for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is:
 $(3+0.143)/5 = 62.9\%$
- For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.



<LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	22.71	22.72	22.70		
20	QPSK	1	49	22.67	22.65	22.60	24.2	0
20	QPSK	1	99	22.61	22.61	22.62		
20	QPSK	50	0	21.67	21.69	21.66		
20	QPSK	50	24	21.63	21.64	21.61	23.2	1
20	QPSK	50	50	21.61	21.60	21.57		
20	QPSK	100	0	21.63	21.66	21.61		
20	16QAM	1	0	21.79	21.79	21.80	23.2	1
20	16QAM	1	49	21.73	21.70	21.73		
20	16QAM	1	99	21.69	21.65	21.68		
20	16QAM	50	0	20.67	20.71	20.69	22.2	2
20	16QAM	50	24	20.69	20.69	20.65		
20	16QAM	50	50	20.65	20.63	20.60		
20	16QAM	100	0	20.65	20.65	20.66		
Channel				37825	38000	38175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	22.68	22.68	22.68		
15	QPSK	1	37	22.63	22.61	22.60	24.2	0
15	QPSK	1	74	22.61	22.64	22.61		
15	QPSK	36	0	21.64	21.64	21.61		
15	QPSK	36	20	21.62	21.64	21.64	23.2	1
15	QPSK	36	39	21.62	21.60	21.57		
15	QPSK	75	0	21.66	21.60	21.59		
15	16QAM	1	0	21.78	21.79	21.76	23.2	1
15	16QAM	1	37	21.71	21.69	21.72		
15	16QAM	1	74	21.69	21.74	21.71		
15	16QAM	36	0	20.62	20.59	20.59	22.2	2
15	16QAM	36	20	20.66	20.61	20.58		
15	16QAM	36	39	20.59	20.58	20.51		
15	16QAM	75	0	20.64	20.65	20.63		
Channel				37800	38000	38200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	22.66	22.69	22.66		
10	QPSK	1	25	22.67	22.63	22.64	24.2	0
10	QPSK	1	49	22.64	22.62	22.64		
10	QPSK	25	0	21.63	21.63	21.59		
10	QPSK	25	12	21.60	21.62	21.62	23.2	1
10	QPSK	25	25	21.61	21.63	21.57		
10	QPSK	50	0	21.62	21.61	21.62		
10	16QAM	1	0	21.74	21.77	21.74	23.2	1
10	16QAM	1	25	21.74	21.73	21.73		
10	16QAM	1	49	21.69	21.69	21.68		
10	16QAM	25	0	20.61	20.61	20.55	22.2	2
10	16QAM	25	12	20.64	20.66	20.64		
10	16QAM	25	25	20.63	20.60	20.61		
10	16QAM	50	0	20.67	20.63	20.59		



Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	22.59	22.65	22.66	24.2	0
5	QPSK	1	12	22.62	22.65	22.64		
5	QPSK	1	24	22.58	22.59	22.59		
5	QPSK	12	0	21.59	21.61	21.65	23.2	1
5	QPSK	12	7	21.62	21.63	21.63		
5	QPSK	12	13	21.56	21.56	21.56		
5	QPSK	25	0	21.57	21.59	21.62		
5	16QAM	1	0	21.71	21.60	21.70	23.2	1
5	16QAM	1	12	21.75	21.69	21.75		
5	16QAM	1	24	21.72	21.69	21.70		
5	16QAM	12	0	20.63	20.61	20.61	22.2	2
5	16QAM	12	7	20.61	20.61	20.66		
5	16QAM	12	13	20.53	20.61	20.67		
5	16QAM	25	0	20.61	20.59	20.61		

<WLAN Conducted Power>**General Note:**

1. For each antenna, transmit power in SISO operation is larger than (or equal to) the power in MIMO operation, RF exposure compliance of MIMO mode can be deduced from the compliance simultaneous transmission of antennas operating in SISO mode.
2. Per KDB 248227 D01v02r02, the simultaneous SAR provisions in KDB publication 447498 should be applied to determine simultaneous transmission SAR test exclusion for WiFi MIMO. If the sum of 1g single transmission chain SAR measurements is $< 1.6\text{W/kg}$ and SAR peak to location ratio ≤ 0.04 , no additional SAR measurements for MIMO.
3. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
4. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
5. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
6. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is $\leq 0.4\text{ W/kg}$, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is $> 0.4\text{ W/kg}$, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is $\leq 0.8\text{ W/kg}$ or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is $> 0.8\text{ W/kg}$, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is $\leq 1.2\text{ W/kg}$ or all required channels are tested.

**<2.4GHz WLAN ANT 1>**

2.4GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11b 1Mbps	1	2412	11.01	13.00	99.02
		6	2437	11.09	13.00	
		11	2462	11.17	13.00	
	802.11g 6Mbps	1	2412	10.02	12.00	93.58
		6	2437	10.11	12.00	
		11	2462	10.18	12.00	
	802.11n-HT20 MCS0	1	2412	10.02	12.00	94.40
		6	2437	10.10	12.00	
		11	2462	10.14	12.00	
	802.11n-HT40 MCS0	3	2422	10.09	12.00	89.42
		6	2437	10.14	12.00	
		9	2452	10.19	12.00	
	802.11ac-VHT20 MCS0	1	2412	10.01	12.00	94.06
		6	2437	10.02	12.00	
		11	2462	10.18	12.00	
	802.11ac-VHT40 MCS0	3	2422	10.06	12.00	87.85
		6	2437	10.11	12.00	
		9	2452	10.23	12.00	

<2.4GHz WLAN ANT 2>

2.4GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11b 1Mbps	1	2412	11.26	13.00	98.70
		6	2437	11.59	13.00	
		11	2462	11.37	13.00	
	802.11g 6Mbps	1	2412	10.12	12.00	94.39
		6	2437	10.57	12.00	
		11	2462	10.08	12.00	
	802.11n-HT20 MCS0	1	2412	10.17	12.00	93.65
		6	2437	10.61	12.00	
		11	2462	10.00	12.00	
	802.11n-HT40 MCS0	3	2422	10.40	12.00	87.74
		6	2437	10.32	12.00	
		9	2452	10.36	12.00	
	802.11ac-VHT20 MCS0	1	2412	10.10	12.00	93.14
		6	2437	10.22	12.00	
		11	2462	10.08	12.00	
	802.11ac-VHT40 MCS0	3	2422	10.25	12.00	87.74
		6	2437	10.27	12.00	
		9	2452	10.30	12.00	

<2.4GHz WLAN ANT 1+2>

2.4GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11b 1Mbps	1	2412	14.13	16.00	99.02
		6	2437	14.34	16.00	
		11	2462	14.34	16.00	
	802.11g 6Mbps	1	2412	13.01	15.00	94.44
		6	2437	13.41	15.00	
		11	2462	13.06	15.00	
	802.11n-HT20 MCS0	1	2412	13.01	15.00	94.40
		6	2437	13.39	15.00	
		11	2462	13.02	15.00	
	802.11n-HT40 MCS0	3	2422	13.22	15.00	87.74
		6	2437	13.26	15.00	
		9	2452	13.25	15.00	
	802.11ac-VHT20 MCS0	1	2412	13.05	15.00	93.14
		6	2437	13.16	15.00	
		11	2462	13.07	15.00	
	802.11ac-VHT40 MCS0	3	2422	13.12	15.00	88.57
		6	2437	13.24	15.00	
		9	2452	13.26	15.00	

<5GHz WLAN ANT1>

5.2GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	36	5180	10.45	12.00	94.39
		40	5200	10.45	12.00	
		44	5220	10.37	12.00	
		48	5240	10.51	12.00	
	802.11n-HT20 MCS0	36	5180	10.91	12.00	94.00
		40	5200	10.74	12.00	
		44	5220	10.41	12.00	
		48	5240	10.82	12.00	
	802.11n-HT40 MCS0	38	5190	10.98	12.00	89.47
		46	5230	10.43	12.00	
	802.11ac-VHT20 MCS0	36	5180	11.00	12.00	94.06
		40	5200	10.72	12.00	
		44	5220	10.37	12.00	
		48	5240	10.89	12.00	
	802.11ac-VHT40 MCS0	38	5190	11.03	12.00	89.91
		46	5230	10.40	12.00	
	802.11ac-VHT80 MCS0	42	5210	10.88	12.00	95.17

5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	52	5260	10.48	12.00	94.39
		56	5280	10.48	12.00	
		60	5300	10.43	12.00	
		64	5320	10.44	12.00	
	802.11n-HT20 MCS0	52	5260	10.79	12.00	94.00
		56	5280	10.79	12.00	
		60	5300	10.40	12.00	
		64	5320	10.83	12.00	
	802.11n-HT40 MCS0	54	5270	10.99	12.00	89.47
		62	5310	10.44	12.00	
	802.11ac-VHT20 MCS0	52	5260	10.78	12.00	94.06
		56	5280	10.70	12.00	
		60	5300	10.32	12.00	
		64	5320	10.79	12.00	
	802.11ac-VHT40 MCS0	54	5270	10.96	12.00	89.91
		62	5310	10.38	12.00	
	802.11ac-VHT80 MCS0	58	5290	10.77	12.00	95.17

5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	100	5500	10.49	12.00	94.39
		116	5580	10.37	12.00	
		124	5620	10.49	12.00	
		132	5660	10.39	12.00	
		140	5700	10.39	12.00	
	802.11n-HT20 MCS0	100	5500	10.79	12.00	94.00
		116	5580	10.32	12.00	
		124	5620	10.79	12.00	
		132	5660	10.72	12.00	
		140	5700	10.50	12.00	
	802.11n-HT40 MCS0	102	5510	10.83	12.00	89.47
		110	5550	10.47	12.00	
		126	5630	10.48	12.00	
		134	5670	10.65	12.00	
	802.11ac-VHT20 MCS0	100	5500	10.84	12.00	94.06
		116	5580	10.29	12.00	
		124	5620	10.83	12.00	
		132	5660	10.77	12.00	
		140	5700	10.50	12.00	
	802.11ac-VHT40 MCS0	102	5510	10.90	12.00	89.91
		110	5550	10.32	12.00	
		126	5630	10.52	12.00	
		134	5670	10.77	12.00	
	802.11ac-VHT80 MCS0	106	5530	10.44	12.00	95.17
		122	5610	10.33	12.00	



<5GHz WLAN ANT2>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	10.35	12.00	94.39
		40	5200	10.30	12.00	
		44	5220	10.05	12.00	
		48	5240	10.08	12.00	
	802.11n-HT20 MCS0	36	5180	10.39	12.00	94.00
		40	5200	10.36	12.00	
		44	5220	10.13	12.00	
		48	5240	10.09	12.00	
	802.11n-HT40 MCS0	38	5190	10.51	12.00	89.42
		46	5230	10.29	12.00	
	802.11ac-VHT20 MCS0	36	5180	10.45	12.00	94.06
		40	5200	10.40	12.00	
		44	5220	10.07	12.00	
		48	5240	10.31	12.00	
	802.11ac-VHT40 MCS0	38	5190	10.53	12.00	89.31
		46	5230	10.27	12.00	
	802.11ac-VHT80 MCS0	42	5210	10.35	12.00	95.50

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	CH 52	5260	10.00	12.00	94.39
		56	5280	10.01	12.00	
		60	5300	10.10	12.00	
		64	5320	10.12	12.00	
	802.11n-HT20 MCS0	52	5260	10.12	12.00	94.00
		56	5280	10.02	12.00	
		60	5300	10.02	12.00	
		64	5320	10.14	12.00	
	802.11n-HT40 MCS0	54	5270	10.33	12.00	89.42
		62	5310	10.21	12.00	
	802.11ac-VHT20 MCS0	52	5260	10.15	12.00	94.06
		56	5280	10.20	12.00	
		60	5300	10.01	12.00	
		64	5320	10.22	12.00	
	802.11ac-VHT40 MCS0	54	5270	10.39	12.00	89.31
		62	5310	10.19	12.00	
	802.11ac-VHT80 MCS0	58	5290	10.28	12.00	95.50

5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	100	5500	10.25	12.00	94.39
		116	5580	10.03	12.00	
		124	5620	10.22	12.00	
		132	5660	10.15	12.00	
		140	5700	10.15	12.00	
	802.11n-HT20 MCS0	100	5500	10.05	12.00	94.00
		116	5580	10.01	12.00	
		124	5620	10.05	12.00	
		132	5660	10.01	12.00	
		140	5700	10.04	12.00	
	802.11n-HT40 MCS0	102	5510	10.18	12.00	89.42
		110	5550	10.15	12.00	
		126	5630	10.11	12.00	
		134	5670	10.12	12.00	
	802.11ac-VHT20 MCS0	100	5500	10.14	12.00	94.06
		116	5580	10.00	12.00	
		124	5620	10.10	12.00	
		132	5660	10.14	12.00	
		140	5700	10.03	12.00	
	802.11ac-VHT40 MCS0	102	5510	10.18	12.00	89.31
		110	5550	10.05	12.00	
		126	5630	10.20	12.00	
		134	5670	10.20	12.00	
	802.11ac-VHT80 MCS0	106	5530	10.20	12.00	95.50
		122	5610	10.15	12.00	

<5GHz WLAN ANT1+2>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	13.59	15.00	94.39
		40	5200	13.59	15.00	
		44	5220	13.30	15.00	
		48	5240	13.35	15.00	
	802.11n-HT20 MCS0	36	5180	13.77	15.00	93.07
		40	5200	13.56	15.00	
		44	5220	13.33	15.00	
		48	5240	13.56	15.00	
	802.11n-HT40 MCS0	38	5190	13.85	15.00	87.62
		46	5230	13.42	15.00	
	802.11ac-VHT20 MCS0	36	5180	13.40	15.00	94.00
		40	5200	13.39	15.00	
		44	5220	13.20	15.00	
		48	5240	13.31	15.00	
	802.11ac-VHT40 MCS0	38	5190	13.78	15.00	89.23
		46	5230	13.36	15.00	
	802.11ac-VHT80 MCS0	42	5210	13.84	15.00	95.17

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	13.32	15.00	94.39
		56	5280	13.30	15.00	
		60	5300	13.24	15.00	
		64	5320	13.38	15.00	
	802.11n-HT20 MCS0	52	5260	13.48	15.00	93.07
		56	5280	13.44	15.00	
		60	5300	13.29	15.00	
		64	5320	13.51	15.00	
	802.11n-HT40 MCS0	54	5270	13.81	15.00	87.62
		62	5310	13.46	15.00	
	802.11ac-VHT20 MCS0	52	5260	13.19	15.00	94.00
		56	5280	13.23	15.00	
		60	5300	13.23	15.00	
		64	5320	13.40	15.00	
	802.11ac-VHT40 MCS0	54	5270	13.79	15.00	89.23
		62	5310	13.33	15.00	
	802.11ac-VHT80 MCS0	58	5290	13.55	15.00	95.17

5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	100	5500	13.34	15.00	94.39
		116	5580	13.19	15.00	
		124	5620	13.30	15.00	
		132	5660	13.27	15.00	
		140	5700	13.29	15.00	
	802.11n-HT20 MCS0	100	5500	13.50	15.00	93.07
		116	5580	13.17	15.00	
		124	5620	13.25	15.00	
		132	5660	13.27	15.00	
		140	5700	13.27	15.00	
	802.11n-HT40 MCS0	102	5510	13.67	15.00	87.62
		110	5550	13.42	15.00	
		126	5630	13.42	15.00	
		134	5670	13.51	15.00	
	802.11ac-VHT20 MCS0	100	5500	13.29	15.00	94.00
		116	5580	13.05	15.00	
		124	5620	13.29	15.00	
		132	5660	13.25	15.00	
		140	5700	13.14	15.00	
	802.11ac-VHT40 MCS0	102	5510	13.57	15.00	89.23
		110	5550	13.23	15.00	
		126	5630	13.27	15.00	
		134	5670	13.52	15.00	
	802.11ac-VHT80 MCS0	106	5530	13.35	15.00	95.17
		122	5610	13.34	15.00	

13. Bluetooth Exclusions Applied

Mode Band	Average power(dBm)	
	BR/EDR	LE
2.4GHz Bluetooth	8	6

Note:

- Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$
for 1-g SAR and ≤ 7.5 for 10-g Product Specific SAR
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison


Bluetooth Max Power (dBm)	Separation Distance (mm)	Frequency (GHz)	exclusion thresholds
8	15	2.48	0.63

Note:

Per KDB 447498 D01v06, when the minimum test separation distance is 15 mm, the test exclusion threshold is 0.63 which is ≤ 3 , SAR testing is not required.

14. Antenna Location

<Mobile Phone>

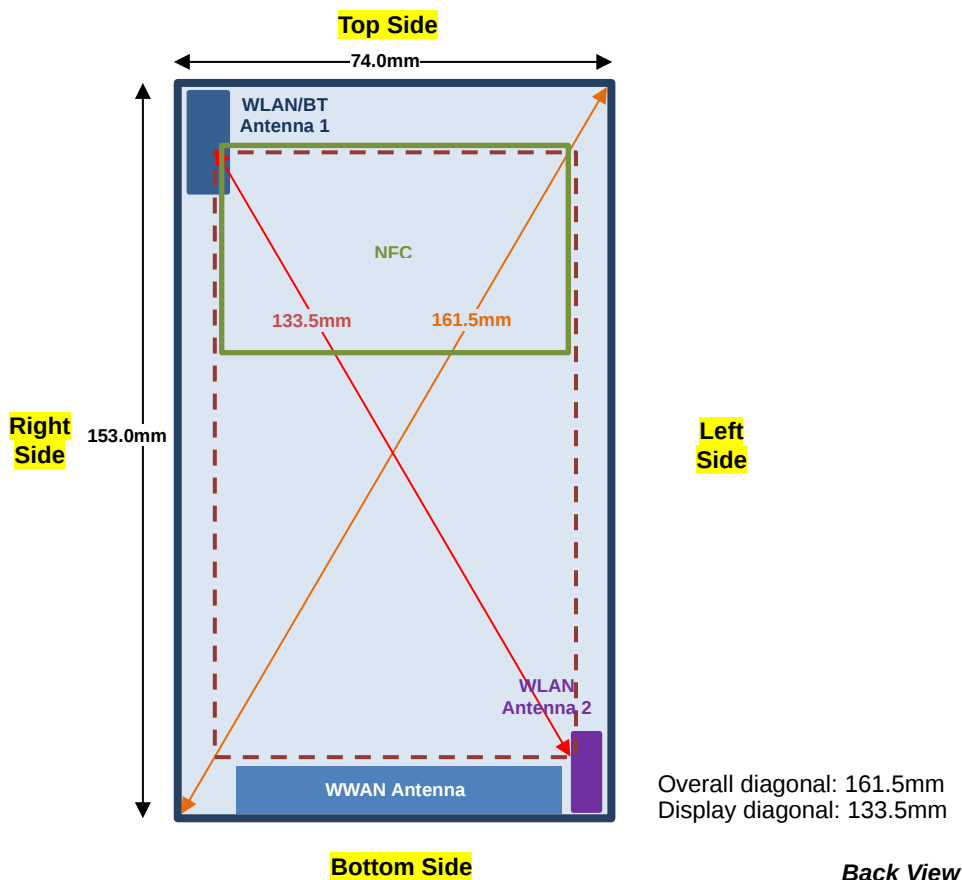

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN	≤ 25mm	≤ 25mm	>25 mm	≤ 25mm	≤ 25mm	≤ 25mm
BT & WLAN Ant 1	≤ 25mm	≤ 25mm	≤ 25mm	>25 mm	≤ 25mm	>25 mm
WLAN Ant 2	≤ 25mm	≤ 25mm	>25 mm	≤ 25mm	>25 mm	≤ 25mm
WLAN MIMO	≤ 25mm	≤ 25mm	≤ 25mm	≤ 25mm	≤ 25mm	≤ 25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN	Yes	Yes	No	Yes	Yes	Yes
BT & WLAN Ant 1	Yes	Yes	Yes	No	Yes	No
WLAN Ant 2	Yes	Yes	No	Yes	No	Yes
WLAN MIMO	Yes	Yes	Yes	Yes	Yes	Yes

General Note:

- Referring to KDB 941225 D06 v02r01, when the overall device length and width are $\geq 9\text{cm} \times 5\text{cm}$, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge
- Since the device supports MIMO operated, when each chain transmits at the same time that all surface is required for WLAN SAR.

15. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
 - e. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix 63.3%/62.9% = 1.006 is applied to scale-up the measured SAR result.
The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
4. When hotspot mode is enabled, power reduction will be activated to limit the maximum power of GSM1900 , WCDMA B2 / B4 and LTE B2 / B4.
5. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.
6. Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, when hotspot mode applies, 10-g Product Specific SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold, for this device only front and bottom side SAR for WWAN transmitter scaled to maximum output power is higher than 1.2W/kg of GSM1900,WCDMA B2 / B4 and LTE B2 / B4, therefore product specific SAR is necessary.
7. For 5.3GHz/5.5GHz WLAN product specific SAR is necessary, due to an overall diagonal dimension is > 16 cm.

**GSM Note:**

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode.
2. Other configurations of GSM / GPRS are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.
3. Power reduction which is triggered by hotspot mode is implemented in GSM1900 band, for hotspot mode SAR testing EUT was set in reduced power mode and GPRS 4 Tx slot due to its highest frame-average power.

UMTS Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B17 / B5 / B4 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

15.1 Head SAR
<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (4 Tx slots)	Right Cheek	0mm	189	836.4	27.96	29.50	1.426	-0.06	0.217	0.309
	GSM850	GPRS (4 Tx slots)	Right Tilted	0mm	189	836.4	27.96	29.50	1.426	-0.05	0.165	0.235
01	GSM850	GPRS (4 Tx slots)	Left Cheek	0mm	189	836.4	27.96	29.50	1.426	0.02	0.267	0.381
	GSM850	GPRS (4 Tx slots)	Left Tilted	0mm	189	836.4	27.96	29.50	1.426	-0.04	0.167	0.238
02	GSM1900	GPRS (4 Tx slots)	Right Cheek	0mm	661	1880	24.16	25.50	1.361	-0.07	0.064	0.087
	GSM1900	GPRS (4 Tx slots)	Right Tilted	0mm	661	1880	24.16	25.50	1.361	0.14	0.024	0.033
	GSM1900	GPRS (4 Tx slots)	Left Cheek	0mm	661	1880	24.16	25.50	1.361	0.15	0.051	0.069
	GSM1900	GPRS (4 Tx slots)	Left Tilted	0mm	661	1880	24.16	25.50	1.361	0.08	0.026	0.035

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
03	WCDMA II	RMC 12.2Kbps	Right Cheek	0mm	9400	1880	22.56	23.40	1.213	0.11	0.088	0.107
	WCDMA II	RMC 12.2Kbps	Right Tilted	0mm	9400	1880	22.56	23.40	1.213	0.18	0.033	0.040
	WCDMA II	RMC 12.2Kbps	Left Cheek	0mm	9400	1880	22.56	23.40	1.213	0.02	0.073	0.089
	WCDMA II	RMC 12.2Kbps	Left Tilted	0mm	9400	1880	22.56	23.40	1.213	0.13	0.036	0.044
04	WCDMA IV	RMC 12.2Kbps	Right Cheek	0mm	1413	1732.6	22.46	23.40	1.242	0.18	0.093	0.115
	WCDMA IV	RMC 12.2Kbps	Right Tilted	0mm	1413	1732.6	22.46	23.40	1.242	-0.18	0.014	0.017
	WCDMA IV	RMC 12.2Kbps	Left Cheek	0mm	1413	1732.6	22.46	23.40	1.242	0.11	0.049	0.061
	WCDMA IV	RMC 12.2Kbps	Left Tilted	0mm	1413	1732.6	22.46	23.40	1.242	0.07	0.015	0.019
	WCDMA V	RMC 12.2Kbps	Right Cheek	0mm	4132	826.4	23.06	24.20	1.300	0	0.209	0.272
	WCDMA V	RMC 12.2Kbps	Right Tilted	0mm	4132	826.4	23.06	24.20	1.300	-0.04	0.151	0.196
05	WCDMA V	RMC 12.2Kbps	Left Cheek	0mm	4132	826.4	23.06	24.20	1.300	0	0.258	0.335
	WCDMA V	RMC 12.2Kbps	Left Tilted	0mm	4132	826.4	23.06	24.20	1.300	-0.02	0.145	0.189



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	0	Right Cheek	0mm	19100	1900	22.28	23.40	1.294	-0.14	0.078	0.101
	LTE Band 2	20M	QPSK	50	0	Right Cheek	0mm	19100	1900	21.24	22.40	1.306	0.12	0.055	0.072
	LTE Band 2	20M	QPSK	1	0	Right Tilted	0mm	19100	1900	22.28	23.40	1.294	-0.08	0.030	0.039
	LTE Band 2	20M	QPSK	50	0	Right Tilted	0mm	19100	1900	21.24	22.40	1.306	0.11	0.025	0.033
06	LTE Band 2	20M	QPSK	1	0	Left Cheek	0mm	19100	1900	22.28	23.40	1.294	-0.18	0.081	0.105
	LTE Band 2	20M	QPSK	50	0	Left Cheek	0mm	19100	1900	21.24	22.40	1.306	-0.18	0.058	0.076
	LTE Band 2	20M	QPSK	1	0	Left Tilted	0mm	19100	1900	22.28	23.40	1.294	0.15	0.027	0.035
	LTE Band 2	20M	QPSK	50	0	Left Tilted	0mm	19100	1900	21.24	22.40	1.306	0.12	0.020	0.026
07	LTE Band 4	20M	QPSK	1	0	Right Cheek	0mm	20175	1732.5	22.41	23.40	1.256	0.1	0.084	0.106
	LTE Band 4	20M	QPSK	50	0	Right Cheek	0mm	20175	1732.5	21.41	22.40	1.256	0.03	0.065	0.082
	LTE Band 4	20M	QPSK	1	0	Right Tilted	0mm	20175	1732.5	22.41	23.40	1.256	-0.08	0.018	0.023
	LTE Band 4	20M	QPSK	50	0	Right Tilted	0mm	20175	1732.5	21.41	22.40	1.256	-0.09	0.013	0.016
	LTE Band 4	20M	QPSK	1	0	Left Cheek	0mm	20175	1732.5	22.41	23.40	1.256	0.02	0.049	0.062
	LTE Band 4	20M	QPSK	50	0	Left Cheek	0mm	20175	1732.5	21.41	22.40	1.256	0.18	0.037	0.046
	LTE Band 4	20M	QPSK	1	0	Left Tilted	0mm	20175	1732.5	22.41	23.40	1.256	0.11	0.013	0.016
	LTE Band 4	20M	QPSK	50	0	Left Tilted	0mm	20175	1732.5	21.41	22.40	1.256	0.18	0.011	0.014
	LTE Band 5	10M	QPSK	1	0	Right Cheek	0mm	20525	836.5	22.58	24.20	1.452	0.11	0.202	0.293
	LTE Band 5	10M	QPSK	25	0	Right Cheek	0mm	20525	836.5	21.73	23.20	1.403	-0.02	0.164	0.230
	LTE Band 5	10M	QPSK	1	0	Right Tilted	0mm	20525	836.5	22.58	24.20	1.452	-0.05	0.161	0.234
	LTE Band 5	10M	QPSK	25	0	Right Tilted	0mm	20525	836.5	21.73	23.20	1.403	-0.02	0.125	0.175
08	LTE Band 5	10M	QPSK	1	0	Left Cheek	0mm	20525	836.5	22.58	24.20	1.452	-0.01	0.225	0.327
	LTE Band 5	10M	QPSK	25	0	Left Cheek	0mm	20525	836.5	21.73	23.20	1.403	0.02	0.186	0.261
	LTE Band 5	10M	QPSK	1	0	Left Tilted	0mm	20525	836.5	22.58	24.20	1.452	0	0.161	0.234
	LTE Band 5	10M	QPSK	25	0	Left Tilted	0mm	20525	836.5	21.73	23.20	1.403	-0.07	0.131	0.184
	LTE Band 13	10M	QPSK	1	0	Right Cheek	0mm	23230	782	22.70	24.20	1.413	-0.06	0.174	0.246
	LTE Band 13	10M	QPSK	25	0	Right Cheek	0mm	23230	782	21.67	23.20	1.422	-0.07	0.148	0.211
	LTE Band 13	10M	QPSK	1	0	Right Tilted	0mm	23230	782	22.70	24.20	1.413	0.03	0.143	0.202
	LTE Band 13	10M	QPSK	25	0	Right Tilted	0mm	23230	782	21.67	23.20	1.422	0.17	0.138	0.196
09	LTE Band 13	10M	QPSK	1	0	Left Cheek	0mm	23230	782	22.70	24.20	1.413	0.04	0.195	0.275
	LTE Band 13	10M	QPSK	25	0	Left Cheek	0mm	23230	782	21.67	23.20	1.422	-0.12	0.166	0.236
	LTE Band 13	10M	QPSK	1	0	Left Tilted	0mm	23230	782	22.70	24.20	1.413	0.01	0.150	0.212
	LTE Band 13	10M	QPSK	25	0	Left Tilted	0mm	23230	782	21.67	23.20	1.422	-0.06	0.127	0.181
	LTE Band 17	10M	QPSK	1	0	Right Cheek	0mm	23790	710	22.50	24.20	1.479	-0.07	0.059	0.087
	LTE Band 17	10M	QPSK	25	0	Right Cheek	0mm	23790	710	21.62	23.20	1.439	0.03	0.049	0.071
	LTE Band 17	10M	QPSK	1	0	Right Tilted	0mm	23790	710	22.50	24.20	1.479	-0.15	0.050	0.074
	LTE Band 17	10M	QPSK	25	0	Right Tilted	0mm	23790	710	21.62	23.20	1.439	-0.02	0.028	0.040
10	LTE Band 17	10M	QPSK	1	0	Left Cheek	0mm	23790	710	22.50	24.20	1.479	-0.01	0.067	0.099
	LTE Band 17	10M	QPSK	25	0	Left Cheek	0mm	23790	710	21.62	23.20	1.439	-0.02	0.056	0.081
	LTE Band 17	10M	QPSK	1	0	Left Tilted	0mm	23790	710	22.50	24.20	1.479	0.03	0.049	0.072
	LTE Band 17	10M	QPSK	25	0	Left Tilted	0mm	23790	710	21.62	23.20	1.439	0.06	0.041	0.059



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 38	20M	QPSK	1	0	Right Cheek	0mm	38000	2595	22.72	24.20	1.406	62.9	1.006	0.07	0.043	0.061
	LTE Band 38	20M	QPSK	50	0	Right Cheek	0mm	38000	2595	21.69	23.20	1.416	62.9	1.006	0.13	0.031	0.044
	LTE Band 38	20M	QPSK	1	0	Right Tilted	0mm	38000	2595	22.72	24.20	1.406	62.9	1.006	0.08	0.035	0.050
	LTE Band 38	20M	QPSK	50	0	Right Tilted	0mm	38000	2595	21.69	23.20	1.416	62.9	1.006	0.05	0.027	0.038
11	LTE Band 38	20M	QPSK	1	0	Left Cheek	0mm	38000	2595	22.72	24.20	1.406	62.9	1.006	-0.15	0.083	0.117
	LTE Band 38	20M	QPSK	50	0	Left Cheek	0mm	38000	2595	21.69	23.20	1.416	62.9	1.006	-0.02	0.063	0.090
	LTE Band 38	20M	QPSK	1	0	Left Tilted	0mm	38000	2595	22.72	24.20	1.406	62.9	1.006	0.17	0.015	0.021
	LTE Band 38	20M	QPSK	50	0	Left Tilted	0mm	38000	2595	21.69	23.20	1.416	62.9	1.006	0.03	0.013	0.019

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Ant 1	11	2462	11.17	13.00	1.523	99.02	1.010	0.16	0.112	0.172
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Ant 1	11	2462	11.17	13.00	1.523	99.02	1.010	-0.07	0.094	0.145
12	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 1	11	2462	11.17	13.00	1.523	99.02	1.010	-0.1	0.340	0.523
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Ant 1	11	2462	11.17	13.00	1.523	99.02	1.010	-0.14	0.195	0.300
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Ant 2	6	2437	11.59	13.00	1.385	98.70	1.013	-0.16	0.001	0.001
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Ant 2	6	2437	11.59	13.00	1.385	98.70	1.013	0.04	0.001	0.001
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 2	6	2437	11.59	13.00	1.385	98.70	1.013	-0.16	0.006	0.008
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Ant 2	6	2437	11.59	13.00	1.385	98.70	1.013	0.19	0.002	0.003
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 1	58	5290	10.77	12.00	1.326	95.17	1.051	0.11	0.057	0.079
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 1	58	5290	10.77	12.00	1.326	95.17	1.051	0.164	0.045	0.063
13	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 1	58	5290	10.77	12.00	1.326	95.17	1.051	-0.082	0.211	0.294
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 1	58	5290	10.77	12.00	1.326	95.17	1.051	-0.108	0.131	0.183
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 2	58	5290	10.28	12.00	1.486	95.50	1.047	0	0.001	0.002
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 2	58	5290	10.28	12.00	1.486	95.50	1.047	0	0.001	0.002
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 2	58	5290	10.28	12.00	1.486	95.50	1.047	0	0.001	0.002
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 2	58	5290	10.28	12.00	1.486	95.50	1.047	0	0.001	0.002
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 1	106	5530	10.44	12.00	1.431	95.17	1.051	0.008	0.114	0.171
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 1	106	5530	10.44	12.00	1.431	95.17	1.051	0.163	0.118	0.177
14	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 1	106	5530	10.44	12.00	1.431	95.17	1.051	-0.151	0.276	0.415
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 1	106	5530	10.44	12.00	1.431	95.17	1.051	-0.088	0.211	0.317
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 2	106	5530	10.20	12.00	1.514	95.50	1.047	0	0.001	0.002
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 2	106	5530	10.20	12.00	1.514	95.50	1.047	0	0.001	0.002
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 2	106	5530	10.20	12.00	1.514	95.50	1.047	0	0.001	0.002
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 2	106	5530	10.20	12.00	1.514	95.50	1.047	0	0.001	0.002



15.2 Hotspot SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (4 Tx slots)	Front	10mm	OFF	189	836.4	27.96	29.50	1.426	-0.14	0.223	0.318
	GSM850	GPRS (4 Tx slots)	Back	10mm	OFF	189	836.4	27.96	29.50	1.426	-0.17	0.250	0.356
15	GSM850	GPRS (4 Tx slots)	Left Side	10mm	OFF	189	836.4	27.96	29.50	1.426	0.11	0.321	0.458
	GSM850	GPRS (4 Tx slots)	Right Side	10mm	OFF	189	836.4	27.96	29.50	1.426	0	0.239	0.341
	GSM850	GPRS (4 Tx slots)	Bottom Side	10mm	OFF	189	836.4	27.96	29.50	1.426	0.07	0.109	0.155
	GSM1900	GPRS (4 Tx slots)	Front	10mm	ON	661	1880	20.33	21.70	1.371	-0.05	0.268	0.367
	GSM1900	GPRS (4 Tx slots)	Back	10mm	ON	661	1880	20.33	21.70	1.371	0.05	0.241	0.330
	GSM1900	GPRS (4 Tx slots)	Left Side	10mm	ON	661	1880	20.33	21.70	1.371	0.19	0.063	0.086
	GSM1900	GPRS (4 Tx slots)	Right Side	10mm	ON	661	1880	20.33	21.70	1.371	0.04	0.008	0.011
16	GSM1900	GPRS (4 Tx slots)	Bottom Side	10mm	ON	661	1880	20.33	21.70	1.371	-0.09	0.437	0.599

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Front	10mm	ON	9400	1880	19.30	20.40	1.288	0.02	0.396	0.510
	WCDMA II	RMC 12.2Kbps	Back	10mm	ON	9400	1880	19.30	20.40	1.288	0	0.361	0.465
	WCDMA II	RMC 12.2Kbps	Left Side	10mm	ON	9400	1880	19.30	20.40	1.288	-0.04	0.076	0.098
	WCDMA II	RMC 12.2Kbps	Right Side	10mm	ON	9400	1880	19.30	20.40	1.288	-0.12	0.016	0.021
	WCDMA II	RMC 12.2Kbps	Bottom Side	10mm	ON	9400	1880	19.30	20.40	1.288	0.01	0.727	0.937
	WCDMA II	RMC 12.2Kbps	Bottom Side	10mm	ON	9262	1852.4	19.27	20.40	1.297	0	0.661	0.857
17	WCDMA II	RMC 12.2Kbps	Bottom Side	10mm	ON	9538	1907.6	19.25	20.40	1.303	0.03	0.742	0.967
	WCDMA IV	RMC 12.2Kbps	Front	10mm	ON	1413	1732.6	19.24	20.40	1.306	0.03	0.359	0.469
	WCDMA IV	RMC 12.2Kbps	Back	10mm	ON	1413	1732.6	19.24	20.40	1.306	0	0.359	0.469
	WCDMA IV	RMC 12.2Kbps	Left Side	10mm	ON	1413	1732.6	19.24	20.40	1.306	-0.02	0.074	0.097
	WCDMA IV	RMC 12.2Kbps	Right Side	10mm	ON	1413	1732.6	19.24	20.40	1.306	-0.06	0.017	0.022
	WCDMA IV	RMC 12.2Kbps	Bottom Side	10mm	ON	1413	1732.6	19.24	20.40	1.306	-0.02	0.641	0.837
	WCDMA IV	RMC 12.2Kbps	Bottom Side	10mm	ON	1312	1712.4	19.16	20.40	1.330	-0.08	0.616	0.820
18	WCDMA IV	RMC 12.2Kbps	Bottom Side	10mm	ON	1513	1752.6	19.23	20.40	1.309	-0.04	0.652	0.854
	WCDMA V	RMC 12.2Kbps	Front	10mm	OFF	4132	826.4	23.06	24.20	1.300	-0.01	0.256	0.333
	WCDMA V	RMC 12.2Kbps	Back	10mm	OFF	4132	826.4	23.06	24.20	1.300	-0.04	0.246	0.320
19	WCDMA V	RMC 12.2Kbps	Left Side	10mm	OFF	4132	826.4	23.06	24.20	1.300	-0.01	0.322	0.419
	WCDMA V	RMC 12.2Kbps	Right Side	10mm	OFF	4132	826.4	23.06	24.20	1.300	0.01	0.232	0.302
	WCDMA V	RMC 12.2Kbps	Bottom Side	10mm	OFF	4132	826.4	23.06	24.20	1.300	-0.03	0.103	0.134



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	0	Front	10mm	ON	19100	1900	19.13	20.40	1.340	0.02	0.390	0.522
	LTE Band 2	20M	QPSK	50	0	Front	10mm	ON	19100	1900	19.04	20.40	1.368	-0.01	0.397	0.543
	LTE Band 2	20M	QPSK	1	0	Back	10mm	ON	19100	1900	19.13	20.40	1.340	0.05	0.359	0.481
	LTE Band 2	20M	QPSK	50	0	Back	10mm	ON	19100	1900	19.04	20.40	1.368	0.03	0.367	0.502
	LTE Band 2	20M	QPSK	1	0	Left Side	10mm	ON	19100	1900	19.13	20.40	1.340	0	0.079	0.106
	LTE Band 2	20M	QPSK	50	0	Left Side	10mm	ON	19100	1900	19.04	20.40	1.368	0.04	0.080	0.109
	LTE Band 2	20M	QPSK	1	0	Right Side	10mm	ON	19100	1900	19.13	20.40	1.340	-0.12	0.016	0.021
	LTE Band 2	20M	QPSK	50	0	Right Side	10mm	ON	19100	1900	19.04	20.40	1.368	-0.15	0.014	0.019
	LTE Band 2	20M	QPSK	1	0	Bottom Side	10mm	ON	19100	1900	19.13	20.40	1.340	-0.04	0.739	0.990
	LTE Band 2	20M	QPSK	1	0	Bottom Side	10mm	ON	18700	1860	19.09	20.40	1.352	-0.01	0.631	0.853
	LTE Band 2	20M	QPSK	1	0	Bottom Side	10mm	ON	18900	1880	19.11	20.40	1.346	-0.07	0.662	0.891
	LTE Band 2	20M	QPSK	50	0	Bottom Side	10mm	ON	19100	1900	19.04	20.40	1.368	0.01	0.738	1.009
	LTE Band 2	20M	QPSK	50	0	Bottom Side	10mm	ON	18700	1860	18.93	20.40	1.403	-0.03	0.605	0.849
	LTE Band 2	20M	QPSK	50	0	Bottom Side	10mm	ON	18900	1880	18.88	20.40	1.419	0.01	0.650	0.922
20	LTE Band 2	20M	QPSK	100	0	Bottom Side	10mm	ON	19100	1900	18.95	20.40	1.396	-0.02	0.741	1.035
	LTE Band 4	20M	QPSK	1	0	Front	10mm	ON	20175	1732.5	19.29	20.40	1.291	0.01	0.370	0.478
	LTE Band 4	20M	QPSK	50	0	Front	10mm	ON	20175	1732.5	19.27	20.40	1.297	0.09	0.369	0.479
	LTE Band 4	20M	QPSK	1	0	Back	10mm	ON	20175	1732.5	19.29	20.40	1.291	0	0.351	0.453
	LTE Band 4	20M	QPSK	50	0	Back	10mm	ON	20175	1732.5	19.27	20.40	1.297	-0.01	0.346	0.449
	LTE Band 4	20M	QPSK	1	0	Left Side	10mm	ON	20175	1732.5	19.29	20.40	1.291	0.06	0.060	0.077
	LTE Band 4	20M	QPSK	50	0	Left Side	10mm	ON	20175	1732.5	19.27	20.40	1.297	0.09	0.059	0.077
	LTE Band 4	20M	QPSK	1	0	Right Side	10mm	ON	20175	1732.5	19.29	20.40	1.291	0.05	0.014	0.018
	LTE Band 4	20M	QPSK	50	0	Right Side	10mm	ON	20175	1732.5	19.27	20.40	1.297	0.15	0.015	0.019
	LTE Band 4	20M	QPSK	1	0	Bottom Side	10mm	ON	20175	1732.5	19.29	20.40	1.291	-0.03	0.641	0.828
	LTE Band 4	20M	QPSK	50	0	Bottom Side	10mm	ON	20175	1732.5	19.27	20.40	1.297	0.01	0.638	0.828
21	LTE Band 4	20M	QPSK	100	0	Bottom Side	10mm	ON	20175	1732.5	19.17	20.40	1.327	0.01	0.625	0.830
	LTE Band 5	10M	QPSK	1	0	Front	10mm	OFF	20525	836.5	22.58	24.20	1.452	0.09	0.262	0.380
	LTE Band 5	10M	QPSK	25	0	Front	10mm	OFF	20525	836.5	21.73	23.20	1.403	-0.01	0.212	0.297
	LTE Band 5	10M	QPSK	1	0	Back	10mm	OFF	20525	836.5	22.58	24.20	1.452	-0.01	0.237	0.344
	LTE Band 5	10M	QPSK	25	0	Back	10mm	OFF	20525	836.5	21.73	23.20	1.403	-0.03	0.196	0.275
22	LTE Band 5	10M	QPSK	1	0	Left Side	10mm	OFF	20525	836.5	22.58	24.20	1.452	0.02	0.400	0.581
	LTE Band 5	10M	QPSK	25	0	Left Side	10mm	OFF	20525	836.5	21.73	23.20	1.403	0	0.330	0.463
	LTE Band 5	10M	QPSK	1	0	Right Side	10mm	OFF	20525	836.5	22.58	24.20	1.452	0.05	0.245	0.356
	LTE Band 5	10M	QPSK	25	0	Right Side	10mm	OFF	20525	836.5	21.73	23.20	1.403	-0.02	0.198	0.278
	LTE Band 5	10M	QPSK	1	0	Bottom Side	10mm	OFF	20525	836.5	22.58	24.20	1.452	0.16	0.119	0.173
	LTE Band 5	10M	QPSK	25	0	Bottom Side	10mm	OFF	20525	836.5	21.73	23.20	1.403	0.1	0.096	0.135
	LTE Band 13	10M	QPSK	1	0	Front	10mm	OFF	23230	782	22.70	24.20	1.413	-0.03	0.270	0.381
	LTE Band 13	10M	QPSK	25	0	Front	10mm	OFF	23230	782	21.67	23.20	1.422	0.06	0.228	0.324
	LTE Band 13	10M	QPSK	1	0	Back	10mm	OFF	23230	782	22.70	24.20	1.413	-0.13	0.285	0.403
	LTE Band 13	10M	QPSK	25	0	Back	10mm	OFF	23230	782	21.67	23.20	1.422	-0.04	0.242	0.344
23	LTE Band 13	10M	QPSK	1	0	Left Side	10mm	OFF	23230	782	22.70	24.20	1.413	0	0.366	0.517
	LTE Band 13	10M	QPSK	25	0	Left Side	10mm	OFF	23230	782	21.67	23.20	1.422	-0.01	0.309	0.439
	LTE Band 13	10M	QPSK	1	0	Right Side	10mm	OFF	23230	782	22.70	24.20	1.413	0	0.270	0.381
	LTE Band 13	10M	QPSK	25	0	Right Side	10mm	OFF	23230	782	21.67	23.20	1.422	0.01	0.225	0.320
	LTE Band 13	10M	QPSK	1	0	Bottom Side	10mm	OFF	23230	782	22.70	24.20	1.413	0	0.061	0.086
	LTE Band 13	10M	QPSK	25	0	Bottom Side	10mm	OFF	23230	782	21.67	23.20	1.422	0.04	0.051	0.073



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 17	10M	QPSK	1	0	Front	10mm	OFF	23790	710	22.50	24.20	1.479	-0.05	0.112	0.166
	LTE Band 17	10M	QPSK	25	0	Front	10mm	OFF	23790	710	21.62	23.20	1.439	-0.02	0.097	0.140
24	LTE Band 17	10M	QPSK	1	0	Back	10mm	OFF	23790	710	22.50	24.20	1.479	-0.02	0.127	0.188
	LTE Band 17	10M	QPSK	25	0	Back	10mm	OFF	23790	710	21.62	23.20	1.439	0.03	0.107	0.154
	LTE Band 17	10M	QPSK	1	0	Left Side	10mm	OFF	23790	710	22.50	24.20	1.479	0.01	0.092	0.136
	LTE Band 17	10M	QPSK	25	0	Left Side	10mm	OFF	23790	710	21.62	23.20	1.439	0.02	0.081	0.117
	LTE Band 17	10M	QPSK	1	0	Right Side	10mm	OFF	23790	710	22.50	24.20	1.479	0.06	0.086	0.127
	LTE Band 17	10M	QPSK	25	0	Right Side	10mm	OFF	23790	710	21.62	23.20	1.439	-0.02	0.074	0.106
	LTE Band 17	10M	QPSK	1	0	Bottom Side	10mm	OFF	23790	710	22.50	24.20	1.479	0.02	0.019	0.028
	LTE Band 17	10M	QPSK	25	0	Bottom Side	10mm	OFF	23790	710	21.62	23.20	1.439	-0.08	0.016	0.023

<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 38	20M	QPSK	1	0	Front	10mm	OFF	38000	2595	22.72	24.20	1.406	62.9	1.006	-0.03	0.450	0.637
	LTE Band 38	20M	QPSK	50	0	Front	10mm	OFF	38000	2595	21.69	23.20	1.416	62.9	1.006	-0.02	0.363	0.517
	LTE Band 38	20M	QPSK	1	0	Back	10mm	OFF	38000	2595	22.72	24.20	1.406	62.9	1.006	-0.01	0.514	0.727
	LTE Band 38	20M	QPSK	50	0	Back	10mm	OFF	38000	2595	21.69	23.20	1.416	62.9	1.006	0.04	0.407	0.580
	LTE Band 38	20M	QPSK	1	0	Left Side	10mm	OFF	38000	2595	22.72	24.20	1.406	62.9	1.006	-0.05	0.061	0.086
	LTE Band 38	20M	QPSK	50	0	Left Side	10mm	OFF	38000	2595	21.69	23.20	1.416	62.9	1.006	-0.07	0.047	0.067
	LTE Band 38	20M	QPSK	1	0	Right Side	10mm	OFF	38000	2595	22.72	24.20	1.406	62.9	1.006	-0.08	0.050	0.071
	LTE Band 38	20M	QPSK	50	0	Right Side	10mm	OFF	38000	2595	21.69	23.20	1.416	62.9	1.006	-0.13	0.044	0.063
	LTE Band 38	20M	QPSK	1	0	Bottom Side	10mm	OFF	38000	2595	22.72	24.20	1.406	62.9	1.006	0	0.756	1.069
25	LTE Band 38	20M	QPSK	1	0	Bottom Side	10mm	OFF	37850	2580	22.71	24.20	1.409	62.9	1.006	0.01	0.779	1.104
	LTE Band 38	20M	QPSK	1	0	Bottom Side	10mm	OFF	38150	2610	22.70	24.20	1.413	62.9	1.006	0	0.764	1.086
	LTE Band 38	20M	QPSK	50	0	Bottom Side	10mm	OFF	38000	2595	21.69	23.20	1.416	62.9	1.006	-0.03	0.580	0.826
	LTE Band 38	20M	QPSK	50	0	Bottom Side	10mm	OFF	37850	2580	21.67	23.20	1.422	62.9	1.006	-0.02	0.593	0.849
	LTE Band 38	20M	QPSK	50	0	Bottom Side	10mm	OFF	38150	2610	21.66	23.20	1.426	62.9	1.006	0.01	0.596	0.855
	LTE Band 38	20M	QPSK	100	0	Bottom Side	10mm	OFF	38000	2595	21.66	23.20	1.426	62.9	1.006	-0.01	0.576	0.826

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
26	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 1	11	2462	11.17	13.00	1.523	99.02	1.010	-0.13	0.048	0.074
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 1	11	2462	11.17	13.00	1.523	99.02	1.010	-0.18	0.040	0.062
	WLAN2.4GHz	802.11b 1Mbps	Left Side	10mm	Ant 1	11	2462	11.17	13.00	1.523	99.02	1.010	-0.01	0.001	0.002
	WLAN2.4GHz	802.11b 1Mbps	Right Side	10mm	Ant 1	11	2462	11.17	13.00	1.523	99.02	1.010	-0.08	0.037	0.057
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10mm	Ant 1	11	2462	11.17	13.00	1.523	99.02	1.010	-0.15	0.033	0.051
	WLAN2.4GHz	802.11b 1Mbps	Bottom Side	10mm	Ant 1	11	2462	11.17	13.00	1.523	99.02	1.010	0	0.001	0.002
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 2	6	2437	11.59	13.00	1.385	98.70	1.013	0.07	0.016	0.022
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 2	6	2437	11.59	13.00	1.385	98.70	1.013	0.13	0.019	0.027
	WLAN2.4GHz	802.11b 1Mbps	Left Side	10mm	Ant 2	6	2437	11.59	13.00	1.385	98.70	1.013	0.08	0.010	0.014
	WLAN2.4GHz	802.11b 1Mbps	Right Side	10mm	Ant 2	6	2437	11.59	13.00	1.385	98.70	1.013	-0.17	0.001	0.001
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10mm	Ant 2	6	2437	11.59	13.00	1.385	98.70	1.013	0	0.001	0.001
	WLAN2.4GHz	802.11b 1Mbps	Bottom Side	10mm	Ant 2	6	2437	11.59	13.00	1.385	98.70	1.013	0.12	0.004	0.006

**15.3 Product Specific Accessory SAR****<GSM SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
27	GSM1900	GPRS (4 Tx slots)	Bottom Side	0mm	661	1880	24.13	25.50	1.371	-0.14	0.904	1.239

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
28	WCDMA II	RMC 12.2Kbps	Bottom Side	0mm	9538	1907.6	22.52	23.40	1.225	0.01	1.820	2.229
	WCDMA II	RMC 12.2Kbps	Bottom Side	0mm	9262	1852.4	22.51	23.40	1.227	-0.01	1.550	1.903
	WCDMA II	RMC 12.2Kbps	Bottom Side	0mm	9400	1880	22.56	23.40	1.213	-0.01	1.710	2.075
29	WCDMA IV	RMC 12.2Kbps	Bottom Side	0mm	1513	1752.6	22.45	23.40	1.245	-0.14	1.070	1.332

<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
30	LTE Band 2	20M	QPSK	1	0	Bottom Side	0mm	19100	1900	22.28	23.40	1.294	0.03	1.440	1.864
31	LTE Band 4	20M	QPSK	1	0	Bottom Side	0mm	20175	1732.5	22.41	23.40	1.256	-0.09	1.080	1.357

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 1	58	5290	10.77	12.00	1.326	95.17	1.051	-0.007	0.161	0.224
32	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 1	58	5290	10.77	12.00	1.326	95.17	1.051	-0.113	0.253	0.353
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 1	58	5290	10.77	12.00	1.326	95.17	1.051	0.17	0.003	0.004
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 1	58	5290	10.77	12.00	1.326	95.17	1.051	-0.17	0.100	0.139
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Ant 1	58	5290	10.77	12.00	1.326	95.17	1.051	0	0.036	0.050
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Ant 1	58	5290	10.77	12.00	1.326	95.17	1.051	0.188	0.001	0.001
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 2	58	5290	10.28	12.00	1.486	95.50	1.047	0.039	0.080	0.124
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 2	58	5290	10.28	12.00	1.486	95.50	1.047	0.114	0.098	0.152
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 2	58	5290	10.28	12.00	1.486	95.50	1.047	0.119	0.032	0.050
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 2	58	5290	10.28	12.00	1.486	95.50	1.047	0	0.003	0.004
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Ant 2	58	5290	10.28	12.00	1.486	95.50	1.047	0	0.001	0.002
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Ant 2	58	5290	10.28	12.00	1.486	95.50	1.047	0.047	0.017	0.026
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 1	106	5530	10.44	12.00	1.431	95.17	1.051	0.034	0.065	0.098
33	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 1	106	5530	10.44	12.00	1.431	95.17	1.051	0.095	0.355	0.534
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 1	106	5530	10.44	12.00	1.431	95.17	1.051	0	0.001	0.002
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 1	106	5530	10.44	12.00	1.431	95.17	1.051	0.059	0.134	0.201
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Ant 1	106	5530	10.44	12.00	1.431	95.17	1.051	0.031	0.069	0.104
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Ant 1	106	5530	10.44	12.00	1.431	95.17	1.051	0	0.001	0.002
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 2	106	5530	10.20	12.00	1.514	95.50	1.047	0.012	0.052	0.082
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 2	106	5530	10.20	12.00	1.514	95.50	1.047	0.173	0.059	0.093
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 2	106	5530	10.20	12.00	1.514	95.50	1.047	-0.14	0.013	0.021
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 2	106	5530	10.20	12.00	1.514	95.50	1.047	0	0.001	0.002
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Ant 2	106	5530	10.20	12.00	1.514	95.50	1.047	0	0.001	0.002
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Side	0mm	Ant 2	106	5530	10.20	12.00	1.514	95.50	1.047	0.161	0.007	0.012

**15.4 Body Worn Accessory SAR****<GSM SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (4 Tx slots)	Front	15mm	189	836.4	27.96	29.50	1.426	0.09	0.231	0.329
34	GSM850	GPRS (4 Tx slots)	Back	15mm	189	836.4	27.96	29.50	1.426	0.02	0.251	0.358
35	GSM1900	GPRS (4 Tx slots)	Front	15mm	810	1909.8	24.16	25.50	1.361	-0.02	0.298	0.406
	GSM1900	GPRS (4 Tx slots)	Back	15mm	810	1909.8	24.16	25.50	1.361	0.03	0.273	0.372

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
36	WCDMA II	RMC 12.2Kbps	Front	15mm	9400	1880	22.56	23.40	1.213	-0.06	0.403	0.489
	WCDMA II	RMC 12.2Kbps	Back	15mm	9400	1880	22.56	23.40	1.213	-0.01	0.383	0.465
37	WCDMA IV	RMC 12.2Kbps	Front	15mm	1413	1732.6	22.46	23.40	1.242	-0.05	0.358	0.445
	WCDMA IV	RMC 12.2Kbps	Back	15mm	1413	1732.6	22.46	23.40	1.242	-0.05	0.353	0.438
	WCDMA V	RMC 12.2Kbps	Front	15mm	4132	826.4	23.06	24.20	1.300	-0.02	0.239	0.311
38	WCDMA V	RMC 12.2Kbps	Back	15mm	4132	826.4	23.06	24.20	1.300	-0.01	0.292	0.380

<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
39	LTE Band 2	20M	QPSK	1	0	Front	15mm	19100	1900	22.28	23.40	1.294	-0.01	0.405	0.524
	LTE Band 2	20M	QPSK	50	0	Front	15mm	19100	1900	21.24	22.40	1.306	-0.02	0.325	0.425
	LTE Band 2	20M	QPSK	1	0	Back	15mm	19100	1900	22.28	23.40	1.294	0.01	0.376	0.487
	LTE Band 2	20M	QPSK	50	0	Back	15mm	19100	1900	21.24	22.40	1.306	-0.05	0.302	0.394
40	LTE Band 4	20M	QPSK	1	0	Front	15mm	20175	1732.5	22.41	23.40	1.256	0.02	0.358	0.450
	LTE Band 4	20M	QPSK	50	0	Front	15mm	20175	1732.5	21.41	22.40	1.256	-0.03	0.281	0.353
	LTE Band 4	20M	QPSK	1	0	Back	15mm	20175	1732.5	22.41	23.40	1.256	-0.03	0.351	0.441
	LTE Band 4	20M	QPSK	50	0	Back	15mm	20175	1732.5	21.41	22.40	1.256	-0.01	0.273	0.343
	LTE Band 5	10M	QPSK	1	0	Front	15mm	20525	836.5	22.58	24.20	1.452	-0.01	0.264	0.383
	LTE Band 5	10M	QPSK	25	0	Front	15mm	20525	836.5	21.73	23.20	1.403	-0.02	0.214	0.300
41	LTE Band 5	10M	QPSK	1	0	Back	15mm	20525	836.5	22.58	24.20	1.452	0.01	0.274	0.398
	LTE Band 5	10M	QPSK	25	0	Back	15mm	20525	836.5	21.73	23.20	1.403	-0.01	0.223	0.313
42	LTE Band 13	10M	QPSK	1	0	Front	15mm	23230	782	22.70	24.20	1.413	-0.01	0.291	0.411
	LTE Band 13	10M	QPSK	25	0	Front	15mm	23230	782	21.67	23.20	1.422	0.09	0.250	0.356
	LTE Band 13	10M	QPSK	1	0	Back	15mm	23230	782	22.70	24.20	1.413	-0.02	0.287	0.405
	LTE Band 13	10M	QPSK	25	0	Back	15mm	23230	782	21.67	23.20	1.422	-0.03	0.243	0.346
	LTE Band 17	10M	QPSK	1	0	Front	15mm	23790	710	22.50	24.20	1.479	0.01	0.095	0.141
	LTE Band 17	10M	QPSK	25	0	Front	15mm	23790	710	21.62	23.20	1.439	-0.11	0.082	0.118
43	LTE Band 17	10M	QPSK	1	0	Back	15mm	23790	710	22.50	24.20	1.479	0.03	0.102	0.151
	LTE Band 17	10M	QPSK	25	0	Back	15mm	23790	710	21.62	23.20	1.439	0.05	0.088	0.127



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 38	20M	QPSK	1	0	Front	15mm	38000	2595	22.72	24.20	1.406	62.9	1.006	-0.1	0.189	0.267
	LTE Band 38	20M	QPSK	50	0	Front	15mm	38000	2595	21.69	23.20	1.416	62.9	1.006	-0.11	0.145	0.207
44	LTE Band 38	20M	QPSK	1	0	Back	15mm	38000	2595	22.72	24.20	1.406	62.9	1.006	0.01	0.202	0.286
	LTE Band 38	20M	QPSK	50	0	Back	15mm	38000	2595	21.69	23.20	1.416	62.9	1.006	-0.02	0.158	0.225

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
45	WLAN2.4GHz	802.11b 1Mbps	Front	15mm	Ant 1	11	2462	11.17	13.00	1.523	99.02	1.010	-0.15	0.020	0.031
	WLAN2.4GHz	802.11b 1Mbps	Back	15mm	Ant 1	11	2462	11.17	13.00	1.523	99.02	1.010	-0.1	0.014	0.022
	WLAN2.4GHz	802.11b 1Mbps	Front	15mm	Ant 2	6	2437	11.59	13.00	1.385	98.70	1.013	-0.19	0.005	0.008
	WLAN2.4GHz	802.11b 1Mbps	Back	15mm	Ant 2	6	2437	11.59	13.00	1.385	98.70	1.013	0.17	0.008	0.011
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	15mm	Ant 1	58	5290	10.77	12.00	1.326	95.17	1.051	-0.13	0.008	0.011
46	WLAN5GHz	802.11ac-VHT80 MCS0	Back	15mm	Ant 1	58	5290	10.77	12.00	1.326	95.17	1.051	0.147	0.041	0.057
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	15mm	Ant 2	58	5290	10.28	12.00	1.486	95.50	1.047	-0.14	0.008	0.013
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	15mm	Ant 2	58	5290	10.28	12.00	1.486	95.50	1.047	0.045	0.011	0.017
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	15mm	Ant 1	106	5530	10.44	12.00	1.431	95.17	1.051	0.091	0.022	0.033
47	WLAN5GHz	802.11ac-VHT80 MCS0	Back	15mm	Ant 1	106	5530	10.44	12.00	1.431	95.17	1.051	0.065	0.101	0.152
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	15mm	Ant 2	106	5530	10.20	12.00	1.514	95.50	1.047	0.104	0.008	0.013
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	15mm	Ant 2	106	5530	10.20	12.00	1.514	95.50	1.047	0.12	0.011	0.017

16. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Portable Handset			
		Head	Body-worn	Hotspot	Product Specific
1.	WWAN (Voice) + WLAN Ant 1 + WLAN Ant 2	Yes	Yes		Yes
2.	WWAN (Data) + WLAN Ant 1 + WLAN Ant 2	Yes	Yes	Yes	Yes
3.	WWAN (Voice) + Bluetooth Ant 1 + 5GHz WLAN Ant 1 + 5GHz WLAN Ant 2		Yes		Yes
4.	WWAN (Data) + Bluetooth Ant 1 + 5GHz WLAN Ant 1 + 5GHz WLAN Ant 2		Yes		Yes

General Note:

- This device 2.4GHz WLAN supports Hotspot operation.
- 2.4GHz WLAN and Bluetooth share the same antenna 1, and cannot transmit simultaneously.
- For each antenna, transmit power in SISO operation is larger than (or equal to) the power in MIMO operation, RF exposure compliance of MIMO mode can be deduced from the compliance simultaneous transmission of antennas operating in SISO mode.
- The worst case WLAN reported SAR for each configuration was used for SAR summation. Therefore, the following summations represent the absolute worst cases for simultaneous transmission with WLAN.
- The Scaled SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - Scalar SAR summation < 1.6W/kg.
 - $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
- For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v06 based on the formula below.
 - $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x] \text{ W/kg}$ for test separation distances $\leq 50 \text{ mm}$; where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
 - When the minimum separation distance is < 5mm, the distance is used 5mm to determine SAR test exclusion.
 - 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

Bluetooth Max Power	Exposure Position	Body worn
	Test separation	15 mm
8dBm	Estimated 1g SAR (W/kg)	0.084W/kg

Bluetooth Max Power	Exposure Position	Product Specific
	Test separation	5 mm
8dBm	Estimated 10g SAR (W/kg)	0.101W/kg

16.1 Head Exposure Conditions

<For Type-A>

WWAN Band		Exposure Position	1	2	3	4	5	1+2+3 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)	1+2+5 Summed 10g SAR (W/kg)	1+3+4 Summed 10g SAR (W/kg)
			WWAN	2.4GHz WLAN Ant 1	2.4GHz WLAN Ant 2	5GHz WLAN Ant 1	5GHz WLAN Ant 2				
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)				
GSM	GSM850	Right Cheek	0.309	0.172	0.001	0.171	0.002	0.482	0.482	0.483	0.481
		Right Tilted	0.235	0.145	0.001	0.177	0.002	0.381	0.414	0.382	0.413
		Left Cheek	0.381	0.523	0.008	0.415	0.002	0.912	0.798	0.906	0.804
		Left Tilted	0.238	0.300	0.003	0.317	0.002	0.541	0.557	0.540	0.558
	GSM1900	Right Cheek	0.087	0.172	0.001	0.171	0.002	0.260	0.260	0.261	0.259
		Right Tilted	0.033	0.145	0.001	0.177	0.002	0.179	0.212	0.180	0.211
		Left Cheek	0.069	0.523	0.008	0.415	0.002	0.600	0.486	0.594	0.492
		Left Tilted	0.035	0.300	0.003	0.317	0.002	0.338	0.354	0.337	0.355
WCDMA	WCDMA II	Right Cheek	0.107	0.172	0.001	0.171	0.002	0.280	0.280	0.281	0.279
		Right Tilted	0.040	0.145	0.001	0.177	0.002	0.186	0.219	0.187	0.218
		Left Cheek	0.089	0.523	0.008	0.415	0.002	0.620	0.506	0.614	0.512
		Left Tilted	0.044	0.300	0.003	0.317	0.002	0.347	0.363	0.346	0.364
	WCDMA IV	Right Cheek	0.115	0.172	0.001	0.171	0.002	0.288	0.288	0.289	0.287
		Right Tilted	0.017	0.145	0.001	0.177	0.002	0.163	0.196	0.164	0.195
		Left Cheek	0.061	0.523	0.008	0.415	0.002	0.592	0.478	0.586	0.484
		Left Tilted	0.019	0.300	0.003	0.317	0.002	0.322	0.338	0.321	0.339
LTE	LTE Band 2	Right Cheek	0.101	0.172	0.001	0.171	0.002	0.274	0.274	0.275	0.273
		Right Tilted	0.039	0.145	0.001	0.177	0.002	0.185	0.218	0.186	0.217
		Left Cheek	0.105	0.523	0.008	0.415	0.002	0.636	0.522	0.630	0.528
		Left Tilted	0.035	0.300	0.003	0.317	0.002	0.338	0.354	0.337	0.355
	LTE Band 4	Right Cheek	0.106	0.172	0.001	0.171	0.002	0.279	0.279	0.280	0.278
		Right Tilted	0.023	0.145	0.001	0.177	0.002	0.169	0.202	0.170	0.201
		Left Cheek	0.062	0.523	0.008	0.415	0.002	0.593	0.479	0.587	0.485
		Left Tilted	0.016	0.300	0.003	0.317	0.002	0.319	0.335	0.318	0.336
	LTE Band 17	Right Cheek	0.087	0.172	0.001	0.171	0.002	0.260	0.260	0.261	0.259
		Right Tilted	0.074	0.145	0.001	0.177	0.002	0.220	0.253	0.221	0.252
		Left Cheek	0.099	0.523	0.008	0.415	0.002	0.630	0.516	0.624	0.522
		Left Tilted	0.072	0.300	0.003	0.317	0.002	0.375	0.391	0.374	0.392



<For Type-B>

WWAN Band		Exposure Position	1	2	3	4	5	1+2+3 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)	1+2+5 Summed 10g SAR (W/kg)	1+3+4 Summed 10g SAR (W/kg)
			WWAN	2.4GHz WLAN Ant 1	2.4GHz WLAN Ant 2	5GHz WLAN Ant 1	5GHz WLAN Ant 2				
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)				
GSM	GSM850	Right Cheek	0.309	0.172	0.001	0.171	0.002	0.482	0.482	0.483	0.481
		Right Tilted	0.235	0.145	0.001	0.177	0.002	0.381	0.414	0.382	0.413
		Left Cheek	0.381	0.523	0.008	0.415	0.002	0.912	0.798	0.906	0.804
		Left Tilted	0.238	0.300	0.003	0.317	0.002	0.541	0.557	0.540	0.558
	GSM1900	Right Cheek	0.087	0.172	0.001	0.171	0.002	0.260	0.260	0.261	0.259
		Right Tilted	0.033	0.145	0.001	0.177	0.002	0.179	0.212	0.180	0.211
		Left Cheek	0.069	0.523	0.008	0.415	0.002	0.600	0.486	0.594	0.492
		Left Tilted	0.035	0.300	0.003	0.317	0.002	0.338	0.354	0.337	0.355
WCDMA	WCDMA V	Right Cheek	0.272	0.172	0.001	0.171	0.002	0.445	0.445	0.446	0.444
		Right Tilted	0.196	0.145	0.001	0.177	0.002	0.342	0.375	0.343	0.374
		Left Cheek	0.335	0.523	0.008	0.415	0.002	0.866	0.752	0.860	0.758
		Left Tilted	0.189	0.300	0.003	0.317	0.002	0.492	0.508	0.491	0.509
LTE	LTE Band 5	Right Cheek	0.293	0.172	0.001	0.171	0.002	0.466	0.466	0.467	0.465
		Right Tilted	0.234	0.145	0.001	0.177	0.002	0.380	0.413	0.381	0.412
		Left Cheek	0.327	0.523	0.008	0.415	0.002	0.858	0.744	0.852	0.750
		Left Tilted	0.234	0.300	0.003	0.317	0.002	0.537	0.553	0.536	0.554
	LTE Band 13	Right Cheek	0.246	0.172	0.001	0.171	0.002	0.419	0.419	0.420	0.418
		Right Tilted	0.202	0.145	0.001	0.177	0.002	0.348	0.381	0.349	0.380
		Left Cheek	0.275	0.523	0.008	0.415	0.002	0.806	0.692	0.800	0.698
		Left Tilted	0.212	0.300	0.003	0.317	0.002	0.515	0.531	0.514	0.532
	LTE Band 17	Right Cheek	0.087	0.172	0.001	0.171	0.002	0.260	0.260	0.261	0.259
		Right Tilted	0.074	0.145	0.001	0.177	0.002	0.220	0.253	0.221	0.252
		Left Cheek	0.099	0.523	0.008	0.415	0.002	0.630	0.516	0.624	0.522
		Left Tilted	0.072	0.300	0.003	0.317	0.002	0.375	0.391	0.374	0.392
	LTE Band 38	Right Cheek	0.061	0.172	0.001	0.171	0.002	0.234	0.234	0.235	0.233
		Right Tilted	0.050	0.145	0.001	0.177	0.002	0.196	0.229	0.197	0.228
		Left Cheek	0.117	0.523	0.008	0.415	0.002	0.648	0.534	0.642	0.540
		Left Tilted	0.021	0.300	0.003	0.317	0.002	0.324	0.340	0.323	0.341



16.2 Hotspot Exposure Conditions

<For Type-A>

WWAN Band		Exposure Position	1	2	3	1+2+3 Summed 1g SAR (W/kg)
			WWAN 1g SAR (W/kg)	2.4GHz WLAN Ant 1 1g SAR (W/kg)	2.4GHz WLAN Ant 2 1g SAR (W/kg)	
GSM	GSM850	Front	0.318	0.074	0.022	0.414
		Back	0.356	0.062	0.027	0.445
		Left side	0.458	0.002	0.014	0.474
		Right side	0.341	0.057	0.001	0.399
		Top side		0.051	0.001	0.052
		Bottom side	0.155	0.002	0.006	0.163
	GSM1900	Front	0.367	0.074	0.022	0.463
		Back	0.330	0.062	0.027	0.419
		Left side	0.086	0.002	0.014	0.102
		Right side	0.011	0.057	0.001	0.069
		Top side		0.051	0.001	0.052
		Bottom side	0.599	0.002	0.006	0.607
WCDMA	WCDMA II	Front	0.510	0.074	0.022	0.606
		Back	0.465	0.062	0.027	0.554
		Left side	0.098	0.002	0.014	0.114
		Right side	0.021	0.057	0.001	0.079
		Top side		0.051	0.001	0.052
		Bottom side	0.967	0.002	0.006	0.975
	WCDMA IV	Front	0.469	0.074	0.022	0.565
		Back	0.469	0.062	0.027	0.558
		Left side	0.097	0.002	0.014	0.113
		Right side	0.022	0.057	0.001	0.080
		Top side		0.051	0.001	0.052
		Bottom side	0.854	0.002	0.006	0.862
LTE	LTE Band 2	Front	0.543	0.074	0.022	0.639
		Back	0.502	0.062	0.027	0.591
		Left side	0.109	0.002	0.014	0.125
		Right side	0.021	0.057	0.001	0.079
		Top side		0.051	0.001	0.052
		Bottom side	1.035	0.002	0.006	1.043
	LTE Band 4	Front	0.479	0.074	0.022	0.575
		Back	0.453	0.062	0.027	0.542
		Left side	0.077	0.002	0.014	0.093
		Right side	0.019	0.057	0.001	0.077
		Top side		0.051	0.001	0.052
		Bottom side	0.830	0.002	0.006	0.838
	LTE Band 17	Front	0.166	0.074	0.022	0.262
		Back	0.188	0.062	0.027	0.277
		Left side	0.136	0.002	0.014	0.152
		Right side	0.127	0.057	0.001	0.185
		Top side		0.051	0.001	0.052
		Bottom side	0.028	0.002	0.006	0.036



<For Type-B>

WWAN Band		Exposure Position	1	2	3	1+2+3 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN Ant 1	2.4GHz WLAN Ant 2	
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	
GSM	GSM850	Front	0.318	0.074	0.022	0.414
		Back	0.356	0.062	0.027	0.445
		Left side	0.458	0.002	0.014	0.474
		Right side	0.341	0.057	0.001	0.399
		Top side		0.051	0.001	0.052
		Bottom side	0.155	0.002	0.006	0.163
	GSM1900	Front	0.367	0.074	0.022	0.463
		Back	0.330	0.062	0.027	0.419
		Left side	0.086	0.002	0.014	0.102
		Right side	0.011	0.057	0.001	0.069
		Top side		0.051	0.001	0.052
		Bottom side	0.599	0.002	0.006	0.607
WCDMA	WCDMA V	Front	0.333	0.074	0.022	0.429
		Back	0.320	0.062	0.027	0.409
		Left side	0.419	0.002	0.014	0.435
		Right side	0.302	0.057	0.001	0.360
		Top side		0.051	0.001	0.052
		Bottom side	0.134	0.002	0.006	0.142
LTE	LTE Band 5	Front	0.380	0.074	0.022	0.476
		Back	0.344	0.062	0.027	0.433
		Left side	0.581	0.002	0.014	0.597
		Right side	0.356	0.057	0.001	0.414
		Top side		0.051	0.001	0.052
		Bottom side	0.173	0.002	0.006	0.181
	LTE Band 13	Front	0.381	0.074	0.022	0.477
		Back	0.403	0.062	0.027	0.492
		Left side	0.517	0.002	0.014	0.533
		Right side	0.381	0.057	0.001	0.439
		Top side		0.051	0.001	0.052
		Bottom side	0.086	0.002	0.006	0.094
	LTE Band 17	Front	0.166	0.074	0.022	0.262
		Back	0.188	0.062	0.027	0.277
		Left side	0.136	0.002	0.014	0.152
		Right side	0.127	0.057	0.001	0.185
		Top side		0.051	0.001	0.052
		Bottom side	0.028	0.002	0.006	0.036
	LTE Band 38	Front	0.637	0.074	0.022	0.733
		Back	0.727	0.062	0.027	0.816
		Left side	0.086	0.002	0.014	0.102
		Right side	0.071	0.057	0.001	0.129
		Top side		0.051	0.001	0.052
		Bottom side	1.104	0.002	0.006	1.112

16.3 Product Specific Exposure Conditions

Remark:

- According to KDB 648474 D04v01r03, for WWAN / 2.4GHz WLAN SAR ("") was excluded, due to Hotspot SAR was < 1.2W/kg.

<For Type-A>

WWAN Band		Exposure Position	1	2	3	4	5	6	1+2+3 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)	1+2+5 Summed 10g SAR (W/kg)	1+3+4 Summed 10g SAR (W/kg)	1+4+5+6 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN Ant 1	2.4GHz WLAN Ant 2	5GHz WLAN Ant 1	5GHz WLAN Ant 2	Bluetooth Ant 1					
			10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	Estimated 10g SAR (W/kg)					
GSM	GSM1900	Front	-	-	-	0.224	0.124	0.101	-	0.348	0.124	0.224	0.449
		Back	-	-	-	0.534	0.152	0.101	-	0.686	0.152	0.534	0.787
		Left side	-	-	-	0.004	0.050	0.101	-	0.054	0.050	0.004	0.155
		Right side	-	-	-	0.201	0.004	0.101	-	0.205	0.004	0.201	0.306
		Top side	-	-	-	0.104	0.002	0.101	-	0.106	0.002	0.104	0.207
		Bottom side	1.239	-	-	0.002	0.026	0.101	1.239	1.267	1.265	1.241	1.368
WCDMA	WCDMA II	Front	-	-	-	0.224	0.124	0.101	-	0.348	0.124	0.224	0.449
		Back	-	-	-	0.534	0.152	0.101	-	0.686	0.152	0.534	0.787
		Left side	-	-	-	0.004	0.050	0.101	-	0.054	0.050	0.004	0.155
		Right side	-	-	-	0.201	0.004	0.101	-	0.205	0.004	0.201	0.306
		Top side	-	-	-	0.104	0.002	0.101	-	0.106	0.002	0.104	0.207
		Bottom side	2.229	-	-	0.002	0.026	0.101	2.229	2.257	2.255	2.231	2.358
	WCDMA IV	Front	-	-	-	0.224	0.124	0.101	-	0.348	0.124	0.224	0.449
		Back	-	-	-	0.534	0.152	0.101	-	0.686	0.152	0.534	0.787
		Left side	-	-	-	0.004	0.050	0.101	-	0.054	0.050	0.004	0.155
		Right side	-	-	-	0.201	0.004	0.101	-	0.205	0.004	0.201	0.306
		Top side	-	-	-	0.104	0.002	0.101	-	0.106	0.002	0.104	0.207
		Bottom side	1.332	-	-	0.002	0.026	0.101	1.332	1.360	1.358	1.334	1.461
LTE	LTE Band 2	Front	-	-	-	0.224	0.124	0.101	-	0.348	0.124	0.224	0.449
		Back	-	-	-	0.534	0.152	0.101	-	0.686	0.152	0.534	0.787
		Left side	-	-	-	0.004	0.050	0.101	-	0.054	0.050	0.004	0.155
		Right side	-	-	-	0.201	0.004	0.101	-	0.205	0.004	0.201	0.306
		Top side	-	-	-	0.104	0.002	0.101	-	0.106	0.002	0.104	0.207
		Bottom side	1.864	-	-	0.002	0.026	0.101	1.864	1.892	1.890	1.866	1.993
	LTE Band 4	Front	-	-	-	0.224	0.124	0.101	-	0.348	0.124	0.224	0.449
		Back	-	-	-	0.534	0.152	0.101	-	0.686	0.152	0.534	0.787
		Left side	-	-	-	0.004	0.050	0.101	-	0.054	0.050	0.004	0.155
		Right side	-	-	-	0.201	0.004	0.101	-	0.205	0.004	0.201	0.306
		Top side	-	-	-	0.104	0.002	0.101	-	0.106	0.002	0.104	0.207
		Bottom side	1.357	-	-	0.002	0.026	0.101	1.357	1.385	1.383	1.359	1.486

<For Type-B>

WWAN Band		Exposure Position	1	2	3	4	5	6	1+2+3 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)	1+2+5 Summed 10g SAR (W/kg)	1+3+4 Summed 10g SAR (W/kg)	1+4+5+6 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN Ant 1	2.4GHz WLAN Ant 2	5GHz WLAN Ant 1	5GHz WLAN Ant 2	Bluetooth Ant 1					
			10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	Estimated 10g SAR (W/kg)					
GSM	GSM1900	Front	-	-	-	0.224	0.124	0.101	-	0.348	0.124	0.224	0.449
		Back	-	-	-	0.534	0.152	0.101	-	0.686	0.152	0.534	0.787
		Left side	-	-	-	0.004	0.050	0.101	-	0.054	0.050	0.004	0.155
		Right side	-	-	-	0.201	0.004	0.101	-	0.205	0.004	0.201	0.306
		Top side	-	-	-	0.104	0.002	0.101	-	0.106	0.002	0.104	0.207
		Bottom side	1.239	-	-	0.002	0.026	0.101	1.239	1.267	1.265	1.241	1.368



16.4 Body-Worn Accessory Exposure Conditions

<For Type-A>

WWAN Band		Exposure Position	1	2	3	4	5	6	1+2+3 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)	1+2+5 Summed 10g SAR (W/kg)	1+3+4 Summed 10g SAR (W/kg)	1+4+5+6 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN Ant 1	2.4GHz WLAN Ant 2	5GHz WLAN Ant 1	5GHz WLAN Ant 2	Bluetooth Ant 1					
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	Estimated 1g SAR (W/kg)					
GSM	GSM850	Front	0.329	0.031	0.008	0.033	0.013	0.084	0.368	0.375	0.373	0.370	0.459
		Back	0.358	0.022	0.011	0.152	0.017	0.084	0.391	0.527	0.397	0.521	0.611
	GSM1900	Front	0.406	0.031	0.008	0.033	0.013	0.084	0.445	0.452	0.450	0.447	0.536
		Back	0.372	0.022	0.011	0.152	0.017	0.084	0.405	0.541	0.411	0.535	0.625
WCDMA	WCDMA II	Front	0.489	0.031	0.008	0.033	0.013	0.084	0.528	0.535	0.533	0.530	0.619
		Back	0.465	0.022	0.011	0.152	0.017	0.084	0.498	0.634	0.504	0.628	0.718
	WCDMA IV	Front	0.445	0.031	0.008	0.033	0.013	0.084	0.484	0.491	0.489	0.486	0.575
		Back	0.438	0.022	0.011	0.152	0.017	0.084	0.471	0.607	0.477	0.601	0.691
LTE	LTE Band 2	Front	0.524	0.031	0.008	0.033	0.013	0.084	0.563	0.570	0.568	0.565	0.654
		Back	0.487	0.022	0.011	0.152	0.017	0.084	0.520	0.656	0.526	0.650	0.740
	LTE Band 4	Front	0.450	0.031	0.008	0.033	0.013	0.084	0.489	0.496	0.494	0.491	0.580
		Back	0.441	0.022	0.011	0.152	0.017	0.084	0.474	0.610	0.480	0.604	0.694
	LTE Band 17	Front	0.141	0.031	0.008	0.033	0.013	0.084	0.180	0.187	0.185	0.182	0.271
		Back	0.151	0.022	0.011	0.152	0.017	0.084	0.184	0.320	0.190	0.314	0.404

<For Type-B>

WWAN Band		Exposure Position	1	2	3	4	5	6	1+2+3 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)	1+2+5 Summed 10g SAR (W/kg)	1+3+4 Summed 10g SAR (W/kg)	1+4+5+6 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN Ant 1	2.4GHz WLAN Ant 2	5GHz WLAN Ant 1	5GHz WLAN Ant 2	Bluetooth Ant 1					
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	Estimated 1g SAR (W/kg)					
GSM	GSM850	Front	0.329	0.031	0.008	0.033	0.013	0.084	0.368	0.375	0.373	0.370	0.459
		Back	0.358	0.022	0.011	0.152	0.017	0.084	0.391	0.527	0.397	0.521	0.611
	GSM1900	Front	0.406	0.031	0.008	0.033	0.013	0.084	0.445	0.452	0.450	0.447	0.536
		Back	0.372	0.022	0.011	0.152	0.017	0.084	0.405	0.541	0.411	0.535	0.625
WCDMA	WCDMA V	Front	0.311	0.031	0.008	0.033	0.013	0.084	0.350	0.357	0.355	0.352	0.633
		Back	0.380	0.022	0.011	0.152	0.017	0.084	0.413	0.549	0.419	0.543	0.513
LTE	LTE Band 5	Front	0.383	0.031	0.008	0.033	0.013	0.084	0.422	0.429	0.427	0.424	0.651
		Back	0.398	0.022	0.011	0.152	0.017	0.084	0.431	0.567	0.437	0.561	0.541
	LTE Band 13	Front	0.411	0.031	0.008	0.033	0.013	0.084	0.450	0.457	0.455	0.452	0.658
		Back	0.405	0.022	0.011	0.152	0.017	0.084	0.438	0.574	0.444	0.568	0.271
	LTE Band 17	Front	0.141	0.031	0.008	0.033	0.013	0.084	0.180	0.187	0.185	0.182	0.404
		Back	0.151	0.022	0.011	0.152	0.017	0.084	0.184	0.320	0.190	0.314	0.397
	LTE Band 38	Front	0.267	0.031	0.008	0.033	0.013	0.084	0.306	0.313	0.311	0.308	0.539
		Back	0.286	0.022	0.011	0.152	0.017	0.084	0.319	0.455	0.325	0.449	0.459

**17. Spot Check Verification Data Section****<Head SAR>**

Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Original Model (FCC ID : APYHR000248)					Spot Check Model (FCC ID : APYHR000249)					Deviation
							Average Power (dBm)	Tune-Up Limit (dBm)	Duty Cycle %	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Average Power (dBm)	Tune-Up Limit (dBm)	Duty Cycle %	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	
WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 1	11	2462	11.17	13.00	99.02	0.340	0.523	11.17	13.00	99.02	0.317	0.488	-6.7%
WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 2	6	2437	11.59	13.00	98.70	0.006	0.008	11.59	13.00	98.70	0.004	0.006	-25.0%
WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 1	58	5290	10.77	12.00	95.17	0.211	0.294	10.77	12.00	95.17	0.178	0.248	-15.6%
WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 2	58	5290	10.28	12.00	95.50	0.001	0.002	10.28	12.00	95.50	0.001	0.002	0.0%
WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 1	106	5530	10.44	12.00	95.17	0.276	0.415	10.44	12.00	95.17	0.241	0.362	-12.8%
WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 2	106	5530	10.20	12.00	95.50	0.001	0.002	10.20	12.00	95.50	0.001	0.002	0.0%

<Hotspot SAR>

Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Original Model (FCC ID : APYHR000248)					Spot Check Model (FCC ID : APYHR000249)					Deviation
							Average Power (dBm)	Tune-Up Limit (dBm)	Duty Cycle %	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Average Power (dBm)	Tune-Up Limit (dBm)	Duty Cycle %	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	
WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 1	11	2462	11.17	13.00	99.02	0.048	0.074	11.17	13.00	99.02	0.038	0.058	-21.6%
WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 2	6	2437	11.59	13.00	98.70	0.019	0.027	11.59	13.00	98.70	0.014	0.020	-25.9%

<Product specific SAR>

Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Original Model (FCC ID : APYHR000248)					Spot Check Model (FCC ID : APYHR000249)					Deviation
							Average Power (dBm)	Tune-Up Limit (dBm)	Duty Cycle %	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Average Power (dBm)	Tune-Up Limit (dBm)	Duty Cycle %	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	
WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 1	58	5290	10.77	12.00	95.17	0.253	0.353	10.77	12.00	95.17	0.226	0.315	-10.8%
WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 2	58	5290	10.28	12.00	95.50	0.098	0.152	10.28	12.00	95.50	0.104	0.162	6.6%
WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 1	106	5530	10.44	12.00	95.17	0.355	0.534	10.44	12.00	95.17	0.294	0.442	-17.2%
WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 2	106	5530	10.20	12.00	95.50	0.059	0.093	10.20	12.00	95.50	0.057	0.090	-3.2%

<Body-Worn SAR>

Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Original Model (FCC ID : APYHR000248)					Spot Check Model (FCC ID : APYHR000249)					Deviation
							Average Power (dBm)	Tune-Up Limit (dBm)	Duty Cycle %	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Average Power (dBm)	Tune-Up Limit (dBm)	Duty Cycle %	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	
WLAN2.4GHz	802.11b 1Mbps	Front	15mm	Ant 1	11	2462	11.17	13.00	99.02	0.020	0.031	11.17	13.00	99.02	0.013	0.020	-35.5%
WLAN2.4GHz	802.11b 1Mbps	Back	15mm	Ant 2	6	2437	11.59	13.00	98.70	0.008	0.011	11.59	13.00	98.70	0.005	0.007	-36.4%
WLAN5GHz	802.11ac-VHT80 MCS0	Back	15mm	Ant 1	58	5290	10.77	12.00	95.17	0.041	0.057	10.77	12.00	95.17	0.032	0.045	-21.1%
WLAN5GHz	802.11ac-VHT80 MCS0	Back	15mm	Ant 2	58	5290	10.28	12.00	95.50	0.011	0.017	10.28	12.00	95.50	0.012	0.019	11.8%
WLAN5GHz	802.11ac-VHT80 MCS0	Back	15mm	Ant 1	106	5530	10.44	12.00	95.17	0.101	0.152	10.44	12.00	95.17	0.086	0.129	-15.1%
WLAN5GHz	802.11ac-VHT80 MCS0	Back	15mm	Ant 2	106	5530	10.20	12.00	95.50	0.011	0.017	10.20	12.00	95.50	0.009	0.014	-17.6%

Note:

The SAR verification of the worst configurations in 2.4GHz WLAN / Bluetooth and 5GHz WLAN is reported in this section, the deviation among the verification and the original results is within $\pm 20\%$ (when reported SAR > 0.1) and justify the referenced SAR results are representative of the performance of this device

Test Engineer : San Lin Steven Chang Iran Wang and Tommy Chen

18. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	$1/k^{(b)}$	$1/\sqrt{3}$	$1/\sqrt{6}$	$1/\sqrt{2}$

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) k is the coverage factor

Table 16.1. Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
Measurement System							
Probe Calibration	6.00	N	1	1	1	6.0	6.0
Axial Isotropy	4.70	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.60	R	1.732	0.7	0.7	3.9	3.9
Boundary Effects	1.00	R	1.732	1	1	0.6	0.6
Linearity	4.70	R	1.732	1	1	2.7	2.7
System Detection Limits	1.00	R	1.732	1	1	0.6	0.6
Modulation Response	4.68	R	1.732	1	1	2.7	2.7
Readout Electronics	0.30	N	1	1	1	0.3	0.3
Response Time	0.00	R	1.732	1	1	0.0	0.0
Integration Time	2.60	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.00	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.00	R	1.732	1	1	1.7	1.7
Probe Positioner	0.40	R	1.732	1	1	0.2	0.2
Probe Positioning	2.90	R	1.732	1	1	1.7	1.7
Max. SAR Eval.	2.00	R	1.732	1	1	1.2	1.2
Test Sample Related							
Device Positioning	3.03	N	1	1	1	3.0	3.0
Device Holder	3.60	N	1	1	1	3.6	3.6
Power Drift	5.00	R	1.732	1	1	2.9	2.9
Power Scaling	0.00	R	1.732	1	1	0.0	0.0
Phantom and Setup							
Phantom Uncertainty	6.10	R	1.732	1	1	3.5	3.5
SAR correction	0.00	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.03	N	1	0.78	0.71	0.0	0.0
Liquid Conductivity (target)	5.00	R	1.732	0.78	0.71	2.3	2.0
Liquid Conductivity (mea.)	2.50	R	1.732	0.78	0.71	1.1	1.0
Temp. unc. - Conductivity	3.68	R	1.732	0.78	0.71	1.7	1.5
Liquid Permittivity Repeatability	0.02	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.00	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.50	R	1.732	0.23	0.26	0.3	0.4
Temp. unc. - Permittivity	0.84	R	1.732	0.23	0.26	0.1	0.1
Combined Std. Uncertainty						11.6%	11.6%
Coverage Factor for 95 %						K=2	K=2
Expanded STD Uncertainty						23.2%	23.1%

Table 16.2. Uncertainty Budget for frequency range 300 MHz to 3 GHz

Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
Measurement System							
Probe Calibration	6.55	N	1	1	1	6.6	6.6
Axial Isotropy	4.70	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.60	R	1.732	0.7	0.7	3.9	3.9
Boundary Effects	2.00	R	1.732	1	1	1.2	1.2
Linearity	4.70	R	1.732	1	1	2.7	2.7
System Detection Limits	1.00	R	1.732	1	1	0.6	0.6
Modulation Response	4.68	R	1.732	1	1	2.7	2.7
Readout Electronics	0.30	N	1	1	1	0.3	0.3
Response Time	0.00	R	1.732	1	1	0.0	0.0
Integration Time	2.60	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.00	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.00	R	1.732	1	1	1.7	1.7
Probe Positioner	0.40	R	1.732	1	1	0.2	0.2
Probe Positioning	6.70	R	1.732	1	1	3.9	3.9
Max. SAR Eval.	4.00	R	1.732	1	1	2.3	2.3
Test Sample Related							
Device Positioning	3.03	N	1	1	1	3.0	3.0
Device Holder	3.60	N	1	1	1	3.6	3.6
Power Drift	5.00	R	1.732	1	1	2.9	2.9
Power Scaling	0.00	R	1.732	1	1	0.0	0.0
Phantom and Setup							
Phantom Uncertainty	6.60	R	1.732	1	1	3.8	3.8
SAR correction	0.00	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.03	N	1	0.78	0.71	0.0	0.0
Liquid Conductivity (target)	5.00	R	1.732	0.78	0.71	2.3	2.0
Liquid Conductivity (mea.)	2.50	R	1.732	0.78	0.71	1.1	1.0
Temp. unc. - Conductivity	3.68	R	1.732	0.78	0.71	1.7	1.5
Liquid Permittivity Repeatability	0.02	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.00	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.50	R	1.732	0.23	0.26	0.3	0.4
Temp. unc. - Permittivity	0.84	R	1.732	0.23	0.26	0.1	0.1
Combined Std. Uncertainty						12.7%	12.6%
Coverage Factor for 95 %						K=2	K=2
Expanded STD Uncertainty						25.4%	25.3%

Table 16.3. Uncertainty Budget for frequency range 3 GHz to 6 GHz

19. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [8] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [9] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [10] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.
- [11] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [12] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.