

Report No. : E5/2018/30007 Page : 1 of 202

SAR TEST REPORT



The following samples were submitted and identified on behalf of the client as:

Equipment Under Test Company Name	Smart phone SHARP CORPORATION, Mobile Communication B.U.
Company Address	2-13-1, Hachihonmatsu-Iida, Higashi-hiroshima-shi, Hiroshima, 739-0192, Japan
Standards	IEEE/ANSI C95.1-1992, IEEE 1528-2013,
	KDB248227D01v02r02,KDB865664D01v01r04,
	KDB865664D02v01r02,KDB941225D01v03r01,
	KDB941225D06v02r01,KDB447498D01v06,
	KDB648474D04v01r03, KDB941225D05v02r05
FCC ID	APYHRO00261
Date of Receipt	Mar. 20, 2018
Date of Test(s)	Apr. 03, 2018 ~ Apr. 11, 2018
Date of Issue In the configuration tested, the El	Apr. 20, 2018 JT complied with the standards specified above.

Remarks:

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Taiwan Electronic & Communication Laboratory or testing done by SGS Taiwan Electronic & Communication Laboratory in connection with distribution or use of the product described in this report must be approved by SGS Taiwan Electronic & Communication Laboratory in writing.

Signed on behalf of SGS

Clerk / Annie Chang	Engineer / Bond Tsai	Asst. Manager / John Yeh
Annie Chang	BondIsai	John Teh

Date: Apr. 20, 2018

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

f (886-2) 2298-0488



	Highest SAR Summary						
Equipment class	Frequency Band	Head (Separation 0mm)	Body-worn (Separation 10mm)	Hotspot (Separation 10mm)	product specific 10g- SAR (Separation 0 mm)	Highest Simultaneous Transmission 1g SAR(W/Kg)	
			1g SAR(W/Kg)				
Licensed	LTE B2	0.45	0.76	0.76	-		
DTS	2.4GHz WLAN	0.05	0.07	0.07	-	1.01	
NII	5GHz WLAN	0.09	0.08	-	0.34	1	
Date	of Testing	2018/04/03~2018/04/11					

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司



Report No. : E5/2018/30007 Page : 3 of 202

Revision History

Report Number	Revision	Description	Issue Date
E5/2018/30007	Rev.00	Initial creation of document	Apr. 20, 2018

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

```
f (886-2) 2298-0488
```

www.tw.sgs.com

Member of SGS Group



Report No. : E5/2018/30007 Page : 4 of 202

Contents

1. General Information	5
1.1 Testing Laboratory	5
1.2 Details of Applicant	5
1.3 Description of EUT	6
1.4 Test Environment	53
1.5 Operation Description	53
1.6 Positioning Procedure	
1.7 Evaluation Procedures	61
1.8 Probe Calibration Procedures	
1.9 The SAR Measurement System	
1.10 System Components	
1.11 SAR System Verification	70
1.12 Tissue Simulant Fluid for the Frequency Band	72
1.13 Test Standards and Limits	75
2. Summary of Results	77
3. Simultaneous Transmission Analysis	83
3.1 Estimated SAR calculation	
3.2 SPLSR evaluation and analysis	
4. Instruments List	95
5. Measurements	96
6. SAR System Performance Verification	
7. DAE & Probe Calibration Certificate	
8. Uncertainty Budget	
9. Phantom Description	
10. System Validation from Original Equipment Supplier	156

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



1. General Information

1.1 Testing Laboratory

SGS Taiwan Ltd. Electronics & Communication Laboratory			
No. 2, Keji 1 st Rd., Guishan Township, Taoyuan County, 33383, Taiwan			
Tel	+886-2-2299-3279		
Fax +886-2-2298-0488			
Internet	http://www.tw.sgs.com/		

1.2 Details of Applicant

Company Name	SHARP CORPORATION, Mobile Communication B.U.
Company Address	2-13-1, Hachihonmatsu-Iida, Higashi-hiroshima-shi, Hiroshima, 739-0192, Japan

1.2.1 Details of Manufacturer

Company Name	Sharp Corporation
Company Address	1 Takumi-cho, Sakai-ku, Sakai City,Osaka 590-8522,Japan

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



1.3 Description of EUT

EUT Name	Smart phone				
FCC ID	APYHRO00261				
Mode of Operation	 □ GSM □ GPRS □ WCDMA □ HSDPA □ HSUPA □ LTE FDD □ WLAN802.11 a/b/g/n/ac(20M/40M/80M) □ Bluetooth 				
	GSM (DTM multi class B)	1/8.3			
	GPRS (support multi class 12 max)	1/2 (1Dn4UP) 1/2.76 (1Dn3UP) 1/4.1 (1Dn2UP) 1/8.3 (1Dn1UP)			
Duty Cycle	LTE FDD		1		
	WCDMA	1			
	/LAN802.11 /b/g/n/ac(20M/40M/80M)				
	Bluetooth		1		
	GSM850	824	_	849	
	GSM1900	1850	_	1910	
	WCDMA Band II	1850	_	1910	
	WCDMA Band IV	1710	_	1755	
	WCDMA Band V	824	_	849	
TX Frequency Range	LTE FDD Band 2	1850	_	1910	
(MHz)	LTE FDD Band 4	1710 —		1755	
	LTE FDD Band 5	824 —		849	
	WiFi 2.4GHz	2400	_	2462	
	WiFi 5GHz	5150	—	5725	
	Bluetooth	2402	_	2480	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Report No. : E5/2018/30007 Page : 7 of 202

	GSM850	128	_	251
	GSM1900	512	—	810
	WCDMA Band II	9262	—	9538
	WCDMA Band IV	1312	—	1513
Oh a ran al Niemah a r	WCDMA Band V	4132	_	4233
Channel Number (ARFCN)	LTE FDD Band 2	18607	_	19193
	LTE FDD Band 4	19957	_	20393
	LTE FDD Band 5	20407	_	20643
	WiFi 2.4GHz	1	—	11
	WiFi 5GHz	36	_	140
	Bluetooth	0	_	78

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Max. SAR (1-g) (Unit: W/Kg)				
Mode	Band	Measured	Reported	Position / Channel
	GSM 850	0.22	0.27	Left Right Cheek Tilt <u>251</u> Channel
	GSM 1900	0.25	0.27	□Left ⊠Right ⊠Cheek □Tilt <u>810</u> Channel
	WCDMA Band II	0.38	0.43	□Left ⊠Right ⊠Cheek □Tilt <u>9262</u> Channel
	WCDMA Band IV	0.24	0.27	□Left ⊠Right ⊠Cheek □Tilt <u>1412</u> Channel
	WCDMA Band V	0.16	0.21	Left Right Cheek Tilt <u>4132</u> Channel
Head	LTE FDD Band 2	0.36	0.45	□Left ⊠Right ⊠Cheek □Tilt <u>19100</u> Channel
	LTE FDD Band 4	0.20	0.25	□Left ⊠Right ⊠Cheek □Tilt <u>20050</u> Channel
	LTE FDD Band 5	0.16	0.20	Left Right Cheek Tilt <u>20060</u> Channel
	WLAN802.11 b	0.05	0.05	∐Left ☐Right ⊠Cheek ☐Tilt <u>1 </u> Channel
	WLAN802.11ac(80M)5.2G	0.02	0.02	⊠Left ☐Right ⊠Cheek ☐Tilt <u>42</u> Channel
	WLAN802.11ac(80M)5.3G	0.07	0.09	Left Right Cheek Tilt <u>58</u> Channel

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Max. SAR (1-g) (Unit: W/Kg)					
Mode	Band	Measured	Reported	Position / Channel	
Head	WLAN802.11ac(80M)5.6G	0.04	0.05	∐Left ☐Right ⊠Cheek ☐Tilt <u>122</u> Channel	

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



	Max. SAR (1-	g) (Unit: W	//Kg)	
Mode	Band	Measured	Reported	Position / Channel
	GSM 850	0.32	0.39	☐Front ⊠Back <u>251</u> Channel
	GSM 1900	0.42	0.45	☐Front ⊠Back <u>810</u> Channel
	WCDMA Band II	0.57	0.65	☐Front ⊠Back <u>9262</u> Channel
	WCDMA Band IV	0.46	0.52	☐Front ⊠Back <u>1412</u> Channel
	WCDMA Band V	0.28	0.36	☐Front ⊠Back <u>4132</u> Channel
Rody worn	LTE FDD Band 2	0.60	0.76	☐Front ⊠Back <u>19100</u> Channel
Body-worn	LTE FDD Band 4	0.42	0.53	☐Front ⊠Back <u>20050</u> Channel
	LTE FDD Band 5	0.24	0.30	☐Front ⊠Back <u>20060</u> Channel
	WLAN802.11 b	0.07	0.07	☐Front ⊠Back Channel
	WLAN802.11ac(80M)5.2G	0.04	0.05	□Front ⊠Back <u>42</u> Channel
	WLAN802.11ac(80M)5.3G	0.04	0.05	☐Front ⊠Back <u>58</u> Channel
	WLAN802.11ac(80M)5.6G	0.06	0.08	☐Front ⊠Back 122 Channel

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



	Max. SAR	(1-g) (Unit:	: W/Kg)	
Mode	Band	Measured	Reported	Position / Channel
	GPRS 850 (1Dn4UP)	0.48	0.59	☐Front ⊠Back ☐Bottom ☐Right ☐Left ☐Bottom <u>251</u> Channel
	GPRS 1900 (1Dn4UP)	0.54	0.65	☐Front ⊠Back ☐Top ☐Right ☐Left ☐Bottom <u>661</u> Channel
	WCDMA Band II	0.57	0.65	☐Front ⊠Back ☐Top ☐Right ☐Left ☐Bottom <u>9262</u> Channel
	WCDMA Band IV	0.46	0.52	☐Front ⊠Back ☐Bottom ☐Right ☐Left ☐Bottom <u>1412</u> Channel
Hotspot Mode	WCDMA Band V	0.28	0.36	☐Front ⊠Back ☐Top ☐Right ☐Left ☐Bottom <u>4132</u> Channel
	LTE FDD Band 2	0.60	0.76	☐Front ⊠Back ☐Bottom ☐Right ☐Left ☐Bottom <u>19100 </u> Channel
	LTE FDD Band 4	0.42	0.53	☐Front ⊠Back ☐Top ☐Right ☐Left ☐Bottom <u>20050</u> Channel
	LTE FDD Band 5	0.24	0.30	☐Front ⊠Back ☐Top ☐Right ☐Left ☐Bottom <u>20060</u> Channel
	WLAN802.11 b	0.07	0.07	☐Front ⊠Back ☐Bottom ☐Right ☐Left ☐Bottom <u>1 </u> Channel

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

f (886-2) 2298-0488

www.tw.sgs.com



	Max. SAR (10 g) (Unit: W/Kg)										
Mode	Band	Measured	Reported	Position / Channel							
	WLAN802.11 ac(80M)5.2G	0.20	0.25	☐Front ⊠Back ☐Top ☐Right ☐Left <u>42</u> Channel							
Product specific 10-g SAR	WLAN802.11 ac(80M)5.3G	0.24	0.31	☐Front ⊠Back ☐Top ☐Right ☐Left 58 Channel							
	WLAN802.11ac(80M)5.6G	0.27	0.34	☐Front ⊠Back ☐Top ☐Right ☐Left Channel							

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



GSM 850 - conducted power table:

EUT mode	Frequency (MHz)	СН	Max. Rated Avg.	Burst average power	Source-based time average power	
	、 <i>,</i>		Power + Max.	Avg. (dBm)	Avg. (dBm)	
0014050	824.2	128	32.8	31.90	22.87	
GSM 850 (GMSK)	836.6	190	32.8	31.72	22.69	
	848.8	251	32.8	31.95	22.92	
	The divisior	n factor com	npared to the	e number of TX tir	ne slot	
	Division	n factor		1 TX ti	me slot	
	DIVISIO	TACIO		-9.03		

GPRS 850 - conducted power table:

			Burst avera	age power		
	ted Avg. Powe olerance (dBr		32.8	31	29.1	28.5
			1Dn1UP	1Dn2UP	1Dn3UP	1Dn4UP
EUT mode	(MHZ)		Avg. (dBm)	Avg. (dBm)	Avg. (dBm)	Avg. (dBm)
GPRS	824.2	128	31.90	29.12	27.71	27.30
850	836.6	190	31.72	29.31	27.88	27.35
000	848.8	251	31.95 29.38 27.85		27.63	
		Sc	ource-based tim	e average powe	er	
GPRS	824.2	128	22.87	23.10	23.45	24.29
850	836.6	190	22.69	23.29	23.62	24.34
050	848.8	251	22.92	23.36	23.59	24.62
	The div	ision fa	ctor compared	to the number o	of TX time slot	
Div	ision factor				3 TX time slot	
			-9.03	-6.02	-4.26	-3.01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



GSM 1900 - conducted power table:

EUT mode	Frequency (MHz)	СН	Max. Rated Avg.	Burst average power	Source-based time average power	
	(11172)		Power +	Avg.	Avg.	
			Max.	(dBm)	(dBm)	
0014000	1850.2	512	29.8	29.30	20.27	
GSM1900 (GMSK)	1800	661	29.8	29.42	20.39	
	1909.8	810	29.8	29.54	20.51	
	The division	n factor con	npared to th	e number of TX tir	ne slot	
	Divisio	n factor		1 TX time slot		
	DIVISIO	TACIO		-9.	.03	

GPRS 1900 - conducted power table:

			Burst avera	age power		
	ted Avg. Powe olerance (dBr		29.8	27.5	26.2	25.5
			1Dn1UP	1Dn2UP	1Dn3UP	1Dn4UP
EUT mode	(MHZ)		Avg. (dBm)	Avg. (dBm)	Avg. (dBm)	Avg. (dBm)
GPRS	1850.2	512	29.30	27.30	25.40	24.63
GPRS 1900	1880	661	29.42	27.09	25.45	24.70
1900	1909.8	810	29.54 27.10 25.30		24.56	
		Sc	ource-based tim	e average powe	er	
GPRS	1850.2	512	20.27	21.28	21.14	21.62
1900	1880	661	20.39	21.07	21.19	21.69
1900	1909.8	810	20.51	21.08	21.04	21.55
	The div	ision fa	ictor compared	to the number o	of TX time slot	
Div	ision factor		1 TX time slot	2 TX time slot	3 TX time slot	4 TX time slot
			-9.03	-6.02	-4.26	-3.01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



WCDMA Band II / Band IV / Band V - HSDPA / HSUPA Conducted power table (Unit: dBm):

	Band	l I	VCDMA	
	9262	9400	9538	
	equency (MHz)	1852.4	1880	1907.6
Max. Rated Avg.	Power+Max. Tolerance (dBm)		23.40	
3GPP Rel 99	RMC 12.2Kbps	22.82	22.81	22.65
	HSDPA Subtest-1	21.78	21.83	21.74
3GPP Rel 5	HSDPA Subtest-2	21.76	21.82	21.69
JOFF Nel J	HSDPA Subtest-3	21.34	21.33	21.16
	HSDPA Subtest-4	21.29	21.36	21.17
	HSUPA Subtest-1	21.76	21.75	21.63
	HSUPA Subtest-2	21.20	21.19	21.10
3GPP Rel 6	HSUPA Subtest-3	21.75	21.76	21.70
	HSUPA Subtest-4	21.78	21.75	21.59
	HSUPA Subtest-5	21.79	21.79	21.68

	Band	V	VCDMA I	V
	1312	1412	1513	
Fre	equency (MHz)	1712.4	1732.4	1752.6
Max. Rated Avg.	Power+Max. Tolerance (dBm)		23.40	
3GPP Rel 99	RMC 12.2Kbps	22.79	22.84	22.81
	HSDPA Subtest-1	21.79	21.83	21.75
3GPP Rel 5	HSDPA Subtest-2	21.78	21.81	21.73
JOFF Kerb	HSDPA Subtest-3	21.27	21.44	21.30
	HSDPA Subtest-4	21.30	21.37	21.29
	HSUPA Subtest-1	21.79	21.81	21.73
	HSUPA Subtest-2	21.06	21.17	21.20
3GPP Rel 6	HSUPA Subtest-3	21.78	21.87	21.74
	HSUPA Subtest-4	21.34	21.40	21.37
	HSUPA Subtest-5	21.81	21.82	21.74

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



	Band		WCDMA V	1
	TX Channel	4132	4183	4233
	Frequency (MHz)	826.4	836.6	846.6
Max. Rated Ave	g. Power+Max. Tolerance (dBm)		24.20	
3GPP Rel 99	RMC 12.2Kbps	23.07	23.05	23.03
	HSDPA Subtest-1	22.23	22.20	22.04
3GPP Rel 5	HSDPA Subtest-2	22.21	22.12	22.02
JOFF INCI J	HSDPA Subtest-3	21.79	21.86	21.80
	HSDPA Subtest-4	21.89	21.88	21.85
	HSUPA Subtest-1	22.10	22.08	22.01
	HSUPA Subtest-2	21.56	21.52	21.39
3GPP Rel 6	HSUPA Subtest-3	22.03	21.98	21.94
	HSUPA Subtest-4	22.05	21.99	21.95
	HSUPA Subtest-5	22.13	22.12	22.07

Subtests for WCDMA Release 5 HSDPA

SUB-TEST	βc	β_d	β _d (SF)	β _c /β _d	β _{HS} (Note1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15	15/15	64	12/15	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Subtests for WCDMA Release 6 HSUPA

SUB-TEST	βc	βd	β₀ (SF)	β₀/β _d	_{βнs} (Note1)	β _{ec}	β _{ed} (Note 5) (Note 6)	β _{ed} (SF)	β _{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15	15/15	64	11/15	22/15	209/225	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β _{ed} 1: 47/15 β _{ed} 2: 47/15	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	15/15	64	15/15	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

f (886-2) 2298-0488



				FDD Band 5	•							
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				1860	18700	22.06	23.2	0				
			0	1880	18900	22.15	23.2	0				
				1900	19100	22.19	23.2	0				
				1860	18700	22.06	23.2	0				
		1 RB	50	1880	18900	22.03	23.2	0				
				1900	19100	22.01	23.2	0				
				1860	18700	22.13	23.2	0				
			99	1880	18900	22.13	23.2	0				
				1900	19100	22.10	23.2	0				
				1860	18700	21.84	23.2	0-1				
	QPSK		0	1880	18900	21.98	23.2	0-1				
				1900	19100	21.94	23.2	0-1				
				1860	18700	21.91	23.2	0-1				
		50 RB	25	1880	18900	21.94	23.2	0-1				
				1900	19100	21.89	23.2	0-1				
				1860	18700	21.81	23.2	0-1				
			50	1880	18900	21.94	23.2	0-1				
				1900	19100	21.86	23.2	0-1				
				1860	18700	21.14	22.2	0-1				
		100	ORB	1880	18900	21.10	22.2	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0				
20			-	1900	19100	21.10	22.2	0-1				
				1860	18700	21.11	22.2	0-1 0-1 0-1				
			0	1880	18900	21.02	22.2					
				1900	19100	21.12	22.2	0-1				
				1860	18700	21.15	22.2					
		1 RB	50	1880	18900	21.03	22.2					
				1900	19100	21.00	22.2					
				1860	18700	21.02	22.2					
			99	1880	18900	21.07	22.2					
				1900	19100	21.05	22.2					
				1860	18700	20.81	22.2					
	16-QAM		0	1880	18900	20.86	22.2					
				1900	19100	20.83	22.2					
				1860	18700	20.85	22.2					
		50 RB	25	1880	18900	20.96	22.2					
				1900	19100	20.89	22.2					
			50	1860	18700	20.93	22.2	3GPP(dB) 0<				
			50	1880	18900	20.92	22.2					
				1900	19100	20.91	22.2					
		4.00	ססר	1860	18700	20.08	21.2					
		100F	JKD	1880	18900	20.16	21.2					
				1900	19100	20.02	21.2	0-2				

LTE FDD Band 2 / Band 4 / Band 5 - conducted power table:


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488





				FDD Band 2				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				1860	18700	20.01	21.2	0-1
			0	1880	18900	20.07	21.2	0-1
				1900	19100	20.17	21.2	0-1
				1860	18700	20.03	21.2	0-1
		1 RB	50	1880	18900	20.07	21.2	0-1
				1900	19100	20.11	21.2	0-1
				1860	18700	20.13	21.2	0-1
			99	1880	18900	20.09	21.2	0-1
				1900	19100	20.16	21.2	0-1
				1860	18700	19.84	21.2	0-2
20	64-QAM		0	1880	18900	19.85	21.2	0-2
				1900	19100	19.97	21.2	0-2
				1860	18700	19.99	21.2	0-2
		50 RB	25	1880	18900	19.87	21.2	0-2
				1900	19100	19.96	21.2	0-2
				1860	18700	19.85	21.2	0-2
			50	1880	18900	19.87	21.2	0-2
				1900	19100	19.99	21.2	0-2
				1860	18700	19.10	20.2	0-2
		100	RB	1880	18900	19.02	20.2	0-2
				1900	19100	19.04	20.2	0-2

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No. : E5/2018/30007 Page : 19 of 202

				FDD Band 2				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				1857.5	18675	22.11	23.2	0
			0	1880	18900	22.06	23.2	0
				1902.5	19125	22.05	23.2	0
				1857.5	18675	22.02	23.2	0
		1 RB	36	1880	18900	22.05	23.2	0
				1902.5	19125	22.04	23.2	0
				1857.5	18675	22.10	23.2	0
			74	1880	18900	22.05	23.2	0
				1902.5	19125	22.04	23.2	0
				1857.5	18675	21.90	23.2	0-1
	QPSK		0	1880	18900	21.89	23.2	0-1
				1902.5	19125	21.87	23.2	0-1
				1857.5	18675	21.89	23.2	0-1
		36 RB	18	1880	18900	21.92	23.2	0-1
				1902.5	19125	21.96	23.2	0-1
				1857.5	18675	21.91	23.2	0-1
			37	1880	18900	21.94	23.2	0-1
				1902.5	19125	21.99	23.2	0-1
				1857.5	18675	21.08	22.2	0-1
		75	RB	1880	18900	21.14	22.2	0-1
15				1902.5	19125	21.15	22.2	0-1
10				1857.5	18675	21.03	22.2	0-1
			0	1880	18900	21.13	22.2	0-1
				1902.5	19125	21.00	22.2	0-1
				1857.5	18675	21.15	22.2	0-1
		1 RB	36	1880	18900	21.12	22.2	0-1
				1902.5	19125	21.06	22.2	0-1
				1857.5	18675	21.09	22.2	0-1
			74	1880	18900	21.01	22.2	
				1902.5	19125	21.16	22.2	0-1
				1857.5	18675	20.92	22.2	0-2
	16-QAM		0	1880	18900	21.00	22.2	0-2
				1902.5	19125	20.97	22.2	0-2
				1857.5	18675	20.81	22.2	0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1
		36 RB	18	1880	18900	20.91	22.2	
				1902.5	19125	20.99	22.2	
				1857.5	18675	20.93	22.2	0 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-
			37	1880	18900	20.87	22.2	
				1902.5	19125	20.82	22.2	
				1857.5	18675	20.04	21.2	
		75	RB	1880	18900	20.01	21.2	
				1902.5	19125	20.15	21.2	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

f (886-2) 2298-0488





				FDD Band 2				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				1857.5	18675	20.03	21.2	0-1
			0	1880	18900	20.20	21.2	0-1
				1902.5	19125	20.13	21.2	0-1
				1857.5	18675	20.01	21.2	0-1
		1 RB	36	1880	18900	20.05	21.2	0-1
				1902.5	19125	20.09	21.2	0-1
				1857.5	18675	20.07	21.2	0-1
			74	1880	18900	20.16	21.2	0-1
				1902.5	19125	20.07	21.2	0-1
				1857.5	18675	19.91	21.2	0-2
15	64-QAM		0	1880	18900	19.87	21.2	0-2
				1902.5	19125	19.90	21.2	0-2
				1857.5	18675	19.84	21.2	0-2
		36 RB	18	1880	18900	19.94	21.2	0-2
				1902.5	19125	19.97	21.2	0-2
				1857.5	18675	19.89	21.2	0-2
			37	1880	18900	19.97	21.2	0-2
				1902.5	19125	19.96	21.2	0-2
				1857.5	18675	19.01	20.2	0-2
		75	RB	1880	18900	19.04	20.2	0-2
				1902.5	19125	19.02	20.2	0-2

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No. : E5/2018/30007 Page : 21 of 202

				FDD Band 2				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				1855	18650	22.14	23.2	0
			0	1880	18900	22.05	23.2	0
				1905	19150	22.09	23.2	0
				1855	18650	22.01	23.2	0
		1 RB	25	1880	18900	22.01	23.2	0
				1905	19150	22.16	23.2	0
				1855	18650	22.07	23.2	0
			49	1880	18900	22.08	23.2	0
				1905	19150	22.18	23.2	0
				1855	18650	21.98	23.2	0-1
	QPSK		0	1880	18900	21.91	23.2	0-1
				1905	19150	21.90	23.2	0-1
				1855	18650	21.99	23.2	0-1
		25 RB	12	1880	18900	21.89	23.2	0-1
				1905	19150	21.88	23.2	0-1
				1855	18650	21.86	23.2	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-2 0-2 0-2 0-2 0-2 0-2 0-2
			25	1880	18900	21.92	23.2	0-1
				1905	19150	21.81	23.2	0-1
				1855	18650	21.03	22.2	0-1
		50	RB	1880	18900	21.08	22.2	0-1
10				1905	19150	21.02	22.2	0-1
10				1855	18650	21.12	22.2	0-1
			0	1880	18900	21.18	22.2	0-1
				1905	19150	21.20	22.2	0-1
				1855	18650	21.18	22.2	0-1
		1 RB	25	1880	18900	21.15	22.2	0-1
				1905	19150	21.08	22.2	0-1
				1855	18650	21.09	22.2	0-1
			49	1880	18900	21.06	22.2	0-1
				1905	19150	21.09	22.2	0-1
				1855	18650	20.94	22.2	0-2
	16-QAM		0	1880	18900	20.99	22.2	0-2
				1905	19150	20.99	22.2	
				1855	18650	20.99	22.2	0 0 0-1 0-1 0-1 0-1 0-1 0-1 0-1
		25 RB	12	1880	18900	20.82	22.2	
				1905	19150	20.95	22.2	
			_	1855	18650	20.80	22.2	
			25	1880	18900	20.88	22.2	
				1905	19150	20.83	22.2	3GPP(dB) 0
				1855	18650	20.11	21.2	
		50	RB	1880	18900	20.11	21.2	
				1905	19150	20.19	21.2	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

f (886-2) 2298-0488





				FDD Band 2				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				1855	18650	20.01	21.2	0-1
			0	1880	18900	20.16	21.2	0-1
				1905	19150	20.16	21.2	0-1
				1855	18650	20.19	21.2	0-1
		1 RB	25	1880	18900	20.11	21.2	0-1
				1905	19150	20.16	21.2	0-1
				1855	18650	20.20	21.2	0-1
			49	1880	18900	20.18	21.2	0-1
				1905	19150	20.09	21.2	0-1
				1855	18650	20.00	21.2	0-2
10	64-QAM		0	1880	18900	19.87	21.2	0-2
				1905	19150	19.81	21.2	0-2
				1855	18650	19.83	21.2	0-2
		25 RB	12	1880	18900	19.88	21.2	0-2
				1905	19150	19.90	21.2	0-2
				1855	18650	19.94	21.2	0-2
			25	1880	18900	19.95	21.2	0-2
				1905	19150	19.96	21.2	0-2
				1855	18650	19.18	20.2	0-2
		50	RB	1880	18900	19.15	20.2	0-2
				1905	19150	19.03	20.2	0-2

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No. : E5/2018/30007 Page : 23 of 202

				FDD Band 2							
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				1852.5	18625	22.01	23.2	0			
			0	1880	18900	22.06	23.2	0			
				1907.5	19175	22.02	23.2	0			
				1852.5	18625	22.02	23.2	0			
		1 RB	12	1880	18900	22.04	23.2	0			
				1907.5	19175	22.17	23.2	0			
				1852.5	18625	22.06	23.2	0			
			24	1880	18900	22.16	23.2	0			
				1907.5	19175	22.03	23.2	0			
				1852.5	18625	21.97	23.2	0-1			
	QPSK		0	1880	18900	21.89	23.2	0-1			
				1907.5	19175	21.93	23.2	0-1			
				1852.5	18625	21.82	23.2	0-1			
		12 RB	6	1880	18900	21.85	23.2	0-1			
				1907.5	19175	21.92	23.2	0-1			
				1852.5	18625	21.93	23.2	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0			
			13	1880	18900	21.99	23.2	0-1			
				1907.5	19175	21.91	23.2	0-1			
				1852.5	18625	21.18	22.2	0-1			
		25	RB	1880	18900	21.12	22.2	0-1			
5			-	1907.5	19175	21.14	22.2	0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1			
Ũ				1852.5	18625	21.18	22.2	0-1			
			0	1880	18900	21.04	22.2	0-1			
				1907.5	19175	21.03	22.2	0-1			
				1852.5	18625	21.13	22.2	0-1			
		1 RB	12	1880	18900	21.02	22.2	0-1			
				1907.5	19175	21.06	22.2	0-1			
				1852.5	18625	21.03	22.2	0-1			
			24	1880	18900	21.17	22.2	0-1			
				1907.5	19175	21.18	22.2	0-1			
				1852.5	18625	20.93	22.2				
	16-QAM		0	1880	18900	20.86	22.2	0-2			
				1907.5	19175	20.86	22.2				
				1852.5	18625	20.95	22.2	0-1 0-1 0-1 0-1 0-2 0-2 0-2 0-2 0-2 0-2			
		12 RB	6	1880	18900	20.97	22.2				
				1907.5	19175	20.81	22.2				
				1852.5	18625	20.92	22.2				
			13	1880	18900	20.82	22.2				
				1907.5	19175	20.99	22.2				
				1852.5	18625	20.13	21.2				
	2	RB	1880	18900	20.01	21.2					
				1907.5	19175	20.19	21.2	0-2			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

f (886-2) 2298-0488





				FDD Band 2				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				1852.5	18625	20.02	21.2	0-1
			0	1880	18900	20.15	21.2	0-1
				1907.5	19175	20.07	21.2	0-1
				1852.5	18625	20.16	21.2	0-1
		1 RB	12	1880	18900	20.06	21.2	0-1
				1907.5	19175	20.15	21.2	0-1
				1852.5	18625	20.13	21.2	0-1
			24	1880	18900	20.01	21.2	0-1
				1907.5	19175	20.15	21.2	0-1
				1852.5	18625	19.82	21.2	0-2
5	64-QAM		0	1880	18900	19.89	21.2	0-2
				1907.5	19175	19.88	21.2	0-2
				1852.5	18625	19.81	21.2	0-2
		12 RB	6	1880	18900	19.83	21.2	0-2
				1907.5	19175	19.98	21.2	0-2
				1852.5	18625	19.94	21.2	0-2
			13	1880	18900	19.92	21.2	0-2
				1907.5	19175	19.84	21.2	0-2
				1852.5	18625	19.06	20.2	0-2
		25	RB	1880	18900	19.06	20.2	0-2
				1907.5	19175	19.15	20.2	0-2

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

f (886-2) 2298-0488



Report No. : E5/2018/30007 Page : 25 of 202

				FDD Band 2							
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				1851.5	18615	22.10	23.2	0			
			0	1880	18900	22.12	23.2	0			
				1908.5	19185	22.11	23.2	0			
				1851.5	18615	22.18	23.2	0			
		1 RB	7	1880	18900	22.16	23.2	0			
				1908.5	19185	22.02	23.2	0			
				1851.5	18615	22.07	23.2	0			
			14	1880	18900	22.13	23.2	0			
				1908.5	19185	22.10	23.2	0			
				1851.5	18615	21.86	23.2	0-1			
	QPSK		0	1880	18900	21.97	23.2	0-1			
				1908.5	19185	21.82	23.2	0-1			
				1851.5	18615	21.86	23.2	0-1			
		8 RB	4	1880	18900	21.81	23.2	0-1			
				1908.5	19185	21.91	23.2	0-1			
				1851.5	18615	21.94	23.2	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0			
			7	1880	18900	21.87	23.2	0-1			
				1908.5	19185	21.89	23.2	0-1			
				1851.5	18615	21.18	22.2	0-1			
		15	RB	1880	18900	21.06	22.2	0-1			
3				1908.5	19185	21.06	22.2	0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1			
5				1851.5	18615	21.03	22.2	0-1			
			0	1880	18900	21.07	22.2	0-1			
				1908.5	19185	21.19	22.2	0-1			
				1851.5	18615	21.04	22.2	0-1			
		1 RB	7	1880	18900	21.02	22.2	0-1			
				1908.5	19185	21.16	22.2	0-1			
				1851.5	18615	21.03	22.2	0-1			
			14	1880	18900	21.15	22.2	0-1			
				1908.5	19185	21.10	22.2	0-1			
				1851.5	18615	20.99	22.2				
	16-QAM		0	1880	18900	20.99	22.2	0-2			
				1908.5	19185	20.88	22.2				
				1851.5	18615	20.95	22.2	0 0 0 0 0 0 0-1 0-1 0-1 0-1 0-			
		8 RB	4	1880	18900	20.98	22.2				
				1908.5	19185	21.00	22.2				
				1851.5	18615	21.00	22.2				
			7	1880	18900	20.93	22.2	0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1			
				1908.5	19185	20.92	22.2				
				1851.5	18615	20.08	21.2				
	15R		RB	1880	18900	20.03	21.2				
				1908.5	19185	20.12	21.2	0-2			


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號





				FDD Band 2				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				1851.5	18615	20.16	21.2	0-1
			0	1880	18900	20.14	21.2	0-1
				1908.5	19185	20.18	21.2	0-1
				1851.5	18615	20.05	21.2	0-1
		1 RB	7	1880	18900	20.02	21.2	0-1
				1908.5	19185	20.03	21.2	0-1
				1851.5	18615	20.17	21.2	0-1
			14	1880	18900	20.07	21.2	0-1
				1908.5	19185	20.05	21.2	0-1
				1851.5	18615	19.91	21.2	0-2
3	64-QAM		0	1880	18900	19.89	21.2	0-2
				1908.5	19185	19.95	21.2	0-2
				1851.5	18615	19.83	21.2	0-2
		8 RB	4	1880	18900	19.86	21.2	0-2
				1908.5	19185	19.83	21.2	0-2
				1851.5	18615	19.89	21.2	0-2
			7	1880	18900	19.96	21.2	0-2
				1908.5	19185	19.91	21.2	0-2
				1851.5	18615	19.17	20.2	0-2
		15RB		1880	18900	19.11	20.2	0-2
				1908.5	19185	19.13	20.2	0-2

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Report No. : E5/2018/30007 Page : 27 of 202

				FDD Band 2				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				1850.7	18607	22.17	23.2	0
			0	1880	18900	22.10	23.2	0
				1909.3	19193	22.16	23.2	0
				1850.7	18607	22.06	23.2	0
		1 RB	2	1880	18900	22.18	23.2	0
				1909.3	19193	22.14	23.2	0
				1850.7	18607	22.01	23.2	0
			5	1880	18900	22.15	23.2	0
				1909.3	19193	22.06	23.2	0
				1850.7	18607	21.89	23.2	0
	QPSK		0	1880	18900	21.84	23.2	0
				1909.3	19193	21.83	23.2	0
				1850.7	18607	21.98	23.2	0
		3 RB	2	1880	18900	21.96	23.2	0
				1909.3	19193	21.93	23.2	0
				1850.7	18607	21.96	23.2	0
			3	1880	18900	21.87	23.2	0
				1909.3	19193	22.00	23.2	0
				1850.7	18607	21.13	22.2	0-1
		61	RB	1880	18900	21.09	22.2	0-1
1.4				1909.3	19193	21.11	22.2	0-1
1.4				1850.7	18607	21.11	22.2	0-1
			0	1880	18900	21.13	22.2	0-1
				1909.3	19193	21.20	22.2	0-1
				1850.7	18607	21.02	22.2	0-1
		1 RB	2	1880	18900	21.19	22.2	0-1
				1909.3	19193	21.13	22.2	0-1
				1850.7	18607	21.19	22.2	0-1
			5	1880	18900	21.15	22.2	0-1
				1909.3	19193	21.09	22.2	0-1
				1850.7	18607	20.81	22.2	0-1
	16-QAM		0	1880	18900	20.91	22.2	0-1
				1909.3	19193	20.87	22.2	0-1
				1850.7	18607	20.89	22.2	0-1
		3 RB	2	1880	18900	20.85	22.2	
				1909.3	19193	20.81	22.2	0-1
				1850.7	18607	20.96	22.2	0 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-
			3	1880	18900	20.83	22.2	
				1909.3	19193	20.95	22.2	
				1850.7	18607	20.19	21.2	
		61	RB	1880	18900	20.19	21.2	
				1909.3	19193	20.17	21.2	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





				FDD Band 2				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				1850.7	18607	20.11	21.2	0-1
			0	1880	18900	20.18	21.2	0-1
				1909.3	19193	20.05	21.2	0-1
				1850.7	18607	20.15	21.2	0-1
		1 RB	2	1880	18900	20.05	21.2	0-1
				1909.3	19193	20.03	21.2	0-1
				1850.7	18607	20.02	21.2	0-1
			5	1880	18900	20.09	21.2	0-1
				1909.3	19193	20.04	21.2	0-1
				1850.7	18607	19.87	21.2	0-1
1.4	64-QAM		0	1880	18900	19.87	21.2	0-1
				1909.3	19193	19.89	21.2	0-1
				1850.7	18607	19.89	21.2	0-1
		3 RB	2	1880	18900	19.81	21.2	0-1
				1909.3	19193	19.98	21.2	0-1
				1850.7	18607	19.81	21.2	0-1
			3	1880	18900	19.92	21.2	0-1
				1909.3	19193	19.88	21.2	0-1
				1850.7	18607	19.16	20.2	0-2
	66		RB	1880	18900	19.14	20.2	0-2
				1909.3	19193	19.07	20.2	0-2

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No. : E5/2018/30007 Page : 29 of 202

				FDD Band 4				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				1720	20050	22.10	23.2	0
			0	1732.5	20175	22.11	23.2	0
				1745	20300	22.00	23.2	0
				1720	20050	22.19	23.2	0
		1 RB	50	1732.5	20175	21.93	23.2	0
				1745	20300	21.93	23.2	0
				1720	20050	22.05	23.2	0
			99	1732.5	20175	21.95	23.2	0
				1745	20300	21.93	23.2	0
				1720	20050	21.92	23.2	0-1
	QPSK		0	1732.5	20175	21.75	23.2	0-1
				1745	20300	21.84	23.2	0-1
				1720	20050	21.96	23.2	0-1
		50 RB	25	1732.5	20175	21.72	23.2	0-1
				1745	20300	21.72	23.2	0-1
			50	1720	20050	21.83	23.2	0-1
				1732.5	20175	21.97	23.2	0-1
				1745	20300	21.75	23.2	0-1
		100RB		1720	20050	20.91	22.2	0-1
				1732.5	20175	21.01	22.2	0-1
20				1745	20300	21.05	22.2	0-1
20		1 RB	0	1720	20050	20.92	22.2	0-1
				1732.5	20175	20.99	22.2	0-1
				1745	20300	20.95	22.2	0-1
			50	1720	20050	21.08	22.2	0-1
				1732.5	20175	20.94	22.2	0-1
				1745	20300	21.07	22.2	0-1
				1720	20050	21.11	22.2	0-1
			99	1732.5	20175	20.98	22.2	0-1
				1745	20300	20.96	22.2	0-1
				1720	20050	20.72	22.2	0-2
	16-QAM		0	1732.5	20175	20.87	22.2	0-2
				1745	20300	20.74	22.2	0-2
				1720	20050	20.98	22.2	0-2
		50 RB	25	1732.5	20175	20.89	22.2	0-2
				1745	20300	20.81	22.2	0-2
			-	1720	20050	20.97	22.2	0-2
			50	1732.5	20175	20.87	22.2	0-2
				1745	20300	21.00	22.2	0-2
				1720	20050	20.07	21.2	0-2
		100)RB	1732.5	20175	20.08	21.2	0-2
				1745	20300	20.08	21.2	0-2


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號





	FDD Band 4										
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				1720	20050	20.02	21.2	0-1			
			0	1732.5	20175	20.06	21.2	0-1			
				1745	20300	20.15	21.2	0-1			
				1720	20050	19.97	21.2	0-1			
		1 RB	50	1732.5	20175	20.07	21.2	0-1			
				1745	20300	20.04	21.2	0-1			
			99	1720	20050	20.18	21.2	0-1			
				1732.5	20175	20.05	21.2	0-1			
				1745	20300	20.20	21.2	0-1			
			0	1720	20050	19.86	21.2	0-2			
20	64-QAM			1732.5	20175	19.83	21.2	0-2			
				1745	20300	19.96	21.2	0-2			
				1720	20050	19.75	21.2	0-2			
		50 RB	25	1732.5	20175	19.90	21.2	0-2			
				1745	20300	19.81	21.2	0-2			
				1720	20050	19.99	21.2	0-2			
			50	1732.5	20175	19.88	21.2	0-2			
				1745	20300	19.82	21.2	0-2			
				1720	20050	18.97	20.2	0-2			
		100)RB	1732.5	20175	19.19	20.2	0-2			
				1745	20300	19.09	20.2	0-2			

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No. : E5/2018/30007 Page : 31 of 202

				FDD Band 4				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				1717.5	20025	22.18	23.2	0
			0	1732.5	20175	22.09	23.2	0
				1747.5	20325	21.94	23.2	0
				1717.5	20025	22.12	23.2	0
		1 RB	36	1732.5	20175	22.00	23.2	0
				1747.5	20325	22.01	23.2	0
				1717.5	20025	22.15	23.2	0
			74	1732.5	20175	22.15	23.2	0
				1747.5	20325	22.13	23.2	0
				1717.5	20025	21.86	23.2	0-1
	QPSK		0	1732.5	20175	21.74	23.2	0-1
				1747.5	20325	21.87	23.2	0-1
				1717.5	20025	21.95	23.2	0-1
		36 RB	18	1732.5	20175	21.94	23.2	0-1
				1747.5	20325	21.83	23.2	0-1
			37	1717.5	20025	21.75	23.2	0-1
				1732.5	20175	21.72	23.2	0-1
				1747.5	20325	21.92	23.2	0-1
		75RB		1717.5	20025	21.11	22.2	0-1
				1732.5	20175	20.97	22.2	0-1
15					20325	20.92	22.2	0-1
10		1 RB	0	1717.5	20025	21.03	22.2	0-1
				1732.5	20175	20.96	22.2	0-1
				1747.5	20325	21.11	22.2	0-1
				1717.5	20025	21.09	22.2	0-1
			36	1732.5	20175	20.94	22.2	0-1
				1747.5	20325	21.06	22.2	0-1
				1717.5	20025	21.09	22.2	0-1
			74	1732.5	20175	21.20	22.2	0-1
				1747.5	20325	21.01	22.2	0-1
				1717.5	20025	20.92	22.2	0-2
	16-QAM		0	1732.5	20175	20.73	22.2	0-2
				1747.5	20325	20.89	22.2	0-2
				1717.5	20025	20.95	22.2	0-2
		36 RB	18	1732.5	20175	20.81	22.2	0-2
				1747.5	20325	20.90	22.2	0-2
			_	1717.5	20025	20.80	22.2	0-2
			37	1732.5	20175	20.78	22.2	0-2
				1747.5	20325	20.86	22.2	0-2
				1717.5	20025	20.18	21.2	0-2
		75	RB	1732.5	20175	20.11	21.2	0-2
				1747.5	20325	20.03	21.2	0-2


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號





	FDD Band 4										
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				1717.5	22.51	20.17	21.2	0-1			
			0	1732.5	22.58	20.17	21.2	0-1			
				1747.5	22.77	20.19	21.2	0-1			
				1717.5	22.12	20.16	21.2	0-1			
		1 RB	36	1732.5	22.7	20.10	21.2	0-1			
				1747.5	22.44	20.11	21.2	0-1			
			74 0	1717.5	22.42	19.92	21.2	0-1			
				1732.5	22.7	20.18	21.2	0-1			
				1747.5	22.73	20.19	21.2	0-1			
				1717.5	21.22	19.95	21.2	0-2			
15	64-QAM			1732.5	21.38	19.94	21.2	0-2			
				1747.5	21.52	19.76	21.2	0-2			
				1717.5	21.23.4	19.90	21.2	0-2			
		36 RB	18	1732.5	21.34	19.77	21.2	0-2			
				1747.5	21.41	19.83	21.2	0-2			
				1717.5	21.25	19.95	21.2	0-2			
			37	1732.5	21.29	19.73	21.2	0-2			
				1747.5	21.46	19.94	21.2	0-2			
				1717.5	21.22	18.98	20.2	0-2			
		75	RB	1732.5	21.35	18.96	20.2	0-2			
				1747.5	21.43	19.02	20.2	0-2			

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No. : E5/2018/30007 Page : 33 of 202

				FDD Band 4				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				1715	20000	21.92	23.2	0
			0	1732.5	20175	21.96	23.2	0
				1750	20350	21.97	23.2	0
				1715	20000	22.12	23.2	0
		1 RB	25	1732.5	20175	22.12	23.2	0
				1750	20350	22.03	23.2	0
				1715	20000	22.16	23.2	0
			49	1732.5	20175	22.15	23.2	0
				1750	20350	22.18	23.2	0
				1715	20000	21.97	23.2	0-1
	QPSK		0	1732.5	20175	21.93	23.2	0-1
				1750	20350	21.79	23.2	0-1
				1715	20000	21.86	23.2	0-1
		25 RB	12	1732.5	20175	21.84	23.2	0-1
				1750	20350	21.89	23.2	0-1
			25	1715	20000	21.90	23.2	0-1
				1732.5	20175	21.73	23.2	0-1
				1750	20350	21.84	23.2	0-1
		50RB		1715	20000	21.02	22.2	0-1
				1732.5	20175	21.16	22.2	0-1
10				1750	20350	21.12	22.2	0-1
10		1 RB	0	1715	20000	21.10	22.2	0-1
				1732.5	20175	21.17	22.2	0-1
				1750	20350	21.15	22.2	0-1
			25	1715	20000	21.08	22.2	0-1
				1732.5	20175	21.13	22.2	0-1
				1750	20350	21.10	22.2	0-1
				1715	20000	21.12	22.2	0-1
			49	1732.5	20175	21.19	22.2	0-1
				1750	20350	21.12	22.2	0-1
				1715	20000	20.80	22.2	0-2
	16-QAM		0	1732.5	20175	20.80	22.2	0-2
				1750	20350	20.86	22.2	0-2
				1715	20000	20.91	22.2	0-2
		25 RB	12	1732.5	20175	20.74	22.2	0-2
				1750	20350	20.87	22.2	0-2
				1715	20000	20.86	22.2	0-2
			25	1732.5	20175	20.95	22.2	0-2
				1750	20350	20.71	22.2	0-2
				1715	20000	19.99	21.2	0-2
		50	RB	1732.5	20175	20.02	21.2	0-2
				1750	20350	20.15	21.2	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488





	FDD Band 4										
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				1715	20000	19.93	21.2	0-1			
			0	1732.5	20175	20.12	21.2	0-1			
				1750	20350	20.03	21.2	0-1			
				1715	20000	20.14	21.2	0-1			
		1 RB	25	1732.5	20175	19.96	21.2	0-1			
				1750	20350	19.92	21.2	0-1			
			49	1715	20000	20.12	21.2	0-1			
				1732.5	20175	19.95	21.2	0-1			
				1750	20350	20.14	21.2	0-1			
			0	1715	20000	19.80	21.2	0-2			
10	64-QAM			1732.5	20175	19.97	21.2	0-2			
				1750	20350	19.97	21.2	0-2			
				1715	20000	19.78	21.2	0-2			
		25 RB	12	1732.5	20175	19.89	21.2	0-2			
				1750	20350	19.89	21.2	0-2			
				1715	20000	19.75	21.2	0-2			
			25	1732.5	20175	19.72	21.2	0-2			
				1750	20350	19.96	21.2	0-2			
				1715	20000	19.00	20.2	0-2			
		50	RB	1732.5	20175	19.02	20.2	0-2			
				1750	20350	19.08	20.2	0-2			

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No. : E5/2018/30007 Page : 35 of 202

				FDD Band 4				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				1712.5	19975	21.96	23.2	0
			0	1732.5	20175	21.93	23.2	0
				1752.5	20375	22.12	23.2	0
				1712.5	19975	21.97	23.2	0
		1 RB	12	1732.5	20175	21.90	23.2	0
				1752.5	20375	22.18	23.2	0
				1712.5	19975	22.15	23.2	0
			23.4	1732.5	20175	22.02	23.2	0
				1752.5	20375	22.11	23.2	0
				1712.5	19975	21.91	23.2	0-1
	QPSK		0	1732.5	20175	21.98	23.2	0-1
				1752.5	20375	21.74	23.2	0-1
				1712.5	19975	21.88	23.2	0-1
		12 RB	6	1732.5	20175	21.78	23.2	0-1
				1752.5	20375	21.78	23.2	0-1
			13	1712.5	19975	21.88	23.2	0-1
				1732.5	20175	21.95	23.2	0-1
				1752.5	20375	21.72	23.2	0-1
		25RB		1712.5	19975	21.07	22.2	0-1
				1732.5	20175	21.09	22.2	0-1
5				1752.5	20375	21.15	22.2	0-1
U		1 RB	0	1712.5	19975	20.92	22.2	0-1
				1732.5	20175	21.04	22.2	0-1
				1752.5	20375	21.09	22.2	0-1
			12	1712.5	19975	20.90	22.2	0-1
				1732.5	20175	21.05	22.2	0-1
				1752.5	20375	21.20	22.2	0-1
				1712.5	19975	20.90	22.2	0-1
			23.4	1732.5	20175	21.03	22.2	0-1
				1752.5	20375	20.93	22.2	0-1
				1712.5	19975	20.91	22.2	0-2
	16-QAM		0	1732.5	20175	20.99	22.2	0-2
				1752.5	20375	20.90	22.2	0-2
				1712.5	19975	20.96	22.2	0-2
		12 RB	6	1732.5	20175	20.89	22.2	0-2
				1752.5	20375	20.99	22.2	0-2
				1712.5	19975	20.74	22.2	0-2
			13	1732.5	20175	20.85	22.2	0-2
				1752.5	20375	20.98	22.2	0-2
				1712.5	19975	19.96	21.2	0-2
		25	RB	1732.5	20175	19.92	21.2	0-2
				1752.5	20375	20.11	21.2	0-2


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號





	FDD Band 4									
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)		
				1712.5	19975	20.14	21.2	0-1		
			0	1732.5	20175	20.14	21.2	0-1		
				1752.5	20375	19.93	21.2	0-1		
				1712.5	19975	20.08	21.2	0-1		
		1 RB	12	1732.5	20175	20.16	21.2	0-1		
				1752.5	20375	20.06	21.2	0-1		
			23.4 0	1712.5	19975	20.08	21.2	0-1		
				1732.5	20175	20.09	21.2	0-1		
				1752.5	20375	20.05	21.2	0-1		
				1712.5	19975	19.76	21.2	0-2		
5	64-QAM			1732.5	20175	19.98	21.2	0-2		
				1752.5	20375	19.80	21.2	0-2		
				1712.5	19975	19.91	21.2	0-2		
		12 RB	6	1732.5	20175	19.71	21.2	0-2		
				1752.5	20375	19.98	21.2	0-2		
				1712.5	19975	19.78	21.2	0-2		
			13	1732.5	20175	19.91	21.2	0-2		
				1752.5	20375	19.84	21.2	0-2		
				1712.5	19975	19.10	20.2	0-2		
		25	RB	1732.5	20175	19.05	20.2	0-2		
				1752.5	20375	19.16	20.2	0-2		

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

f (886-2) 2298-0488



Report No. : E5/2018/30007 Page : 37 of 202

FDD Band 4											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				1711.5	19965	22.05	23.2	0			
			0	1732.5	20175	21.93	23.2	0			
				1753.5	20385	21.99	23.2	0			
				1711.5	19965	22.00	23.2	0			
		1 RB	7	1732.5	20175	22.07	23.2	0			
				1753.5	20385	22.03	23.2	0			
				1711.5	19965	22.02	23.2	0			
			14	1732.5	20175	22.17	23.2	0			
				1753.5	20385	21.93	23.2	0			
				1711.5	19965	21.90	23.2	0-1			
	QPSK		0	1732.5	20175	21.80	23.2	0-1			
				1753.5	20385	21.84	23.2	0-1			
				1711.5	19965	21.91	23.2	0-1			
		8 RB	4	1732.5	20175	21.81	23.2	0-1			
				1753.5	20385	21.96	23.2	0-1			
				1711.5	19965	21.70	23.2	0-1			
			7	1732.5	20175	21.76	23.2	0-1			
				1753.5	20385	21.71	23.2	0-1			
				1711.5	19965	21.08	22.2	0-1			
		15	RB	1732.5	20175	21.10	22.2	0-1			
3				1753.5	20385	21.14	22.2	0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1			
U				1711.5	19965	21.01	22.2	0-1			
			0	1732.5	20175	21.18	22.2	0-1			
				1753.5	20385	20.94	22.2	0-1			
				1711.5	19965	21.13	22.2	0-1			
		1 RB	7	1732.5	20175	21.06	22.2				
				1753.5	20385	20.92	22.2				
				1711.5	19965	20.94	22.2	-			
			14	1732.5	20175	21.09	22.2				
		L		1753.5	20385	21.04	22.2	0-1			
				1711.5	19965	20.91	22.2	0-2			
	16-QAM		0	1732.5	20175	20.99	22.2	0-2			
				1753.5	20385	20.80	22.2	0-2			
				1711.5	19965	20.87	22.2	0-2			
		8 RB	4	1732.5	20175	20.71	22.2	0-2			
				1753.5	20385	20.83	22.2				
			_	1711.5	19965	20.84	22.2	3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0			
			7	1732.5	20175	20.79	22.2				
				1753.5	20385	20.86	22.2				
				1711.5	19965	20.12	21.2				
			RB	1732.5	20175	20.13	21.2				
				1753.5	20385	20.19	21.2	0-2			


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

```
www.tw.sgs.com
```





				FDD Band 4				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				1711.5	19965	19.93	21.2	0-1
			0	1732.5	20175	19.97	21.2	0-1
				1753.5	20385	20.19	21.2	0-1
				1711.5	19965	20.06	21.2	0-1
		1 RB	7	1732.5	20175	20.06	21.2	0-1
				1753.5	20385	20.06	21.2	0-1
				1711.5	19965	20.06	21.2	0-1
			14	1732.5	20175	19.93	21.2	0-1
				1753.5	20385	20.03	21.2	0-1
				1711.5	19965	20.00	21.2	0-2
3	16-QAM		0	1732.5	20175	19.85	21.2	0-2
				1753.5	20385	19.91	21.2	0-2
				1711.5	19965	19.93	21.2	0-2
		8 RB	4	1732.5	20175	19.74	21.2	0-2
				1753.5	20385	19.85	21.2	0-2
				1711.5	19965	19.94	21.2	0-2
			7	1732.5	20175	19.83	21.2	0-2
				1753.5	20385	19.98	21.2	0-2
				1711.5	19965	19.10	20.2	0-2
		15	RB	1732.5	20175	18.93	20.2	0-2
				1753.5	20385	19.16	20.2	0-2

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No. : E5/2018/30007 Page : 39 of 202

FDD Band 4											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				1710.7	19957	22.00	23.2	0			
			0	1732.5	20175	22.12	23.2	0			
				1754.3	20393	22.10	23.2	0			
				1710.7	19957	22.02	23.2	0			
		1 RB	2	1732.5	20175	22.08	23.2	0			
				1754.3	20393	22.08	23.2	0			
				1710.7	19957	21.91	23.2	0			
			5	1732.5	20175	21.90	23.2	0			
				1754.3	20393	22.06	23.2	0			
				1710.7	19957	21.93	23.2	0			
	QPSK		0	1732.5	20175	21.79	23.2	0			
				1754.3	20393	21.71	23.2	0			
				1710.7	19957	21.92	23.2	0			
		3 RB	2	1732.5	20175	21.97	23.2	0			
				1754.3	20393	21.98	23.2	0			
				1710.7	19957	21.84	23.2	0			
			3	1732.5	20175	21.88	23.2	0			
				1754.3	20393	21.72	23.2	0			
				1710.7	19957	21.12	22.2	0-1			
		61	RB	1732.5	20175	20.95	22.2	0-1			
1.4				1754.3	20393	21.08	22.2	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0			
1.4				1710.7	19957	20.91	22.2	0-1			
			0	1732.5	20175	20.94	22.2	0-1			
				1754.3	20393	21.00	22.2	0-1			
				1710.7	19957	21.04	22.2	0-1			
		1 RB	2	1732.5	20175	20.95	22.2	0-1			
				1754.3	20393	21.11	22.2	0-1			
				1710.7	19957	21.19	22.2	0-1			
			5	1732.5	20175	20.95	22.2	0-1			
				1754.3	20393	20.99	22.2	0-1			
				1710.7	19957	20.74	22.2	0-1			
	16-QAM		0	1732.5	20175	20.89	22.2	0-1			
				1754.3	20393	20.96	22.2	0-1			
				1710.7	19957	20.75	22.2	0-1			
		3 RB	2	1732.5	20175	20.80	22.2	0-1			
				1754.3	20393	20.88	22.2	0-1			
				1710.7	19957	20.80	22.2	0-1			
			3	1732.5	20175	21.00	22.2	0-1			
				1754.3	20393	20.88	22.2	0-1			
				1710.7	19957	19.91	21.2	0-2			
		61	RB	1732.5	20175	19.92	21.2	0-2			
				1754.3	20393	19.94	21.2	0-2			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

t (886-2) 2299-3279

f (886-2) 2298-0488





				FDD Band 4				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				1710.7	19957	20.15	21.2	0-1
			0	1732.5	20175	20.12	21.2	0-1
				1754.3	20393	19.91	21.2	0-1
				1710.7	19957	20.20	21.2	0-1
		1 RB	2	1732.5	20175	19.99	21.2	0-1
				1754.3	20393	20.05	21.2	0-1
				1710.7	19957	20.14	21.2	0-1
			5	1732.5	20175	20.07	21.2	0-1
				1754.3	20393	20.14	21.2	0-1
				1710.7	19957	19.99	21.2	0-1
1.4	64-QAM		0	1732.5	20175	19.71	21.2	0-1
				1754.3	20393	19.70	21.2	0-1
				1710.7	19957	19.71	21.2	0-1
		3 RB	2	1732.5	20175	19.94	21.2	0-1
				1754.3	20393	19.77	21.2	0-1
				1710.7	19957	19.78	21.2	0-1
			3	1732.5	20175	19.92	21.2	0-1
				1754.3	20393	19.96	21.2	0-1
				1710.7	19957	19.08	20.2	0-2
		6F	RB	1732.5	20175	19.19	20.2	0-2
				1754.3	20393	19.16	20.2	0-2

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No. : E5/2018/30007 Page : 41 of 202

FDD Band 5											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				829	20450	22.81	24	0			
			0	836.5	20525	22.91	24	0			
				844	20600	22.99	24	0			
				829	20450	22.79	24	0			
		1 RB	25	836.5	20525	22.80	24	0			
				844	20600	22.77	24	0			
				829	20450	22.93	24	0			
			49	836.5	20525	22.91	24	0			
				844	20600	22.84	24	0			
				829	20450	22.76	24	0-1			
	QPSK		0	836.5	20525	22.62	24	0-1			
				844	20600	22.77	24	0-1			
				829	20450	22.75	24	0-1			
		25 RB	12	836.5	20525	22.73	24	0-1			
				844	20600	22.77	24	0-1			
				829	20450	22.56	24	0-1			
			25	836.5	20525	22.71	24	0-1			
				844	20600	22.76	24	0-1			
				829	20450	21.92	23	0-1			
		50	RB	836.5	20525	21.87	23	0-1			
10				844	20600	21.82	23	0-1			
10				829	20450	21.75	23	0-1			
			0	836.5	20525	21.96	23	0-1			
				844	20600	21.79	23	0-1			
				829	20450	21.93	23	0-1			
		1 RB	25	836.5	20525	21.95	23	0-1			
				844	20600	21.77	23	0-1			
				829	20450	21.80	23	0-1			
			49	836.5	20525	21.79	23	0-1			
				844	20600	21.84	23	0-1			
				829	20450	21.71	23	0-2			
	16-QAM		0	836.5	20525	21.65	23	0-2			
				844	20600	21.80	23	0-2			
				829	20450	21.65	23	0-2			
		25 RB	12	836.5	20525	21.58	23	0-2			
				844	20600	21.76	23	0-2			
				829	20450	21.69	23	0-2			
			25	836.5	20525	21.68	23	0-2			
				844	20600	21.70	23	0-2			
				829	20450	20.76	22	0-2			
		500	ORB	836.5	20525	20.89	22	0-2			
				844	20600	20.81	22	0-2			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

www.tw.sgs.com





				FDD Band 5				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				829	20450	20.96	22	0-1
			0	836.5	20525	20.97	22	0-1
				844	20600	20.91	22	0-1
				829	20450	20.86	22	0-1
		1 RB	25	836.5	20525	20.82	22	0-1
				844	20600	20.93	22	0-1
				829	20450	20.97	22	0-1
			49	836.5	20525	20.99	22	0-1
				844	20600	20.89	22	0-1
				829	20450	20.65	22	0-2
10	64-QAM		0	836.5	20525	20.61	22	0-2
				844	20600	20.67	22	0-2
				829	20450	20.75	22	0-2
		25 RB	12	836.5	20525	20.70	22	0-2
				844	20600	20.68	22	0-2
				829	20450	20.60	22	0-2
			25	836.5	20525	20.76	22	0-2
				844	20600	20.56	22	0-2
				829	20450	19.96	21	0-2
		500	RB	836.5	20525	19.79	21	0-2
				844	20600	19.97	21	0-2

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No. : E5/2018/30007 Page : 43 of 202

FDD Band 5											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				826.5	20425	22.88	24	0			
			0	836.5	20525	22.84	24	0			
				846.5	20625	22.85	24	0			
				826.5	20425	22.97	24	0			
		1 RB	12	836.5	20525	22.78	24	0			
				846.5	20625	22.79	24	0			
				826.5	20425	22.84	24	0			
			24	836.5	20525	22.91	24	0			
				846.5	20625	22.76	24	0			
				826.5	20425	22.68	24	0-1			
	QPSK		0	836.5	20525	22.77	24	0-1			
				846.5	20625	22.70	24	0-1			
				826.5	20425	22.78	24	0-1			
		12 RB	6	836.5	20525	22.57	24	0-1			
				846.5	20625	22.76	24	0-1			
				826.5	20425	22.78	24	0-1			
			13	836.5	20525	22.66	24	0-1			
				846.5	20625	22.77	24	0-1			
				826.5	20425	21.99	23	0-1			
		25	RB	836.5	20525	21.84	23	0-1			
5				846.5	20625	21.89	23	0-1			
5				826.5	20425	21.77	23	0-1			
			0	836.5	20525	21.87	23	0-1			
				846.5	20625	22.00	23	0-1			
				826.5	20425	21.97	23	0-1			
		1 RB	12	836.5	20525	21.83	23	0-1			
				846.5	20625	21.77	23	0-1			
				826.5	20425	21.83	23	0-1			
			24	836.5	20525	21.76	23	0-1			
				846.5	20625	21.85	23	0-1			
				826.5	20425	21.57	23	0-2			
	16-QAM		0	836.5	20525	21.64	23	0-2			
				846.5	20625	21.60	23	0-2			
				826.5	20425	21.66	23	0-2			
		12 RB	6	836.5	20525	21.69	23	0-2			
				846.5	20625	21.66	23	0-2			
				826.5	20425	21.62	23	0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1			
			13	836.5	20525	21.62	23				
				846.5	20625	21.67	23				
				826.5	20425	20.94	22				
		25	RB	836.5	20525	20.79	22	0-2			
				846.5	20625	20.97	22	0-2			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

f (886-2) 2298-0488

www.tw.sgs.com





				FDD Band 5				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				826.5	20425	20.92	22	0-1
			0	836.5	20525	20.79	22	0-1
				846.5	20625	20.95	22	0-1
				826.5	20425	20.92	22	0-1
		1 RB	12	836.5	20525	20.98	22	0-1
				846.5	20625	20.75	22	0-1
				826.5	20425	20.86	22	0-1
			24	836.5	20525	20.95	22	0-1
				846.5	20625	20.95	22	0-1
				826.5	20425	20.80	22	0-2
5	64-QAM		0	836.5	20525	20.63	22	0-2
				846.5	20625	20.60	22	0-2
				826.5	20425	20.57	22	0-2
		12 RB	6	836.5	20525	20.77	22	0-2
				846.5	20625	20.64	22	0-2
				826.5	20425	20.56	22	0-2
			13	836.5	20525	20.76	22	0-2
				846.5	20625	20.57	22	0-2
				826.5	20425	19.82	21	0-2
		25	RB	836.5	20525	19.91	21	0-2
				846.5	20625	19.89	21	0-2

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No. : E5/2018/30007 Page : 45 of 202

FDD Band 5											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				825.5	20415	22.95	24	0			
			0	836.5	20525	22.81	24	0			
				847.5	20635	22.89	24	0			
				825.5	20415	22.94	24	0			
		1 RB	7	836.5	20525	22.93	24	0			
				847.5	20635	22.86	24	0			
				825.5	20415	22.83	24	0			
			14	836.5	20525	22.90	24	0			
				847.5	20635	22.79	24	0			
				825.5	20415	22.66	24	0-1			
	QPSK		0	836.5	20525	22.77	24	0-1			
				847.5	20635	22.71	24	0-1			
				825.5	20415	22.75	24	0-1			
		8 RB	4	836.5	20525	22.68	24	0-1			
				847.5	20635	22.63	24	0-1			
				825.5	20415	22.59	24	0-1			
			7	836.5	20525	22.66	24	0-1			
				847.5	20635	22.66	24	0-1			
				825.5	20415	21.85	23	0-1			
		15	RB	836.5	20525	21.94	23	0-1			
3				847.5	20635	21.82	23	0-1			
U				825.5	20415	21.89	23	0-1			
			0	836.5	20525	21.80	23	0-1			
				847.5	20635	21.89	23	0-1			
				825.5	20415	21.77	23	0-1			
		1 RB	7	836.5	20525	21.86	23	0-1			
				847.5	20635	21.94	23	0-1			
				825.5	20415	21.91	23	0-1			
			14	836.5	20525	21.98	23	0-1			
				847.5	20635	21.91	23	0-1			
				825.5	20415	21.57	23	0-2			
	16-QAM		0	836.5	20525	21.65	23	0-2			
				847.5	20635	21.75	23	0-2			
				825.5	20415	21.63	23	3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0			
		8 RB	4	836.5	20525	21.76	23				
				847.5	20635	21.71	23				
			_	825.5	20415	21.57	23	0 0 0 0 0 0 0 0 0 0 0 0 0 0			
			7	836.5	20525	21.77	23				
				847.5	20635	21.61	23				
				825.5	20415	20.75	22				
	15F		RB	836.5	20525	20.84	22				
				847.5	20635	20.98	22	0-2			


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

```
www.tw.sgs.com
```





				FDD Band 5				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				825.5	20415	20.81	22	0-1
			0	836.5	20525	20.76	22	0-1
				847.5	20635	20.92	22	0-1
				825.5	20415	20.86	22	0-1
		1 RB	7	836.5	20525	21.00	22	0-1
				847.5	20635	20.77	22	0-1
				825.5	20415	20.99	22	0-1
			14	836.5	20525	20.94	22	0-1
				847.5	20635	20.96	22	0-1
				825.5	20415	20.64	22	0-2
3	64-QAM		0	836.5	20525	20.67	22	0-2
				847.5	20635	20.57	22	0-2
				825.5	20415	20.72	22	0-2
		8 RB	4	836.5	20525	20.80	22	0-2
				847.5	20635	20.67	22	0-2
				825.5	20415	20.72	22	0-2
			7	836.5	20525	20.65	22	0-2
				847.5	20635	20.69	22	0-2
				825.5	20415	19.77	21	0-2
		15	RB	836.5	20525	19.92	21	0-2
				847.5	20635	19.79	21	0-2

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No. : E5/2018/30007 Page : 47 of 202

FDD Band 5											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				824.7	20407	22.92	24	0			
			0	836.5	20525	22.89	24	0			
				848.3	20643	22.96	24	0			
				824.7	20407	22.88	24	0			
		1 RB	2	836.5	20525	22.76	24	0			
				848.3	20643	22.93	24	0			
				824.7	20407	22.82	24	0			
			5	836.5	20525	22.88	24	0			
				848.3	20643	22.80	24	0			
				824.7	20407	22.69	24	0			
	QPSK		0	836.5	20525	22.59	24	0			
				848.3	20643	22.63	24	0			
				824.7	20407	22.66	24	0			
		3 RB	2	836.5	20525	22.56	24	0			
				848.3	20643	22.63	24	0			
				824.7	20407	22.77	24	0			
			3	836.5	20525	22.67	24	0			
				848.3	20643	22.76	24	0			
				824.7	20407	21.78	23	0-1			
		6F	RB	836.5	20525	21.87	23	0-1			
1.4				848.3	20643	21.94	23	0-1			
1.4				824.7	20407	21.89	23	0-1			
			0	836.5	20525	21.87	23	0-1			
				848.3	20643	21.95	23	0-1			
				824.7	20407	21.78	23	0-1			
		1 RB	2	836.5	20525	21.79	23	0-1			
				848.3	20643	21.81	23	0-1			
				824.7	20407	21.78	23	0-1			
			5	836.5	20525	21.80	23	0-1			
				848.3	20643	21.86	23	0-1			
				824.7	20407	21.64	23	0-1			
	16-QAM		0	836.5	20525	21.56	23	0-1			
				848.3	20643	21.58	23	0-1			
				824.7	20407	21.78	23	0-1			
		3 RB	2	836.5	20525	21.66	23	0-1			
				848.3	20643	21.60	23	0-1			
				824.7	20407	21.76	23	0-1			
			3	836.5	20525	21.61	23	0 0 0 0 0 0 0 0 0 0 0 0 0 0			
				848.3	20643	21.63	23	0-1			
				824.7	20407	20.76	22	0-2			
		6RB		836.5	20525	20.82	22	0-2			
				848.3	20643	20.85	22	0-2			


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

f (886-2) 2298-0488





				FDD Band 5				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				824.7	20407	20.93	22	0-1
			0	836.5	20525	20.76	22	0-1
				848.3	20643	20.92	22	0-1
				824.7	20407	20.98	22	0-1
		1 RB	2	836.5	20525	20.79	22	0-1
				848.3	20643	20.79	22	0-1
				824.7	20407	20.89	22	0-1
			5	836.5	20525	20.92	22	0-1
				848.3	20643	20.83	22	0-1
				824.7	20407	20.78	22	0-1
1.4	64-QAM		0	836.5	20525	20.70	22	0-1
				848.3	20643	20.71	22	0-1
				824.7	20407	20.56	22	0-1
		3 RB	2	836.5	20525	20.75	22	0-1
				848.3	20643	20.78	22	0-1
				824.7	20407	20.69	22	0-1
			3	836.5	20525	20.69	22	0-1
				848.3	20643	20.62	22	0-1
				824.7	20407	19.77	21	0-2
		6F	RB	836.5	20525	19.81	21	0-2
				848.3	20643	19.99	21	0-2

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



	Main Antenna										
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)					
	802.11b	1	2412		15.00	14.95					
		6	2437	1Mbps	15.00	14.93					
		11	2462		15.00	14.86					
		1	2412		13.00	12.42					
2450 MHz	802.11g	6	2437	6Mbps	13.00	12.52					
		11	2462		13.00	12.65					
		1	2412		13.00	12.30					
	802.11n20-HT0	6	2437	MCS0	13.00	12.36					
		11	2462		13.00	12.43					

WLAN802.11 a/b/g/n/ac (20/40/80M) conducted power table:

		Main	Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		36	5180		13.00	12.62
	802.11a	40	5200	6Mbps	13.00	12.57
	002.118	44	5220	01010003	13.00	12.56
		48	5240		13.00	12.43
	802.11n20-HT0	36	5180		13.00	12.52
		40	5200	MCS0	13.00	12.44
		44	5220		13.00	12.40
		48	5240		13.00	12.71
5.15-5.25 GHz		36	5180		13.00	12.46
	802.11ac20-VHT0	40	5200	MCS0	13.00	12.41
	002.118020-01110	44	5220	10000	13.00	12.34
		48	5240		13.00	12.60
	802.11n40-HT0	38	5190	MCS0	13.00	12.47
	002.11140-1110	46	5230	10000	13.00	12.46
	802.11ac40-VHT0	38	5190	MCS0	13.00	12.41
	002.11a040-VH10	46	5230	WC30	13.00	12.39
	802.11ac80-VHT0	42	5210	MCS0	13.00	12.05

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

www.tw.sgs.com



		Main	Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		52	5260		13.00	12.49
	802.11a	56	5280	6Mbps	13.00	12.45
	002.118	60	5300	olviops	13.00	12.52
		64	5320		13.00	12.44
	802.11n20-HT0	52	5260		13.00	12.74
		56	5280	MCS0	13.00	12.71
		60	5300	10000	13.00	12.77
		64	5320		13.00	12.79
5.25-5.35 GHz		52	5260		13.00	12.67
	802.11ac20-VHT0	56	5280	MCS0	13.00	12.63
	002.118020-01110	60	5300	10000	13.00	12.71
		64	5320		13.00	12.70
	802.11n40-HT0	54	5270	MCS0	13.00	12.48
	002.11140-1110	62	5310	10000	13.00	12.54
	802.11ac40-VHT0	54	5270	MCS0	13.00	12.43
	002.11a040-VH10	62	5310	WC30	13.00	12.48
	802.11ac80-VHT0	58	5290	MCS0	13.00	11.88

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



		Main	Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		100	5500		13.00	12.38
		120	5600		13.00	12.42
	802.11a	124	5620	6Mbps	13.00	12.47
		128	5640		13.00	12.51
		140	5700		13.00	12.65
		100	5500		13.00	12.67
		120	5600		13.00	12.62
	802.11n20-HT0	124	5620	MCS0	13.00	12.64
		128	5640		13.00	12.56
		140	5700		13.00	12.52
		100	5500		13.00	12.62
		120	5600		13.00	12.55
5600 MHz	802.11ac20-VHT0	124	5620	MCS0	13.00	12.53
		128	5640		13.00	12.59
		140	5700		13.00	12.66
		102	5510		13.00	12.47
	802.11n40-HT0	118	5590	MCS0	13.00	12.51
	002.11140-1110	126	5630	10000	13.00	12.48
		134	5670		13.00	12.53
		102	5510		13.00	12.37
	802.11ac40-VHT0	118	5590	MCS0	13.00	12.38
	002.110040-01110	126	5630	10000	13.00	12.43
		134	5670		13.00	12.44
	802.11ac80-VHT0	106	5530	MCS0	13.00	11.85
		122	5610	10000	13.00	11.96

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

www.tw.sgs.com



Bluetooth maximum power table:

Mode Channel		Frequency	Average	Average Output Power (dBm)		
MODE	Channel	(MHz)	1Mbps	2Mbps	3Mbps	Tolerance (dBm)
	CH 00	2402	6.42	3.36	3.39	
BR/EDR	CH 39	2441	5.56	2.20	2.15	9
	CH 78	2480	6.39	3.44	3.45	

Mode	Channel	Frequency	Average Output Power (dBm)	Max. Rated Avg. Power + Max.
Mode	Channel	(MHz)	GFSK	Tolerance (dBm)
	CH 00	2402	1.48	
LE	CH 19	2440	0.69	9
	CH 39	2480	2.59	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

```
www.tw.sgs.com
```



1.4 Test Environment

Ambient Temperature: 22±2° C Tissue Simulating Liquid: 22±2° C

1.5 Operation Description

- 1. The EUT is controlled by using a Radio Communication Tester (MT8820C), and the communication between the EUT and the tester is established by air link.
- 2. Measurements are performed respectively on the lowest, middle and highest channels of the operating band(s). The EUT is set to maximum power level during all tests, and at the beginning of each test the battery is fully charged.
- 3. During the SAR testing, the DASY 5 system checks power drift by comparing the e-field strength of one specific location measured at the beginning with that measured at the end of the SAR testing.
- 4. SAR test reduction for GPRS mode is determined by the source-based time-averaged output power. The data mode with highest specified time-averaged output power should be tested for SAR compliance.
- The 3G SAR test reduction procedure is applied to HSDPA with 12.2 kbps RMC as the primary mode. Since the maximum output power in a secondary mode (HSDPA) is ≤ ¼ dB higher than the primary mode (WCDMA), SAR measurement is not required for the secondary mode (HSDPA).
- The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) with 12.2 kbps RMC as the primary mode. Since the maximum output power in a secondary mode (HSPA) is ≤ ¼ dB higher than the primary mode (WCDMA), SAR measurement is not required for the secondary mode (HSPA).

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

www.tw.sas.com



7. LTE modes test according to **KDB 941225D05v02r05**.

a. Per Section 5.2.1, the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation.

• Using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.

• When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel.

• When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

b. Per Section 5.2.2, the largest channel bandwidth and measure SAR for QPSK with 50% RB allocation

• The procedures required for 1 RB allocation in 5.2.1 are applied to measure the SAR for QPSK with 50% RB allocation.

c. Per Section 5.2.3, the largest channel bandwidth and measure SAR for QPSK with 100% RB allocation

• For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 5.2.1 and 5.2.2 are ≤ 0.8 W/kg.

• Otherwise, SAR is measured for the highest output power channel and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

d. Per Section 5.2.4, Higher order modulations

• For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in sections 5.2.1, 5.2.2 and 5.2.3 to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is > ½ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



e. Per Section 5.3, other channel bandwidth standalone SAR test requirements For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section 5.2 to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is > $\frac{1}{2}$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg. The equivalent channel configuration for the RB allocation, RB offset and modulation etc. is determined for the smaller channel bandwidth according to the same number of RB allocated in the largest channel bandwidth.

WLAN

802.11b DSSS SAR Test Requirements:

- SAR is measured for 2.4 GHz 802.11b DSSS mode using the highest measured 8. maximum output power channel, when the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 9. When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

802.11g/n OFDM SAR Test Exclusion Requirements:

- 10. SAR is not required for 802.11g/n since the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
- 11. BT and WLAN Main use the same antenna path and Bluetooth may transmit with WLAN Aux simultaneously.
- 12. According to KDB447498D01v06, testing of other required channels is not required when the reported 1-g SAR for the highest output channel is \leq 0.8 W/kg, when the transmission band is \leq 100MHz.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

www.tw.sas.com

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



- 13. According to KDB865664D01v01r04, SAR measurement variability must be assessed for each frequency band. When the original highest measured SAR is ≥ 0.8 W/kg, repeated that measurement once. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit)
- 14. According to **KDB447498D01v06** The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances≤ 50 mm are determined by: [(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] · [√f(GHz)] ≤ 3.0 for 1-g SAR, and ≤ 7.5 for product specific 10-g SAR.


	o g o/ ir i.		Product specific 10g-SAR				
Mode	Maximum power (dBm)	Maximum power(mW)	test separation distance (mm)	Exclusion threshold	Require SAR testing?		
BT	9	7.943 5 2.502		NO			
			Head				
Mode		Maximum power(mW)	test separation distance (mm)	Exclusion threshold	Require SAR testing?		
BT	9	7.943	5	2.502	NO		
	. .	Maximum		Bodn-Worn			
Mode	Mode Maximum power (dBm)		test separation distance (mm)	Exclusion threshold	Require SAR testing?		
BT	9	7.943	10	1.251	NO		

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



15. For WLAN antenna, 5.2 ac(80) / 5.3 ac(80) / 5.6ac(80) are chosen to be the initial test configurations.

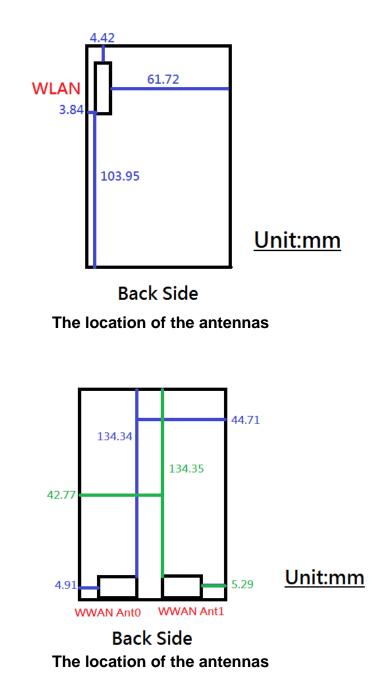

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Report No. : E5/2018/30007 Page: 58 of 202

1.6 Positioning Procedure

Head SAR measurement statement

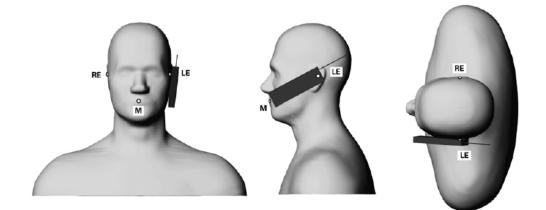

Phone position 1, "cheek" or "touch" position. The reference points for the right ear (RE), left ear (LE) and mouth (M), which define the reference plane for phone positioning.

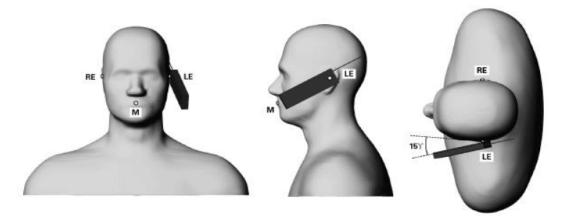

Phone position 2, "tilted position." The reference points for the right ear (RE), left ear (LE) and mouth (M), which define the reference plane for phone positioning.

Cheek/Touch Position:

The handset was brought toward the mouth of the head phantom by pivoting against the ear reference point until any point of the mouthpiece or keypad touched the phantom.

Ear/Tilt Position:

With the phone aligned in the Cheek/Touch position, the handset was tilted away from the mouth with respect to the test device reference point by 15 degrees.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製


t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

f (886-2) 2298-0488

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 www.tw.sas.com





Body SAR measurement statement

1. Body-worn exposure: 10mm

Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in KDB Publication 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. When the same wireless transmission configuration is used for testing body-worn accessory and hotspot mode SAR, respectively, in voice and data mode, SAR results for the most conservative test separation distance configuration may be used to support both SAR conditions. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for the body-worn accessory with a headset attached to the handset.

2. Hotspot exposure: 10mm

A test separation distance of 10 mm is required between the phantom and all surfaces and edges with a transmitting antenna located within 25 mm from that surface or edge when the form factor of a handset is larger than 9 cm \times 5 cm,

Test configurations of WWAN:

- (1) Front side
- (2) Back side
- (3) Bottom side
- (4) Right side
- (5) Left side

Test configurations of WLAN:

- (1) Front side
- (2) Back side
- (3) Top side
- (4) Left side

3. Phablet SAR test consideration


Since the device is a phablet (overall diagonal dimension > 16.0 cm), the UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at \leq 25 mm from that surface or edge, in direct contact with a flat phantom, for product specific 10-g SAR. When hotspot mode applies, product specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg. Since the highest reported hotspot SAR for WWAN/WLAN 2.4GHz is less than 1.2, 10-g extremity SAR is not required for them. For WLAN 5.2/5.3/5.6G, product specific 10g-SAR is required since hotspot function is not supported in them.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

www.tw.sas.com

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





4. Based on KDB941225D06v02r01, the hotspot mode and body-worn accessory SAR test configurations may overlap for handsets. When the same wireless mode transmission configurations for voice and data are required for SAR measurements, the more conservative configuration with a smaller separation distance should be tested for the overlapping SAR configurations. For WCDMA /LTE/WLAN, since the maximum power is the same between body-worn and hotspot mode, and the test distance of hotspot mode is the same with that of body-worn mode, hotspot mode SAR is used to support body-worn SAR. For GSM850/1900, since the wireless mode transmission configurations is different between body-worn and hotspot mode, body-worn SAR is performed.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



1.7 Evaluation Procedures

The entire evaluation of the spatial peak values is performed within the Post-processing engine (SEMCAD). The system always gives the maximum values for the 1 g and 10 g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- 1. The extraction of the measured data (grid and values) from the Zoom Scan.
- 2. The calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters).
- 3. The generation of a high-resolution mesh within the measured volume.
- 4. The interpolation of all measured values from the measurement grid to the high-resolution grid.
- 5. The extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface.
- 6. The calculation of the averaged SAR within masses of 1g and 10g.

The probe is calibrated at the center of the dipole sensors that is located 1 to 2.7mm away from the probe tip. During measurements, the probe stops shortly above the phantom surface, depending on the probe and the surface detecting system. Both distances are included as parameters in the probe configuration file. The software always knows exactly how far away the measured point is from the surface. As the probe cannot directly measure at the surface, the values between the deepest measured point and the surface must be extrapolated. The angle between the probe axis and the surface normal line is less than 30 degree.

In the Area Scan, the gradient of the interpolation function is evaluated to find all the extreme of the SAR distribution. The uncertainty on the locations of the extreme is less than 1/20 of the grid size. Only local maximum within -2 dB of the global maximum are searched and passed for the Cube Scan measurement. In the Cube Scan, the interpolation function is used to extrapolate the Peak SAR from the lowest measurement points to the inner phantom surface (the extrapolation distance). The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5mm.

The maximum search is automatically performed after each area scan measurement. It is based on splines in two or three dimensions. The procedure can find the maximum for most SAR distributions even with relatively large grid spacing. After the area scanning measurement, the probe is automatically moved to a position at the interpolated maximum. The following scan can directly use this position for reference, e.g., for a finer resolution grid or the cube evaluations. The 1g and 10g peak evaluations are only available for the predefined cube 7x7x7 scans.

The routines are verified and optimized for the grid dimensions used in these cube measurements. The measured volume of 30x30x30mm contains about 30g of tissue. The first procedure is an extrapolation (incl. Boundary correction) to get the points between the lowest measured plane and the surface. The next step uses 3D

f (886-2) 2298-0488

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sgs.com



Report No. : E5/2018/30007 Page : 62 of 202

interpolation to get all points within the measured volume. In the last step, a 1g cube is placed numerically into the volume and its averaged SAR is calculated. This cube is the moved around until the highest averaged SAR is found.

If the highest SAR is found at the edge of the measured volume, the system will issue a warning: higher SAR values might be found outside of the measured volume. In that case the cube measurement can be repeated, using the new interpolated maximum as the center.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



1.8 Probe Calibration Procedures

For the calibration of E-field probes in lossy liquids, an electric field with an accurately known field strength must be produced within the measured liquid. For standardization purposes it would be desirable if all measurements which are necessary to assess the correct field strength would be traceable to standardized measurement procedures. In the following two different calibration techniques are summarized:

1.8.1 Transfer Calibration with Temperature Probes

In lossy liquids the specific absorption rate (SAR) is related both to the electric field (*E*) and the temperature gradient ($\delta T / \delta t$) in the liquid.

$$SAR = C \frac{\delta T}{\delta t}$$

Whereby σ is the conductivity, ρ the density and c the heat capacity of the liquid.

Hence, the electric field in lossy liquid can be measured indirectly by measuring the temperature gradient in the liquid. Non-disturbing temperature probes (optical probes or thermistor probes with resistive lines) with high spatial resolution (<1-2 mm) and fast reaction time (<1 s) are available and can be easily calibrated with high precision [1]. The setup and the exciting source have no influence on the calibration; only the relative positioning uncertainties of the standard temperature probe and the E-field probe to be calibrated must be considered. However, several problems limit the available accuracy of probe calibrations with temperature probes:

1. The temperature gradient is not directly measurable but must be evaluated from temperature measurements at different time steps. Special precaution is necessary to avoid measurement errors caused by temperature gradients due to energy equalizing effects or convection currents in the liquid. Such effects cannot be completely avoided, as the measured field itself destroys the

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



thermal equilibrium in the liquid. With a careful setup these errors can be kept small.

- 2. The measured volume around the temperature probe is not well defined. It is difficult to calculate the energy transfer from a surrounding gradient temperature field into the probe. These effects must be considered, since temperature probes are calibrated in liquid with homogeneous temperatures. There is no traceable standard for temperature rise measurements.
- The calibration depends on the assessment of the specific density, the heat capacity and the conductivity of the medium. While the specific density and heat capacity can be measured accurately with standardized procedures (~ 2% for c; much better for ρ), there is no standard for the measurement of the conductivity. Depending on the method and liquid, the error can well exceed ±5%.
- 4. Temperature rise measurements are not very sensitive and therefore are often performed at a higher power level than the E-field measurements. The nonlinearities in the system (e.g., power measurements, different components, etc.) must be considered.

Considering these problems, the possible accuracy of the calibration of E-field probes with temperature gradient measurements in a carefully designed setup is about $\pm 10\%$ (RSS) [2]. Recently, a setup which is a combination of the waveguide techniques and the thermal measurements was presented in [3]. The estimated uncertainty of the setup is $\pm 5\%$ (RSS) when the same liquid is used for the calibration and for actual measurements and $\pm 7-9\%$ (RSS) when not, which is in good agreement with the estimates given in [2].

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

www.tw.sas.com

Report No. : E5/2018/30007 Page: 65 of 202



1.8.2 Calibration with Analytical Fields

In this method a technical setup is used in which the field can be calculated analytically from measurements of other physical magnitudes (e.g., input power). This corresponds to the standard field method for probe calibration in air; however, there is no standard defined for fields in lossy liquids.

When using calculated fields in lossy liquids for probe calibration, several points must be considered in the assessment of the uncertainty:

- 1. The setup must enable accurate determination of the incident power.
- 2. The accuracy of the calculated field strength will depend on the assessment of the dielectric parameters of the liquid.
- 3. Due to the small wavelength in liquids with high permittivity, even small setups might be above the resonant cutoff frequencies. The field distribution in the setup must be carefully checked for conformity with the theoretical field distribution.

References

- (1) N. Kuster, Q. Balzano, and J.C. Lin, Eds., Mobile Communications Safety, Chapman & Hall, London, 1997.
- (2) K. Meier, M. Burkhardt, T. Schmid, and N. Kuster, \Broadband calibration of E-field probes in lossy media", IEEE Transactions on Microwave Theory and Techniques, vol. 44, no. 10, pp. 1954{1962, Oct. 1996.
- (3) K. Jokela, P. Hyysalo, and L. Puranen, \Calibration of specific absorption rate (SAR) probes in waveguide at 900 MHz", IEEE Transactions on Instrumentation and Measurements, vol. 47, no. 2, pp. 432{438, Apr. 1998.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No. : E5/2018/30007 Page : 66 of 202

1.9 The SAR Measurement System

A block diagram of the SAR measurement system is given in Fig. a. This SAR measurement system uses a Computer-controlled 3-D stepper motor system (SPEAG DASY 5 professional system). Model EX3DV4 field probes are used to determine the internal electric fields. The SAR can be obtained from the equation SAR= σ (|Ei|2)/ ρ where σ and ρ are the conductivity and mass density of the tissue-simulant.

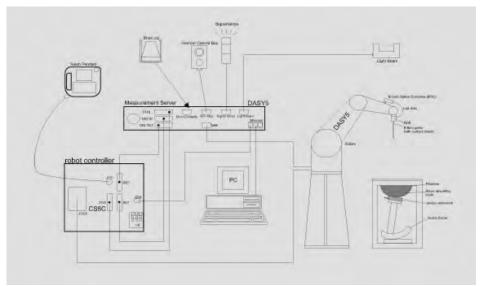


Fig. a A block diagram of the SAR measurement system

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



The DASY 5 system for performing compliance tests consists of the following items:

- 1. A standard high precision 6-axis robot (Staubli RX family) with controller, teach pendant and software. An arm extension is for accommodating the data acquisition electronics (DAE).
- 2. A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- 3. Data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- 4. The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- 5. The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- 6. A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- 7. A computer operating Windows7
- 8. DASY 5 software.
- 9. Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- 10. The SAM twin phantom enabling testing left-hand and right-hand usage.
- 11. The device holder for handheld mobile phones.
- 12. Tissue simulating liquid mixed according to the given recipes.
- 13. Validation dipole kits allowing to validate the proper functioning of the system.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



1.10 System Components

EX3DV4 E-Field Probe

Construction	Symmetrical design with triangular core
	Built-in shielding against static charges
	PEEK enclosure material (resistant to
	organic solvents, e.g., DGBE)
Calibration	Basic Broad Band Calibration in air
	Conversion Factors (CF) for
	HSL835/1750/1900/2450/5200/5300/5600
	MHz Additional CF for other liquids and
	frequencies upon request
Frequency	10 MHz to > 6 GHz, Linearity: ± 0.6 dB
Directivity	± 0.3 dB in HSL (rotation around probe axis)
	± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic	10 μW/g to > 100 mW/g
Range	Linearity: \pm 0.2 dB (noise: typically < 1 μ W/g)
Dimensions	Tip diameter: 2.5 mm
Application	High precision dosimetric measurements in any exposure scenario
	(e.g., very strong gradient fields). Only probe which enables
	compliance testing for frequencies up to 6 GHz with precision of
	better 30%.
<u>1</u>	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

```
f (886-2) 2298-0488
```

www.tw.sgs.com



Model	Twin SAM
Construction	The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.
Shell Thickness	2 ± 0.2 mm
Filling Volume	Approx. 25 liters
Dimensions	Height: 850 mm; Length: 1000 mm; Width: 500 mm

DEVICE HOLDER

Construction	In combination with the Twin SAM Phantom	1-1-
	V4.0/V4.0C or Twin SAM, the Mounting	ALC: NO.
	Device (made from POM) enables the	
	rotation of the mounted transmitter in	
	spherical coordinates, whereby the rotation	
	point is the ear opening. The devices can	
	be easily and accurately positioned	15000
	according to IEC, IEEE, CENELEC, FCC or	
	other specifications. The device holder can	
	be locked at different phantom locations	Device Holder
	(left head, right head, flat phantom).	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

f (886-2) 2298-0488

www.tw.sgs.com



1.11 SAR System Verification

The microwave circuit arrangement for system verification is sketched in Fig. b. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within +/- 10% (according to KDB865664D01) from the target SAR values.

These tests were done at 835/17501900/2450/5200/5300/5600 MHz. The tests were conducted on the same days as the measurement of the DUT. The obtained results from the system accuracy verification are displayed in the table 1. During the tests, the liquid depth above the ear reference points was above 15 cm (\leq 3G) or 10 cm (>3G) in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

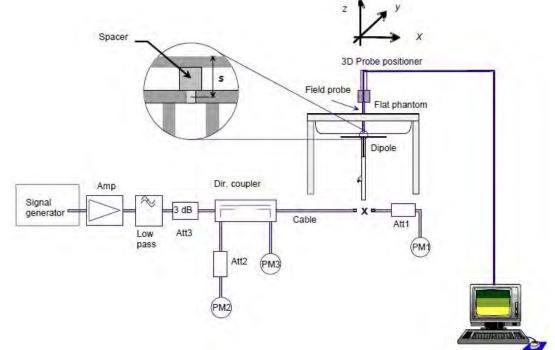


Fig. b The block diagram of system verification

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

```
www.tw.sgs.com
```



Validation Kit	S/N	Frequency (MHz)		1W Target SAR-1g (mW/g)	Measured SAR-1g (mW/g)	Measured SAR-1g normalized to 1W (mW/g)	Deviation (%)	Measured Date
D835V2	4d063	835	Head	9.34	2.33	9.32	-0.21%	Apr. 03, 2018
D033V2	40005	000	Body	9.57	2.36	9.44	-1.36%	Apr. 04, 2018
D1750V2	1008	1750	Head	36	8.84	35.36	-1.78%	Apr. 04, 2018
D1730V2	1000	1750	Body	36.7	8.99	35.96	-2.02%	Apr. 05, 2018
D1900V2	5d173	1900	Head	40.7	9.93	39.72	-2.41%	Apr. 06, 2018
D1900V2	50175	1300	Body	40.2	9.95	39.80	-1.00%	Apr. 06, 2018
D2450V2	727	2450	Head	52.2	12.40	49.60	-4.98%	Apr. 07, 2018
D2430V2	121	2430	Body	50.6	12.70	50.80	0.40%	Apr. 09, 2018
	1023	5200	Head	77.3	7.36	73.60	-4.79%	Apr. 10, 2018
	1025	5200	Body	70.9	7.19	71.90	1.41%	Apr. 11, 2018
D5GHzV2	1023	5300	Head	80.9	8.09	80.90	0.00%	Apr. 10, 2018
0301272	0000202 1023	5500	Body	72.9	7.41	74.10	1.65%	Apr. 11, 2018
	1023	1000 5000	Head	81.9	8.62	86.20	5.25%	Apr. 10, 2018
	1023	5600		77.6	7.88	78.80	1.55%	Apr. 11, 2018

Table 1. Results of system validation

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



1.12 Tissue Simulant Fluid for the Frequency Band

The dielectric properties for this Head-simulant fluid were measured by using the Agilent Model 85070E Dielectric Probe (rates frequency band 200 MHz to 20 GHz) in conjunction with Network Analyzer.

All dielectric parameters of tissue simulates were measured within 24 hours of SAR measurements. The depth of the tissue simulant in the flat section of the phantom was at least 15 cm (\leq 3G) or 10 cm (>3G) during all tests. (Appendix Fig. 2)

Z) Tissue Type	Measurement Date	Measured Frequency (MHz)	Target Dielectric Constant, εr	Target Conductivity, σ (S/m)	Measured Dielectric Constant, εr	Measured Conductivity, σ (S/m)	% dev ɛr	% dev σ
		826.4	41.545	0.899	41.468	0.922	0.18%	-2.52%
	Apr, 03. 2018	835	41.500	0.900	41.336	0.924	0.40%	-2.67%
	Арі, 03. 2010	844	41.500	0.910	41.176	0.932	0.78%	-2.45%
		848.8	41.500	0.915	41.116	0.935	0.93%	-2.20%
		1720	40.126	1.354	40.695	1.319	-1.42%	2.56%
	Apr, 04. 2018	1732.4	40.107	1.361	40.634	1.320	-1.31%	3.00%
		1750	40.079	1.371	40.606	1.322	-1.32%	3.58%
		1852.4	40.000	1.400	40.105	1.374	-0.26%	1.86%
	Apr, 06. 2018	1880	40.000	1.400	39.978	1.385	0.05%	1.07%
Llood	Αρί, 00. 2010	1900	40.000	1.400	39.869	1.393	0.33%	0.50%
Head		1909.8	40.000	1.400	39.840	1.394	0.40%	0.43%
	Apr, 07. 2018	2402	39.285	1.757	39.582	1.731	-0.76%	1.50%
		2412	39.268	1.766	39.535	1.747	-0.68%	1.09%
		2450	39.200	1.800	39.382	1.788	-0.46%	0.67%
		5200	35.986	4.655	36.223	4.539	-0.66%	2.49%
		5210	35.974	4.665	36.297	4.505	-0.90%	3.43%
	Apr, 10. 2018	5290	35.883	4.747	35.852	4.649	0.09%	2.07%
	Арі, 10. 2010	5300	35.871	4.758	35.785	4.623	0.24%	2.83%
		5600	35.529	5.065	35.152	4.991	1.06%	1.46%
		5610	35.517	5.075	35.055	5.025	1.30%	0.99%
		826.4	55.234	0.969	55.191	1.005	0.08%	-3.68%
	Amr. 04, 2040	835	55.200	0.970	55.068	1.012	0.24%	-4.33%
	Apr, 04. 2018	844	55.172	0.981	54.962	1.019	0.38%	-3.87%
Body		848.8	55.158	0.987	54.972	1.023	0.34%	-3.65%
		1720	53.511	1.469	53.099	1.426	0.77%	2.96%
	Apr, 05. 2018	1732.4	53.478	1.477	53.017	1.433	0.86%	3.00%
		1750	53.432	1.488	52.945	1.432	0.91%	3.79%

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

台灣檢驗科技股份有限公司

f (886-2) 2298-0488

www.tw.sgs.com



Report No. : E5/2018/30007 Page : 73 of 202

Tissue Type	Measurement Date	Measured Frequency (MHz)	Target Dielectric Constant, εr	Target Conductivity, σ (S/m)	Measured Dielectric Constant, εr	Measured Conductivity, σ (S/m)	% dev ɛr	% dev σ
		1852.4	53.300	1.520	52.666	1.483	1.19%	2.43%
	Apr, 06. 2018	1880	53.300	1.520	52.567	1.499	1.38%	1.38%
	Api, 06. 2016	1900	53.300	1.520	52.521	1.511	1.46%	0.59%
		1909.8	53.300	1.520	52.503	1.513	1.50%	0.46%
		2402	52.764	1.904	52.744	1.949	0.04%	-2.36%
	Apr, 09. 2018	2412	52.751	1.914	52.714	1.963	0.07%	-2.58%
Body		2450	52.700	1.950	52.578	2.011	0.23%	-3.13%
		5200	49.014	5.299	49.598	5.130	-1.19%	3.19%
		5210	49.001	5.311	49.518	5.118	-1.06%	3.63%
	Apr, 11. 2018	5290	48.892	5.404	49.531	5.279	-1.31%	2.32%
	Αρι, τΙ. 2016	5300	48.879	5.416	49.321	5.255	-0.91%	2.97%
		5600	48.471	5.766	48.480	5.722	-0.02%	0.77%
		5610	48.458	5.778	48.431	5.758	0.06%	0.35%

Table 2. Dielectric Parameters of Tissue Simulant Fluid

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號



The composition of the tissue simulating liquid:	sition of the tissue simulating lie	quid:
--	-------------------------------------	-------

F				Ingre	edient			Tatal
Frequency (MHz)	Mode	DGMBE	Water	Salt	Preventol D-7	Cellulose	Sugar	Total amount
050	Head		532.98 g	18.3 g	2.4 g	3.2 g	766 g	1.3L(Kg)
850	Body	1	631.68 g	11.72 g	1.2 g		600 g	1.0L(Kg)
4750	Head	444.52 g	552.42 g	3.06 g	_		I	1.0L(Kg)
1750	Body	300.67 g	716.56 g	4.0 g	_	-		1.0L(Kg)
4000	Head	444.52 g	552.42 g	3.06 g	_		I	1.0L(Kg)
1900	Body	300.67 g	716.56 g	4.0 g	—		I	1.0L(Kg)
0.450	Head	550ml	450ml		_			1.0L(Kg)
2450	Body	301.7ml	698.3ml		_	_	-	1.0L(Kg)

Simulating Liquids for 5 GHz, Manufactured by SPEAG:

Ingredients	Water	Esters, Emulsifiers, Inhibitors	Sodium and Salt
(% by weight)	60-80	20-40	0-1.5

Table 3. Recipes for tissue simulating liquid

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號



1.13 Test Standards and Limits

According to FCC 47CFR §2.1093(d) The limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate ("SAR") in Section 4.2 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz," ANSI/IEEE C95.1, By the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017.

These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in "Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields," NCRP Report No. 86, Section 17.4.5. Copyright NCRP, 1986, Bethesda, Maryland 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards. The criteria to be used are specified in paragraphs (d)(1) and (d)(2) of this section and shall apply for portable devices that transmit at frequencies above 6 GHz are to be evaluated in terms of the MPE limits specified in § 1.1310 of this chapter.

Measurements and calculations to demonstrate compliance with MPE field strength or power density limits for devices operating above 6 GHz should be made at a minimum distance of 5 cm from the radiating source.

 Limits for Occupational/Controlled exposure: 0.4 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 8 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 20 W/kg, as averaged over a 10 grams of tissue (defined as a tissue volume in the shape of a cube).

Occupational/Controlled limits apply when persons are exposed as a consequence of their employment provided these persons are fully aware of and exercise control over their exposure. Awareness of exposure can be accomplished by use of warning labels or by specific training or education through appropriate means, such as an RF safety program in a work environment.

2. Limits for General Population/Uncontrolled exposure: 0.08 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 1.6 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube).

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 险也口有分明,他都在结果像影响起力接口合意,同時使接口像应应的下。太親在台湾本公司書面站可,不可如心推到。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號



Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 4 W/kg, as averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube).

General Population/Uncontrolled limits apply when the general public may be exposed, or when persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or do not exercise control over their exposure.

Warning labels placed on consumer devices such as cellular telephones will not be sufficient reason to allow these devices to be evaluated subject to limits for occupational/controlled exposure in paragraph (d)(1) of this section.(Table .6)

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR (Brain)	1.60 W/kg	8.00 W/kg
Spatial Average SAR (Whole Body)	0.08 W/kg	0.40 W/kg
Spatial Peak SAR (Hands/Feet/Ankle/Wrist)	4.00 W/kg	20.00 W/kg

Table 4. RF exposure limits

Notes:

- 1. Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.
- Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sas.com



2. Summary of Results

GSM 850

Mode	Position	Distanc e (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power	Scaling	Averaged 1 (W/	g	Plot page
		()				(dBm)		Measured	Reported	
	Re Cheek	-	251	848.8	32.80	31.95	21.62%	0.19	0.23	-
Head	Re Tilt	-	251	848.8	32.80	31.95	21.62%	0.11	0.13	-
(GSM)	Le Cheek	-	251	848.8	32.80	31.95	21.62%	0.22	0.27	96
	Le Tilt	-	251	848.8	32.80	31.95	21.62%	0.13	0.16	-
Body-worn	Front side	10	251	848.8	32.80	31.95	21.62%	0.22	0.27	-
(GSM)	Back side	10	251	848.8	32.80	31.95	21.62%	0.32	0.39	97
	Front side	10	251	848.8	28.50	27.63	22.18%	0.28	0.34	-
Hotspot	Back side	10	251	848.8	28.50	27.63	22.18%	0.48	0.59	98
(GPRS)	Bottom side	10	251	848.8	28.50	27.63	22.18%	0.32	0.39	-
<1Dn4Up>	Right side	10	251	848.8	28.50	27.63	22.18%	0.19	0.23	-
	Left side	10	251	848.8	28.50	27.63	22.18%	0.25	0.31	-

GSM 1900

Mode	Position	Distanc e (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power	Scaling	1	SAR over g /kg)	Plot page
		()			· • • • • • • • • • • • • • • • • • • •	(dBm)		Measured	Reported	
	Re Cheek	-	810	1909.8	29.80	29.54	6.17%	0.25	0.27	99
Head	Re Tilt	-	810	1909.8	29.80	29.54	6.17%	0.08	0.08	-
(GSM)	Le Cheek	-	810	1909.8	29.80	29.54	6.17%	0.15	0.16	-
	Le Tilt	-	810	1909.8	29.80	29.54	6.17%	0.07	0.07	-
Body-worn	Front side	10	810	1909.8	29.80	29.54	6.17%	0.32	0.34	-
(GSM)	Back side	10	810	1909.8	29.80	29.54	6.17%	0.42	0.45	100
	Front side	10	661	1880	25.50	24.70	20.23%	0.45	0.54	-
Hotspot	Back side	10	661	1880	25.50	24.70	20.23%	0.54	0.65	101
(GPRS)	Bottom side	10	661	1880	25.50	24.70	20.23%	0.19	0.23	-
<1Dn4Up>	Right side	10	661	1880	25.50	24.70	20.23%	0.46	0.55	-
	Left side	10	661	1880	25.50	24.70	20.23%	0.07	0.08	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號



WCDMA Band II

Mode	Position	Distanc e (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power	Scaling	1 (W/	SAR over g /kg)	Plot page
		, ,			, , , , , , , , , , , , , , , , , , ,	(dBm)		Measured	Reported	
	RE Cheek	-	9262	1852.4	23.4	22.82	14.29%	0.38	0.43	102
R99	RE Tilt	-	9262	1852.4	23.4	22.82	14.29%	0.14	0.16	-
(Head)	LE Cheek	-	9262	1852.4	23.4	22.82	14.29%	0.24	0.27	-
	LE Tilt	-	9262	1852.4	23.4	22.82	14.29%	0.12	0.14	-
Body-Worn	Front side	10	9262	1852.4	23.4	22.82	14.29%	0.49	0.56	-
Body-Wonn	Back side	10	9262	1852.4	23.4	22.82	14.29%	0.57	0.65	-
	Front side	10	9262	1852.4	23.4	22.82	14.29%	0.49	0.56	-
	Back side	10	9262	1852.4	23.4	22.82	14.29%	0.57	0.65	103
Hotspot	Bottom side	10	9262	1852.4	23.4	22.82	14.29%	0.23	0.26	-
	Right side	10	9262	1852.4	23.4	22.82	14.29%	0.46	0.53	-
	Left side	10	9262	1852.4	23.4	22.82	14.29%	0.08	0.09	-

WCDMA Band IV

Mode	Position	Distanc e (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power	Scaling	1	SAR over g ⁄kg)	Plot page
		(11111)				(dBm)		Measured	Reported	
	RE Cheek	-	1412	1732.4	23.4	22.84	13.76%	0.24	0.27	104
R99	RE Tilt	-	1412	1732.4	23.4	22.84	13.76%	0.13	0.15	-
(Head)	LE Cheek	-	1412	1732.4	23.4	22.84	13.76%	0.12	0.14	-
	LE Tilt	-	1412	1732.4	23.4	22.84	13.76%	0.10	0.11	-
Body-Worn	Front side	10	1412	1732.4	23.4	22.84	13.76%	0.33	0.38	-
Body-wom	Back side	10	1412	1732.4	23.4	22.84	13.76%	0.46	0.52	-
	Front side	10	1412	1732.4	23.4	22.84	13.76%	0.33	0.38	-
	Back side	10	1412	1732.4	23.4	22.84	13.76%	0.46	0.52	105
Hotspot	Bottom side	10	1412	1732.4	23.4	22.84	13.76%	0.13	0.15	-
	Right side	10	1412	1732.4	23.4	22.84	13.76%	0.25	0.28	-
	Left side	10	1412	1732.4	23.4	22.84	13.76%	0.06	0.07	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

```
www.tw.sgs.com
```



WCDMA Band V

Mode	Position	Distanc e (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power	Scaling	<u> </u>	SAR over g ⁄kg)	Plot page
		()				(dBm)		Measured	Reported	
	RE Cheek	-	4132	826.4	24.2	23.07	29.72%	0.14	0.18	-
R99	RE Tilt	-	4132	826.4	24.2	23.07	29.72%	0.09	0.12	-
(Head)	LE Cheek	-	4132	826.4	24.2	23.07	29.72%	0.16	0.21	106
	LE Tilt	-	4132	826.4	24.2	23.07	29.72%	0.10	0.13	-
Body-Worn	Front side	10	4132	826.4	24.2	23.07	29.72%	0.20	0.26	-
Body-wom	Back side	10	4132	826.4	24.2	23.07	29.72%	0.28	0.36	-
	Front side	10	4132	826.4	24.2	23.07	29.72%	0.20	0.26	-
	Back side	10	4132	826.4	24.2	23.07	29.72%	0.28	0.36	107
Hotspot	Bottom side	10	4132	826.4	24.2	23.07	29.72%	0.17	0.22	-
	Right side	10	4132	826.4	24.2	23.07	29.72%	0.16	0.21	-
	Left side	10	4132	826.4	24.2	23.07	29.72%	0.20	0.26	-

LTE FDD Band 2

Mode	Bandwidth (MHz)	Modulatior	PR Sizo	PB start	Position	Distance	СН	Freq.	Max. Rated Avg. Power +	Measure d Avg.	Scaling	Averaged 1g (V	SAR over V/kg)	Plot												
Widde	(MHz)	viodulation	ND SIZE		rosilion	(mm)	CIT	(MHz)	Max. Toleranc e (dBm)	Power (dBm)	Scaling	Measured	Reported	page												
					RE Cheek	-	19100	1900	23.2	22.19	26.18%	0.36	0.45	108												
Head 20MH	20MHz	Hz QPSK	PSK 1 RB	0	RE Tilt	-	19100	1900	23.2	22.19	26.18%	0.13	0.16	-												
ricau	20101112					LE Cheek	-	19100	1900	23.2	22.19	26.18%	0.23	0.29	-											
					LE Tilt	-	19100	1900	23.2	22.19	26.18%	0.12	0.15	-												
Body-worn	20MHz	QPSK	108	108	108	1RB	1RB	1RB	1RB	1RB	1RB	1RB	1RB	1RB	1RB	0	Front side	10	19100	1900	23.2	22.19	26.18%	0.50	0.63	-
Body worm	20101112	g	III	0	Back side	10	19100	1900	23.2	22.19	26.18%	0.60	0.76	-												
					Front side	10	19100	1900	23.2	22.19	26.18%	0.50	0.63	-												
				F		Back side	10	19100	1900	23.2	22.19	26.18%	0.60	0.76	109											
Hotspot	20MHz	QPSK	1 RB	0	Bottom side	10	19100	1900	23.2	22.19	26.18%	0.24	0.30	-												
					Right side	10	19100	1900	23.2	22.19	26.18%	0.48	0.61	-												
					Left side	10	19100	1900	23.2	22.19	26.18%	0.08	0.10	-												

LTE FDD Band 4

Mode	Bandwidth	Modulatior	PR Sizo	PB start	Position	Distance	СН	Freq.	Max. Rated Avg. Power +	Measure d Avg.	Scaling	Averaged 1g (V	SAR over V/kg)	Plot
Wode	(MHz)	violulation	ND SIZE		rositon	(mm)	CIT	(MHz)	Max. Toleranc e (dBm)	Power (dBm)	Scaling	Measured	Reported	page
					RE Cheek	-	20050	1720	23.2	22.19	26.18%	0.20	0.25	110
Head 20MHz	QPSK	1 RB	49	RE Tilt	-	20050	1720	23.2	22.19	26.18%	0.09	0.11	-	
Tieau	2011112	Gron	TIXD	43	LE Cheek	-	20050	1720	23.2	22.19	26.18%	0.14	0.18	-
					LE Tilt	-	20050	1720	23.2	22.19	26.18%	0.07	0.09	-
Body-worn	20MHz	QPSK	1RB	49	Front side	10	20050	1720	23.2	22.19	26.18%	0.36	0.45	-
Body-worn	20101112	QF OK	IIXD	43	Back side	10	20050	1720	23.2	22.19	26.18%	0.42	0.53	-
					Front side	10	20050	1720	23.2	22.19	26.18%	0.36	0.45	-
					Back side	10	20050	1720	23.2	22.19	26.18%	0.42	0.53	111
Hotspot	20MHz	QPSK	1 RB	49	Bottom side	10	20050	1720	23.2	22.19	26.18%	0.17	0.21	-
					Right side	10	20050	1720	23.2	22.19	26.18%	0.34	0.43	-
					Left side	10	20050	1720	23.2	22.19	26.18%	0.06	0.08	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

```
www.tw.sgs.com
```



Report No. : E5/2018/30007 Page : 80 of 202

LTE FDD Band 5

Mode Bandwidtl (MHz)	Bandwidth			DB start	RB start Position	Distance (mm)	СН	Freq.	Max. Rated Avg. Power +	Measure d	Scaling		SAR over V/kg)	Plot
	(MHz)	viodulation	KD SIZE	KD Slan				(MHz)	Max. Toleranc e (dBm)	Avg. Power (dBm)	Scaling	Measured	Reported	page
					RE Cheek	-	20060	844	24	22.99	26.18%	0.14	0.18	-
Head	10MHz	QPSK	1 RB	0	RE Tilt	-	20060	844	24	22.99	26.18%	0.08	0.10	-
Heau	TOWINZ	QF SK	IND	0	LE Cheek	-	20060	844	24	22.99	26.18%	0.16	0.20	112
					LE Tilt	-	20060	844	24	22.99	26.18%	0.10	0.13	-
Body-worn	10MHz	QPSK	1RB	0	Front side	10	20060	844	24	22.99	26.18%	0.14	0.18	-
Body-worm	TOIVITIZ	QF OK	IND	0	Back side	10	20060	844	24	22.99	26.18%	0.24	0.30	-
					Front side	10	20060	844	24	22.99	26.18%	0.14	0.18	-
					Back side	10	20060	844	24	22.99	26.18%	0.24	0.30	113
Hotspot	10MHz	QPSK	1 RB	0	Bottom side	10	20060	844	24	22.99	26.18%	0.16	0.20	-
					Right side	10	20060	844	24	22.99	26.18%	0.09	0.11	-
					Left side	10	20060	844	24	22.99	26.18%	0.12	0.15	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

台灣檢驗科技股份有限公司

```
www.tw.sgs.com
```



WLAN 802.11b

Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged SAR over 1g (W/kg)		Plot page
				、 ,	Tolerance (dBm)	(dBm)		Measured	Reported	
	RE Cheek	-	1	2412	15	14.95	1.16%	0.03	0.03	-
Head	RE Tilt	-	1	2412	15	14.95	1.16%	0.01	0.01	-
Tieau	LE Cheek	-	1	2412	15	14.95	1.16%	0.05	0.05	114
	LE Tilt	-	1	2412	15	14.95	1.16%	0.02	0.02	-
Body-	Front side	10	1	2412	15	14.95	1.16%	0.02	0.02	-
worn	Back side	10	1	2412	15	14.95	1.16%	0.07	0.07	-
	Front side	10	1	2412	15	14.95	1.16%	0.02	0.02	-
Hotspot	Back side	10	1	2412	15	14.95	1.16%	0.07	0.07	115
Hotspot	Top side	10	1	2412	15	14.95	1.16%	0.00	0.00	-
	Right side	10	1	2412	15	14.95	1.16%	0.00	0.00	-

WLAN 802.11ac(80M) 5.2G

Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged S (W/	0	Plot page
		. ,			Tolerance (dBm)	(dBm)		Measured	Reported	
	RE Cheek	-	42	5210	13	12.05	24.45%	0.01	0.01	-
Head	RE Tilt	-	42	5210	13	12.05	24.45%	0.01	0.01	-
Tieau	LE Cheek	-	42	5210	13	12.05	24.45%	0.02	0.02	116
	LE Tilt	-	42	5210	13	12.05	24.45%	0.01	0.01	-
Body-	Front side	10	42	5210	13	12.05	24.45%	0.01	0.01	-
worn	Back side	10	42	5210	13	12.05	24.45%	0.04	0.05	117
Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged 10 (W/)g	Plot page
		. ,		· · ·	Tolerance (dBm)	(dBm)		Measured	Reported	
product	Front side	-	42	5210	13	12.05	24.45%	0.06	0.07	-
specific	Back side	-	42	5210	13	12.05	24.45%	0.20	0.25	118
10-g	Top side	-	42	5210	13	12.05	24.45%	0.02	0.02	-
SAR	Left side	-	42	5210	13	12.05	24.45%	0.04	0.05	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號



WLAN 802.11ac(80M) 5.3G

Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance	Measured Avg. Power	Scaling	Averaged S (W/		Plot page
					(dBm)	(dBm)		Measured	Reported	
	RE Cheek	-	58	5290	13	11.88	29.42%	0.04	0.05	-
Head	RE Tilt	-	58	5290	13	11.88	29.42%	0.04	0.05	-
Tioda	LE Cheek	-	58	5290	13	11.88	29.42%	0.07	0.09	119
	LE Tilt	-	58	5290	13	11.88	29.42%	0.03	0.04	-
Body-	Front side	10	58	5290	13	11.88	29.42%	0.01	0.01	-
worn	Back side	10	58	5290	13	11.88	29.42%	0.04	0.05	120
Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Scaling	Averaged 10 (W/ Measured)g	Plot page
product	Front side	-	58	5290	13	11.88	29.42%	0.07	0.09	-
specific	Back side	-	58	5290	13	11.88	29.42%	0.24	0.31	121
10-g	Top side	-	58	5290	13	11.88	29.42%	0.02	0.03	-
SAR	Left side	-	58	5290	13	11.88	29.42%	0.05	0.06	-
WLAN	802.11ac(8	30M) 5.	6G							
Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance	Measured Avg. Power (dBm)	Scaling	Averaged S (W/ Measured		Plot page
	RE Cheek	-	122	5610	(dBm) 13	11.96	27.06%	0.03	0.04	-
	RE Tilt	-	122	5610	13	11.96	27.06%	0.03	0.04	-
Head	LE Cheek	_	122	5610	13	11.96	27.06%	0.04	0.05	122
	LE Tilt	-	122	5610	13	11.96	27.06%	0.02	0.03	-
Body-	Front side	10	122	5610	13	11.96	27.06%	0.02	0.03	-
worn	Back side	10	122	5610	13	11.96	27.06%	0.06	0.08	123
Mode	Position	Distance (mm)	CH	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Scaling	Averaged 10 (W/ Measured	SAR over)g	Plot page
	Front side	-	122	5610	13	11.96	27.06%	0.08	0.10	-
product	Back side	-	106	5530	13	11.85	30.32%	0.17	0.22	-
specific							07.000/	0.07		104
	Back side	-	122	5610	13	11.96	27.06%	0.27	0.34	124
10-g SAR	Back side Top side	-	122 122	5610 5610	13 13	11.96 11.96	27.06%	0.27	0.34 0.04	-

Note:

台灣檢驗科技股份有限公司

Scaling = $\frac{\text{reported SAR}}{\text{measured SAR}} = \frac{P2(\text{mW})}{P1(\text{mW})} = 10^{\left(\frac{P2-P1}{10}\right)(\text{dBm})}$ Reported SAR = measured SAR * (scaling) Where P2 is maximum specified power, P1 is measured conducted power

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

```
www.tw.sgs.com
```



3. Simultaneous Transmission Analysis Simultaneous Transmission Scenarios:

Simultaneous Transmit Configurations	Head	Body-Worn	Hotspot	product specific 10-g SAR
GSM + 2.4GHz Wi-Fi	Yes	Yes	No	Yes
GPRS + 2.4GHz Wi-Fi	No	No	Yes	Yes
WCDMA + 2.4GHz Wi-Fi	Yes	Yes	Yes	Yes
LTE + 2.4GHz Wi-Fi Main	Yes	Yes	Yes	Yes
GSM + 5GHz Wi-Fi	Yes	Yes	No	Yes
GPRS + 5GHz Wi-Fi	No	Yes	No	Yes
WCDMA + 5GHz Wi-Fi	Yes	Yes	No	Yes
LTE + 5GHz Wi-Fi	Yes	Yes	No	Yes
GSM + BT	Yes	Yes	No	Yes
GPRS + BT	No	Yes	No	Yes
WCDMA + BT	Yes	Yes	No	Yes
LTE + BT	Yes	Yes	No	Yes
GSM + BT + 5GHz WiFi	Yes	Yes	No	Yes
GPRS + BT + 5GHz WiFi	No	Yes	No	Yes
WCDMA + BT + 5GHz Wi-Fi	Yes	Yes	No	Yes
LTE + BT + 5GHz Wi-Fi	Yes	Yes	No	Yes

Note:

 The device does not support DTM function. Body-worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.
 Based on KDB447498D01 note 36, when SAR test exclusion is allowed by other published RF exposure KDB procedures, such as the 2.5 cm hotspot mode SAR test exclusion for an edge or surface, then estimated SAR is not required to determine simultaneous SAR test exclusion.

3: Based on KDB 648474 D04v01r03 note 6, simultaneous transmission SAR for 10-g extremity SAR requires consideration only when standalone 10-g SAR is required.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

```
www.tw.sas.com
```



3.1 Estimated SAR calculation

According to KDB447498 D01v06 – When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

Estimated SAR =
$$\frac{\text{Max.tune up power (mW)}}{\text{Min.test separation distance(mm)}} \times \frac{\sqrt{f(\text{GHz})}}{7.5}$$

If the minimum test separation distance is < 5mm, a distance of 5mm is used for estimated SAR calculation. When the test separation distance is >50mm, the 0.4W/kg is used for SAR-1g.

Mode	Position	Max. Power (dBm)	f(GHz)	Distanc e (mm)	x	Estimated SAR
BT	Head	9	2.48	5	7.5	0.33
BT	Body-worn	9	2.48	10	7.5	0.17

3.2 SPLSR evaluation and analysis

Per KDB447498D01, when the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR sum to peak location separation ratio(SPLSR).

The simultaneous transmitting antennas in each operating mode and exposure condition combination must be considered one pair at a time to determine the SAR to peak location separation ratio to qualify for test exclusion.

The ratio is determined by (SAR1 + SAR2)^1.5/Ri, rounded to two decimal digits, and must be \leq 0.04 for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion.

SAR1 and SAR2 are the highest reported or estimated SAR for each antenna in the pair, and Ri is the separation distance between the peak SAR locations for the antenna pair in mm.

When standalone test exclusion applies, SAR is estimated; the peak location is assumed to be at the feed-point or geometric center of the antenna.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

f (886-2) 2298-0488

www.tw.sas.com

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





Simultaneous Transmission Combination

band	Г ^г	วรแบบ	WWAN	WLAN	<1.6W/kg
		Right cheek	0.23	0.03	0.26
	Head	Right tilt	0.13	0.01	0.14
GSM 850	Head	Left cheek	0.27	0.05	0.32
G2W 020		Left tilt	0.16	0.02	0.18
	body-	Front side	0.27	0.02	0.29
	worn	Back side	0.39	0.07	0.46
		Front side	0.34	0.02	0.36
		Back side	0.59	0.07	0.66
GPRS 850	Hotspot	Top side	-	0.00	-
(1Dn4UP)	Ποισροι	Bottom side	0.39	-	-
		Right side	0.23	-	-
		Left side	0.31	0.00	0.31
	Head	Right cheek	0.27	0.03	0.30
		Right tilt	0.08	0.01	0.09
GSM 1900		Left cheek	0.16	0.05	0.21
0.5101 1900		Left tilt	0.07	0.02	0.09
	body-	Front side	0.34	0.02	0.36
	worn	Back side	0.45	0.07	0.52
		Front side	0.54	0.02	0.56
		Back side	0.65	0.07	0.72
GPRS 1900	Hotspot	Top side	-	0.00	-
(1Dn4UP)	riotopot	Bottom side	0.23	-	-
		Right side	0.55	-	-
		Left side	0.08	0.00	0.08

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

台灣檢驗科技股份有限公司



reported SAR WWAN and WLAN 2.4GHz, ΣSAR evaluation										
Frequency		osition	reported	SAR / W/kg	ΣSAR					
band	P	JSILION	WWAN	WLAN	<1.6W/kg					
		Right cheek	0.43	0.03	0.46					
	Head	Right tilt	0.16	0.01	0.17					
	пеац	Left cheek	0.27	0.05	0.32					
		Left tilt	0.14	0.02	0.16					
	body-	Front side	0.56	0.02	0.58					
WCDMA	worn	Back side	0.65	0.07	0.72					
Band II		Front side	0.56	0.02	0.58					
		Back side	0.65	0.07	0.72					
	Hotspot	Top side	-	0.00	-					
		Bottom side	0.26	-	-					
		Right side	0.53	-	-					
		Left side	0.09	0.00	0.09					
	Head	Right cheek	0.27	0.03	0.30					
		Right tilt	0.15	0.01	0.16					
	Tieau	Left cheek	0.14	0.05	0.19					
		Left tilt	0.11	0.02	0.13					
	body-	Front side	0.38	0.02	0.40					
WCDMA	worn	Back side	0.52	0.07	0.59					
Band IV		Front side	0.38	0.02	0.40					
		Back side	0.52	0.07	0.59					
	Hotspot	Top side	-	0.00	-					
	riotopot	Bottom side	0.15	-	-					
		Right side	0.28	-	-					
		Left side	0.07	0.00	0.07					

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號



reported SAR WWAN and WLAN 2.4GHz, ΣSAR evaluation										
Frequency	D	osition	reported	SAR / W/kg	ΣSAR					
band	P	OSITION	WWAN	WLAN	<1.6W/kg					
		Right cheek	0.18	0.03	0.21					
	Head	Right tilt	0.12	0.01	0.13					
	Tieau	Left cheek	0.21	0.05	0.26					
		Left tilt	0.13	0.02	0.15					
	body-	Front side	0.26	0.02	0.28					
WCDMA	worn	Back side	0.36	0.07	0.43					
Band V		Front side	0.26	0.02	0.28					
		Back side	0.36	0.07	0.43					
	Hotspot	Top side	-	0.00	-					
	Ποιδροι	Bottom side	0.22	-	-					
		Right side	0.21	-	-					
		Left side	0.26	0.00	0.26					
	Head	Right cheek	0.45	0.03	0.48					
		Right tilt	0.16	0.01	0.17					
		Left cheek	0.29	0.05	0.34					
		Left tilt	0.15	0.02	0.17					
	body-	Front side	0.63	0.02	0.65					
LTE FDD	worn	Back side	0.76	0.07	0.83					
Band 2		Front side	0.63	0.02	0.65					
		Back side	0.76	0.07	0.83					
	Hotspot	Top side	-	0.00	-					
	riotspot	Bottom side	0.30	-	-					
		Right side	0.61	-	-					
		Left side	0.10	0.00	0.10					

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

台灣檢驗科技股份有限公司



reported SAR WWAN and WLAN 2.4GHz, ΣSAR evaluation										
Frequency			reported	SAR / W/kg	ΣSAR					
band	P	osition	WWAN	WLAN	<1.6W/kg					
		Right cheek	0.25	0.03	0.28					
	Head	Right tilt	0.11	0.01	0.12					
	Tieau	Left cheek	0.18	0.05	0.23					
		Left tilt	0.09	0.02	0.11					
	body-	Front side	0.45	0.02	0.47					
LTE FDD	worn	Back side	0.53	0.07	0.60					
Band 4		Front side	0.45	0.02	0.47					
		Back side	0.53	0.07	0.60					
	Hotspot	Top side	-	0.00	-					
	Ποισροι	Bottom side	0.21	-	-					
		Right side	0.43	-	-					
		Left side	0.08	0.00	0.08					
	Head	Right cheek	0.18	0.03	0.21					
		Right tilt	0.10	0.01	0.11					
	rieau	Left cheek	0.20	0.05	0.25					
		Left tilt	0.13	0.02	0.15					
	body-	Front side	0.18	0.02	0.20					
LTE FDD	worn	Back side	0.30	0.07	0.37					
Band 5		Front side	0.18	0.02	0.20					
		Back side	0.30	0.07	0.37					
	Hotspot	Top side	-	0.00	-					
	riotspot	Bottom side	0.20	-	-					
		Right side	0.11	-	-					
		Left side	0.15	0.00	0.15					

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

台灣檢驗科技股份有限公司



reported SAR WWAN and WLAN 5GHz, ΣSAR evaluation									
Frequency			reported S	SAR / W/kg	ΣSAR				
band	P	osition	WWAN	WLAN Main	<1.6W/kg				
		Right cheek	0.23	0.05	0.28				
	Head	Right tilt	0.13	0.05	0.18				
GSM 850	пеац	Left cheek	0.27	0.09	0.36				
G3W 830		Left tilt	0.16	0.04	0.20				
	body-	Front side	0.27	0.03	0.30				
	worn	Back side	0.39	0.08	0.47				
		Right cheek	0.27	0.05	0.32				
	Head	Right tilt	0.08	0.05	0.13				
GSM 1900	neau	Left cheek	0.16	0.09	0.25				
GSW 1900		Left tilt	0.07	0.04	0.11				
	body-	Front side	0.34	0.03	0.37				
	worn	Back side	0.45	0.08	0.53				
	Head	Right cheek	0.43	0.05	0.48				
		Right tilt	0.16	0.05	0.21				
WCDMA Band II		Left cheek	0.27	0.09	0.36				
		Left tilt	0.14	0.04	0.18				
	body-	Front side	0.56	0.03	0.59				
	worn	Back side	0.65	0.08	0.73				
		Right cheek	0.27	0.05	0.32				
	Head	Right tilt	0.15	0.05	0.20				
WCDMA Band IV	пеац	Left cheek	0.14	0.09	0.23				
		Left tilt	0.11	0.04	0.15				
	body-	Front side	0.38	0.03	0.41				
	worn	Back side	0.52	0.08	0.60				
		Right cheek	0.18	0.05	0.23				
	Head	Right tilt	0.12	0.05	0.17				
WCDMA Band V	пеац	Left cheek	0.21	0.09	0.30				
WCDIVIA Band V		Left tilt	0.13	0.04	0.17				
	body-	Front side	0.26	0.03	0.29				
	worn	Back side	0.36	0.08	0.44				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



reported SAR WWAN and WLAN 5GHz, ΣSAR evaluation									
Frequency	D	a a iti a n	reported S	SAR / W/kg	ΣSAR				
band	Position		WWAN	WLAN Main	<1.6W/kg				
		Right cheek	0.45	0.05	0.50				
	Head	Right tilt	0.16	0.05	0.21				
LTE FDD Band 2	Heau	Left cheek	0.29	0.09	0.38				
LTET DD Banu 2		Left tilt	0.15	0.04	0.19				
	body-	Front side	0.63	0.03	0.66				
	worn	Back side	0.76	0.08	0.84				
		Right cheek	0.25	0.05	0.30				
	Head	Right tilt	0.11	0.05	0.16				
LTE FDD Band 4		Left cheek	0.18	0.09	0.27				
LTET DD Band 4		Left tilt	0.09	0.04	0.13				
	body-	Front side	0.45	0.03	0.48				
	worn	Back side	0.53	0.08	0.61				
		Right cheek	0.18	0.05	0.23				
	Head	Right tilt	0.10	0.05	0.15				
LTE FDD Band 5	rieau	Left cheek	0.20	0.09	0.29				
		Left tilt	0.13	0.04	0.17				
	body-	Front side	0.18	0.03	0.21				
	worn	Back side	0.30	0.08	0.38				

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號



reported SAR WWAN and Bluetooth, ΣSAR evaluation						
Frequency	Position		reported S	ΣSAR		
band			WWAN	BT	<1.6W/kg	
GSM 850		Right cheek	0.23	0.33	0.56	
	Head	Right tilt	0.13	0.33	0.46	
		Left cheek	0.27	0.33	0.60	
GOW 000		Left tilt	0.16	0.33	0.49	
	body-	Front side	0.27	0.17	0.44	
	worn	Back side	0.39	0.17	0.56	
		Right cheek	0.27	0.33	0.60	
	Head	Right tilt	0.08	0.33	0.41	
GSM 1900		Left cheek	0.16	0.33	0.49	
GOW 1900		Left tilt	0.07	0.33	0.40	
	body-	Front side	0.34	0.17	0.51	
	worn	Back side	0.45	0.17	0.62	
	Head	Right cheek	0.43	0.33	0.76	
		Right tilt	0.16	0.33	0.49	
WCDMA Band II		Left cheek	0.27	0.33	0.60	
		Left tilt	0.14	0.33	0.47	
	body-	Front side	0.56	0.17	0.73	
	worn	Back side	0.65	0.17	0.82	
	Head	Right cheek	0.27	0.33	0.60	
		Right tilt	0.15	0.33	0.48	
WCDMA Band IV		Left cheek	0.14	0.33	0.47	
		Left tilt	0.11	0.33	0.44	
	body-	Front side	0.38	0.17	0.55	
	worn	Back side	0.52	0.17	0.69	
WCDMA Band V	Head	Right cheek	0.18	0.33	0.51	
		Right tilt	0.12	0.33	0.45	
		Left cheek	0.21	0.33	0.54	
		Left tilt	0.13	0.33	0.46	
	body- worn	Front side	0.26	0.17	0.43	
		Back side	0.36	0.17	0.53	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

f (886-2) 2298-0488

www.tw.sgs.com



reported SAR WWAN and Bluetooth, ΣSAR evaluation						
Frequency	Position		reported S	ΣSAR		
band			WWAN	BT	<1.6W/kg	
	Head	Right cheek	0.45	0.33	0.78	
		Right tilt	0.16	0.33	0.49	
LTE FDD Band 2		Left cheek	0.29	0.33	0.62	
		Left tilt	0.15	0.33	0.48	
	body- worn	Front side	0.63	0.17	0.80	
		Back side	0.76	0.17	0.93	
	Head	Right cheek	0.25	0.33	0.58	
		Right tilt	0.11	0.33	0.44	
LTE FDD Band 4		Left cheek	0.18	0.33	0.51	
		Left tilt	0.09	0.33	0.42	
	body- worn	Front side	0.45	0.17	0.62	
		Back side	0.53	0.17	0.70	
LTE FDD Band 5	Head	Right cheek	0.18	0.33	0.51	
		Right tilt	0.10	0.33	0.43	
		Left cheek	0.20	0.33	0.53	
		Left tilt	0.13	0.33	0.46	
	body- worn	Front side	0.18	0.17	0.35	
		Back side	0.30	0.17	0.47	

t (886-2) 2299-3279


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

台灣檢驗科技股份有限公司

f (886-2) 2298-0488

www.tw.sgs.com





reported SAR WWAN and WLAN 5GHz and Bluetooth, ΣSAR evaluation						
Frequency			repo	ΣSAR		
band	Position		WWAN	WLAN	BT	<1.6W/kg
GSM 850		Right cheek	0.23	0.05	0.33	0.61
	Head	Right tilt	0.13	0.05	0.33	0.51
		Left cheek	0.27	0.09	0.33	0.69
G3W 850		Left tilt	0.16	0.04	0.33	0.53
	body- worn	Front side	0.27	0.03	0.17	0.47
		Back side	0.39	0.08	0.17	0.64
		Right cheek	0.27	0.05	0.33	0.65
	Head	Right tilt	0.08	0.05	0.33	0.46
GSM 1900		Left cheek	0.16	0.09	0.33	0.58
G3W 1900		Left tilt	0.07	0.04	0.33	0.44
	body-	Front side	0.34	0.03	0.17	0.54
	worn	Back side	0.45	0.08	0.17	0.70
	Head	Right cheek	0.43	0.05	0.33	0.81
		Right tilt	0.16	0.05	0.33	0.54
WCDMA Band II		Left cheek	0.27	0.09	0.33	0.69
		Left tilt	0.14	0.04	0.33	0.51
	body-	Front side	0.56	0.03	0.17	0.76
	worn	Back side	0.65	0.08	0.17	0.90
	Head	Right cheek	0.27	0.05	0.33	0.65
		Right tilt	0.15	0.05	0.33	0.53
WCDMA Band IV		Left cheek	0.14	0.09	0.33	0.56
		Left tilt	0.11	0.04	0.33	0.48
	body-	Front side	0.38	0.03	0.17	0.58
	worn	Back side	0.52	0.08	0.17	0.77
	Head	Right cheek	0.18	0.05	0.33	0.56
		Right tilt	0.12	0.05	0.33	0.50
		Left cheek	0.21	0.09	0.33	0.63
WCDMA Band V		Left tilt	0.13	0.04	0.33	0.50
	body- worn	Front side	0.26	0.03	0.17	0.46
		Back side	0.36	0.08	0.17	0.61

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號



reported SAR WWAN and WLAN 5GHz and Bluetooth, ΣSAR evaluation							
Frequency	Position		repo	ΣSAR			
band			WWAN	WLAN	BT	<1.6W/kg	
LTE FDD Band 2		Right cheek	0.45	0.05	0.33	0.83	
	Head	Right tilt	0.16	0.05	0.33	0.54	
		Left cheek	0.29	0.09	0.33	0.71	
		Left tilt	0.15	0.04	0.33	0.52	
	body-	Front side	0.63	0.03	0.17	0.83	
	worn	Back side	0.76	0.08	0.17	1.01	
LTE FDD Band 4	Head	Right cheek	0.25	0.05	0.33	0.63	
		Right tilt	0.11	0.05	0.33	0.49	
		Left cheek	0.18	0.09	0.33	0.60	
		Left tilt	0.09	0.04	0.33	0.46	
	body- worn	Front side	0.45	0.03	0.17	0.65	
		Back side	0.53	0.08	0.17	0.78	
LTE FDD Band 5	Head	Right cheek	0.18	0.05	0.33	0.56	
		Right tilt	0.10	0.05	0.33	0.48	
		Left cheek	0.20	0.09	0.33	0.62	
		Left tilt	0.13	0.04	0.33	0.50	
	body-	Front side	0.18	0.03	0.17	0.38	
	worn	Back side	0.30	0.08	0.17	0.55	

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

台灣檢驗科技股份有限公司

```
www.tw.sgs.com
```



4. Instruments List

Manufacturer	Device	Туре	Serial number	Date of last calibration	Date of next calibration
SPEAG	Dosimetric E-Field Probe	EX3DV4	3831	Jan.23,2018	Jan.22,2019
		D835V2	4d063	Aug.21,2017	Aug.20,2018
	System Validation Dipole	D1750V2	1008	Aug.21,2017	Aug.20,2018
SPEAG		D1900V2	5d173	May.31,2017	May.30,2018
	Dipolo	D2450V2	727	Apr.21,2017	Apr.20,2018
		D5GHzV2	1023	Jan.25,2018	Jan.24,2019
SPEAG	Data acquisition Electronics	DAE4	913	May.02,2017	May.01,2018
SPEAG	Software	DASY 52 V52.8.8	N/A	Calibration not required	Calibration not required
SPEAG	Phantom	SAM	N/A	Calibration not required	Calibration not required
Network Analyzer	Agilent	E5071C	MY46107530	Feb.26,2018	Feb.25,2019
Agilent	Dielectric Probe Kit	85070E	MY44300677	Calibration not required	Calibration not required
Agilent	Dual-directional	772D	MY52180142	Apr.13,2017	Apr.12,2018
	coupler	778D	MY52180302	Apr.13,2017	Apr.12,2018
Agilent	RF Signal Generator	N5181A	MY50144143	Mar.14,2018	Mar.13,2019
Agilent	Power Meter	E4417A	MY52240003	Dec.21,2017	Dec.20,2018
Agilent	Power Sensor	E9301H	MY52200003	Dec.21,2017	Dec.20,2018
			MY52200004	Dec.21,2017	Dec.20,2018
TECPEL	Digital thermometer	N5181A	MY50144143	Mar.15,2018	Mar.14,2019
Anritsu	Radio Communication Test	MT8820C	6201061014	Mar.14,2018	Mar.13,2019

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279



Report No. : E5/2018/30007 Page : 96 of 202

5. Measurements

Date: 2018/4/3

GSM 850_Head_Le Cheek_CH 251

Communication System: GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3 Medium parameters used: f = 849 MHz; σ = 0.935 S/m; ϵ_r = 41.116; ρ = 1000 kg/m³ Phantom section: Left Section Ambient temperature: 22.3°C; Liquid temperature: 21.8°C

DASY5 Configuration:


- Probe: EX3DV4 SN3831; ConvF(9.1, 9.1, 9.1); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Area Scan (71x121x1): Interpolated grid: dx=15 mm, dy=15 mm Maximum value of SAR (interpolated) = 0.244 W/kg

Configuration/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm,

dz=5mm Reference Value = 4.287 V/m; Power Drift = 0.15 dB Peak SAR (extrapolated) = 0.269 W/kg SAR(1 g) = 0.216 W/kg; SAR(10 g) = 0.163 W/kg

Maximum value of SAR (measured) = 0.249 W/kg

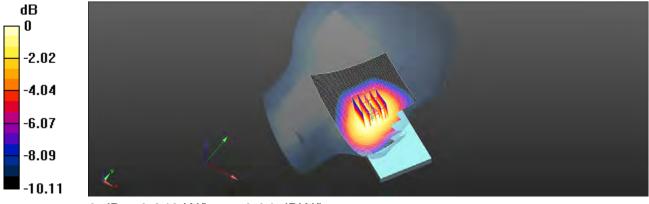

0 dB = 0.249 W/kg = -6.04 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Report No. : E5/2018/30007 Page : 97 of 202

Date: 2018/4/4

GSM 850_Body-worn_Back side_CH 251_10mm

Communication System: GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3 Medium parameters used: f = 849 MHz; σ = 1.023 S/m; ϵ_r = 54.972; ρ = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.5°C; Liquid temperature: 21.8°C


DASY5 Configuration:

- Probe: EX3DV4 SN3831; ConvF(9.18, 9.18, 9.18); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Area Scan (71x121x1): Interpolated grid: dx=15 mm, dy=15 mm Maximum value of SAR (interpolated) = 0.489 W/kg

Configuration/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.94 V/m; Power Drift = -0.02 dB Peak SAR (extrapolated) = 0.515 W/kg SAR(1 g) = 0.324 W/kg; SAR(10 g) = 0.200 W/kg Maximum value of SAR (measured) = 0.422 W/kg

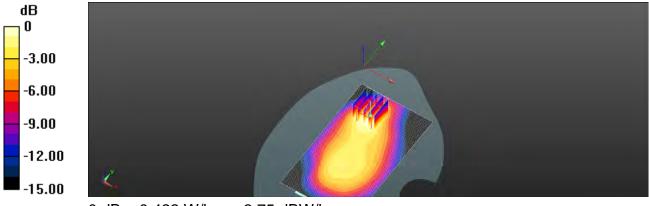

0 dB = 0.422 W/kg = -3.75 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279



Report No. : E5/2018/30007 Page : 98 of 202

Date: 2018/4/4

GPRS 850_Hotspot_Back side_CH 251_10mm

Communication System: GPRS (1Dn4Up); Frequency: 848.8 MHz; Duty Cycle: 1:2 Medium parameters used: f = 849 MHz; σ = 1.023 S/m; ϵ_r = 54.972; ρ = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.5°C; Liquid temperature: 21.8°C


DASY5 Configuration:

- Probe: EX3DV4 SN3831; ConvF(9.18, 9.18, 9.18); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Area Scan (71x121x1): Interpolated grid: dx=15 mm, dy=15 mm Maximum value of SAR (interpolated) = 0.757 W/kg

Configuration/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.02 V/m; Power Drift = -0.10 dB Peak SAR (extrapolated) = 0.806 W/kg SAR(1 g) = 0.475 W/kg; SAR(10 g) = 0.284 W/kg Maximum value of SAR (measured) = 0.637 W/kg

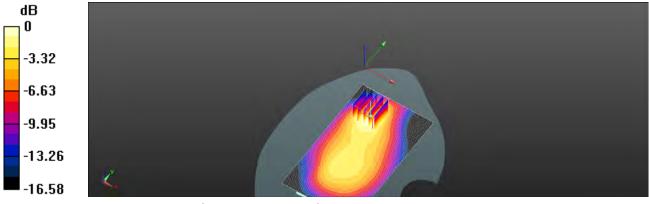

0 dB = 0.637 W/kg = -1.96 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

```
www.tw.sgs.com
```



Report No. : E5/2018/30007 Page : 99 of 202

Date: 2018/4/6

GSM 1900_Head_Re Cheek_CH 810

Communication System: GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3 Medium parameters used: f = 1910 MHz; σ = 1.394 S/m; ϵ_r = 39.84; ρ = 1000 kg/m³ Phantom section: Right Section Ambient temperature: 22.4°C; Liquid temperature: 21.8°C


DASY5 Configuration:

- Probe: EX3DV4 SN3831; ConvF(7.78, 7.78, 7.78); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Area Scan (71x121x1): Interpolated grid: dx=15 mm, dy=15 mm Maximum value of SAR (interpolated) = 0.318 W/kg

Configuration/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.520 V/m; Power Drift = 0.07 dB Peak SAR (extrapolated) = 0.372 W/kg SAR(1 g) = 0.254 W/kg; SAR(10 g) = 0.164 W/kg Maximum value of SAR (measured) = 0.308 W/kg

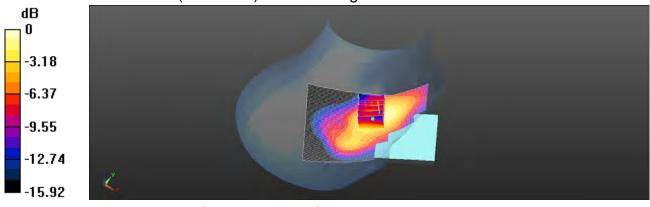

0 dB = 0.308 W/kg = -5.11 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279



Report No. : E5/2018/30007 Page : 100 of 202

Date: 2018/4/6

GSM 1900_Body-worn_Back side_CH 810_10mm

Communication System: GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3 Medium parameters used: f = 1910 MHz; σ = 1.513 S/m; ϵ_r = 52.503; ρ = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.1°C; Liquid temperature: 21.7°C


DASY5 Configuration:

- Probe: EX3DV4 SN3831; ConvF(7.35, 7.35, 7.35); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Area Scan (71x121x1): Interpolated grid: dx=15 mm, dy=15 mm Maximum value of SAR (interpolated) = 0.576 W/kg

Configuration/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.08 V/m; Power Drift = -0.07 dB Peak SAR (extrapolated) = 0.719 W/kg SAR(1 g) = 0.424 W/kg; SAR(10 g) = 0.240 W/kg Maximum value of SAR (measured) = 0.566 W/kg

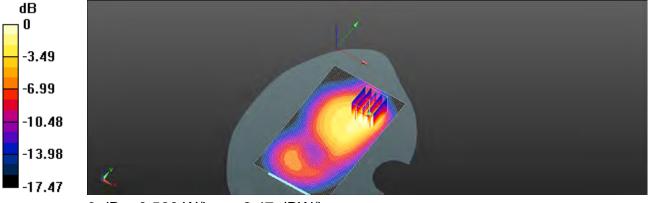

0 dB = 0.566 W/kg = -2.47 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488

```
www.tw.sgs.com
```

Member of SGS Group



Report No. : E5/2018/30007 Page : 101 of 202

Date: 2018/4/6

GPRS 1900_Hotspot_Back side_CH 661_10mm

Communication System: GPRS (1Dn4Up); Frequency: 1880 MHz; Duty Cycle: 1:2 Medium parameters used: f = 1880 MHz; σ = 1.499 S/m; ϵ_r = 52.567; ρ = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.1°C; Liquid temperature: 21.7°C


DASY5 Configuration:

- Probe: EX3DV4 SN3831; ConvF(7.35, 7.35, 7.35); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Area Scan (71x121x1): Interpolated grid: dx=15 mm, dy=15 mm Maximum value of SAR (interpolated) = 0.663 W/kg

Configuration/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.31 V/m; Power Drift = 0.09 dB Peak SAR (extrapolated) = 0.893 W/kg SAR(1 g) = 0.536 W/kg; SAR(10 g) = 0.308 W/kg Maximum value of SAR (measured) = 0.682 W/kg

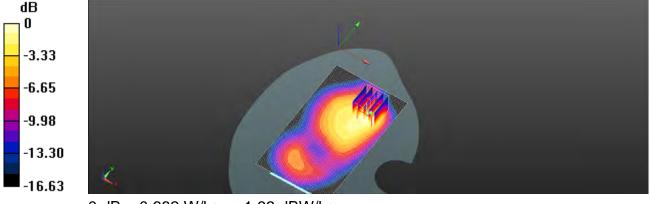

0 dB = 0.682 W/kg = -1.66 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488

www.tw.sgs.com



Report No. : E5/2018/30007 Page : 102 of 202

Date: 2018/4/6

WCDMA Band II_Head_Re Cheek_CH 9262

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1 Medium parameters used: f = 1852.4 MHz; σ = 1.374 S/m; ϵ_r = 40.105; ρ = 1000 kg/m³ Phantom section: Right Section Ambient temperature: 22.4°C; Liquid temperature: 21.8°C


DASY5 Configuration:

- Probe: EX3DV4 SN3831; ConvF(7.78, 7.78, 7.78); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Area Scan (71x121x1): Interpolated grid: dx=15 mm, dy=15 mm Maximum value of SAR (interpolated) = 0.480 W/kg

Configuration/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.911 V/m; Power Drift = -0.19 dB Peak SAR (extrapolated) = 0.553 W/kg SAR(1 g) = 0.382 W/kg; SAR(10 g) = 0.250 W/kg Maximum value of SAR (measured) = 0.461 W/kg

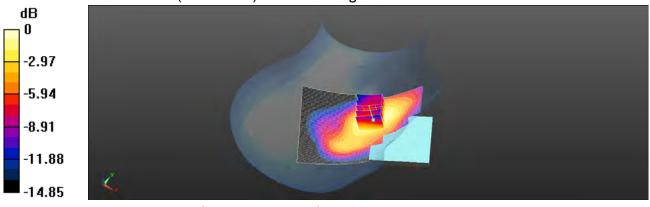

0 dB = 0.461 W/kg = -3.36 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279

www.tw.sgs.com



Report No. : E5/2018/30007 Page : 103 of 202

Date: 2018/4/6

WCDMA Band II_Hotspot_Back side_CH 9262_10mm

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1 Medium parameters used: f = 1852.4 MHz; σ = 1.483 S/m; ϵ_r = 52.666; ρ = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.1°C; Liquid temperature: 21.7°C


DASY5 Configuration:

- Probe: EX3DV4 SN3831; ConvF(7.35, 7.35, 7.35); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Area Scan (71x121x1): Interpolated grid: dx=15 mm, dy=15 mm Maximum value of SAR (interpolated) = 0.790 W/kg

Configuration/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.10 V/m; Power Drift = -0.09 dB Peak SAR (extrapolated) = 0.962 W/kg SAR(1 g) = 0.572 W/kg; SAR(10 g) = 0.333 W/kg Maximum value of SAR (measured) = 0.735 W/kg

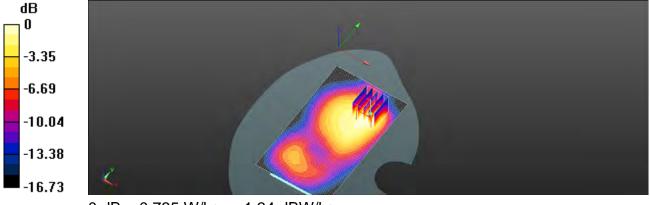

0 dB = 0.735 W/kg = -1.34 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279

```
www.tw.sgs.com
```



Report No. : E5/2018/30007 Page : 104 of 202

Date: 2018/4/4

WCDMA Band IV_Head_Re Cheek_CH 1412

Communication System: WCDMA; Frequency: 1732.4 MHz; Duty Cycle: 1:1 Medium parameters used: f = 1732.4 MHz; σ = 1.32 S/m; ϵ_r = 40.634; ρ = 1000 kg/m³ Phantom section: Right Section Ambient temperature: 22.1°C; Liquid temperature: 21.6°C


DASY5 Configuration:

- Probe: EX3DV4 SN3831; ConvF(8.09, 8.09, 8.09); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Area Scan (71x121x1): Interpolated grid: dx=15 mm, dy=15 mm Maximum value of SAR (interpolated) = 0.299 W/kg

Configuration/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.043 V/m; Power Drift = -0.03 dB Peak SAR (extrapolated) = 0.341 W/kg SAR(1 g) = 0.240 W/kg; SAR(10 g) = 0.163 W/kg Maximum value of SAR (measured) = 0.288 W/kg

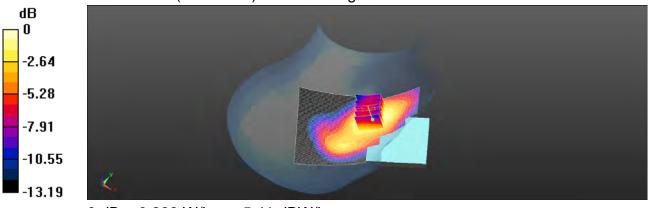

0 dB = 0.288 W/kg = -5.41 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279



Report No. : E5/2018/30007 Page : 105 of 202

Date: 2018/4/5

WCDMA Band IV_Hotspot_Back side_CH 1412_10mm

Communication System: WCDMA; Frequency: 1732.4 MHz; Duty Cycle: 1:1 Medium parameters used: f = 1732.4 MHz; σ = 1.433 S/m; ϵ_r = 53.017; ρ = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.1°C; Liquid temperature: 21.8°C


DASY5 Configuration:

- Probe: EX3DV4 SN3831; ConvF(7.65, 7.65, 7.65); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Area Scan (71x121x1): Interpolated grid: dx=15 mm, dy=15 mm Maximum value of SAR (interpolated) = 0.647 W/kg

Configuration/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.356 V/m; Power Drift = -0.05 dB Peak SAR (extrapolated) = 0.736 W/kg SAR(1 g) = 0.462 W/kg; SAR(10 g) = 0.294 W/kg Maximum value of SAR (measured) = 0.568 W/kg

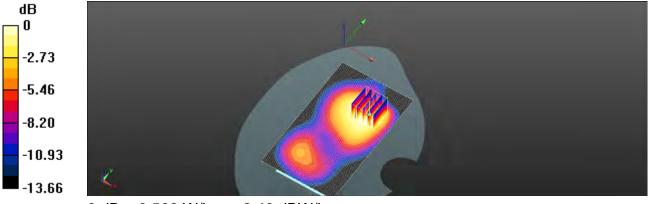

0 dB = 0.568 W/kg = -2.46 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

```
www.tw.sgs.com
```



Report No. : E5/2018/30007 Page : 106 of 202

Date: 2018/4/3

WCDMA Band V_Head_Le Cheek_CH 4132

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1 Medium parameters used: f = 826.4 MHz; σ = 0.922 S/m; ϵ_r = 41.468; ρ = 1000 kg/m³ Phantom section: Left Section Ambient temperature: 22.3°C; Liquid temperature: 21.8°C


DASY5 Configuration:

- Probe: EX3DV4 SN3831; ConvF(9.1, 9.1, 9.1); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Area Scan (71x121x1): Interpolated grid: dx=15 mm, dy=15 mm Maximum value of SAR (interpolated) = 0.175 W/kg

Configuration/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.615 V/m; Power Drift = 0.12 dB Peak SAR (extrapolated) = 0.194 W/kg SAR(1 g) = 0.156 W/kg; SAR(10 g) = 0.118 W/kg Maximum value of SAR (measured) = 0.178 W/kg

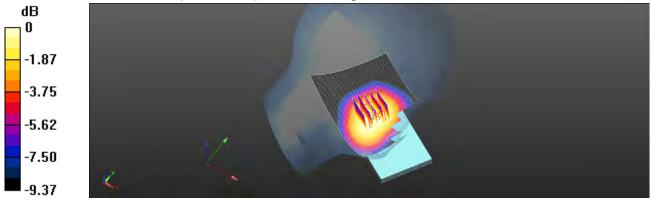

0 dB = 0.178 W/kg = -7.50 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279



Report No. : E5/2018/30007 Page : 107 of 202

Date: 2018/4/4

WCDMA Band V_Hotspot_Back side_CH 4132_10mm

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1 Medium parameters used: f = 826.4 MHz; σ = 1.005 S/m; ϵ_r = 55.191; ρ = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.5°C; Liquid temperature: 21.8°C


DASY5 Configuration:

- Probe: EX3DV4 SN3831; ConvF(9.18, 9.18, 9.18); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Area Scan (71x121x1): Interpolated grid: dx=15 mm, dy=15 mm Maximum value of SAR (interpolated) = 0.437 W/kg

Configuration/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.62 V/m; Power Drift = 0.03 dB Peak SAR (extrapolated) = 0.487 W/kg SAR(1 g) = 0.280 W/kg; SAR(10 g) = 0.168 W/kg Maximum value of SAR (measured) = 0.375 W/kg

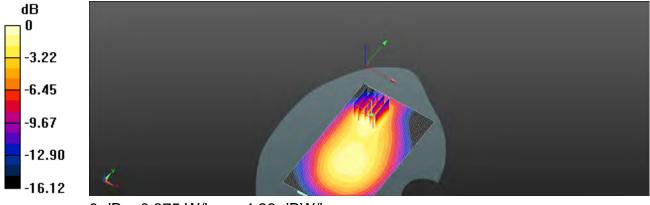

0 dB = 0.375 W/kg = -4.26 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279



Report No. : E5/2018/30007 Page : 108 of 202

Date: 2018/4/6

LTE Band 2 (20MHz)_Head_Re Cheek_CH 19100_QPSK_1-0

Communication System: LTE; Frequency: 1900 MHz; Duty Cycle: 1:1 Medium parameters used: f = 1900 MHz; σ = 1.393 S/m; ϵ_r = 39.869; ρ = 1000 kg/m³ Phantom section: Right Section Ambient temperature: 22.4°C; Liquid temperature: 21.8°C


DASY5 Configuration:

- Probe: EX3DV4 SN3831; ConvF(7.78, 7.78, 7.78); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Area Scan (71x121x1): Interpolated grid: dx=15 mm, dy=15 mm Maximum value of SAR (interpolated) = 0.455 W/kg

Configuration/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.667 V/m; Power Drift = -0.13 dB Peak SAR (extrapolated) = 0.522 W/kg SAR(1 g) = 0.360 W/kg; SAR(10 g) = 0.234 W/kg Maximum value of SAR (measured) = 0.431 W/kg

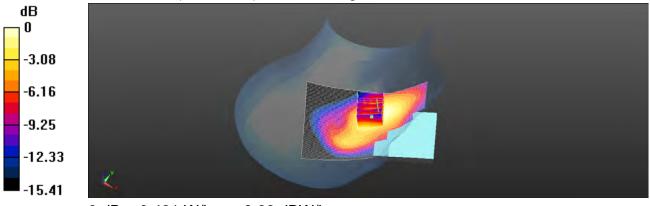

0 dB = 0.431 W/kg = -3.66 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279



Report No. : E5/2018/30007 Page : 109 of 202

Date: 2018/4/6

LTE Band 2 (20MHz)_Hotspot_Back side_CH 19100_QPSK_1-0_10mm

Communication System: LTE; Frequency: 1900 MHz; Duty Cycle: 1:1 Medium parameters used: f = 1900 MHz; σ = 1.511 S/m; ϵ_r = 52.521; ρ = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.1°C; Liquid temperature: 21.7°C


DASY5 Configuration:

- Probe: EX3DV4 SN3831; ConvF(7.35, 7.35, 7.35); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Area Scan (71x121x1): Interpolated grid: dx=15 mm, dy=15 mm Maximum value of SAR (interpolated) = 0.850 W/kg

Configuration/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.32 V/m; Power Drift = -0.11 dB Peak SAR (extrapolated) = 1.02 W/kg SAR(1 g) = 0.597 W/kg; SAR(10 g) = 0.340 W/kg Maximum value of SAR (measured) = 0.796 W/kg

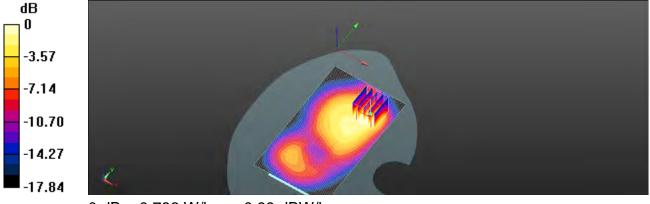

0 dB = 0.796 W/kg = -0.99 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488

www.tw.sgs.com

Member of SGS Group



Report No. : E5/2018/30007 Page : 110 of 202

Date: 2018/4/4

LTE Band 4 (20MHz)_Head_Re Cheek_CH 20050_QPSK_1-49

Communication System: LTE; Frequency: 1720 MHz; Duty Cycle: 1:1 Medium parameters used: f = 1720 MHz; σ = 1.319 S/m; ϵ_r = 40.695; ρ = 1000 kg/m³ Phantom section: Right Section Ambient temperature: 22.1°C; Liquid temperature: 21.6°C


DASY5 Configuration:

- Probe: EX3DV4 SN3831; ConvF(8.09, 8.09, 8.09); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Area Scan (71x121x1): Interpolated grid: dx=15 mm, dy=15 mm Maximum value of SAR (interpolated) = 0.257 W/kg

Configuration/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.514 V/m; Power Drift = -0.10 dB Peak SAR (extrapolated) = 0.290 W/kg SAR(1 g) = 0.204 W/kg; SAR(10 g) = 0.137 W/kg Maximum value of SAR (measured) = 0.245 W/kg

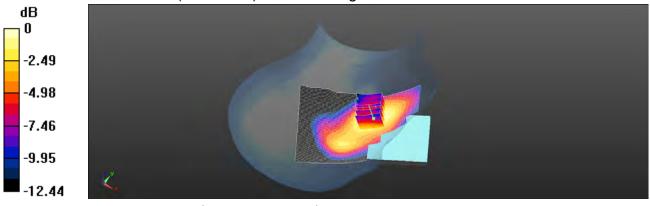

0 dB = 0.245 W/kg = -6.11 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488

www.tw.sgs.com



Report No. : E5/2018/30007 Page : 111 of 202

Date: 2018/4/5

LTE Band 4 (20MHz)_Hotspot_Back side_CH 20050_QPSK_1-49_10mm

Communication System: LTE; Frequency: 1720 MHz; Duty Cycle: 1:1 Medium parameters used: f = 1720 MHz; σ = 1.426 S/m; ϵ_r = 53.099; ρ = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.1°C; Liquid temperature: 21.8°C


DASY5 Configuration:

- Probe: EX3DV4 SN3831; ConvF(7.65, 7.65, 7.65); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Area Scan (71x121x1): Interpolated grid: dx=15 mm, dy=15 mm Maximum value of SAR (interpolated) = 0.591 W/kg

Configuration/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.617 V/m; Power Drift = -0.04 dB Peak SAR (extrapolated) = 0.656 W/kg SAR(1 g) = 0.417 W/kg; SAR(10 g) = 0.261 W/kg Maximum value of SAR (measured) = 0.518 W/kg

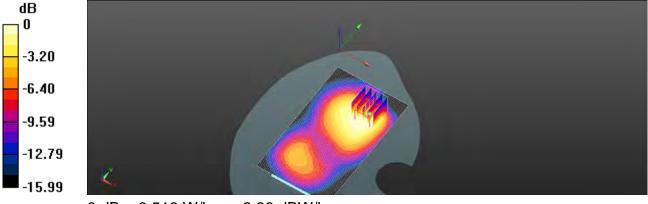

0 dB = 0.518 W/kg = -2.86 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

台灣檢驗科技股份有限公司



Report No. : E5/2018/30007 Page : 112 of 202

Date: 2018/4/3

LTE Band 5 (10MHz)_Head_Le Cheek_CH 20600_QPSK_1-0

Communication System: LTE; Frequency: 844 MHz; Duty Cycle: 1:1 Medium parameters used: f = 844 MHz; σ = 0.932 S/m; ϵ_r = 41.176; ρ = 1000 kg/m³ Phantom section: Left Section Ambient temperature: 22.3°C; Liquid temperature: 21.8°C


DASY5 Configuration:

- Probe: EX3DV4 SN3831; ConvF(9.1, 9.1, 9.1); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Area Scan (71x121x1): Interpolated grid: dx=15 mm, dy=15 mm Maximum value of SAR (interpolated) = 0.183 W/kg

Configuration/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.398 V/m; Power Drift = -0.08 dB Peak SAR (extrapolated) = 0.200 W/kg SAR(1 g) = 0.162 W/kg; SAR(10 g) = 0.123 W/kg Maximum value of SAR (measured) = 0.185 W/kg

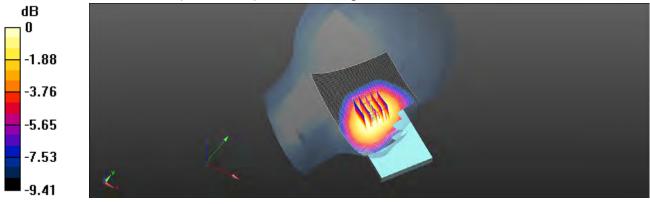

0 dB = 0.185 W/kg = -7.33 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司



LTE Band 5 (10MHz)_Hotspot_Back side_CH 20600_QPSK_1-0_10mm

Communication System: LTE; Frequency: 844 MHz; Duty Cycle: 1:1 Medium parameters used: f = 844 MHz; σ = 1.019 S/m; ϵ_r = 54.962; ρ = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.5°C; Liquid temperature: 21.8°C


DASY5 Configuration:

- Probe: EX3DV4 SN3831; ConvF(9.18, 9.18, 9.18); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Area Scan (71x121x1): Interpolated grid: dx=15 mm, dy=15 mm Maximum value of SAR (interpolated) = 0.354 W/kg

Configuration/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.04 V/m; Power Drift = -0.02 dB Peak SAR (extrapolated) = 0.374 W/kg SAR(1 g) = 0.236 W/kg; SAR(10 g) = 0.148 W/kg Maximum value of SAR (measured) = 0.306 W/kg

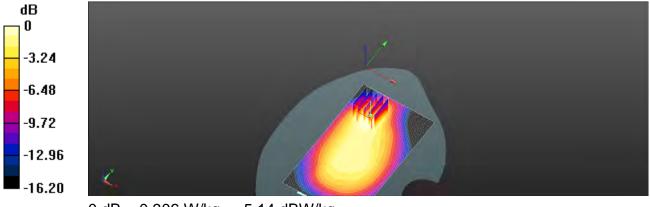

0 dB = 0.306 W/kg = -5.14 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279

www.tw.sgs.com



WLAN 802.11b_Head_Le Cheek_CH 1

Communication System: WLAN(2.45G); Frequency: 2412 MHz; Duty Cycle: 1:1 Medium parameters used: f = 2412 MHz; σ = 1.747 S/m; ϵ_r = 39.535; ρ = 1000 kg/m³ Phantom section: Left Section Ambient temperature: 22.5°C; Liquid temperature: 21.8°C


DASY5 Configuration:

- Probe: EX3DV4 SN3831; ConvF(7.16, 7.16, 7.16); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Area Scan (81x151x1): Interpolated grid: dx=12 mm, dy=12 mm Maximum value of SAR (interpolated) = 0.0707 W/kg

Configuration/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.606 V/m; Power Drift = 0.07 dBPeak SAR (extrapolated) = 0.103 W/kgSAR(1 g) = 0.048 W/kg; SAR(10 g) = 0.024 W/kgMaximum value of SAR (measured) = 0.0746 W/kg

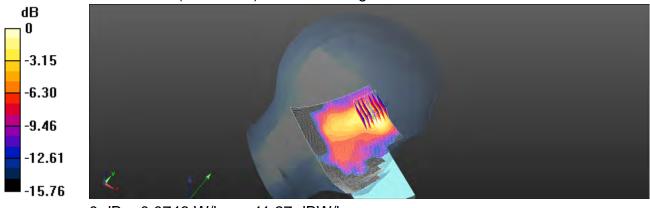

0 dB = 0.0746 W/kg = -11.27 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

台灣檢驗科技股份有限公司

f (886-2) 2298-0488

www.tw.sgs.com



Report No. : E5/2018/30007 Page : 115 of 202

Date: 2018/4/9

WLAN 802.11b_Hotspot_Back side_CH 1_10mm

Communication System: WLAN(2.45G); Frequency: 2412 MHz; Duty Cycle: 1:1 Medium parameters used: f = 2412 MHz; σ = 1.963 S/m; ϵ_r = 52.714; ρ = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.6°C; Liquid temperature: 21.8°C


DASY5 Configuration:

- Probe: EX3DV4 SN3831; ConvF(7.26, 7.26, 7.26); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Area Scan (81x151x1): Interpolated grid: dx=12 mm, dy=12 mm Maximum value of SAR (interpolated) = 0.109 W/kg

Configuration/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.652 V/m; Power Drift = 0.06 dB Peak SAR (extrapolated) = 0.139 W/kg SAR(1 g) = 0.067 W/kg; SAR(10 g) = 0.031 W/kg Maximum value of SAR (measured) = 0.102 W/kg

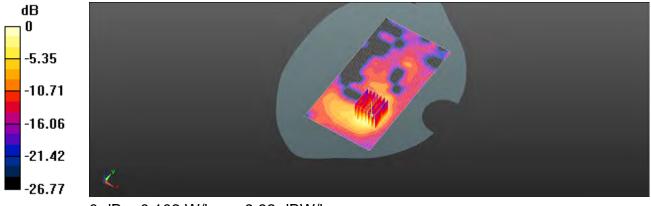

0 dB = 0.102 W/kg = -9.92 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279



Report No. : E5/2018/30007 Page : 116 of 202

Date: 2018/4/10

WLAN 802.11ac(80M) 5.2G_Head_Le Cheek_CH 42

Communication System: WLAN(5G); Frequency: 5210 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5210 MHz; σ = 4.505 S/m; ϵ_r = 36.297; ρ = 1000 kg/m³ Phantom section: Left Section Ambient temperature: 22.1°C; Liquid temperature: 21.8°C


DASY5 Configuration:

- Probe: EX3DV4 SN3831; ConvF(4.86, 4.86, 4.86); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Area Scan (111x191x1): Interpolated grid: dx=10 mm, dy=10 mm Maximum value of SAR (interpolated) = 0.142 W/kg

Configuration/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.867 V/m; Power Drift = 0.10 dB Peak SAR (extrapolated) = 0.180 W/kg SAR(1 g) = 0.020 W/kg; SAR(10 g) = 0.00691 W/kg Maximum value of SAR (measured) = 0.0526 W/kg

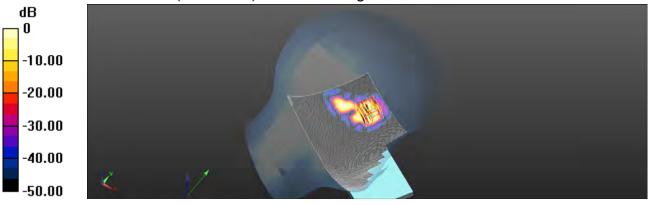

0 dB = 0.0526 W/kg = -12.79 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279



Report No. : E5/2018/30007 Page : 117 of 202

Date: 2018/4/11

WLAN 802.11ac(80M) 5.2G_Body-worm_Back side_CH 42_10mm

Communication System: WLAN(5G); Frequency: 5210 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5210 MHz; σ = 5.118 S/m; ϵ_r = 49.518; ρ = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.4°C; Liquid temperature: 21.8°C


DASY5 Configuration:

- Probe: EX3DV4 SN3831; ConvF(4.56, 4.56, 4.56); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Area Scan (101x181x1): Interpolated grid: dx=10 mm, dy=10 mm Maximum value of SAR (interpolated) = 0.0921 W/kg

Configuration/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm,

dz=2mm Reference Value = 1.209 V/m; Power Drift = -0.16 dB Peak SAR (extrapolated) = 0.459 W/kg SAR(1 g) = 0.043 W/kg; SAR(10 g) = 0.014 W/kg Maximum value of SAR (measured) = 0.0736 W/kg

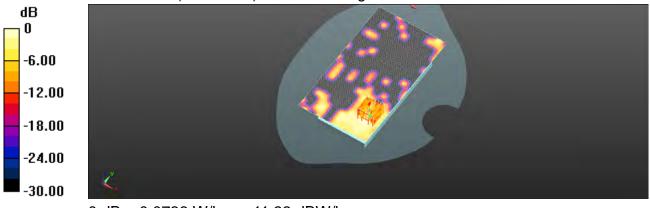

0 dB = 0.0736 W/kg = -11.33 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279

```
www.tw.sgs.com
```



Report No. : E5/2018/30007 Page : 118 of 202

Date: 2018/4/11

WLAN 802.11ac(80M) 5.2G_Product specific 10g-SAR_Back side_CH 42_0mm

Communication System: WLAN(5G); Frequency: 5210 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5210 MHz; σ = 5.118 S/m; ϵ_r = 49.518; ρ = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.4°C; Liquid temperature: 21.8°C


DASY5 Configuration:

- Probe: EX3DV4 SN3831; ConvF(4.56, 4.56, 4.56); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Area Scan (101x181x1): Interpolated grid: dx=10 mm, dy=10 mm Maximum value of SAR (interpolated) = 1.02 W/kg

Configuration/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.424 V/m; Power Drift = 0.08 dB Peak SAR (extrapolated) = 2.83 W/kg SAR(1 g) = 0.494 W/kg; SAR(10 g) = 0.198 W/kg Maximum value of SAR (measured) = 0.929 W/kg

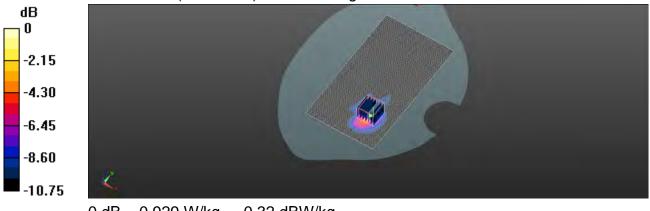

0 dB = 0.929 W/kg = -0.32 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279



Report No. : E5/2018/30007 Page : 119 of 202

Date: 2018/4/10

WLAN 802.11ac(80M) 5.3G_Head_Le Cheek_CH 58

Communication System: WLAN(5G); Frequency: 5290 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5290 MHz; σ = 4.649 S/m; ϵ_r = 35.852; ρ = 1000 kg/m³ Phantom section: Left Section Ambient temperature: 22.1°C; Liquid temperature: 21.6°C


DASY5 Configuration:

- Probe: EX3DV4 SN3831; ConvF(4.65, 4.65, 4.65); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Area Scan (111x191x1): Interpolated grid: dx=10 mm, dy=10 mm Maximum value of SAR (interpolated) = 0.114 W/kg

Configuration/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.060 V/m; Power Drift = 0.05 dBPeak SAR (extrapolated) = 0.341 W/kgSAR(1 g) = 0.065 W/kg; SAR(10 g) = 0.035 W/kgMaximum value of SAR (measured) = 0.115 W/kg

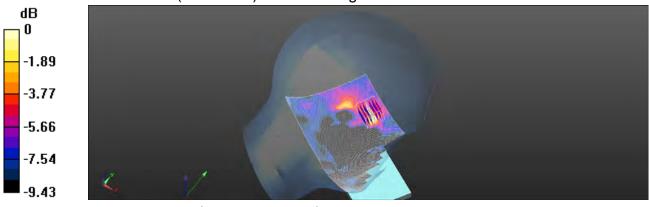

0 dB = 0.115 W/kg = -9.40 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

```
www.tw.sgs.com
```



Report No. : E5/2018/30007 Page : 120 of 202

Date: 2018/4/11

WLAN 802.11ac(80M) 5.3G_Body-worm_Back side_CH 58_10mm

Communication System: WLAN(5G); Frequency: 5290 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5290 MHz; σ = 5.279 S/m; ϵ_r = 49.531; ρ = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.3°C; Liquid temperature: 21.8°C


DASY5 Configuration:

- Probe: EX3DV4 SN3831; ConvF(4.39, 4.39, 4.39); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Area Scan (101x181x1): Interpolated grid: dx=10 mm, dy=10 mm Maximum value of SAR (interpolated) = 0.0858 W/kg

Configuration/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm,

dz=2mm Reference Value = 1.483 V/m; Power Drift = 0.17 dB Peak SAR (extrapolated) = 0.348 W/kg SAR(1 g) = 0.044 W/kg; SAR(10 g) = 0.017 W/kg Maximum value of SAR (measured) = 0.0832 W/kg

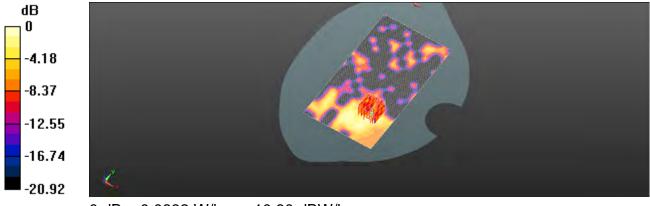

0 dB = 0.0832 W/kg = -10.80 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279



Report No. : E5/2018/30007 Page: 121 of 202

Date: 2018/4/11

WLAN 802.11ac(80M) 5.3G_Product specific 10g-SAR_Back side_CH 58 0mm

Communication System: WLAN(5G); Frequency: 5290 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5290 MHz; σ = 5.279 S/m; ϵ_r = 49.531; ρ = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.3°C; Liquid temperature: 21.8°C


DASY5 Configuration:

- Probe: EX3DV4 SN3831; ConvF(4.39, 4.39, 4.39); Calibrated: 2018/1/23; •
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Area Scan (101x181x1): Interpolated grid: dx=10 mm, dy=10 mm Maximum value of SAR (interpolated) = 1.37 W/kg

Configuration/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.947 V/m; Power Drift = 0.09 dB Peak SAR (extrapolated) = 3.57 W/kg SAR(1 g) = 0.612 W/kg; SAR(10 g) = 0.239 W/kgMaximum value of SAR (measured) = 1.22 W/kg

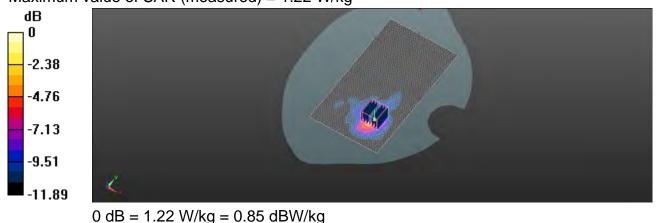

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

www.tw.sas.com



Report No. : E5/2018/30007 Page : 122 of 202

Date: 2018/4/10

WLAN 802.11ac(80M) 5.6G_Head_Le Cheek_CH 122

Communication System: WLAN(5G); Frequency: 5610 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5610 MHz; σ = 5.025 S/m; ϵ_r = 35.055; ρ = 1000 kg/m³ Phantom section: Left Section Ambient temperature: 22.1°C; Liquid temperature: 21.7°C


DASY5 Configuration:

- Probe: EX3DV4 SN3831; ConvF(4.49, 4.49, 4.49); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Area Scan (121x181x1): Interpolated grid: dx=10 mm, dy=10 mm Maximum value of SAR (interpolated) = 0.0720 W/kg

Configuration/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm,

dz=2mm Reference Value = 2.064 V/m; Power Drift = 0.05 dB Peak SAR (extrapolated) = 0.139 W/kg SAR(1 g) = 0.036 W/kg; SAR(10 g) = 0.031 W/kg Maximum value of SAR (measured) = 0.0671 W/kg

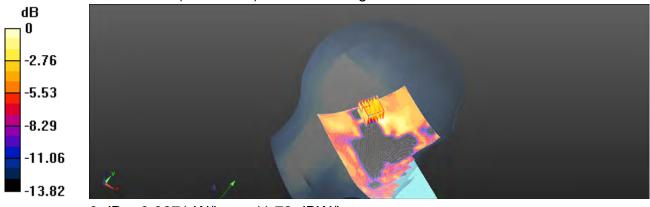

0 dB = 0.0671 W/kg = -11.73 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司



Report No. : E5/2018/30007 Page : 123 of 202

Date: 2018/4/11

WLAN 802.11ac(80M) 5.6G_Body-worm_Back side_CH 122_10mm

Communication System: WLAN(5G); Frequency: 5610 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5610 MHz; σ = 5.758 S/m; ϵ_r = 48.431; ρ = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.1°C; Liquid temperature: 21.5°C


DASY5 Configuration:

- Probe: EX3DV4 SN3831; ConvF(3.92, 3.92, 3.92); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Area Scan (91x181x1): Interpolated grid: dx=10 mm, dy=10 mm Maximum value of SAR (interpolated) = 0.118 W/kg

Configuration/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm,

dz=2mm Reference Value = 1.668 V/m; Power Drift = 0.06 dB Peak SAR (extrapolated) = 0.727 W/kg SAR(1 g) = 0.062 W/kg; SAR(10 g) = 0.024 W/kg Maximum value of SAR (measured) = 0.105 W/kg

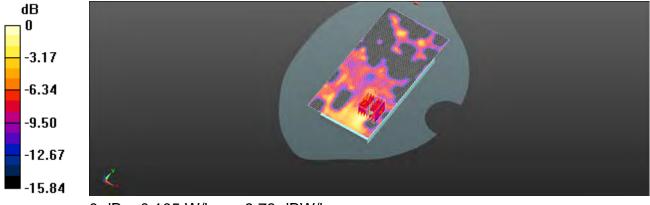

0 dB = 0.105 W/kg = -9.78 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279

www.tw.sgs.com



Report No. : E5/2018/30007 Page : 124 of 202

Date: 2018/4/11

WLAN 802.11ac(80M) 5.6G_Product specific 10g-SAR_Back side_CH 122_0mm

Communication System: WLAN(5G); Frequency: 5610 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5610 MHz; σ = 5.758 S/m; ϵ_r = 48.431; ρ = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.1°C; Liquid temperature: 21.5°C


DASY5 Configuration:

- Probe: EX3DV4 SN3831; ConvF(3.92, 3.92, 3.92); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Area Scan (101x181x1): Interpolated grid: dx=10 mm, dy=10 mm Maximum value of SAR (interpolated) = 1.19 W/kg

Configuration/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.306 V/m; Power Drift = 0.19 dB Peak SAR (extrapolated) = 5.77 W/kg SAR(1 g) = 0.755 W/kg; SAR(10 g) = 0.267 W/kg Maximum value of SAR (measured) = 1.92 W/kg

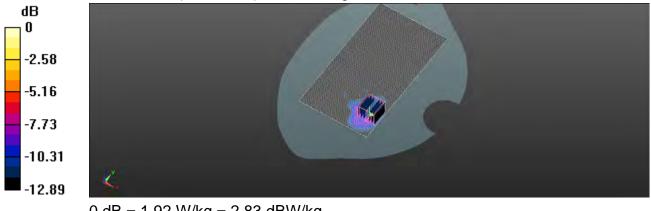

0 dB = 1.92 W/kg = 2.83 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Report No. : E5/2018/30007 Page : 125 of 202

6. SAR System Performance Verification

Date: 2018/4/3

Dipole 835 MHz_SN:4d063

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1 Medium parameters used: f = 835 MHz; σ = 0.924 S/m; ϵ_r = 41.336; ρ = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.3°C; Liquid temperature: 21.8°C

DASY5 Configuration:


- Probe: EX3DV4 SN3831; ConvF(9.1, 9.1, 9.1); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Pin=250mW/Area Scan (51x121x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 2.99 W/kg

Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm Reference Value = 54.20 V/m; Power Drift = -0.02 dB Peak SAR (extrapolated) = 3.54 W/kg SAR(1 g) = 2.33 W/kg; SAR(10 g) = 1.51 W/kg Maximum value of SAR (measured) = 2.97 W/kg

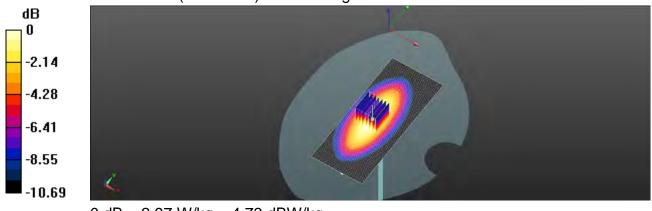

0 dB = 2.97 W/kg = 4.73 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Dipole 835 MHz_SN:4d063

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1 Medium parameters used: f = 835 MHz; σ = 1.012 S/m; ϵ_r = 55.068; ρ = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.5°C; Liquid temperature: 21.8°C

DASY5 Configuration:


- Probe: EX3DV4 SN3831; ConvF(9.18, 9.18, 9.18); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Pin=250mW/Area Scan (51x111x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 2.96 W/kg

Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm Reference Value = 52.67 V/m; Power Drift = 0.10 dB Peak SAR (extrapolated) = 3.41 W/kg SAR(1 g) = 2.36 W/kg; SAR(10 g) = 1.57 W/kg Maximum value of SAR (measured) = 2.95 W/kg

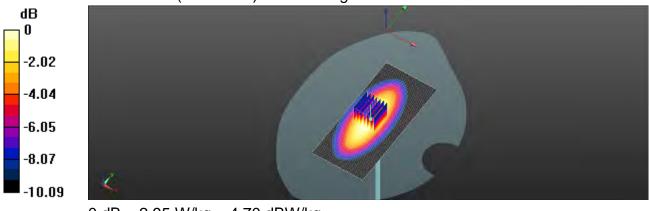

0 dB = 2.95 W/kg = 4.70 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

```
Member of SGS Group
```

www.tw.sas.com



Dipole 1750 MHz_SN:1008

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1 Medium parameters used: f = 1750 MHz; σ = 1.322 S/m; ϵ_r = 40.606; ρ = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.1°C; Liquid temperature: 21.6°C

DASY5 Configuration:


- Probe: EX3DV4 SN3831; ConvF(8.09, 8.09, 8.09); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Pin=250mW/Area Scan (51x101x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 13.4 W/kg

Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm Reference Value = 99.46 V/m; Power Drift = -0.07 dB Peak SAR (extrapolated) = 16.3 W/kg SAR(1 g) = 8.84 W/kg; SAR(10 g) = 4.66 W/kg Maximum value of SAR (measured) = 12.6 W/kg

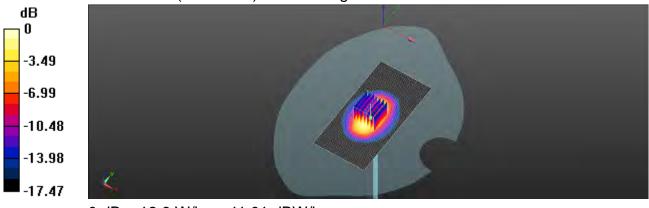

0 dB = 12.6 W/kg = 11.01 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279



Dipole 1750 MHz_SN:1008

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1 Medium parameters used: f = 1750 MHz; σ = 1.432 S/m; ϵ_r = 52.945; ρ = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

DASY5 Configuration:


- Probe: EX3DV4 SN3831; ConvF(7.65, 7.65, 7.65); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Pin=250mW/Area Scan (51x101x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 14.6 W/kg

Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm Reference Value = 98.92 V/m; Power Drift = 0.01 dB Peak SAR (extrapolated) = 18.8 W/kg SAR(1 g) = 8.99 W/kg; SAR(10 g) = 4.77 W/kg Maximum value of SAR (measured) = 14.4 W/kg

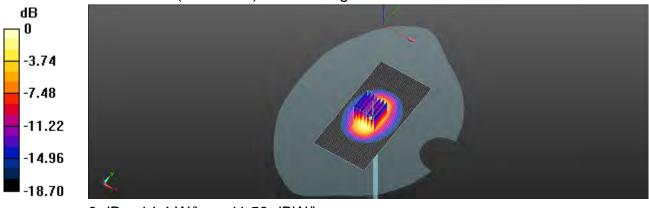

0 dB = 14.4 W/kg = 11.58 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Dipole 1900 MHz_SN:5d173

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1 Medium parameters used: f = 1900 MHz; σ = 1.393 S/m; ϵ_r = 39.869; ρ = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.4°C; Liquid temperature: 21.8°C

DASY5 Configuration:


- Probe: EX3DV4 SN3831; ConvF(7.78, 7.78, 7.78); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Pin=250mW/Area Scan (41x81x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 14.1 W/kg

Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm Reference Value = 100.3 V/m; Power Drift = -0.01 dB Peak SAR (extrapolated) = 18.3 W/kg SAR(1 g) = 9.93 W/kg; SAR(10 g) = 5.22 W/kg Maximum value of SAR (measured) = 14.0 W/kg

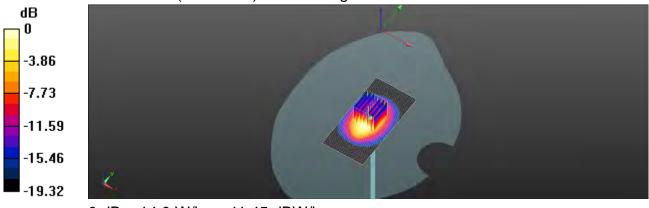

0 dB = 14.0 W/kg = 11.45 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279



Dipole 1900 MHz_SN:5d173

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1 Medium parameters used: f = 1900 MHz; σ = 1.511 S/m; ϵ_r = 52.521; ρ = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.1°C; Liquid temperature: 21.7°C

DASY5 Configuration:


- Probe: EX3DV4 SN3831; ConvF(7.35, 7.35, 7.35); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Pin=250mW/Area Scan (41x71x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 15.3 W/kg

Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm Reference Value = 96.05 V/m; Power Drift = -0.02 dB Peak SAR (extrapolated) = 18.2 W/kg SAR(1 g) = 9.95 W/kg; SAR(10 g) = 5.17 W/kg Maximum value of SAR (measured) = 14.3 W/kg

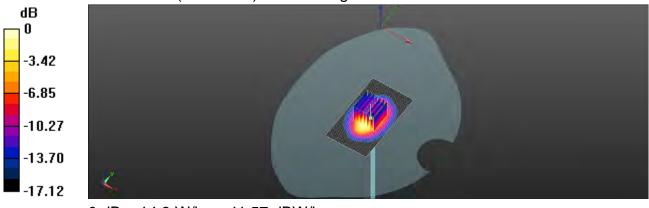

0 dB = 14.3 W/kg = 11.57 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號



Dipole 2450 MHz_SN: 727

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1 Medium parameters used: f = 2450 MHz; σ = 1.788 S/m; ϵ_r = 39.382; ρ = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.5°C; Liquid temperature: 21.8°C

DASY5 Configuration:


- Probe: EX3DV4 SN3831; ConvF(7.16, 7.16, 7.16); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Pin=250mW/Area Scan (51x101x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 19.7 W/kg

Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm Reference Value = 105.7 V/m; Power Drift = -0.09 dB Peak SAR (extrapolated) = 26.0 W/kg SAR(1 g) = 12.4 W/kg; SAR(10 g) = 5.86 W/kg Maximum value of SAR (measured) = 19.1 W/kg

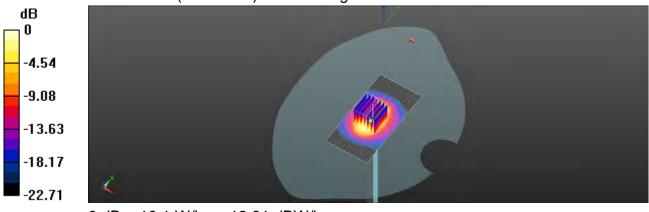

0 dB = 19.1 W/kg = 12.81 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號



Dipole 2450 MHz_SN:727

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1 Medium parameters used: f = 2450 MHz; σ = 2.011 S/m; ϵ_r = 52.578; ρ = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.6°C; Liquid temperature: 21.8°C

DASY5 Configuration:


- Probe: EX3DV4 SN3831; ConvF(7.26, 7.26, 7.26); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Pin=250mW/Area Scan (51x71x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 20.5 W/kg

Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm Reference Value = 98.23 V/m; Power Drift = -0.01 dB Peak SAR (extrapolated) = 25.6 W/kg SAR(1 g) = 12.7 W/kg; SAR(10 g) = 6.11 W/kg Maximum value of SAR (measured) = 18.9 W/kg

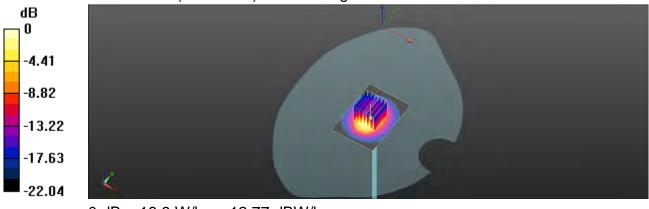

0 dB = 18.9 W/kg = 12.77 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488

www.tw.sgs.com



Dipole 5200 MHz_SN: 1023

Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5200 MHz; σ = 4.539 S/m; ϵ_r = 36.223; ρ = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

DASY5 Configuration:


- Probe: EX3DV4 SN3831; ConvF(4.86, 4.86, 4.86); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Pin=100mW/Area Scan (71x91x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 16.1 W/kg

Configuration/Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=2mm Reference Value = 60.45 V/m; Power Drift = -0.07 dB Peak SAR (extrapolated) = 33.0 W/kg SAR(1 g) = 7.36 W/kg; SAR(10 g) = 2.09 W/kg Maximum value of SAR (measured) = 15.5 W/kg

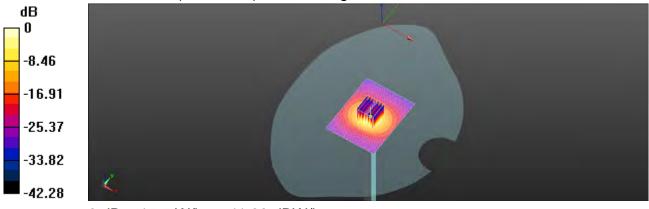

0 dB = 15.5 W/kg = 11.89 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

```
www.tw.sgs.com
```



Dipole 5200 MHz_SN:1023

Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5200 MHz; σ = 5.13 S/m; ϵ_r = 49.598; ρ = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.4°C; Liquid temperature: 21.8°C

DASY5 Configuration:


- Probe: EX3DV4 SN3831; ConvF(4.39, 4.39, 4.39); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Pin=100mW/Area Scan (41x61x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 11.7 W/kg

Configuration/Pin=100mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement

grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 57.63 V/m; Power Drift = 0.03 dB Peak SAR (extrapolated) = 33.2 W/kg SAR(1 g) = 7.19 W/kg; SAR(10 g) = 1.98 W/kg Maximum value of SAR (measured) = 15.3 W/kg

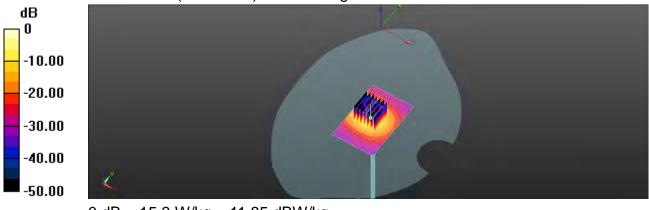

0 dB = 15.3 W/kg = 11.85 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號



Dipole 5300 MHz_SN:1023

Communication System: CW; Frequency: 5300 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5300 MHz; σ = 4.623 S/m; ϵ_r = 35.785; ρ = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.1°C; Liquid temperature: 21.6°C

DASY5 Configuration:


- Probe: EX3DV4 SN3831; ConvF(4.65, 4.65, 4.65); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Pin=100mW/Area Scan (71x91x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 18.2 W/kg

Configuration/Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=2mm Reference Value = 60.68 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 37.8 W/kg SAR(1 g) = 8.09 W/kg; SAR(10 g) = 2.27 W/kg Maximum value of SAR (measured) = 17.3 W/kg

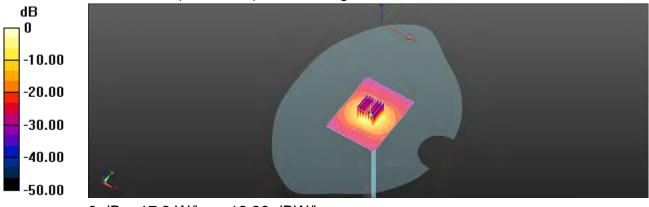

0 dB = 17.3 W/kg = 12.39 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

```
www.tw.sgs.com
```



Dipole 5300 MHz_SN:1023

Communication System: CW; Frequency: 5300 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5300 MHz; σ = 5.255 S/m; ϵ_r = 49.321; ρ = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.3°C; Liquid temperature: 21.8°C

DASY5 Configuration:


- Probe: EX3DV4 SN3831; ConvF(4.39, 4.39, 4.39); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Pin=100mW/Area Scan (71x91x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 15.9 W/kg

Configuration/Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=2mm Reference Value = 56.69 V/m; Power Drift = -0.14 dB Peak SAR (extrapolated) = 28.0 W/kg SAR(1 g) = 7.41 W/kg; SAR(10 g) = 2.08 W/kg Maximum value of SAR (measured) = 15.5 W/kg

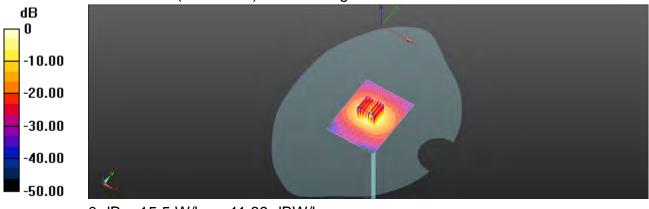

0 dB = 15.5 W/kg = 11.89 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

```
www.tw.sgs.com
```



Dipole 5600 MHz_SN:1023

Communication System: CW; Frequency: 5600 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5600 MHz; σ = 4.991 S/m; ϵ_r = 35.152; ρ = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.1°C; Liquid temperature: 21.7°C

DASY5 Configuration:


- Probe: EX3DV4 SN3831; ConvF(4.49, 4.49, 4.49); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Pin=100mW/Area Scan (71x91x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 19.3 W/kg

Configuration/Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=2mm Reference Value = 63.93 V/m; Power Drift = 0.03 dB Peak SAR (extrapolated) = 40.6 W/kg SAR(1 g) = 8.62 W/kg; SAR(10 g) = 2.42 W/kg Maximum value of SAR (measured) = 18.5 W/kg

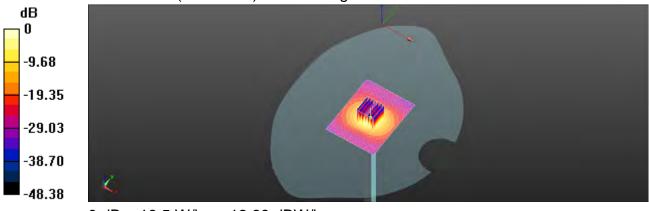

0 dB = 18.5 W/kg = 12.68 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

```
www.tw.sgs.com
```



Dipole 5600 MHz_SN:1023

Communication System: CW; Frequency: 5600 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5600 MHz; σ = 5.722 S/m; ϵ_r = 48.48; ρ = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.1°C; Liquid temperature: 21.5°C

DASY5 Configuration:


- Probe: EX3DV4 SN3831; ConvF(3.92, 3.92, 3.92); Calibrated: 2018/1/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2017/5/2
- Phantom: Head
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Pin=100mW/Area Scan (71x91x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 17.1 W/kg

Configuration/Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=2mm Reference Value = 55.04 V/m; Power Drift = -0.15 dB Peak SAR (extrapolated) = 34.0 W/kg SAR(1 g) = 7.88 W/kg; SAR(10 g) = 2.22 W/kg Maximum value of SAR (measured) = 17.0 W/kg

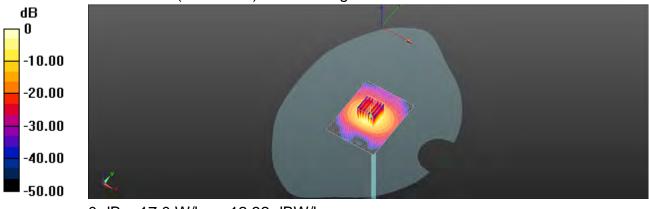

0 dB = 17.0 W/kg = 12.32 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

```
www.tw.sqs.com
```



7. DAE & Probe Calibration Certificate

Add: No.51 Xuey Tel: +86-10-6230 E-mail: cttl@chir	4633-2218 Fax: +	strict, Beijing, 100191, China +86-10-62304633-2209 //www.chinattl.cn	CNAS LOS		
Client : Aud	and the second se		No: Z17-97053		
ALIBRATION	CERTIFICAT	re			
bject	DAE4	- SN: 913			
alibration Procedure(s)	Calibra	FF-Z11-002-01 Calibration Procedure for the Data Acquisition Electronics (DAEx)			
Calibration date:	May 0	2, 2017			
This calibration Certificat neasurements(SI). The r pages and are part of the All calibrations have be numidity<70%.	neasurements and certificate. een conducted in	traceability to national standards, wh d the uncertainties with confidence pro- the closed laboratory facility: enviro	bability are given on the followin		
This calibration Certificat neasurements(SI). The r pages and are part of the All calibrations have be	neasurements and certificate. en conducted in sed (M&TE critical	the uncertainties with confidence prob the closed laboratory facility: enviro	bability are given on the followin		
This calibration Certificat neasurements(SI). The r pages and are part of the All calibrations have be numidity<70%. Calibration Equipment us	neasurements and certificate. en conducted in sed (M&TE critical	the uncertainties with confidence pro the closed laboratory facility: enviro for calibration)	bability are given on the followin		
his calibration Certificat heasurements(SI). The r lages and are part of the NI calibrations have be humidity<70%. Calibration Equipment us Primary Standards	neasurements and e certificate. een conducted in sed (M&TE critical ID # C:	the uncertainties with confidence pro the closed laboratory facility: enviro for calibration) al Date(Calibrated by, Certificate No.)	bability are given on the followin onment temperature(22±3)℃ an Scheduled Calibration		
his calibration Certificat neasurements(SI). The r ages and are part of the ull calibrations have be umidity<70%. Calibration Equipment us Primary Standards	neasurements and e certificate. een conducted in sed (M&TE critical ID # C: 1971018	the uncertainties with confidence pro the closed laboratory facility: enviro for calibration) al Date(Calibrated by, Certificate No.) 27-June-16 (CTTL, No:J16X04778)	bability are given on the followin onment temperature(22±3)℃ an Scheduled Calibration June-17		
his calibration Certificat neasurements(SI). The r ages and are part of the all calibrations have be umidity<70%. Calibration Equipment us Primary Standards Process Calibrator 753	neasurements and e certificate. een conducted in sed (M&TE critical ID # C: 1971018 Name	the uncertainties with confidence prof the closed laboratory facility: enviro for calibration) al Date(Calibrated by, Certificate No.) 27-June-16 (CTTL, No:J16X04778) Function	bability are given on the followin onment temperature(22±3)℃ an Scheduled Calibration June-17		

Certificate No: Z17-97053

Page 1 of 3

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

f (886-2) 2298-0488

Member of SGS Group

www.tw.sgs.com







 Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China

 Tel: +86-10-62304633-2218
 Fax: +86-10-62304633-2209

 E-mail: cttl@chinattl.com
 Http://www.chinattl.en

Glossary: DAE Connector angle

data acquisition electronics information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters:

- DC Voltage Measurement. Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- Connector angle: The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The report provide only calibration results for DAE, it does not contain other performance test results.

Certificate No: Z17-97053


t (886-2) 2299-3279

Page 2 of 3

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號







 Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China

 Tel: +86-10-62304633-2218
 Fax: +86-10-62304633-2209

 E-mail: ctll@chinattl.com
 Http://www.chinattl.en

DC Voltage Measurement

 A/D - Converter Resolution nominal High Range:
 1LSB =
 6.1μV
 full range =
 -100...+300 mV

 Low Range:
 1LSB =
 61nV
 full range =
 -1.....+3mV

 DASY measurement parameters:
 Auto Zero Time:
 3 sec; Measuring time:
 3 sec

Calibration Factors	x	Y	Z
High Range	404.035 ± 0.15% (k=2)	404.438 ± 0.15% (k=2)	404.997 ± 0.15% (k=2)
Low Range	3.98645 ± 0.7% (k=2)	3.99532 ± 0.7% (k=2)	4.02083 ± 0.7% (k=2)

Connector Angle

Connector Angle to be used in DASY system	186.5° ± 1 °

Certificate No: Z17-97053

t (886-2) 2299-3279

Page 3 of 3

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號



he Swiss Accreditation Servi	tation Service (SAS) ice is one of the signatories i recognition of calibration ce	o the EA	reditation No.: SCS 0108		
lient SGS-TW (Auc	No. Contraction of the second second second	NUCLES A	EX3-3831_Jan18		
ALIBRATION	CERTIFICATE	-			
Xbject.	EX3DV4 - SN:383	1			
Calibration procedure(s)	QA CAL-01.v9, QA CAL-14.v4, QA CAL-23.v5, QA CAL-25.v6 Calibration procedure for dosimetric E-field probes				
Calibration date:	January 23, 2018				
al calibrations have been cond	lucted in the closed laboratory	facility: environment temperature (22 ± 3)°C a	and humidity < 70%		
Calibration Equipment used (M		facility: environment temperature (22 \pm 3) $^{\circ}\mathrm{C}$ =	and humiday < 70%		
		Cal Date (Certificate No.)	sed humiday < 70%		
Calibration Equipment used (M	WATE critical for calibration)				
Calibration Equipment used (M Primary Standards Power meter NRP	NATE critical for calibration)	Cal Date (Certificate No.)	Scheduled Calibration		
Calibration Equipment used (M Primary Standards Power meter NRP Power sensor NRP-291 Power sensor NRP-291	ID SN: 104778 SN: 103244 SN: 103245	Cal Date (Certificate No.) 04-Apr-17 (No. 217-02521/02522) 04-Apr-17 (No. 217-02521) 04-Apr-17 (No. 217-02525)	Scheduled Calibration Apr-18 Apr-18 Apr-18		
Calibration Equipment used (M Primary Standards Power meter NRP Power sensor NRP-291 Power sensor NRP-291 Reference 20 dB Attenuator	ATE critical for calibration)	Cal Date (Certificate No.) 04-Apr-17 (No. 217-02521/02522) 04-Apr-17 (No. 217-02521) 04-Apr-17 (No. 217-02525) 07-Apr-17 (No. 217-02528)	Scheduled Calibration Apr-18 Apr-18 Apr-18 Apr-18		
Calibration Equipment used (M Primary Standards Power meter NRP Power sensor NRP-291 Power sensor NRP-291 Reference 20 dB Attenuator Reference Probe ES3DV2	ATE critical for calibration) ID SN: 104778 SN: 103244 SN: 103245 SN: 55277 (20x) SN: 3013	Cal Date (Certificate No.) 04-Apr-17 (No. 217-02521/02522) 04-Apr-17 (No. 217-02521) 04-Apr-17 (No. 217-02525) 07-Apr-17 (No. 217-02528) 30-Dec-17 (No. ES3-3013_Dec17)	Scheduled Calibration Apr-18 Apr-18 Apr-18 Apr-18 Dec-18		
Calibration Equipment used (M Primary Standards Power meter NRP Power sensor NRP-291 Power sensor NRP-291 Reference 20 dB Attenuator	ATE critical for calibration)	Cal Date (Certificate No.) 04-Apr-17 (No. 217-02521/02522) 04-Apr-17 (No. 217-02521) 04-Apr-17 (No. 217-02525) 07-Apr-17 (No. 217-02528)	Scheduled Calibration Apr-18 Apr-18 Apr-18 Apr-18		
Calibration Equipment used (M Pnimary Standards Power meter NRP Power sensor NRP-291 Power sensor NRP-291 Reference 20 dB Attanuator Reference Probe ES3DV2 DAE4	ATE critical for calibration) ID SN: 104778 SN: 103244 SN: 103245 SN: 55277 (20x) SN: 55277 (20x) SN: 660	Cal Date (Certificate No.) 04-Apr-17 (No. 217-02521/02522) 04-Apr-17 (No. 217-02521) 04-Apr-17 (No. 217-02521) 07-Apr-17 (No. 217-02528) 30-Dec-17 (No. ES3-3013_Dec17) 21-Dec-17 (No. DAE4-660_Dec17)	Scheduled Calibration Apr-18 Apr-18 Apr-18 Apr-18 Dec-18 Dec-18 Dec-18		
Calibration Equipment used (M Primary Standards Power meter NRP Power sensor NRP-291 Power sensor NRP-291 Reference 20 dB Attenuator Reference Probe ES3DV2 DAE4 Secondary Standards	ATE critical for calibration) ID SN: 104778 SN: 103244 SN: 103245 SN: 55277 (20x) SN: 3013 SN: 660 ID	Cal Date (Certificate No.) 04-Apr-17 (No. 217-02521/02522) 04-Apr-17 (No. 217-02521) 04-Apr-17 (No. 217-02525) 07-Apr-17 (No. 217-02526) 30-Dec-17 (No. 217-02526) 30-Dec-17 (No. 253-3013_Dec17) 21-Dec-17 (No. DAE4-660_Dec17) Check: Date (in house)	Scheduled Calibration Apr-18 Apr-18 Apr-18 Apr-18 Dec-18 Dec-18 Dec-18 Scheduled Check		
Calibration Equipment used (M Primary Standards Power meter NRP Power sensor NRP-291 Power sensor NRP-291 Reference 20 dB Attenuator Reference Probe ES3DV2 DAE4 Secondary Standards Power meter E4419B	MTE critical for calibration) ID SN: 104778 SN: 103244 SN: 103245 SN: 55277 (20x) SN: 3013 SN: 660 ID SN: GB41293874	Cal Date (Certificate No.) 04-Apr-17 (No. 217-02521/02522) 04-Apr-17 (No. 217-02521) 04-Apr-17 (No. 217-02525) 07-Apr-17 (No. 217-02526) 30-Dec-17 (No. ES3-3013_Dec17) 21-Dec-17 (No. DAE4-660_Dec17) 21-Dec-17 (No. DAE4-660_Dec17) Check: Date (in house) 06-Apr-16 (in house check Jur-16)	Scheduled Calibration Apr-18 Apr-18 Apr-18 Apr-18 Dec-18 Dec-18 Dec-18 Dec-18 Scheduled Check In house check: Jun-18		
Calibration Equipment used (M Primary Standards Power meter NRP Power sensor NRP-291 Power sensor NRP-291 Reference 20 dB Attenuator Reference 20 dB Attenuator Reference Probe ES3DV2 DAE4 Secondary Standards Power meter E4419B Power sensor E4412A	ATE critical for calibration) ID SN: 104778 SN: 103244 SN: 103245 SN: 55277 (20x) SN: 3013 SN: 660 ID	Cal Date (Certificate No.) 04-Apr-17 (No. 217-02521/02522) 04-Apr-17 (No. 217-02521) 04-Apr-17 (No. 217-02525) 07-Apr-17 (No. 217-02528) 30-Dec-17 (No. ES3-3013_Dec17) 21-Dec-17 (No. DAE4-660_Dec17) Check: Date (in house) 06-Apr-16 (in house check Jun-16) 06-Apr-16 (in house check Jun-16)	Scheduled Calibration Apr-18 Apr-18 Apr-18 Apr-18 Dec-18 Dec-18 Dec-18 Scheduled Check		
Calibration Equipment used (M Primary Standards Power meter NRP Power sensor NRP-291 Power sensor NRP-291 Reference 20 dB Attenuator Reference Probe ES3DV2 DAE4 Secondary Standards Power meter E4419B	ATE critical for calibration) ID SN: 104778 SN: 103244 SN: 103245 SN: 3013 SN: 660 ID SN: G941293874 SN: MY41498087	Cal Date (Certificate No.) 04-Apr-17 (No. 217-02521/02522) 04-Apr-17 (No. 217-02521) 04-Apr-17 (No. 217-02525) 07-Apr-17 (No. 217-02526) 30-Dec-17 (No. ES3-3013_Dec17) 21-Dec-17 (No. DAE4-660_Dec17) 21-Dec-17 (No. DAE4-660_Dec17) Check: Date (in house) 06-Apr-16 (in house check Jur-16)	Scheduled Calibration Apr-18 Apr-18 Apr-18 Apr-18 Dec-18 Dec-18 Dec-18 Dec-18 Dec-18 Dec-18 In house check Jun-18 In house check Jun-18		
Calibration Equipment used (M Phimary Standards Power meter NRP Power sensor NRP-291 Power sensor NRP-291 Reference 20 dB Attenustor Reference Probe ES3DV2 DAE4 Secondary Standards Power meter E44198 Power sensor E4412A Power sensor E4412A	ATE critical for calibration) ID SNL 104778 SNL 103244 SNL 103244 SNL 103245 SNL 30245 SNL 3013 SNL 3013 SNL 660 ID SNL GB41293874 SNL GB41293874 SNL MY41498087 SNL 000110210	Cal Date (Certificate No.) 04-Apr-17 (No. 217-02521/02522) 04-Apr-17 (No. 217-02521) 04-Apr-17 (No. 217-02525) 07-Apr-17 (No. 217-02529) 30-Dec-17 (No. E33-3013_Dec17) 21-Dec-17 (No. DAE4-660_Dec17) Check: Date (in house) 06-Apr-16 (in house check Jun-16) 06-Apr-16 (in house check Jun-16)	Scheduled Calibration Apr-18 Apr-18 Apr-18 Dec-18 Dec-18 Dec-18 Dec-18 Scheduled Check In house check Jun-18 In house check Jun-18 In house check Jun-18		
Calibration Equipment used (M Phimary Standards Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenustor Reference Probe ES3DV2 DAE4 Secondary Standards Power meter E4419B Power sensor E4412A Power sensor E4412A RF generator HP 8648C	ATE critical for calibration) ID SN: 104778 SN: 103244 SN: 103245 SN: 3013 SN: 660 ID SN: G841293874 SN: MY41498087 SN: 000110210 SN: US3642U01700 SN: US37390585	Cal Date (Certificate No.) 04-Apr-17 (No. 217-02521/02522) 04-Apr-17 (No. 217-02521) 04-Apr-17 (No. 217-02525) 07-Apr-17 (No. 217-02528) 30-Dec-17 (No. ES3-3013_Dec17) 21-Dec-17 (No. DAE4-660_Dec17) Check: Date (in house) 06-Apr-16 (in house check Jun-16) 06-Apr-16 (in house check Jun-16) 06-Apr-16 (in house check Jun-16) 06-Apr-16 (in house check Jun-16) 18-Dct-01 (in house check Jun-16)	Scheduled Calibration Apr-18 Apr-18 Apr-18 Dec-18 Dec-18 Dec-18 Dec-18 Dec-18 Dec-18 In house check Jun-18 In house check Jun-18		
Calibration Equipment used (M Phimary Standards Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenustor Reference Probe ES3DV2 DAE4 Secondary Standards Power meter E4419B Power sensor E4412A Power sensor E4412A RF generator HP 8648C	ID SN: 104778 SN: 103244 SN: 103244 SN: 103245 SN: 55277 (20x) SN: 660 ID SN: 660 SN: 660 ID SN: 660 SN: 03441498087 SN: MY41498087 SN: 00110210 SN: US3642U01700	Cal Date (Certificate No.) 04-Apr-17 (No. 217-02521/02522) 04-Apr-17 (No. 217-02521) 04-Apr-17 (No. 217-02521) 07-Apr-17 (No. 217-02528) 30-Dec-17 (No. E53-3013_Dec17) 21-Dec-17 (No. E53-3013_Dec17) 21-Dec-17 (No. E53-3013_Dec17) 21-Dec-17 (No. DAE4-660_Dec17) 06-Apr-16 (in house check Jun-16) 06-Apr-16 (in house check Jun-16) 06-Apr-16 (in house check Jun-16) 04-Aug-99 (in house check Jun-16)	Scheduled Calibration Apr-18 Apr-18 Apr-18 Dec-18 Dec-18 Dec-18 Scheduled Check In house check Jun-18 In house check: Jun-18 In house check: Jun-18 In house check: Jun-18		

Certificate No: EX3-3831_Jan18

Page 1 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

```
www.tw.sgs.com
```



Report No. : E5/2018/30007 Page: 143 of 202

Calibration Laboratory of Schmid & Partner Engineering AG Zeugh sstrasse 43, 8004 Zurich, Switzerland



Schweizerischer Kalibrierdienst S Service suisse d'étalonnage C Servizio svizzero di taratura S Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

tissue simulating liquid
sensitivity in free space
sensitivity in TSL / NORMx,y,z
diode compression point
crest factor (1/duty_cycle) of the RF signal
modulation dependent linearization parameters
@ rotation around probe axis
ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
 b) IEC 62209-1, ", "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from handhald and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
 c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for whether the specific Absorption Rate (SAR) for whether the specific Absorption Rate (SAR) and the specific Absorption Rate (SAR) for whether the specific Absorpt

- used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)". March 2010 d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORMx,y,z: Assessed for E-field polarization 8 = 0 (I ≤ 900 MHz in TEM-cell; f > 1800 MHz: R22 waveguide). NORMx, y, z are only intermediate values, i.e., the uncertainties of NORMx, y, z does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)x,y,z = NORMx,y,z * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF
- DCPx,y,z: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal
- characteristics
- Ax,y,z; Bx,y,z; Cx,y,z; Dx,y,z; VRx,y,z; A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer Standard for f < 800 MHz) and inside waveguide using analytical field distributions based on power measurements for f > 800 MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORMx,y,z * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy): in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle: The angle is assessed using the information gained by determining the NORMx (no uncertainty required).

Certificate No: EX3-3831 Jan18

Page 2 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134.Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

f (886-2) 2298-0488

www.tw.sas.com



Report No. : E5/2018/30007 Page : 144 of 202

EX3DV4 - SN:3831

January 23, 2018

Probe EX3DV4

SN:3831

Manufactured: Calibrated: September 6, 2011 January 23, 2018

Calibrated for DASY/EASY Systems (Note: non-compatible with DASY2 system!)

Certificate No: EX3-3831_Jan18

t (886-2) 2299-3279

Page 3 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

台灣檢驗科技股份有限公司

f (886-2) 2298-0488

www.tw.sgs.com

Member of SGS Group



January 23, 2018

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3831

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm $(\mu V/(V/m)^2)^{\Lambda}$	0.43	0.41	0.42	± 10.1 %
DCP (mV) ⁸	100.3	106.6	101.4	

Modulation Calibration Parameters

UID	Communication System Name		AdB	B dBõV	С	D dB	VR mV	Unc ^t (k=2)
0	CW	X	0.0	0.0	1.0	0.00	176.5	±3.5 %
-		Y	0.0	0.0	1.0		196.9	-
		Z	0.0	0.0	1.0		196.8	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

The uncertainties of Norm X, Y, Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

Numerical linearization parameter: uncertainty not required. Uncertainty is determined using the max, deviation from linear response applying rectangular distribution and is expressed for the square of the field value

Certificate No: EX3-3831_Jan18

Page 4 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

f (886-2) 2298-0488



January 23, 2018

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3831

f (MHz) ^c	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
750	41.9	0.89	9.55	9.55	9.55	0.32	1.00	± 12.0 %
B35	41.5	0.90	9.10	9.10	9.10	0.29	1.04	± 12.0 %
900	41.5	0,97	9.00	9.00	9.00	0.40	0.85	± 12.0 %
1750	40.1	1.37	8.09	8.09	8.09	0.37	0.80	± 12.0 %
1900	40.0	1.40	7.78	7.78	7.78	0.34	0.84	± 12.0 %
2000	40.0	1.40	7.79	7.79	7.79	0.27	0.84	± 12.0 %
2300	39.5	1.67	7.50	7.50	7.50	0.32	0.80	± 12.0 %
2450	39,2	1.80	7.16	7.16	7.16	0.38	0.84	± 12.0 %
2600	39.0	1,96	6.95	6.95	6.95	0.38	0.82	± 12.0 %
3500	37.9	2.91	6.64	6.64	6.64	0.30	1.20	± 13.1 %
5200	36.0	4.66	4.86	4.86	4.86	0.35	1.80	± 13.1 %
5300	35.9	4.76	4.65	4.65	4.65	0.35	1.80	± 13,1 %
5600	35.5	5.07	4.49	4.49	4.49	0.40	1.80	± 13,1 %
5800	35.3	5.27	4.50	4.50	4.50	0.40	1.80	± 13.1 %

Calibration Parameter Determined in Head Tissue Simulating Media

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

validity can be extended to ± 110 MHz. F At (requencies below 3 GHz, the validity of tissue parameters (c and d) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (c and d) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated larget issue parameters. ⁶ Alpha/Depth are determined during rabibation. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip distances frequencies.

diameter from the boundary.

Certificate No: EX3-3831 Jan18

Page 5 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

```
www.tw.sas.com
```



January 23, 2018

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3831

f (MHz) ^c	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha G	Depth ^G (mm)	Unc (k=2)
750	55.5	0.96	9.39	9.39	9.39	0.34	1.00	± 12.0 %
835	55.2	0.97	9.18	9.18	9.18	0.39	0.85	± 12.0 %
900	55.0	1.05	9.13	9.13	9.13	0.32	0.96	± 12.0 %
1750	53.4	1.49	7.65	7.65	7.65	0.32	0.85	± 12.0 %
1900	53.3	1.52	7.35	7.35	7.35	0.38	0.81	± 12.0 %
2000	53.3	1.52	7.51	7.51	7.51	0.36	0.80	± 12.0 %
2300	52.9	1.81	7.29	7.29	7.29	0.36	0.88	± 12.0 %
2450	52.7	1.95	7.26	7.26	7.26	0.34	0.88	± 12.0 %
2600	52.5	2,16	6.95	6.95	6,95	0.25	0.99	± 12.0 %
3500	51.3	3.31	6.60	6.60	6.60	0.30	1.20	± 13.1 %
5200	49.0	5.30	4.56	4.56	4.56	0.35	1.90	± 13.1 %
5300	48.9	5.42	4.39	4.39	4.39	0.35	1.90	± 13.1 %
5600	48.5	5.77	3.92	3.92	3.92	0.40	1,90	± 13.1 %
5800	48.2	6.00	4.17	4.17	4.17	0.40	1.90	± 13.1 %

Calibration Parameter Determined in Body Tissue Simulating Media

^G Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency

below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz. * At frequencies below 3 GHz, the validity of tissue parameters (r and o) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (r and o) can be relaxed to ± 10% if liquid compensation formula is applied to the ConvF uncertainty for indicated target lissue parameters. * Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

Certificate No: EX3-3831_Jan18

t (886-2) 2299-3279

Page 6 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

台灣檢驗科技股份有限公司


f (886-2) 2298-0488

www.tw.sas.com



January 23, 2018

Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

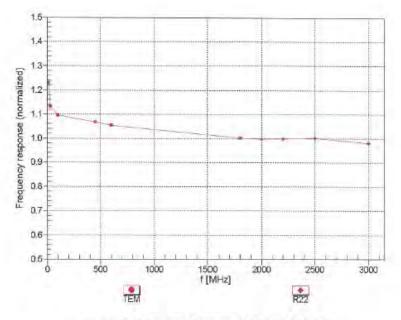

Uncertainty of Frequency Response of E-field: ± 6.3% (k=2)

Certificate No: EX3-3831_Jan18

Page 7 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號


台灣檢驗科技股份有限公司 t (886-2) 2299-3279



Report No. : E5/2018/30007 Page : 149 of 202

EX3DV4-SN:3831

January 23, 2018

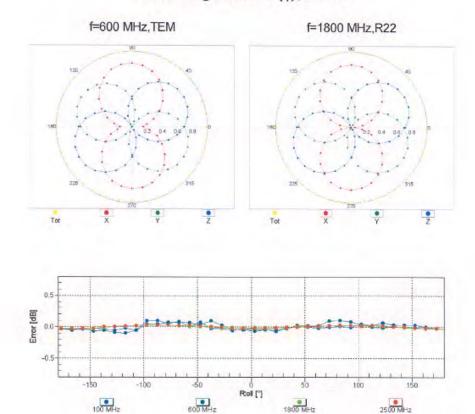

Receiving Pattern (ϕ), $\vartheta = 0^{\circ}$

Uncertainty of Axial Isotropy Assessment: ± 0.5% (k=2)

Certificate No: EX3-3831_Jan18

Page 8 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488



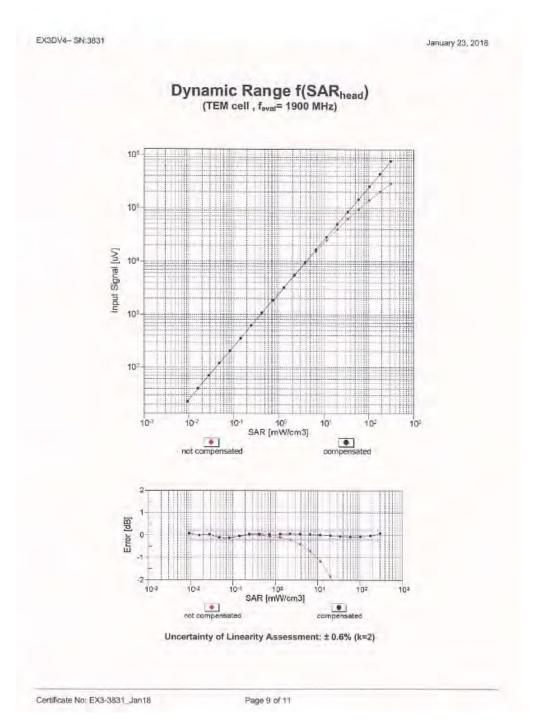

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 🛛 No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號


台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488

www.tw.sgs.com



January 23, 2018

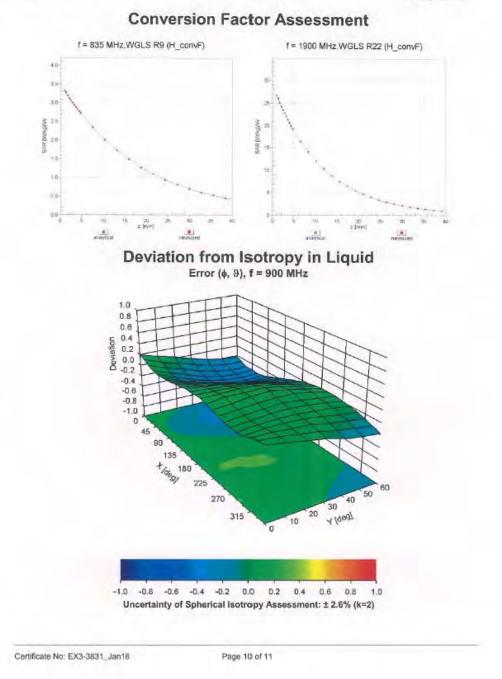

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

f (886-2) 2298-0488



January 23, 2018

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3831

Other Probe Parameters

-17.1
enabled
disabled
337 mm
10 mm
9 mm
2.5 mm
1 mm
1 mm
1 mm
1.4 mm

Certificate No: EX3-3831_Jan18

Page 11 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

f (886-2) 2298-0488

www.tw.sgs.com



8. Uncertainty Budget

A	с	D	е		f	g	h=c * f / e	i=c * g / e	k
Source of Uncertainty	Tolerance/ Uncertainty	Probabilit y	Div	Div Value	ci (1g)	ci (10g)	Standard uncertainty	Standard uncertainty	vi, or Veff
Measurement system									
Probe calibration	6.00%	Ν	1	1	1	1	6.00%	6.00%	∞
Isotropy , Axial	3.50%	R	√3	1.732	1	1	2.02%	2.02%	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~
lsotropy, Hemispherical	9.60%	R	√3	1.732	1	1	5.54%	5.54%	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~
Modulation Response	2.40%	R	√3	1.732	1	1	1.40%	1.40%	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~
Boundary Effect	1.00%	R	√3	1.732	1	1	0.58%	0.58%	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~
Linearity	4.70%	R	√3	1.732	1	1	2.71%	2.71%	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~
Detection Limits	1.00%	R	√3	1.732	1	1	0.58%	0.58%	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~
Readout Electronics	0.30%	Ν	1	1	1	1	0.30%	0.30%	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~
Response time	0.80%	R	√3	1.732	1	1	0.46%	0.46%	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~
Integration Time	2.60%	R	√3	1.732	1	1	1.50%	1.50%	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~
Measurement drift (class A evaluation)	1.75%	R	√3	1.732	1	1	1.01%	1.01%	∞
RF ambient condition - noise	3.00%	R	√3	1.732	1	1	1.73%	1.73%	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~
RF ambient conditions - reflections	3.00%	R	√3	1.732	1	1	1.73%	1.73%	∞
Probe positioner Mechanical restrictions	0.40%	R	√3	1.732	1	1	0.23%	0.23%	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~
Probe Positioning with respect to phantom	2.90%	R	√3	1.732	1	1	1.67%	1.67%	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~
Post-processing	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Max SAR Eval	1.00%	R	√3	1.732	1	1	0.58%	0.58%	~
Test Sample related									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	Ν	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	√3	1.732	1	1	2.89%	2.89%	~
Phantom and Setup									
Phantom Uncertainty	4.00%	R	√3	1.732	1	1	2.31%	2.31%	∞
Liquid permittivity (mea.)	1.50%	N	1	1	0.64	0.43	0.96%	0.65%	М
Liquid Conductivity (mea.)	4.33%	N	1	1	0.6	0.49	2.60%	2.12%	М
Combined standard uncertainty		RSS					11.75%	11.62%	
Expant uncertainty (95% confidence							23.50%	23.24%	

Measurement Uncertainty evaluation template for DUT SAR test (0.3-3G)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

1

f (886-2) 2298-0488 www.tw.sgs.com



Measurement	Incertainty	evaluation	template fr	SAR to	ast (3-6G)
Measurement	Uncertainty	evaluation	template it	SAN II	551 (3-00)

A	с	D	е		f	g	h=c * f / e	i=c * g / e	k
Source of Uncertainty	Tolerance/ Uncertainty	Probabilit v	Div	Div Value	ci (1g)	ci (10g)	Standard uncertainty	Standard uncertainty	vi, or Veff
Measurement system									
Probe calibration	6.55%	N	1	1	1	1	6.55%	6.55%	90
Isotropy , Axial	3.50%	R	√3	1.732	1	1	2.02%	2.02%	80
lsotropy, Hemispherical	9.60%	R	√3	1.732	1	1	5.54%	5.54%	80
Modulation Response	2.40%	R	√3	1.732	1	1	1.40%	1.40%	∞
Boundary Effect	1.00%	R	√3	1.732	1	1	0.58%	0.58%	80
Linearity	4.70%	R	√3	1.732	1	1	2.71%	2.71%	80
Detection Limits	1.00%	R	√3	1.732	1	1	0.58%	0.58%	00
Readout Electronics	0.30%	N	1	1	1	1	0.30%	0.30%	00
Response time	0.80%	R	√3	1.732	1	1	0.46%	0.46%	00
Integration Time	2.60%	R	√3	1.732	1	1	1.50%	1.50%	00
Measurement drift (class A evaluation)	1.75%	R	√3	1.732	1	1	1.01%	1.01%	00
RF ambient condition - noise	3.00%	R	√3	1.732	1	1	1.73%	1.73%	00
RF ambient conditions - reflections	3.00%	R	√3	1.732	1	1	1.73%	1.73%	œ
Probe positioner Mechanical restrictions	0.40%	R	√3	1.732	1	1	0.23%	0.23%	œ
Probe Positioning with respect to phantom	2.90%	R	√3	1.732	1	1	1.67%	1.67%	00
Post-processing	1.00%	R	√3	1.732	1	1	0.58%	0.58%	00
Max SAR Eval	1.00%	R	√3	1.732	1	1	0.58%	0.58%	00
Test Sample related									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	√3	1.732	1	1	2.89%	2.89%	œ
Phantom and Setup									
Phantom Uncertainty	4.00%	R	√3	1.732	1	1	2.31%	2.31%	œ
Liquid permittivity (mea.)	1.31%	N	1	1	0.64	0.43	0.84%	0.56%	М
Liquid Conductivity (mea.)	3.63%	N	1	1	0.6	0.49	2.18%	1.78%	М
Combined standard uncertainty		RSS					11.95%	11.85%	
Expant uncertainty (95% confidence							23.89%	23.71%	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

```
www.tw.sgs.com
```



9. Phantom Description

Schmus & Panner Engineering AG

e s а о

Zoughausstnaser 43, 8004 Zurich, Switzerlan Phone +41 1 245 9700, Fax +41 1 245 9779 Info@spasg.com, http://www.spasg.com

Certificate of Conformity / First Article Inspection

tem	SAM Twin Phentom V4.0
Type No .	QD 000 P40 C
Series No	TP-1150 and higher
Manufacturer	SPEAG Zeughausstrasse 43 CH-8004 Zürich Switzerland

Tests

Tests The series production process used allows the imitation to test of first articles. Complete tests were made on the pre-series Type No. QD 000 P40 AA, Serial No. TP-1001 and on the series first article Type No. QD 000 P40 BA, Serial No. TP-1006. Certain parameters have been retested using further series items (called samples) or are tested at each item.

Test	Requirement	Details	Units tested
Dimensions	Compliant with the geometry according to the CAD model.	IT'IS CAD File (*)	First article, Samples
Material thickness of shell	Compliant with the requirements according to the standards	2mm +/- 0.2mm in flat and specific areas of head section	First article, Samples, TP-1314 ff,
Material thickness at ERP	Compliant with the requirements according to the standarda	6mm +/- 0.2mm at ERP	First article, All items
Material parameters	Dielectric parameters for required frequencies	300 MHz - 0 GHz: Relative permittivity < 5. Loss tangent < 0.05	Material samples
Material resistivity	The material has been tested to be compatible with the liquids defined in the standards if handled and cleaned according to the instructions. Observe technical Note for material compatibility.	DEGMBE based simulating liquids	Pre-series, First article, Material samples
Sagging	Compliant with the requirements according to the standards. Sagging of the flat section when filled with tissue simulating liquid	< 1% typical < 0.8% if filed with 155mm of HSL900 and without OUT below	Prototypes, Sample testing

- 1234
- 5tandarda [1] CENELEC EN 50361 [2] IEEE Std 1528-2003 [3] IEC 62209 Part I
- The IT'IS CAD file is derived from [2] and is also within the tolerance requirements of the shapes of the other documents.

Conformity Based on the sample tasts above, we certify that this item is in compliance with the uncertainty requirements of SAR measurements specified in standards $\{1\}$ to [4]

Date	07.07.2005	8 p 8 8 9
Signature / Stamp	in charge	Seignith & Pachair Engineering AC Thriftmangdens 43, 8004 2016/ Switzerle Phone 451, 2016/ Switzerle Into Bepag, com. http://www.spag.com

Doc He Mit - 00 000 P40 C - *

t (886-2) 2299-3279

1115 Рарк

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.



10. System Validation from Original Equipment Supplier

atilateral Agreement for the	Ration Service (SAS) ics is one of the signatories		traditation No.: SCS 0108
ert SGS-TW (Aud	Jen)	Cartificate No	D835V2-4d063_Aug17
ALIBRATION	CERTIFICATE		and the
bjett	D835V2 - SN:4d0	063	
alibration procedure(s)	QA CAL-05.v9		-
	Contraction of the second second second	dure for dipole validation kits abo	we 700 MHz
alibration data	August 21, 2017		
nmary Standards	DR	Cal Date (Certificate No.)	Scheduled Calibration
ower meter NRP ower sensor NRP-251	SN: 104778 SN: 103044	04-Apr-17 (No. 217-02521/02522) 04-Apr-17 (No. 217-02521)	Apr-18 Apr-18
ower sensor NRP 291	SN: 103248	04-Apr-17 (No. 217-02522)	Apt-10
eference 20 dB Atequator	SN: 5058 (20k)	07-Apr-17 (No. 217-02525)	Apr-16
rpe-N mismatch combination		07-Apr-17 (No. 217-02529)	Apr-18
eference Probe EX3CW4	SN: 7349 SN: 681	31-May-17 (No. EX3-7349_May17) 28-Mar-17 (No. DAE4-601_Mar17)	May-18 Mar-18
2F4	1 200 001	Spinal-In (vas the e-col_manin)	WHI-IG
VAE4		The state Traine and Incoments	
econdary Standards	1D#	Eheck Elate (in house)	Scheduled Check
econdary Standards ower meter EPM-442A	SN. GB37480704	07-Oct-15 (in house check Oct-16)	In house check. Oct-18
econdary Standards iower meter EPM-442A tower sensor HP 6481A	SN. GB37480704 SN. US37292783	07-Oct-15 (in house check Oct-16) 07-Oct-15 (in house check Oct-16)	In house check, Oct-18 In house check, Oct-18
econdary Standards ower meter EPM-442A tower sensor HP 8481A tower sensor HP 8481A	SN: GB37480704 SN: US37292783 SN: MY41092317	07-Oci-15 (in house check Oct-16) 67-Oci-15 (in house check Oct-16) 67-Oci-15 (in house check Oct-16)	In house check. Oct-18 In house check. Oct-18 In house check. Oct-18
econdary Standards ower meter EPM-442A	SN. GB37480704 SN. US37292783	07-Oct-15 (in house check Oct-16) 07-Oct-15 (in house check Oct-16)	In house check, Oct-18 In house check, Oct-18
econdary Slandards tower meter EPM-442A tower sensor HP 8481A tower sensor HP 8481A tower sensor HP 8481A IF ganerator R&S SMT-06	SN: GB37480704 SN: U637292783 SN: MY41092317 SN: 100972	07-Oct-15 (m house check Oct-16) 07-Oct-15 (m house check Oct-16) 07-Oct-15 (m house check Oct-16) 15-Jun-15 (in house check Oct-16)	In house check, Oct-18 In house check, Oct-18 In house check, Oct-18 In house check, Oct-18
econdary Slandards tower meter EPM-442A tower sensor HP 8481A tower sensor HP 8481A tower sensor HP 8481A IF ganerator R&S SMT-06	SN GB37400704 SN US37292783 SN MY41092317 SN: 100972 SN: US37390586	07-0ci-15 (in house check Oct-16) 07-0ci-15 (in house check Oct-16) 07-0ci-15 (in house check Oct-16) 15-Jan-15 (in house check Oct-16) 18-0ci-01 (in house check Oct-16)	In house check. Oct-18 In house check. Oct-18 In house check. Oct-18 In house check. Oct-18 In house check. Oct-17
econdary Slandards lower meter EPM-442A hower sensor HP 6481A tower ensor HP 8481A tower ensor HP 8481A F generator R&S SMT-06 letWork Analyzer HP 97536	SN GB37400704 SN US37292783 SN MY41082317 SN: 100972 SN: US37390585 Name	07-0cl-15 (in house check Oct-16) 07-0cl-15 (in house check Oct-16) 07-0cl-15 (in house check Oct-16) 15-Jun-15 (in house check Oct-16) 18-0cl-01 (in house check Oct-16) Function	In house check. Oct-18 In house check. Oct-18 In house check. Oct-18 In house check. Oct-18 In house check. Oct-17

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document construction route and the analytic and the prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號



Calibration Laboratory of Schmid & Partner Engineering AG Zeoghaussbusse 43, 8664 Zurich, Switzeland



S Schweizerischer Kalibramiens Service suisse d'étalonnage Service svisse of tarature S swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA

Glossary:

ana ana ana ana	
TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Mutilational Agroument for the recognition of calibration certificates

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
 c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664. "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end
 of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole
 positioned under the liquid filled phantom. The impedance stated is transformed from the
 measurement at the SMA connector to the feed point. The Return Loss ensures low
 reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No. D835V2-4d063_Aug17

t (886-2) 2299-3279

Page 2 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號



Measurement Conditions

DASY system cor	figuration, as	far as not j	given on	page 1.
-----------------	----------------	--------------	----------	---------

DASY Version	BYRAD	V52.10.0
Extrapolation	Advanced Extrapolation	327 Pr-8
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 minuter
Measured Head TSL parameters	(22.0 ± 0.2) °C	40.9±6%	0.93 mho/m ± 8 %
Head TSL temperature change during test	< 0.5 °C	_	

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW Input power	2.40 VV/kg
SAR for nominal Haad TSL parameters	normalized to 1W	9.34 W/kg ± 17.0 % (k=2)
SAR averaged over 10 cm ³ (10 g) of Head TSI	randilian	
BAR everaged over 10 cm ³ (10 g) of Head TSL SAR measured	condition 250 mW input power	1.55 W/kg

Body TSL parameters

 The following parameters and calculations were applied.
 Temperature
 Permittivity
 Conductivity

 Nominal Body TSL parameters
 22.0 °C
 55.2
 0.97 mno/m

 Measured Body TSL parameters
 (22.0 ± 0.2) °C
 55.3 ± 6 %
 0.98 mbo/m ± 6 %

SAR result with Body TSL

Body TSL temperature change during test

SAR averaged over 1 cm ¹ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.41 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	9.57 W/kg ± 17.0 % (k=2)
SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR averaged over 10 cm ³ (10 g) of Body TSL SAR measured	condition 250 mW input power	1,68 Wikp

<0.5 °C

Centicate No: DB36V2-4d063_Aug17

t (886-2) 2299-3279

Page 3 of 6

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號



Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point.	31.1 17 - 2.7 (2	
Return Loss	- 30.6 dB	

Antenna Parameters with Body TSL

Impedance, transformed to feed point	47.2 Ω - 5.2 jΩ
Return Loss	-24.4 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.387 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight werming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the sectord arm of the dipole. The antenna is therefore short circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the clipple arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	November 27, 2006

Certificate No. D835V2-4d063_Aug17

t (886-2) 2299-3279

Page 4 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號



DASY5 Validation Report for Head TSL

Date: 18.08.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d063


Communication System: UID 0 - CW; Frequency: 835 MHz Medium parameters used: f = 835 MHz; σ = 0.93 S/m; ϵ_c = 40.9; ρ = 1000 kg/m³ Phantom section: Flat Section Measurement Standard: DASY5 (IEEE/IEC/ANS) C63,19-2011)

DASY52 Configuration:

- Probe: EX3DV4 SN7349; ConvF(10.07, 10.07, 10.07); Calibrated: 31.05.2017;
- · Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA: Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx-5mm, dy-5mm, dz-5mm Reference Value = 61.74 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 3.71 W/kg SAR(1 g) = 2.4 W/kg; SAR(10 g) = 1.55 W/kg Maximum value of SAR (measured) = 3.26 W/kg



Certificate No: D835V2-4d063_Aug17

t (886-2) 2299-3279

Page 5 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號



Report No. : E5/2018/30007 Page : 161 of 202

Impedance Measurement Plot for Head TSL

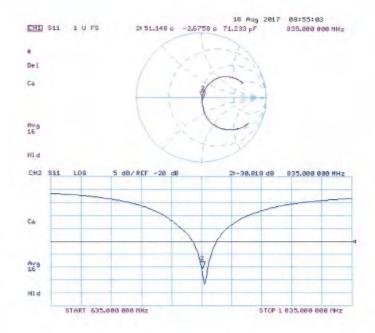

Certificate No: D835V2-4d063_Aug17

t (886-2) 2299-3279

Page 6 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

f (886-2) 2298-0488

www.tw.sgs.com



DASY5 Validation Report for Body TSL

Date: 21.08.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d063


Communication System: UID 0 - CW; Frequency: 835 MHz Medium parameters used: f = 835 MHz; σ = 0.98 S/m; ϵ_r = 55.3; ρ = 1000 kg/m³ Phantom section: Flat Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 SN7349; ConvF(10.2, 10.2, 10.2); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- · Phantom: Flat Phantom 4.9 (Back); Type: QD 00R P49 AA; Serial: 1005
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx-5mm, dy-5mm, dz-5mm Reference Value = 59.86 V/m; Power Drift = 0.01 dB Peak SAR (extrapolated) = 3.64 W/kg SAR(1 g) = 2.41 W/kg; SAR(10 g) = 1.58 W/kg Maximum value of SAR (measured) = 3.20 W/kg

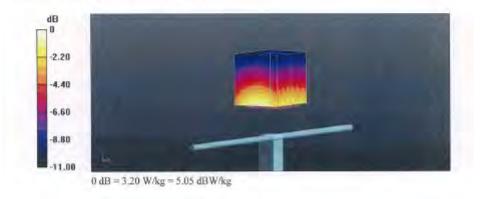

Certificate No: D835V2-4d063_Aug17

t (886-2) 2299-3279

Page 7 of 8


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號



Impedance Measurement Plot for Body TSL

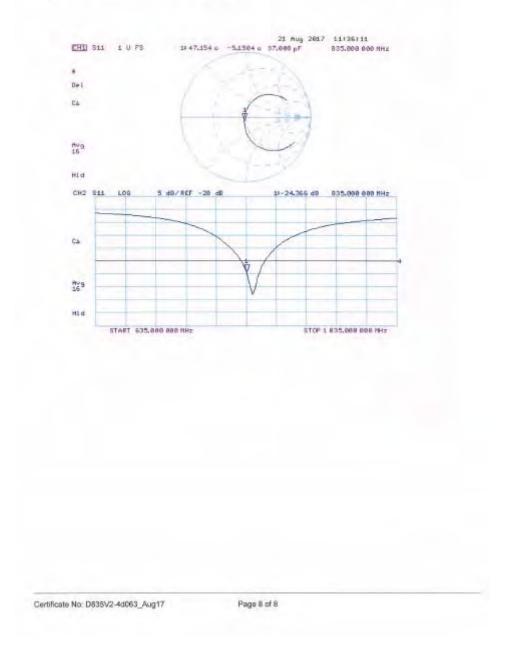

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號



		Malada Carl	Servizio svizzero di taratura Swiss Calibration Service
condited by the Swiss Accredit he Swiss Accreditation Servic fulfilateral Agreement for the r	e is one of the signatorie	a to the EA.	coreditation No.: SCS 0108
lient SGS-TW (Aude	207 0	Contraction of the second s	× D1750V2-1008_Aug17
CALIBRATION	CERTIFICATE		
Diject	D1750V2 - SN:10	800	-
Celibration procedure(s)	QA CAL-05.v9 Galibration proce	dure for dipole validation kits abo	ove 700 MHz
Calibration date	August 21, 2017		
		ry tasility, environment temperature (22 \pm 3)*	C end humidity < 70%,
Calibration Equipment used (M& Primary Standards	TE critical for calibration)	Cal Data (Certificate No.)	Scheduled Calibration
Celtraton Equipment used (M& Primary Standards Power meter NRP	TE critical for calibration)	Cal Dala (Certificate No.) 04-April 7 (No. 217-02521/02522)	Scheduled Celibertion Apr-16
Ceitoration Equipment used (M& Primary Standards Power meter NRP Power ansar NRP-Z91	TE critical for calibration) ID# SN: 104778 SN: 103244	Cal Data (Certificate No.) 04-April 7 (No. 217-02521/02522) 04-April 7 (No. 217-02521)	Schwiduled Caliboration Apr18 Apr18
Celtration Equament used (W& Primary Standards Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91	TE critical for calibration) ID# SN: 104778 SN: 103244 SN: 103245	Cal Data (Cortificate No.) 04-Apr.17 (No. 217-02521/02522) 04-Apr.17 (No. 217-02521) 04-Apr.17 (No. 217-02522)	Scheduled Celibertion Apr-18 Apr-18 Apr-18
Celibration Equipment used (W& Primary Standards Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attemuator	TE critical for calibration) ID # SN: 104778 SN: 102244 SN: 103245 SN: 5058 (20k)	Cal Data (Certificate No.) 04-April 7 (No. 217-02521/02522) 04-April 7 (No. 217-02521) 04-April 7 (No. 217-02522) 07-April 7 (No. 217-02528)	Schedulled Calibration Apr-18 Apr-18 Apr-18 Apr-18
Celibration Equipment used (W& Primary Standards Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 db Attenuator Type-N mismatch combination	TE critical for calibration) ID # SN: 104778 SN: 103245 SN: 5058 (20k) SN: 5058 (20k) SN: 5057 2 / 06327	Cal Data (Certificate No.) 04-April7 (No. 217-02521/02522) D4-April7 (No. 217-02521) 04-April7 (No. 217-02522) 07-April7 (No. 217-02528) 07-April7 (No. 217-02528)	Scheduled Calibration Apr-18 Apr-18 Apr-18 Apr-18 Apr-18 Apr-18
Celibration Equipment used (M& Primary Standards Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator Type-A mismatch combination Reference Probe EX3DV4	TE critical for calibration) ID # SN: 104778 SN: 102244 SN: 103245 SN: 5058 (20k)	Cal Data (Certificate No.) 04-April 7 (No. 217-02521/02522) 04-April 7 (No. 217-02521) 04-April 7 (No. 217-02522) 07-April 7 (No. 217-02528)	Schedulled Calibration Apr-18 Apr-18 Apr-18 Apr-18
Celibration Equipment used (W& Primary Standards Power inneter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Retelectoe 20 dB Attenuator Type-N misimatch combination Retelecte Probe EX3DV4 DAE4 Secondary Standards	TE critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: 5058 (20k) SN: 5058 (20k) SN: 5047.2 / 06327 SN: 7349 SN: 601 ID #	Cal Data (Certificate No.) 04-Apr.17 (No. 217-02521/02522) 04-Apr.17 (No. 217-02521) 04-Apr.17 (No. 217-02522) 07-Apr.17 (No. 217-02526) 07-Apr.17 (No. 217-02526) 21-May-17 (No. 247-02526) 21-May-17 (No. 247-02526) 21-May-17 (No. DAE4-901, Mar17) ZB-Mar-17 (No. DAE4-901, Mar17)	Scheduled Ceitosson Apr-18 Apr-18 Apr-18 Apr-18 Apr-18 Apr-18 May-18 Mar-18 Scheduled Check
Celibration Equipment used (W& Primary Standards Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator Type-N mismatch combination Reference Probe EX3DV4 DAE4 Secondary Standards Power center EPM-442A	TE critical for calibration) ID # SN: 104778 SN: 103244 SN: 5058 (20k) SN: 5058 (20k) SN	Cal Data (Certificato No.) 04-Apri 17 (No. 217-02521/02522) 04-Apri 17 (No. 217-02521) 04-Apri 17 (No. 217-02522) 07-Apri 17 (No. 217-02528) 07-Apri 17 (No. 217-02528) 21-May-17 (No. 217-02528) 21-May-17 (No. 2X3-7349_May17) 28-Marci 17 (No. DAE4-601_Mari 17) Check Date lin house) 07-Ocl-15 (in house check Oct-16)	Schwidullet Calibration Apr-18 Apr-18 Apr-18 Apr-18 Apr-18 Apr-18 May-18 Mar-18 Schwidulet Check In house check: Oct-18
Celibration Equipment used (W& Primary Standards Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Retence 20 dB Attenuator Type-N mismatch combinetion Retence Probe EX3DV4 DAE4 Secondary Standards Power uniter EPM-442A Power sensor HP 8481A	TE critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: 5050 (20k) SN: 5047.2 (k) SN: 5047.2 (k) SN: 5047.2 (k) SN: 601 ID # SN: GB37480704 SN: UB37292783	Cal Data (Certificate No.) 04-April 7 (No. 217-02521/02522) 04-April 7 (No. 217-02521) 04-April 7 (No. 217-02522) 07-April 7 (No. 217-02528) 07-April 7 (No. 2017-02528) 07-April 7 (No. 2017	Schweiuled Ceilberson Apr-18 Apr-18 Apr-18 Apr-18 Apr-18 May-18 Mar-18 Scheduled Check In house check: Oct-18 In house check: Oct-18
Calibration Equipment used (W& Primary Standards Power neter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Reterence 20 dB Attenuator Type-N mismatch combination Reterence Probe EX3D(V4 DAE4 Secondary Sondards Power sensor HP S481A Power sensor HP S481A	TE critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: 5056 (20k) SN: 5057 (206) SN: 5077 2 (0527) SN: 739 SN: 601 ID # SN: 01837480704 SN: 01837280704 SN: 01837280704 SN: 01837280704 SN: 01837280704	Cal Data (Derificate No.) 04-Apr.17 (No. 217-02521/02522) 04-Apr.17 (No. 217-02521) 04-Apr.17 (No. 217-02521) 04-Apr.17 (No. 217-02528) 07-Apr.17 (No. 217-02528) 07-Apr.17 (No. 217-02528) 21-May-17 (No. 217-02528) 21-May-17 (No. 217-02528) 07-Oct-15 (In house check Oct-16) 07-Oct-15 (In house check Oct-16) 07-Oct-15 (In house check Oct-16) 07-Oct-15 (In house check Oct-16)	Scheduled Calibration Apr-18 Apr-18 Apr-18 Apr-18 Apr-18 May-18 Mar-18 Scheduled Check In house check: Oct-18 In house check: Oct-18 In house check: Oct-18
Celibration Equipment used (W& Primary Standards Power meter NRP Power sensor NRP-Z91 Power sensor NRP-Z91 Reference 20 dB Attenuator Type-N mismatch combination Reference Probe EX3DV4 DAE4 Secondary Standards Power center EPM-442A	TE critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: 5050 (20k) SN: 5047.2 (k) SN: 5047.2 (k) SN: 5047.2 (k) SN: 601 ID # SN: GB37480704 SN: UB37292783	Cal Data (Certificate No.) 04-April 7 (No. 217-02521/02522) 04-April 7 (No. 217-02521) 04-April 7 (No. 217-02522) 07-April 7 (No. 217-02528) 07-April 7 (No. 2017-02528) 07-April 7 (No. 2017	Schwiduled Calibusion Apr-18 Apr-18 Apr-18 Apr-18 Apr-18 May-18 Mar-18 Scheduled Check In house check: Oct-18 In house check: Oct-18
Calibration Equipment used (W& Power meter NRP Power sensor NRP-291 Power sensor NRP-291 Reference 20 dB Attenuator Type-N mismotich combination Reference Probe EX3DV4 DAE4 Secondary Standards Power sensor HP 8481A Power sensor HP 8481A RF generator R85 SMT-05	TE critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: 5058 (20k) SN: 5058 (20k) SN: 5047.2 / 06327 SN: 5047.2 / 06327 SN: 601 ID # SN: CIB37480704 SN: CIB37480704 SN: CIB37280733 BH, My41020317 SN: 100972	Cal Data (Certificate No.) 04-Apr.17 (No. 217-02521/02522) 04-Apr.17 (No. 217-02521/02522) 04-Apr.17 (No. 217-02522) 07-Apr.17 (No. 217-02528) 07-Apr.17 (No. 217-02528) 07-Apr.17 (No. 217-02528) 21-May-17 (No. 217-02528) 21-May-17 (No. 247-02528) 21-May-17 (No. 247-02528) 21-May-1	Scheduled Celibration Apr-18 Apr-18 Apr-18 Apr-18 Apr-18 May-18 May-18 Mar-18 Scheduled Check In house check: Oct-18 In house check: Oct-18 In house check. Oct-18 In house check. Oct-18
Celibration Equipment used (W& Primary Standards Power inneter NRP Power sensor NRP-291 Reteinence 20 dB Attenuator Type-N mismatch combination Reteinence Probe EX3DV4 DAE4 Secondary Standards Power sensor HP 8481A Power sensor HP 8481A RF generator R85 SMT-06	TE critical for calibration) ID # SN. 104778 SN. 103244 SN. 103245 SN. 5058 (20k) SN. 5047 2 / 06327 SN. 7349 SN. 601 ID # SN. 01837480704 SN. 01837290783 GN. MY41020317 SN. 105972 SN. 10537390585	Cal Data (Certificate No.) 04-April 7 (No. 217-02521/02522) D4-April 7 (No. 217-02521) D4-April 7 (No. 217-02523) 07-April 7 (No. 217-02528) 07-April 7 (No. 217-02528) 21-May 17	Schweizleid Calibersion Apr-18 Apr-18 Apr-18 Apr-18 May-18 May-18 Mar-18 Scheduled Check In house check: Oct-18 In house check: Oct-18
Celibration Equipment used (W& Primary Standards Power sensor NRP-Z91 Power sensor NRP-Z91 Power sensor NRP-Z91 Retenence 20 dB Attenuator Type-N mismatch combination Retenence Probe EX3DV4 DAE4 Secondary Standards Power sensor HP 8481A Power sensor HP 8481A Power sensor HP 8481A RF generator R85 SMT-06 Network Analyzer HP 8753E	TE critical for calibration) ID # SN: 103244 SN: 103245 SN: 5050 (20k) SN: 5047.2 (20k) SN: 5047.2 (20k) SN: 5047.2 (20k) SN: 601 ID # SN: GB37480704 SN: GB37480704 SN: US37390585 Name	Cal Data (Certificate No.) 04-April 7 (No. 217-02521/02522) 04-April 7 (No. 217-02521) 04-April 7 (No. 217-02523) 07-April 7 (No. 217-02528) 07-April 7 (No. 217-0258	Schwidzlich Calibration Apr-18 Apr-18 Apr-18 Apr-18 May-18 Mar-18 Mar-18 Schwidzlich Check In house check: Oct-18 In house check: Oct-18

Certificate No: D1750V2-1008_Aug17

Page 1 of B

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

f (886-2) 2298-0488



Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 6104 Zurich, Switzerland





S

C

S

Schweizenscher Kalibrierdienst Service suisse d'étalomnage Servitio svizzero di taratura Swiss Calibration Service

Accorditation No.: SCS 0108

Accredited by the Swias Accreditation Service (SAS) The Swias Accreditation Service is one of the signationes to the EA Weithingent Agreement for the recognition of calibration certificates

Glossary:

Glossary;	
TSL	bssue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end
 of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed
 point exactly below the center marking of the flat phantom section, with the arms oriented
 parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole
 positioned under the liquid filled phantom. The impedance stated is transformed from the
 measurement at the SMA connector to the feed point. The Return Loss ensures low
 reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No D1750V2-1008 Aug17

Page 2 of E

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 🛛 No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

f (886-2) 2298-0488



Measurement Conditions

DASY system configuration, as fa	as not given on page 1
----------------------------------	------------------------

DASY Version	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phaniem	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1750 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.1	1.37 mbolm
Measured Head TSL parameters	(22.0 ± 0.2) °C	39.1±6%	1.35 mha/m ± 8 %
Head TSL temperature change during test	< 0.5 °C		-

SAR result with Head TSL

SAR averaged over 1 cm ² (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	8.98 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	36.0 Wikg ± 17.0 % (k=2)
SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR averaged over 19 cm ³ (19 g) of Head TSL SAR measured	condition 250 mW input power	4.75 W/kg

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53,4	7.49 mha/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	53.9±6%	1.47 m/m/m ± 8 %
Body TSL temperature change during test	< 0,5 °C	_	-

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.09 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	36.7 W/kg ± 17.0 % (k=2)
SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR averaged over 10 cm ² (10 g) of Body TSL SAR measured	condition 250 mW input power	4.67 W/kg

Certificate No: D1750V2-1008_Aug17

t (886-2) 2299-3279

Page 3 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

台灣檢驗科技股份有限公司

```
www.tw.sgs.com
```



Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	49.912-0.4 (12
Return Loss	- 48.7 dB

Antenna Parameters with Body TSL

impedance, transformed to feed point	46.5 Ω - 1.4 jΩ
Return Loss	- 27.6 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.221 ns

After long lemn use will 100W radiated power, only a slight warming of the cipble near the feedpoint can be measured.

The dipole is made of standard semingid cosolal cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Stantard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	February 11, 2009

Certificate No: 01750V2-1008_Aug17

t (886-2) 2299-3279

Paga 4 of E

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

f (886-2) 2298-0488

www.tw.sgs.com



Date: 21.08.2017

DASY5 Validation Report for Head TSL

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1750 MHz; Type: D1750V2: Serial: D1750V2 - SN:1008

Communication System: UID 0 - CW; Frequency: 1750 MHz Medium parameters used: f = 1750 MHz; σ = 1.35 S/m; ε_r = 39.1; ϕ = 1000 kg/m³ Phantom section: Flat Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 SN7349; ConvF(8.73, 8.73, 8.73); Calibrated 31.05.2017;
- · Sensor-Surface: L4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001.
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

```
Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:
Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 104.0 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 16.8 W/kg
SAR(1 g) = 8.98 W/kg; SAR(10 g) = 4.75 W/kg
Maximum value of SAR (measured) = 13.7 W/kg
```

T

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

f (886-2) 2298-0488

```
www.tw.sgs.com
```



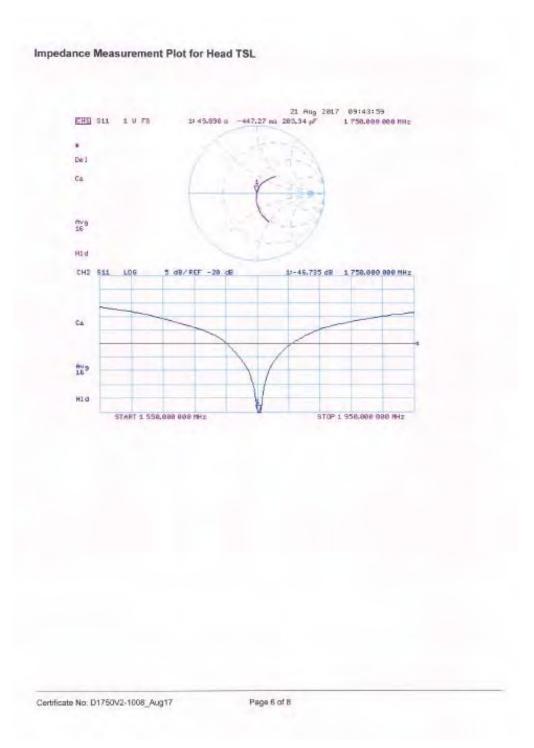

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279

prosecuted to the fullest extent of the law.

f (886-2) 2298-0488



Date: 18.08.2017

DASY5 Validation Report for Body TSL

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN:1008

Communication System: UID 0 - CW; Frequency: 1750 MHz Medium parameters used: f = 1750 MHz; $\alpha = 1.47$ S/m; $e_r = 53.9$; p = 1000 kg/m³ Phantom section: Flat Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 SN7349; ConvF(8.46, 8.46, 8.46); Calibrated: 31.05,2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated; 28.03.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52 10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 99.85 V/m; Power Drift = -0.00 dB Peak SAR (extrapolated) = 15.8 W/kg SAR(1 g) = 9.09 W/kg; SAR(10 g) = 4.87 W/kg Maximum value of SAR (measured) = 13.3 W/kg



Certificate No: D1750V2-1008_Aug17

Page 7 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279


f (886-2) 2298-0488

```
www.tw.sgs.com
```



Report No. : E5/2018/30007 Page : 171 of 202

Impedance Measurement Plot for Body TSL

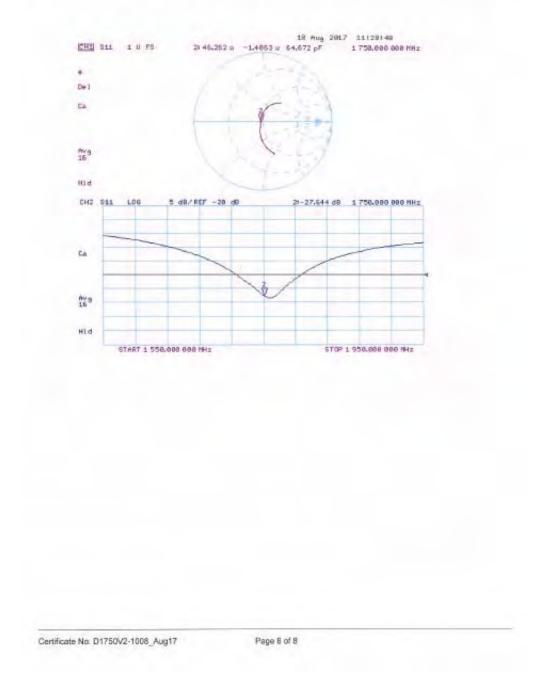

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279

f (886-2) 2298-0488

www.tw.sgs.com



Report No. : E5/2018/30007 Page : 172 of 202

Calibration Laboratory of Schwolzerischer Kalibrierdie s Schmid & Partner Service suisse d'étalonnage C ac-MR/ Servizio evizzero di toratura Engineering AG S Swiss Calibration Service Zaughausstrasse 43, 8004 Zurich, Switzenand Accreditation No. SCS 0108 Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA. Multilateral Agreement for the recognition of calibration certificates Certificate No: D1900V2-5d173_May17 SGS-TW (Auden) CALIBRATION CERTIFICATE D1900V2 SN:5d173 Object QA CAL-05.V9 Calibration procedure(s) Calibration procedure for dipole validation kits above 700 MHz May 31, 2017 Calibration date;

This calibration certificate occuments the traceability to restorial stendards, which realize the physical units of measurements (SI). This measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate

All cellorations have been conducted in the closed laboratory lacitly: anvironment temperature (22 ± 3)°C and humidity = 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	10 #	Cal Data (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NEP-Z91	SN: 100244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRR-291	SN: 103245	(H-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuekir	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02529)	Apr-10
Reference Probe EX3DV4	SN-7460	19-May-17 (No. EX3-7460_May17)	May-18
DAE4	SN: 601	28-Mar 17 (No. DAE4-601_Mar17)	Man 18
Secondary Standards	1 ID H	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-16
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN. MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SNJ 100972	15-Jun-15 (in house check Cot-16)	In house check: Oct-18
Notwork Analyzer HP 8753E	SN. US37390585	18-Det-01 (in house check Oct-16)	In house check: Oct-17
	Name	Punction	Signature
Calibrated by:	.jejcu Kastrati	Laboradory Technician	7-10
	Ralje Pokowo	Technical Manager	1 mar

Certificate No: D1900V2-5d173_May17

Page 1 of I

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

f (886-2) 2298-0488



Report No. : E5/2018/30007 Page : 173 of 202

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizenscher Kallbriertlin Service suisse dietatonnage Servizio aviazoro di Laratu/a S Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accredition Service (SAS) The Swiss Accreditation Service is one of the eigenitories to the EA Multimiteral Agreement for the recognition of cellomition pertificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005.
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end
 of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The Impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point.
- No uncertainty required.
- · SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Compose No: D1900V2-5d173_May17

t (886-2) 2299-3279

Page 2 all B

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

f (886-2) 2298-0488



Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY5	V52,10,0
Advanced Extrapolation	
Modular Flat Phanlom	
10 mm	with Spacer
dx, dy, dz =5 mm	
1900 MH2 ± 1 MH2	
	Advanced Extrapolation Modular Flat Phantom 10 mm dx. dy, dz =5 mm

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22,0 °C	40.0	1.40 mha/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	413≠6%	1.40 mho/m ±.6 %
Head TSL temperature change during test	< 0.5 °C	- Dente	

SAR result with Head TSL

SAR averaged over 1 cm ² (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	10.1 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	40.7 W/kg ± 17.0 % (k=2)

SAR everaged over 10 cm ² (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.26 W/kg
SAR for nominal Head TSL parameters	WI of begilarmon	21.1 W/kg ± 16.5 % (k=2)

Body TSL parameters

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	54,2±6%	1.51 mhaim ± 6 %
Body TSL temperature change during test	<0.5°C		-

SAR result with Body TSL

SAR averaged over 1 cm ² (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.96 W/kg
SAR for nominal Body TSL parameters	nonmalized to 1W	40.2 W/kg ± 17.0 % (k=2)
SAR averaged over 10 cm ² (10 g) of Body TSL	condition	
SAR averaged over 10 cm ² (10 g) of Body TSL SAR measured	condition 250 mW input power	5,30 W/kg

Certificate No: D1900V2-5d173_May17

t (886-2) 2299-3279

Page 3 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號



Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to food point	51.3 Ω + 4.9 jΩ
Return Loss	- 26.1 dB

Antenna Parameters with Body TSL

Impedance, transformed to fond point	47,5 Ω + 6,0 jΩ
Return Loss	- 23.5 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.199 ns
And an and a set of the set of th	11100 110

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured

The dipole is made of standard semirigid coastal cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small and caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the leedpoint may be damaged.

Additional EUT Data

Menu/actured by	SPEAG
Manufactured on	June 06, 2012

Certricate No: D1900V2-50173_May17

t (886-2) 2299-3279

Page 4 ol 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號



DASY5 Validation Report for Head TSL

Test Laboratory: SPEAG, Zurich, Switzerland

Date: 31.05.2017

the second processing a construction

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d173

Communication System: UID 0 - CW; Frequency: 1900 MHz Medium parameters used: f = 1900 MHz; σ = 1.4 S/m; ε_r = 41.3; ρ = 1000 kg/m³ Phantom section: Flat Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 SN7460; ConvF(7.98, 7.98, 7.98); Calibrated: 19.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 107.7 V/m; Power Drift = 0.03 dB Peak SAR (extrapolated) = 18.9 W/kg SAR(1 g) = 10.1 W/kg; SAR(10 g) = 5.26 W/kg Maximum value of SAR (measured) = 15.3 W/kg



Certificate No: D1900V2-50173_May17

t (886-2) 2299-3279

Page 5 of 8


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號



Impedance Measurement Plot for Head TSL

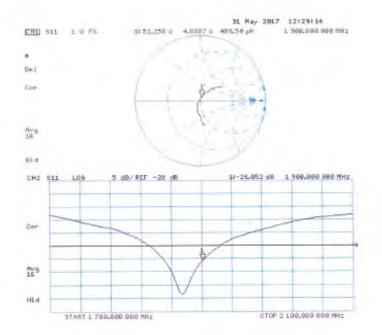

Certificate No: D1900V2-5d173_May17

Page 6 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

f (886-2) 2298-0488



DASY5 Validation Report for Body TSL

Date: 31.05.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d173

 $\begin{array}{l} \mbox{Communication System: UID 0 - CW: Frequency: 1900 MHz} \\ \mbox{Medium parameters used: } f = 1900 MHz; \ \sigma = 1.51 \ S/m; \ \epsilon_r = 54.2; \ \rho = 1000 \ kg/m^2 \\ \mbox{Phantom section: Flat Section} \\ \mbox{Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)} \\ \end{array}$

DASY52 Configuration:

- Probe: EX3DV4 SN7460; ConvF(7.82, 7.82, 7.82); Calibrated: 19.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (back); Type; QD 000 P50 AA; Serial: 1002
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 102.9 V/m; Power Drift = -0.08 dB Peak SAR (extrapolated) = (7.5 W/kg SAR(1 g) = 9.98 W/kg; SAR(10 g) = 5.3 W/kg Maximum value of SAR (measured) = 14.3 W/kg



Certificate No: D1900V2-5d173_May17

t (886-2) 2299-3279

Page 7 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號



Report No. : E5/2018/30007 Page : 179 of 202

Impedance Measurement Plot for Body TSL

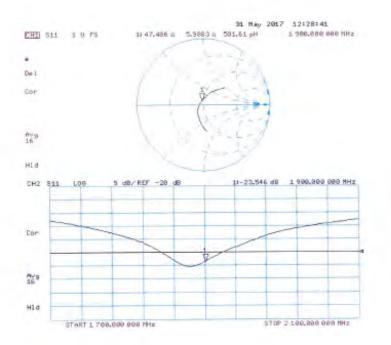

Certificate No: D1900V2-5d173_May17

Page 8 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488

www.tw.sgs.com



Report No. : E5/2018/30007 Page : 180 of 202

chmid & Partner Engineering AG ugheusstrasse 43, 0004 Zurich	y Of Switzerland		Schweizertscher Kallbrierdionsi Service suisse d'étaionnage Servizio avizzero di taratura Swiss Calibration Service
correction by the Swiss Accorditation Service July Swiss Accorditation Service July according to the re-	is one of the signatorie	s to the EA	coreclitation No.: SCS 0108
innt SGS -TW (Aude	21		D2450V2-727_Apr17
CALIBRATION C	ERTIFICATE	and the second second	
topot	D2450V2 - SN: 7	27	
Calibration procedure(s)	GA CAL-05.v9 Calibration proce	dure for dipole validation kits abo	ove 700 MHz
calibration date.	April 21, 2017		
		robability are given on the following pages at ry facility: environment temperature (22 ± 3) ³	
VI calibrations have been conduc Calibration Equipment used (MST	ded in the closed laborato	ry facility; environment temperature (22 ± 3) ¹	C and humidity < 70%.
vil calibrations have been conduc Calibration Equipment used (MST Primary Standards	and in the closed laborato	ry facility: environment temperature (22 ± 3) ⁴ Cel Date (Certificate No.)	C and frumidity < 70%. Scheduled Calibration
il calibrations have been conduc alibration Equipment used (MST rimary Standards ower meter NRIP	and in the closed laborato TE critical for calibration)	ry facility: environment temperature (22 ± 3) ⁴ Cal Data (Certificate No.) 04-Apr-17 (No. 217-02521/02522)	C and femilaty < 70%. Scheduled Calibration Apr-18
I calibrations have been conduc alibration Equipment used (MST rimary Standards ower meter NRP ower sensor NRP-291	and in the closed laboration)	ry facility: environment temperature (22 ± 3)* Cal Data (Certificate No.) 04.4pr-17 (No. 217-02521/02522) 04-4pr-17 (No. 217-02521)	C and flumidity < 70%. Schedulet Calibration Apr-18 Apr-18
Il calibrations have been conduc alibration Equipment used (MST many Standards over meter NEIP over meter NEIP over sensor NEIP-291 over sensor NEIP-291	and in the closed laborato TE critical for calibration)	ry facility: environment temperature (22 ± 3) ⁴ Cal Data (Certificate No.) 04-Apr-17 (No. 217-02521/02522)	C and femilaty < 70%. Schedulet Calibration Apr-18
vil calibrations have been conduc Calibration Equipment used (MST htmary Standards htmary Standards htmary Standards htmary sensor NRP-291 helivence 20 dB Attanuator	ded in the closed laborato TE critical for claimation) 10 # SN: 104778 SN: 104778 SN: 105244 SN: 105245	ry facility: environment temperature (22 ± 3) ¹ Cal Date (Certificate No.) 04-Apr-17 (No. 217-02521/02522) 04-Apr-17 (No. 217-02521) D1-Apr-17 (No. 217-02522)	C and flumicity < 70%. Schedulet Calibration Apr-18 Apr-18 Apr-18
VI calibrations have been conduc Calibration Equipment used (MST Primary Standards Power meter NEIP Power sensor NEIP-291 Parent sensor N	ded in the clased laborato TE critical for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: 5058 (20k)	ry facility: environment temperature (22 ± 3)* Cal Data (Certificate No.) 04-Apr-17 (No. 217-02521/02522) 04-Apr-17 (No. 217-02521) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02529) 31-Dec-16 (W) EX3-7349. Dec16)	C and flumidity < 70%. Scheduled Calibration Apr-18 Apr-18 Apr-18 Apr-18 Apr-18 Dec-17
VI calibrations have been conduc Calibration Equipment used (MST Primary Standards Power meter NEIP Power sensor NEIP-291 Parent sensor N	ded in the clased laborato TE calibral for calibration) ID # SN: 104778 SN: 103244 SN: 103245 SN: 103245 SN: 5058 (20k) SN: 5047.2 / 06327	Cal Date (Certificate No.) 04-Apr-17 (No. 217-02521/02522) 04-Apr-17 (No. 217-02521) 04-Apr-17 (No. 217-02521) 07-Apr-17 (No. 217-02522) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02529)	C and flumidity < 70%. Scheduled Calibration Apr-18 Apr-18 Apr-18 Apr-18 Apr-18
vil calibrations have been conduc Dationalion Equipment used (MST Innery Standards Inner meter NRP Pawer sensor NRP-291 Inner sensor NRP-291 Reference 20 dB Attanuato' Type-N mismatch combination Reference Probe EXSDW4 DAE4	ded in the clased laboration) ID # SN: 104778 SN: 103244 SN: 103245 SN: 103245 SN: 5058 (20k) SN: 5058 (20k) SN: 5047.8 / 06387 SN: 7349	ry facility: environment temperature (22 ± 3)* Cal Data (Certificate No.) 04-Apr-17 (No. 217-02521/02522) 04-Apr-17 (No. 217-02521) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02529) 31-Dec-16 (W) EX3-7349. Dec16)	C and flumidity < 70%. Scheduled Calibration Apr-18 Apr-18 Apr-18 Apr-18 Apr-18 Dec-17
il calibrations have been conduc Calibration Equipment used (MST Innery Standards Inner sensor NRP-291 Inner senso	ded in the clased laborato TE critical for calumation) 10 # SN: 104778 SN: 103244 SN: 103245 SN: 5058 (20k) SN: 5058 (20k) SN: 5054 (2108327 SN: 5054 (20k) SN: 5054 (20k) SN: 5054 (20k) SN: 5054 (20k)	cal Date (Certificate No.) O4-Apr-17 (No. 217-02521/02522) 04-Apr-17 (No. 217-02521/02522) 04-Apr-17 (No. 217-02522) 01-Apr-17 (No. 217-02522) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02529) 31-Dec-16 (No. EX3-7349, Dec16) 28-Mar-17 (No. DAE4-601, Mar17)	C and flumidity < 70%. Scheduled Calibration Apr-18 Apr-18 Apr-18 Apr-18 Apr-18 Apr-18 Dec-17 Msr-18
II calibrations have been conduct Calibration Equipment used (MST Interry Standards Interry Standards Interry Standards Interry Standards Interry Standards Fower meter EPM-442A	ded in the clased laborato TE catical for calumation) ID # SN: 104778 SN: 103244 SN: 103245 SN: 103245 SN: 103245 SN: 5058 (2014) SN: 5047.27 (06327 SN: 7346 SN: 901	Cal Date (Certificate No.) 04-Apr-17 (No. 217-02521/02522) 04-Apr-17 (No. 217-02521/02522) 04-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02529) 31-Dec-16 (No. EX3-7349, Dec16) 28-Mar-17 (No. DAE4-601, Mar 17) Check Date (in Incuse)	C and femilatity < 70%. Scheduled Calibration Apr-18 Apr-18 Apr-18 Apr-18 Apr-18 Des-17 Mar-18 Des-17 Mar-18 Scheduled Check
VI calibrations have been conduc Calibration Equipment used (MST Animary Standards Tomer meder NRP Paver sensor NRP-281 Selevences 20 dB Attanuator Yipe-N mismatch combination Selevence Probe EXSICV4 JAE4 Secondary Standards Tower melae EPM-442A Tower melae EPM-442A	ded in the clased laborato ID # SN: 104778 SN: 104778 SN: 102844 SN: 102845 SN: 102845 SN: 5058 (200) SN: 5047.2 / 08327 SN: 5041 ID # SN: GB37480704	Cal Data (Certificate No.) 04.Apr-17 (No. 217-02521/02522) 04.Apr-17 (No. 217-02521/02522) 04.Apr-17 (No. 217-02521) 04.Apr-17 (No. 217-02523) 07.Apr-17 (No. 217-02528) 07.Apr-17 (No. 217-02529) 31-Dec-16 (No. 217 02529) 31-Dec-16 (No. 217 02529) 31-Dec-1	C and femildity < 70%. Scheduled Calibration Apr-18 Apr-18 Apr-18 Apr-18 Apr-18 Apr-18 Dac-17 Msr-18 Scheduled Check In house check: Oct-18
II calibrations have been conduct Calibration Equipment used (MST Interry Standards Interry Standards	ded in the clased laborato ID # SN: 104778 SN: 10244 SN: 10244 SN: 10244 SN: 10245 SN: 5058 (20k) SN: 5058 (20k) SN: 5047.2 / 06327 SN: 6037480704 SN: 103792783 SN: 100972	ry facility: environment temperature (22 ± 3)* Cal Date (Certificate No.) 04-Apr-17 (No. 217-02521/02522) 04-Apr-17 (No. 217-02521) 04-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-0	C and flumidity < 70%. Scheduled Calibration Apr-18 Apr-18 Apr-18 Apr-18 Apr-18 De-17 Mar-18 De-17 Mar-18 Scheduled Check In house check: Oct-18 In house check: Oct-18 In house check: Oct-18 In house check: Oct-18 In house check: Oct-18
II calibrations have been conduct Calibration Equipment used (MST Interry Standards Interry Standards	det in the clased laborato ID # SN: 104778 SN: 103778 SN: 103294 SN: 103295 SN: 5058 (20k) SN: 5058 (20k) SN: 6047.8 / 063827 SN: 6041 ID # SN: 6837480704 SN: 0437082783 SN: MY41092317	Cal Date (Certificate No.) 04.4pr-17 (No. 217-02521/02522) 04.4pr-17 (No. 217-02521/02522) 04.4pr-17 (No. 217-02521) 01-4pr-17 (No. 217-02522) 07.4pr-17 (No. 217-02528) 07.4pr-17 (No. 217-02528) 07.4pr-1	C and fumilitity < 70%. Scheduled Calibration Apr-18 Apr-18 Apr-18 Apr-18 Apr-18 Apr-18 Dec-17 Msr-18 Scheduled Check In house check: Oct-18 In house check: Oct-18 In house check: Oct-18
VI calibrations have been conduc Calibration Equipment used (MST Primary Standards Power meter NEIP Power sensor NEP-291 Power sensor NEP-291 Reference 20 dB Attiseualor Pype-N mismatch combination Reference 20 dB Attiseualor Pyper Sensor HP Mattise Pyper Sensor HP Mattise Attiseualor PAS SIMT-06	ded in the clased laborato ID # SN: 104778 SN: 10244 SN: 10244 SN: 10244 SN: 10245 SN: 5058 (20k) SN: 5058 (20k) SN: 5047.2 / 06327 SN: 6037480704 SN: 103792783 SN: 100972	ry facility: environment temperature (22 ± 3)* Cal Date (Certificate No.) 04-Apr-17 (No. 217-02521/02522) 04-Apr-17 (No. 217-02521) 04-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-0	C and flumidity < 70%. Scheduled Calibration Apr-18 Apr-18 Apr-18 Apr-18 Apr-18 De-17 Mar-18 De-17 Mar-18 Scheduled Check In house check: Oct-18 In house check: Oct-18 In house check: Oct-18 In house check: Oct-18 In house check: Oct-18
M calibrations have been conduc Calibration Equipment used (MST Primary Standards Pawer sensor NRP-251 Pawer sensor NRP-251 Pawer sensor NRP-251 Pawer sensor NRP-251 Pawer sensor NRP-251 Pakerence 20 d5 Attanuator Type-N mismisch combination Pacteringo Probe EX30V4 0AE4 Secondary Standards Power sensor HP 9481A Power sensor HP 9481A	in the clased laboration ID # SN: 104778 SN: 104778 SN: 102244 SN: 103245 SN: 5058 (20k) SN: 5058 (20k) SN: 5047, 27 08327 SN: 5047, 244 SN: 5047, 27 08327 SN: 5047, 27 08327 SN: 601 ID # SN: 037290783 SN: 1037292783 SN: 1037280586 SN: 1037280586	Cal Date (Certificate Na.) 04.Apr-17 (Na. 217.02521/02522) 04-Apr-17 (Na. 217.02521/02522) 04-Apr-17 (Na. 217.02521) 01-Apr-17 (Na. 217.02522) 07-Apr-17 (Na. 217.02522) 07-Apr-17 (Na. 217.02523) 07-Apr-17 (Na. 217.02523) 07-Apr-18 (n house check Oct-16) 15-Jun-15 (n house check Oct-16) 19-Oct-01 (n house check Oct-16)	C and fumicity < 70%. Scheduled Calibration Apr-18 Apr-18 Apr-18 Apr-18 Apr-18 Dec-17 Msr-18 Scheduled Check In house check: Oct-18 In house check: Oct-17
VI calibrations have been conduc Calibration Equipment used (MST Primary Standards Power meter NRP Power sensor NRP-281 Reference 20 dB Attionutor Type-N mismatch combination Reference 20 dB Attionutor (secondary Standards Power sensor NP 8481A Power sensor HP 848	ded in the clased laborato ID # SN: 104778 SN: 102778 SN: 102244 SN: 103245 SN: 5058 (20k) SN: 5058 (20k) SN: 6047.8 / 063827 SN: 6047.8 / 063827 SN: 6047.8 / 063827 SN: 6047 SN: 601 ID # SN: 6837480704 SN: 100972 SN: 100972 SN: 100972 SN: 10339380585 Name	Cal Date (Certificate No.) 04-Apr-17 (No. 217-02521/02522) 04-Apr-17 (No. 217-02521/02522) 04-Apr-17 (No. 217-02521) 01-Apr-17 (No. 217-02522) 07-Apr-17 (No. 217-0252) 07-Apr-17 (No. 217-0252) 07-Apr	C and fumilatly < 70%. Scheduled Calibration Apr-18 Apr-18 Apr-18 Apr-18 Apr-18 Dec-17 Msr-18 Scheduled Check In house check: Oct-18 In house check: Oct-17
	ted in the clased laboration TE critical for calibration) ID # SN: 104778 SN: 103245 SN: 5058 (20k) SN: 5058 (20k) SN: 5057, 27 06327 SN: 5058 (20k) SN: 5047, 27 06327 SN: 5058 (20k) SN: 5047, 27 06327 SN: 50572 SN: 0037292783 SN: 100972 SN: 100373980585	Cal Data (Certificate No.) 04-Apr-17 (No. 217-02521/02522) 04-Apr-17 (No. 217-02521/02522) 04-Apr-17 (No. 217-02522) 07-Apr-17 (No. 217-02522) 07-Apr-17 (No. 217-02522) 07-Apr-17 (No. 217-02529) 07-Apr-17 (No. 217-02529) 07-Apr-17 (No. 217-02529) 07-Apr-17 (No. 217-02529) 07-Apr-17 (No. 217-02529) 07-Apr-17 (No. 217-02529) 07-Apr-17 (No. 217-02529) 07-Apr-16 (No. 217-02529) 07-Apr-16 (No. 217-02529) 07-Apr-17 (No. 217-02529) 07-Apr-16 (No. 217-02529) 07-Apr-17 (No. 217-02529) 07-Apr-16 (No. 217-02529) 07-Apr-17 (No. 217-02529) 07-Apr-16 (No. 217-02529) 07-Apr-17 (No. 217-02529) 07-Apr-16 (No. 217-02529) 07-Apr-17 (No. 217-02529) 07-Apr-16 (No. 217-02529) 07-Apr-16 (No. 217-02529) 07-Apr-16 (No. 217-02529) 07-Apr-16 (No. 217-02529) 07-Apr-16 (No. 217-02529) 07-Apr-17 (No. 217-02529) 07-Apr-17 (No. 217-02529) 07-Apr-17 (No. 217-02529) 07-Apr-16 (No. 217-02529) 07-Apr-16 (No. 217-02529) 07-Apr-16 (No. 217-02529) 07-Apr-16 (No. 217-02529) 07-Apr-16 (No. 217-02529) 07-Apr-17 (No. 217-02529) 07-Apr-17 (No. 217-02529) 07-Apr-17 (No. 217-02529) 07-Apr-1	C and frumidity < Y9%. Scheduled Calibration Apr-18 Apr-18 Apr-18 Apr-18 Apr-18 Dec-17 Msr-18 Scheduled Check In house check: Oct-18 In house check: Oct-18

Certificate No: D2450V2-727_Apr17

t (886-2) 2299-3279

Page 1 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

f (886-2) 2298-0488



Calibration Laboratory of Schmid & Partner Engineering AG Zeughaussinase 43, 0004 Zurich, Switzerined



S Service C Service S Service

Schweizertscher Koltmerdiend Service suisse d'étalennage Servicie suiszere di tarature Swinn Celibenkien Service

Accreditation No.: SCS 01.08

Accession by the Sense Acceedition Senses (SAS) The Sense Acceeditation Sension is one of the eigenstonies to the EA

Mutiliateral Agreement for the recognition of calibration certificates

	H I 1	
121		

Cor

N/A

	tissue simulating liquid
NVF	sensitivity in TSL / NORM x,y,z
· ·	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)⁴, March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed
 point exactly below the center marking of the flat phantom section, with the arms oriented
 parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole
 positioned under the liquid filled phantom. The impedance stated is transformed from the
 measurement at the SMA connector to the feed point. The Return Loss ensures low
 reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: D2450V2-727 April?

t (886-2) 2299-3279

Page 2 cl E

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號



Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	37.7 ± 6 %	1.87 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C		

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.4 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	52.2 W/kg ± 17.0 % (k=2)
SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR averaged over 10 cm ³ (10 g) of Head TSL SAR measured	condition 250 mW input power	6.18 W/kg

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mbo/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	$52.5 \pm 6 \%$	2.03 mha/m ± 6 %
Body TSL temperature change during test	< 0.5 °C		

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	12.9 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	50.6 W/kg ± 17.0 % (k=2)
SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR averaged over 10 cm ³ (10 g) of Body TSL SAR measured	condition 250 mW input power	6.01 W/kg

Certificate No: D2450V2-727_Apr17

t (886-2) 2299-3279

Page 3 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

台灣檢驗科技股份有限公司

```
www.tw.sas.com
```



Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	56.3 Ω + 2.1 jΩ
Return Loss	- 24.0 dB

Antenna Parameters with Body TSL

impedance, transformed to feed point	51.1 Ω + 4.1 jΩ
Return Loss	- 27.5 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.148 ns

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	January 09, 2003

Certificate No: D2450V2-727_Apr17

t (886-2) 2299-3279

Page 4 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

f (886-2) 2298-0488



DASY5 Validation Report for Head TSL

Date: 21.04.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 727


Communication System: UID 0 - CW; Frequency: 2450 MHz Medium parameters used: f = 2450 MHz; σ = 1.87 S/m; ϵ_r = 37.7; p = 1000 kg/m³ Phantom section: Flat Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 SN7349; ConvF(7.72, 7.72, 7.72); Calibrated: 31.12.2016;
- · Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- · Phantom: Flat Phantom 5.0 (front): Type: QD 000 P50 AA: Serial: 1001
- DASY52 52,10.0(1442); SEMCAD X 14.6.10(7413)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 109.8 V/m; Power Drift = -0.06 dB Peak SAR (extrapolated) = 27.3 W/kg SAR(1 g) = 13.4 W/kg; SAR(10 g) = 6.18 W/kg Maximum value of SAR (measured) = 21.1 W/kg

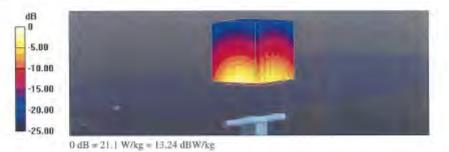

Certificate No: D2450V2-727_Apr17

t (886-2) 2299-3279

Page 5 of 8


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號



Impedance Measurement Plot for Head TSL

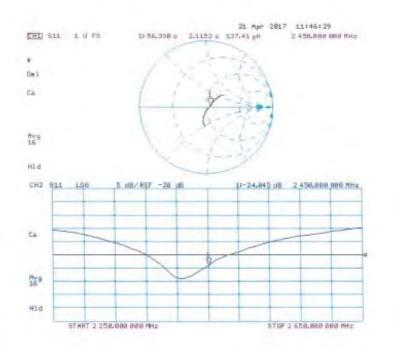

Cartilicate No: D2450V2-727_Apr17

t (886-2) 2299-3279

Page 6 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

f (886-2) 2298-0488



Date: 21.04.2017

DASY5 Validation Report for Body TSL

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 727

Communication System: UID 0 - CW; Frequency: 2450 MHz Medium parameters used: f = 2450 MHz; $\sigma = 2.03 \text{ S/m}$; $\epsilon_i = 52.5$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 SN7349; ConvF(7.79, 7.79, 7.79); Calibrated: 31.12,2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.0(1442); SEMCAD X 14.6.10(7413)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 105.0 V/m; Power Drift = -0.01 dB Peak SAR (extrapolated) = 25.4 W/kg SAR(1 g) = 12.9 W/kg; SAR(10 g) = 6.01 W/kg Maximum value of SAR (measured) = 20.0 W/kg



0 dB = 20.0 W/kg = 13.01 dBW/kg

Certificate No: D2450V2-727_Apr17

t (886-2) 2299-3279

Page 7 of 8


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.



Impedance Measurement Plot for Body TSL

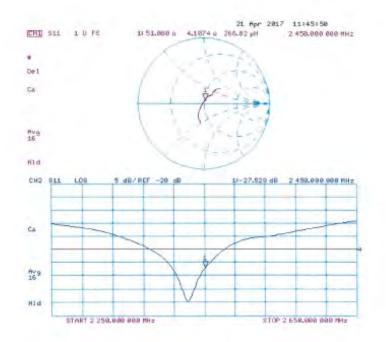

Certificate No: D2450V2-727_Apr17

t (886-2) 2299-3279

Page 8 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

f (886-2) 2298-0488

www.tw.sgs.com

Member of SGS Group



Report No. : E5/2018/30007 Page : 188 of 202

corected by the Swiss Accredit he Swiss Accreditation Servic ultilateral Agreement for the	e is one of the signatories	s to the EA	creditation No.: SCS 0108
tient SGS-TW (Aud	en)	Certificate No	D5GHzV2-1023_Jan18
CALIBRATION	CERTIFICATE		
	Destroya shu	600	
Object	D5GHzV2 - SN:1	023	
Celibration procedure(s)	QA CAL-22.v2 Calibration proce	dure for dipole validation kits bet	ween 3-6 GHz
Calibration date:	January 25, 2018	3	
All calibrations have been cond	artaintias with confidence p ucted in the closed laborato	ional standards, which realize the physical un robability are given on the following pieges an ry facility, environment temperature (22 ± 3) ⁴	ere pert of the certificate
All calibrations have been cond Calibration Equipment used (Mi	etteintikes with confidence p ucted in the closed laborato ATE entical for calibration(10 #	inobability are given on the following pages an ry facility, environment temperature (22 ± 3)*1 Call Date (Certificate No.)	id and part of the certificate 5 and formidity < 70%. Scheduled Calibration
Ali calibrations have been condi Calibration Equipment used (Mr Primery Standards Power maler NRP	eiteintikes with confidence p ucted in the closed laborato ATE critical for calibration) ID # EN: 104778	inobability are given on the following pages at ry facsity, environment temperature (22 ± 3)*1 Cal Date (Certificate No.) 04-Apr-17 (No. 217-02521/02522)	d and purt of the certificate G and trumkity < 70%. Scheduled Calibration Apr-18
All calibrations have been cond Galibration Equipment used (Mi Primery Standards Power meter NRP Power sensor NRP-291	ettaintikes with confidence p ucted in the closed laborato ATE critical for calibration(1D # EN: 104778 SN: 103244	exclusibility are given on the following pages an ey facsity, environment temperature (22 ± 3)*1 Cal Date (Certificate No.) 04-Apr-17 (No. 217-02521(02522) 04-Apr-17 (No. 217-02521)	d ore pert of the certificate C and trumcity < 70%. Scheduled Calibration Apr-18 Apr-18
All collomitions have been cond Calibration Equipment used (Mi Primery Standards Power rester NRP Power sensor NRP-291 Power sensor NRP-291	artaintikas with confidence p acted in the closed laborato kTE ontical for calibration(1D a BN: 104778 BN: 103244 SN: 103245	Induability are given on the following pages an ry (actiny, environment temperature (22 ± 3)*1 Cal Date (Certificate No.) 04-Apr-17 (No. 217-02521(02522) 04-Apr-17 (No. 217-02521) 04-Apr-17 (No. 217-02522)	d and part of the certificate C and humidity < 70%. Scheduled Calibration Apr-18 Apr-18 Apr-18 Apr-18
All collorations have been cond Calibration Equipment used (Mo Primery Standards Power meter NRP Power sensor NRP-291 Power sensor NRP-291 Reference 20 dB Alternation	ettaintikes with confidence p acted in the closed laboration ATE entical for calibration ID a EN: 104778 SN: 103244 SN: 103245 SN: 5058 (20k)	Indeability are given on the following pages an inv facility, environment temperature (22 ± 3)*1 Cal Date (Certificate No.) 04-Apr-17 (No. 217-02521)(02522) 04-Apr-17 (No. 217-02521) 04-Apr-17 (No. 217-02522) 07-Apr-17 (No. 217-02528)	d and part of the certificate 5 and trumidity < 70%. Scheduled Calibration Apr-18 Apr-18 Apr-18 Apr-18
All calibrations have been condi- Calibration Equipment used (Mi Primery Standards Power meter NRP Power sensor NRP-291 Power sensor NRP-291 Rolatonco 20 dB Alternation Type-N mismatch combination	enteintiles with confidence p ucted in the closed laboratio ATE entical for cellbration(ID # BN: 104778 BN: 103344 SN: 103245 SN: 5058 (20k) SN: 5047 2 / 06327	Induability are given on the following pages an ry (ac3hy, environment temperature (22 ± 3)*1 Cal Date (Certificate No.) D4-Apr-17 (No. 217-02521(02522) D4-Apr-17 (No. 217-02521) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02528)	st ere pert of the certificate 5 and trumidity < 70%. <u>Scheduled Calibration</u> Apr-18 Apr-18 Apr-18 Apr-18 Apr-18 Apr-18
Ali calibrations have been cond Calibration Equipment used (M/ Primery Standards Power meter NRP Power sensor NRP-291 Power sensor NRP-291 Reference 20 dB Attenuator Type-N mismatch combination Reference Probe EX3DV4	ettaintikes with confidence p acted in the closed laboration ATE entical for calibration ID a EN: 104778 SN: 103244 SN: 103245 SN: 5058 (20k)	Indeability are given on the following pages an inv facility, environment temperature (22 ± 3)*1 Cal Date (Certificate No.) 04-Apr-17 (No. 217-02521)(02522) 04-Apr-17 (No. 217-02521) 04-Apr-17 (No. 217-02522) 07-Apr-17 (No. 217-02528)	d and part of the certificate 5 and trumidity < 70%. Scheduled Calibration Apr-18 Apr-18 Apr-18 Apr-18
Ali calibrations have been cond Galibration Equipment used (Mi Primary Standards Power relief NRP Power sensor NRP-291 Reference 20 dB Attenuator Type-N mismatch combination Reference Probe EX3DV4 DAE4	enteintiles with confidence p acted in the closed laboration TE entitical for calibration) EN: 104778 EN: 103245 EN: 10325 EN: 10355 EN: 103555 EN: 103555 EN: 103555 EN: 1035555 EN: 1035555 EN: 10355555 EN: 103555555555555555555555555555555555555	Induability are given on the following pages at ry (acting, environment temperature (22 ± 3)*1 Cal Date (Certificate No.) 04-Apr-17 (No. 217-02521/02522) 04-Apr-17 (No. 217-02521) 04-Apr-17 (No. 217-02522) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02528) 30-Dec-17 (No. 217-02529) 30-Dec-17 (No. 217-02529)	d and part of the certificate C and humidity < 70%. Echeduled Calibration Apr-18 Apr-18 Apr-18 Apr-18 Apr-18 Apr-18 Apr-18 Dec-18 Dec-18
All collorations have been cond Galibration Equipment used (Mi Primary Standards Power meller NRP Power sensor NRP-291 Reference 20 dB Attenuator Type-N mismatch combination Reference Probe EX3DV4 D/NE4	artaintiles with confidence p acted in the closed laborato ATE critical for calibration(EN: 104778 SN: 103244 SN: 103244 SN: 5058 (20k) SN: 5058 (20k) SN: 5057 2 / 06327 SN: 3505 SN: 601	Induability are given on the following pages an ey (actify, environment temperature (22 ± 3)*1 Cal Date (Certificate No.) 04-Apr-17 (No. 217-02521(02522) 04-Apr-17 (No. 217-02521) 04-Apr-17 (No. 217-02522) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02529) 30-Dec-17 (No. 217-02529) 26-Oct-17 (No. 217-02529)	It and part of the certificate C and humidity < 70%. Bicheduled Calibration Apr-18 Apr-18 Apr-18 Apr-18 Apr-18 Dec-18 Dec-18 Cicl-18
All collorations have been cond Galibration Equipment used (Mi Primary Standards Primer meter NRP Power sensor NRP-291 Reference 20 dB Alternation Type-N mismatch combination Reference Probe EX3DV4 DNE4 Secondary Standards	enteintiles with confidence p acted in the closed liaborato VTE enticel for cellshaften) ID # IBN: 104778 SN: 104778 SN: 103246 SN: 5058 (20k) SN: 5047 2 / 06327 SN: 5047 2 / 06327	Induability are given on the following pages an ry (actiny, environment temperature (22 ± 3)*1 Cal Date (Certificate No.) 04-Apr-17 (No. 217-02521/02522) 04-Apr-17 (No. 217-02521) 04-Apr-17 (No. 217-02522) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02528) 30-Dec-17 (No. 217-02588) 30-Dec-17 (No. 217-02588)	It are pert of the certificate E and trumidity < 70%. Echeduled Calibration Apr-18 Apr-18 Apr-18 Apr-18 Apr-18 Dec-18 Dec-18 Ccl-18 Scheduled Check In house check: Oct-18 In house check: Oct-18
All calibrations have been condi- Calibration Equipment used (M/ Primer mater NRP Power mater NRP 201 Power cansor NRP 201 Power cansor NRP 201 Reference 20 dB Attenuation Type-N mismatch combination Reference Probe EX3DV4 DAE4 Secondary Standards Power mater EPM-442A	enteintiles with confidence p acted in the closed laboratio ATE entical for calibration) EN: 104778 EN: 103244 EN: 103244 EN: 103244 EN: 5058 (20k) EN: 5058 (20k) EN: 5058 (20k) EN: 5057 2 / 06327 EN: 5057 2 / 0527 EN: 5057 2 / 05	Indeability are given on the following pages at ry (actiny, environment temperature (22 ± 3)*1 Cal Date (Certificate Na.) D4-Apr-17 (No. 217-02521(02522) D4-Apr-17 (No. 217-02521) D4-Apr-17 (No. 217-02528) D7-Apr-17 (No. 217-02528) D7-Apr-18 (No. 217-0258) D7-Apr-19	Id and part of the certificate C and humidity < 70%. Echeduled Calibration Apr-18 Apr-18 Apr-18 Apr-18 Dec-18 Dec-18 Dec-18 Cct-18 Scheduled Check In house check: Oct-18 In house check: Oct-18 In house check: Oct-18
All collorations have been cond Galibration Equipment used (Mi Primery Standards Power realer NRP Power consor NRP-291 Reference 20 dB Attenuator Type-N mismatch combination Reference Probe EX3DV4 DAE4 Secondary Standards Power sensor HP 6461A Power sensor HP 6461A RF generator R&S SMT-06	etteintikes with confidence p acted in the closed laboration ID a EN: 104778 SN: 103245 SN: 5058 (20k) SN: 5058	acbability are given on the following pages anti- ry facility, environment temperature (22 ± 3)*1 Gal Date (Certificate No.) 04-Apr-17 (No. 217-02521)(02522) 04-Apr-17 (No. 217-02521) 04-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02528) 07-Opt-15 (in house) 07-Opt-15 (in house check Opt-16) 07-Opt-15 (in house check Opt-16) 07-Opt-15 (in house check Opt-16) 15-Jun-15 (in house check Opt-16)	It and part of the certificate E and humidity < 70%. Bioheduled Calibration Apr-18 Apr-18 Apr-18 Apr-18 Apr-18 Apr-18 Col-18 Dec-18 Col-18 Scheduled Check In house check: Oct-18 In house check: Oct-18 In house check: Oct-18 In house check: Oct-18
Ali csilbrations have been condi Calibration Equipment used (Mi Primery Standards Power renter NRP Power sensor NRP-291 Power sensor NRP-291 Reference 20 dB Alternation Type-N mismatch combination Reference Probe EX3DV4 DAE4 Secondary Standards Power meter EPM-442A Power sensor HP 6461A	enteintiles with confidence p acted in the closed laboratio ATE entical for calibration) EN: 104778 EN: 103244 EN: 103244 EN: 103244 EN: 5058 (20k) EN: 5058 (20k) EN: 5058 (20k) EN: 5057 2 / 06327 EN: 5057 2 / 0527 EN: 5057 2 / 05	Indeability are given on the following pages at ry (actiny, environment temperature (22 ± 3)*1 Cal Date (Certificate Na.) D4-Apr-17 (No. 217-02521(02522) D4-Apr-17 (No. 217-02521) D4-Apr-17 (No. 217-02528) D7-Apr-17 (No. 217-02528) D7-Apr-18 (No. 217-0258) D7-Apr-19	Id and part of the certificate C and humidity < 70%. Echeduled Calibration Apr-18 Apr-18 Apr-18 Apr-18 Dec-18 Dec-18 Dec-18 Cct-18 Scheduled Check In house check: Oct-18 In house check: Oct-18 In house check: Oct-18
All calibrations have been condi Calibration Equipment used (Mr Primary Standards Power meter NRP Power sensor NRP-201 Power sensor NRP-201 Retenence 20 dB Attenuator Type-N mismatch combination Reference Probe EX3DV4 DAE4 Secondary Standards Power sensor HP 6461A Priver sensor HP 6461A AF generator R&S SMT-06 Network Analyzer HP 8753E	enteintiles with confidence p ucted in the closed laboration TD # EN: 104778 EN: 103245 SN: 504724 SN: 5058 (20k) SN: 50472 / 06327 SN: 50472 / 0647	Indeability are given on the following pages an ry (actiny, environment temperature (22 ± 3)*1 Cal Date (Certificate No.) 04-Apr-17 (No. 217-02521/02522) 04-Apr-17 (No. 217-02521) 04-Apr-17 (No. 217-02521) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02528) 00-Dec-17 (No. 217-02528) 00-Dec-17 (No. 217-02529) 00-Dec-17 (No. 217-02529)	It and part of the certificate E and humidity < 70%. Bioheduled Calibration Apr-18 Apr-18 Apr-18 Apr-18 Apr-18 Apr-18 Col-18 Dec-18 Col-18 Scheduled Check In house check: Oct-18 In house check: Oct-18 In house check: Oct-18 In house check: Oct-18
All calibrations have been cond Galibration Equipment used (Mi Primary Standards Power sensor NRP-291 Power sensor NRP-291 Reteamore 20 dB Attenuator Type-N mismatch combination Reteamore Probe EX3DV4 DAE4 Secondary Standards Power motor EPM-442A Power sensor HP 6461A AF generator R&S SMT-06	enteintikes with confidence p ucted in the closed laboration ATE entical for cellbration EN: 104778 EN: 103245 EN: 103245 EN: 5058 (206) SN: 5047 2 / 06327 SN: 00572 SN: 100572 SN: 100572 SN: 100572	Instability are given on the following pages at ry facility, environment temperature (22 ± 3/1) Cal Date (Certificate No.) D4-Apr-17 (No. 217-02521)(02522) D4-Apr-17 (No. 217-02521) D4-Apr-17 (No. 217-02521) D7-Apr-17 (No. 217-02529) 07-Apr-17 (No. 217-02529) 09-Dec-17 (No. 217-02529) 09-Dec-15 (in house check Cd-16) 09-Och-15 (in house check Cd-16) 19-Och-10 (in house check Cd-17)	It and part of the certificate E and trumidity < 70%. Scheduled Calibration Apr-18 Apr-18 Apr-18 Apr-18 Apr-18 Dec-18 Dec-18 Ccl-18 Scheduled Check In house check: Oct-18 In house check: Oct-18
All calibrations have been condi Calibration Equipment used (Mr Primary Standards Power restar NRP Power sensor NRP-201 Power sensor NRP-201 Retenance 20 dB Attenuator Type-N mismatch combination Reference Probe EX3DV4 DAE4 Secondary Standards Power meter EPM-442A Power sensor HP 6461A AF generator R&S SMT-06 Network Analyzer HP 8753E	enteintiles with confidence p ucted in the closed laboration TD # EN: 104778 EN: 103245 SN: 504724 SN: 5058 (20k) SN: 50472 / 06327 SN: 50472 / 0647	Indeability are given on the following pages an ry (actiny, environment temperature (22 ± 3)*1 Cal Date (Certificate No.) 04-Apr-17 (No. 217-02521/02522) 04-Apr-17 (No. 217-02521) 04-Apr-17 (No. 217-02521) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02528) 00-Dec-17 (No. 217-02528) 00-Dec-17 (No. 217-02529) 00-Dec-17 (No. 217-02529)	It and part of the certificate E and trumidity < 70%. Scheduled Calibration Apr-18 Apr-18 Apr-18 Apr-18 Apr-18 Dec-18 Dec-18 Ccl-18 Scheduled Check In house check: Oct-18 In house check: Oct-18

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488



Report No. : E5/2018/30007 Page : 189 of 202

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrause 49, 8004 Zurich, Switzerland



Schweizenscher Kalibrierdienst Service suitse d'ataionnage Servizio svitzero di taratura Swiss Calibration Service

Accreditation No.: SCS 0108

S

C

S

Accessibled by the Swiss Accredition Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x.y.z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end
 of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed
 point exactly below the center marking of the flat phantom section, with the arms oriented
 parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole
 positioned under the liquid filled phantom. The impedance stated is transformed from the
 measurement at the SMA connector to the feed point. The Return Loss ensures low
 reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: D5GHzV2-1023_Jain18

Page 2 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 📗 No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Measurement Conditions

DASY system	configuration,	as far	as not	given	on page 1
-------------	----------------	--------	--------	-------	-----------

DASY Version	DASY5	V52,10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spader
Zoom Scan Resolution	dx. dy = 4.0 mm, dz = 1,4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	5200 MHz ± 1 MHz 5300 MHz ± 1 MHz 5600 MHz ± 1 MHz 5800 MHz ± 1 MHz	

Head TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22,0 °C	38.0	4.60 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	36.3 ± 6 %	4.50 mha/m ± 8 %
Head TSL temperature change during lest	<0.5 ℃	per-	-

SAR result with Head TSL at 5200 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7:72 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	77.3 W/kg = 19.9 % (k=2)
SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR averaged over 10 cm ³ (10 g) of Head TSL SAR measured	condition 100 mW input power	2.22 W/kg

Certilicate No: D5GHzV2-1023_Jan18

t (886-2) 2299-3279

Page 3 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

f (886-2) 2298-0488



Head TSL parameters at 5300 MHz

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.9	4.76 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.2 ± 6 %	4.60 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C		-

SAR result with Head TSL at 5300 MHz

SAR averaged over 1 cm ^o (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.09 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	80.9 W / kg ± 19.9 % (k=2)
SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR averaged over 10 cm ³ (10 g) of Head TSL SAR measured	condition 100 mW input power	2.32 W/Ag

Head TSL parameters at 5600 MHz

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.5	5.07 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.8 ± 6 %	4.90 mhaim ± 6 %
Head TSL temperature change during test	< 0.5 °C	-	+

SAR result with Head TSL at 5600 MHz

SAR averaged over 1 cm ² (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.19 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	81.9 W/kg ± 19.9 % (k=2)
SAR averaged over 10 cm ² (10 g) of Head TSL	condition	
SAR averaged over 10 cm ² (10 g) of Head TSL SAR measured	condition 100 mW input power	2.34 W/kg

Certilicate No: D5GHzV2-1023_Jan18

t (886-2) 2299-3279

Page 4 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

f (886-2) 2298-0488



Head TSL parameters at 5800 MHz

and the second se				
The following	naramaters :	and calculation	S WITTE	applied

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.3	5.27 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.5±6%	5.11 mho/m ± © %
Head TSL temperature change during test	< 0.5 °C	ine i	-

SAR result with Head TSL at 5800 MHz

SAR averaged over 1 cm ² (1 g) of Head TSL	Condition	
SAR measured	100 mW Input power	7.90 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	79.0 W/kg ± 19.9 % (k=2)
10 1 10 1 10 1 10 1	and the second	
SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR averaged over 10 cm ³ (10 g) of Head TSL SAR measured	condition 100 mW input power	2,25 W/kg

Centificate No: D5GHzV2-1023_Jan18

Page 5 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號



Body TSL parameters at 5200 MHz

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	49.0	5.30 mha/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	47.3±6%	5.41 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C		-

SAR result with Body TSL at 5200 MHz

SAR averaged over 1 cm ² (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.14 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	70.5 W/kg ± 19.9 % (k+2)
	and the second se	
SAR averaged over 10 cm ² (10 g) of Body TSL	condition	
SAR averaged over 10 cm ³ (10 g) of Body TSL SAR measured	condition 100 mW input power	2.00 W/kg

Body TSL parameters at 5300 MHz

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.9	5.42 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	47 1 ± 6 %	5.54 mho/m = 6 %
Body TSL temperature change during test	< 0.5 °C	-	0-0-0

SAR result with Body TSL at 5300 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW Input power	7.34 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	72.9 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ² (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.06 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.4 W/kg ± 19.5 % (k=2)

Certificate No: D5GHzV2-1023_Jan18

t (886-2) 2299-3279

Page 6 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

f (886-2) 2298-0488



Body TSL parameters at 5600 MHz

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.5	5.77 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.6±6%	5.94 mha/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	-mail	

SAR result with Body TSL at 5600 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.81 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	77.6 W/kg ± 19.9 % (k=2)
the second se		
SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR averaged over 10 cm ³ (10 g) of Body TSL SAR measured	condition 100 mW input power	2.19 W/kg

Body TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.2	6.00 mhoim
Measured Body TSL parameters	(22.0 ± 0.2) °C	48.2 ± 6 %	6.22 mhaim ± 6 %
Body TSL temperature change during test	< 0.5 °C	-	-

SAR result with Body TSL at 5800 MHz

SAR averaged over 1 cm ² (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.46 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	74.1 W/kg ± 19.9 % (k=2)
SAR averaged over 10 cm ² (10 g) of Body TSL	condition	
SAR averaged over 10 cm ² (10 g) of Body TSL SAR measured	condition 100 mW input power	2.07 W/kg

Certificate No: D5GHzV2-1023, Jan18

Page 7 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

f (886-2) 2298-0488



Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL at 5200 MHz

Impedance, transformed to feed point	50.1 Ω - 8.1 jΩ	
Return Loss	- 21.9 dB	

Antenna Parameters with Head TSL at 5300 MHz

Impedance, transformed to feed point	50.5 Ω - 2.3 jΩ
Return Loss	- 32.7 dB

Antenna Parameters with Head TSL at 5600 MHz

Impedance, transformed to feed point	53.9 Ω - 0.7 μΩ
Return Loss	- 28.4 dB

Antenna Parameters with Head TSL at 5800 MHz

Impedance, transformed to feed point	55.3 Ω + 2.6 jΩ	
Return Loss	- 25.1 dB	

Antenna Parameters with Body TSL at 5200 MHz

Impedance, transformed to feed point	49.8 Ω - 6.9 jΩ.
Return Loss	- 23.2 dB

Antenna Parameters with Body TSL at 5300 MHz

Impedance, transformed to leed point	50.9 Ω - 0.9 jΩ	
Return Loss	- 37.9 dB	

Antenna Parameters with Body TSL at 5600 MHz

Impedance, transformed to feed point	56.0 Ω + 0.5 JΩ	
Return Loss	- 24.9 dB	

Antenna Parameters with Body TSL at 5800 MHz

Impedance, transformed to leed point	56.6 Ω + 2.3 μΩ
Return Loss	- 23.7 dB

Certificate No: D5GHzV2-1023_Jan18

Page 8 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號



General Antenna Parameters and Design

	1
Electrical Delay (one direction)	1.199 ns

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	February 05, 2004

Certificate No: D5GHzV2-1023_Jan18

t (886-2) 2299-3279

Page 9 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

f (886-2) 2298-0488



DASY5 Validation Report for Head TSL

Date: 25.01.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1023

Communication System: UID 0 = CW₁ Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz, Medium parameters used: f = 5200 MHz; $\sigma = 4.5$ S/m; $z_e = 36.3$; $\rho = 1000$ kg/m³, Medium parameters used: f = 5300 MHz; $\sigma = 4.6$ S/m; $z_e = 36.2$; $\rho = 1000$ kg/m³, Medium parameters used: f = 5300 MHz; $\sigma = 4.9$ S/m; $z_e = 35.8$; $\rho = 1000$ kg/m³, Medium parameters used: f = 5800 MHz; $\sigma = 5.11$ S/m; $z_e = 35.5$; $\rho = 1000$ kg/m³ Medium parameters used: f = 5800 MHz; $\sigma = 5.11$ S/m; $z_e = 35.5$; $\rho = 1000$ kg/m³ Medium parameters used: f = 5800 MHz; $\sigma = 5.11$ S/m; $z_e = 35.5$; $\rho = 1000$ kg/m³ Medium parameters used: f = 5800 MHz; $\sigma = 5.11$ S/m; $z_e = 35.7$; $\rho = 1000$ kg/m³ Medium parameters used: f = 5800 MHz; $\sigma = 5.11$ S/m; $z_e = 35.7$; $\rho = 1000$ kg/m³ Medium parameters used: f = 5800 MHz; $\sigma = 5.11$ S/m; $z_e = 35.7$; $\rho = 1000$ kg/m³ Medium parameters used: f = 5800 MHz; $\sigma = 5.11$ S/m; $z_e = 35.7$; $\rho = 1000$ kg/m³ Medium parameters used: f = 5800 MHz; $\sigma = 5.11$ S/m; $z_e = 35.7$; $\rho = 1000$ kg/m³ Medium parameters used: f = 5800 MHz; $\sigma = 5.11$ S/m; $z_e = 35.7$; $\rho = 1000$ kg/m³ Medium parameters used: f = 5800 MHz; $\sigma = 5.11$ S/m; $z_e = 35.7$; $\rho = 1000$ kg/m³ Medium parameters used: f = 5800 MHz; $\sigma = 5.11$ S/m; $z_e = 35.7$; $\rho = 1000$ kg/m³ Medium parameters used: f = 5800 MHz; $\sigma = 5.11$ S/m; $z_e = 35.7$; $\rho = 1000$ kg/m³ Medium parameters used: f = 5800 MHz; $\sigma = 5.11$ S/m; $z_e = 35.7$; $\rho = 1000$ kg/m³ Medium parameters used: $z_e = 5000$ MHz; $\sigma = 5.11$ S/m; $z_e = 35.7$; $\rho = 1000$ kg/m³ Medium parameters used: $z_e = 5000$ MHz; $\sigma = 5.11$ S/m; $z_e = 35.7$; $\rho = 1000$ kg/m³ Medium parameters used: $z_e = 3000$ Mz; $z_e =$

DASY52 Configuration:

- Probe: EX3DV4 SN3503; ConvF(5.75, 5.75, 5.75); Calibrated: 30.12.2017, ConvF(5.5, 5.5, 5.5); Calibrated: 30.12.2017, ConvF(5.05, 5.05); Calibrated: 40.12.2017, ConvF(4.96, 4.96, 4.96), Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electromics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52,10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm Reference Value = 70.47 V/m; Power Drit] = -0.04 dB Peak SAR (extrapolated) = 27.5 W/kg SAR(1 g) = 7.72 W/kg; SAR(10 g) = 2.22 W/kg Maximum value of SAR (measured) = 17.7 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm Reference Value = 74.63 V/m; Power Drift = -0.06 dB Peak SAR (extrapolated) = 29.6 W/kg SAR(1g) = 8.09 W/kg; SAR(10 g) = 2.32 W/kg Maximum value of SAR (measured) = 18.6 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid; dx=4mm, dy=4mm, dz=1.4mm Reference Value = 70:79 V/m; Power Drift= -0.05 dB Peak SAR (extrapolated) = 31:5 W/kg SAR(1 g) = 8.19 W/kg; SAR(10 g) = 2.34 W/kg Maximum value of SAR (measured) = 19:6 W/kg

Certificate No: 05GHzV2-1023_Jan18

t (886-2) 2299-3279

Page 10 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 🛛 No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號


```
www.tw.sgs.com
```



Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm Reference Value = 69.22 V/m; Power Drift = -0.05 dB Peak SAR (extrapolated) = 31.2 W/kg SAR(1 g) = 7.9 W/kg; SAR(10 g) = 2.25 W/kg Maximum value of SAR (measured) = 19.0 W/kg

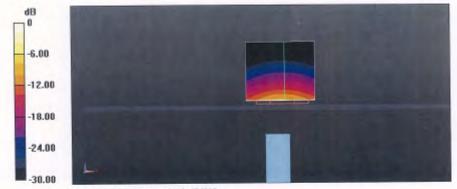

0 dB = 17.7 W/kg = 12.48 dBW/kg

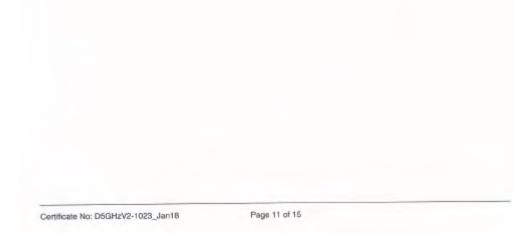

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


t (886-2) 2299-3279

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Impedance Measurement Plot for Head TSL

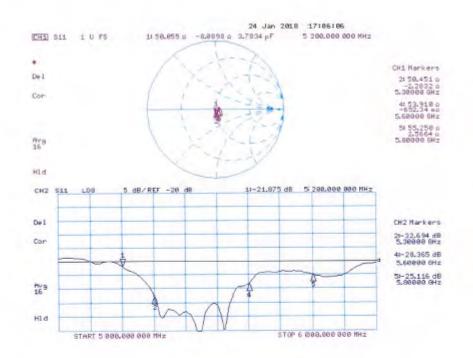

Certificate No: D5GHzV2-1023_Jan18

t (886-2) 2299-3279

Page 12 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

f (886-2) 2298-0488

www.tw.sgs.com

Member of SGS Group



DASY5 Validation Report for Body TSL

Date: 23.01.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1023

 $\begin{array}{l} \label{eq:communication System: UID 0 - CW; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz \\ \mbox{Medium parameters used: } f = 5200 MHz; \mbox{σ} = 5.41 \mbox{S/m}; \mbox{ϵ}_{e} = 47.3; \mbox{ρ} = 1000 \mbox{kg/m^3}, \\ \mbox{Medium parameters used: } f = 5200 \mbox{MHz}; \mbox{σ} = 5.54 \mbox{S/m}; \mbox{ϵ}_{e} = 47.3; \mbox{ρ} = 1000 \mbox{kg/m^3}, \\ \mbox{Medium parameters used: } f = 5300 \mbox{MHz}; \mbox{σ} = 5.54 \mbox{S/m}; \mbox{ϵ}_{e} = 47.1; \mbox{ρ} = 1000 \mbox{kg/m^3}, \\ \mbox{Medium parameters used: } f = 5600 \mbox{MHz}; \mbox{σ} = 5.94 \mbox{S/m}; \mbox{ϵ}_{e} = 46.6; \mbox{ρ} = 1000 \mbox{kg/m^3}, \\ \mbox{Medium parameters used: } f = 5800 \mbox{MHz}; \mbox{σ} = 6.22 \mbox{S/m}; \mbox{ϵ}_{e} = 46.2; \mbox{ρ} = 1000 \mbox{kg/m^3}, \\ \mbox{Medium parameters used: } f = 5800 \mbox{MHz}; \mbox{σ} = 6.22 \mbox{S/m}; \mbox{ϵ}_{e} = 46.2; \mbox{ρ} = 1000 \mbox{kg/m^3}, \\ \mbox{Medium parameters used: } f = 5800 \mbox{MHz}; \mbox{σ} = 6.22 \mbox{S/m}; \mbox{ϵ}_{e} = 46.2; \mbox{ρ} = 1000 \mbox{kg/m^3}, \\ \mbox{Medium parameters used: } f = 5800 \mbox{MHz}; \mbox{σ} = 6.22 \mbox{S/m}; \mbox{ϵ}_{e} = 46.2; \mbox{ρ} = 1000 \mbox{kg/m^3}, \\ \mbox{Medium parameters used: } f = 5800 \mbox{MHz}; \mbox{σ} = 6.22 \mbox{s}/m; \mbox{ϵ}_{e} = 46.2; \mbox{ρ} = 1000 \mbox{kg/m^3}, \\ \mbox{Medium parameters used: } f = 5800 \mbox{MHz}; \mbox{σ} = 6.22 \mbox{s}/m; \mbox{ϵ}_{e} = 46.2; \mbox{ρ} = 1000 \mbox{kg/m^3}, \\ \mbox{Medium parameters used: } f = 5800 \mbox{MHz}; \mbox{σ} = 6.22 \mbox{s}/m; \mbox{ϵ}_{e} = 1000 \mbox{kg/m^3}, \\ \mbox{Medium parameters used: } f = 5800 \mbox{MHz}; \mbox{σ} = 6.22 \mbox{s}/m; \mbox{ϵ}_{e} = 46.2; \mbox{ρ} = 1000 \mbox{kg/m^3}, \\ \mbox{Medium parameters used: } f = 5800 \mbox{MHz}; \mbox{σ} = 6.22 \mbox{ρ} = 1000 \mbox{kg/m^3}, \\ \mbox{Medium parameters used: } f = 50.0 \mbox{MHz}; \mbox{σ} = 5.0 \mbox{m} = 5.0 \mbox{MHz}; \mbo$

DASY52 Configuration:

- Probe: EX3DV4 SN3503; ConvF(5.35, 5.35, 5.35); Calibrated: 30.12.2017.
 ConvF(5.15, 5.15, 5.15); Calibrated: 30.12.2017, ConvF(4.65, 4.65, 4.65);
 Calibrated: 30.12.2017, ConvF(4.53, 4.53, 4.53); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Plantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Senal: 1002
- DASY52 52,10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Body Tissne/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=L4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm Reference Value = 66.00 V/m; Power Drift = -0.05 dB Peak SAR (extrapolated) = 26.4 W/kg SAR(1 g) = 7.14 W/kg; SAR(10 g) = 2 W/kg Maximum value of SAR (measured) = 16.8 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm Reference Value = 65.19 V/m: Power Drift = -0.06 dB Peak SAR (extrapolated) = 28.4 W/kg SAR(1 g) = 7.34 W/kg; SAR(10 g) = 2.06 W/kg Maximum value of SAR (measured) = 17.6 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm Reference Value = 66.21 V/m; Power Drift = -0.09 dB Peak SAR (extrapolated) = 32.8 W/kg SAR(1 g) = 7.81 W/kg; SAR(10 g) = 2.19 W/kg Maximum value of SAR (measured) = 19.1 W/kg

Certificate No: D5GHzV2-1023_Jan18

Page 13 dl 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 🛛 No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號



Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm Reference Value = 64.05 V/m; Power Drift = -0.05 dB Peak SAR (extrapolated) = 32.3 W/kg SAR(1 g) = 7.46 W/kg; SAR(10 g) = 2.07 W/kg Maximum value of SAR (measured) = 18.8 W/kg



Certificate No: D5GHzV2+1023_Jan18

t (886-2) 2299-3279

Page 14 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

f (886-2) 2298-0488



Impedance Measurement Plot for Body TSL

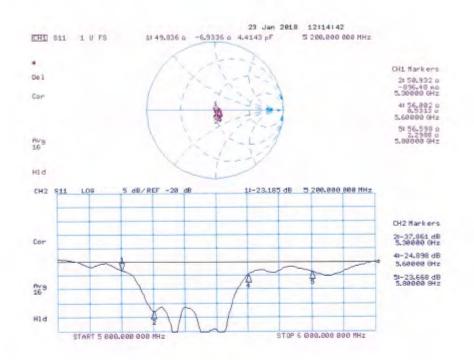

Certificate No: D5GHzV2-1023_Jan18

Page 15 of 15

- End of report -

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

```
f (886-2) 2298-0488
```