

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

	OF
Applicant:	Sharp Corporation, Mobile Communication B.U. 2-13-1, Hachihonmatsu-Iida, Higashi-hiroshima-shi, Hiroshima 739-0192, Japan
Manufacturer:	Sharp Corporation 1 Takumi-cho, Sakai-ku, Sakai-Shi, Osaka 590-8522, Japan
Product Name:	Smart Phone
Report Number:	ER/2018/90104
FCC ID:	APYHRO00263
FCC Rule Part:	§15.247, Cat: DTS
Issue Date:	Oct. 17, 2018
Date of Test:	Sep. 04, 2018 ~ Oct. 11, 2018

Date of EUT Received: Sep. 04, 2018

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits. The test results of this report relate only to the tested sample identified in this report.

Marcus Tseng

Tested By:

Marcus Tseng / Sr. Engineer CHUN, CHIZEH, CHIEN





Approved By: _

Chun Chieh Chen / Asst. Supervisor

Since State and Since and State an

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Trans occurrents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Revision History

Report Number	Revision	Description	Effected Page	Issue Date	Revised By
ER/2018/90104	Rev.00	Initial creation of document	All	Oct. 17, 2018	Violetta Tang

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



Contents

1. GENERAL INFORMATION	4
2. SYSTEM TEST CONFIGURATION	6
3. SUMMARY OF TEST RESULTS	8
4. DESCRIPTION OF TEST MODES	9
5. MEASUREMENT UNCERTAINTY	11
6. CONDUCTED EMISSION TEST	12
7. PEAK OUTPUT POWER MEASUREMENT	16
8. 6dB BANDWIDTH MEASUREMENT	19
9. CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT	26
10. RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT	32
11. PEAK POWER SPECTRAL DENSITY	61
12. ANTENNA REQUIREMENT	64



1. GENERAL INFORMATION

1.1 Product Description

General:


Product Name:	Smart Phone
Hardware Version:	DVT
Software Version:	N/A
Power Supply:	3.85V from Rechargeable Li-ion Battery

Bluetooth Low Energy:

Frequency Range:	2.402GHz – 2.480GHz
Bluetooth Version	BT V5.0 (dual mode)
Channel number:	40 channels
Modulation type:	GFSK
Transmit Power:	6.92dBm (BT 4.0) 7.24dBm (BT 5.0)
Antenna Designation:	Inverted-F Antenna, Gain: -4.1dBi

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留卽天。本報告未检公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





1.2 Test Methodology of Applied Standards

FCC Part 15, Subpart C §15.247

KDB 558074 D01 v05 DTS Meas. Guidance

ANSI C63.10:2013

Note: All test items have been performed and record as per the above standards.

1.3 Test Facility

SGS Taiwan Ltd. Electronics & Communication Laboratory No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803

(TAF code 0513)

FCC Registration Numbers are: 509634 / TW0001

1.4 Special Accessories

There are no special accessories used while test was conducted.

1.5 Equipment Modifications

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained to so days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



2. SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plan. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz.. The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plan. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

Note:

The spectrum analyzer offset is derived from RF cable loss 0.4dB.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Ref 另有說明,此報告結果僅對測試之樣品負責、同時此樣品僅保留的玩。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



2.5 Configuration of Tested System Fig. 2-1 Radiated Emission




Fig. 2-2 AC Power Line Conducted Emission



Fig. 2-2 Conducted (Antenna Port) Emission




Table 2-1	Equipment U	Jsed in Teste	d System
-----------	-------------	---------------	----------

ltem	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1.	Bluetooth Test Software	N/A	N/A	N/A	N/A	N/A
2.	DC Power Supply	Anritsu	E3640A	MY52410006	N/A	Unshielded
3.	Notebook	Lenovo	T440P	P0000564	Shielded	Unshielded

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此根告结果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pagarance of this document is unavial and offenders may be prosecuted to the fullest extent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd.



3. SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.207(a)	AC Power Line Conducted Emission	Compliant
§15.247(b) (3)	Peak Output Power	Compliant
§15.247(a)(2)	6dB Bandwidth	Compliant
§15.247(d)	Conducted Band Edge and Spurious Emission	Compliant
§15.247(d)	Radiated Band Edge and Spurious Emission	Compliant
§15.247(e)	Peak Power Density	Compliant
§15.203 §15.247(b)	Antenna Requirement	Compliant

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



4. DESCRIPTION OF TEST MODES

4.1 Operated in 2400 ~ 2483.5MHz Band

40 channels are provided for Bluetooth LE

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
0	2402 MHz	14	2430 MHz	28	2458 MHz
1	2404 MHz	15	2432 MHz	29	2460 MHz
2	2406 MHz	16	2434 MHz	30	2462 MHz
3	2408 MHz	17	2436 MHz	31	2464 MHz
4	2410 MHz	18	2438 MHz	32	2466 MHz
5	2412 MHz	19	2440 MHz	33	2468 MHz
6	2414 MHz	20	2442 MHz	34	2470 MHz
7	2416MHz	21	2444 MHz	35	2472 MHz
8	2418 MHz	22	2446 MHz	36	2474 MHz
9	2420 MHz	23	2448 MHz	37	2476 MHz
10	2422 MHz	24	2450 MHz	38	2478 MHz
11	2424 MHz	25	2452 MHz	39	2480 MHz
12	2426 MHz	26	2454 MHz		
13	2428 MHz	27	2456 MHz		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此根告结果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pagarance of this document is unavial and offenders may be prosecuted to the fullest extent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



4.2 The Worst Test Modes and Channel Details

- 1. The EUT has been tested under operating condition.
- 2. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

RADIATED EMISSION TEST:

RADIATED EMISSION TEST (BELOW 1 GHz)					
MODE	AVAILABLE	TESTED		DATA RATE	
MODE	CHANNEL	CHANNEL	MODULATION	(Mbps)	
Bluetooth LE	0 to 39	19	GFSK	1	
Bluetooth LE	0 to 39	19	GFSK	2	
	RADIATE	ED EMISSION	TEST (ABOVE 1 GHz)		
MODE	AVAILABLE	TESTED		DATA RATE	
MODE	CHANNEL	CHANNEL	MODULATION	(Mbps)	
Bluetooth LE	0 to 39	0,19,39	GFSK	1	
Bluetooth LE	0 to 39	0,19,39	GFSK	2	

Note: The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for Bluetooth LE Transmitter for channel Low, Mid and High, the worst case E2 position was reported.

ANTENNA PORT CONDUCTED MEASUREMENT:

CONDUCTED TEST				
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
Bluetooth LE	0 to 39	0,19,39	GFSK	1
Bluetooth LE	0 to 39	0,19,39	GFSK	2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained to so days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



5. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty
AC Power Line Conducted Emission	+/- 2.586 dB
Peak Output Power	+/- 0.84 dB
6dB Bandwidth	+/- 51.33 Hz
100 KHz Bandwidth Of Frequency Band Edges	+/- 0.84 dB
Peak Power Density	+/- 1.3 dB
Temperature	+/- 0.65 °C
Humidity	+/- 4.6 %
DC / AC Power Source	DC= +/- 0.13%, AC= +/- 0.2%

Radiated Spurious Emission:

	9kHz – 30MHz: +/- 2.87 dB
	30MHz - 180MHz: +/- 3.37dB
Measurement uncertainty	180MHz -417MHz: +/- 3.19dB
(Polarization : Vertical)	0.417GHz-1GHz: +/- 3.19dB
	1GHz - 18GHz: +/- 4.04dB
	18GHz - 40GHz: +/- 4.04dB

	9kHz – 30MHz: +/- 2.87 dB
Magguramantungartaintu	30MHz - 167MHz: +/- 4.22dB
Measurement uncertainty (Polarization : Horizontal)	167MHz -500MHz: +/- 3.44dB
(i olanzation : honzontal)	0.5GHz-1GHz: +/- 3.39dB
	1GHz - 18GHz: +/- 4.08dB
	18GHz - 40GHz: +/- 4.08dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is enproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-presence of this document is unlawful and offenders may be prosecuted to the fullest extent of the law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



6. CONDUCTED EMISSION TEST

6.1 Standard Applicable:

Frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

	Limits					
Frequency range	dB(uV)				
MHz	Quasi-peak	Average				
0.15 to 0.50	66 to 56	56 to 46				
0.50 to 5	56	46				
5 to 30	60	50				
Note						

1. The lower limit shall apply at the transition frequencies

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

6.2 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
EMI Test Receiver	R&S	ESCI7	100335	02/02/2018	02/01/2019
LISN	SCHWARZBECK	NSLK 8127	8127-649	05/18/2018	05/17/2019

6.3 EUT Setup:


- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

で解す另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



6.4 Test SET-UP (Block Diagram of Configuration)

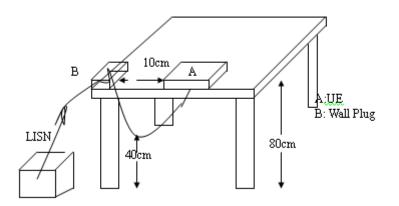

6.5 Measurement Procedure:

- 1. The EUT was placed on a table which is 0.8m above ground plan.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all phases of power being supplied by given UE are completed

6.6 Measurement Result:

Note: Refer to next page for measurement data and plots. Note2: The * reveals the worst-case results that closet to the limit

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

で解す另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Site Conduction Room

Limit: FCC Class B Conduction(QP)

Temperature:

Humidity: 85 %


25 °C

AC POWER LINE CONDUCTED EMISSION TEST DATA

Phase:

L1

Power: AC 120V/60Hz

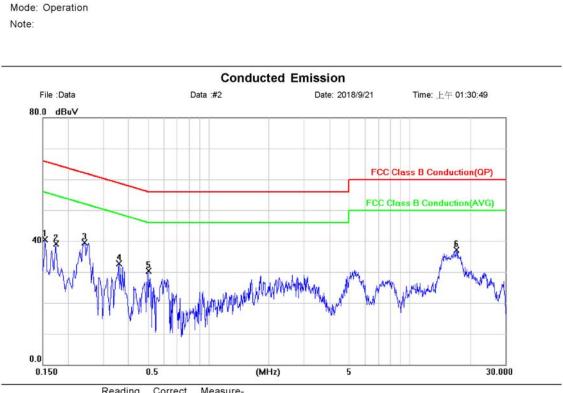

Mk.	Freq.	Level	Factor	ment	Limit	Over			
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment	
	0.1540	40.41	0.04	40.45	65.78	-25.33	peak		
	0.1740	39.09	0.04	39.13	64.77	-25.64	peak		
*	0.2420	39.53	0.04	39.57	62.03	-22.46	peak		
	0.3580	32.71	0.04	32.75	58.77	-26.02	peak		
	0.5060	30.23	0.04	30.27	56.00	-25.73	peak		
	17.1940	36.70	0.39	37.09	60.00	-22.91	peak		
		MHz 0.1540 0.1740 * 0.2420 0.3580 0.5060	Mk. Freq. Level MHz dBuV 0.1540 40.41 0.1740 39.09 * 0.2420 39.53 0.3580 32.71 0.5060 30.23	Mk. Freq. Level Factor MHz dBuV dB 0.1540 40.41 0.04 0.1740 39.09 0.04 * 0.2420 39.53 0.04 0.3580 32.71 0.04 0.5060 30.23 0.04	Mk. Freq. Level Factor ment MHz dBuV dB dBuV 0.1540 40.41 0.04 40.45 0.1740 39.09 0.04 39.13 * 0.2420 39.53 0.04 39.57 0.3580 32.71 0.04 32.75 0.5060 30.23 0.04 30.27	Mk. Freq. Level Factor ment Limit MHz dBuV dB dBuV dBuV dBuV 0.1540 40.41 0.04 40.45 65.78 0.1740 39.09 0.04 39.13 64.77 * 0.2420 39.53 0.04 39.57 62.03 0.3580 32.71 0.04 32.75 58.77 0.5060 30.23 0.04 30.27 56.00	Mk. Freq. Level Factor ment Limit Over MHz dBuV dB dBuV dBuV dB 0.1540 40.41 0.04 40.45 65.78 -25.33 0.1740 39.09 0.04 39.13 64.77 -25.64 * 0.2420 39.53 0.04 39.57 62.03 -22.46 0.3580 32.71 0.04 32.75 58.77 -26.02 0.5060 30.23 0.04 30.27 56.00 -25.73	Mk. Freq. Level Factor ment Limit Over MHz dBuV dB dBuV dBuV dB Detector 0.1540 40.41 0.04 40.45 65.78 -25.33 peak 0.1740 39.09 0.04 39.13 64.77 -25.64 peak * 0.2420 39.53 0.04 39.57 62.03 -22.46 peak 0.3580 32.71 0.04 32.75 58.77 -26.02 peak 0.5060 30.23 0.04 30.27 56.00 -25.73 peak	Mk. Freq. Level Factor ment Limit Over MHz dBuV dB dBuV dB Detector Comment 0.1540 40.41 0.04 40.45 65.78 -25.33 peak 0.1740 39.09 0.04 39.13 64.77 -25.64 peak * 0.2420 39.53 0.04 39.57 62.03 -22.46 peak 0.3580 32.71 0.04 32.75 58.77 -26.02 peak 0.5060 30.23 0.04 30.27 56.00 -25.73 peak


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Contentiones stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relative for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



Site Conduction Room Phase: Ν Temperature: 25 °C Limit: FCC Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 85 % Mode: Operation Note:

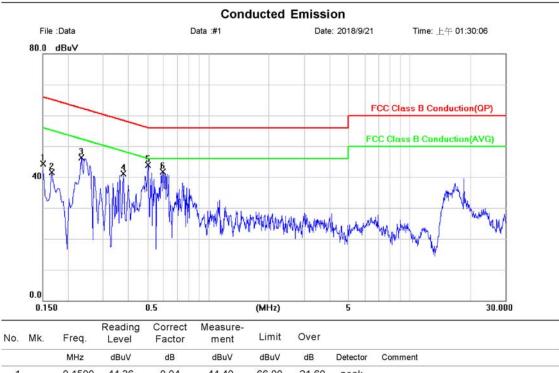

	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment	
1	0.1500	44.36	0.04	44.40	66.00	-21.60	peak		
2	0.1660	41.48	0.04	41.52	65.16	-23.64	peak		
3	0.2340	46.29	0.04	46.33	62.31	-15.98	peak		
4	0.3780	40.97	0.04	41.01	58.32	-17.31	peak		
5 *	0.5020	43.96	0.04	44.00	56.00	-12.00	peak		
6	0.5940	41.66	0.04	41.70	56.00	-14.30	peak		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is enproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-presence of this document is unlawful and offenders may be prosecuted to the fullest extent of the law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



7. PEAK OUTPUT POWER MEASUREMENT

7.1 Standard Applicable:

For systems using digital modulation in the 2400-2483.5 MHz bands, the limit for peak output power is 1Watt.


If the transmitting antenna of directional gain greater than 6dBi are used the peak output power form the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6dBi.

In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of Antenna exceeds 6dBi.

7.2 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Power Meter	Anritsu	ML2496A	1804001	02/01/2018	01/31/2019
Power Sensor	Anritsu	MA2411B	1726104	02/01/2018	01/31/2019
Power Sensor	Anritsu	MA2411B	1726107	02/01/2018	01/31/2019
DC Power Supply	Anritsu	E3640A	MY52410006	11/28/2017	11/27/2018
Attenuator	Mini-Circuit	BW-S10W2+	2	01/02/2018	01/01/2019
DC Block	Mini-Circuits	BLK-18-S+	1	01/02/2018	01/01/2019
Coaxial Cables	N/A	WK CE Cable	N/A	01/02/2018	01/01/2019
Notebook	Lenovo	T440P	P0000564	N/A	N/A

7.3 Test Set-up:



除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



7.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter.

Power Meter:

It is used as the auxiliary test equipment to conduct the output power measurement.

- 4. Record the max. Reading as observed from Power Meter.
- 5. Repeat above procedures until all test default channel measured was complete.

Duty Factor

DATA RATE 1 Mbps:

	Duty Cycle (%)	Duty Factor (dB)	1/T (kHz)	VBW setting (kHz)
BLE	62.82	2.02	2.55	3.00



Duty Cycle Factor:10*log(1/(62.82/100))=2.02

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



DATA RATE 2 Mbps (BT 5.0):

	Duty Cycle (%)	Duty Factor (dB)	1/T (kHz)	VBW setting (kHz)
BLE	56.83	2.45	0.94	1.00



Duty Cycle Factor:10*log(1/(56.83/100))=2.45

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relatined to so days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



7.5 Measurement Result: DATA RATE 1 Mbps:

BLE mode:

СН	Frequency (MHz)	Peak Power Output (dBm)	Required Limit					
0	2402	5.91	1 Watt = 30 dBm					
19	2440	6.92	1 Watt = 30 dBm					
39	2480	5.27	1 Watt = 30 dBm					
BLE mo	BLE mode:							
СН	Frequency (MHz)	Max. Avg. Output include tune up tolerance Power (dBm)	Required Limit					
0	2402	5.74	1 Watt = 30 dBm					
19	2440	6.76	1 Watt = 30 dBm					
39	2480	5.18	1 Watt = 30 dBm					

*Note: Measured by power meter, cable loss as 0.4 dB that offsets on the power meter in Peak *Note: Measured by power meter, as cable loss+ Duty cycle factor that offsets on the power meter *Note: Max. Output include tune up tolerance Power is average power

DATA RATE 2 Mbps (BT 5.0):

_			
сн	Frequency (MHz)	Peak Power Output (dBm)	Required Limit
0	2402	6.11	1 Watt = 30 dBm
19	2440	7.24	1 Watt = 30 dBm
39	2480	5.55	1 Watt = 30 dBm
BLE mo	ode:		
СН	Frequency (MHz)	Max. Avg. Output include tune up tolerance Power (dBm)	Required Limit
0	2402	5.94	1 Watt = 30 dBm
19	2440	7.14	1 Watt = 30 dBm
39	2480	5.49	1 Watt = 30 dBm

BLE mode:

*Note: Measured by power meter, cable loss as 0.4 dB that offsets on the power meter in Peak

*Note: Measured by power meter, as cable loss+ Duty cycle factor that offsets on the power meter

*Note: Max. Output include tune up tolerance Power is average power

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此根告结果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pagarance of this document is unavial and offenders may be prosecuted to the fullest extent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



8. 6DB BANDWIDTH MEASUREMENT


8.1 Standard Applicable

The minimum 6 dB bandwidth shall be at least 500 kHz.

8.2 Measurement Equipment Used

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
EXA Spectrum Analyzer	Agilent	N9010A	MY57120290	02/14/2018	02/13/2019
DC Power Supply	Anritsu	E3640A	MY52410006	11/28/2017	11/27/2018
Attenuator	Mini-Circuit	BW-S10W2+	2	01/02/2018	01/01/2019
DC Block	Mini-Circuits	BLK-18-S+	1	01/02/2018	01/01/2019
Coaxial Cables	N/A	WK CE Cable	N/A	01/02/2018	01/01/2019
Notebook	Lenovo	T440P	P0000564	N/A	N/A

8.3 Test Set-up:



8.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. For 6dB Bandwidth:

Set the spectrum analyzer as RBW=100 kHz, VBW= 3*RBW, Span = 5MHz, Detector=Peak, Sweep=auto.

- 5. Mark the peak frequency and –6dB (upper and lower) frequency.
- 6. Repeat above procedures until all test default channel is completed

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



8.5 Measurement Result: **DATA RATE 1 Mbps:**

BLE mode

Frequency (MHz)	6dB BW (MHz)	BW (MHz)	Result
2402	0.681	> 0.5	PASS
2440	0.68	> 0.5	PASS
2480	0.683	> 0.5	PASS

DATA RATE 2 Mbps (BT 5.0):


BLE mode

Frequency (MHz)	6dB BW (MHz)	BW (MHz)	Result
2402	1.162	> 0.5	PASS
2440	1.168	> 0.5	PASS
2480	1.168	> 0.5	PASS


Note: Refer to next page for plots.



BLE mode DATA RATE 1 Mbps: 6dB Band Width Test Data CH-Low

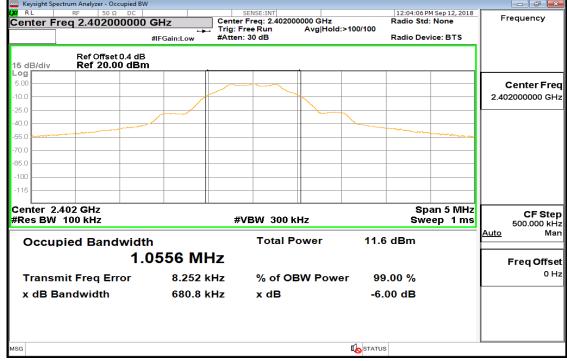

6dB Band Width Test Data CH-Mid

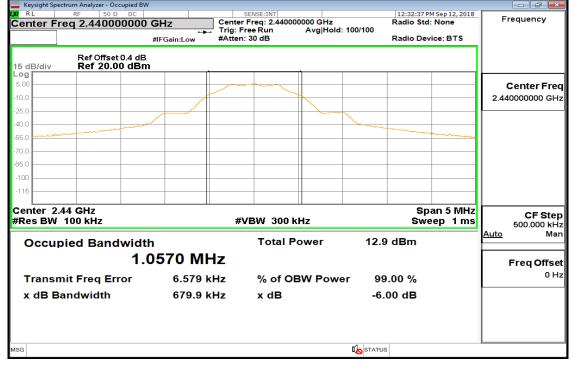


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relatined to so days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



6dB Band Width Test Data CH-High

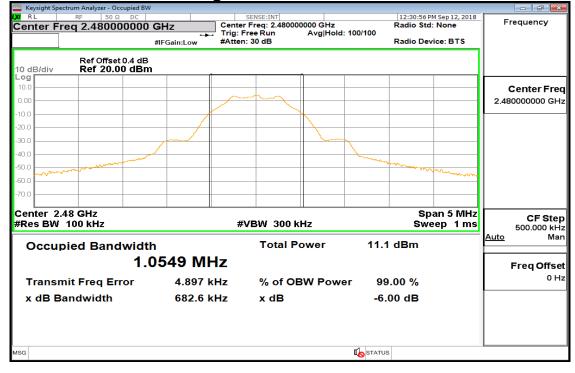

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Contentiones stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relative for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



DATA RATE 2 Mbps (BT 5.0): 6dB Band Width Test Data CH-Low

	ectrum Analyzer - Occupied BW								
LXI RL	RF 50 Ω DC			NSE:INT rea: 2.40200	0000 CH-		02:15:09 P	M Sep 12, 2018	Frequency
Center F	req 2.402000000	GHZ			Avg Hold:	100/100	Radio Sto	: None	
		#IFGain:Low	#Atten: 3				Radio De	vice: BTS	
15 dB/div	Ref Offset 0.4 dB Ref 20.00 dBm	·							
Log 5.00									Center Fre
-10.0									2.402000000 GH
-25.0	/					\searrow			2.4020000000
-40.0							\sim		
-55.0								home	
-70.0									
-85.0									
-100									
-115									
-115									
Center 2 #Res BW			#VE	3W 300 k	Hz			an 5 MHz eep 1 ms	CF Ste 500.000 kH
Occu	pied Bandwidt	h		Total P	ower	12.4	dBm		<u>Auto</u> Ma
	2.	0616 M⊦	z						Freq Offs
Transi	mit Freq Error	14.441 k	Hz	% of O	3W Powe	r 99	.00 %		01
x dB B	andwidth	1.162 M	Hz	x dB		-6	00 dB		
						0.			
MSG						I STATUS	5		<u>U</u>
						<u> </u>	1		

6dB Band Width Test Data CH-Mid

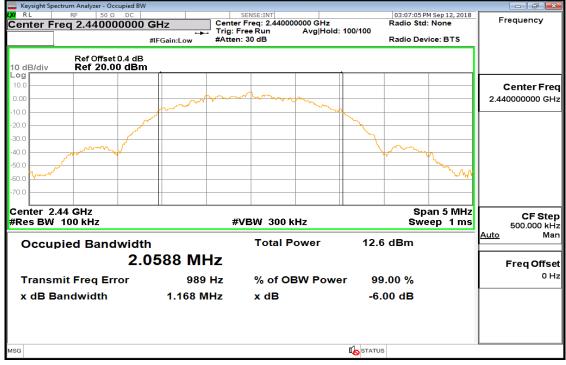


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relatined to so days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



6dB Band Width Test Data CH-High

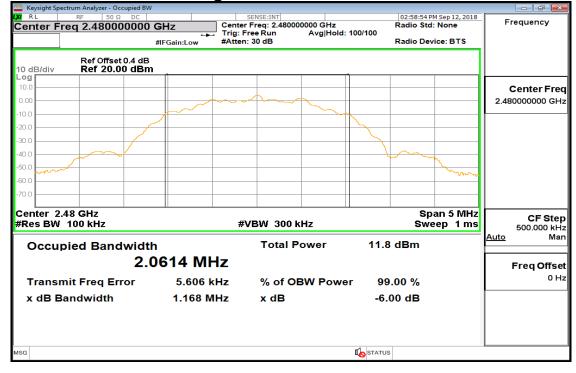

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Contentiones stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relative for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



9. CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT


9.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
EXA Spectrum Analyzer	Agilent	N9010A	MY57120290	02/14/2018	02/13/2019
DC Power Supply	Anritsu	E3640A	MY52410006	11/28/2017	11/27/2018
Attenuator	Mini-Circuit	BW-S10W2+	2	01/02/2018	01/01/2019
DC Block	Mini-Circuits	BLK-18-S+	1	01/02/2018	01/01/2019
Coaxial Cables	N/A	WK CE Cable	N/A	01/02/2018	01/01/2019
Notebook	Lenovo	T440P	P0000564	N/A	N/A

9.2 Measurement Equipment Used:

9.3 Test SET-UP:



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Re非另有說明,此報告結果僅對測試之樣品負責、同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



9.4 Measurement Procedure

Conducted Band Edge:

- 1. To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set start to edge frequency, and stop frequency of spectrum analyzer so as to encompass the spectrum to be examined.
- 5. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Detector = Peak, Sweep = auto
- 6. Mark the highest reading of the emission as the reference level measurement.
- Set DL as the limit = reading on marker 1 20dBm
- 8. Marker on frequency, 2.3999GHz and 2.4836GHz, and examine shall 100 kHz immediately outside the authorized (2400~2483.5) be attenuated by 20dB at least relative to the maximum emission of power.
- 9. Repeat above procedures until all default test channel (low, middle, and high) was complete.

Conducted Spurious Emission:

- 1. To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Set RBW = 100 kHz & VBW=300 kHz, Detector = Peak, Sweep = Auto
- 4. Allow trace to fully stabilize.
- 5. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- 6. Repeat above procedures until all default test channel measured were complete.

Ref 另有說明,此報告結果僅對測試之樣品員,同時此樣品僅保留的玩力。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



9.5 Measurement Result:

DATA RATE 1 Mbps:

Reference Level of Limit

Frequency (MHz)	RF Power Density (dBm)	Reference Level of Limit = PSD - 20dB (dBm)
2402	4.86	-15.14
2440	6.12	-13.88
2480	4.40	-15.60

NOTE: cable loss as 0.4dB that offsets in the spectrum NOTE: Refer to next page for plots.

DATA RATE 2 Mbps (BT 5.0):

Reference Level of Limit


Frequency (MHz)	RF Power Density (dBm)	Reference Level of Limit = PSD - 20dB (dBm)
2402	4.81	-15.19
2440	6.05	-13.95
2480	4.30	-15.70

NOTE: cable loss as 0.4dB that offsets in the spectrum NOTE: Refer to next page for plots.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is enproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-presence of this document is unlawful and offenders may be prosecuted to the fullest extent of the law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



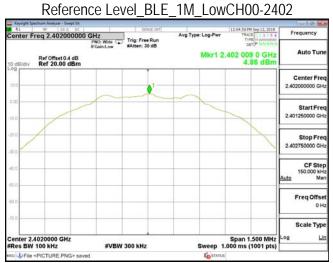


1M MidCH19-2440 Reference Level BLE



Reference Level BLE 1M HighCH39-2480



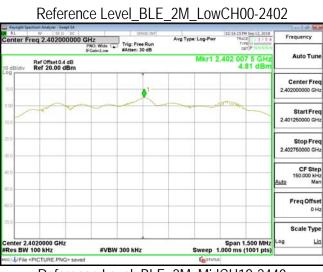

Reference Level BLE 2M MidCH19-2440



Reference Level BLE 2M HighCH39-2480



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Gnless otherwise stated are results and the architecture of the state and the state of the sta tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

Band Edge_BLE_1M_LowCH00-2402


000			1351	100000			Analyzer - Su	pectium		Key
Frequency	12:09:29 PM Sep 12, 2018 TRACE 1 2 3 4 5 6 TYPE M WWWWW	pe: Log-Pwr		Trig: Free	Z	00000 GH	2.3600	req		
Auto Tur	DET P MANNAN			#Atten: 30	Sain:Low					
Auto Tun	3 2.390 0 GHz -61.83 dBm	Mk					f Offset 0.		Judiv	
Center Fre	01			-						0g
2.36000000 GH	Â		_					-	-	1.00
210.13	DC1-15 Harden								_	0.0
Start Fre 2.310000000 GH	1		_							0.0
2.0100000000	A2					-		_	-	40.0
Stop Fre	3		12							0.0
2.41000000 GH	All and a second	- Charlestown	ale - Jackey Com		Petropologia		Calenty Party in	-EWA	+n-	70.0
CF Ste	Span 100.0 MHz						00 GHz			
10.000000 MH Auto Ma	600 ms (1001 pts)	Sweep 9.		300 kHz	#VBW		kHz	100		
	Porte i den vie di	FONCTION WIDTH		5.02 dB		2.402		1 1	NN	1 2
Freq Offse 0 H				-61.83 dB		2.390		1 1	N	345
Scale Typ										0789
Log Li										10
									_	50
Scale Type		Ko status				-				

Band Edge_BLE_1M_HighCH39-2480

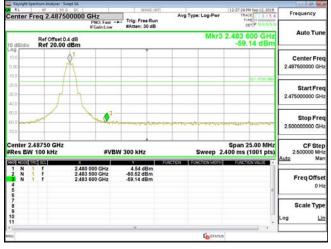

Band Edge_BLE_2M_LowCH00-2402 PN0: Fast ---- Trig: Free Rut PN0: Fast ---- Trig: Free Rut Atten: 30 dB Avg Type: Log-Pw Auto Tu 3 2.390 0 G -60.14 dE Ref Offset 0.4 dB Ref 20.00 dBn Center Fre 000 G Start Free Stop Free 00 G Span 100.0 MH Sweep 9.600 ms (1001 pts CF Step 00000 MHz Man er 2.36000 GH BW 100 kHz #VBW 300 kH 2.402 0 GHz 2.399 9 GHz 2.390 0 GHz 4.98 dBm -43.62 dBm -60.14 dBm NNN 1 1 Freq Offse 01 Scale Typ Lir 1h

Band Edge_BLE_2M_HighCH39-2480

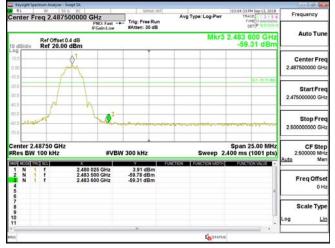

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Contentiones stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relative for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Spurious Emission_BLE_1M_LowCH00-2402


	12:10:28 PM Sep 12, 2018		E:1NT	SEN		DC		RE		ŧ1
Frequency	TYPE MUNIWAV	Avg Type: Log-Pwr		Trig: Free #Atten: 30	Hz VO: Fast ++-		3.01500	eq 1	er Fre	n
Auto Tun	25.615 6 GHz -53.81 dBm	Mkr4					Offset 0.4 20.00 dl		ldiv	
Center Fre 13.015000000 GH							-	01		9 00 00
	DL1-1518 (Br)						-			10
Start Fre 30.000000 MH								1		
Stop Fre 26.00000000 GH			ite ite			Q3		-		
CF Ste 2.597000000 GH Auto Ma	Span 25.97 GHz .482 s (30001 pts)	Sweep 2		300 kHz	#VBW				er 13. BW 1	ent
Freq Offse		N FUNCTION WOTH	n	2.83 dE -59.00 dE -61.00 dE -53.81 dE	0 GHz 0 GHz	2.401 9 4.804 0 7.206 0 25.615 6			N 1 N 1 N 1 N 1	1 2 3
Scale Typ										678
Log <u>Li</u>										9
		Costatus				aces cleare				

Spurious Emission_BLE_1M_MidCH19-2440

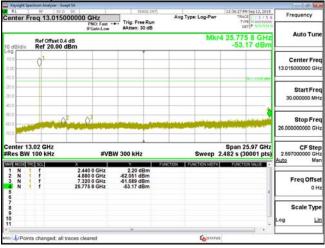


Spurious Emission_BLE_1M_HighCH39-2480

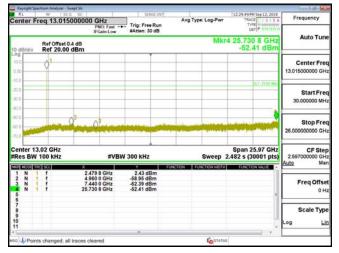


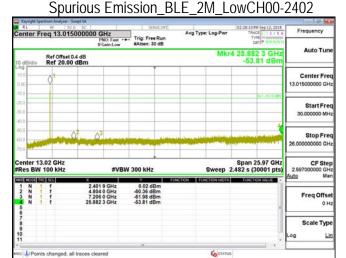

2M MidCH19-2440 Spurious Emission BLE

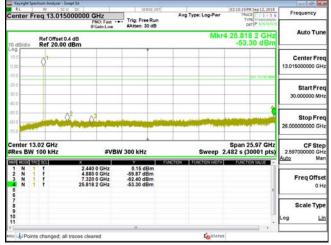

Spurious Emission_BLE_2M_HighCH39-2480

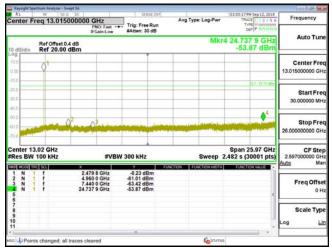

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Contentiones stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relative for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



10. RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT

10.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands must also comply with the §15.209 limit as below.

And according to §15.33(a) (1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level ($dB\mu V/m$) = 20 log Emission level ($dB\mu V/m$)

Re非另有說明,此報告結果僅對測試之樣品負責、同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



10.2 Measurement Equipment Used


EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Bi-log Antenna	SCHWAZBECK	VULB9168	378	12/29/2017	12/28/2018
Horn Antenna	Schwarzbeck	BBHA9120D	1441	08/16/2018	08/15/2019
Horn Antenna	Schwarzbeck	BBHA9170	184	12/12/2017	12/11/2018
Loop Antenna	ETS.LINDGREN	6502	148045	09/26/2017	09/25/2018
3m Site NSA	SGS	966 chamber	N/A	01/02/2018	01/01/2019
Spectrum Analyzer	Agilent	E4446A	MY51100003	05/15/2018	05/14/2019
EMI Test Receiver	R&S	ESCI7	100335	02/02/2018	02/01/2019
Pre-Amplifier	HP	8449B	3008A00578	01/02/2018	01/01/2019
Pre-Amplifier	HP	8447D	2944A07676	01/02/2018	01/01/2019
Pre-Amplifier	EMC Instru- ments	EMC184045B	980135	10/27/2017	10/26/2018
Attenuator	Mini-Circuit	BW-S10W2+	2	01/02/2018	01/01/2019
2GHz High Pass Filter	Micro-Tronics	HPM50110	36	01/02/2018	01/01/2019
Filter 5150-5350 MHz	Micro-Tronics	BRM50703	1	01/02/2018	01/01/2019
Low Loss Cable	Huber Suhner	966_RX	9	01/02/2018	01/01/2019
Notebook	Lenovo	T440P	P0000564	N/A	N/A

Note: N.C.R refers to Not Calibrated Required.




10.3 Test SET-UP


(A) Radiated Emission Test Set-UP Frequency Below 30MHz.

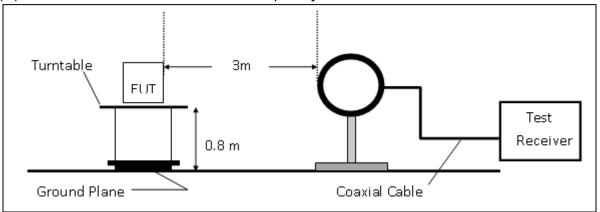

(B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

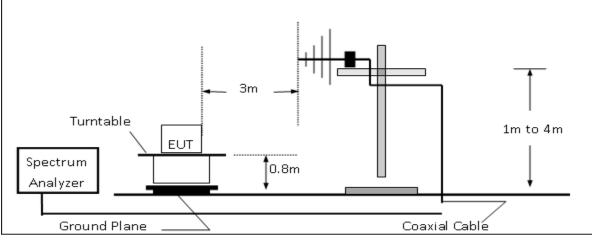

(C) Radiated Emission Test Set-UP Frequency Over 1 GHz

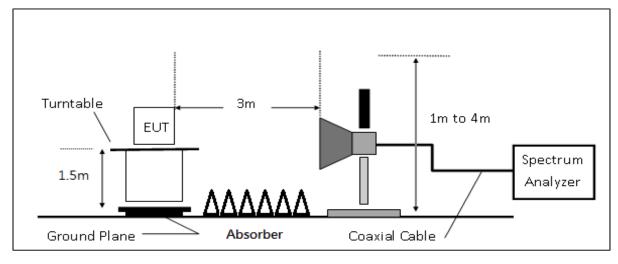

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Contentiones stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relative for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



10.4 Measurement Procedure

- The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. 1. Guidance.
- The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 0.8m for frequen-2. cy> 1GHz above ground plan.
- The turn table shall rotate 360 degrees to determine the position of maximum emission level. 3.
- EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the 4. highest emissions.
- 5. Set the spectrum analyzer as RBW=120 kHz and VBW=300 kHz for Peak Detector (PK) and Quasi-peak (QP) at frequency below 1 GHz.
- 6. Set the spectrum analyzer as RBW=1 MHz, VBW=3 MHz for Peak Detector at frequency above 1 GHz.
- 7. Set the spectrum analyzer as RBW=1 MHz, VBW=10 Hz (Duty cycle > 98%) or VBW \geq 1/T (Duty cycle < 98%) for Average Detector at frequency above 1 GHz.
- 8. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 9. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 10. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. On spectrum, change spectrum mode in linear display mode, and reduce VBW = 10Hz if average reading is measured.
- 11. Repeat above procedures until all default test channel measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

GRes 方式说明,此報告結果僅對測試之樣品員,同時此樣品僅保留90元。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



10.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	6	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

Actual FS(dB μ V/m) = SPA. Reading level(dB μ V) + Factor(dB)

Factor(dB) = Antenna Factor(dBµV/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

10.6 Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) was not reported.

10.7 Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Ref 另有說明,此報告結果僅對測試之樣品負責、同時此樣品僅保留的玩。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Radiated Band Edge Measurement Result (BLE mode)

DATA RATE 1 Mbps:			
Operation Band	:BLE	Test Date	:2018-09-19
Fundamental Frequency	:2402 MHz	Temp./Humi.	:21 deg_C / 61 RH
Operation Mode	:Bandedge CH LOW	Engineer	:Tin
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

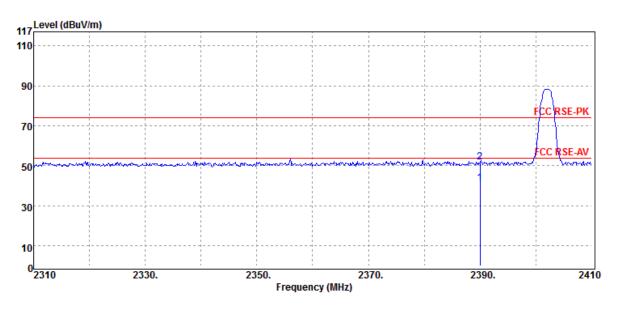


	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	_
	2390.00	Average	40.92	0.20	41.12	54.00	-12.88	
	2390.00	Peak	51.73	0.20	51.93	74.00	-22.07	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



:BLE **Operation Band** Fundamental Frequency :2402 MHz **Operation Mode** :Bandedge CH LOW EUT Pol. :E2 Plane

Test Date :2018-09-19 Temp./Humi. :21 deg_C / 61 RH Engineer :Tin :HORIZONTAL Measurement Antenna Pol.

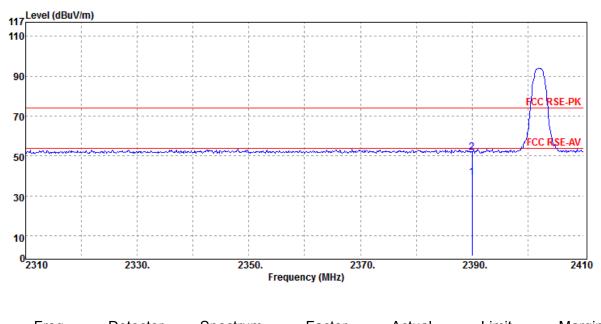

	⊢req.	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	
	2390.00	Average	39.19	0.20	39.39	54.00	-14.61	
	2390.00	Peak	51.73	0.20	51.93	74.00	-22.07	


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/90104 Page 39 of 64



:BLE **Operation Band** Fundamental Frequency :2480 MHz **Operation Mode** :Bandedge CH HIGH EUT Pol. :E2 Plane

Test Date :2018-09-19 Temp./Humi. :21 deg_C / 61 RH Engineer :Tin :VERTICAL Measurement Antenna Pol.

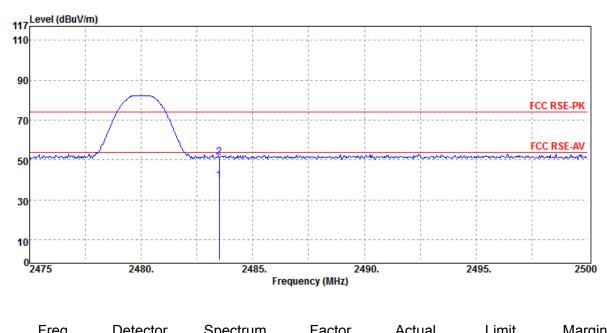

	Fleq.	Delector	Spectrum	Factor	Actual	LIITIIL	wargin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	_
	2483.50	Average	39.17	0.53	39.70	54.00	-14.30	
	2483.50	Peak	50.74	0.53	51.27	74.00	-22.73	


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/90104 Page 40 of 64



:BLE **Operation Band** Fundamental Frequency :2480 MHz **Operation Mode** :Bandedge CH HIGH EUT Pol. :E2 Plane

Test Date :2018-09-19 Temp./Humi. :21 deg_C / 61 RH Engineer :Tin :HORIZONTAL Measurement Antenna Pol.

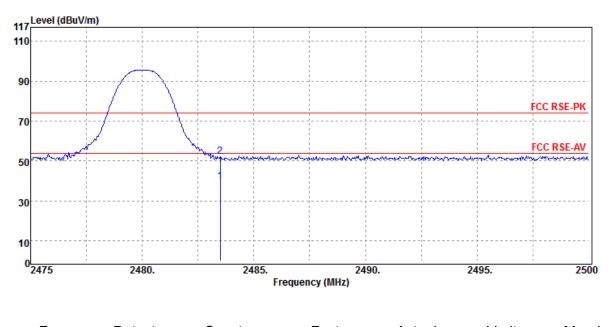

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	_
	2483.50	Average	39.07	0.53	39.60	54.00	-14.40	
	2483.50	Peak	51.77	0.53	52.30	74.00	-21.70	
	2.00.00	1 COIN	•	0.00	02.00	1 1100		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: ER/2018/90104 Page 41 of 64

DATA RATE 2 Mbps (BT 5.0):

Operation Band Fundamental Frequency Operation Mode EUT Pol.

2390.00


2390.00

Average

Peak

:BLE 2M :2402 MHz :Bandedge CH LOW :E2 Plane

Test Date :2018-09-19 Temp./Humi. :21 deg_C / 61 RH Engineer :Tin :VERTICAL Measurement Antenna Pol.

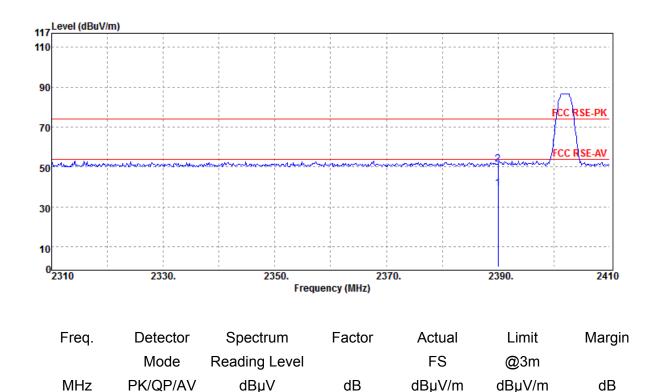

0.20

0.20

39.26

51.30

54.00

74.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

39.06

51.10

Contentiones stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relative for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

-14.74


-22.70

Report No.: ER/2018/90104 Page 42 of 64



:BLE_2M **Operation Band** Fundamental Frequency :2402 MHz **Operation Mode** :Bandedge CH LOW EUT Pol. :E2 Plane

Test Date :2018-09-18 Temp./Humi. :21 deg_C / 61 RH Engineer :Tin :HORIZONTAL Measurement Antenna Pol.

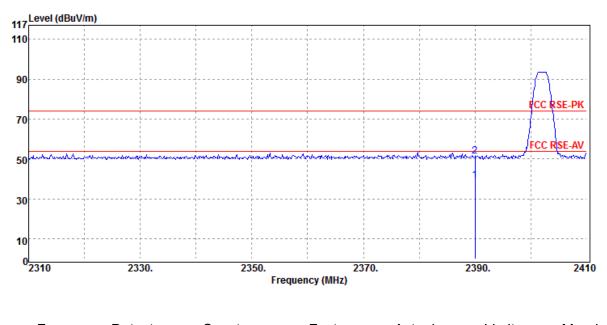

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	_
	2390.00	Average	39.13	0.20	39.33	54.00	-14.67	
	2390.00	Peak	51.21	0.20	51.41	74.00	-22.59	


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/90104 Page 43 of 64



:BLE_2M **Operation Band** Fundamental Frequency :2480 MHz **Operation Mode** :Bandedge CH HIGH EUT Pol. :E2 Plane

Test Date :2018-09-18 Temp./Humi. :21 deg_C / 61 RH Engineer :Tin :VERTICAL Measurement Antenna Pol.

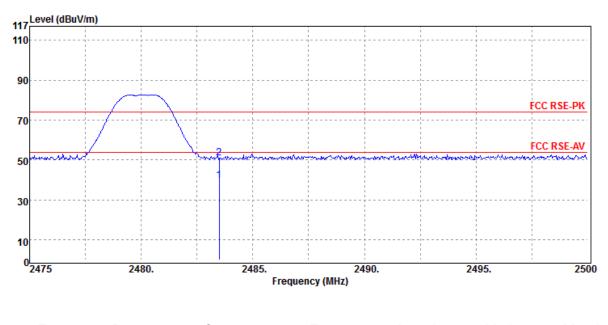

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	_
	2483.50	Average	39.17	0.53	39.70	54.00	-14.30	
	2483.50	Peak	50.51	0.53	51.04	74.00	-22.96	


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/90104 Page 44 of 64



:BLE_2M **Operation Band** Fundamental Frequency :2480 MHz **Operation Mode** :Bandedge CH HIGH EUT Pol. :E2 Plane

Test Date :2018-09-18 Temp./Humi. :21 deg_C / 61 RH Engineer :Tin :HORIZONTAL Measurement Antenna Pol.

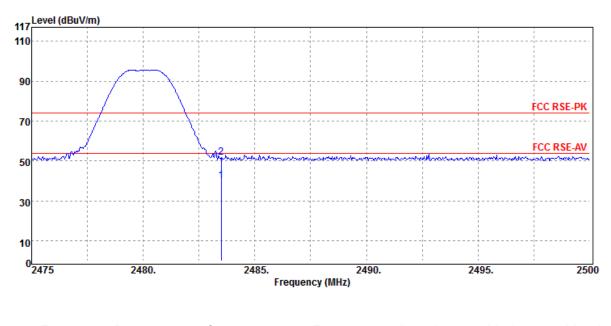

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	_
	2483.50	Average	39.56	0.53	40.09	54.00	-13.91	
	2483.50	Peak	51.46	0.53	51.99	74.00	-22.01	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Radiated Spurious Emission Measurement Result: (BLE mode) For Frequency from 30MHz to 1000MHz

DATA RATE 1 Mbps: **Operation Band Fundamental Frequency Operation Mode** EUT Pol.

:BLE :2440 MHz :Tx CH MID :E2 Plane

Test Date :2018-09-19 Temp./Humi. :21 deg_C / 61 RH Engineer :Tin :VERTICAL Measurement Antenna Pol.

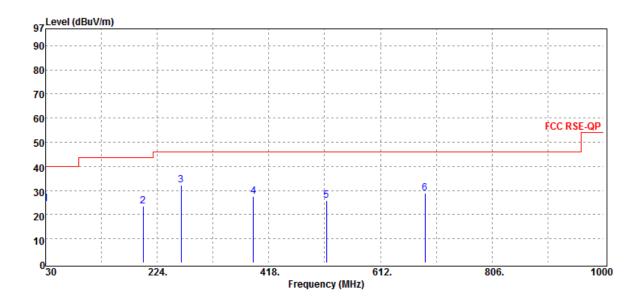


Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
30.00	Peak	33.54	-8.96	24.58	40.00	-15.42
199.75	Peak	32.83	-9.26	23.57	43.50	-19.93
265.71	Peak	38.95	-6.80	32.15	46.00	-13.85
390.84	Peak	31.02	-3.62	27.40	46.00	-18.60
517.91	Peak	27.37	-1.46	25.91	46.00	-20.09
689.60	Peak	27.04	1.88	28.92	46.00	-17.08

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Operation Band Fundamental Frequency	:BLE :2440 MHz	Test Date Temp./Humi.	:2018-09-19 :21 deg_C / 61 RH
Operation Mode	:Tx CH MID	Engineer	:Tin
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

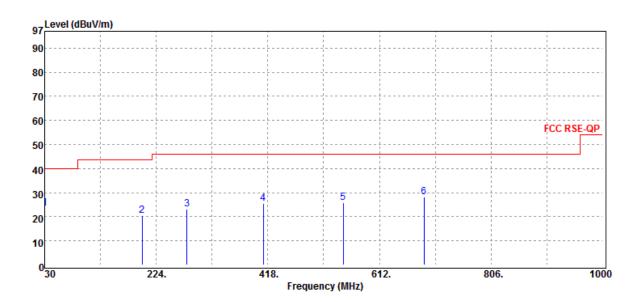


Detector	Spectrum	Factor	Actual	Limit	Margin
Mode	Reading Level		FS	@3m	
PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
Peak	32.60	-8.96	23.64	40.00	-16.36
Peak	29.60	-9.26	20.34	43.50	-23.16
Peak	29.57	-6.27	23.30	46.00	-22.70
Peak	28.39	-2.97	25.42	46.00	-20.58
Peak	27.41	-1.53	25.88	46.00	-20.12
Peak	26.36	1.88	28.24	46.00	-17.76
	Mode PK/QP/AV Peak Peak Peak Peak Peak	ModeReading LevelPK/QP/AVdBµVPeak32.60Peak29.60Peak29.57Peak28.39Peak27.41	Mode Reading Level PK/QP/AV dBµV dB Peak 32.60 -8.96 Peak 29.60 -9.26 Peak 29.57 -6.27 Peak 28.39 -2.97 Peak 27.41 -1.53	Mode Reading Level FS PK/QP/AV dBμV dB dBμV/m Peak 32.60 -8.96 23.64 Peak 29.60 -9.26 20.34 Peak 29.57 -6.27 23.30 Peak 28.39 -2.97 25.42 Peak 27.41 -1.53 25.88	Mode Reading Level FS @3m PK/QP/AV dBμV dB dBμV/m dBμV/m Peak 32.60 -8.96 23.64 40.00 Peak 29.60 -9.26 20.34 43.50 Peak 29.57 -6.27 23.30 46.00 Peak 28.39 -2.97 25.42 46.00 Peak 27.41 -1.53 25.88 46.00



DATA RATE 2 Mbps (BT5.0):

Operation Band :BLE_2M Fundamental Frequency :2440 MHz :Tx CH MID **Operation Mode** EUT Pol. :E2 Plane

Test Date :2018-09-19 Temp./Humi. :21 deg_C / 61 RH Engineer :Tin :VERTICAL Measurement Antenna Pol.

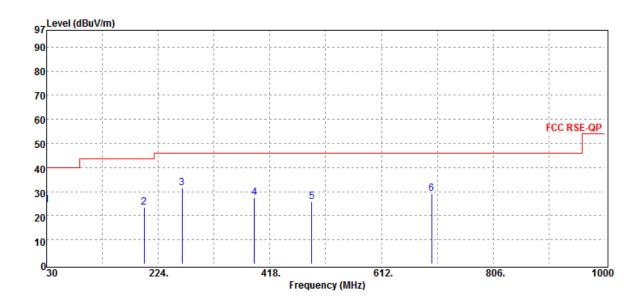


Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
30.00	Peak	33.50	-8.96	24.54	40.00	-15.46
199.75	Peak	32.92	-9.26	23.66	43.50	-19.84
265.71	Peak	38.48	-6.80	31.68	46.00	-14.32
390.84	Peak	31.17	-3.62	27.55	46.00	-18.45
490.75	Peak	28.18	-2.32	25.86	46.00	-20.14
699.30	Peak	27.45	1.74	29.19	46.00	-16.81

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Operation Band Fundamental Frequency	:BLE_2M :2440 MHz	Test Date Temp./Humi.	:2018-09-19 :21 deg_C / 61 RH
Operation Mode	:Tx CH MID	Engineer	:Tin
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

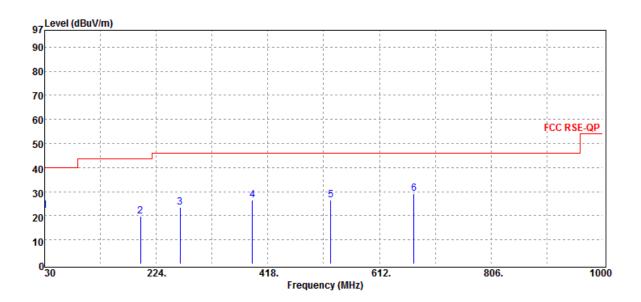

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
30.00	Peak	30.95	-8.96	21.99	40.00	-18.01
196.84	Peak	29.10	-9.19	19.91	43.50	-23.59
265.71	Peak	30.25	-6.80	23.45	46.00	-22.55
390.84	Peak	30.15	-3.62	26.53	46.00	-19.47
527.61	Peak	27.73	-1.34	26.39	46.00	-19.61
672.14	Peak	28.25	0.99	29.24	46.00	-16.76



Radiated Spurious Emission Measurement Result: (BLE mode) For Frequency above 1 GHz

DATA RATE 1 Mbps: **Operation Band** Fundamental Frequency **Operation Mode** EUT Pol.

4804.00


4804.00

Average

Peak

:BLE :2402 MHz :Tx CH LOW :E2 Plane

Test Date :2018-09-19 Temp./Humi. :21 deg C / 61 RH Engineer :Tin :VERTICAL Measurement Antenna Pol.

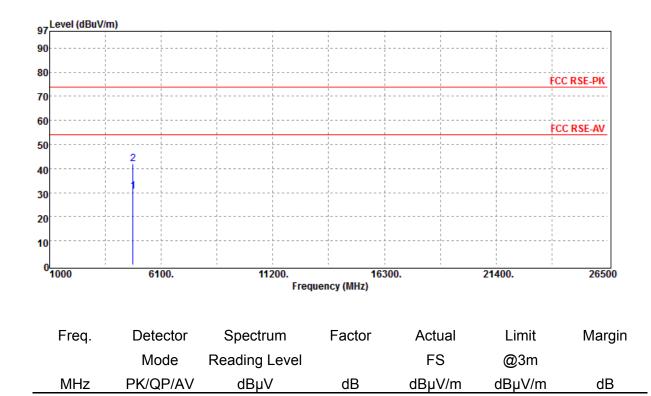

5.65

5.65

30.50

41.90

54.00

74.00

-23.50

-32.10


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

24.85

36.25




Operation Band Fundamental Frequency Operation Mode	:BLE :2402 MHz :Tx CH LOW	Test Date Temp./Humi. Engineer	:2018-09-19 :21 deg_C / 61 RH :Tin
EUT Pol.	:E2 Plane	Engineer Measurement Antenna Pol.	:HORIZONTAL
		Measurement Antenna i Oi.	

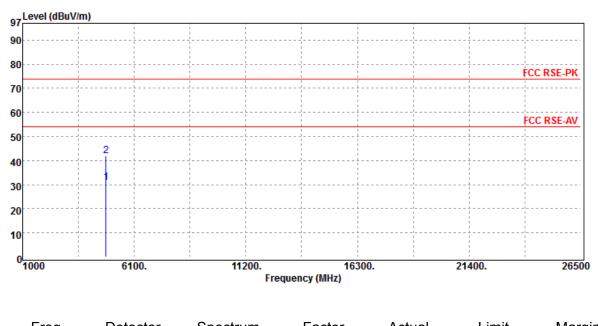

⊢req.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
 MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	
4804.00	Average	25.09	5.65	30.74	54.00	-23.26	
4804.00	Peak	36.39	5.65	42.04	74.00	-31.96	




Operation Band	:BLE	Test Date	:2018-09-19
Fundamental Frequency	:2440 MHz	Temp./Humi.	:21 deg_C / 61 RH
Operation Mode	:Tx CH MID	Engineer	:Tin
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

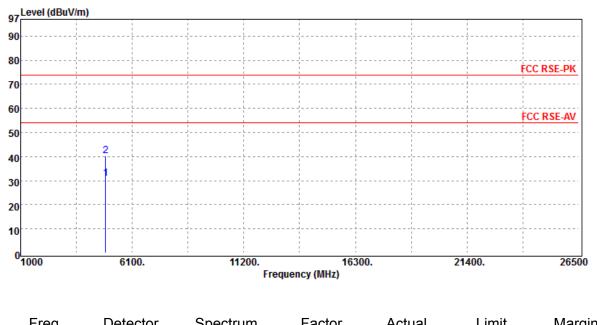

	Freq.	Delector	Spectrum	Factor	Actual	LIMIL	wargin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	_
	4880.00	Average	24.88	5.89	30.77	54.00	-23.23	
	4880.00	Peak	34.31	5.89	40.20	74.00	-33.80	




Operation Band Fundamental Frequency	:BLE :2440MHz	Test Date Temp./Humi.	:2018-09-19 :21 deg_C / 61 RH
Operation Mode	:Tx CH MID	Engineer	:Tin
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

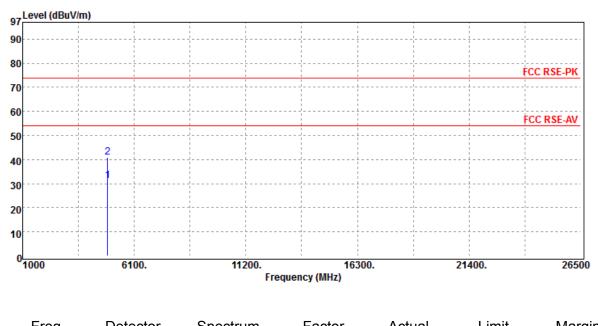

	Freq.	Detector	Spectrum	Factor	Actual	Limit	wargin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	_
	4880.00	Average	25.16	5.89	31.05	54.00	-22.95	
	4880.00	Peak	34.97	5.89	40.86	74.00	-33.14	




Operation Band	:BLE	Test Date	:2018-09-19
Fundamental Frequency	:2480 MHz	Temp./Humi.	:21 deg_C / 61 RH
Operation Mode	:Tx CH HIGH	Engineer	:Tin
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

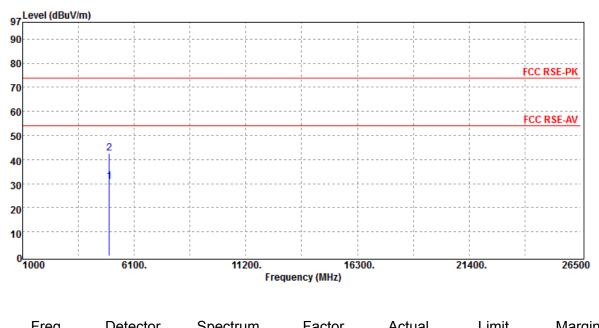

	Freq.	Delector	Spectrum	Factor	Actual	LIMIL	wargin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	_
	4960.00	Average	24.78	6.05	30.83	54.00	-23.17	
	4960.00	Peak	36.58	6.05	42.63	74.00	-31.37	



Operation Band	:BLE	Test Date	:2018-09-19
Fundamental Frequency	:2480 MHz	Temp./Humi.	:21 deg_C / 61 RH
Operation Mode	:Tx CH HIGH	Engineer	:Tin
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

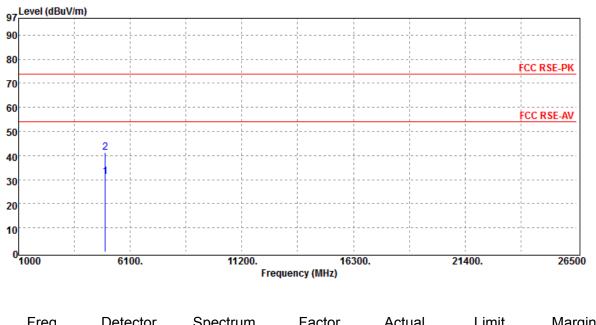


	rieq.	Delector	opectium	T actor	Actual	LIIIII	margin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	-
	4960.00	Average	25.11	6.05	31.16	54.00	-22.84	
	4960.00	Peak	35.35	6.05	41.40	74.00	-32.60	



DATA RATE 2 Mbps (BT5.0):

Operation Band :BLE 2M Fundamental Frequency :2402 MHz **Operation Mode** :Tx CH LOW EUT Pol. :E2 Plane

Test Date :2018-09-19 Temp./Humi. :21 deg_C / 61 RH Engineer :Tin :VERTICAL Measurement Antenna Pol.

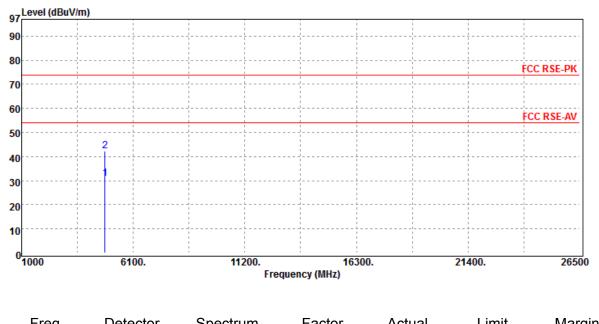


	Fieq.	Delector	Spectrum	Factor	Actual	LIIIII	Margin	
		Mode	Reading Level		FS	@3m		
-	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	_
	4804.00	Average	25.12	5.65	30.77	54.00	-23.23	
	4804.00	Peak	36.55	5.65	42.20	74.00	-31.80	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Operation Band Fundamental Frequency	:BLE_2M :2402 MHz	Test Date Temp./Humi.	:2018-09-19 :21 deg_C / 61 RH
Operation Mode	:Tx CH LOW	Engineer	:Tin
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

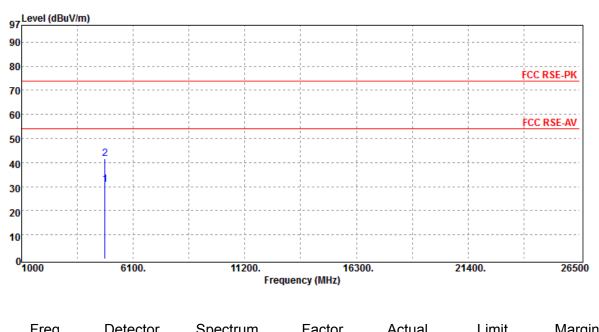

	TTEY.	Delecioi	Spectrum	T actor	Actual	LIIIII	Maryin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	_
	4804.00	Average	25.23	5.65	30.88	54.00	-23.12	
	4804.00	Peak	35.86	5.65	41.51	74.00	-32.49	




Operation Band Fundamental Frequency	:BLE_2M :2440 MHz	Test Date Temp./Humi.	:2018-09-19 :21 deg_C / 61 RH
Operation Mode	:Tx CH MID	Engineer	:Tin
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

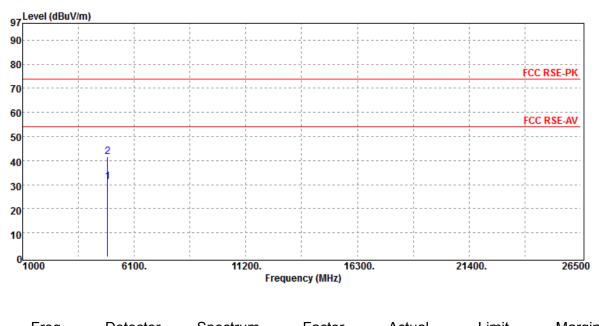

	⊢req.	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	
	4880.00	Average	25.16	5.89	31.05	54.00	-22.95	
	4880.00	Peak	35.67	5.89	41.56	74.00	-32.44	




Operation Band Fundamental Frequency	:BLE_2M :2440 MHz	Test Date Temp./Humi.	:2018-09-19 :21 deg_C / 61 RH
Operation Mode	:Tx CH MID	Engineer	:Tin
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

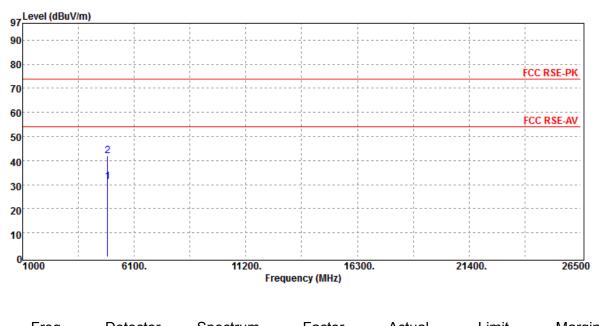

	⊢req.	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	
	4880.00	Average	25.24	5.89	31.13	54.00	-22.87	
	4880.00	Peak	35.93	5.89	41.82	74.00	-32.18	




Operation Band Fundamental Frequency Operation Mode	:BLE_2M :2480 MHz :Tx CH HIGH	Test Date Temp./Humi.	:2018-09-19 :21 deg_C / 61 RH :Tin
		0	

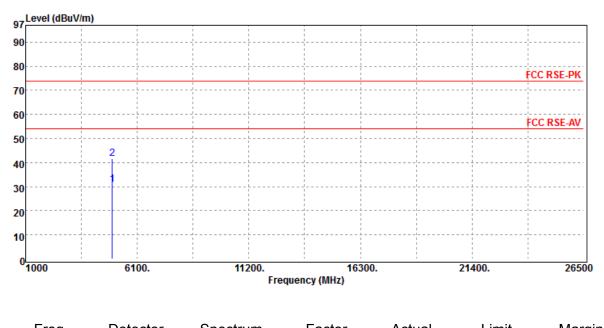

⊢req.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
 MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	
4960.00	Average	24.99	6.05	31.04	54.00	-22.96	
4960.00	Peak	35.64	6.05	41.69	74.00	-32.31	



Operation Band Fundamental Frequency	:BLE_2M :2480 MHz	Test Date Temp./Humi.	:2018-09-19 :21 deg_C / 61 RH
Operation Mode	:Tx CH HIGH	Engineer	:Tin
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

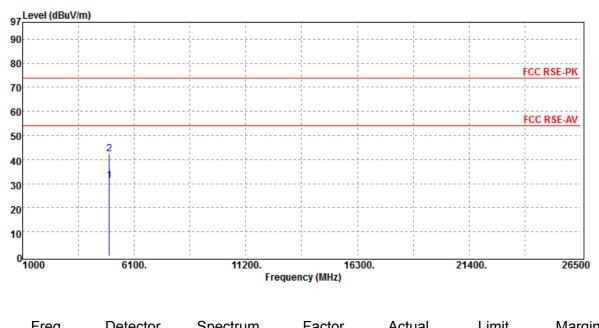

	Freq.	Delector	Spectrum	Factor	Actual	LIMIL	wargin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	_
	4960.00	Average	25.19	6.05	31.24	54.00	-22.76	
	4960.00	Peak	36.38	6.05	42.43	74.00	-31.57	



11. PEAK POWER SPECTRAL DENSITY


11.1 Standard Applicable:

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

11.2 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
EXA Spectrum Analyzer	Agilent	N9010A	MY57120290	02/14/2018	02/13/2019
DC Power Supply	Anritsu	E3640A	MY52410006	11/28/2017	11/27/2018
Attenuator	Mini-Circuit	BW-S10W2+	2	01/02/2018	01/01/2019
DC Block	Mini-Circuits	BLK-18-S+	1	01/02/2018	01/01/2019
Coaxial Cables	N/A	WK CE Cable	N/A	01/02/2018	01/01/2019
Notebook	Lenovo	T440P	P0000564	N/A	N/A

11.3 Test Set-up:



11.4 Measurement Procedure:

- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Set the span to 1.5 times the DTS channel bandwidth.
- 4. Set the RBW = 3 kHz & VBW = 10 kHz.
- 5. For defining Restricted Band Edge Limit: Set the RBW = 100kHz & VBW = 300 kHz.
- 6. Detector = peak.
- 7. Sweep time = auto couple.
- Trace mode = max hold.
- 9. Allow trace to fully stabilize.
- 10. Use the peak marker function to determine the maximum amplitude level.

Ref 另有說明,此報告結果僅對測試之樣品員,同時此樣品僅保留的玩力。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd.



11.5 Measurement Result: DATA RATE 1 Mbps:

BLE mode RF Power Maximum Frequency Density Limit Result (MHz) (dBm) (dBm) PASS 2402 -9.728 2440 8 -8.49 PASS -10.22 2480 8 PASS

NOTE: cable loss as 0.4dB that offsets in the spectrum


DATA RATE 2 Mbps (BT 5.0):

BLE mode			
Frequency (MHz)	RF Power Density (dBm)	Maximum Limit (dBm)	Result
2402	-14.10	8	PASS
2440	-12.69	8	PASS
2480	-14.28	8	PASS

NOTE: cable loss as 0.4dB that offsets in the spectrum

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



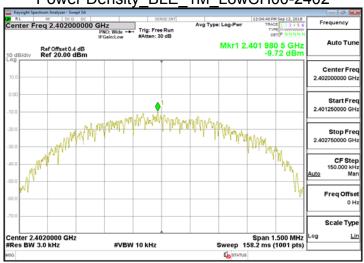


Power Density_BLE_1M_LowCH00-2402

Power Density BLE 1M MidCH19-2440




1M HighCH39-2480 Power Density BLE

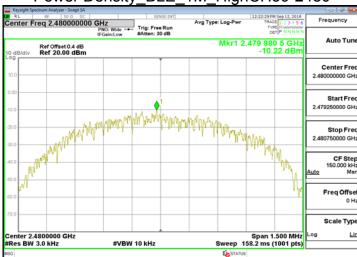



Power Density_BLE_2M_LowCH00-2402

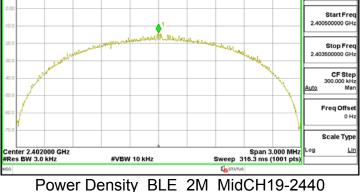



Power Density BLE 2M HighCH39-2480



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號 t (886-2) 2299-3279

台灣檢驗科技股份有限公司

f (886-2) 2298-0488

www.tw.sgs.com Member of SGS Group



12. ANTENNA REQUIREMENT

12.1 Standard Applicable:

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

If the transmitting antenna is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

12.2 Antenna Connected Construction:

The antenna is designed as permanently attached and no consideration of replacement. Please see EUT photo for details.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.