

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART E REQUIREMENT DFS TEST REPORT 0F

Applicant:	Sharp Corporation, Mobile Communication B.U. 2-13-1, Hachihonmatsu-Iida, Higashi-hiroshima-shi, Hiroshima, 739-0192, Japan
Manufacturer:	Sharp Corporation 1 Takumi-cho, Sakai-ku, Sakai City,Osaka 590-8522,Japan
Product Name:	Smart Phone
Report Number:	ER/2018/A0089
FCC ID:	APYHRO00264
FCC Rule Part:	§15.407, Cat: NII
Issue Date:	Nov. 08, 2018
Date of Test:	Oct. 03, 2018 ~ Oct. 23, 2018

Date of EUT Received: Oct. 03, 2018

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits.

The test results of this report relate only to the tested sample identified in this report.

Marcus Isen

Tested Bv:

Marcus Tseng / Sr. Engineer

Approved By:

Jay Lin / Asst. Supervisor





Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

When stated the results a winning that the only to the sample(s) ester and store an interview and store Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Revision History

Report Number	Revision	Description	Effected Page	Issue Date	Revised By
ER/2018/A0089	Rev.00	Initial creation of document	All	Nov. 08, 2018	Tiffany Kao

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Contents

1	GEN	IERAL INFORMATION	4
	1.1	Product Description	4
	1.2	Test Methodology of Applied Standards	
	1.3	Test Facility	
	1.4	Special Accessories	
	1.5	Equipment Modifications	5
2	SUM	IMARY OF TEST RESULT	6
3	MEA	SUREMENT UNCERTAINTY	6
4	TPC	and DFS MEASUREMENT	7
-		TPC: Standard Applicable	
		DFS: Standard Applicable	



GENERAL INFORMATION 1

1.1 Product Description

General:

Product Name:	Smart Phone
Hardware Version:	DVT
Software Version:	N/A
Power Supply:	3.85V from Rechargeable Li-ion Battery

WLAN 5GHz:

Wi-Fi	Frequency Range	Channels	Avg. Power (dBm)	Modulation Technology
	5180~5240	4	14.93	
11a_20	5260~5320	4	14.93	OFDM
	5500~5700	11	14.85	
11n HT/	5180~5240	4	HT: 14.90 (Worst Case)	
ac_VHT	5260~5320	4	HT: 14.87 (Worst Case)	OFDM
20M	5500~5700	11	HT: 14.82 (Worst Case)	
11n HT/	5190~5230	2	HT: 14.94 (Worst Case)	
ac_VHT	5270~5310	2	HT: 14.89 (Worst Case)	OFDM
40M	5510~5670	5	HT: 14.97 (Worst Case)	
44	5210	1	14.43	
11ac VHT80M	5290	1	14.31	OFDM
5530~5610 2 14.80				
			6QAM, QPSK, BPSK for OFD or OFDM in 802.11ac only	М
Transition Rate: 802.11 n 802.11 n 802.11 a 802.11 a		802.11 n_2 802.11 n_4 802.11 ac_ 802.11 ac_ 802.11 ac_	6/9/12/18/24/36/48/54 Mbps 20MHz: 6.5 – 144.4Mbps 40MHz: 13.5 – 300.0Mbps 20MHz: 6.5 – 173.3Mbps 40MHz: 13.5 – 400.0Mbps 80MHz: 29.3 – 866.7Mbps	
Antenna Designation. 5250~535				1.1dBi (Aux)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, WuKungRoad, NewTaipeiIndustrialPark, WukuDistrict, NewTaipeiCity, Taiwan24803/新北市五股區新北產業園區五工路 134 號



1.2 Test Methodology of Applied Standards

FCC Part 15, Subpart E §15.407 FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02 FCC KDB 905462 D03 UNII Clients Without Radar Detection New Rules v01r02 Note: All test items have been performed and record as per the above standards.

Test Facility 1.3

SGS Taiwan Ltd. Electronics & Communication Laboratory No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803 (TAF code 0513)

FCC Registration Number and Designation are: 509634 / TW0001.

Special Accessories 1.4

There are no special accessories used while test was conducted.

Equipment Modifications 1.5

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for so days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



SUMMARY OF TEST RESULT 2

FCC Rules	Description Of Test	Result
§15.407(h)	TPC and DFS Measurement	Compliant

MEASUREMENT UNCERTAINTY 3

Test Items	Uncertainty
TPC and DFS Measurement	+/- 123.36 Hz
Temperature	+/- 0.65 °C
Humidity	+/- 4.6 %
DC / AC Power Source	DC= +/- 0.13%, AC=+/- 0.2%

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



4 TPC AND DFS MEASUREMENT

4.1. TPC: Standard Applicable

According to §15.407(h)(1), Transmit power control (TPC). U-NII devices operating in the 5.25-5.35 GHz band and the 5.47-5.725 GHz band shall employ a TPC mechanism. The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm. A TPC mechanism is not required for systems with an e.i.r.p. of less than 500 mW.

4.1.1. Result: N/A, The output power is less than 500mW.

4.2. DFS: Standard Applicable

According to §15.407(h)(2) and FCC KDB 905462 D02, Radar Detection Function of Dynamic Frequency Selection (DFS).

Radar Detection Function of Dynamic Frequency Selection (DFS). U-NII devices operating with any part of its 26 dB emission bandwidth in the 5.25-5.35 GHz and 5.47-5.725 GHz bands shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems. Operators shall only use equipment with a DFS mechanism that is turned on when operating in these bands. The device must sense for radar signals at 100 percent of its emission bandwidth. The minimum DFS detection threshold for devices with a maximum e.i.r.p. of 200 mW to 1 W is -64 dBm. For devices that operate with less than 200 mW e.i.r.p. and a power spectral density of less than 10 dBm in a 1 MHz band, the minimum detection threshold is -62 dBm. The detection threshold is the received power averaged over 1 microsecond referenced to a 0 dBi antenna. For the initial channel setting, the manufacturers shall be permitted to provide for either random channel selection or manual channel selection.

(i) Operational Modes. The DFS requirement applies to the following operational modes:

(A) The requirement for channel availability check time applies in the master operational mode.

(B) The requirement for channel move time applies in both the master and slave operational modes.

(ii) Channel Availability Check Time. A U-NII device shall check if there is a radar system already operating on the channel before it can initiate a transmission on a channel and when it has to move to a new channel. The U-NII device may start using the channel if no radar signal with a power level greater than the interference threshold values listed in paragraph (h)(2) of this section, is detected within 60 seconds.

(iii) Channel Move Time. After a radar's presence is detected, all transmissions shall cease on the operating channel within 10 seconds. Transmissions during this period shall consist of normal traffic for a maximum of 200 ms after detection of the radar signal. In addition, intermittent management and control signals can be sent during the remaining time to facilitate vacating the operating channel.

(iv) Non-occupancy Period. A channel that has been flagged as containing a radar system, either by a channel availability check or in-service monitoring, is subject to a non-occupancy period of at least 30 minutes. The non-occupancy period starts at the time when the radar system is detected.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



4.2.1. Limit Table 1: Applicability of DFS requirements prior to use of a channel

	Operational Mode		
Requirement	Master	Client(without radar detection)	Client(with radar detection)
Non-occupancy Period	Yes	Yes	Yes
DFS Detection Thresh- old	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation

	Operational Mode		
Requirement	Master Device or Client with Radar Detection	Client Without Radar Detection	
DFS Detection Threshold	Yes	Not required	
Cannel Closing Transmis- sion time	Yes	Yes	
Channel Move time	Yes	Yes	
U-NII Detection Bandwidth	Yes	Not required	



Additional requirements for devices with multiple bandwidth mode	Master Device or Client with Radar Detection	Client Without Radar Detection		
U-NII Detection Band- width and Statistical Performance Check	All BW modes must be tested	Not required		
Channel Move Time and Channel Closing Trans- mission Time	Test using widest BW mode available	Test using the widest BW mode available for the link		
All other tests Any single BW mode Not required				
Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the				

edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

Table 3:

Interference Threshold values, Master or Client incorporating In-Service Monitoring

Maximum Transmit Power	Value	
	(See Notes 1, 2, and 3)	
$EIRP \ge 200 \text{ milliwatt}$	-64 dBm	
EIRP < 200 milliwatt and	-62 dBm	
power spectral density < 10 dBm/MHz		
EIRP < 200 milliwatt that do not meet the power spectral	-64 dBm	
density requirement		
Note 1: This is the level at the input of the receiver assuming a 0 dBi	receive antenna.	
Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the		
test signal is at or above the detection threshold level to trigger a DFS response.		
Note3: EIRP is based on the highest antenna gain. For MIMO device	es refer to KDB Publication 662911	
D01.		

Devices	DFS Threshold	
Devices with an e.i.r.p. < 200 mW AND a	-62 dBm	
Power Spectral Density < 10 dBm/MHz		
Devices with	-64 dBm	
$200 \text{ mW} \le \text{e.i.r.p.} \le 1 \text{ W}$		
Note: The detection threshold power is the received power, averaged over a 1-microsecond		
reference to a 0 dBi antenna.		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Table 4: DFS Response requirement values

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds
	See Note 1.
Channel Closing Transmission Time	200 milliseconds + an
	aggregate of 60
	milliseconds over
	remaining 10 second
	period.
	See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the U-
	NII 99% transmission
	power bandwidth. See
	Note 3.
Note 1: Channel Move Time and the Channel Closing	Transmission Time should be performed with
Radar Type 0 The measurement timing begins at the end	of the Radar Type 0 burst

Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Table 5: Radar Test Waveforms Short Pulse Radar

Radar	Pulse	PRI	Number of Pulses	Minimum	Minimum
Type	Width	(µsec)		Percentage of	Number
	(µsec)			Successful	of
				Detection	Trials
0	1	1428	18	See Note 1	See Note
					1
1	1	Test A: 15 unique	$\left(\begin{pmatrix} 1 \end{pmatrix} \right)$	60%	30
		PRI values	360		
		randomly selected	Roundun		
		from the list of 23	$\left(\frac{19 \cdot 10^6}{19 \cdot 10^6} \right)$		
		PRI values in	PRI		
		Table 5a	((,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,		
		Test B: 15 unique			
		PRI values			
		randomly selected			
		within the range			
		of 518-3066 µsec,			
		with a minimum			
		increment of 1			
		µsec, excluding			
		PRI values			
		selected in Test A			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate ((Radar Types	1-4)		80%	120
			sed for the detection ba	ndwidth test, ch	annel move
time, and cl	hannel closing	time tests.			

Long Pulse Radar

	-			~			
Radar	Pulse	Chirp	PRI	Number	Number	Minimum	Minimum
Type	Width	Width	(µsec)	of Pulses	of Bursts	Percentage of	Number of
	(µsec)	(MHz)		per Burst		Successful	Trials
						Detection	
5	50-100	5-20	1000-	1-3	8-20	80%	30
			2000				

Frequency Hopping Radar


Radar	Pulse	PRI	Pulses	Hopping	Hopping	Minimum	Minimum
Туре	Width (µsec)	(µsec)	per Hop	Rate (kHz)	Sequence Length	Percentage of Successful	Number of Trials
					(msec)	Detection	
6	1	333	9	0.333	300	70%	30

The applicant of this given application confirms that information regarding the parameters of the detected Radar Waveforms is not available to the end user.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unwult und offender meru be particulated to the low: pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



4.2.2. Test Setup

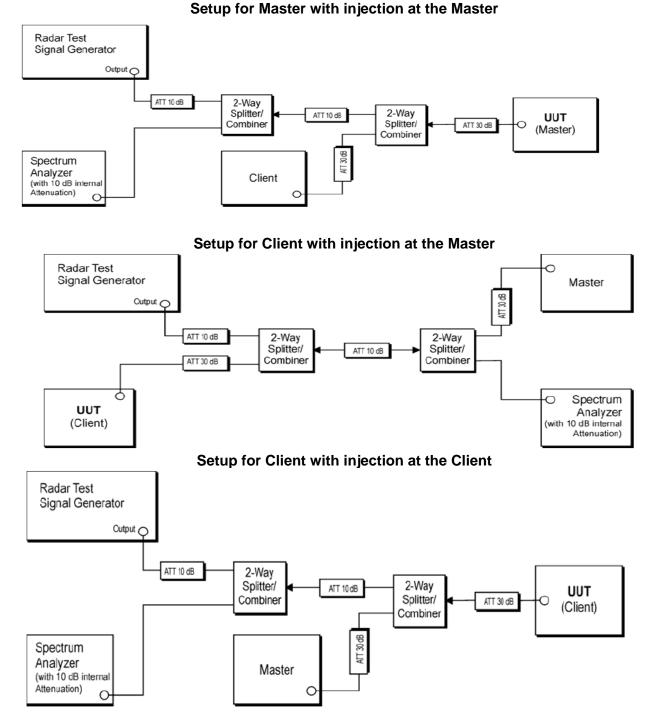

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

4.2.3. Test Equipment Used:

4.2.3. 1651 Lyui			1	1	1
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
PXA Spectrum Analyzer	Agilent	N9030A	MY53120760	04/09/2018	04/08/2019
Signal Generator	Agilent	N5172B	MY53050661	04/05/2018	04/04/2019
Power Splitter	Mini-Circuits	ZN2PD-9G-S+	N/A	01/02/2018	01/01/2019
Power Splitter	Mini-Circuits	ZN2PD-9G-S+	N/A	01/02/2018	01/01/2019
Attenuator	Agilent	8495B	3308A22470	01/02/2018	01/01/2019
Attenuator	HP	8494B	2812A170605	01/02/2018	01/01/2019
Notebook	Lenovo	T440P	P0000564	N/A	N/A
Access Point	Cisco	AIR-LAP1262N-A-K9	FTX1605E1G1 FCC ID: LDK102073	N/A	N/A

4.2.4. Description of EUT:

EUT operates over the 5250-5350MHz and 5470-5725MHz ranges and EUT is a slave device (client equipment) w/o radar detection and DFS capability.

EUT has no TPC mechanism implemented with no adjustment of lowest, and highest power, but the level of power emission stays at fixed level.

The EUT utilizes the 802.11ac 80M architecture, with a nominal channel bandwidth of 80MHz WLAN traffic is generated by streaming the mpeg file from the master to slave in full monitor video mode using the media player.

The rated output power of the master unit is >23dBm(EIRP).therefore the required interference threshold level is -62dBm.after correction for antenna gain and procedural adjustments, the required conducted threshold at the antenna port is -62dBm, and the master device as employed for the applicable DFS test is CISCO router whose FCC ID= LDK102061

While calibrate the path on antenna port of DFS test equipment (master), measurements equipments (spectrum) is ensured to be 50 Ohms, and therefore verification on antenna gain measurement can be ignored.

Conducted test was performed with appropriate adjustment, and calibration to ensure power from DFS simulator injects to antenna port of DFS test equipment (DFS) is -62dBm

Message or files that is used for communication between Master and Client: IP based system:

For the required channel loading, the full motion, 30 frames per second MPEG video file from http://ntiacsd.ntia.doc.gov/dfs/ was streamed from a network on a test bench (server of the storage to download the mandatory format of Video file), via the DFS Master device, to the UE (mobile phone).


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exenerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



4.2.5. Test results Calibration plots for each of the required radar waveforms Radar type 0

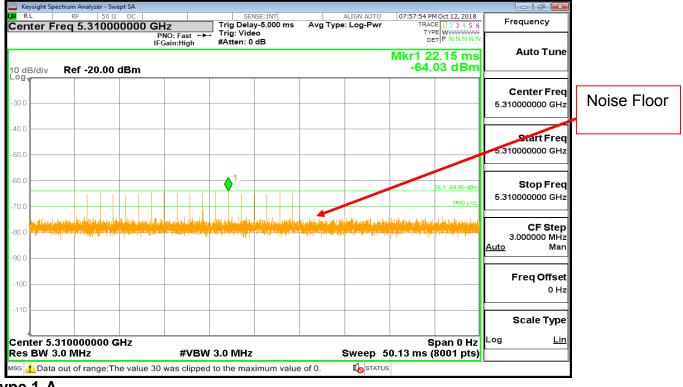

Radar type 1-A

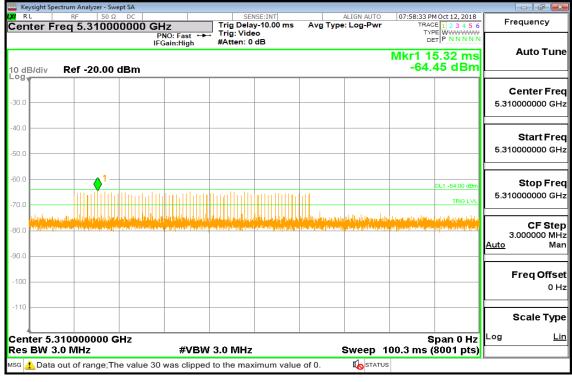

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Radar type 1-B

	Spectrum Analyze								- F	
X RL Center	^{RF} Freq 5.31	50 Ω DC 0000000	GHz PNO: Fast ↔	Trig Dela	y-10.00 ms	ALIGN AUTO e: Log-Pwr	TRAC	MOct 12, 2018 E 1 2 3 4 5 6 E WWWWWW	Frequency	У
10 dB/div	Ref -20	.00 dBm	IFGain:High	#Atten: 0		 	Mkr1 3	4.55 ms 12 dBm	Auto T	ſur
- og									Center I 5.310000000	
40.0 50.0									Start F 5.310000000	
70.0			1		alaalaan			DL1 -64.00 dBm TRIG LVL	Stop F 5.310000000	
JEL, LD			l (Na pla (Na pla pla pla pla pla pla pla pla pla pl						CF \$ 3.000000 <u>Auto</u>	
100									Freq Of	ff 0
enter	5.3100000	00 GHz					s	pan 0 Hz	Scale T	гу
	/ 3.0 MHz	re [.] The value	#VBW 30 was clipped	1 3.0 MHz	rimum valu	Sweep 1		8001 pts)		_

Radar type 2

								lyzer - Swe	Spectrum Ana	
Frequency	08:00:12 PM Oct 12, 2018 TRACE 1 2 3 4 5 6	ALIGN AUTO : Log-Pwr		NSE:INT y-800.0 μs	Trig Dela	Hz	DC	50 Ω 31000	_R , Frea 5.	enter
Auto Tu	Mkr1 5.609 ms				Trig: Vide #Atten: 0	NO: Fast ↔ Gain:High	P			
	-64.34 dBm						dBm	20.00 a	Ref -	dB/div
Center Fr										
5.310000000 0										0.0
Start F										
5.310000000 0										0.0
		. 1								
5.310000000	DL1 -64.00 dBm	<u>}.</u>								
CF S 3.000000 M	la provinsi presi a para da la facilita da la provinsi La facilita da la constante da constante da la constante						in the part of the second	din allan An allan	terniteite aber	
<u>Auto</u> I	n na na sana na sana na sana sa	and all the de	ahahan tahuha	n de la constante de la constan La constante de la constante de	d had a dina da	a ang dalara kara l	allistin stations in the	al da sub	alina Alina sinal	י ין זוו י ס.
Freq Off										
c										00
Scale Ty										10
Log	Crean O Ha							000 0	240000	
	Span 0 Hz .000 ms (8001 pts)	Sweep 8			3.0 MHz	#VBW			5.310000 3.0 MH:	
	;	I STATUS	e of 0.	imum value	to the max	was clipped	e value 30	ange;Th	ta out of ra	a 🔥 Dat

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



Radar type 3

											ept SA	er - Sw	Analy	nt Spectrum	
Frequency	40c+12 2018 ⊂[1] 2 3 4 5 6 E[WWWWWWW	INAU	LIGN AUTO		ISE:INT y-1.000 ms					00 GH		50 Ω 1000		r Freq	ente
Auto Tune	.766 ms 19 dBm	Mkr1 2				tten: 0		ast ↔ ligh	NO: F Gain:I	IFO	dBr	0.00	ef -20	iv Re	0 dB/d
Center Fred 5.310000000 GHz															.og
Start Free 5.310000000 GH:															40.0
Stop Fred 5.310000000 GHz	DL1 -64.00 dBm TRIG LVL									1 					60.0
CF Step 3.000000 MH: <u>Auto</u> Mar	n lagt leget by the second	a ka ka su ka	naindhaid Mary Marindi (1011/101	d pelogitat peloadigetpel	randon oddar Adoladada	oʻlar Istalygi	n <mark>i hi</mark>	Harry Har Harry Harry	11. 11. 11.	n all the Manual	landa Ny si	nd _{boy}	lar bai Air feil	anodytono Affanial on	80.0
Freq Offse 0 H															-100
Scale Type															-110
Log <u>Lin</u>	pan 0 Hz 8001 pts)		Sweep 1			MHz	3.0	¢VB₩			Hz	00 G		· 5.310 N 3.0 N	
		6		e of 0.	imum valu	e max	l to th	clipped	was	lue 30	ie va	ge;Th	of ran	ata out	sg 🤔 D


Radar type 4

50 Ω DC SENSE:INT ALIGN AUTO 08:02:00 PM Oct 12, 2018 .310000000 GHz Trig Delay-1.000 ms Avg Type: Log-Pwr TRACE 12, 24 5 6 PNO: Fast → IFGain:High Trig: Video Trig: Video Trig: Video	ency
IFGain:High #Atten: 0 dB	
-20.00 dBm -64.08 dBm	to Tun
Cente 5.310000	ter Fre 1000 G⊦
Star 5.310000	artFre 1000 G⊦
Image: Contract of the state of th	op Fre 1000 G⊦
	CF Ste 000 M⊢ Ma
Freq	qOffse 0⊦
Scale	le Typ
00000 GHz Span 0 Hz Iz #VBW 3.0 MHz Sweep 10.13 ms (8001 pts)	Li

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, WuckungRoad, NewTaipelindustrialPark, WukuDistrict, NewTaipelCity, Taiwan 24803/新北市五股區新北產業園區五工路 134 號




WLAN Payload

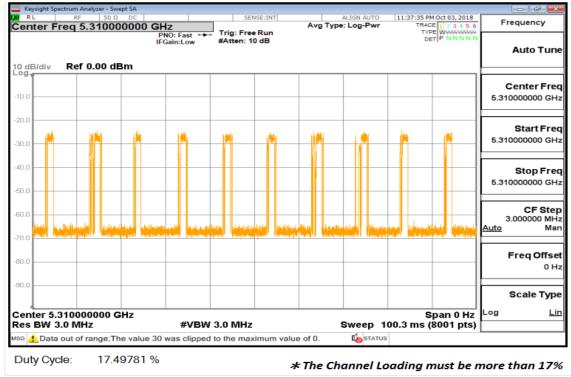


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Radar Type 1 Channel Move Transmission Time

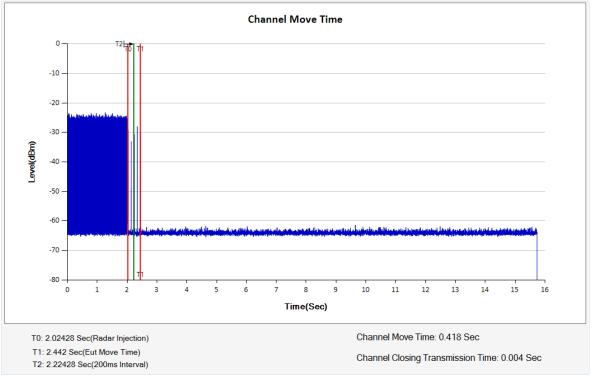

Radar Type 1 Channel Closing Transmission Time

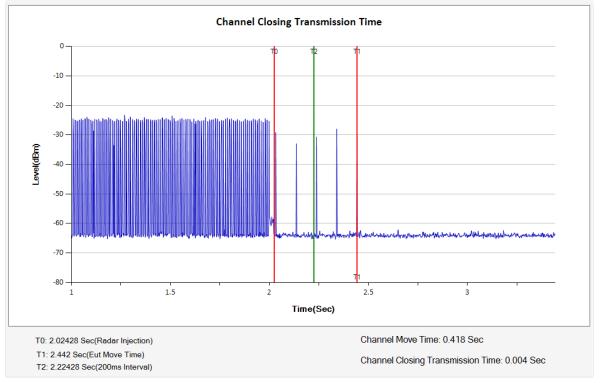

Verdict: Note: narrowing the sweep time as the good engineering process for the verification of transmission closing in 200ms

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

除非方方就可 近報告題未僅對測測之後為負負 一時式後為負負 一時式後為使用的 ため 報告本題本公司書面計 「 小 可 的位程 ? This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized attention, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law