

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

| | OF |
|----------------|---|
| Applicant: | Sharp Corporation, Mobile Communication B.U. 2-13-1, Hachihonmatsu-Iida, Higashi-hiroshima-shi, Hiroshima 739-0192, Japan |
| Manufacturer: | Sharp Corporation 1 Takumi-cho, Sakai-ku, Sakai-Shi, Osaka 590-8522, Japan |
| Product Name: | Smart Phone |
| Report Number: | ER/2018/90160 |
| FCC ID: | APYHRO00267 |
| FCC Rule Part: | §15.247, Cat: DTS |
| Issue Date: | Oct. 16, 2018 |
| Date of Test: | Aug. 01, 2018 ~ Aug. 30, 2018 |
| | |

Date of EUT Received: Aug. 01, 2018

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits.

The test results of this report relate only to the tested sample identified in this report.

Marcus Iseng

Tested By:

Marcus Tsena / Sr. Engineer

Approved By: _CHUN; CHIZEH CHUN CHIEH CHEN / Asst.





Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Supervisor

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Revision History

| Report Number | Revision | Description | Effected Page | Issue Date | Revised By |
|---------------|----------|------------------------------|------------------|---------------|------------|
| ER/2018/90160 | Rev.00 | Initial creation of document | All | Oct. 16, 2018 | Elle Chang |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



Contents

| 2. SYSTEM TEST CONFIGURATION63. SUMMARY OF TEST RESULTS84. DESCRIPTION OF TEST MODES95. MEASUREMENT UNCERTAINTY116. CONDUCTED EMISSION TEST127. PEAK OUTPUT POWER MEASUREMENT168. 6dB BANDWIDTH MEASUREMENT199. CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT2310. RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT2811. PEAK POWER SPECTRAL DENSITY4512. ANTENNA REQUIREMENT47 | 1. GENERAL INFORMATION | 4 |
|---|---|----|
| 4. DESCRIPTION OF TEST MODES95. MEASUREMENT UNCERTAINTY116. CONDUCTED EMISSION TEST127. PEAK OUTPUT POWER MEASUREMENT168. 6dB BANDWIDTH MEASUREMENT199. CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT2310. RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT2811. PEAK POWER SPECTRAL DENSITY45 | 2. SYSTEM TEST CONFIGURATION | 6 |
| 5. MEASUREMENT UNCERTAINTY116. CONDUCTED EMISSION TEST127. PEAK OUTPUT POWER MEASUREMENT168. 6dB BANDWIDTH MEASUREMENT199. CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT2310. RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT2811. PEAK POWER SPECTRAL DENSITY45 | 3. SUMMARY OF TEST RESULTS | 8 |
| 6. CONDUCTED EMISSION TEST127. PEAK OUTPUT POWER MEASUREMENT168. 6dB BANDWIDTH MEASUREMENT199. CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT2310. RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT2811. PEAK POWER SPECTRAL DENSITY45 | 4. DESCRIPTION OF TEST MODES | 9 |
| 7. PEAK OUTPUT POWER MEASUREMENT.168. 6dB BANDWIDTH MEASUREMENT.199. CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT.2310. RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT.2811. PEAK POWER SPECTRAL DENSITY45 | 5. MEASUREMENT UNCERTAINTY | 11 |
| 8. 6dB BANDWIDTH MEASUREMENT199. CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT2310. RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT2811. PEAK POWER SPECTRAL DENSITY45 | 6. CONDUCTED EMISSION TEST | 12 |
| 9. CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT | 7. PEAK OUTPUT POWER MEASUREMENT | 16 |
| 10. RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT | 8. 6dB BANDWIDTH MEASUREMENT | 19 |
| 11. PEAK POWER SPECTRAL DENSITY 45 | 9. CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT | 23 |
| | 10. RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT | 28 |
| 12. ANTENNA REQUIREMENT 47 | 11. PEAK POWER SPECTRAL DENSITY | 45 |
| | 12. ANTENNA REQUIREMENT | 47 |



1. GENERAL INFORMATION

1.1 Product Description

General:

| Product Name: | Smart Phone |
|-------------------|--|
| Hardware Version: | DVT |
| Software Version: | N/A |
| Power Supply: | 3.85V from Rechargeable Li-ion Battery |

Bluetooth Low Energy:

| Frequency Range: | 2402 – 2480MHz | |
|----------------------|---------------------------------|--|
| Bluetooth Version | BT V4.2 (dual mode) | |
| Channel number: | 40 channels | |
| Modulation type: | GFSK | |
| Transmit Power: | 7.01dBm | |
| Antenna Designation: | Inverted-L Antenna, Gain: -2dBi | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



1.2 Test Methodology of Applied Standards

FCC Part 15, Subpart C §15.247

KDB 558074 D01 v05 DTS Meas. Guidance

ANSI C63.10:2013

Note: All test items have been performed and record as per the above standards.

1.3 Test Facility

SGS Taiwan Ltd. Electronics & Communication Laboratory No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803

(TAF code 0513)

FCC Registration Numbers are: 509634 / TW0001

1.4 Special Accessories

There are no special accessories used while test was conducted.

1.5 Equipment Modifications

There was no modification incorporated into the EUT.

1.6 Referencing test data across separate equipment authorization

The test report ER/2018/90160 under original FCC ID: APYHRO00265 are **fully** referred for the new FCC ID: APYHRO00267 in this report.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



2. SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plan. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz,. The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plan. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

Note:

The spectrum analyzer offset is derived from RF cable loss 0.4dB.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



2.5 Configuration of Tested System Fig. 2-1 Radiated Emission





Fig. 2-2 AC Power Line Conducted Emission



Fig. 2-2 Conducted (Antenna Port) Emission



| Table 2-1 | Equipment | Used in | Tested System |
|-----------|-----------|---------|---------------|
|-----------|-----------|---------|---------------|

| ltem | Equipment | Mfr/Brand | Model/Type No. | Series No. | Data Cable | Power Cord |
|------|----------------------------|-----------|----------------|------------|------------|------------|
| 1. | Bluetooth Test Software | N/A | N/A | N/A | N/A | N/A |
| 2. | DC Power Supply | Anritsu | E3640A | KR93300208 | N/A | Unshielded |
| 3. | Notebook | Lenovo | T440P | P0000564 | Shielded | Unshielded |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



3. SUMMARY OF TEST RESULTS

| FCC Rules | Description Of Test | Result |
|-----------------------|--|-----------|
| §15.207(a) | AC Power Line Conducted Emission | Compliant |
| §15.247(b) (3) | Peak Output Power | Compliant |
| §15.247(a)(2) | 6dB Bandwidth | Compliant |
| §15.247(d) | Conducted Band Edge and Spurious Emission | Compliant |
| §15.247(d) | Radiated Band Edge and Spurious Emission | Compliant |
| §15.247(e) | Peak Power Density | Compliant |
| §15.203 §15.247(b) | Antenna Requirement | Compliant |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



4. DESCRIPTION OF TEST MODES

4.1 Operated in 2400 ~ 2483.5MHz Band

40 channels are provided for Bluetooth LE

| CHANNEL | FREQUENCY | CHANNEL | FREQUENCY | CHANNEL | FREQUENCY |
|---------|-----------|---------|-----------|---------|-----------|
| 0 | 2402 MHz | 14 | 2430 MHz | 28 | 2458 MHz |
| 1 | 2404 MHz | 15 | 2432 MHz | 29 | 2460 MHz |
| 2 | 2406 MHz | 16 | 2434 MHz | 30 | 2462 MHz |
| 3 | 2408 MHz | 17 | 2436 MHz | 31 | 2464 MHz |
| 4 | 2410 MHz | 18 | 2438 MHz | 32 | 2466 MHz |
| 5 | 2412 MHz | 19 | 2440 MHz | 33 | 2468 MHz |
| 6 | 2414 MHz | 20 | 2442 MHz | 34 | 2470 MHz |
| 7 | 2416MHz | 21 | 2444 MHz | 35 | 2472 MHz |
| 8 | 2418 MHz | 22 | 2446 MHz | 36 | 2474 MHz |
| 9 | 2420 MHz | 23 | 2448 MHz | 37 | 2476 MHz |
| 10 | 2422 MHz | 24 | 2450 MHz | 38 | 2478 MHz |
| 11 | 2424 MHz | 25 | 2452 MHz | 39 | 2480 MHz |
| 12 | 2426 MHz | 26 | 2454 MHz | | |
| 13 | 2428 MHz | 27 | 2456 MHz | | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



4.2 The Worst Test Modes and Channel Details

- 1. The EUT has been tested under operating condition.
- 2. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

RADIATED EMISSION TEST:

| | RADIATED EMISSION TEST (BELOW 1 GHz) | | | | | |
|--------------|--------------------------------------|-------------------|--------------------|---------------------|--|--|
| MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION | DATA RATE (Mbps) | | |
| Bluetooth LE | 0 to 39 | 19 | GFSK | 1 | | |
| | RADIATE | ED EMISSION | TEST (ABOVE 1 GHz) | | | |
| MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION | DATA RATE (Mbps) | | |
| Bluetooth LE | 0 to 39 | 0,19,39 | GFSK | 1 | | |

Note: The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for Bluetooth BR+EDR Transmitter for channel Low, Mid and High, the worst case H position was reported.

ANTENNA PORT CONDUCTED MEASUREMENT:

| CONDUCTED TEST | | | | |
|----------------|----------------------|-------------------|------------|---------------------|
| MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION | DATA RATE (Mbps) |
| Bluetooth LE | 0 to 39 | 0,19,39 | GFSK | 1 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



5. MEASUREMENT UNCERTAINTY

| Test Items | Uncertainty |
|--|-----------------------------|
| AC Power Line Conducted Emission | +/- 2.586 dB |
| Peak Output Power | +/- 0.84 dB |
| 6dB Bandwidth | +/- 51.33 Hz |
| 100 KHz Bandwidth Of Frequency Band Edges | +/- 0.84 dB |
| Peak Power Density | +/- 1.3 dB |
| Temperature | +/- 0.65 °C |
| Humidity | +/- 4.6 % |
| DC / AC Power Source | DC= +/- 0.13%, AC= +/- 0.2% |

Radiated Spurious Emission:

| Measurement uncertainty | 9kHz – 30MHz: +/- 2.87 dB |
|---------------------------|----------------------------|
| | 30MHz - 180MHz: +/- 3.37dB |
| | 180MHz -417MHz: +/- 3.19dB |
| (Polarization : Vertical) | 0.417GHz-1GHz: +/- 3.19dB |
| | 1GHz - 18GHz: +/- 4.04dB |
| | 18GHz - 40GHz: +/- 4.04dB |

| Measurement uncertainty (Polarization : Horizontal) | 9kHz – 30MHz: +/- 2.87 dB |
|--|----------------------------|
| | 30MHz - 167MHz: +/- 4.22dB |
| | 167MHz -500MHz: +/- 3.44dB |
| | 0.5GHz-1GHz: +/- 3.39dB |
| | 1GHz - 18GHz: +/- 4.08dB |
| | 18GHz - 40GHz: +/- 4.08dB |

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非方有就明,比報告題未僅對測紙之樣症貝頁,问时此樣症僅的比, 你被否未認全な可會叫片了, 小可可力模和。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



6. CONDUCTED EMISSION TEST

6.1 Standard Applicable:

Frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

| Frequency range | Limits dB(uV) | | |
|-----------------|------------------|----------|--|
| MHz | Quasi-peak | Average | |
| 0.15 to 0.50 | 66 to 56 | 56 to 46 | |
| 0.50 to 5 | 56 | 46 | |
| 5 to 30 | 60 | 50 | |
| Note | | | |

1. The lower limit shall apply at the transition frequencies

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

6.2 Measurement Equipment Used:

| EQUIPMENT TYPE | MFR | MODEL NUMBER | SERIAL NUMBER | LAST CAL. | CAL DUE. |
|-------------------|-------------|-----------------|------------------|--------------|------------|
| EMI Test Receiver | R&S | ESCI7 | 100335 | 2018/02/02 | 2019/02/01 |
| LISN | SCHWARZBECK | NSLK 8127 | 8127-649 | 2018/05/18 | 2019/05/17 |

6.3 EUT Setup:


- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



6.4 Test SET-UP (Block Diagram of Configuration)

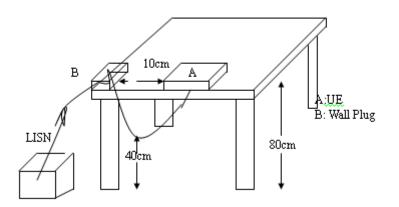

6.5 Measurement Procedure:

- 1. The EUT was placed on a table which is 0.8m above ground plan.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all phases of power being supplied by given UE are completed

6.6 Measurement Result:


Note: Refer to next page for measurement data and plots. Note2: The * reveals the worst-case results that closet to the limit

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



AC POWER LINE CONDUCTED EMISSION TEST DATA

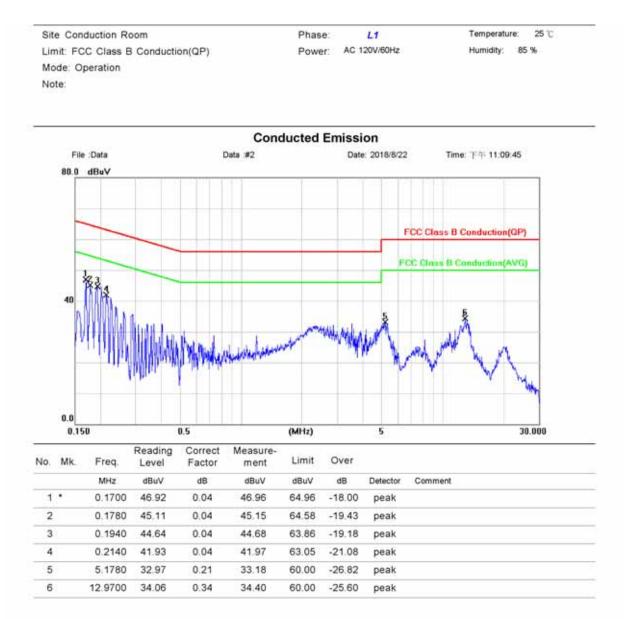


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, WuKungRoad, NewTaipeiIndustrialPark, WukuDistrict, NewTaipeiCity, Taiwan24803/新北市五股區新北產業園區五工路 134 號



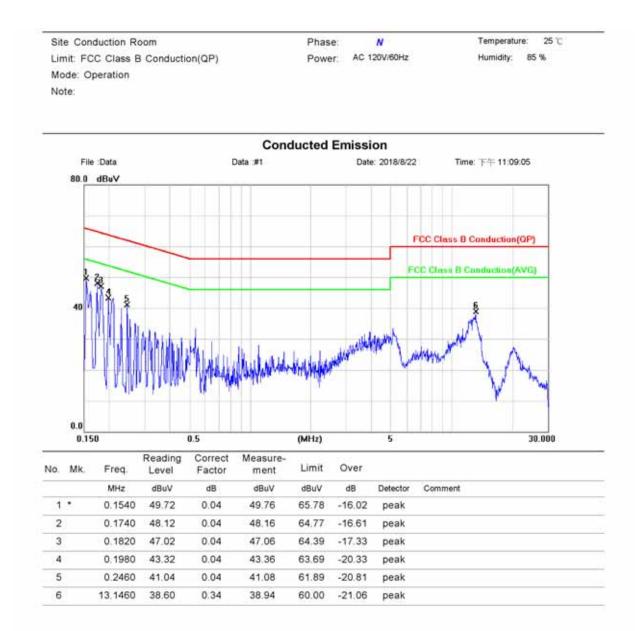

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

除非方有就明,比報告題未僅對測紙之樣症貝頁,问时此樣症僅的比, 你被否未認全な可會叫片了, 小可可力模和。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

S Taiwan I td No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



7. PEAK OUTPUT POWER MEASUREMENT

7.1 Standard Applicable:

For systems using digital modulation in the 2400-2483.5 MHz bands, the limit for peak output power is 1Watt.


If the transmitting antenna of directional gain greater than 6dBi are used the peak output power form the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6dBi.

In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of Antenna exceeds 6dBi.

7.2 Measurement Equipment Used:

| EQUIPMENT TYPE | MFR | MODEL NUMBER | SERIAL NUMBER | LAST CAL. | CAL DUE. |
|-------------------|--------------|-----------------|------------------|--------------|------------|
| Power Meter | Anritsu | ML2496A | 1804001 | 2018/02/01 | 2019/01/31 |
| Power Sensor | Anritsu | MA2411B | 1726104 | 2018/02/01 | 2019/01/31 |
| Power Sensor | Anritsu | MA2411B | 1726107 | 2018/02/01 | 2019/01/31 |
| DC Power Supply | Anritsu | E3640A | KR93300208 | 2018/08/15 | 2019/08/14 |
| Attenuator | Mini-Circuit | BW-S10W2+ | 2 | 2018/01/02 | 2019/01/01 |
| Notebook | Lenovo | T440P | P0000564 | N/A | N/A |

7.3 Test Set-up:



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



7.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter.


Power Meter:

It is used as the auxiliary test equipment to conduct the output power measurement.

- 4. Record the max. Reading as observed from Power Meter.
- 5. Repeat above procedures until all test default channel measured was complete.

Duty Factor

| | Duty Cycle (%) | Duty Factor (dB) | 1/T (kHz) | VBW setting (kHz) |
|-----|----------------|---------------------|--------------|-------------------------|
| BLE | 63.20 | 1.99 | 2.53165 | 3.00 |

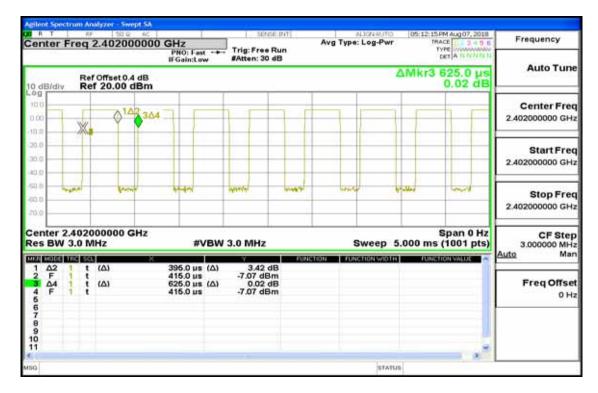

Duty Cycle Factor:10*log(1/(63.2/100))=1.99

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



7.5 Measurement Result:

| BLE mode | e: | | |
|----------|--------------------|--|-----------------|
| СН | Frequency (MHz) | Peak Power Output (dBm) | Required Limit |
| 0 | 2402 | 7.01 | 1 Watt = 30 dBm |
| 19 | 2440 | 6.78 | 1 Watt = 30 dBm |
| 39 | 2480 | 6.72 | 1 Watt = 30 dBm |
| BLE mode | 9: | | |
| СН | Frequency (MHz) | Max. Avg. Output include tune up tolerance Power (dBm) | Required Limit |
| 0 | 2402 | 6.98 | 1 Watt = 30 dBm |
| 19 | 2440 | 6.74 | 1 Watt = 30 dBm |
| 39 | 2480 | 6.70 | 1 Watt = 30 dBm |

*Note: Measured by power meter, cable loss as 0.4 dB that offsets on the power meter in Peak *Note: Measured by power meter, as cable loss+ Duty cycle factor that offsets on the power meter *Note: Max. Output include tune up tolerance Power is average power

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



8. 6DB BANDWIDTH MEASUREMENT


8.1 Standard Applicable

The minimum 6 dB bandwidth shall be at least 500 kHz.

8.2 Measurement Equipment Used

| EQUIPMENT TYPE | MFR | MODEL NUMBER | SERIAL NUMBER | LAST CAL. | CAL DUE. |
|--------------------------|---------------|-----------------|------------------|--------------|------------|
| EXA Spectrum Analyzer | Agilent | N9010A | MY50420195 | 2018/05/03 | 2019/05/02 |
| DC Power Supply | Anritsu | E3640A | KR93300208 | 2018/08/15 | 2019/08/14 |
| Attenuator | Mini-Circuit | BW-S10W2+ | 2 | 2018/01/02 | 2019/01/01 |
| DC Block | Mini-Circuits | BLK-18-S+ | 1 | 2018/01/02 | 2019/01/01 |
| Notebook | Lenovo | T440P | P0000564 | N/A | N/A |

8.3 Test Set-up:



8.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. For 6dB Bandwidth:

Set the spectrum analyzer as RBW=100 kHz, VBW= 3*RBW, Span = 5MHz, Detector=Peak, Sweep=auto.

- 5. Mark the peak frequency and –6dB (upper and lower) frequency.
- 6. Repeat above procedures until all test default channel is completed

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



8.5 Measurement Result:

| BLE mode | |
|-----------|-----|
| Frequency | 6dB |
| Frequency | |

| (MHz) | BW (MHz) | ыvv (MHz) | Result |
|-------|-------------|--------------|--------|
| 2402 | 0.686 | > 0.5 | PASS |
| 2440 | 0.686 | > 0.5 | PASS |
| 2480 | 0.686 | > 0.5 | PASS |

D/W

Note: Refer to next page for plots.

GS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



BLE mode 6dB Band Width Test Data CH-Low



6dB Band Width Test Data CH-Mid



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



6dB Band Width Test Data CH-High



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relatined to so days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

GS Taiwan I td No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



9. CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT


9.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

9.2 Measurement Equipment Used:

| EQUIPMENT TYPE | MFR | MODEL NUMBER | SERIAL NUMBER | LAST CAL. | CAL DUE. |
|--------------------------|---------------|-----------------|------------------|--------------|------------|
| EXA Spectrum Analyzer | Agilent | N9010A | MY50420195 | 2018/05/03 | 2019/05/02 |
| DC Power Supply | Anritsu | E3640A | KR93300208 | 2018/08/15 | 2019/08/14 |
| Attenuator | Mini-Circuit | BW-S10W2+ | 2 | 2018/01/02 | 2019/01/01 |
| DC Block | Mini-Circuits | BLK-18-S+ | 1 | 2018/01/02 | 2019/01/01 |
| Notebook | Lenovo | T440P | P0000564 | N/A | N/A |

9.3 Test SET-UP:



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



9.4 Measurement Procedure

Conducted Band Edge:

- 1. To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set start to edge frequency, and stop frequency of spectrum analyzer so as to encompass the spectrum to be examined.
- 5. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Detector = Peak, Sweep = auto
- 6. Mark the highest reading of the emission as the reference level measurement.
- 7. Set DL as the limit = reading on marker 1 20dBm
- 8. Marker on frequency, 2.3999GHz and 2.4836GHz, and examine shall 100 kHz immediately outside the authorized (2400~2483.5) be attenuated by 20dB at least relative to the maximum emission of power.
- 9. Repeat above procedures until all default test channel (low, middle, and high) was complete.

Conducted Spurious Emission:

- 1. To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Set RBW = 100 kHz & VBW=300 kHz, Detector =Peak, Sweep = Auto
- 4. Allow trace to fully stabilize.
- 5. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- 6. Repeat above procedures until all default test channel measured were complete.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document document experies to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



9.5 Measurement Result:

| Reference Level of Limit | | | | | |
|--------------------------|---------------------------|---|--|--|--|
| Frequency (MHz) | RF Power Density (dBm) | Reference Level of Limit = PSD - 20dB (dBm) | | | |
| 2402 | 6.37 | -13.63 | | | |
| 2440 | 6.09 | -13.91 | | | |
| 2480 | 6.44 | -13.56 | | | |

NOTE: cable loss as 0.4dB that offsets in the spectrum NOTE: Refer to next page for plots.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



Reference Level_BLE_1M_LowCH00-2402




Reference Level_BLE_1M_MidCH20-2442




Reference Level_BLE_1M_HighCH39-2480



Band Edge_BLE_1M_LowCH00-2402

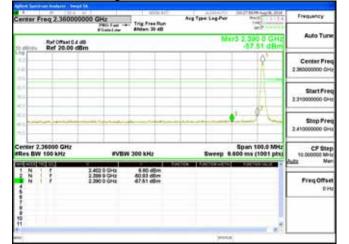

Band Edge_BLE_1M_HighCH39-2480

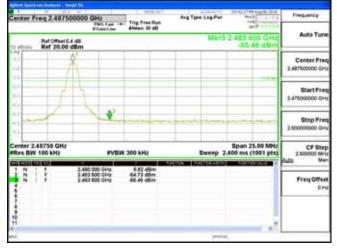

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Spurious Emission_BLE_1M_LowCH00-2402



Spurious Emission_BLE_1M_MidCH20-2442



Spurious Emission_BLE_1M_HighCH39-2480



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



10. RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT

10.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands must also comply with the §15.209 limit as below.

And according to §15.33(a) (1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

| Frequency (MHz) | Field strength (microvolts/meter) | Distance (meters) |
|--------------------|--------------------------------------|----------------------|
| 0.009-0.490 | 2400/F(kHz) | 300 |
| 0.490-1.705 | 24000/F(kHz) | 30 |
| 1.705-30 | 30 | 30 |
| 30-88 | 100 | 3 |
| 88-216 | 150 | 3 |
| 216-960 | 200 | 3 |
| Above 960 | 500 | 3 |

Note:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level $(dB\mu V/m) = 20 \log Emission level (dB\mu V/m)$

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document document experies to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



10.2 Measurement Equipment Used

| EQUIPMENT TYPE | MFR | MODEL NUMBER | SERIAL NUMBER | LAST CAL. | CAL DUE. |
|--------------------------|----------------------|-----------------|------------------|--------------|------------|
| Bi-log Antenna | SCHWAZBECK | VULB9168 | 378 | 2017/12/29 | 2018/12/28 |
| Horn Antenna | Schwarzbeck | BBHA9120D | 1441 | 2017/08/04 | 2019/08/03 |
| Horn Antenna | Schwarzbeck | BBHA9170 | 184 | 2017/12/12 | 2018/12/11 |
| Loop Antenna | ETS.LINDGREN | 6502 | 148045 | 2017/09/26 | 2018/09/25 |
| 3m Site NSA | SGS | 966 chamber | N/A | 2018/01/02 | 2019/01/01 |
| Spectrum Analyzer | Agilent | E4446A | MY51100003 | 2018/05/15 | 2019/05/14 |
| EMI Test Receiv- er | R&S | ESCI7 | 100335 | 2018/02/02 | 2019/02/01 |
| Pre-Amplifier | HP | 8449B | 3008A00578 | 2018/01/02 | 2019/01/01 |
| Pre-Amplifier | HP | 8447D | 2944A07676 | 2018/01/02 | 2019/01/01 |
| Pre-Amplifier | EMC Instru- ments | EMC184045B | 980135 | 2017/10/27 | 2018/10/26 |
| Attenuator | Mini-Circuit | BW-S10W2+ | 2 | 2018/01/02 | 2019/01/01 |
| 2GHz High Pass Filter | Micro-Tronics | HPM50110 | 36 | 2018/01/02 | 2019/01/01 |
| Filter 5150-5350 MHz | Micro-Tronics | BRM50703 | 1 | 2018/01/02 | 2019/01/01 |
| Low Loss Cable | Huber Suhner | 966_RX | 9 | 2018/01/02 | 2019/01/01 |
| Notebook | Lenovo | L430 | R9-X11BG | N/A | N/A |


Note: N.C.R refers to Not Calibrated Required.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




10.3 Test SET-UP


(A) Radiated Emission Test Set-UP Frequency Below 30MHz.

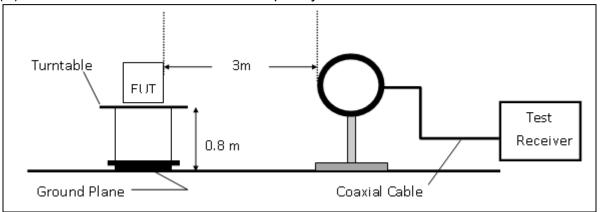

(B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

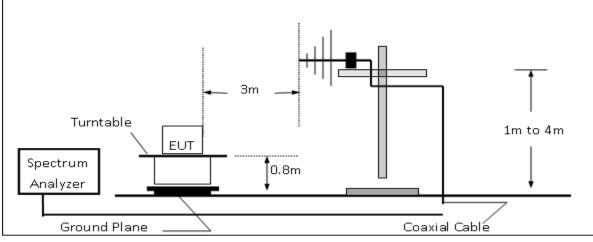

(C) Radiated Emission Test Set-UP Frequency Over 1 GHz

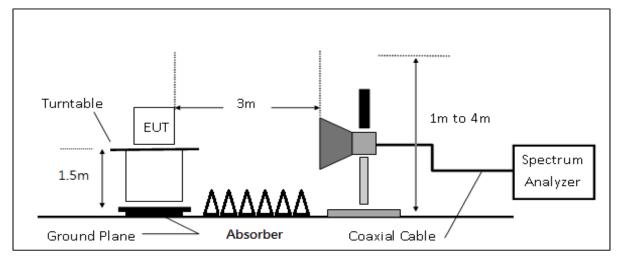

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

é

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, WuKungRoad, New TaipeiIndustrialPark, WukuDistrict, New TaipeiCity, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

| 台灣檢驗科技股份有限公司 t (886-2) 2299-3279 | f (886-2) 2298-0488 | www.tw.sgs.com | |
|----------------------------------|---------------------|----------------|--|
|----------------------------------|---------------------|----------------|--|



10.4 Measurement Procedure

- 1. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 2. The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 0.8m for frequency> 1GHz above ground plan.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 5. Set the spectrum analyzer as RBW=120 kHz and VBW=300 kHz for Peak Detector (PK) and Quasi-peak (QP) at frequency below 1 GHz.
- 6. Set the spectrum analyzer as RBW=1 MHz, VBW=3 MHz for Peak Detector at frequency above 1 GHz.
- 7. Set the spectrum analyzer as RBW=1 MHz, VBW=10 Hz (Duty cycle > 98%) or VBW ≥ 1/T (Duty cycle < 98%) for Average Detector at frequency above 1 GHz.
- 8. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 9. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 10. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. On spectrum, change spectrum mode in linear display mode, and reduce VBW = 10Hz if average reading is measured.
- 11. Repeat above procedures until all default test channel measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document document experies to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.



10.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

| Where | FS = Field Strength | CL = Cable Attenuation Factor (Cable Loss) |
|-------|------------------------|--|
| | RA = Reading Amplitude | AG = Amplifier Gain |
| | AF = Antenna Factor | |

Actual FS(dB μ V/m) = SPA. Reading level(dB μ V) + Factor(dB)

Factor(dB) = Antenna Factor(dBµV/m) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

10.6 Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) was not reported.

10.7 Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Radiated Band Edge Measurement Result (BLE mode)

| Operation Band | :BLE | Test Date | :2018-08-17 |
|-----------------------|------------------|--------------------------|-------------------|
| Fundamental Frequency | :2402 MHz | Temp./Humi. | :21 deg_C / 61 RH |
| Operation Mode | :Bandedge CH LOW | Engineer | :Tin |
| EUT Pol. | :E2 Plane | Measurement Antenna Pol. | :VERTICAL |

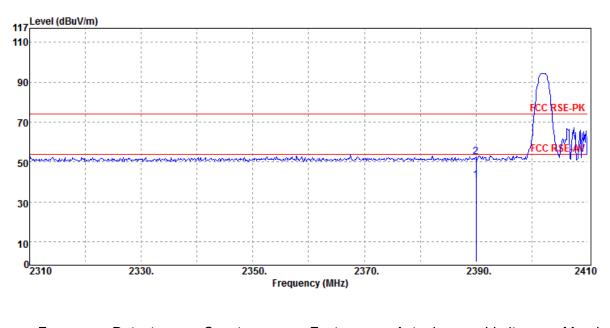

| Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin | |
|---------|----------|---------------|--------|--------|--------|--------|---|
| | Mode | Reading Level | | FS | @3m | | |
| MHz | PK/QP/AV | dBµV | dB | dBµV/m | dBµV/m | dB | _ |
| 2390.00 | Average | 40.70 | 0.20 | 40.90 | 54.00 | -13.10 | |
| 2390.00 | Peak | 52.44 | 0.20 | 52.64 | 74.00 | -21.36 | |
| | | | | | | | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format document is subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Report No.: ER/2018/90160 Page 34 of 47



Operation Band:BLEFundamental Frequency:2402 IOperation Mode:BandeEUT Pol.:E2 Place

:BLE :2402 MHz :Bandedge CH LOW :E2 Plane Test Date:2018-08-17Temp./Humi.:21 deg_C / 61 RHEngineer:TinMeasurement Antenna Pol.:HORIZONTAL

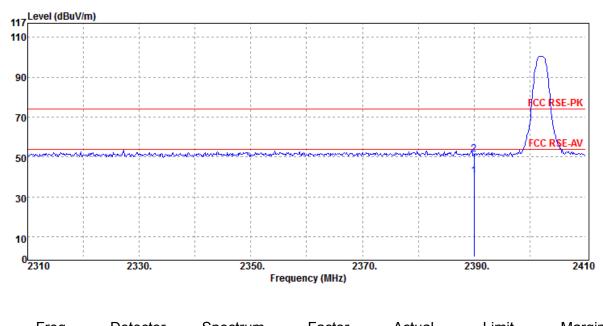

| Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin | |
|---------|----------|---------------|--------|--------|--------|--------|--|
| | Mode | Reading Level | | FS | @3m | | |
| MHz | PK/QP/AV | dBµV | dB | dBµV/m | dBµV/m | dB | |
| 2390.00 | Average | 40.16 | 0.20 | 40.36 | 54.00 | -13.64 | |
| 2390.00 | Peak | 51.15 | 0.20 | 51.35 | 74.00 | -22.65 | |
| | | | | | | | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

Report No.: ER/2018/90160 Page 35 of 47



Operation Band:BLEFundamental Frequency:2480 MOperation Mode:BandedEUT Pol.:E2 Plan

:BLE :2480 MHz :Bandedge CH HIGH :E2 Plane Test Date:2018-08-17Temp./Humi.:21 deg_C / 61 RHEngineer:TinMeasurement Antenna Pol.:VERTICAL

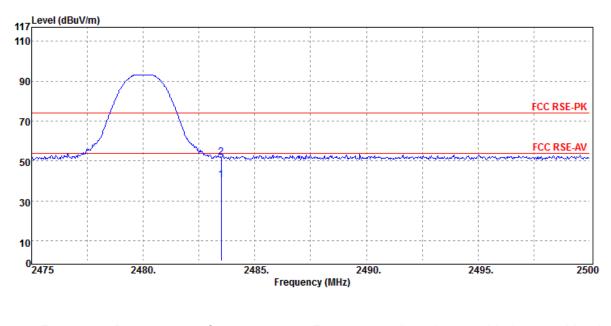

| | Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin | |
|---|---------|----------|---------------|--------|--------|--------|--------|---|
| | | Mode | Reading Level | | FS | @3m | | |
| _ | MHz | PK/QP/AV | dBµV | dB | dBµV/m | dBµV/m | dB | _ |
| | 2483.50 | Average | 40.05 | 0.53 | 40.58 | 54.00 | -13.42 | |
| | 2483.50 | Peak | 51.12 | 0.53 | 51.65 | 74.00 | -22.35 | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

Report No.: ER/2018/90160 Page 36 of 47



Operation Band:BLEFundamental Frequency:2480 MHzOperation Mode:Bandedge CH HIGHEUT Pol.:E2 Plane

Test Date:2018-08-17Temp./Humi.:21 deg_C / 61 RHEngineer:TinMeasurement Antenna Pol.:HORIZONTAL

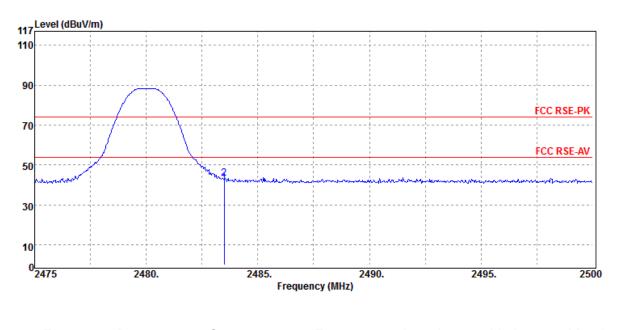

| | Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin | |
|---|---------|----------|---------------|--------|--------|--------|--------|---|
| | | Mode | Reading Level | | FS | @3m | | |
| _ | MHz | PK/QP/AV | dBµV | dB | dBµV/m | dBµV/m | dB | _ |
| | 2483.50 | Average | 40.43 | 0.53 | 40.96 | 54.00 | -13.04 | |
| | 2483.50 | Peak | 42.72 | 0.53 | 43.25 | 74.00 | -30.75 | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。




Radiated Spurious Emission Measurement Result: (BLE mode) For Frequency from 30MHz to 1000MHz

Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:BLE :2440 MHz :Tx CH MID :H Plane

Test Date Temp./Humi. Engineer :Tin Measurement Antenna Pol.

:2018-08-17 :21 deg C / 61 RH :VERTICAL

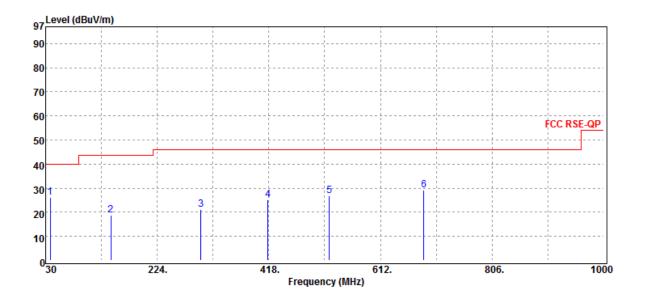

| | Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin |
|---|--------|----------|---------------|--------|--------|--------|--------|
| | | Mode | Reading Level | | FS | @3m | |
| _ | MHz | PK/QP/AV | dBµV | dB | dBµV/m | dBµV/m | dB |
| | 37.76 | Peak | 34.49 | -8.46 | 26.03 | 40.00 | -13.97 |
| | 143.49 | Peak | 26.68 | -7.77 | 18.91 | 43.50 | -24.59 |
| | 299.66 | Peak | 26.62 | -5.52 | 21.10 | 46.00 | -24.90 |
| | 416.06 | Peak | 28.03 | -2.91 | 25.12 | 46.00 | -20.88 |
| | 522.76 | Peak | 28.26 | -1.52 | 26.74 | 46.00 | -19.26 |
| | 687.66 | Peak | 27.46 | 1.76 | 29.22 | 46.00 | -16.78 |
| | | | | | | | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relatined to so days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

S Taiwan I td No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



Report No.: ER/2018/90160 Page 38 of 47

| Operation Band | :BLE | Test Date | :2018-08-17 |
|-----------------------|------------|--------------------------|-------------------|
| Fundamental Frequency | :2440 MHz | Temp./Humi. | :21 deg_C / 61 RH |
| Operation Mode | :Tx CH MID | Engineer | :Tin |
| EUT Pol. | :H Plane | Measurement Antenna Pol. | :HORIZONTAL |

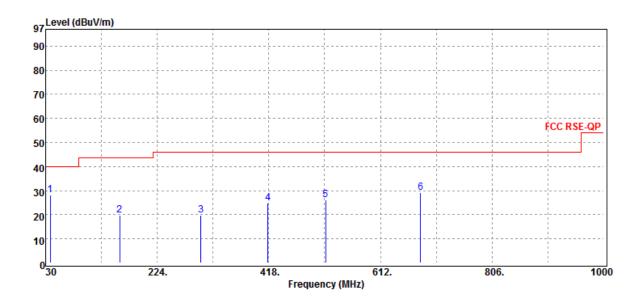

| Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin |
|--------|----------|---------------|--------|--------|--------|--------|
| | Mode | Reading Level | | FS | @3m | |
| MHz | PK/QP/AV | dBµV | dB | dBµV/m | dBµV/m | dB |
| 37.76 | Peak | 36.63 | -8.46 | 28.17 | 40.00 | -11.83 |
| 159.01 | Peak | 27.06 | -7.13 | 19.93 | 43.50 | -23.57 |
| 299.66 | Peak | 25.43 | -5.52 | 19.91 | 46.00 | -26.09 |
| 416.06 | Peak | 27.63 | -2.91 | 24.72 | 46.00 | -21.28 |
| 516.94 | Peak | 27.59 | -1.45 | 26.14 | 46.00 | -19.86 |
| 681.84 | Peak | 27.84 | 1.50 | 29.34 | 46.00 | -16.66 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be processing of this document is unlawful and offenders may be processing of this document is label. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan I td No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



Radiated Spurious Emission Measurement Result: (BLE mode)

| For Frequency above 1 GHz | | | | | | | | |
|---------------------------|------------|--------------------------|-------------------|--|--|--|--|--|
| Operation Band | :BLE | Test Date | :2018-08-17 | | | | | |
| Fundamental Frequency | :2402 MHz | Temp./Humi. | :21 deg_C / 61 RH | | | | | |
| Operation Mode | :Tx CH LOW | Engineer | :Tin | | | | | |
| EUT Pol. | :H Plane | Measurement Antenna Pol. | :VERTICAL | | | | | |

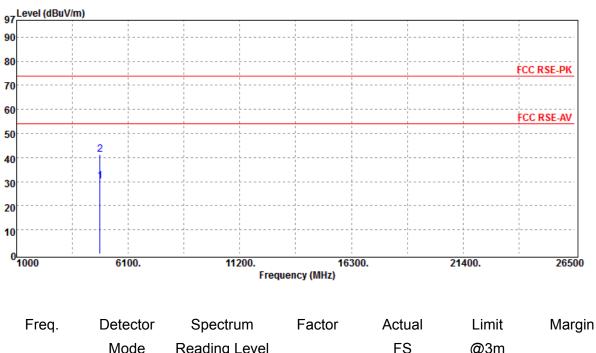

| | Mode | Reading Level | | FS | @3m | |
|---------|----------|---------------|------|--------|--------|--------|
| MHz | PK/QP/AV | dBµV | dB | dBµV/m | dBµV/m | dB |
| 4804.00 | Average | 24.68 | 5.65 | 30.33 | 54.00 | -23.67 |
| 4804.00 | Peak | 35.69 | 5.65 | 41.34 | 74.00 | -32.66 |


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Report No.: ER/2018/90160 Page 40 of 47

| Operation Band | :BLE | Test Date | :2018-08-17 |
|-----------------------|------------|--------------------------|-------------------|
| Fundamental Frequency | :2402 MHz | Temp./Humi. | :21 deg_C / 61 RH |
| Operation Mode | :Tx CH LOW | Engineer | :Tin |
| EUT Pol. | :H Plane | Measurement Antenna Pol. | :HORIZONTAL |
| EUTTOI. | | Measurement Antenna Pol. | INTERIZONTAL |

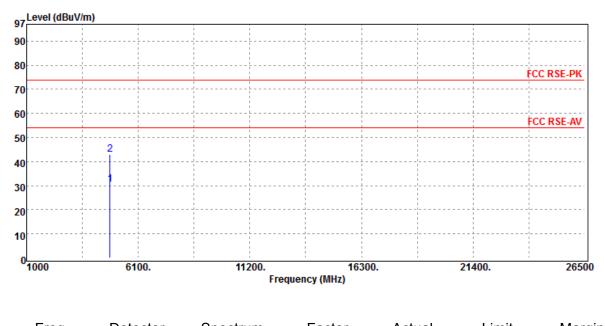


| | ⊢req. | Detector | Spectrum | Factor | Actual | Limit | Margin | |
|---|---------|----------|---------------|--------|--------|--------|--------|--|
| | | Mode | Reading Level | | FS | @3m | | |
| - | MHz | PK/QP/AV | dBµV | dB | dBµV/m | dBµV/m | dB | |
| | 4804.00 | Average | 24.79 | 5.65 | 30.44 | 54.00 | -23.56 | |
| | 4804.00 | Peak | 37.47 | 5.65 | 43.12 | 74.00 | -30.88 | |
| | | | | | | | | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: ER/2018/90160 Page 41 of 47

| Operation Band | :BLE | Test Date | :2018-08-17 |
|-----------------------|------------|--------------------------|-------------------|
| Fundamental Frequency | :2440 MHz | Temp./Humi. | :21 deg_C / 61 RH |
| Operation Mode | :Tx CH MID | Engineer | :Tin |
| EUT Pol. | :H Plane | Measurement Antenna Pol. | :VERTICAL |

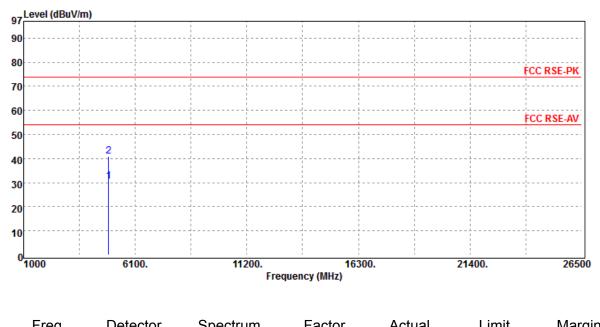


| | Freq. | Delector | Spectrum | Factor | Actual | LIMIL | Margin | |
|---|---------|----------|---------------|--------|--------|--------|--------|---|
| | | Mode | Reading Level | | FS | @3m | | |
| _ | MHz | PK/QP/AV | dBµV | dB | dBµV/m | dBµV/m | dB | _ |
| | 4880.00 | Average | 24.80 | 5.91 | 30.71 | 54.00 | -23.29 | |
| | 4880.00 | Peak | 35.08 | 5.91 | 40.99 | 74.00 | -33.01 | |
| | | | | | | | | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: ER/2018/90160 Page 42 of 47

| Operation Band | :BLE | Test Date | :2018-08-17 |
|-----------------------|------------|--------------------------|-------------------|
| Fundamental Frequency | :2440 MHz | Temp./Humi. | :21 deg_C / 61 RH |
| Operation Mode | :Tx CH MID | Engineer | :Tin |
| EUT Pol. | :H Plane | Measurement Antenna Pol. | :HORIZONTAL |

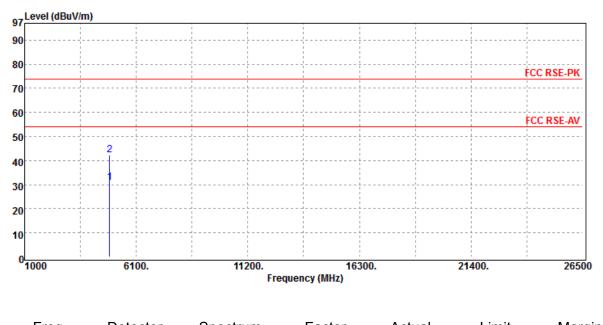


| | ⊢req. | Detector | Spectrum | Factor | Actual | Limit | Margin | |
|---|---------|----------|---------------|--------|--------|--------|--------|--------|
| | | Mode | Reading Level | | FS | @3m | | |
| | MHz | PK/QP/AV | dBµV | dB | dBµV/m | dBµV/m | dB | |
| | 4880.00 | Average | 24.91 | 5.91 | 30.82 | 54.00 | -23.18 | |
| | 4880.00 | Peak | 36.36 | 5.91 | 42.27 | 74.00 | -31.73 | |
| _ | | Average | 24.91 | 5.91 | 30.82 | 54.00 | | -23.18 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: ER/2018/90160 Page 43 of 47

| Operation Band Fundamental Frequency | :BLE :2480 MHz | Test Date Temp./Humi. | :2018-08-17 :21 deg_C / 61 RH |
|---|-------------------|--------------------------|----------------------------------|
| Operation Mode | :Tx CH HIGH | Engineer | :Tin |
| EUT Pol. | :H Plane | Measurement Antenna Pol. | :VERTICAL |

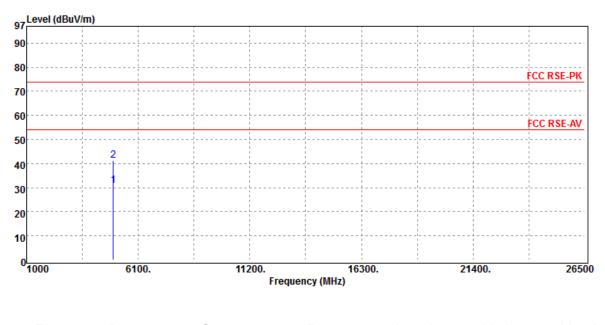

| | Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin | |
|---|---------|----------|---------------|--------|--------|--------|--------|---|
| | | Mode | Reading Level | | FS | @3m | | |
| _ | MHz | PK/QP/AV | dBµV | dB | dBµV/m | dBµV/m | dB | _ |
| | 4960.00 | Average | 24.77 | 6.05 | 30.82 | 54.00 | -23.18 | |
| | 4960.00 | Peak | 35.37 | 6.05 | 41.42 | 74.00 | -32.58 | |


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: ER/2018/90160 Page 44 of 47

| :BLE |
|-------------|
| :2480 MHz |
| :Tx CH HIGH |
| :H Plane |
| |

Test Date :2018-08-17 Temp./Humi. :21 deg_C / 61 RH Engineer :Tin :HORIZONTAL Measurement Antenna Pol.

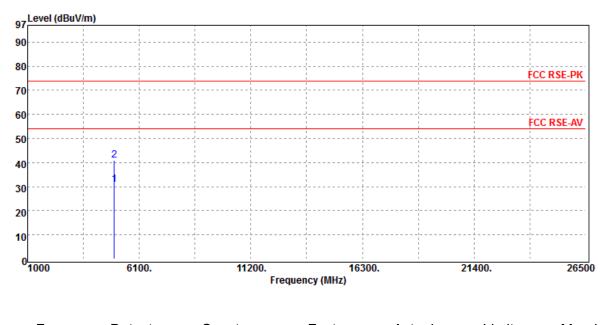

| | Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin | |
|---|---------|----------|---------------|--------|--------|--------|--------|--|
| | | Mode | Reading Level | | FS | @3m | | |
| _ | MHz | PK/QP/AV | dBµV | dB | dBµV/m | dBµV/m | dB | |
| | 4960.00 | Average | 24.85 | 6.05 | 30.90 | 54.00 | -23.10 | |
| | 4960.00 | Peak | 34.73 | 6.05 | 40.78 | 74.00 | -33.22 | |
| | 4900.00 | rean | 54.75 | 0.05 | 40.70 | 74.00 | -33.22 | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



11. PEAK POWER SPECTRAL DENSITY


11.1 Standard Applicable:

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

11.2 Measurement Equipment Used:

| EQUIPMENT TYPE | MFR | MODEL NUMBER | SERIAL NUMBER | LAST CAL. | CAL DUE. |
|--------------------------|---------------|-----------------|------------------|--------------|------------|
| EXA Spectrum Analyzer | Agilent | N9010A | MY50420195 | 2018/05/03 | 2019/05/02 |
| DC Power Supply | Anritsu | E3640A | KR93300208 | 2018/08/15 | 2019/08/14 |
| Attenuator | Mini-Circuit | BW-S10W2+ | 2 | 2018/01/02 | 2019/01/01 |
| DC Block | Mini-Circuits | BLK-18-S+ | 1 | 2018/01/02 | 2019/01/01 |
| Notebook | Lenovo | T440P | P0000564 | N/A | N/A |

11.3 Test Set-up:



11.4 Measurement Procedure:

- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Set the span to 1.5 times the DTS channel bandwidth.
- 4. Set the RBW = 3 kHz & VBW = 10 kHz.
- 5. For defining Restricted Band Edge Limit: Set the RBW = 100kHz & VBW = 300 kHz.
- 6. Detector = peak.
- 7. Sweep time = auto couple.
- 8. Trace mode = max hold.
- 9. Allow trace to fully stabilize.
- 10. Use the peak marker function to determine the maximum amplitude level.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Power Density BLE 1M HighCH39-2480

Ó

#VBW 10 kHz

Avg Type: Log Pv

Mkr1 2 479 979 0 GF

Span 1.500 MHz Sweep 158.2 ms (1001 pts)

8 70 d

Auto Tu

Center Fre

Start Free

Stop Fre

1750000 GH

Freq Offse

CF Step

2.48000000 GH

2.479250000 GH

enter Freq 2.480000000 GHz Trig. Free Rat Miles ** States 20 dB

> Ref Offset 0.4 dB Ref 20.00 dBm

enter 2.4800000 GHz Res BW 3.0 kHz




11.5 Measurement Result:

BLE mode

| Frequency (MHz) | RF Power Density (dBm) | Maximum Limit (dBm) | Result |
|--------------------|---------------------------|------------------------|--------|
| 2402 | -8.61 | 8 | PASS |
| 2440 | -8.93 | 8 | PASS |
| 2480 | -8.70 | 8 | PASS |

NOTE: cable loss as 0.4dB that offsets in the spectrum

Power Density BLE 1M LowCH00-2402

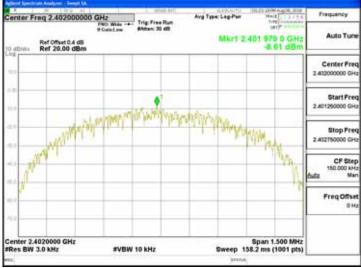

Power Density_BLE_1M_MidCH20-2442



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

| | | • | | |
|--------------|---------------------|---|-------------------|----------------|
| 台灣檢驗科技股份有限公司 | t (886-2) 2299-3279 | f | (886-2) 2298-0488 | www.tw.sgs.com |



12. ANTENNA REQUIREMENT

12.1 Standard Applicable:

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

If the transmitting antenna is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

12.2 Antenna Connected Construction:

The antenna is designed as permanently attached and no consideration of replacement. Please see EUT photo for details.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。