

Page 1 of 74

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

Sharp Corporation, Mobile Communication B.U.

Applicant: 2-13-1, Hachihonmatsu-lida, Higashi-hiroshima-shi, Hiroshi-

ma, 739-0192, Japan

Sharp Corporation Manufacturer:

1 Takumi-cho, Sakai-ku, Sakai City, Osaka 590-8522, Japan

Product Name: Cellular Phone

Report Number: ER/2018/C0135

FCC ID: APYHRO00271

FCC Rule Part: §15.247, Cat: DSS

Issue Date: Dec. 21, 2018

Date of Test: Oct. 25, 2018 ~ Nov. 29, 2018

Date of EUT Received: Oct. 25, 2018

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits.

The test results of this report relate only to the tested sample identified in this report.

Tested By:

Approved By:

Jazz Huang / Asst. Supervisor





Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⁹0天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



Page 2 of 74

Revision History


Report Number	Revision	Description	Effected Page	Issue Date	Revised By
ER/2018/C0135	Rev.00	Initial creation of document	All	Dec. 21, 2018	Stefanie Yu

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⑪天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without price wither approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this decument is undertile and effective ment in the present in the present of the intervention of the content or appearance of this decument is undertile and effective ment in the present in the present of the intervention of the content or appearance of the intervention of the content of the content or appearance of this decument is undertile and effective ment or appearance of the intervention of the content of the cont pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488

www.tw.sqs.com





Contents

1	GENERAL INFORMATION	4
2	SYSTEM TEST CONFIGURATION	6
3	SUMMARY OF TEST RESULTS	8
4	DESCRIPTION OF TEST MODES	9
5	MEASUREMENT UNCERTAINTY	11
6	CONDUCTED EMISSION TEST	12
7	PEAK OUTPUT POWER MEASUREMENT	16
8	20dB BANDWIDTH MEASUREMENT	18
9	CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT	22
10	RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT	28
11	FREQUENCY SEPARATION	57
12	NUMBER OF HOPPING FREQUENCY	59
13	TIME OF OCCUPANCY (DWELL TIME)	61
14	ANTENNA REQUIREMENT	70

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⑪天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without price wither approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this decument is undertile and effective ment in the present in the present of the intervention of the content or appearance of this decument is undertile and effective ment in the present in the present of the intervention of the content or appearance of the intervention of the content of the content or appearance of this decument is undertile and effective ment or appearance of the intervention of the content of the cont pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279

f (886-2) 2298-0488

www.tw.sgs.com



Page 4 of 74

GENERAL INFORMATION

1.1 Product description

General:

Product Name:	Cellular Phone
Hardware Version:	DVT
Software Version:	N/A
Power Supply:	3.8V from Rechargeable Li-ion Battery

Bluetooth_BR+EDR:

Bluetooth Version	BT V4.2 (dual mode)
Channel number:	79 channels
Modulation type:	GFSK + π/4DQPSK + 8DPSK
Transmit Power:	12.03dBm
Frequency Range:	2.402GHz – 2.480GHz
Antenna Designation:	Inverted-L Antenna, Gain: -0.7dBi

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 5 of 74

1.2 Test Methodology of Applied Standards

FCC Part 15, Subpart C §15.247

KDB 558074 D01 v05 DSS Meas, Guidance

ANSI C63.10:2013

Note: All test items have been performed and record as per the above standards.

1.3 Test Facility

SGS Taiwan Ltd. Electronics & Communication Laboratory No.134, Wu Kung Road, Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803

(TAF code 0513)

FCC Registration Numbers are: 509634 / TW 0001

1.4 Special Accessories

There is no special accessory used while test was conducted.

1.5 Equipment Modifications

There was no modification incorporated into the EUT.

1.6 Referencing test data across separate equipment authorization

The test report ER/2018/B0071 under original FCC ID: APYHRO00268 are fully referred for the new FCC ID: APYHRO00271 in this report.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.

www.tw.sgs.com



Page 6 of 74

2 SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz. The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plan. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field ra-

emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

2.4 Measurement Results Explanation Example

For all conducted test items:


The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號





2.5 Configuration of Tested System Fig. 2-1 Radiated Emission




Fig. 2-2 AC Power Line Conducted **Emission**



Fig. 2-3 Conducted (Antenna Port)

Emission





Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1.	Bluetooth Test Software	N/A	N/A	N/A	N/A	N/A
2.	DC Power Supply	Anritsu	E3640A	KR93300208	N/A	Unshielded
3.	Notebook	Lenovo	T440P	P0000564	Shielded	Unshielded

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
1 00 Itales	Description of Test	Result
§15.207(a)	AC Power Line Conducted Emission	Compliant
§15.247(b)(1)	Peak Output Power	Compliant
§15.247(a)(1)	20dB Bandwidth	Compliant
§15.247(d)	Conducted Band Edge and Spurious Emission	Compliant
§15.247(d)	Radiated Band Edge and Spurious Emission	Compliant
§15.247(a)(1)	Frequency Separation	Compliant
§15.247(a)(1)(iii)	Number of hopping frequency	Compliant
§15.247(a)(1)(iii)	Time of Occupancy	Compliant
§15.203 §15.247(b)	Antenna Requirement	Compliant

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⑪天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without price wither approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this decument is undertile and effective ment in the present in the present of the intervention of the content or appearance of this decument is undertile and effective ment in the present in the present of the intervention of the content or appearance of the intervention of the content of the content or appearance of this decument is undertile and effective ment or appearance of the intervention of the content of the cont pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Page 9 of 74

DESCRIPTION OF TEST MODES

4.1 Operated in 2400 ~ 2483.5MHz Band

79 channels are provided for Bluetooth

CH	FREQUENCY	CH	FREQUENCY	СН	FREQUENCY	СН	FREQUENCY
			· · · · · · · · · · · · · · · · · · ·				
0	2402 MHz	20	2422 MHz	40	2442 MHz	70	2462 MHz
1	2403 MHz	21	2423 MHz	41	2443 MHz	71	2463 MHz
2	2404 MHz	22	2424 MHz	42	2444 MHz	72	2464 MHz
3	2405 MHz	23	2425 MHz	43	2445 MHz	73	2465 MHz
4	2406 MHz	24	2426 MHz	44	2446 MHz	74	2466 MHz
5	2407 MHz	25	2427 MHz	45	2447 MHz	75	2467 MHz
6	2408 MHz	26	2428 MHz	46	2448 MHz	76	2468 MHz
7	2409 MHz	27	2429 MHz	47	2449 MHz	77	2469 MHz
8	2410 MHz	28	2430 MHz	48	2450 MHz	78	2470 MHz
9	2411 MHz	29	2431 MHz	49	2451 MHz	79	2471 MHz
10	2412 MHz	30	2432 MHz	50	2452 MHz	70	2472 MHz
11	2413 MHz	31	2433 MHz	51	2453 MHz	71	2473 MHz
12	2414 MHz	32	2434 MHz	52	2454 MHz	72	2474 MHz
13	2415 MHz	33	2435 MHz	53	2455 MHz	73	2475 MHz
14	2416 MHz	34	2436 MHz	54	2456 MHz	74	2476 MHz
15	2417 MHz	35	2437 MHz	55	2457 MHz	75	2477 MHz
16	2418 MHz	36	2438 MHz	56	2458 MHz	76	2478 MHz
17	2419 MHz	37	2439 MHz	57	2459 MHz	77	2479 MHz
18	2420 MHz	38	2440 MHz	58	2460 MHz	78	2480 MHz
19	2421 MHz	39	2441 MHz	59	2461 MHz		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488

www.tw.sgs.com



Page 10 of 74

4.2 The Worst Test Modes and Channel Details

- The EUT has been tested under operating condition.
- Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.
- Investigation has been done on all the possible configurations for searching the worst case.

RADIATED EMISSION TEST (BELOW 1 GHz)						
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	PACKET TYPE		
Bluetooth	0 to 78	39	8-DPSK	3DH5		
	RADIATED EMISSION TEST (ABOVE 1 GHz)					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	PACKET TYPE		
Bluetooth	0 to 78	0,39,78	8-DPSK	3DH5		

Note: The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for Bluetooth BR+EDR Transmitter for channel Low, Mid and High, the worst case E2 position was reported.

CONDUCTED TEST						
	Peak Output	Power, 20dB Ba	and Width, Dwell Ti	me		
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	PACKET TYPE		
	0 to 78	0,39,78	GFSK	DH5		
Bluetooth	0 to 78	0,39,78	π/4-DQPSK	2DH5		
	0 to 78	0,39,78	8-DPSK	3DH5		
		Band Ed	ge			
Bluetooth	0 to 78	0,78	GFSK/8-DPSK	DH5/3DH5		
	Frequency Separation					
Bluetooth	0 to 78	0,1,2	8-DPSK	3DH5		
	Number of hopping frequency					
Bluetooth	0 to 78	0 to 78	8-DPSK	3DH5		


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.

f (886-2) 2298-0488

www.tw.sqs.com





MEASUREMENT UNCERTAINTY

Test Items	Uncertainty
AC Power Line Conducted Emission	+/- 2.586 dB
Peak Output Power	+/- 0.84 dB
20dB Bandwidth	+/- 51.33 Hz
100 KHz Bandwidth Of Frequency Band Edges	+/- 0.84 dB
Frequency Separation	+/- 51.33 Hz
Number of hopping frequency	+/- 51.33 Hz
Time of Occupancy	+/- 51.33 Hz
Temperature	+/- 0.65 °C
Humidity	+/- 4.6 %
DC / AC Power Source	DC= +/- 0.13%, AC= +/- 0.2%

Radiated Spurious Emission:

Traditional of annous Entire and			
	9kHz – 30MHz: +/- 2.87 dB		
	30MHz - 180MHz: +/- 3.37dB		
Measurement uncertainty	180MHz -417MHz: +/- 3.19dB		
(Polarization : Vertical)	0.417GHz-1GHz: +/- 3.19dB		
	1GHz - 18GHz: +/- 4.04dB		
	18GHz - 40GHz: +/- 4.04dB		

	9kHz – 30MHz: +/- 2.87 dB	
	30MHz - 167MHz: +/- 4.22dB	
Measurement uncertainty	167MHz -500MHz: +/- 3.44dB	
(Polarization : Horizontal)	0.5GHz-1GHz: +/- 3.39dB	
	1GHz - 18GHz: +/- 4.08dB	
	18GHz - 40GHz: +/- 4.08dB	

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





Page 12 of 74

CONDUCTED EMISSION TEST

6.1 Standard Applicable

Frequency within 150 kHz to 30MHz shall not exceed the limit table as below.

Frequency range	Limits dB(uV)			
MHz	Quasi-peak	Average		
0.15 to 0.50	66 to 56	56 to 46		
0.50 to 5	56	46		
5 to 30	60	50		

Note

- 1. The lower limit shall apply at the transition frequencies
- 2.The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

6.2 Measurement Equipment Used

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
EMI Test Receiver	R&S	ESCI7	100335	02/02/2018	02/01/2019
LISN	SCHWARZBECK	NSLK 8127	8127-649	05/18/2018	05/17/2019

6.3 EUT Setup

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI 63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



6.4 Test SET-UP (Block Diagram of Configuration)

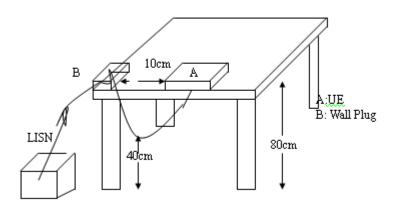

6.5 Measurement Procedure

- 1. The EUT was placed on a table which is 0.8m above ground plan.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

6.6 Measurement Result

Note: Refer to next page for measurement data and plots.

Note2: The * reveals the worst-case results that closet to the limit

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

SGS Taiwan Ltd.

t (886-2) 2299-3279

f (886-2) 2298-0488

www.tw.sqs.com





Page 14 of 74

AC POWER LINE CONDUCTED EMISSION TEST DATA


25 % Temperature: Site Conduction Room Phase: L1 Limit: FCC Class B Conduction(QP)

Mode:

AC 120V/60Hz Power:


Humidity: 85 %

Note:

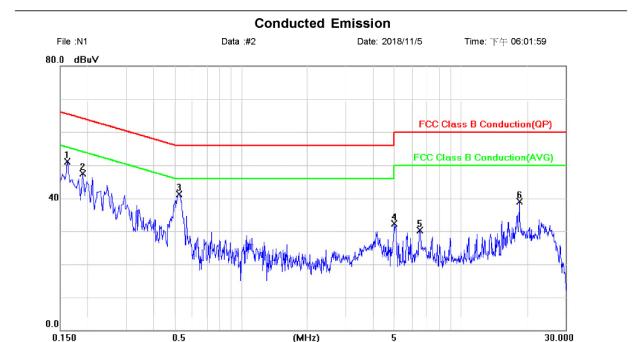

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1 *	0.1620	51.07	0.07	51.14	65.36	-14.22	peak	
2	0.1900	47.50	0.05	47.55	64.04	-16.49	peak	
3	0.5220	41.33	0.04	41.37	56.00	-14.63	peak	
4	4.9820	32.09	0.15	32.24	56.00	-23.76	peak	
5	6.4900	30.09	0.16	30.25	60.00	-29.75	peak	
6	18.5180	38.91	0.21	39.12	60.00	-20.88	peak	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



25 C



Site Conduction Room

Phase:

Power:

N AC 120V/60Hz Temperature:

Humidity: 85 %

Limit: FCC Class B Conduction(QP)

Mode: Note:

Conducted Emission File :N1 Data :#1 Date: 2018/11/5 Time: 下午 06:00:18 80.0 dBuV FCC Class B Conduction(QP) FCC Class B Conduction(AVG) 0.0 0.150 30.000 0.5 (MHz) 5

No. 1	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1 *	,	0.1780	47.98	0.11	48.09	64.58	-16.49	peak	
2		0.2460	38.59	0.10	38.69	61.89	-23.20	peak	
3		0.5260	38.59	0.09	38.68	56.00	~17.32	peak	
4		1.3100	30.04	0.09	30.13	56.00	-25.87	peak	
5		5.1060	32.49	0.20	32.69	60.00	-27.31	peak	
6		23.3900	35.93	0.27	36.20	60.00	-23.80	peak	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 16 of 74

PEAK OUTPUT POWER MEASUREMENT


7.1 Standard Applicable

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, The Limit: 1Watt. For all other frequency hopping systems in the 2400 -2483.5MHz band: The Limit: 0.125 Watts. The power limit for 1Mbps is 1watt, and 2Mbps, 3Mbps and AFH mode are 0.125 watts.

7.2 Measurement Equipment Used

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Power Meter	Anritsu	ML2496A	1804001	02/01/2018	01/31/2019
Power Sensor	Anritsu	MA2411B	1726104	02/01/2018	01/31/2019
Notebook	Lenovo	T440P	P0000564	N/A	N/A

7.3 Test Set-up:



7.4 Measurement Procedure:


- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (Max Hold, Detector = Peak, RBW >= 20dB bandwidth)
- 4. Record the max. reading.
- 5. Repeat above procedures until all default test channel is completed.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, intention is drawn to the limitation of liability, intention is drawn to the limitation only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

SGS Taiwan Ltd.





7.5 Measurement Result

1M BR mode (Peak):

СН	Freq. (MHz)	Peak Output Power (dBm)	Output Power (mW)	Limit (mW)
0	2402	10.35	10.839	1000
39	2441	10.73	11.830	1000
78	2480	10.72	11.803	1000

2M EDR mode (Peak):

СН	Freq. (MHz)	Peak Output Power (dBm)	Output Power (mW)	Limit (mW)
0	2402	11.37	13.709	125
39	2441	11.67	14.689	125
78	2480	11.66	14.655	125

3M EDR mode (Peak):

СН	Freq. (MHz)	Peak Output Power (dBm)	Output Power (mW)	Limit (mW)
0	2402	11.72	14.859	125
39	2441	12.03	15.959	125
78	2480	11.98	15.776	125

NOTE: cable loss as 0.4dB that offsets in the spectrum

1M BR mode (Average):

	•	O /		
СН	Freq. (MHz)	Max. Output include tune up tolerance Power (dBm)	Output Power (mW)	Limit (mW)
0	2402	10.26	10.608	1000
39	2441	10.23	10.535	1000
78	2480	10.46	11.108	1000

2M EDR mode (Average):

СН	Freq. (MHz)	Max. Avg.Output include tune up tolerance	Output Power (mW)	Limit (mW)
0	2402	9.26	8.441	125
39	2441	9.20	8.325	125
78	2480	9.27	8.460	125

3M EDR mode (Average):

_		•			
	СН	Freq. (MHz)	Max. Avg.Output include tune up tolerance	Output Power (mW)	Limit (mW)
	0	2402	9.30	8.504	125
	39	2441	9.26	8.426	125
	78	2480	9.29	8.485	125

*Note: Max. Output include tune up tolerance Power measured by using average detector.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 18 of 74

20DB BANDWIDTH MEASUREMENT


8.1 Standard Applicable

For frequency hopping systems operating in the 2400MHz-2483.5 MHz no limit for 20dB bandwidth.

8.2 Measurement Equipment Used

٠,	oaoaromont =qan					
	EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
	EXA Spectrum Analyzer	Agilent	N9010A	MY50420195	05/03/2018	05/02/2019
	DC Block	Mini-Circuits	BLK-18-S+	1	01/02/2018	01/01/2019
	Notebook	Lenovo	T440P	P0000564	N/A	N/A

8.3 Test Set-up



8.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set the spectrum analyzer as RBW=10 kHz (1 % of 20 dB Bandwidth.), VBW = 30 kHz, Span= 3MHz, Sweep=auto, Detector = Peak, and Max hold for 20dB Bandwidth test.
- 5. Mark the peak frequency and -20dB (upper and lower) frequency
- 6. Repeat above procedures until all test default channel is completed

NOTE:

1. For the plot of bandwidth measurement, the marker of the 20dB BW is arrow-mark.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electrinis documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

f (886-2) 2298-0488 www.tw.sgs.com





8.5 Measurement Result

GFSK						
	20 dB	2/3				
СН	BW	BW				
	(MHz)	(MHz)				
Low	0.883	0.59				
Mid	0.884	0.59				
High	0.883	0.59				

TIA-DODSK

II/4-DQF3K					
	20 dB	2/3			
СН	BW	BW			
	(MHz)	(MHz)			
Low	1.254	0.84			
Mid	1.253	0.84			
High	1.252	0.83			


8-DPSK

	20 dB	2/3
СН	BW	BW
	(MHz)	(MHz)
Low	1.240	0.83
Mid	1.241	0.83
Hiah	1.241	0.83

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appropriate of this decument is undertically the produced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appropriate of this decument.







OBW 20dB GFSK 1M DH5 2402MHz

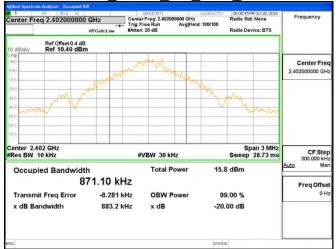


OBW 20dB GFSK 1M DH5 2441MHz

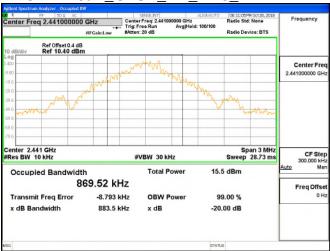


OBW 20dB_GFSK_1M_DH5_2480MHz

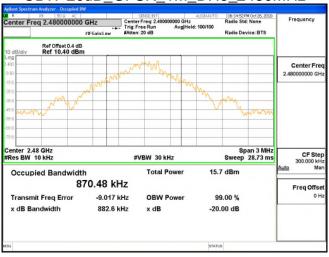

OBW 20dB π4DQPSK 2M DH5 2402MHz

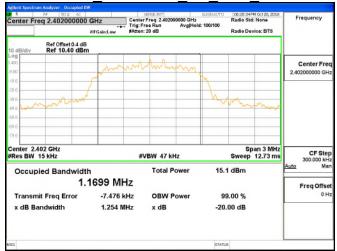

OBW 20dB π4DQPSK 2M DH5 2441MHz

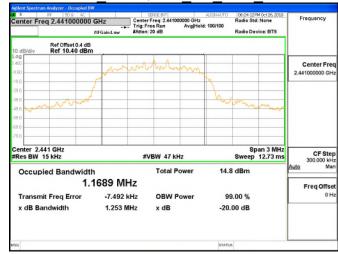

OBW 20dB π4DQPSK 2M DH5 2480MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⁹⁰天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms educement. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of

SGS Taiwan Ltd. No.134, WuKungRoad, NewTaipeiIndustrialPark, WukuDistrict, NewTaipeiCity, Taiwan 24803/新北市五股區新北產業園區五工路 134 號




OBW 20dB 8DPSK 3M DH5 2402MHz



OBW 20dB_8DPSK_3M_DH5_2441MHz



OBW 20dB_8DPSK_3M_DH5_2480MHz

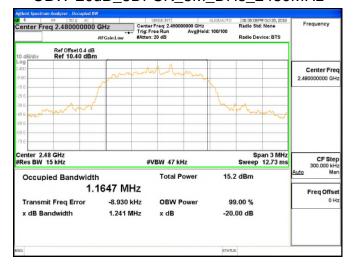

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留9天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.con/terms and conditions for Electronic Documents at www.sgs.con/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of

f (886-2) 2298-0488

SGS Taiwan Ltd. No.134, WuKungRoad, NewTaipeiIndustrialPark, WukuDistrict, NewTaipeiCity, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page 22 of 74

CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT


9.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

9.2 Measurement Equipment Used

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
EXA Spectrum Analyzer	Agilent	N9010A	MY50420195	05/03/2018	05/02/2019
DC Block	Mini-Circuits	BLK-18-S+	1	01/02/2018	01/01/2019
Notebook	Lenovo	T440P	P0000564	N/A	N/A

9.3 Test SET-UP



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⁹0天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.

f (886-2) 2298-0488



Page 23 of 74

9.4 Measurement Procedure

Conducted Band Edge:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set center frequency of spectrum analyzer = operating frequency.
- 5. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Sweep = auto
- 6. Mark Peak, 2.3999GHz and 2.4836GHz and record the max. level.
- 7. Repeat above procedures until all frequency measured were complete.

Conducted Spurious Emission:

- 1. To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows ANSI C63.10:2013.
- 3. Set RBW = 100 kHz & VBW = 300 kHz, Detector = Peak, Sweep = Auto
- 4. Allow trace to fully stabilize.
- 5. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- 6. Repeat above procedures until all default test channel measured were complete.

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where	•	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

9.5 Measurement Result


Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

1. The occurrence of the spike on the conducted emission is the signal of the fundamental emission.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.

f (886-2) 2298-0488



Band Edge_GFSK_1M_DH5_2402MHz




Band Edge_GFSK_1M_DH5_2480MHz



Band Edge_8DPSK_3M_DH5_2402MHz




Band Edge_8DPSK_3M_DH5_2480MHz

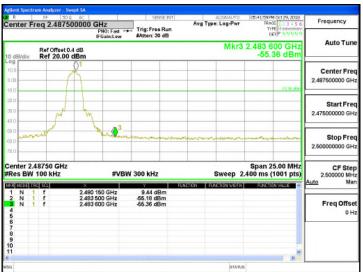

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.subscom/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeilndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



SGS


Hopping Band Edge_GFSK_1M_DH5_2402MHz

Avg Type: Log-Pwr Auto Tur Mkr3 2,390 00 GHz -62,18 dBm Center Fre Stop Fre 2.420000000 GH Span 110.0 MHz Sweep 10.53 ms (1001 pts) er 2.36500 GHz Res BW 100 kHz **#VBW 300 kHz** Freq Offs


Hopping Band Edge_8DPSK_3M_DH5_2402MHz



Hopping Band Edge_GFSK_1M_DH5_2480MHz

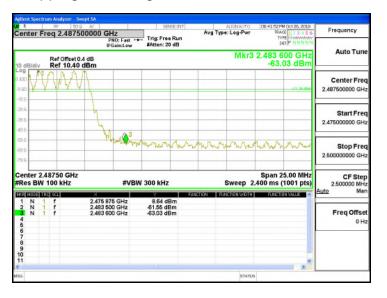

Hopping Band Edge_8DPSK_3M_DH5_2480MHz

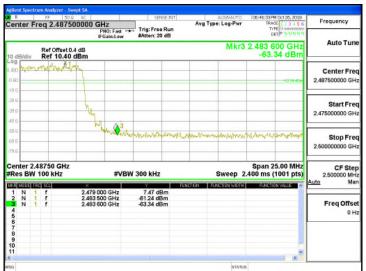

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.subscom/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.


| No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279




Page 26 of 74



Spurious Emission_GFSK_1M_DH5_2402MHz

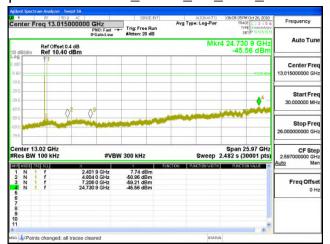


Spurious Emission_GFSK_1M_DH5_2441MHz

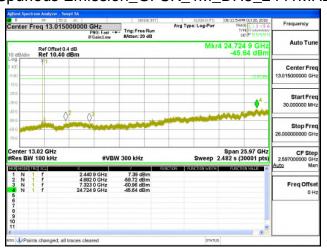

Spurious Emission_GFSK_1M_DH5_2480MHz




Spurious Emission π/4DQPSK 2M 2402MHz

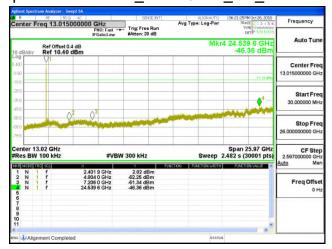

Spurious Emission_π/4DQPSK 2M 2441MHz



Spurious Emission_π/4DQPSK_2M_2480MHz

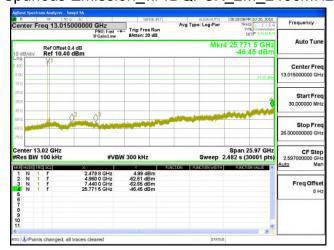

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.subscom/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


<mark>SGS Taiwan Ltd. |</mark> No.134,WuKungRoad,NewTaipeilndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Page 27 of 74



Spurious Emission 8DPSK 3M DH5 2402MHz

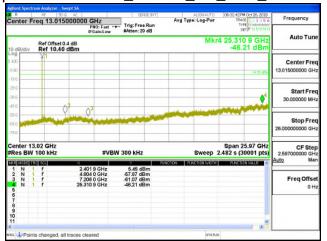

Spurious Emission_8DPSK_3M_DH5_2441MHz



Spurious Emission 8DPSK 3M DH5 2480MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is active the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be reconstructed to the full content of the low. prosecuted to the fullest extent of the law.

<mark>SGS Taiwan Ltd. |</mark> No.134,WuKungRoad,NewTaipeilndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Page 28 of 74

10 RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT

10.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands must also comply with the §15.209 limit as below.

And according to §15.33(a) (1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level $(dB\mu V/m) = 20 \log Emission level (dB\mu V/m)$


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⁹0天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-

tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

SGS Taiwan Ltd.

f (886-2) 2298-0488 www.tw.sgs.com





10.2 Measurement Equipment Used

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Bi-log Antenna	SCHWAZBECK	VULB9168	378	12/29/2017	12/28/2018
Horn Antenna	Schwarzbeck	BBHA9120D	1441	08/16/2018	08/15/2019
Horn Antenna	Schwarzbeck	BBHA9170	184	12/12/2017	12/11/2018
Loop Antenna	ETS.LINDGREN	6502	148045	10/08/2018	10/07/2019
3m Site NSA	SGS	966 chamber	N/A	01/02/2018	01/01/2019
Spectrum Analyz- er	Agilent	E4446A	MY51100003	05/15/2018	05/14/2019
EMI Test Receiv- er	R&S	ESCI7	100335	02/02/2018	02/01/2019
Pre-Amplifier	HP	8449B	3008A00578	01/02/2018	01/01/2019
Pre-Amplifier	HP	8447D	2944A07676	01/02/2018	01/01/2019
Pre-Amplifier	EMC Instru- ments	EMC184045B	980135	10/27/2018	10/26/2019
Attenuator	Mini-Circuit	BW-S10W2+	2	01/02/2018	01/01/2019
Filter 2400-2483.5 MHz	EWT	EWT-14-0166	M1	01/02/2018	01/01/2019
Low Loss Cable	Huber Suhner	966_RX	9	01/02/2018	01/01/2019
Notebook	Lenovo	L430	R9-WGNK5	N/A	N/A

Note: N.C.R refers to Not Calibrated Required.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appropriate of this decument is undertically the produced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appropriate of this decument. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488




10.3 Test SET-UP


(A) Radiated Emission Test Set-UP Frequency Below 30MHz.

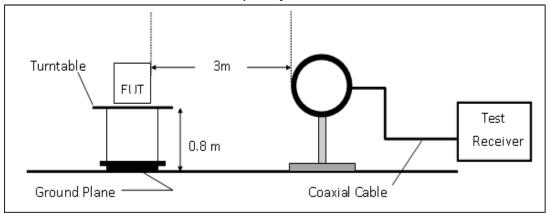

(B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

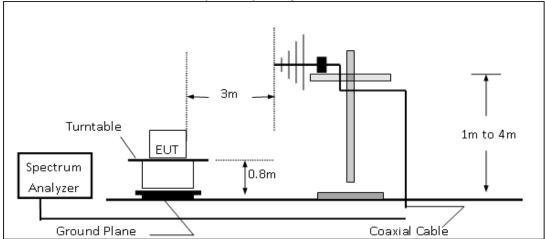

(C) Radiated Emission Test Set-UP Frequency Over 1 GHz

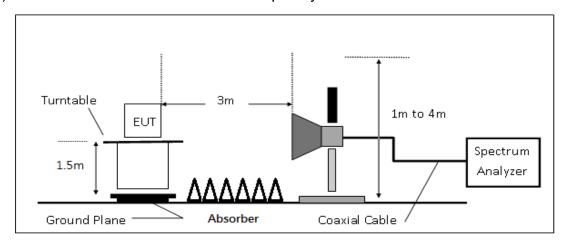

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488

t (886-2) 2299-3279



Page 31 of 74

10.4 Measurement Procedure

Radiated Emission

- 1. The testing follows ANSI C63.10:2013.
- 2. The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 0.8m for frequency> 1GHz above ground plan.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 5. Use the follow spectrum analyzer setting:
 - (1) Span = wide enough to fully capture the emission being measured
 - (2) RBW = 1 MHz for f ≥ 1 GHz, 100 kHz for f < 1 GHz, VBW ≥ RBW, Sweep = auto, Detector function = peak, Trace = max hold
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c)

Duty Cycle = On time/100 milliseconds

On time = N1*L1=N2*L2+...+N(n-1)*LN(n-1)+N(n)*L(n)

Where N1 is number of type 1 pulses, L1 is length of type 1 pulses, etc.

Average Emission Level = Peak Emission Level + 20*log (duty Cycle)

- 6. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 7. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 8. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 9. Repeat above procedures until all frequency of the interest measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⑪天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and com/terms and conditions htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law SGS Taiwan Ltd. I No.134.WuKunoRoad.NewTaipeiIndustria

No.134, WuKungRoad, NewTaipeiIndustrialPark, WukuDistrict, NewTaipeiCity, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page 32 of 74

10.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

The limit of the emission level is expressed in dBuV/m, which converts 20*log(uV/m)

Actual FS(dB μ V/m) = SPA. Reading level(dB μ V) + Factor(dB)

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

10.6 Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) was not reported.


10.7 Measurement Result

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號






Radiated Band Edge Measurement Result: (Hopping Mode)

Operation Band :BR Hopping **Test Date** :2018-11-02 Fundamental Frequency :2402 MHz Temp./Humi. :23 deg_C / 62 RH

Operation Mode :Bandedge CH LOW Engineer :Wei

EUT Pol. :E2 Plane :VERTICAL Measurement Antenna Pol.

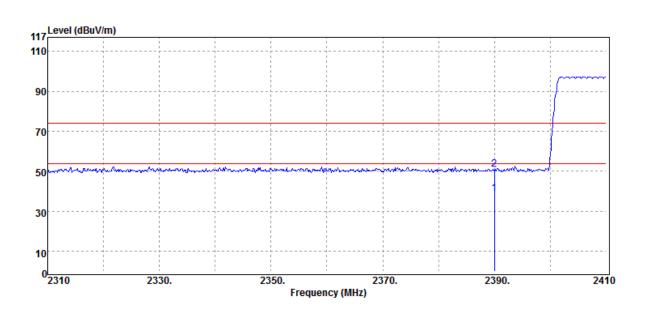

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
2390.00	Average	38.55	0.20	38.75	54.00	-15.25
2390.00	Peak	50.76	0.20	50.96	74.00	-23.04


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, intention is drawn to the limitation of liability, intention is drawn to the limitation only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279

f (886-2) 2298-0488





Operation Band Fundamental Frequency **Operation Mode**

EUT Pol.

:BR Hopping :2402 MHz

:Bandedge CH LOW


:E2 Plane

Test Date :2018-11-02

Temp./Humi. :23 deg_C / 62 RH


Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

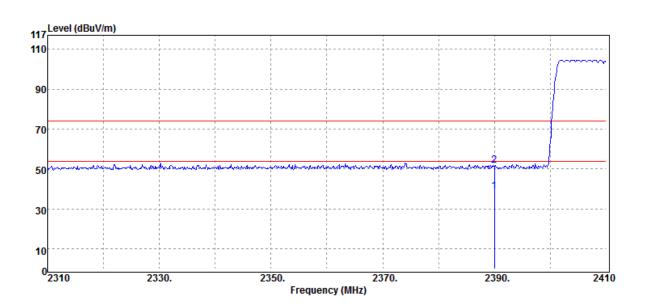

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
2390.00	Average	38.61	0.20	38.81	54.00	-15.19
2390.00	Peak	51.73	0.20	51.93	74.00	-22.07

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





Operation Band Fundamental Frequency **Operation Mode**

EUT Pol.

:BR Hopping :2480 MHz

:Bandedge CH HIGH


:E2 Plane

Test Date :2018-11-02

Temp./Humi. :23 deg_C / 62 RH


Engineer :Wei

:VERTICAL Measurement Antenna Pol.

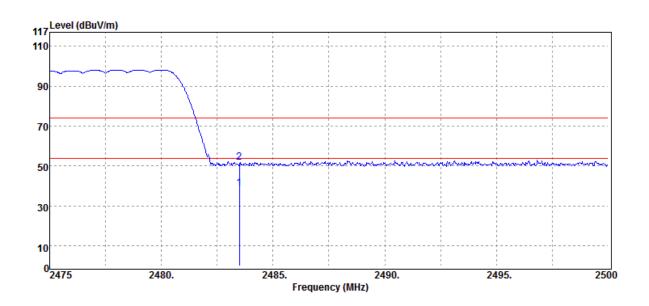

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dΒμV	dB	dΒμV/m	dΒμV/m	dB	
	2483.50	Average	38.48	0.53	39.01	54.00	-14.99	
	2483.50	Peak	51.18	0.53	51.71	74.00	-22.29	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





Operation Band Fundamental Frequency **Operation Mode**

EUT Pol.

:BR Hopping :2480 MHz

:Bandedge CH HIGH


:E2 Plane

Test Date :2018-11-02

Temp./Humi. :23 deg_C / 62 RH


Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

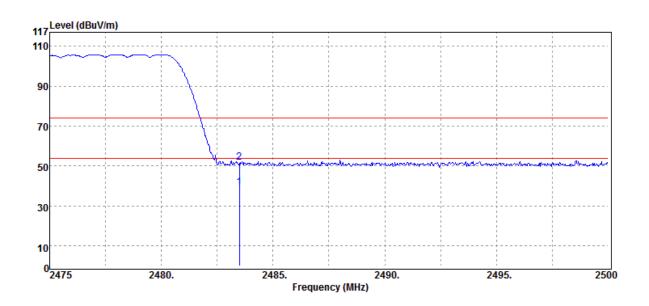

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
_	MHz	PK/QP/AV	dΒμV	dB	dΒμV/m	dΒμV/m	dB
	2483.50	Average	38.61	0.53	39.14	54.00	-14.86
	2483.50	Peak	51.20	0.53	51.73	74.00	-22.27

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





EUT Pol.

:EDR Hopping :2402 MHz

:Bandedge CH LOW


:E2 Plane

Test Date :2018-11-02

Temp./Humi. :23 deg_C / 62 RH


Engineer :Wei

:VERTICAL Measurement Antenna Pol.

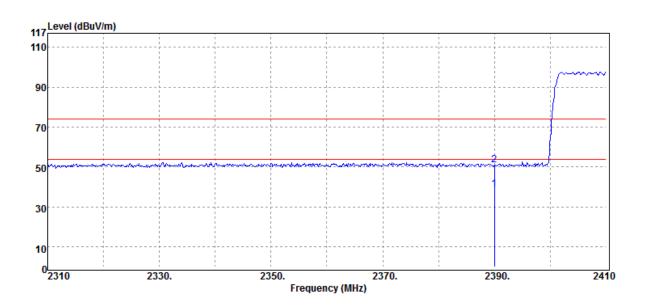

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dΒμV	dB	dΒμV/m	dBµV/m	dB	_
	2390.00	Average	38.49	0.20	38.69	54.00	-15.31	
	2390.00	Peak	50.89	0.20	51.09	74.00	-22.91	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





EUT Pol.

:EDR Hopping :2402 MHz

:Bandedge CH LOW


:E2 Plane

Test Date :2018-11-02

Temp./Humi. :23 deg_C / 62 RH


Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

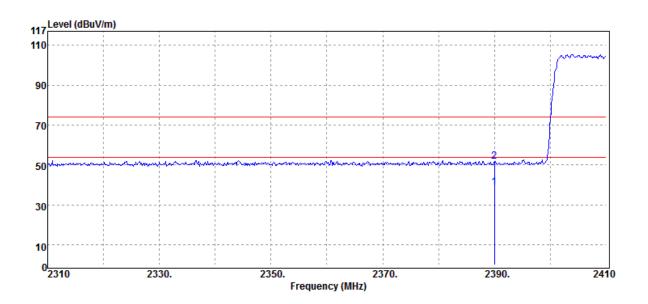

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dΒμV/m	dBμV/m	dB	_
2390.00	Average	38.59	0.20	38.79	54.00	-15.21	
2390.00	Peak	51.67	0.20	51.87	74.00	-22.13	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





EUT Pol.

:EDR Hopping :2480 MHz

:Bandedge CH HIGH


:E2 Plane

Test Date :2018-11-02

Temp./Humi. :23 deg_C / 62 RH


Engineer :Wei

:VERTICAL Measurement Antenna Pol.

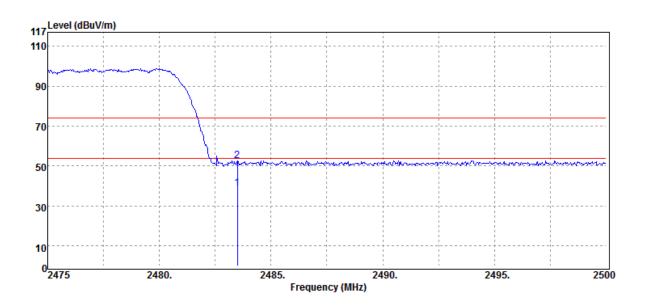

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dΒμV	dB	dΒμV/m	dBµV/m	dB	_
	2483.50	Average	38.49	0.53	39.02	54.00	-14.98	
	2483.50	Peak	52.04	0.53	52.57	74.00	-21.43	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





EUT Pol.

:EDR Hopping :2480 MHz

:Bandedge CH HIGH


:E2 Plane

Test Date :2018-11-02

Temp./Humi. :23 deg_C / 62 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

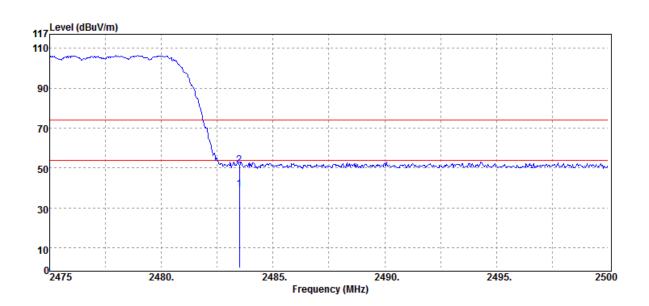

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dΒμV/m	dΒμV/m	dB
2483.50	Average	38.85	0.53	39.38	54.00	-14.62
2483.50	Peak	50.81	0.53	51.34	74.00	-22.66

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: ER/2018/C0135


Page 41 of 74

Radiated Band Edge Measurement Result: (Non-Hopping Mode)

Operation Band :BR(1M) **Test Date** :2018-11-02

Fundamental Frequency Temp./Humi. :2402 MHz :23 deg_C / 62 RH **Operation Mode** :Bandedge CH LOW Engineer :Wei

EUT Pol. :E2 Plane :VERTICAL Measurement Antenna Pol.

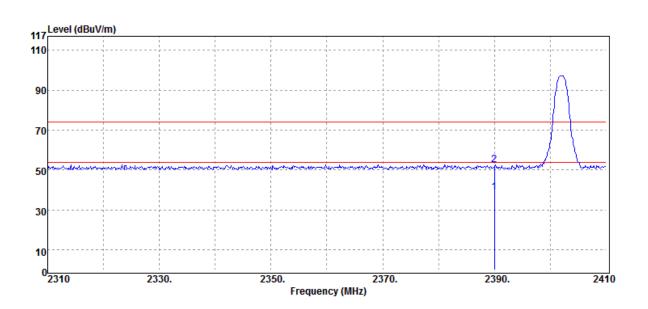


	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dΒμV	dB	dΒμV/m	dBµV/m	dB	
	2390.00	Average	38.50	0.20	38.70	54.00	-15.30	
	2390.00	Peak	52.41	0.20	52.61	74.00	-21.39	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, intention is drawn to the limitation of liability, intention is drawn to the limitation only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

www.tw.sgs.com





:BR(1M) :2402 MHz


:Bandedge CH LOW

EUT Pol. :E2 Plane **Test Date** :2018-11-02

Temp./Humi. :23 deg_C / 62 RH


Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

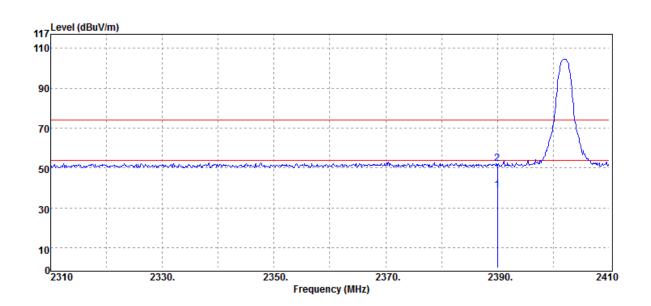

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dΒμV	dB	dΒμV/m	dΒμV/m	dB	
	2390.00	Average	38.51	0.20	38.71	54.00	-15.29	
	2390.00	Peak	52.21	0.20	52.41	74.00	-21.59	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





Operation Mode

EUT Pol.

:BR(1M) :2480 MHz

:Bandedge CH HIGH


:E2 Plane

Test Date :2018-11-02

Temp./Humi. :23 deg_C / 62 RH


Engineer :Wei

:VERTICAL Measurement Antenna Pol.

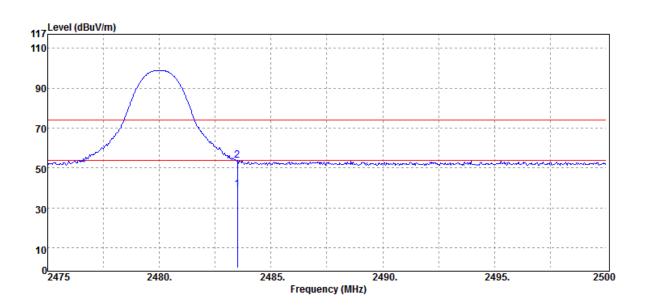

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dΒμV	dB	dΒμV/m	dBµV/m	dB	
	2483.50	Average	38.72	0.53	39.25	54.00	-14.75	
	2483.50	Peak	53.25	0.53	53.78	74.00	-20.22	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





Operation Mode

EUT Pol.

:BR(1M) :2480 MHz


:Bandedge CH HIGH

:E2 Plane

Test Date :2018-11-02


Temp./Humi. :23 deg_C / 62 RH Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

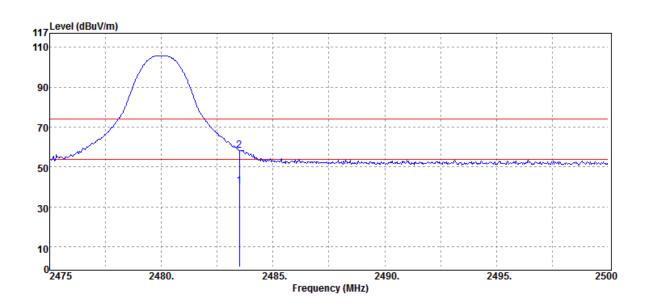

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dΒμV/m	dBμV/m	dB	
2483.50	Average	39.84	0.53	40.37	54.00	-13.63	
2483.50	Peak	57.89	0.53	58.42	74.00	-15.58	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





Operation Mode

EUT Pol.

:EDR(3M) :2402 MHz

:Bandedge CH LOW


:E2 Plane

Test Date :2018-11-02

Temp./Humi. :23 deg_C / 62 RH


Engineer :Wei

:VERTICAL Measurement Antenna Pol.

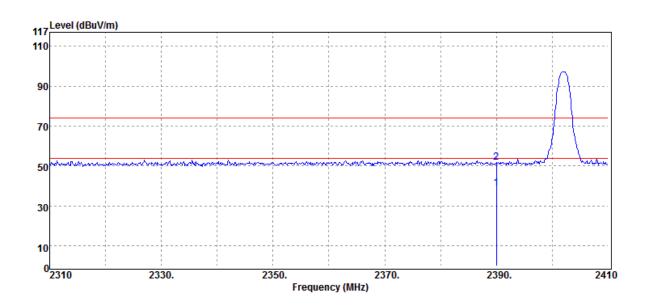

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dΒμV/m	dΒμV/m	dB	
2390.00	Average	38.53	0.20	38.73	54.00	-15.27	
2390.00	Peak	51.57	0.20	51.77	74.00	-22.23	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





Operation Mode

EUT Pol.

:EDR(3M) :2402 MHz

:Bandedge CH LOW


:E2 Plane

Test Date :2018-11-02

Temp./Humi. :23 deg_C / 62 RH


Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

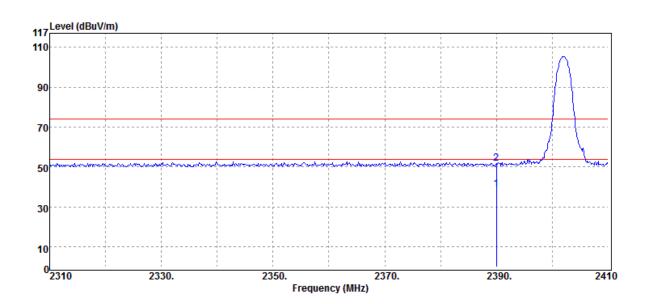

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dΒμV/m	dΒμV/m	dB
2390.00	Average	38.50	0.20	38.70	54.00	-15.30
2390.00	Peak	51.62	0.20	51.82	74.00	-22.18

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





:EDR(3M) :2480 MHz


:Bandedge CH HIGH

EUT Pol. :E2 Plane **Test Date** :2018-11-02

Temp./Humi. :23 deg_C / 62 RH


Engineer :Wei

:VERTICAL Measurement Antenna Pol.

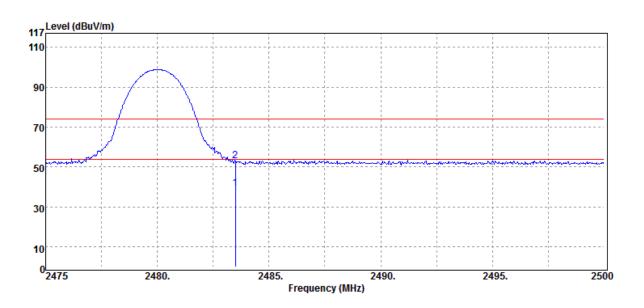

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dΒμV	dB	dΒμV/m	dBµV/m	dB	_
	2483.50	Average	38.70	0.53	39.23	54.00	-14.77	
	2483.50	Peak	52.43	0.53	52.96	74.00	-21.04	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





EUT Pol.

:EDR(3M) :2480 MHz :Bandedge CH HIGH


:E2 Plane

Test Date :2018-11-02

Temp./Humi. :23 deg_C / 62 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

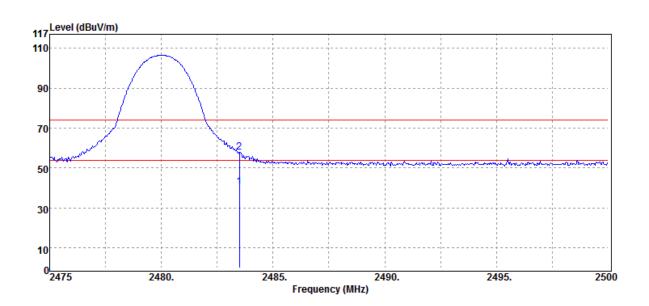

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dΒμV/m	dΒμV/m	dB
2483.50	Average	39.86	0.53	40.39	54.00	-13.61
2483.50	Peak	57.40	0.53	57.93	74.00	-16.07

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

www.tw.sgs.com






Radiated Spurious Emission Measurement Result: (Worst Case) For Frequency from 30MHz to 1000MHz

Operation Band :EDR(3M) **Test Date** :2018-11-02 Fundamental Frequency :2441 MHz Temp./Humi. :23 deg_C / 62 RH

Operation Mode :Tx CH MID Engineer :Wei

EUT Pol. :E2 Plane :VERTICAL Measurement Antenna Pol.

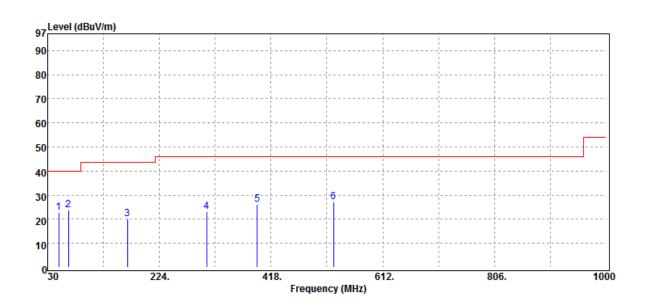

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dΒμV/m	dBμV/m	dB	
49.40	Peak	30.16	-7.48	22.68	40.00	-17.32	
65.89	Peak	33.07	-9.20	23.87	40.00	-16.13	
168.71	Peak	27.41	-7.31	20.10	43.50	-23.40	
306.45	Peak	28.49	-5.33	23.16	46.00	-22.84	
393.75	Peak	29.68	-3.42	26.26	46.00	-19.74	
526.64	Peak	28.63	-1.43	27.20	46.00	-18.80	


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留旬天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, intention is drawn to the limitation of liability, intention is drawn to the limitation only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279

f (886-2) 2298-0488 www.tw.sgs.com






Operation Band :EDR(3M) Fundamental Frequency :2441 MHz **Operation Mode** :Tx CH MID

EUT Pol. :E2 Plane **Test Date** :2018-11-02

Temp./Humi. :23 deg_C / 62 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

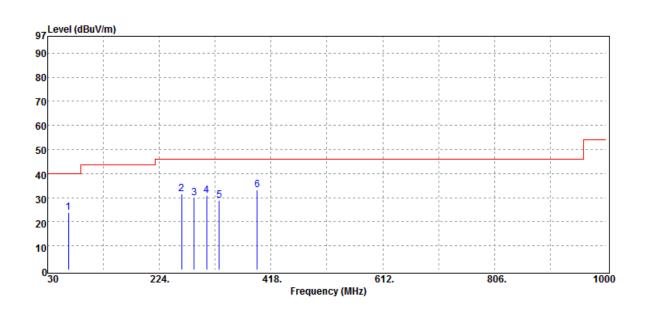

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dΒμV	dB	dΒμV/m	dBμV/m	dB	
	65.89	Peak	33.16	-9.20	23.96	40.00	-16.04	
	262.80	Peak	38.47	-6.91	31.56	46.00	-14.44	
	284.14	Peak	35.90	-6.00	29.90	46.00	-16.10	
	306.45	Peak	36.23	-5.33	30.90	46.00	-15.10	
	327.79	Peak	33.78	-4.99	28.79	46.00	-17.21	
	393.75	Peak	36.59	-3.42	33.17	46.00	-12.83	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: ER/2018/C0135


Page 51 of 74

Radiated Spurious Emission Measurement Result: (Worst Case) For Frequency above 1 GHz

Operation Band :EDR(3M) **Test Date** :2018-11-02

Fundamental Frequency :2402 MHz Temp./Humi. :23 deg_C / 62 RH **Operation Mode** :Tx CH LOW :Wei Engineer

EUT Pol. :E2 Plane :VERTICAL Measurement Antenna Pol.

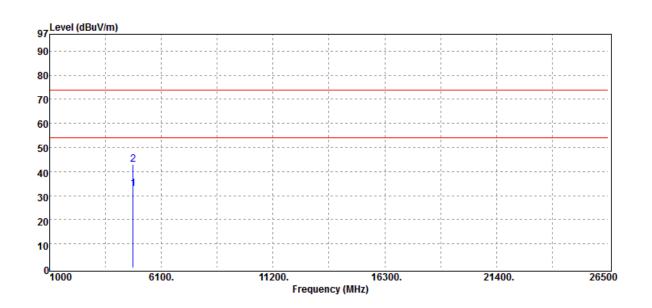

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB	
4804.00	Average	27.28	5.65	32.93	54.00	-21.07	
4804.00	Peak	37.41	5.65	43.06	74.00	-30.94	


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279

f (886-2) 2298-0488





Operation Band :EDR(3M) Fundamental Frequency :2402 MHz

Operation Mode

EUT Pol.

:E2 Plane


:Tx CH LOW

Test Date :2018-11-02

Temp./Humi. :23 deg_C / 62 RH


Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

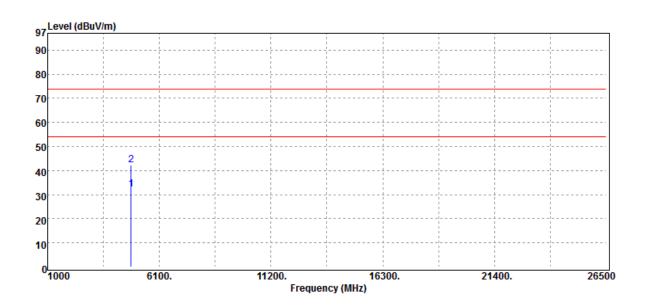

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dΒμV/m	dBμV/m	dB	
4804.00	Average	26.41	5.65	32.06	54.00	-21.94	
4804.00	Peak	36.68	5.65	42.33	74.00	-31.67	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



:2018-11-02



Operation Band Fundamental Frequency **Operation Mode**

EUT Pol.


:EDR(3M) :2441 MHz :Tx CH MID :E2 Plane

Test Date

:23 deg_C / 62 RH Temp./Humi.


Engineer :Wei

:VERTICAL Measurement Antenna Pol.

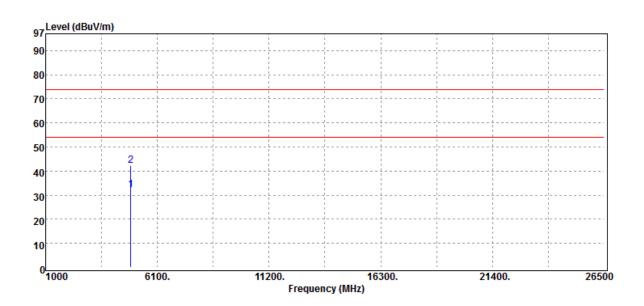

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
 MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
4882.00	Average	26.44	5.90	32.34	54.00	-21.66
4882.00	Peak	36.50	5.90	42.40	74.00	-31.60

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





Operation Band :EDR(3M) Fundamental Frequency :2441 MHz


Operation Mode :Tx CH MID

EUT Pol. :E2 Plane **Test Date** :2018-11-02

Temp./Humi. :23 deg_C / 62 RH


Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

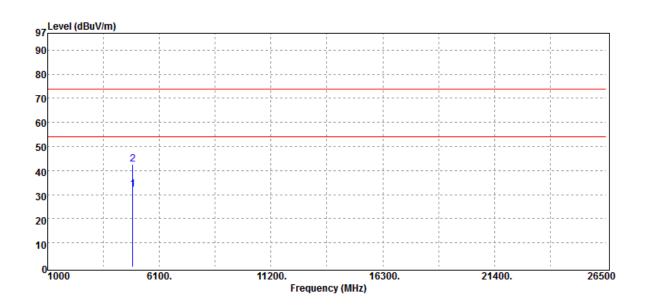

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dΒμV/m	dBμV/m	dB	_
4882.00	Average	26.46	5.90	32.36	54.00	-21.64	
4882.00	Peak	36.74	5.90	42.64	74.00	-31.36	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





Operation Band :EDR(3M) Fundamental Frequency :2480 MHz

Operation Mode


:Tx CH HIGH

EUT Pol. :E2 Plane **Test Date** :2018-11-02

Temp./Humi. :23 deg_C / 62 RH


Engineer :Wei

:VERTICAL Measurement Antenna Pol.

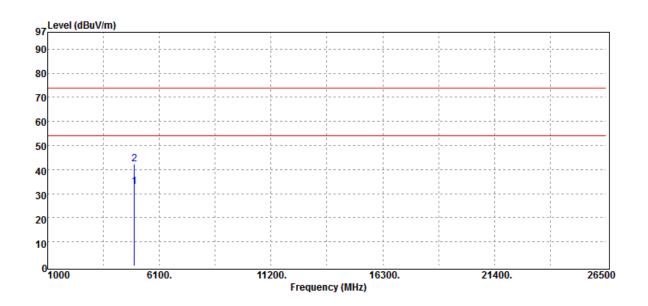

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
_	MHz	PK/QP/AV	dΒμV	dB	dΒμV/m	dΒμV/m	dB
	4960.00	Average	26.72	6.05	32.77	54.00	-21.23
	4960.00	Peak	36.33	6.05	42.38	74.00	-31.62

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






Operation Band :EDR(3M) Fundamental Frequency :2480 MHz **Operation Mode** :Tx CH HIGH

EUT Pol. :E2 Plane **Test Date** :2018-11-02

Temp./Humi. :23 deg_C / 62 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

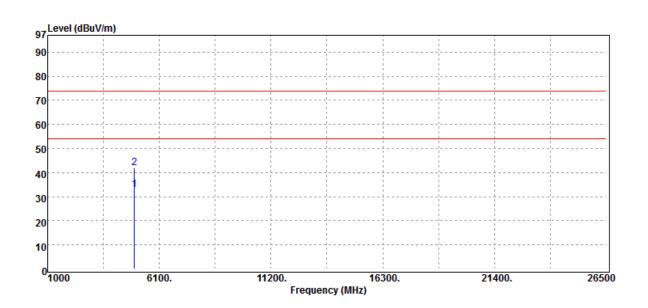

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dΒμV	dB	dΒμV/m	dBμV/m	dB	_
	4960.00	Average	26.96	6.05	33.01	54.00	-20.99	
	4960.00	Peak	36.07	6.05	42.12	74.00	-31.88	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: ER/2018/C0135

Page 57 of 74

11 FREQUENCY SEPARATION


11.1 Standard Applicable

Frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25 kHz or the 2/3*20dB bandwidth of the hopping channel, whichever is greater.

11.2 Measurement Equipment Used

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
EXA Spectrum Analyzer	Agilent	N9010A	MY50420195	05/03/2018	05/02/2019
DC Block	Mini-Circuits	BLK-18-S+	1	01/02/2018	01/01/2019
Notebook	Lenovo	T440P	P0000564	N/A	N/A

11.3 Test Set-up



11.4 Measurement Procedure


- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set center frequency of spectrum analyzer = middle of hopping channel.
- 5. Set the spectrum analyzer as RBW, VBW=100 kHz, Adjust Span to 5MHz, Sweep = auto.
- 6. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electrinis documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.

f (886-2) 2298-0488





11.5 Measurement Result

Channel separation (MHz)	Limit	Result
1	>=25 kHz or 2/3 times 20dB bandwidth	PASS

Frequency Separation Test Data




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488





12 NUMBER OF HOPPING FREQUENCY


12.1 Standard Applicable

Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

12.2 Measurement Equipment Used

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
EXA Spectrum Analyzer	Agilent	N9010A	MY50420195	05/03/2018	05/02/2019
DC Block	Mini-Circuits	BLK-18-S+	1	01/02/2018	01/01/2019
Notebook	Lenovo	T440P	P0000564	N/A	N/A

12.3 Test Set-up



12.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set spectrum analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = auto.
- 5. Set the spectrum analyzer as RBW=430 kHz, VBW=1.5MHz., Detector = Peak
- 6. Max hold, view and count how many channel in the band.

12.5 Measurement Result

Tabular Data of Total Channel Number

	Channel Number	Limit
2.4 GHz – 2.441GHz	40	
2.441 GHz – 2.4835GHz	39	>15
2.4GHz ~2.4835GHz	(40+39) = 79	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electrinis documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.






Channel Number

Hopping Frequency_8DPSK_3M_3DH5_2400-2441 MHz



Hopping Frequency 8DPSK 3M 3DH5 2441-2480 MHz

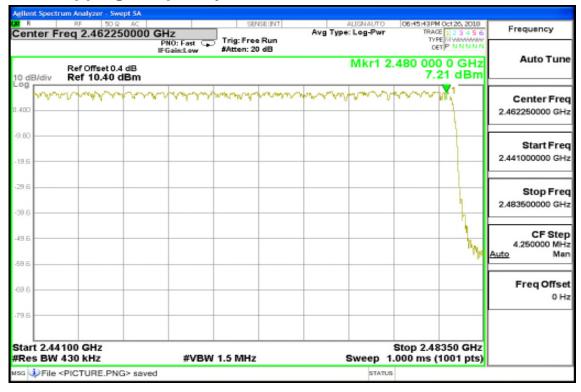

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, intention is drawn to the limitation of liability, intention is drawn to the limitation only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.

t (886-2) 2299-3279

f (886-2) 2298-0488



Report No.: ER/2018/C0135

Page 61 of 74

13 TIME OF OCCUPANCY (DWELL TIME)


13.1 Standard Applicable

Frequency hopping systems operating in the 2400MHz-2483.5MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

13.2 Measurement Equipment Used

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
EXA Spectrum Analyzer	Agilent	N9010A	MY50420195	05/03/2018	05/02/2019
DC Block	Mini-Circuits	BLK-18-S+	1	01/02/2018	01/01/2019
Notebook	Lenovo	T440P	P0000564	N/A	N/A

13.3 Test Set-up



13.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set center frequency of spectrum analyzer = operating frequency.
- 5. Set the spectrum analyzer as RBW, VBW=1MHz, 3MHz, Span = 0Hz, Detector = Peak, Adjust Sweep = $2\sim8$ ms.
- 6. Repeat above procedures until all frequency of the interest measured were complete.

Formula Deduced: time occupancy of one time slot X Hopping rate / total slot in one channel / total channel that hops X period of working channels.


Where, standard hopping rate is 1600 hops/s, slot in one channel for DH1, DH3, and DH5 is 2, 4, and 6, respectively.

DH1 consists of single time slot of the uplink, and one slot of the downlink Total Slot: 2 DH3 consists of three time slot of the uplink, and one slot of the downlink. Total Slot: 4 DH5 consists of five time slot of the uplink, and one slot of the downlink. Total Slot: 6

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.





In AFH mode, hopping rate is 800 hop/s with 6 slots in 20 hopping channels with channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 * 20) (S), Hop Over Occupancy Time comes to (800 / 6 / 20)*(0.4*20) = 53.33

Note: the result of the complete test default channel at 1Mbps is recorded on the test report, 2Mbps, and 3Mbps only records the measurement result at middle channel that reveals no much deviation.

13.5 Tabular Result of the Measurement

GESK (1Mbps)

Channel	PACKET TYPE	Measurement Result (ms)	Limit (ms)	1/T (kHz)	VBW setting (kHz)
	DH1	123.20	400ms	2.60	3.00
0	DH3	262.40	400ms	0.61	1.00
	DH5	307.20	400ms	0.35	1.00
	DH1	121.60	400ms	2.63	3.00
39	DH3	262.40	400ms	0.61	1.00
	DH5	308.80	400ms	0.35	1.00
	DH1	123.20	400ms	2.60	3.00
78	DH3	262.40	400ms	0.61	1.00
	DH5	307.20	400ms	0.00	1.00

π/4 DQPSK (2Mbps)

Channel	PACKET TYPE	Measurement Result (ms)	Limit (ms)	1/T (kHz)	VBW setting (kHz)
	2DH1	124.80	400ms	2.56	3.00
39	2DH3	262.40	400ms	0.61	1.00
	2DH5	308.80	400ms	0.35	1.00

8-DPSK (3Mbps)

Channel	PACKET TYPE	Measurement Result (ms)	Limit (ms)	1/T (kHz)	VBW setting (kHz)
	3DH1	123.20	400ms	2.60	3.00
39	3DH3	262.40	400ms	0.61	1.00
	3DH5	308.80	400ms	0.35	1.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, intention is drawn to the limitation of liability, intention is drawn to the limitation only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.

f (886-2) 2298-0488 www.tw.sgs.com



A period time = 0.4 (s) * 79 = 31.6 (s)

GFSK (1Mbps):

CH Low	DH1 time slot = DH3 time slot = DH5 time slot =	0.385 * 1.640 * 2.880 *	(1600/2/79) * (1600/4/79) * (1600/6/79) *	31.6 =	123.20 (ms) 262.40 (ms) 307.20 (ms)
CH Mid	DH1 time slot = DH3 time slot = DH5 time slot =	0.380 * 1.640 * 2.895 *	(1600/2/79) * (1600/4/79) * (1600/6/79) *	31.6 = 31.6 =	` ,
CH High	DH1 time slot = DH3 time slot = DH5 time slot =	0.385 * 1.640 * 2.880 *	(1600/2/79) * (1600/4/79) * (1600/6/79) *		123.20 (ms) 262.40 (ms) 307.20 (ms)
π/4 -DQPS	K (2Mbps):				
CH Mid	2DH1 time slo = 2DH3 time slo = 2DH5 time slo =	0.390 * 1.640 * 2.895 *	(1600/2/79) * (1600/4/79) * (1600/6/79) *		124.80 (ms) 262.40 (ms) 308.80 (ms)

8-DPSK (3Mbps):

CH Mid	3DH1 time slo =	0.385 *	(1600/2/79) *	31.6 =	123.20 (ms)
	3DH3 time slo =	1.640 *	(1600/4/79) *	31.6 =	262.40 (ms)
	3DH5 time slo =	2.895 *	(1600/6/79) *	31.6 =	308.80 (ms)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appropriate of this decument is undertically the produced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appropriate of this decument. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

www.tw.sqs.com





Page 64 of 74

GFSK (1Mbps) for AFH Mode					
Hopping Channel	PACKET TYPE	Measurement	Limit		
Number		Result (ms)	(ms)		
20	DH5	153.60	400ms		
	π/4 DQPSK (2Mb)	ps) for AFH Mode			
Hopping Channel	PACKET TYPE	Measurement	Limit		
Number	FACKLI TIFL	Result (ms)	(ms)		
20	2DH5	154.40	400ms		
	8-DPSK (3Mbps	s) for AFH Mode			
Hopping Channel	PACKET TYPE	Measurement	Limit		
Number	PACKETTIPE	Result (ms)	(ms)		
20	3DH5	154.40	400ms		

GFSK (1Mbps):

DH5 time s =	2.880	(ms)	*	(800/6/20*8 =	153.60	(ms))

π/4 -DQPSK (2Mbps

2DH5 time = (800/6/20*8 = 154.40 (ms))2.895 (ms) *


8-DPSK (3Mbps):

(800/6/20 * 8 = 154.40 (ms))3DH5 time = 2.895 (ms) *

13.6 Measurement Result


Note: Refer to next page for plots.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






Dwell Time GFSK 1M DH1 2402MHz

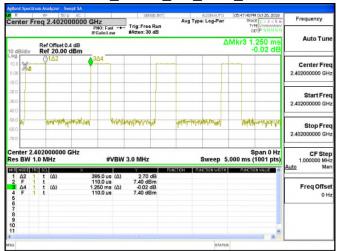


2441MHz Dwell Time GFSK 1M DH1

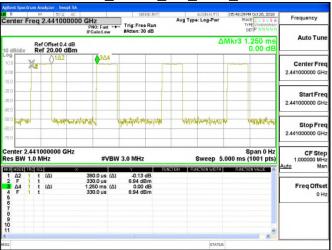


Dwell Time_GFSK_1M_DH1_2480MHz




Dwell Time GFSK 1M DH3 2402MHz

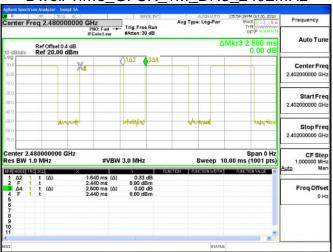

Dwell Time_GFSK_1M_DH3 2441MHz

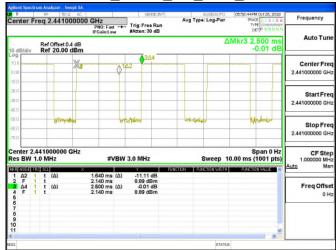


Dwell Time_GFSK_1M_DH3_2480MHz

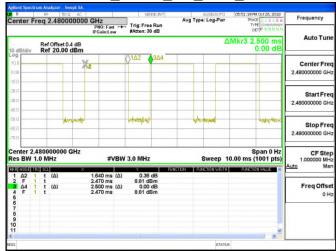

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⁹⁰天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms educement. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of

f (886-2) 2298-0488







Dwell Time GFSK 1M DH5 2402MHz

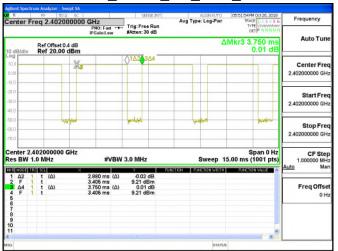


Dwell Time_GFSK_1M_DH5 2441MHz

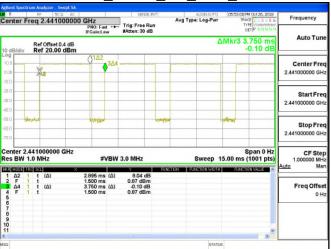


Dwell Time_GFSK_1M_DH5_2480MHz

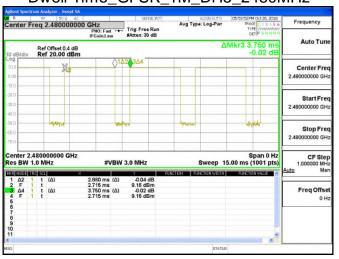


Dwell Time π4DQPSK 2M DH1 2402MHz

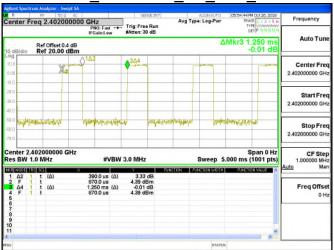

Dwell Time π4DQPSK 2M DH1 2441MHz

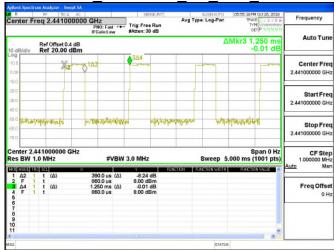


Dwell Time π4DQPSK 2M DH1 2480MHz

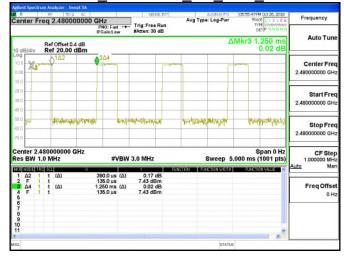

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⁹⁰天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms educement. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of

f (886-2) 2298-0488







Dwell Time π4DQPSK 2M DH3 2402MHz

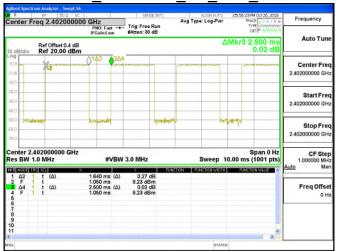


_____2441MHz Dwell Time π4DQPSK 2M DH3

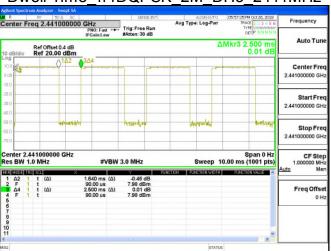


Dwell Time π4DQPSK 2M DH3 2480MHz

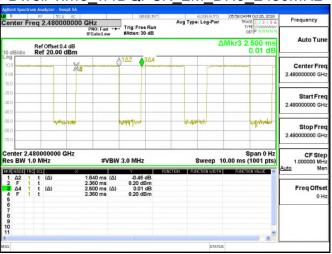


Dwell Time π4DQPSK 2M DH5 2402MHz

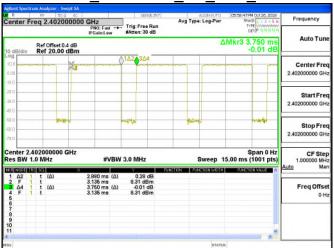

Dwell Time π4DQPSK 2M DH5 2441MHz

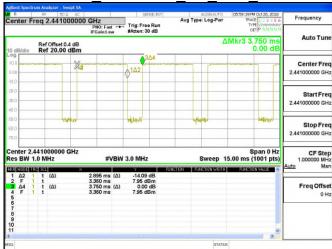


Dwell Time π4DQPSK 2M DH5 2480MHz

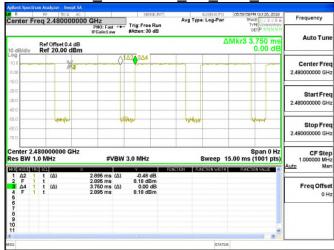

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留切天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms educement. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of

f (886-2) 2298-0488







Dwell Time 8DPSK 3M DH1 2402MHz

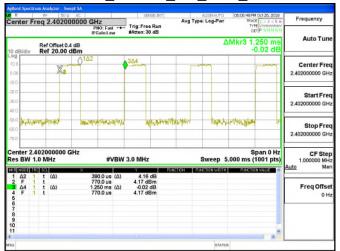


Dwell Time 8DPSK 3M DH1 2441MHz

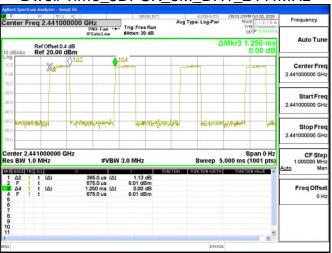


Dwell Time_8DPSK_3M_DH1 2480MHz

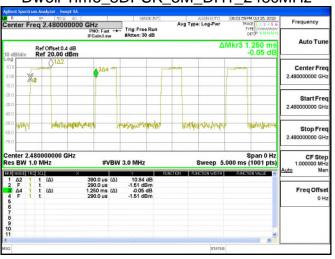


Dwell Time 8DPSK 3M DH3 2402MHz

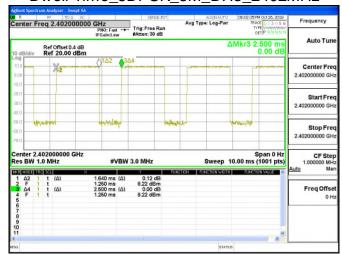

Dwell Time 8DPSK 3M DH3 2441MHz

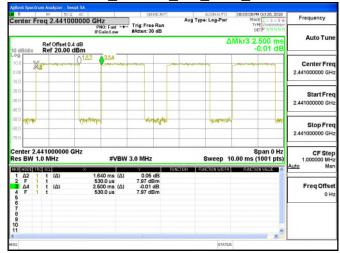

Dwell Time_8DPSK_3M_DH3_2480MHz

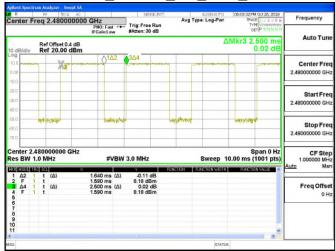


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⁹⁰天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.con/terms and conditions for Electronic Documents at www.sgs.con/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of


f (886-2) 2298-0488




Dwell Time 8DPSK 3M DH5 2402MHz

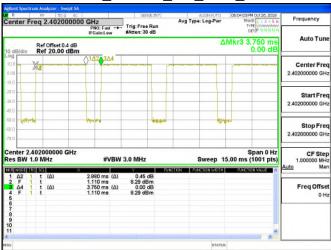

Dwell Time_8DPSK_3M_DH5 2441MHz

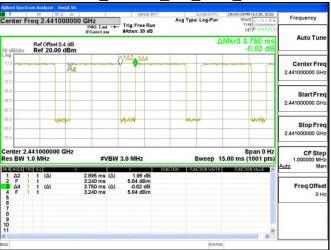

Dwell Time_8DPSK_3M_DH5_2480MHz

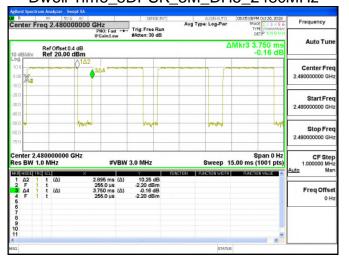

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of

f (886-2) 2298-0488



Report No.: ER/2018/C0135

Page 70 of 74

14 ANTENNA REQUIREMENT

14.1 Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device. If the transmitting antenna is greater than 6dBi, the power shall be reduced by the same level in

dB comparing to gain minus 6dBi.

14.2 Antenna Connected Construction

The antenna is designed as permanently attached and no consideration of replacement. Please see EUT photo for details.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.