

Page 1 of 64

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO **FCC PART 15 SUBPART C REQUIREMENT**

Sharp Corporation, Mobile Communication B.U.

Applicant: 2-13-1, Hachihonmatsu-lida, Higashi-hiroshima-shi,

Hiroshima 739-0192, Japan

Sharp Corporation Manufacturer:

1 Takumi-cho, Sakai-ku, Sakai City, Osaka 590-8522, Japan

Product Name: Smart Phone

Report Number: T190304W03-RP2

FCC ID: APYHRO00272

FCC Rule Part: §15.247, Cat: DTS

Mar. 26, 2019 **Issue Date:**

Date of Test: Mar. 05, 2019~Mar. 20, 2019

Date of EUT Received: Mar. 05, 2019

Compliance Certification Services Inc.Wugu Lab.

No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Tai-Issued by:

wan. (R.O.C.)

service@ccsrf.com

The test Result was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were given in ANSI C63.10: 2013 and compliance standards.

The test results of this report relate only to the tested sample (EUT) identified in this report The test Report of full or partial shall not copy. Without written approval of Compliance Certification Services Inc. (Wugu Laboratory).

Tested By: Wei Chang / Engineer

Approved By: Kevin Tsai / Deputy Manager



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 2 of 64

Revision History

Report Number	Revision	Description	Effected Page	Issue Date	Revised By
T190304W03-RP2	Rev.00	Initial creation of document	All	Mar. 26, 2019	Violetta Tang

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 3 of 64



Contents

1. GENERAL INFORMATION	4
2. SYSTEM TEST CONFIGURATION	
3. SUMMARY OF TEST RESULTS	
4. DESCRIPTION OF TEST MODES	g
5. MEASUREMENT UNCERTAINTY	
6. CONDUCTED EMISSION TEST	12
7. PEAK OUTPUT POWER MEASUREMENT	16
8. 6dB BANDWIDTH MEASUREMENT	20
9. CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT	26
10. RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT	32
11. PEAK POWER SPECTRAL DENSITY	61
12. ANTENNA REQUIREMENT	64

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 4 of 64

1. GENERAL INFORMATION

1.1 Product Description

General:

Product Name:	Smart Phone
Hardware Version:	DVT
Software Version:	N/A
Power Supply:	3.85V from Rechargeable Li-ion Battery

Bluetooth Low Energy:

Frequency Range:	2.402GHz – 2.480GHz
Bluetooth Version	BT V5.0 (dual mode)
Channel number:	40 channels
Modulation type:	GFSK
Transmit Power:	6.22dBm (BT 4.0) 6.46dBm (BT 5.0)
Antenna Designation:	Inverted-F Antenna, Gain: -3.3dBi

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 5 of 64

1.2 Test Methodology of Applied Standards

FCC Part 15, Subpart C §15.247

KDB 558074 D01 v05r01 DTS Meas. Guidance

ANSI C63.10:2013

Note: All test items have been performed and record as per the above standards.

1.3 Test Facility

Compliance Certification Services Inc. Wugu Lab. No.11, Wugong 6th Rd.,

Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.) (TAF code 1309)

FCC Designation number: TW1309

1.4 Special Accessories

There are no special accessories used while test was conducted.

1.5 Equipment Modifications

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 6 of 64

2. SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plan. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz,. The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Conducted Test (RF)

The active antenna port of the unlicensed wireless device is connected to the spectrum analyzer with attenuator to protect the instrumentation. If a second antenna port is available, it is tested at one operating frequency, with other port(s) appropriately terminated, to verify it has similar output characteristics as the fully tested port.

2.3.2 Radiated Emissions

The EUT is a placed on a turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 7 of 64

2.5 Configuration of Tested System Fig. 2-1 Radiated Emission



Fig. 2-2 AC Power Line Conducted **Emission**



Fig. 2-2 Conducted (Antenna Port) **Emission**




Table 2-1 Equipment Used in Tested System

		•	•			
Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1.	Bluetooth Test Software	N/A	N/A	N/A	N/A	N/A
2.	DC Power Supply	Anritsu	E3640A	MY52410006	N/A	Unshielded
3.	Notebook	Lenovo	T440P	PC-089AH5	Shielded	Unshielded

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 8 of 64

3. SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.207(a)	AC Power Line Conducted Emission	Compliant
§15.247(b) (3)	Peak Output Power	Compliant
§15.247(a)(2)	6dB Bandwidth	Compliant
§15.205 §15.209 §15.247(d)	Conducted Band Edge and Spurious Emission	Compliant
§15.205 §15.209 §15.247(d)	Radiated Band Edge and Spurious Emission	Compliant
§15.247(e)	Peak Power Density	Compliant
§15.203 §15.247(b)	Antenna Requirement	Compliant



Page 9 of 64

4. DESCRIPTION OF TEST MODES

4.1 Operated in 2400 ~ 2483.5MHz Band

40 channels are provided for Bluetooth LE

10 011011110	40 Ghannels are provided for Blackouth EE					
ITEM	FREQUENCY	ITEM	FREQUENCY	ITEM	FREQUENCY	
1	2402 MHz	15	2430 MHz	29	2458 MHz	
2	2404 MHz	16	2432 MHz	30	2460 MHz	
3	2406 MHz	17	2434 MHz	31	2462 MHz	
4	2408 MHz	18	2436 MHz	32	2464 MHz	
5	2410 MHz	19	2438 MHz	33	2466 MHz	
6	2412 MHz	20	2440 MHz	34	2468 MHz	
7	2414 MHz	21	2442 MHz	35	2470 MHz	
8	2416MHz	22	2444 MHz	36	2472 MHz	
9	2418 MHz	23	2446 MHz	37	2474 MHz	
10	2420 MHz	24	2448 MHz	38	2476 MHz	
11	2422 MHz	25	2450 MHz	39	2478 MHz	
12	2424 MHz	26	2452 MHz	40	2480 MHz	
13	2426 MHz	27	2454 MHz			
14	2428 MHz	28	2456 MHz			



Page 10 of 64

4.2 The Worst Test Modes and Channel Details

- 1. The EUT has been tested under operating condition.
- 2. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.
- 3. Investigation has been done on all the possible configurations for searching the worst case.

AC POWER LINE CONDUCTED EMISSION TEST:

Test Condition	AC Power line conducted emission for line and neutral	
Worst Case	Operation in normal mode	

RADIATED EMISSION TEST:

RADIATED EMIGOION TEST.					
RADIATED EMISSION TEST (BELOW 1 GHz)					
MODE	AVAILABLE	TESTED	MODULATION	DATA RATE	
MODE	CHANNEL	CHANNEL	MODULATION	(Mbps)	
Bluetooth LE	2402 to 2480	2442	GFSK	1	
Bluetooth LE	2402 to 2480	2442	GFSK	2	
RADIATED EMISSION TEST (ABOVE 1 GHz)					
MODE	AVAILABLE	TESTED	MODULATION	DATA RATE	
MODE	CHANNEL	CHANNEL	MODULATION	(Mbps)	
Bluetooth LE	2402 to 2480	2402, 2442, 2480	GFSK	1	
Bluetooth LE	2402 to 2480	2402, 2442, 2480	GFSK	2	

Note: The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for Bluetooth LE Transmitter for channel Low, Mid and High, the worst case E1 position was reported.

ANTENNA PORT CONDUCTED MEASUREMENT:

7.1.1.2.1.1.1.1.1.1.1.1.1.1.1.1.1.1.1.1.					
CONDUCTED TEST					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)	
Bluetooth LE	2402 to 2480	2402, 2440, 2480	GFSK	1	
Bluetooth LE	2402 to 2480	2402, 2440, 2480	GFSK	2	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製





5. MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	+/- 1.2575 dB
Peak Output Power	+/- 1.922 dB
6dB Bandwidth	+/- 61.248 Hz
100 kHz Bandwidth of Frequency Band Edges	+/- 1.922 dB
Peak Power Density	+/- 2.004 dB
3M Semi Anechoic Chamber / 30M~200M	+/- 4.12 dB
3M Semi Anechoic Chamber / 200M~1000M	+/- 4.68 dB
3M Semi Anechoic Chamber / 1G~8G	+/- 5.18 dB
3M Semi Anechoic Chamber / 8G~18G	+/- 5.47 dB
3M Semi Anechoic Chamber / 18G~26G	+/- 3.81 dB
3M Semi Anechoic Chamber / 26G~40G	+/- 3.87 dB

Note:

- 1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2. ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report.
- 3. The conformity assessment statement in this report is based solely on the test results, measurement uncertainty is excluded.



Page 12 of 64

6. CONDUCTED EMISSION TEST

6.1 Standard Applicable:

Frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

Frequency range	Limits dB(uV)		
MHz	Quasi-peak	Average	
0.15 to 0.50	66 to 56	56 to 46	
0.50 to 5	56	46	
5 to 30	60	50	

Note

- 1. The lower limit shall apply at the transition frequencies
- 2.The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

6.2 Measurement Equipment Used:

	Conducted Emission Test Site									
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.					
TYPE		NUMBER	NUMBER	CAL.						
CABLE	EMCI	CFD300-NL	CERF	06/29/2018	06/28/2019					
EMI Test Receiver	R&S	ESCI	100064	07/24/2018	07/23/2019					
LISN	SCHWARZ-	NSLK 8127	8127-541	01/31/2019	01/30/2020					
2.0.1	BECK		0.2. 0	0.70172010	0 11 001 20 20					
LISN	SCHAFFNER	NNB 41	03/10013	02/13/2019	02/12/2020					
Software		EZ-EMC(CCS-3A1-CE)								

6.3 EUT Setup:

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.10:2013.
- The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page 13 of 64



6.4 Test SET-UP (Block Diagram of Configuration)

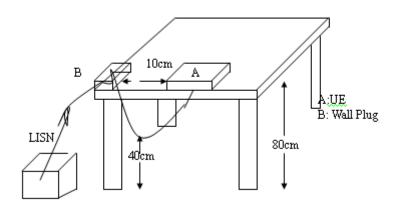

6.5 Measurement Procedure:

- 1. The EUT was placed on a table which is 0.8m above ground plan.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all phases of power being supplied by given UE are completed

6.6 Measurement Result:

Note: Refer to next page for measurement data and plots.

Note2: The * reveals the worst-case results that closet to the limit

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。




Page 14 of 64

AC POWER LINE CONDUCTED EMISSION TEST DATA

Description: Operation Date: 2019/3/11

Temp.(℃)/**Hum.**(%): 24(°C)/52% Line: L1

Test Voltage: AC 120V/60Hz Test By: Peter

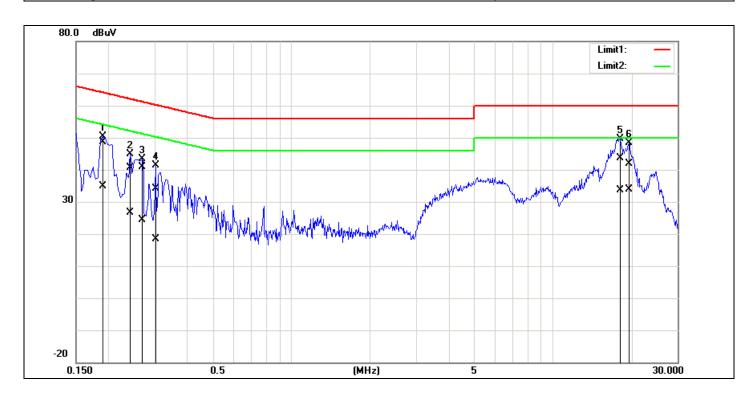

No.	Frequency	QuasiPeak reading	Average reading	Correction	QuasiPeak result	Average result	QuasiPeak limit	Average limit	QuasiPeak margin	Average margin	Remark
		3							Ü	Ŭ	
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1*	0.1900	48.48	34.61	0.15	48.63	34.76	64.03	54.04	-15.40	-19.28	Pass
2	0.2420	40.36	26.44	0.15	40.51	26.59	62.02	52.03	-21.51	-25.44	Pass
3	0.2700	40.69	24.21	0.15	40.84	24.36	61.12	51.12	-20.28	-26.76	Pass
4	0.3020	34.00	18.13	0.16	34.16	18.29	60.19	50.19	-26.03	-31.90	Pass
5	18.1100	42.96	33.00	0.65	43.61	33.65	60.00	50.00	-16.39	-16.35	Pass
6	19.5340	41.17	33.17	0.69	41.86	33.86	60.00	50.00	-18.14	-16.14	Pass

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page 15 of 64

Description: Operation Date: 2019/3/11

Temp.(℃)/**Hum.**(%): 24(°C)/52% Line:

AC 120V/60Hz Test By: **Test Voltage:** Peter

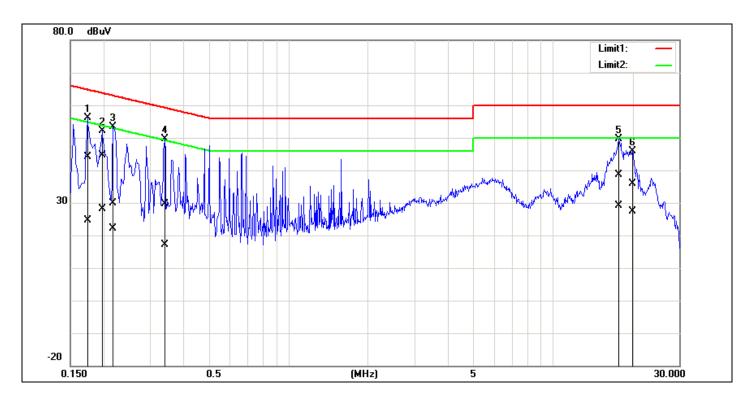

No.	Frequency	QuasiPeak reading	Average reading	Correction factor	QuasiPeak result	Average result	QuasiPeak limit	Average limit	QuasiPeak margin	Average margin	Remark
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.1740	44.02	24.65	0.10	44.12	24.75	64.76	54.77	-20.64	-30.02	Pass
2*	0.1980	44.43	28.14	0.10	44.53	28.24	63.69	53.69	-19.16	-25.45	Pass
3	0.2180	29.75	22.13	0.10	29.85	22.23	62.89	52.89	-33.04	-30.66	Pass
4	0.3420	29.47	16.91	0.11	29.58	17.02	59.15	49.15	-29.57	-32.13	Pass
5	17.7099	38.12	28.61	0.51	38.63	29.12	60.00	50.00	-21.37	-20.88	Pass
6	19.9900	35.45	26.81	0.55	36.00	27.36	60.00	50.00	-24.00	-22.64	Pass

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 16 of 64

7. PEAK OUTPUT POWER MEASUREMENT

7.1 Standard Applicable:

For systems using digital modulation in the 2400-2483.5 MHz bands, the limit for peak output power is 1Watt.


If the transmitting antenna of directional gain greater than 6dBi are used the peak output power form the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6dBi.

In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of Antenna exceeds 6dBi.

7.2 Measurement Equipment Used:

Conducted Emission Test Site									
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.				
TYPE		NUMBER	NUMBER	CAL.					
Power Meter	Anritsu	ML2496A	1242004	10/23/2018	10/22/2019				
Power Sensor	Anritsu	MA2411B	1207365	10/23/2018	10/22/2019				
Power Sensor	Anritsu	MA2411B	1207368	10/24/2018	10/23/2019				
DC Power Supply	Agilent	E3640A	KR93300208	08/15/2018	08/14/2019				
Attenuator	Mini-Circuit	BW-S10W2+	1	02/26/2019	02/25/2020				

7.3 Test Set-up:



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製





7.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter.

Power Meter:

It is used as the auxiliary test equipment to conduct the output power measurement.

- 4. Record the max. Reading as observed from Power Meter.
- 5. Repeat above procedures until all test default channel measured was complete.


Formula:

Duty Cycle = Ton / (Ton+Toff)

Duty Factor

DATA RATE 1 Mbps:

	Duty Cycle (%)	Duty Factor (dB)	1/T (kHz)	VBW setting (kHz)
BLE	62.00	2.08	2.56	3.00

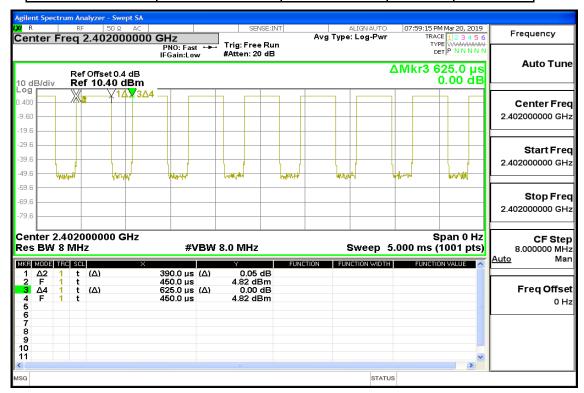

Duty Cycle Factor:10*log(1/(62/100))=2.08


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



DATA RATE 2 Mbps (BT 5.0):

	Duty Cycle (%)	Duty Factor (dB)	1/T (kHz)	VBW setting (kHz)
BLE	57.00	2.44	0.94	1.00

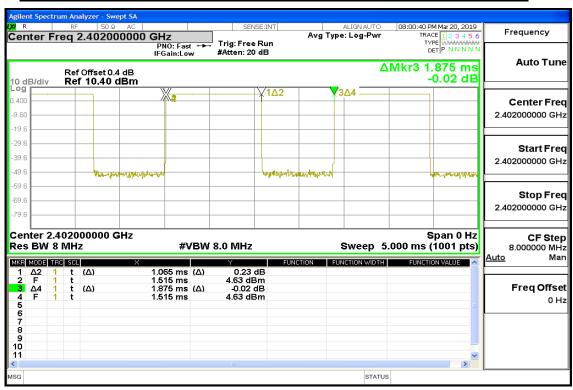

Duty Cycle Factor:10*log(1/(57/100))=2.44

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 19 of 64

7.5 Measurement Result:

DATA RATE 1 Mbps:

BLE mode:

СН	Frequency (MHz)	Peak Power Output (dBm)	Required Limit
Low	2402	4.86	1 Watt = 30 dBm
Mid	2442	6.22	1 Watt = 30 dBm
High	2480	5.67	1 Watt = 30 dBm
BLE mo	de:		
СН	Frequency (MHz)	Max. Avg. Output include tune up tolerance Power (dBm)	Required Limit
Low	2402	4.74	1 Watt = 30 dBm
Mid	2442	6.00	1 Watt = 30 dBm
High	2480	5.51	1 Watt = 30 dBm

^{*}Note: Measured by power meter, cable loss as 0.4 dB that offsets on the power meter in Peak

DATA RATE 2 Mbps (BT 5.0):

BLE mode:

СН	Frequency (MHz)	Peak Power Output (dBm)	Required Limit
0	2402	5.10	1 Watt = 30 dBm
20	2442	6.46	1 Watt = 30 dBm
39	2480	5.92	1 Watt = 30 dBm
BLE mo	de:		
CH Frequency (MHz)		Max. Avg. Output include tune up tolerance Power (dBm)	Required Limit
0	2402	4.95	1 Watt = 30 dBm
20	2442	6.29	1 Watt = 30 dBm
39	2480	5.61	1 Watt = 30 dBm

^{*}Note: Measured by power meter, cable loss as 0.4 dB that offsets on the power meter in Peak

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report retier only to the sample(s) tested and such sample(s) are retained for 90 days only.

Phis document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of the SGS Group (SGS SA)

^{*}Note: Measured by power meter, as cable loss+ Duty cycle factor that offsets on the power meter

^{*}Note: Max. Output include tune up tolerance Power is average power

^{*}Note: Measured by power meter, as cable loss+ Duty cycle factor that offsets on the power meter

^{*}Note: Max. Output include tune up tolerance Power is average power



Page 20 of 64

8. 6DB BANDWIDTH MEASUREMENT


8.1 Standard Applicable

The minimum 6 dB bandwidth shall be at least 500 kHz.

8.2 Measurement Equipment Used

mode are more Equipment 600 a									
Conducted Emission Test Site									
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.				
TYPE		NUMBER	NUMBER	CAL.					
DC Power Supply	Agilent	E3640A	KR93300208	08/15/2018	08/14/2019				
PXA Spectrum Analyzer	Agilent	N9030A	MY53120760	04/09/2018	04/08/2019				
DC Block	Mini-Circuits	BLK-18-S+	31129(1)	02/26/2019	02/25/2020				
Attenuator	Mini-Circuit	BW-S10W2+	1	02/26/2019	02/25/2020				

8.3 Test Set-up:



8.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. For 6dB Bandwidth:
 - Set the spectrum analyzer as RBW=100 kHz, VBW= 3*RBW, Span = 5MHz, Detector=Peak, Sweep=auto.
- 5. Mark the peak frequency and -6dB (upper and lower) frequency.
- 6. Repeat above procedures until all test default channel is completed

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page 21 of 64

8.5 Measurement Result: **DATA RATE 1 Mbps:**

BI F mode

Frequency (MHz)	6dB BW (MHz)	BW (MHz)	Result
2402	0.683	> 0.5	PASS
2442	0.683	> 0.5	PASS
2480	0.684	> 0.5	PASS


DATA RATE 2 Mbps (BT 5.0):

BLE mode

Frequency (MHz)	6dB BW (MHz)	BW (MHz)	Result
2402	1.169	> 0.5	PASS
2442	1.173	> 0.5	PASS
2480	1.175	> 0.5	PASS

Note: Refer to next page for plots.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




BLE mode

DATA RATE 1 Mbps:

6dB Band Width Test Data CH-Low

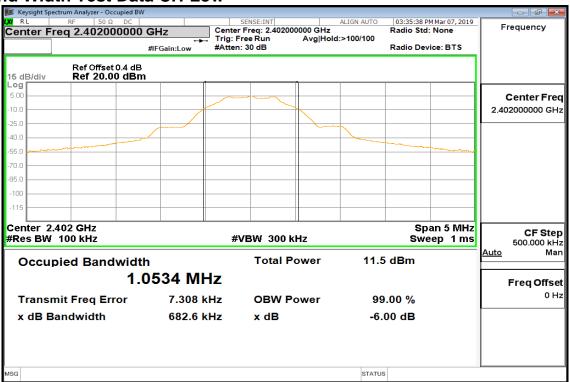

6dB Band Width Test Data CH-Mid

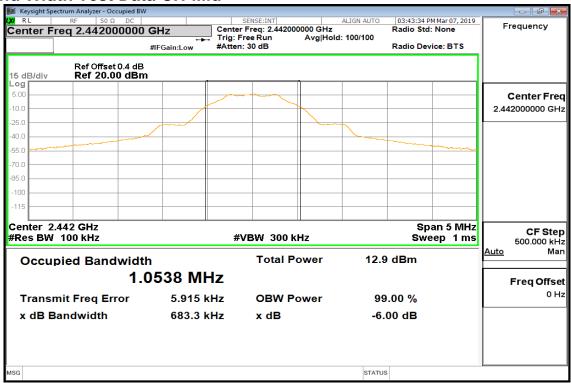


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report retier only to the sample(s) tested and such sample(s) are retained for 90 days only.

Phis document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the company and the parties of the Company and the state of the company and t transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



6dB Band Width Test Data CH-High

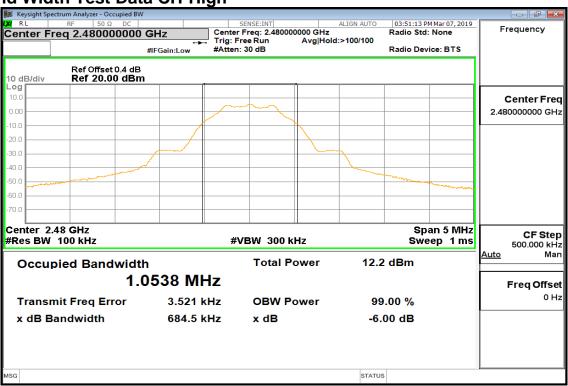

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report retier only to the sample(s) tested and such sample(s) are retained for 90 days only.

Phis document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the company and the parties of the Company and the state of the company and t transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law


Page 24 of 64



DATA RATE 2 Mbps (BT 5.0): 6dB Band Width Test Data CH-Low



6dB Band Width Test Data CH-Mid

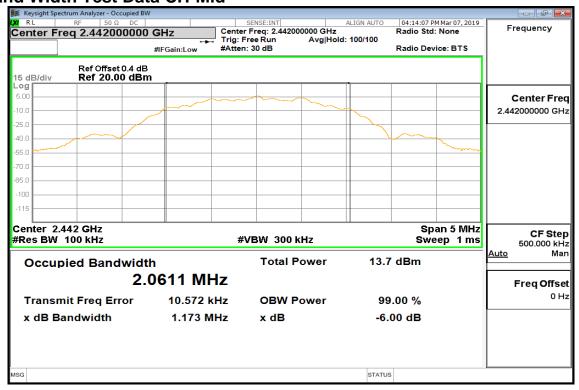

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Unless otherwise stated the results shown in this test report retier only to the sample(s) tested and such sample(s) are retained for 90 days only.

Phis document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the company and the parties of the Company and the state of the company and t transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

Member of the SGS Group (SGS SA)



6dB Band Width Test Data CH-High

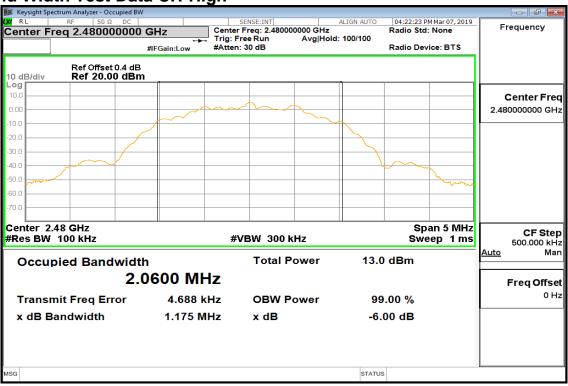

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report retier only to the sample(s) tested and such sample(s) are retained for 90 days only.

Phis document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the company and the parties of the Company and the state of the company and t transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 26 of 64

9. CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT


9.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

9.2 Measurement Equipment Used:

Conducted Emission Test Site									
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.				
TYPE		NUMBER	NUMBER	CAL.					
DC Power Supply	Agilent	E3640A	KR93300208	08/15/2018	08/14/2019				
PXA Spectrum	A gilont	NOOSOA	MY53120760	04/00/2019	04/09/2010				
Analyzer	Agilent	N9030A	N 1 53 1 20 7 60	04/09/2016	04/06/2019				
DC Block	Mini-Circuits	BLK-18-S+	31129(1)	02/26/2019	02/25/2020				
Attenuator	Mini-Circuit	BW-S10W2+	1	02/26/2019	02/25/2020				

9.3 Test SET-UP:



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page 27 of 64

9.4 Measurement Procedure

9.4.1 Reference Level of Emission Limit:

- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Set the span to 1.5 times the DTS channel bandwidth.
- 4. Set the RBW = 100kHz & VBW = 300 kHz.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.

9.4.2 Conducted Band Edge:

- 1. To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set start to edge frequency, and stop frequency of spectrum analyzer so as to encompass the spectrum to be examined.
- Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Detector = Peak, Sweep = auto
- 6. Mark the highest reading of the emission as the reference level measurement.
- Marker on frequency, 2.3999GHz and 2.4836GHz, and examine shall 100 kHz immediately outside the authorized (2400~2483.5MHz) be attenuated by 20dB at least relative to the maximum emission of power.
- Repeat above procedures until all default test channel (low, middle, and high) was complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page 28 of 64

Conducted Spurious Emission:

- To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Set RBW = 100 kHz & VBW=300 kHz, Detector = Peak, Sweep = Auto
- 4. Allow trace to fully stabilize.
- 5. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- 6. Repeat above procedures until all default test channel measured were complete.

9.5 Measurement Result:

DATA RATE 1 Mbps:

Reference Level of Limit

Frequency (MHz)	RF Power Density (dBm)	Reference Level of Limit = PSD - 20dB (dBm)
2402	4.61	-15.39
2442	6.05	-13.95
2480	5.39	-14.61

NOTE: cable loss as 0.4dB that offsets in the spectrum

NOTE: Refer to next page for plots.

DATA RATE 2 Mbps (BT 5.0):

Reference Level of Limit

Frequency (MHz)	RF Power Density (dBm)	Reference Level of Limit = PSD - 20dB (dBm)
2402	4.56	-15.44
2442	6.00	-14.00
2480	5.36	-14.64

NOTE: cable loss as 0.4dB that offsets in the spectrum

NOTE: Refer to next page for plots.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions for Electronic Documents at www.sgs.com/terms and conditions of liability, indemnification and Transaction documents, Subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/retring-e-occuments/fifth-e-occument/fifth-e-oc



Reference Level BLE 1M LowCH00-2402



Reference Level BLE 1M MidCH19-2442



Reference Level BLE 1M HighCH39-2480



Reference Level_BLE_2M_LowCH00-2402



Reference Level_BLE_2M_MidCH19-2442




Reference Level BLE 2M HighCH39-2480




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Band Edge_BLE_1M_LowCH00-2402




Band Edge_BLE_1M_HighCH39-2480



Band Edge_BLE_2M_LowCH00-2402




Band Edge_BLE_2M_HighCH39-2480




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Spurious Emission_BLE_1M_LowCH00-2402




Spurious Emission_BLE_1M_MidCH19-2442




Spurious Emission_BLE_1M_HighCH39-2480




Spurious Emission_BLE_2M_LowCH00-2402



Spurious Emission_BLE_2M_MidCH19-2442



Spurious Emission_BLE_2M_HighCH39-2480



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 32 of 64

10. RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT

10.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands must also comply with the §15.209 limit as below.

And according to §15.33(a) (1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level (dB μ V/m) = 20 log Emission level (dB μ V/m)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 33 of 64

10.2 Measurement Equipment Used


966A Chamber					
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.
TYPE		NUMBER	NUMBER	CAL.	
Band Reject Filters	MICRO TRONICS	BRM 50702	120	02/26/2019	02/25/2020
Bilog Antenna	Sunol Sciences	JB3	A030105	07/13/2018	07/12/2019
Cable	HUBER SUHNER	SUCOFLEX 104PEA	25157	02/26/2019	02/25/2020
Cable	HUBER SUHNER	SUCOFLEX 104PEA	20995	02/26/2019	02/25/2020
Digital Thermo-Hygro Meter	WISEWIND	1206	D07	01/30/2019	01/29/2020
double Ridged Guide Horn Antenna	ETC	MCTD 1209	DRH13M02003	08/20/2018	08/19/2019
Loop Ant	COM-POWER	AL-130	121051	03/21/2018	03/20/2019
Pre-Amplifier	EMEC	EM330	060609	02/26/2019	02/25/2020
Pre-Amplifier	HP	8449B	3008A00965	02/26/2019	02/25/2020
PSA Series Spectrum Analyzer	Agilent	E4446A	MY46180323	05/31/2018	05/30/2019
Antenna Tower	ccs	CC-A-1F	N/A	N.C.R	N.C.R
Controller	ccs	CC-C-1F	N/A	N.C.R	N.C.R
Turn Table	ccs	CC-T-1F	N/A	N.C.R	N.C.R
Software	e3 V6.11-20180413				

NOTE: N.C.R refers to Not Calibrated Required.




10.3 Test SET-UP


(A) Radiated Emission Test Set-UP Frequency Below 30MHz.

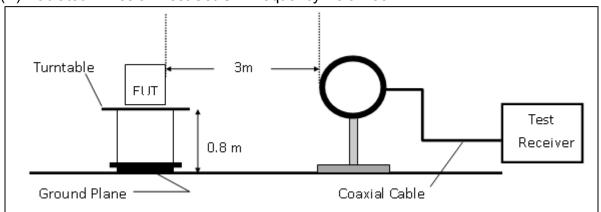

(B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

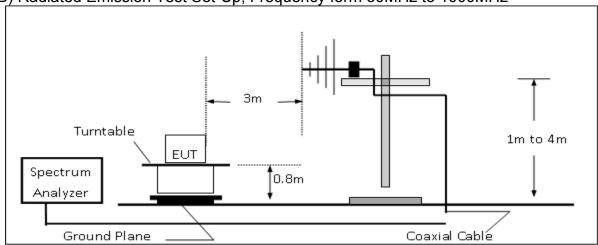

(C) Radiated Emission Test Set-UP Frequency Over 1 GHz

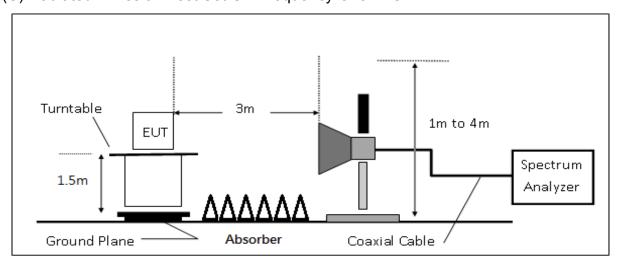

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 35 of 64

10.4 Measurement Procedure

- 1. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 2. The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 0.8m for frequency> 1GHz above ground plan.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 5. Set the spectrum analyzer as RBW=120 kHz and VBW=300 kHz for Peak Detector (PK) and Quasi-peak (QP) at frequency below 1 GHz.
- 6. Set the spectrum analyzer as RBW=1 MHz, VBW=3 MHz for Peak Detector at frequency above 1 GHz.
- 7. Set the spectrum analyzer as RBW=1 MHz, VBW=10 Hz (Duty cycle > 98%) or VBW ≥ 1/T (Duty cycle < 98%) for Average Detector at frequency above 1 GHz.
- 8. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 9. Maximum procedure was performed on the six highest emissions to ensure EUT compliance
- 10. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. On spectrum, change spectrum mode in linear display mode, and reduce VBW = 10Hz if average reading is measured.
- 11. Repeat above procedures until all default test channel measured were complete.



Page 36 of 64

10.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	<u> </u>	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

Actual FS(dB μ V/m) = SPA. Reading level(dB μ V) + Factor(dB)

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

10.6 Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) was not reported.

10.7 Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 37 of 64


Radiated Band Edge Measurement Result (BLE mode) **DATA RATE 1 Mbps:**

Operation Band :BLE **Test Date** :2019-03-07

:2402 MHz :20 deg_C / 61 RH **Fundamental Frequency** Temp./Humi.

Operation Mode :Bandedge CH LOW Engineer :Wei

EUT Pol. :E1 Plane :VERTICAL Measurement Antenna Pol.

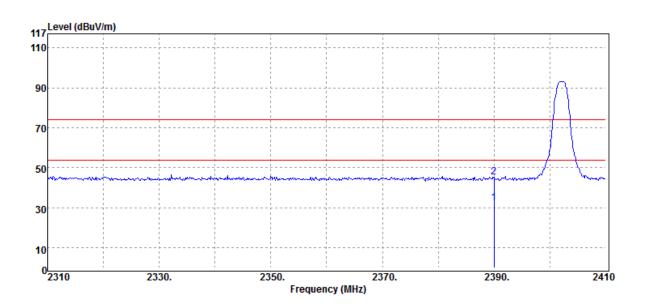

eq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
Hz	PK/QP/AV	dΒμV	dB	dΒμV/m	dBμV/m	dB
00.00	Average	35.65	-3.33	32.32	54.00	-21.68
00.00	Peak	48.47	-3.33	45.14	74.00	-28.86
	Hz 0.00	Mode Hz PK/QP/AV 0.00 Average	Mode Reading Level Hz PK/QP/AV dBμV 0.00 Average 35.65	Mode Reading Level Hz PK/QP/AV dBμV dB 0.00 Average 35.65 -3.33	Mode Reading Level FS Hz PK/QP/AV dBμV dB dBμV/m 0.00 Average 35.65 -3.33 32.32	Mode Reading Level FS @3m Hz PK/QP/AV dBμV dB dBμV/m dBμV/m 0.00 Average 35.65 -3.33 32.32 54.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 38 of 64

Operation Band Fundamental Frequency **Operation Mode**

:BLE :2402 MHz


:Bandedge CH LOW

EUT Pol. :E1 Plane **Test Date** :2019-03-07

Temp./Humi. :20 deg_C / 61 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

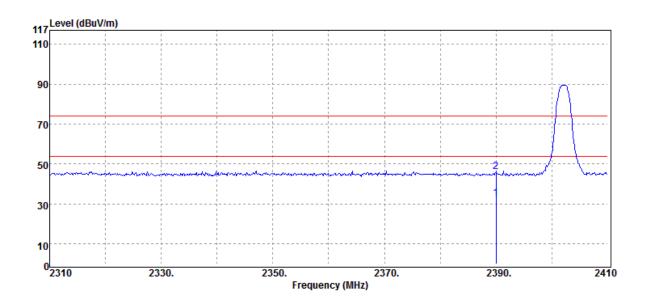

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
2390.00	Average	36.24	-3.33	32.91	54.00	-21.09
2390.00	Peak	49.34	-3.33	46.01	74.00	-27.99

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 39 of 64

Operation Band Fundamental Frequency **Operation Mode**

:BLE :2480 MHz


:Bandedge CH HIGH

EUT Pol. :E1 Plane **Test Date** :2019-03-07

Temp./Humi. :20 deg_C / 61 RH

Engineer :Wei

:VERTICAL Measurement Antenna Pol.

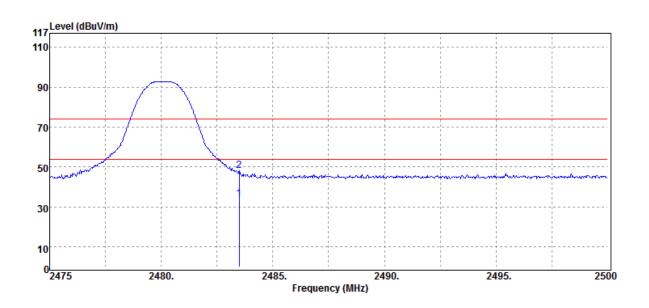

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB	_
2483.50	Average	36.57	-2.72	33.85	54.00	-20.15	
2483.50	Peak	50.79	-2.72	48.07	74.00	-25.93	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 40 of 64

Operation Band Fundamental Frequency **Operation Mode**

:BLE :2480 MHz


:Bandedge CH HIGH

EUT Pol. :E1 Plane **Test Date** :2019-03-07

Temp./Humi. :20 deg_C / 61 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

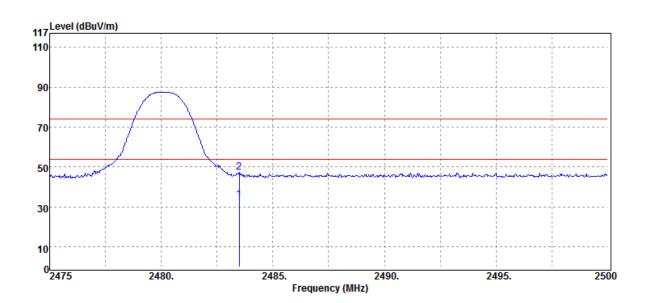

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	_
2483.50	Average	36.13	-2.72	33.41	54.00	-20.59	
2483.50	Peak	49.93	-2.72	47.21	74.00	-26.79	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 41 of 64

DATA RATE 2 Mbps (BT 5.0):

Operation Band :BLE(2M) **Fundamental Frequency** :2402 MHz


Operation Mode :Bandedge CH LOW

EUT Pol. :E1 Plane **Test Date** :2019-03-07

Temp./Humi. :20 deg_C / 61 RH

Engineer :Wei

:VERTICAL Measurement Antenna Pol.

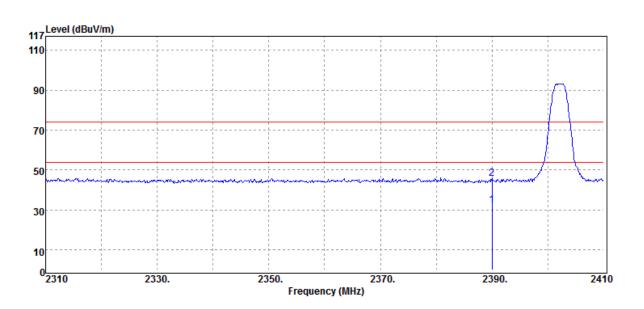

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB	
	2390.00	Average	35.56	-3.33	32.23	54.00	-21.77	
	2390.00	Peak	48.96	-3.33	45.63	74.00	-28.37	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 42 of 64

Operation Band Fundamental Frequency **Operation Mode**

:BLE(2M) :2402 MHz


:Bandedge CH LOW

EUT Pol. :E1 Plane **Test Date** :2019-03-07

Temp./Humi. :20 deg_C / 61 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

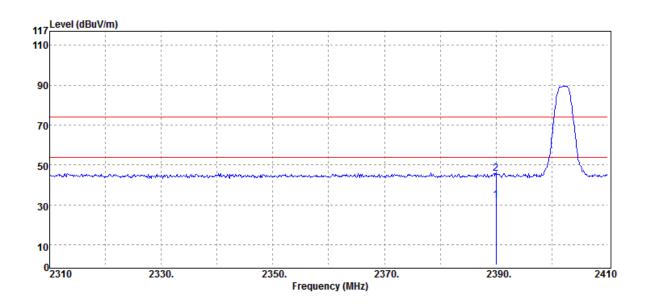

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	
	2390.00	Average	35.55	-3.33	32.22	54.00	-21.78	
	2390.00	Peak	49.12	-3.33	45.79	74.00	-28.21	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 43 of 64

Operation Band Fundamental Frequency **Operation Mode**

:BLE(2M) :2480 MHz


:Bandedge CH HIGH

EUT Pol. :E1 Plane **Test Date** :2019-03-07

Temp./Humi. :20 deg_C / 61 RH

Engineer :Wei

:VERTICAL Measurement Antenna Pol.

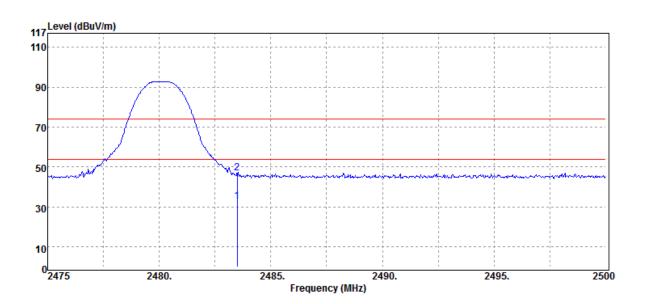

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
	2483.50	Average	35.67	-2.72	32.95	54.00	-21.05
	2483.50	Peak	49.83	-2.72	47.11	74.00	-26.89

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 44 of 64

Operation Band Fundamental Frequency **Operation Mode**

:BLE(2M) :2480 MHz


:Bandedge CH HIGH

EUT Pol. :E1 Plane **Test Date** :2019-03-07

Temp./Humi. :20 deg_C / 61 RH


Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

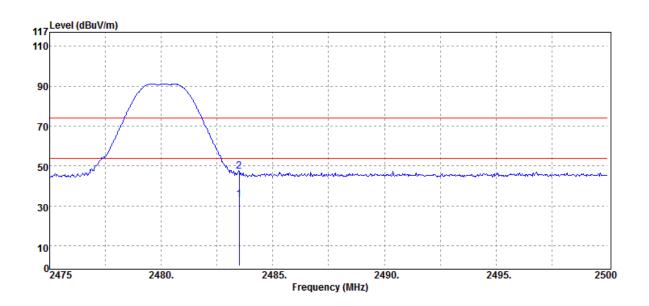

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB	
2483.50	Average	35.97	-2.72	33.25	54.00	-20.75	
2483.50	Peak	49.90	-2.72	47.18	74.00	-26.82	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





Radiated Spurious Emission Measurement Result: (BLE mode) For Frequency from 30MHz to 1000MHz


DATA RATE 1 Mbps:

Operation Band :BLE **Test Date** :2019-03-09

Fundamental Frequency :2442 MHz Temp./Humi. :20 deg_C / 61 RH

Engineer Operation Mode :Tx CH MID :Wei

EUT Pol. :E1 Plane :VERTICAL Measurement Antenna Pol.

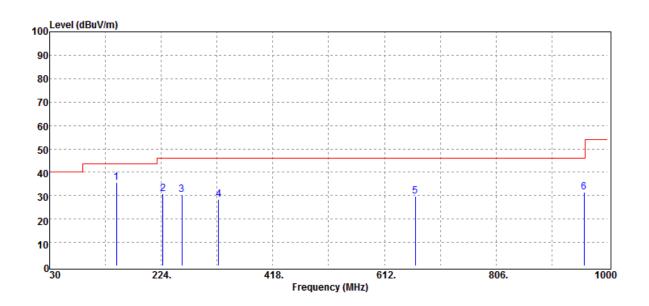

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	
146.40	Peak	44.90	-9.40	35.50	43.50	-8.00	
226.91	Peak	41.03	-10.31	30.72	46.00	-15.28	
259.89	Peak	39.47	-9.09	30.38	46.00	-15.62	
323.91	Peak	34.89	-6.59	28.30	46.00	-17.70	
665.35	Peak	28.93	0.94	29.87	46.00	-16.13	
959.26	Peak	25.56	5.85	31.41	46.00	-14.59	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page 46 of 64

Operation Band :BLE Fundamental Frequency :2442 MHz **Operation Mode** :Tx CH MID EUT Pol. :E1 Plane

Test Date :2019-03-09 Temp./Humi. :20 deg_C / 61 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

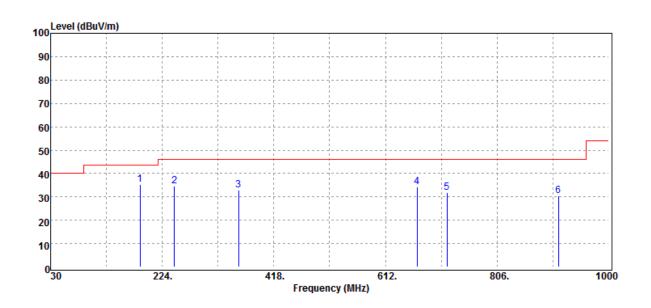

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB	
185.20	Peak	45.69	-10.50	35.19	43.50	-8.31	
245.34	Peak	44.37	-9.70	34.67	46.00	-11.33	
356.89	Peak	38.74	-5.87	32.87	46.00	-13.13	
667.29	Peak	33.15	1.04	34.19	46.00	-11.81	
718.70	Peak	30.66	1.28	31.94	46.00	-14.06	
912.70	Peak	25.65	4.79	30.44	46.00	-15.56	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



EUT Pol.

Report No.: T190304W03-RP2

:VERTICAL

Page 47 of 64

Measurement Antenna Pol.


DATA RATE 2 Mbps (BT5.0):

Operation Band :BLE(2M) **Test Date** :2019-03-09

:E1 Plan

Fundamental Frequency :2442 MHz Temp./Humi. :24.1 deg_C / 65 RH

:Tx CH MID **Operation Mode** Engineer :Wei

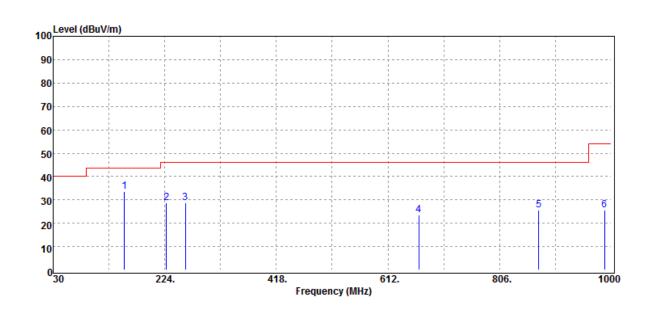

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB	
	154.16	Peak	43.00	-9.41	33.59	43.50	-9.91	
	226.91	Peak	38.99	-10.31	28.68	46.00	-17.32	
	259.89	Peak	37.67	-9.09	28.58	46.00	-17.42	
	665.35	Peak	22.76	0.94	23.70	46.00	-22.30	
	873.90	Peak	21.54	4.02	25.56	46.00	-20.44	
	988.36	Peak	19.32	6.44	25.76	54.00	-28.24	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page 48 of 64

Operation Band Test Date :2019-03-09 :BLE(2M)

Fundamental Frequency :2442 MHz Temp./Humi. :24.1 deg_C / 65 RH

Operation Mode :Tx CH MID Engineer :Wei

EUT Pol. :E1 Plan :HORIZONTAL Measurement Antenna Pol.

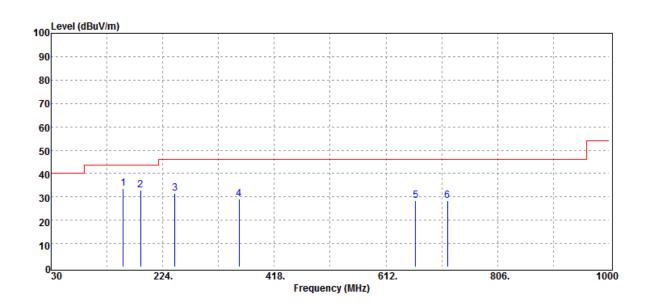

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	
155.13	Peak	42.78	-9.32	33.46	43.50	-10.04	
185.20	Peak	43.32	-10.50	32.82	43.50	-10.68	
245.34	Peak	41.20	-9.70	31.50	46.00	-14.50	
356.89	Peak	34.83	-5.87	28.96	46.00	-17.04	
663.41	Peak	27.66	0.83	28.49	46.00	-17.51	
718.70	Peak	26.97	1.28	28.25	46.00	-17.75	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



:2019-03-09

Page 49 of 64

Radiated Spurious Emission Measurement Result: (BLE mode)


For Frequency above 1 GHz **DATA RATE 1 Mbps:**

Operation Band :BLE Test Date

Fundamental Frequency :2402 MHz Temp./Humi. :24.1 deg C / 65 RH

Operation Mode :Tx CH LOW Engineer :Wei

EUT Pol. :E1 Plane :VERTICAL Measurement Antenna Pol.

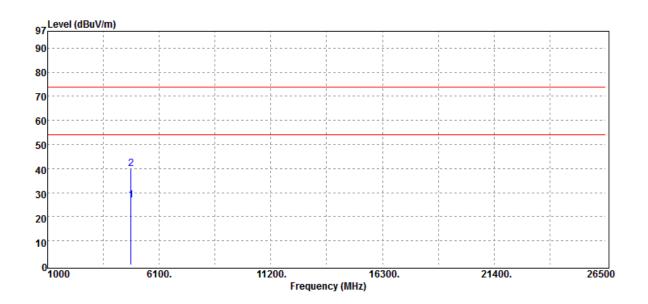

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB	_
	4804.00	Average	23.82	3.11	26.93	54.00	-27.07	
	4804.00	Peak	36.87	3.11	39.98	74.00	-34.02	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



EUT Pol.

10

1000

6100

Report No.: T190304W03-RP2

:HORIZONTAL

26500

Page 50 of 64

Measurement Antenna Pol.


21400.

Operation Band :BLE **Test Date** :2019-03-09

Fundamental Frequency :2402 MHz Temp./Humi. :24.1 deg_C / 65 RH

Operation Mode :Tx CH LOW Engineer :Wei

:E1 Plane

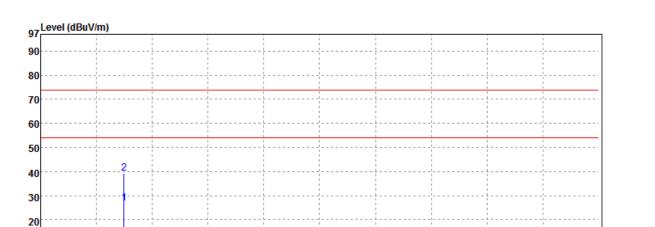

16300.

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
4804.00	Average	23.89	3.11	27.00	54.00	-27.00
4804.00	Peak	36.21	3.11	39.32	74.00	-34.68

Frequency (MHz)

11200.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 51 of 64


Operation Band :BLE Fundamental Frequency :2442 MHz **Operation Mode** :Tx CH MID

EUT Pol. :E1 Plane **Test Date** :2019-03-09

Temp./Humi. :24.1 deg_C / 65 RH

Engineer :Wei

:VERTICAL Measurement Antenna Pol.

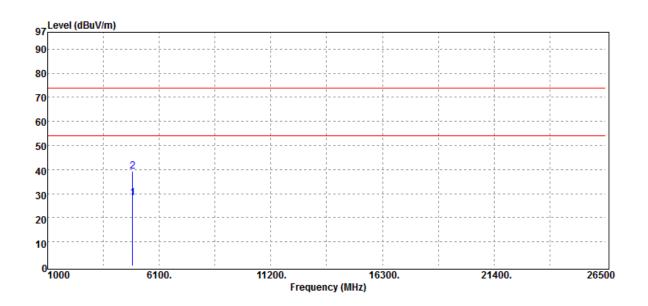

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dΒμV/m	dBμV/m	dB	_
4884.00	Average	24.67	3.47	28.14	54.00	-25.86	
4884.00	Peak	35.68	3.47	39.15	74.00	-34.85	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page 52 of 64

Measurement Antenna Pol.

Operation Band :BLE **Test Date** :2019-03-09

Fundamental Frequency :2442 MHz Temp./Humi. :24.1 deg_C / 65 RH

Operation Mode :Tx CH MID Engineer :Wei EUT Pol. :E1 Plane :HORIZONTAL

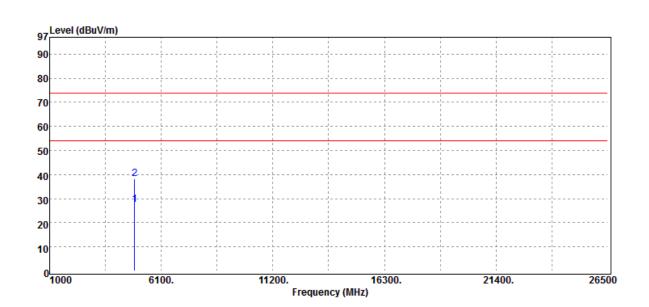

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
4884.00	Average	24.07	3.47	27.54	54.00	-26.46
4884.00	Peak	34.78	3.47	38.25	74.00	-35.75

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



EUT Pol.

Report No.: T190304W03-RP2

:VERTICAL

Page 53 of 64


Measurement Antenna Pol.

Operation Band :BLE **Test Date** :2019-03-09

Fundamental Frequency :2480 MHz Temp./Humi. :24.1 deg_C / 65 RH

Operation Mode :Tx CH HIGH Engineer :Wei

:E1 Plane

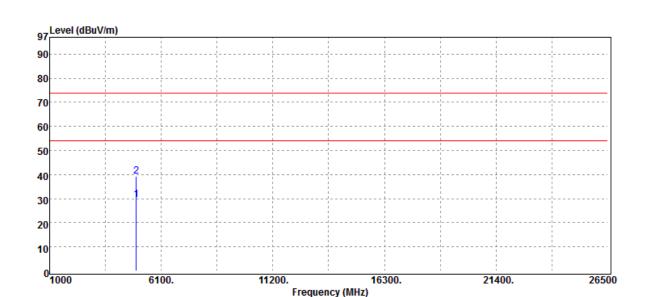

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
4960.00	Average	25.13	4.48	29.61	54.00	-24.39
4960.00	Peak	34.84	4.48	39.32	74.00	-34.68

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page 54 of 64

Operation Band :BLE **Test Date** :2019-03-09

Fundamental Frequency :2480 MHz Temp./Humi. :24.1 deg_C / 65 RH **Operation Mode** :Tx CH HIGH Engineer :Wei

EUT Pol. :E1 Plane :HORIZONTAL Measurement Antenna Pol.

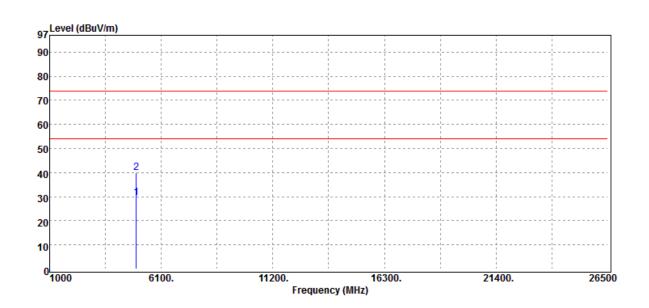

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
4960.00	Average	25.21	4.48	29.69	54.00	-24.31
4960.00	Peak	35.51	4.48	39.99	74.00	-34.01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page 55 of 64

DATA RATE 2 Mbps (BT5.0):

Operation Band :BLE(2M) **Test Date** :2019-03-09 Fundamental Frequency :2402 MHz Temp./Humi. :24.1 deg_C / 65 RH

Operation Mode :Tx CH LOW Engineer :Wei

EUT Pol. :E1 Plane :VERTICAL Measurement Antenna Pol.

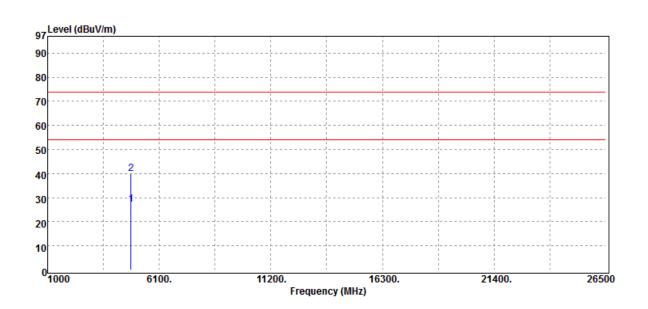

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB	
4804.00	Average	23.98	3.11	27.09	54.00	-26.91	
4804.00	Peak	36.81	3.11	39.92	74.00	-34.08	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page 56 of 64

Operation Band Test Date :BLE(2M) :2019-03-09

Fundamental Frequency :2402 MHz Temp./Humi. :24.1 deg_C / 65 RH

Operation Mode :Tx CH LOW Engineer :Wei

EUT Pol. :E1 Plane :HORIZONTAL Measurement Antenna Pol.

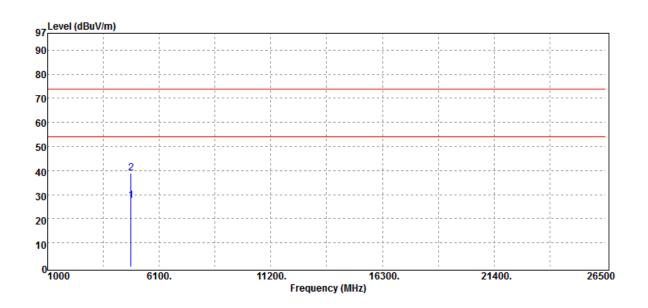

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB	
4804.00	Average	24.41	3.11	27.52	54.00	-26.48	
4804.00	Peak	35.96	3.11	39.07	74.00	-34.93	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page 57 of 64

Operation Band Test Date :BLE(2M) :2019-03-09

Fundamental Frequency :2442 MHz Temp./Humi. :24.1 deg_C / 65 RH

Operation Mode :Tx CH MID Engineer :Wei

EUT Pol. :E1 Plane :VERTICAL Measurement Antenna Pol.

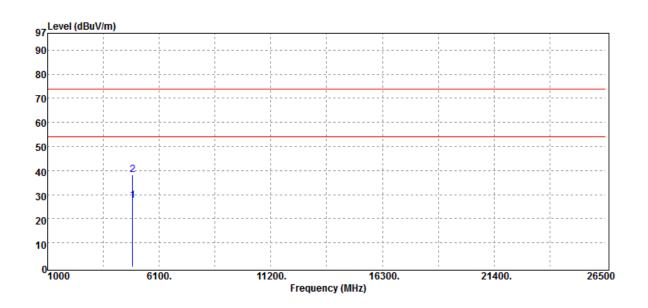

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB	
	4884.00	Average	24.22	3.47	27.69	54.00	-26.31	
	4884.00	Peak	34.69	3.47	38.16	74.00	-35.84	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page 58 of 64

Operation Band Test Date :BLE(2M) :2019-03-09

Fundamental Frequency :2442 MHz Temp./Humi. :24.1 deg_C / 65 RH

Operation Mode :Tx CH MID Engineer :Wei

EUT Pol. :E1 Plane :HORIZONTAL Measurement Antenna Pol.

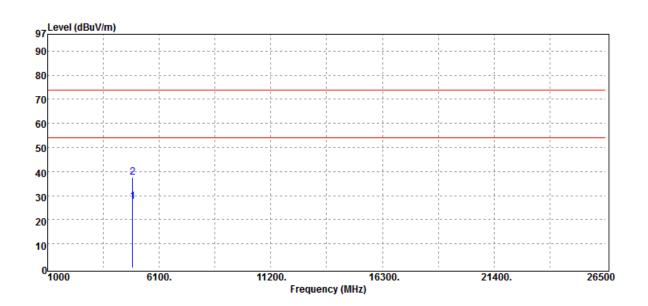

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dΒμV/m	dΒμV/m	dB	
4884.00	Average	23.89	3.47	27.36	54.00	-26.64	
4884.00	Peak	34.24	3.47	37.71	74.00	-36.29	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page 59 of 64

Operation Band Test Date :BLE(2M) :2019-03-09

Fundamental Frequency :2480 MHz Temp./Humi. :24.1 deg_C / 65 RH

Operation Mode :Tx CH HIGH Engineer :Kane

EUT Pol. :E1 Plane :VERTICAL Measurement Antenna Pol.

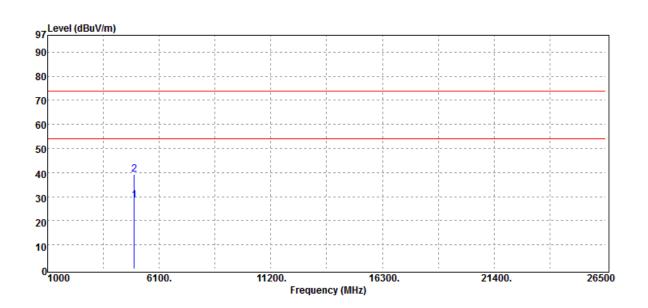

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB	
4960.00	Average	23.96	4.48	28.44	54.00	-25.56	
4960.00	Peak	34.76	4.48	39.24	74.00	-34.76	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page 60 of 64

Operation Band Test Date :BLE(2M) :2019-03-09

Fundamental Frequency :2480 MHz Temp./Humi. :24.1 deg_C / 65 RH

Operation Mode :Tx CH HIGH Engineer :Kane

EUT Pol. :E1 Plane :HORIZONTAL Measurement Antenna Pol.

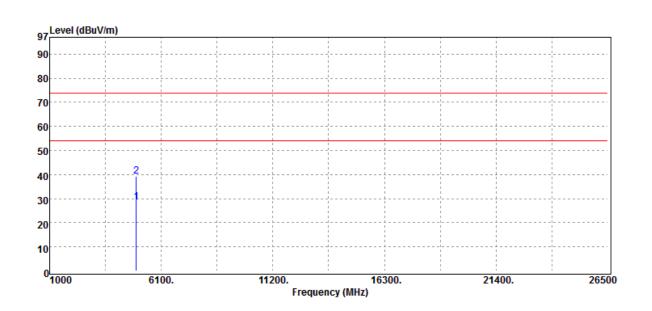

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB	
	4960.00	Average	24.17	4.48	28.65	54.00	-25.35	
	4960.00	Peak	34.67	4.48	39.15	74.00	-34.85	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 61 of 64

11. PEAK POWER SPECTRAL DENSITY


11.1 Standard Applicable:

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

11.2 Measurement Equipment Used:

Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
TYPE		NUMBER	NUMBER	CAL.			
DC Power Supply	Agilent	E3640A	KR93300208	08/15/2018	08/14/2019		
PXA Spectrum	Agilent	N9030A	MY53120760	04/00/2018	04/08/2019		
Analyzer	Agilent	N9030A	WIT 55 1207 00	04/09/2010	04/00/2019		
DC Block	Mini-Circuits	BLK-18-S+	31129(1)	02/26/2019	02/25/2020		
Attenuator	Mini-Circuit	BW-S10W2+	1	02/26/2019	02/25/2020		

11.3 Test Set-up:



11.4 Measurement Procedure:

- Set analyzer center frequency to DTS channel center frequency.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Set the span to 1.5 times the DTS channel bandwidth.
- 4. Set the RBW = 3 kHz. & the VBW = 10 kHz
- 5. For defining Restricted Band Edge Limit: Set the RBW = 100kHz & VBW = 300 kHz.
- 6. Detector = peak.
- 7. Sweep time = auto couple.
- 8. Trace mode = max hold.
- 9. Allow trace to fully stabilize.
- 10. Use the peak marker function to determine the maximum amplitude level.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page 62 of 64

11.5 Measurement Result: **DATA RATE 1 Mbps:**

BI F mode

DEE IIIOGC			
Frequency RF Power		Maximum Limit	Result
(MHz)	Density (dBm)	(dBm)	
2402	-9.90	8	PASS
2442	-8.52	8	PASS
2480	-9.16	8	PASS

NOTE: cable loss as 0.4dB that offsets in the spectrum


DATA RATE 2 Mbps (BT 5.0):

BLE mode

Frequency (MHz)	RF Power Density (dBm)	Maximum Limit (dBm)	Result
2402	-13.95	8	PASS
2442	-12.57	8	PASS
2480	-13.10	8	PASS

NOTE: cable loss as 0.4dB that offsets in the spectrum

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.







Power Density_BLE_1M_LowCH00-2402



Power Density BLE 1M MidCH19-2442



Power Density BLE 1M HighCH39-2480



Power Density BLE 2M LowCH00-2402



Power Density BLE 2M MidCH19-2442



Power Density BLE 2M HighCH39-2480



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page 64 of 64

12. ANTENNA REQUIREMENT

12.1 Standard Applicable:

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

If the transmitting antenna is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

12.2 Antenna Connected Construction:

The antenna is designed as permanently attached and no consideration of replacement. Please see EUT photo for details.