



# FCC RADIO TEST REPORT

**FCC ID** : APYHRO00278  
**Equipment** : Smart phone  
**Brand Name** : SHARP  
**Applicant** : SHARP CORPORATION  
1 Takumi-cho, Sakai-ku, Sakai City, Osaka,  
Japan 590-8522  
**Manufacturer** : SHARP CORPORATION  
2-13-1, HACHIHONMATSU-IIDA,  
HIGASHI-HIROSHIMA-SHI, HIROSHIMA  
PREFECTURE 739-0192, JAPAN  
**Standard** : 47 CFR Part 2, 22(H), 24(E), 27(L)

The product was received on Aug. 06, 2019 and testing was started from Aug. 20, 2019 and completed on Sep. 05, 2019. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

*Louis Wu*

Approved by: Louis Wu

**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



## Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
<b>1 General Description .....</b>	<b>6</b>
1.1 Product Feature of Equipment Under Test .....	6
1.2 Modification of EUT .....	6
1.3 Testing Location .....	6
1.4 Applicable Standards .....	6
<b>2 Test Configuration of Equipment Under Test .....</b>	<b>7</b>
2.1 Test Mode.....	7
2.2 Connection Diagram of Test System .....	8
2.3 Support Unit used in test configuration .....	8
2.4 Measurement Results Explanation Example .....	8
2.5 Frequency List of Low/Middle/High Channels.....	9
<b>3 Conducted Test Result .....</b>	<b>10</b>
3.1 Measuring Instruments.....	10
3.2 Conducted Output Power and ERP/EIRP .....	11
3.3 Peak-to-Average Ratio .....	12
3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement.....	13
3.5 Conducted Band Edge .....	14
3.6 Conducted Spurious Emission .....	15
3.7 Frequency Stability.....	16
<b>4 Radiated Test Items .....</b>	<b>17</b>
4.1 Measuring Instruments.....	17
4.2 Test Setup .....	17
4.3 Test Result of Radiated Test.....	17
4.4 Field Strength of Spurious Radiation Measurement .....	18
<b>5 List of Measuring Equipment.....</b>	<b>19</b>
<b>6 Uncertainty of Evaluation.....</b>	<b>20</b>
<b>Appendix A. Test Results of Conducted Test</b>	
<b>Appendix B. Test Results of ERP/EIRP and Radiated Test</b>	
<b>Appendix C. Test Setup Photographs</b>	



### History of this test report

Report No.	Version	Description	Issued Date
FG960602-01A	01	Initial issue of report	Sep. 17, 2019
FG960602-01A	02	Revising company address of applicant	Oct. 17, 2019



### Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Pass	-
	§22.913 (a)(2)	Effective Radiated Power		
	§24.232 (c)	Equivalent Isotropic Radiated Power		
	§27.50 (d)(4)	Equivalent Isotropic Radiated Power		
3.3	§24.232 (d)	Peak-to-Average Ratio	Pass	-
3.4	§2.1049 §22.917 (b) §24.238 (b) §27.53 (g)	Occupied Bandwidth	Pass	-
3.5	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Band Edge Measurement	Pass	-
3.6	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Conducted Emission	Pass	-
3.7	§2.1055 §22.355	Frequency Stability Temperature & Voltage	Pass	-
	§2.1055 §24.235 §27.54			-



Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
-	§22.913 (a)(2)	Equivalent Radiated Power	Not Required	-
	§24.232 (c)	Equivalent Isotropic Radiated Power		
	§27.50 (d)(4)	Equivalent Isotropic Radiated Power		
4.4	§2.1053 §22.917 (a) §24.238 (a) §27.53 (h)	Field Strength of Spurious Radiation	Pass	Under limit 16.45 dB at 2472.000 MHz

**Remark:** Not required means after assessing, test items are not necessary to carry out.

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

**Reviewed by: Wii Chang**

**Report Producer: Jessie Ho**



# 1 General Description

## 1.1 Product Feature of Equipment Under Test

GSM/WCDMA/LTE, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n, Wi-Fi 5GHz 802.11a/n/ac, NFC, and GNSS.

Product Specification subjective to this standard	
Antenna Type	WWAN: Fixed Internal Antenna WLAN: PIFA Antenna Bluetooth: PIFA Antenna GPS / Glonass / BDS / Galileo: PIFA Antenna NFC: Loop Antenna

## 1.2 Modification of EUT

No modifications are made to the EUT during all test items.

## 1.3 Testing Location

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory	
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	<b>Sporton Site No.</b>	
	TH03-HY	03CH07-HY
Test Engineer	Benjamin Lin	Jesse Wang and Stan Hsieh
Temperature	21-24	25~26
Relative Humidity	51-55	56~57

**Note:** The test site complies with ANSI C63.4 2014 requirement.  
FCC Designation No.: TW1190

## 1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ 47 CFR Part 2, 22(H), 24(E), 27(L)
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane for Cellular Band with Aux. Ant, Y plane for PCS and AWS Band with Main Ant., and Z plane for Cellular Band with Main Ant.) were recorded in this report.

Radiated emissions were investigated as following frequency range:


1. 30 MHz to 9000 MHz for GSM850 and WCDMA Band V.
2. 30 MHz to 18000 MHz for WCDMA Band IV.
3. 30 MHz to 19100 MHz for GSM1900 and WCDMA Band II.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM 850	■ GPRS Class 8 Link	■ GPRS Class 8 Link
GSM 1900	■ GPRS Class 8 Link	■ GPRS Class 8 Link
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band IV	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link

## 2.2 Connection Diagram of Test System

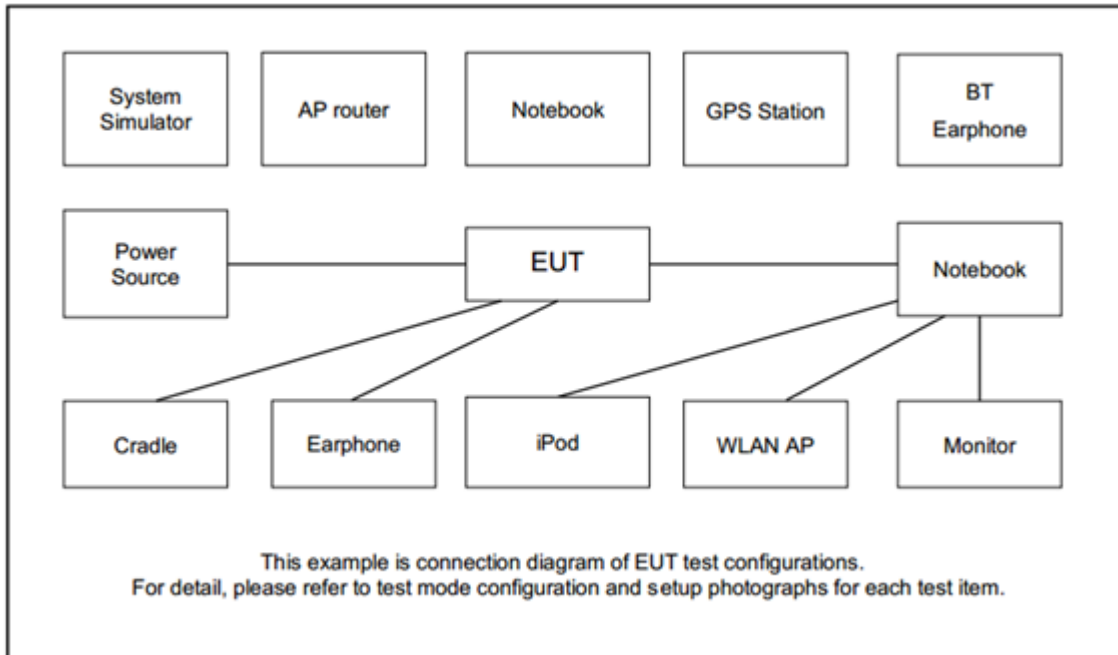

## 2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
3.	iPhone Earphone	Apple	A1387	FCC DoC	N/A	N/A

## 2.4 Measurement Results Explanation Example

### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

The following shows an offset computation example with RF cable loss 4.2 dB and a 10dB attenuator.

Example:

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$





## 2.5 Frequency List of Low/Middle/High Channels

Frequency List				
Band	Channel/Frequency(MHz)	Lowest	Middle	Highest
GSM850	Channel	128	189	251
	Frequency	824.2	836.4	848.8
WCDMA Band V	Channel	4132	4182	4233
	Frequency	826.4	836.4	846.6
GSM1900	Channel	512	661	810
	Frequency	1850.2	1880.0	1909.8
WCDMA Band II	Channel	9262	9400	9538
	Frequency	1852.4	1880.0	1907.6
WCDMA Band IV	Channel	1312	1413	1513
	Frequency	1712.4	1732.6	1752.6


### 3 Conducted Test Result

#### 3.1 Measuring Instruments


See list of measuring instruments of this test report.

##### 3.1.1 Test Setup


##### 3.1.2 Conducted Output Power

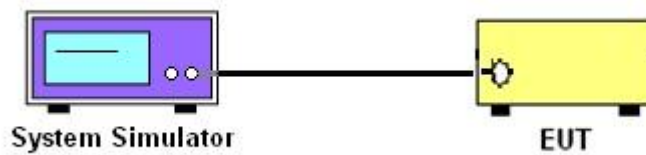

##### 3.1.3 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

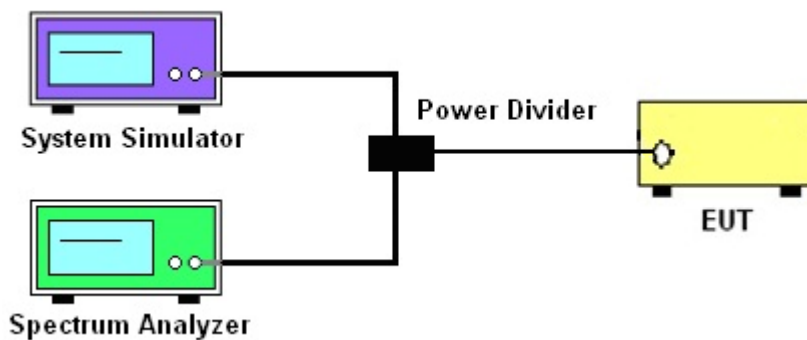

##### 3.1.4 Frequency Stability

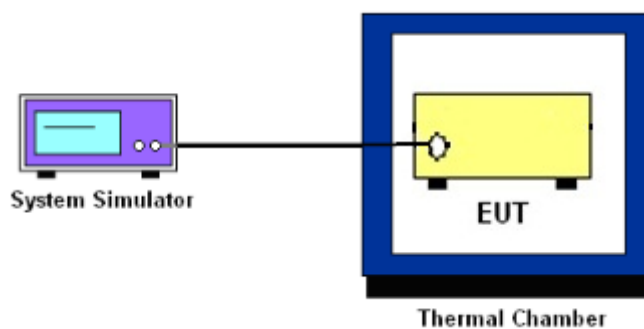

##### 3.1.5 Test Result of Conducted Test

Please refer to Appendix A.



## 3.2 Conducted Output Power and ERP/EIRP

### 3.2.1 Description of the Conducted Output Power and ERP/EIRP

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for GSM850 and WCDMA Band V.

The EIRP of mobile transmitters must not exceed 2 Watts for GSM1900 and WCDMA Band II.

The EIRP of mobile transmitters must not exceed 1 Watts for WCDMA Band IV.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$ ,  $ERP = EIRP - 2.15$ , where

$P_T$  = transmitter output power in dBm

$G_T$  = gain of the transmitting antenna in dBi

$L_C$  = signal attenuation in the connecting cable between the transmitter and antenna in dB

### 3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.



### **3.3 Peak-to-Average Ratio**

#### **3.3.1 Description of the PAR Measurement**

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

#### **3.3.2 Test Procedures**

The testing follows ANSI C63.26-2015 Section 5.2.6

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. Set EUT to transmit at maximum output power.
3. When the duty cycle is less than 98%, then signal gating will be implemented on the spectrum analyzer by triggering from the system simulator.
4. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer.
5. Record the maximum PAPR level associated with a probability of 0.1%.



### 3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement

#### 3.4.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

#### 3.4.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.  
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



## **3.5 Conducted Band Edge**

### **3.5.1 Description of Conducted Band Edge Measurement**

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

### **3.5.2 Test Procedures**

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The band edges of low and high channels for the highest RF powers were measured.
4. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
5. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)



## **3.6 Conducted Spurious Emission**

### **3.6.1 Description of Conducted Spurious Emission Measurement**

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10<sup>th</sup> harmonic.

### **3.6.2 Test Procedures**

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator.  
The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)



### 3.7 Frequency Stability

#### 3.7.1 Description of Frequency Stability Measurement

22.355

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

24.235 & 27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

#### 3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to  $-30^{\circ}\text{C}$  and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  steps up to  $50^{\circ}\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

#### 3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at  $20\pm 5^{\circ}\text{C}$  and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.




## 4 Radiated Test Items

### 4.1 Measuring Instruments


See list of measuring instruments of this test report.

### 4.2 Test Setup

For radiated test from 30MHz to 1GHz

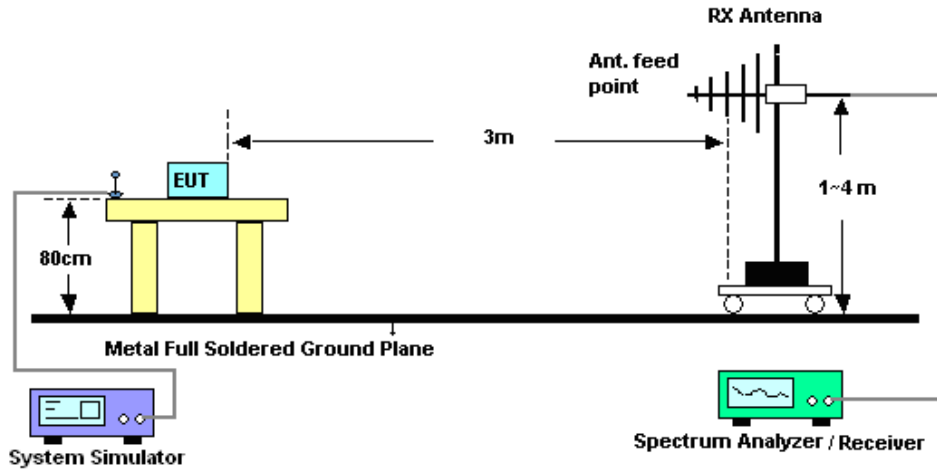

For radiated test above 1GHz

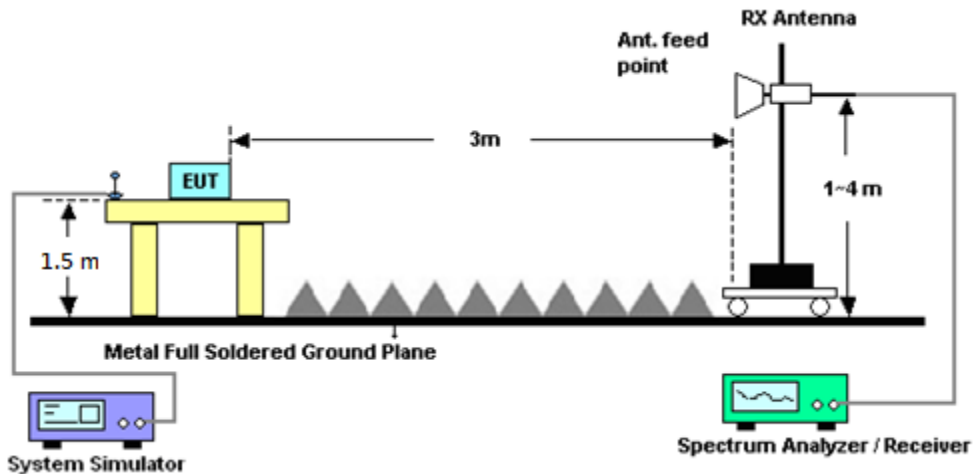

### 4.3 Test Result of Radiated Test

Please refer to Appendix B.



## **4.4 Field Strength of Spurious Radiation Measurement**

### **4.4.1 Description of Field Strength of Spurious Radiated Measurement**

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### **4.4.2 Test Procedures**

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a rotatable wooden table 0.8 meters for frequency below 1GHz and 1.5 meter for frequency above 1GHz above the ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10.  $EIRP (dBm) = S.G. Power - Tx Cable Loss + Tx Antenna Gain$
11.  $ERP (dBm) = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
13. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)



## 5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	Rohde & Schwarz	FSP30	101067	9kHz~30GHz	Jun. 13, 2019	Aug. 20, 2019~ Aug. 21, 2019	Jun. 12, 2020	Conducted (TH03-HY)
Temperature Chamber	ESPEC	SU-641	92013721	-30°C ~70°C	Nov. 28, 2018	Aug. 20, 2019~ Aug. 21, 2019	Nov. 27, 2019	Conducted (TH03-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL890001	Voltage:0~20V;Current:0~5A	Oct. 08, 2018	Aug. 20, 2019~ Aug. 21, 2019	Oct. 07, 2019	Conducted (TH03-HY)
Base Station(Measure)	Rohde & Schwarz	CMU200	117997	GSM / GPRS / WCDMA / CDMA	Aug. 23, 2018	Aug. 20, 2019~ Aug. 21, 2019	Aug. 22, 2019	Conducted (TH03-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D 01N-06	35419 & 03	30MHz~1GHz	Apr. 30, 2019	Aug. 29, 2019~ Sep. 05, 2019	Apr. 29, 2020	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Dec. 02, 2018	Aug. 29, 2019~ Sep. 05, 2019	Dec. 03, 2019	Radiation (03CH07-HY)
EMI Test Receiver	Agilent	N9038A(MXE)	MY53290053	20Hz~26.5GHz	Jan. 23, 2019	Aug. 29, 2019~ Sep. 05, 2019	Jan. 22, 2020	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz~1GHz	May 20, 2019	Aug. 29, 2019~ Sep. 05, 2019	May 19, 2020	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1GHz~26.5GHz	Nov. 02, 2018	Aug. 29, 2019~ Sep. 05, 2019	Nov. 01, 2019	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4, MY24971/4, MY15682/4	30MHz~1GHz	Feb. 26, 2019	Aug. 29, 2019~ Sep. 05, 2019	Feb. 25, 2020	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4, MY24971/4, MY15682/4	1GHz~18GHz	Feb. 26, 2019	Aug. 29, 2019~ Sep. 05, 2019	Feb. 25, 2020	Radiation (03CH07-HY)
Antenna Mast	Max-Full	MFA520BS	N/A	1m~4m	N/A	Aug. 29, 2019~ Sep. 05, 2019	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Aug. 29, 2019~ Sep. 05, 2019	N/A	Radiation (03CH07-HY)
Preamplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz, VSWR : 2.5:1 max	N/A	Aug. 29, 2019~ Sep. 05, 2019	N/A	Radiation (03CH07-HY)
Horn Antenna	ESCO	3117	00143261	1GHz~18GHz	Jan. 07, 2019	Aug. 29, 2019~ Sep. 05, 2019	Jan. 06, 2020	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	18GHz~40GHz	Nov. 20, 2018	Aug. 29, 2019~ Sep. 05, 2019	Nov. 19, 2019	Radiation (03CH07-HY)
Signal Generator	Anritsu	MG3694C	163401	0.1Hz~40GHz	Jan. 21, 2019	Aug. 29, 2019~ Sep. 05, 2019	Jan. 20, 2020	Radiation (03CH07-HY)



## 6 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.7
---	-----

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.5
---	-----

### Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.2
---	-----



## Appendix A. Test Results of Conducted Test

### Conducted Output Power(Average power)

Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880	1909.8
GSM	34.78	34.79	34.70	31.42	31.30	31.32
GPRS class 8	34.80	34.81	34.72	31.45	31.34	31.35
GPRS class 10	29.02	28.93	29.08	28.82	28.78	28.75
GPRS class 11	27.39	27.15	27.31	27.71	27.67	27.58
GPRS class 12	27.18	26.80	26.96	26.21	26.14	26.05

Conducted Power (*Unit: dBm)						
Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4182	4233	9262	9400	9538
Frequency	826.4	836.4	846.6	1852.4	1880	1907.6
RMC 12.2K	24.98	24.99	25.00	23.54	23.66	23.85
HSDPA Subtest-1	23.97	24.12	24.05	22.57	22.72	22.73
HSDPA Subtest-2	23.99	24.10	24.15	22.56	22.72	22.80
HSDPA Subtest-3	23.51	23.62	23.59	22.05	22.21	22.29
HSDPA Subtest-4	23.54	23.62	23.59	22.10	22.20	22.27
HSUPA Subtest-1	24.00	24.10	24.06	22.52	22.61	22.76
HSUPA Subtest-2	22.05	22.11	22.05	20.49	20.73	20.70
HSUPA Subtest-3	22.98	23.17	23.04	21.51	21.66	21.74
HSUPA Subtest-4	22.02	22.07	22.00	20.48	20.68	20.76
HSUPA Subtest-5	24.00	24.10	24.00	22.50	22.70	22.80



Conducted Power (*Unit: dBm)			
Band	WCDMA Band IV		
Channel	1312	1413	1513
Frequency	1712.4	1732.6	1752.6
RMC 12.2K	23.99	23.94	23.97
HSDPA Subtest-1	22.97	22.98	23.00
HSDPA Subtest-2	22.99	22.99	23.01
HSDPA Subtest-3	22.46	22.46	22.50
HSDPA Subtest-4	22.46	22.51	22.51
HSUPA Subtest-1	22.93	22.93	22.96
HSUPA Subtest-2	20.92	20.94	20.92
HSUPA Subtest-3	21.88	21.93	21.96
HSUPA Subtest-4	20.91	20.95	20.92
HSUPA Subtest-5	22.90	22.90	22.90









## A2. GSM

### Peak-to-Average Ratio

Mode	GSM850		Limit: 13dB
Mod.	GPRS class 8		Result
Lowest CH	0.44		PASS
Middle CH	0.44		
Highest CH	0.40		

Mode	GSM1900		Limit: 13dB
Mod.	GPRS class 8		Result
Lowest CH	0.40		PASS
Middle CH	0.36		
Highest CH	0.36		

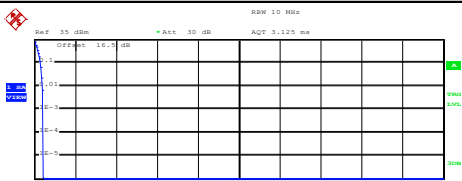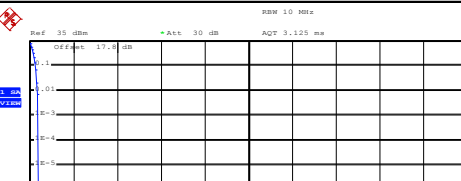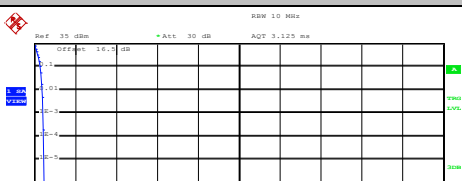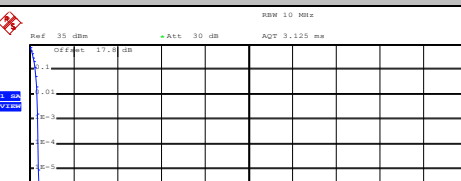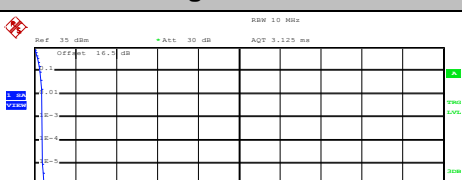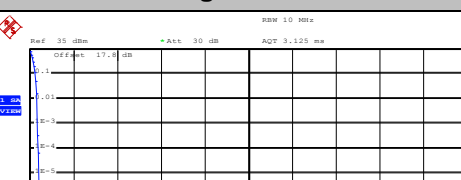

GSM850 (GPRS class 8)	GSM1900 (GPRS class 8)																
<p align="center"><b>Lowest Channel</b></p>  <p>Ref: 35 dBm, Att: 30 dB, AQT: 3.125 ms, RBW: 10 MHz, Offset: 16.0 dB</p> <p>Center: 824.2 MHz, 2 dB, Mean Pwr: +20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples)</p> <p>Trace 1</p> <p>Mean: 33.15 dBm Peak: 33.56 dBm Crest: 0.42 dB</p> <table border="1"> <tr><td>10 %</td><td>0.28 dB</td></tr> <tr><td>1 %</td><td>0.40 dB</td></tr> <tr><td>.1 %</td><td>0.44 dB</td></tr> <tr><td>.01 %</td><td>0.44 dB</td></tr> </table> <p>Date: 20.AUG.2019 15:44:13</p>	10 %	0.28 dB	1 %	0.40 dB	.1 %	0.44 dB	.01 %	0.44 dB	<p align="center"><b>Lowest Channel</b></p>  <p>Ref: 35 dBm, Att: 30 dB, AQT: 3.125 ms, RBW: 10 MHz, Offset: 17.0 dB</p> <p>Center: 1.8502 GHz, 2 dB, Mean Pwr: +20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples)</p> <p>Trace 1</p> <p>Mean: 30.78 dBm Peak: 31.16 dBm Crest: 0.38 dB</p> <table border="1"> <tr><td>10 %</td><td>0.28 dB</td></tr> <tr><td>1 %</td><td>0.36 dB</td></tr> <tr><td>.1 %</td><td>0.40 dB</td></tr> <tr><td>.01 %</td><td>0.40 dB</td></tr> </table> <p>Date: 20.AUG.2019 16:00:17</p>	10 %	0.28 dB	1 %	0.36 dB	.1 %	0.40 dB	.01 %	0.40 dB
10 %	0.28 dB																
1 %	0.40 dB																
.1 %	0.44 dB																
.01 %	0.44 dB																
10 %	0.28 dB																
1 %	0.36 dB																
.1 %	0.40 dB																
.01 %	0.40 dB																
<p align="center"><b>Middle Channel</b></p>  <p>Ref: 35 dBm, Att: 30 dB, AQT: 3.125 ms, RBW: 10 MHz, Offset: 16.0 dB</p> <p>Center: 830.4 MHz, 2 dB, Mean Pwr: +20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples)</p> <p>Trace 1</p> <p>Mean: 33.33 dBm Peak: 33.77 dBm Crest: 0.44 dB</p> <table border="1"> <tr><td>10 %</td><td>0.28 dB</td></tr> <tr><td>1 %</td><td>0.40 dB</td></tr> <tr><td>.1 %</td><td>0.44 dB</td></tr> <tr><td>.01 %</td><td>0.48 dB</td></tr> </table> <p>Date: 20.AUG.2019 15:44:38</p>	10 %	0.28 dB	1 %	0.40 dB	.1 %	0.44 dB	.01 %	0.48 dB	<p align="center"><b>Middle Channel</b></p>  <p>Ref: 35 dBm, Att: 30 dB, AQT: 3.125 ms, RBW: 10 MHz, Offset: 17.0 dB</p> <p>Center: 1.88 GHz, 2 dB, Mean Pwr: +20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples)</p> <p>Trace 1</p> <p>Mean: 30.66 dBm Peak: 31.09 dBm Crest: 0.43 dB</p> <table border="1"> <tr><td>10 %</td><td>0.24 dB</td></tr> <tr><td>1 %</td><td>0.36 dB</td></tr> <tr><td>.1 %</td><td>0.36 dB</td></tr> <tr><td>.01 %</td><td>0.40 dB</td></tr> </table> <p>Date: 20.AUG.2019 16:00:32</p>	10 %	0.24 dB	1 %	0.36 dB	.1 %	0.36 dB	.01 %	0.40 dB
10 %	0.28 dB																
1 %	0.40 dB																
.1 %	0.44 dB																
.01 %	0.48 dB																
10 %	0.24 dB																
1 %	0.36 dB																
.1 %	0.36 dB																
.01 %	0.40 dB																
<p align="center"><b>Highest Channel</b></p>  <p>Ref: 35 dBm, Att: 30 dB, AQT: 3.125 ms, RBW: 10 MHz, Offset: 16.0 dB</p> <p>Center: 848.8 MHz, 2 dB, Mean Pwr: +20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples)</p> <p>Trace 1</p> <p>Mean: 33.23 dBm Peak: 33.70 dBm Crest: 0.47 dB</p> <table border="1"> <tr><td>10 %</td><td>0.28 dB</td></tr> <tr><td>1 %</td><td>0.36 dB</td></tr> <tr><td>.1 %</td><td>0.40 dB</td></tr> <tr><td>.01 %</td><td>0.40 dB</td></tr> </table> <p>Date: 20.AUG.2019 15:44:57</p>	10 %	0.28 dB	1 %	0.36 dB	.1 %	0.40 dB	.01 %	0.40 dB	<p align="center"><b>Highest Channel</b></p>  <p>Ref: 35 dBm, Att: 30 dB, AQT: 3.125 ms, RBW: 10 MHz, Offset: 17.0 dB</p> <p>Center: 1.9038 GHz, 2 dB, Mean Pwr: +20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples)</p> <p>Trace 1</p> <p>Mean: 30.54 dBm Peak: 30.95 dBm Crest: 0.41 dB</p> <table border="1"> <tr><td>10 %</td><td>0.24 dB</td></tr> <tr><td>1 %</td><td>0.32 dB</td></tr> <tr><td>.1 %</td><td>0.36 dB</td></tr> <tr><td>.01 %</td><td>0.40 dB</td></tr> </table> <p>Date: 20.AUG.2019 16:00:48</p>	10 %	0.24 dB	1 %	0.32 dB	.1 %	0.36 dB	.01 %	0.40 dB
10 %	0.28 dB																
1 %	0.36 dB																
.1 %	0.40 dB																
.01 %	0.40 dB																
10 %	0.24 dB																
1 %	0.32 dB																
.1 %	0.36 dB																
.01 %	0.40 dB																






**26dB Bandwidth**

Mode	GSM850	
Mod.	GPRS class 8	
Lowest CH	0.309	
Middle CH	0.311	
Highest CH	0.305	

Mode	GSM1900	
Mod.	GPRS class 8	
Lowest CH	0.318	
Middle CH	0.314	
Highest CH	0.315	

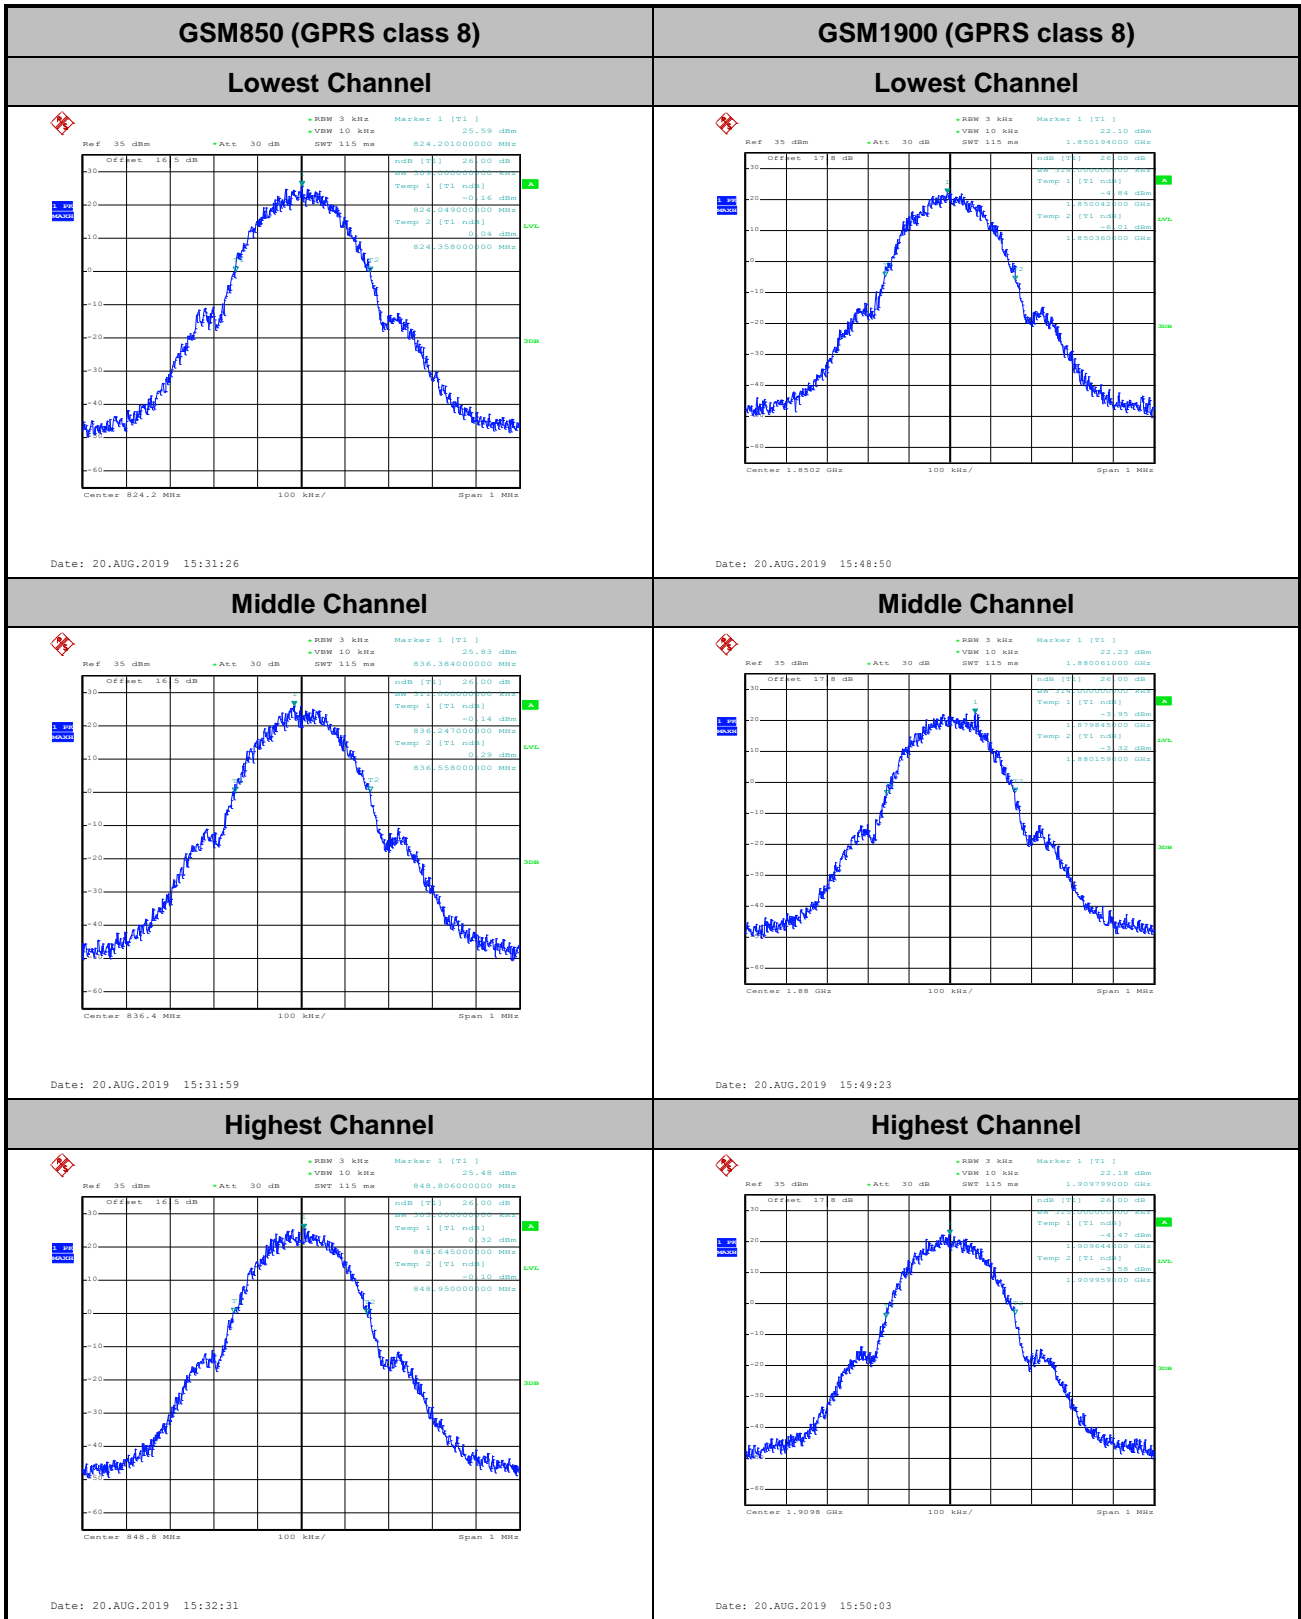




### Occupied Bandwidth

Mode	GSM850	
Mod.	GPRS class 8	
Lowest CH	0.243	
Middle CH	0.248	
Highest CH	0.244	

Mode	GSM1900	
Mod.	GPRS class 8	
Lowest CH	0.248	
Middle CH	0.244	
Highest CH	0.246	

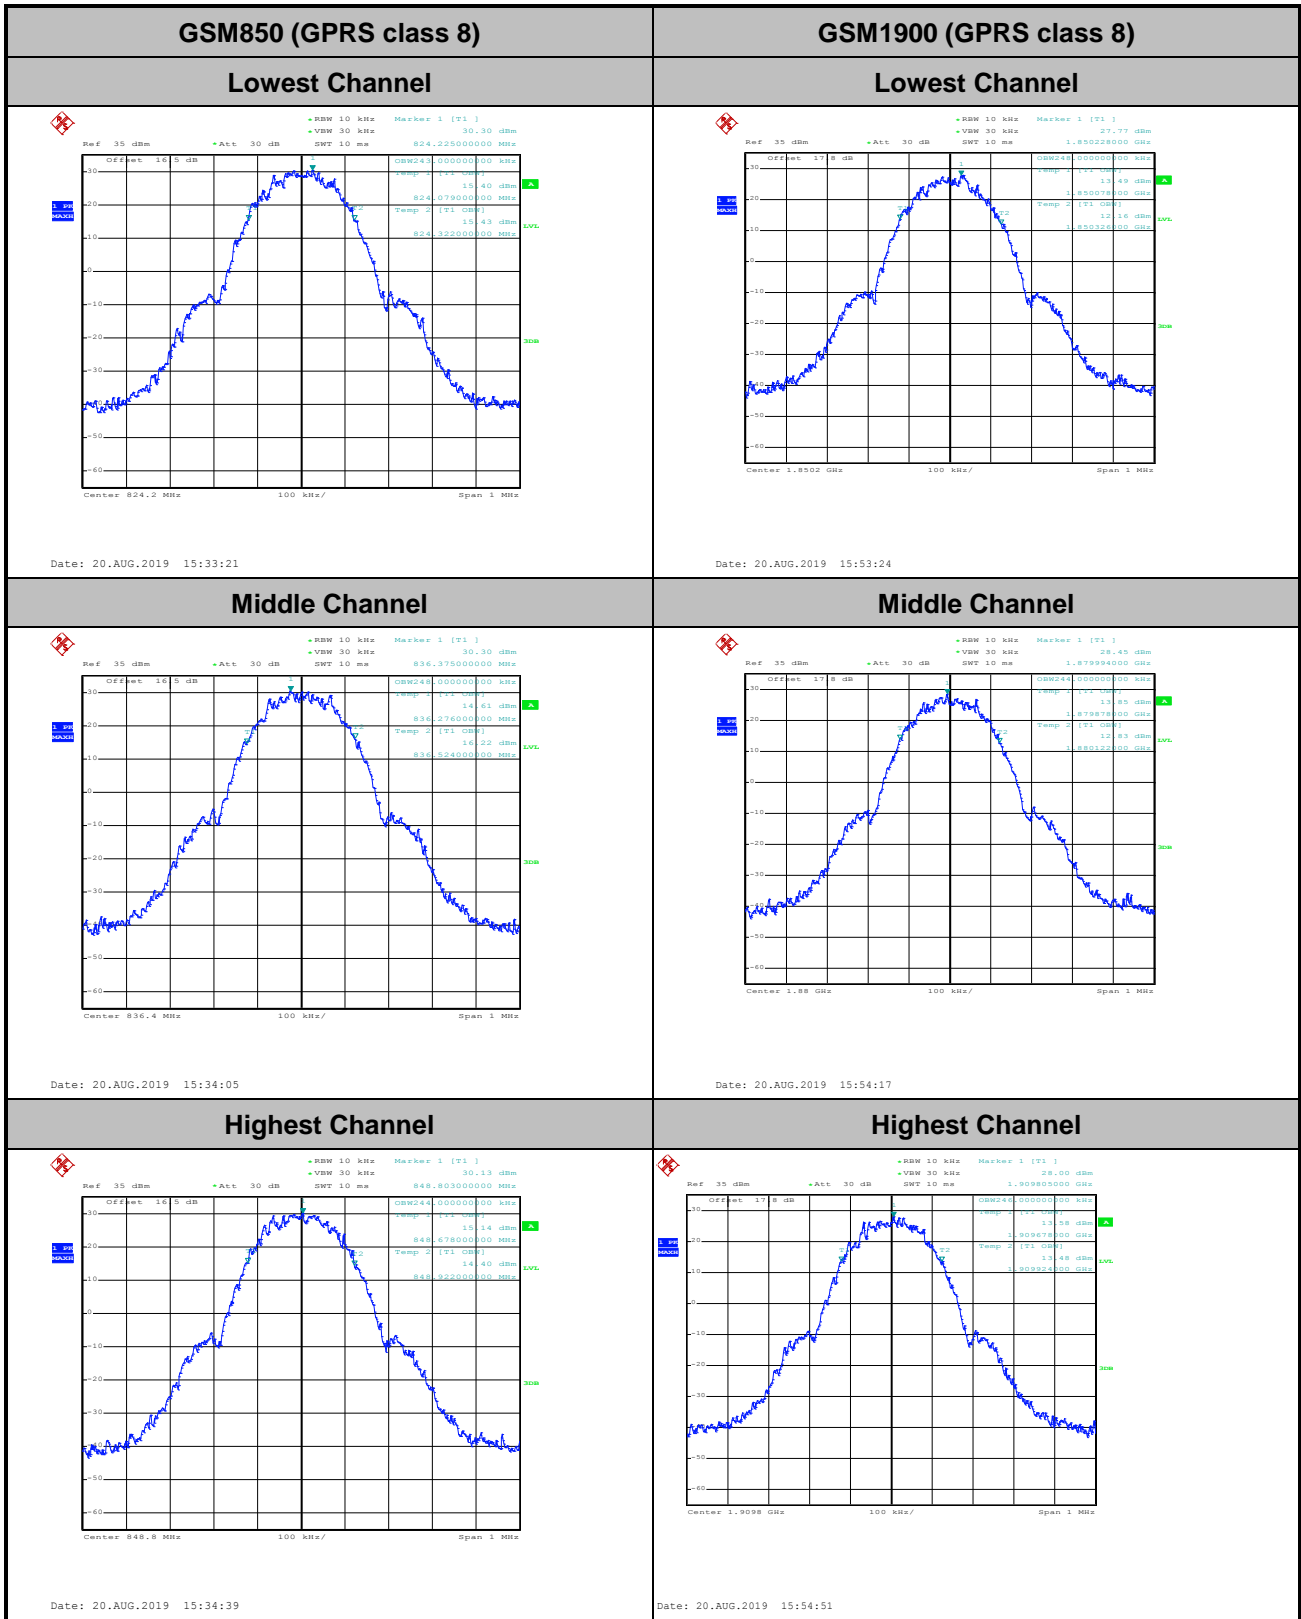




# Conducted Band Edge


## GSM850 (GPRS class 8)

### Lowest Band Edge

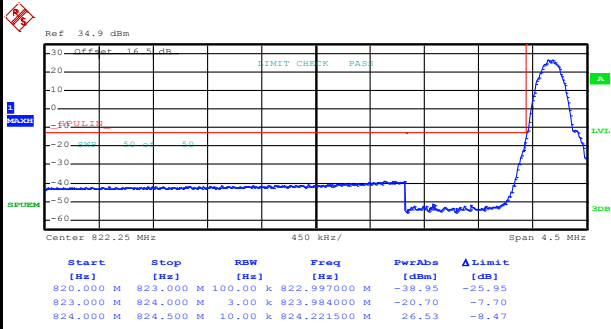

Date: 20.AUG.2019 15:36:32


### Highest Band Edge

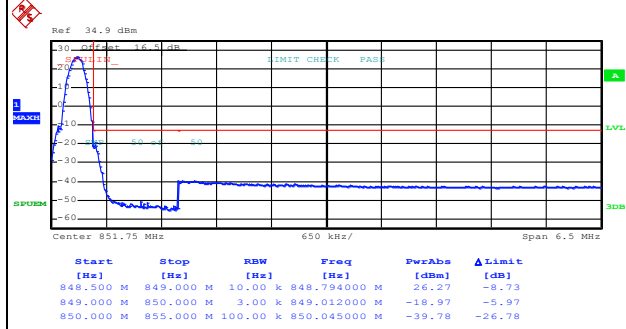

Date: 20.AUG.2019 15:38:04


## GSM1900 (GPRS class 8)

### Lowest Band Edge

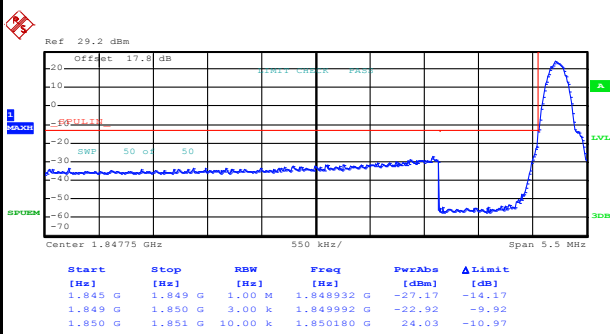

Date: 20.AUG.2019 15:56:28







### Highest Band Edge

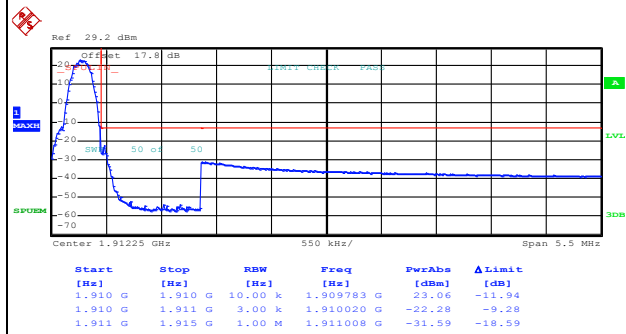

Date: 20.AUG.2019 15:59:22



# Conducted Spurious Emission

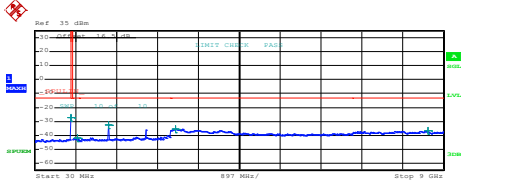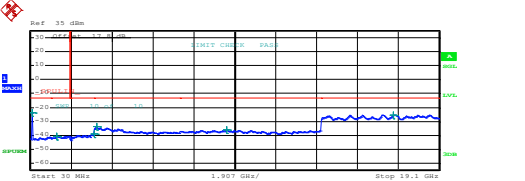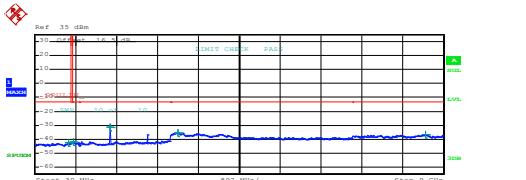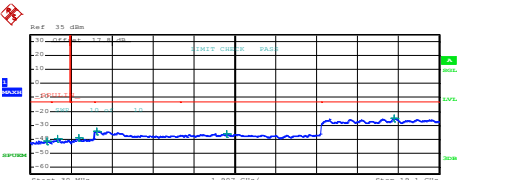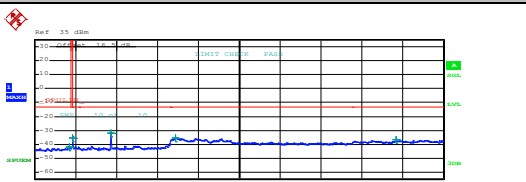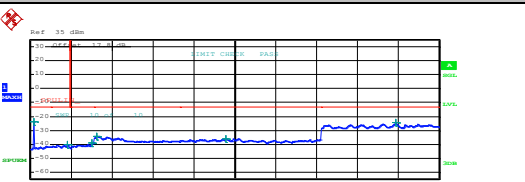GSM850 (GPRS class 8)	GSM1900 (GPRS class 8)																																																																														
Lowest Channel	Lowest Channel																																																																														
 <table border="1" data-bbox="207 660 734 739"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>Power [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr> <td>30,000 M</td> <td>820,000 M</td> <td>1,000 M</td> <td>819,802500 M</td> <td>-27.23</td> <td>-14.23</td> </tr> <tr> <td>835,000 M</td> <td>1,000 G</td> <td>1,000 G</td> <td>970,818758 M</td> <td>-42.14</td> <td>-29.14</td> </tr> <tr> <td>1,000 G</td> <td>3,000 G</td> <td>1,000 M</td> <td>1,648500 G</td> <td>-32.32</td> <td>-19.32</td> </tr> <tr> <td>3,000 G</td> <td>7,000 G</td> <td>1,000 M</td> <td>3,117000 G</td> <td>-35.41</td> <td>-22.41</td> </tr> <tr> <td>7,000 G</td> <td>9,000 G</td> <td>1,000 M</td> <td>8,660500 G</td> <td>-36.71</td> <td>-23.71</td> </tr> </tbody> </table> <p>Date: 20.AUG.2019 15:42:02</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	Power [dBm]	ΔLimit [dB]	30,000 M	820,000 M	1,000 M	819,802500 M	-27.23	-14.23	835,000 M	1,000 G	1,000 G	970,818758 M	-42.14	-29.14	1,000 G	3,000 G	1,000 M	1,648500 G	-32.32	-19.32	3,000 G	7,000 G	1,000 M	3,117000 G	-35.41	-22.41	7,000 G	9,000 G	1,000 M	8,660500 G	-36.71	-23.71	 <table border="1" data-bbox="861 660 1388 739"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>Power [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr> <td>30,000 M</td> <td>1,000 G</td> <td>1,000 M</td> <td>111,985000 M</td> <td>-25.06</td> <td>-11.06</td> </tr> <tr> <td>1,000 G</td> <td>1,845 G</td> <td>1,000 M</td> <td>1,249064 G</td> <td>-40.52</td> <td>-27.52</td> </tr> <tr> <td>1,915 G</td> <td>3,000 G</td> <td>1,000 M</td> <td>2,993360 G</td> <td>-39.22</td> <td>-26.22</td> </tr> <tr> <td>3,000 G</td> <td>7,000 G</td> <td>1,000 M</td> <td>3,127000 G</td> <td>-34.00</td> <td>-21.00</td> </tr> <tr> <td>7,000 G</td> <td>13,600 G</td> <td>1,000 M</td> <td>9,172225 G</td> <td>-35.99</td> <td>-22.99</td> </tr> <tr> <td>13,600 G</td> <td>19,100 G</td> <td>1,000 M</td> <td>16,977687 G</td> <td>-25.28</td> <td>-12.28</td> </tr> </tbody> </table> <p>Date: 20.AUG.2019 15:50:59</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	Power [dBm]	ΔLimit [dB]	30,000 M	1,000 G	1,000 M	111,985000 M	-25.06	-11.06	1,000 G	1,845 G	1,000 M	1,249064 G	-40.52	-27.52	1,915 G	3,000 G	1,000 M	2,993360 G	-39.22	-26.22	3,000 G	7,000 G	1,000 M	3,127000 G	-34.00	-21.00	7,000 G	13,600 G	1,000 M	9,172225 G	-35.99	-22.99	13,600 G	19,100 G	1,000 M	16,977687 G	-25.28	-12.28
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	Power [dBm]	ΔLimit [dB]																																																																										
30,000 M	820,000 M	1,000 M	819,802500 M	-27.23	-14.23																																																																										
835,000 M	1,000 G	1,000 G	970,818758 M	-42.14	-29.14																																																																										
1,000 G	3,000 G	1,000 M	1,648500 G	-32.32	-19.32																																																																										
3,000 G	7,000 G	1,000 M	3,117000 G	-35.41	-22.41																																																																										
7,000 G	9,000 G	1,000 M	8,660500 G	-36.71	-23.71																																																																										
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	Power [dBm]	ΔLimit [dB]																																																																										
30,000 M	1,000 G	1,000 M	111,985000 M	-25.06	-11.06																																																																										
1,000 G	1,845 G	1,000 M	1,249064 G	-40.52	-27.52																																																																										
1,915 G	3,000 G	1,000 M	2,993360 G	-39.22	-26.22																																																																										
3,000 G	7,000 G	1,000 M	3,127000 G	-34.00	-21.00																																																																										
7,000 G	13,600 G	1,000 M	9,172225 G	-35.99	-22.99																																																																										
13,600 G	19,100 G	1,000 M	16,977687 G	-25.28	-12.28																																																																										
Middle Channel	Middle Channel																																																																														
 <table border="1" data-bbox="207 1176 734 1254"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>Power [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr> <td>30,000 M</td> <td>820,000 M</td> <td>1,000 M</td> <td>762,132500 M</td> <td>-42.46</td> <td>-29.46</td> </tr> <tr> <td>835,000 M</td> <td>1,000 G</td> <td>1,000 M</td> <td>808,130501 M</td> <td>-42.92</td> <td>-29.92</td> </tr> <tr> <td>1,000 G</td> <td>3,000 G</td> <td>1,000 M</td> <td>1,673000 G</td> <td>-31.55</td> <td>-18.55</td> </tr> <tr> <td>3,000 G</td> <td>7,000 G</td> <td>1,000 M</td> <td>3,117000 G</td> <td>-35.38</td> <td>-22.38</td> </tr> <tr> <td>7,000 G</td> <td>9,000 G</td> <td>1,000 M</td> <td>8,667500 G</td> <td>-36.74</td> <td>-23.74</td> </tr> </tbody> </table> <p>Date: 20.AUG.2019 15:42:59</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	Power [dBm]	ΔLimit [dB]	30,000 M	820,000 M	1,000 M	762,132500 M	-42.46	-29.46	835,000 M	1,000 G	1,000 M	808,130501 M	-42.92	-29.92	1,000 G	3,000 G	1,000 M	1,673000 G	-31.55	-18.55	3,000 G	7,000 G	1,000 M	3,117000 G	-35.38	-22.38	7,000 G	9,000 G	1,000 M	8,667500 G	-36.74	-23.74	 <table border="1" data-bbox="861 1176 1388 1254"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>Power [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr> <td>30,000 M</td> <td>1,000 G</td> <td>1,000 M</td> <td>805,272500 M</td> <td>-41.39</td> <td>-28.39</td> </tr> <tr> <td>1,000 G</td> <td>1,845 G</td> <td>1,000 M</td> <td>1,249578 G</td> <td>-39.56</td> <td>-26.56</td> </tr> <tr> <td>1,915 G</td> <td>3,000 G</td> <td>1,000 M</td> <td>2,280916 G</td> <td>-39.18</td> <td>-26.18</td> </tr> <tr> <td>3,000 G</td> <td>7,000 G</td> <td>1,000 M</td> <td>3,128000 G</td> <td>-34.16</td> <td>-21.16</td> </tr> <tr> <td>7,000 G</td> <td>13,600 G</td> <td>1,000 M</td> <td>9,186250 G</td> <td>-36.07</td> <td>-23.07</td> </tr> <tr> <td>13,600 G</td> <td>19,100 G</td> <td>1,000 M</td> <td>17,016188 G</td> <td>-25.13</td> <td>-12.13</td> </tr> </tbody> </table> <p>Date: 20.AUG.2019 15:51:48</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	Power [dBm]	ΔLimit [dB]	30,000 M	1,000 G	1,000 M	805,272500 M	-41.39	-28.39	1,000 G	1,845 G	1,000 M	1,249578 G	-39.56	-26.56	1,915 G	3,000 G	1,000 M	2,280916 G	-39.18	-26.18	3,000 G	7,000 G	1,000 M	3,128000 G	-34.16	-21.16	7,000 G	13,600 G	1,000 M	9,186250 G	-36.07	-23.07	13,600 G	19,100 G	1,000 M	17,016188 G	-25.13	-12.13
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	Power [dBm]	ΔLimit [dB]																																																																										
30,000 M	820,000 M	1,000 M	762,132500 M	-42.46	-29.46																																																																										
835,000 M	1,000 G	1,000 M	808,130501 M	-42.92	-29.92																																																																										
1,000 G	3,000 G	1,000 M	1,673000 G	-31.55	-18.55																																																																										
3,000 G	7,000 G	1,000 M	3,117000 G	-35.38	-22.38																																																																										
7,000 G	9,000 G	1,000 M	8,667500 G	-36.74	-23.74																																																																										
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	Power [dBm]	ΔLimit [dB]																																																																										
30,000 M	1,000 G	1,000 M	805,272500 M	-41.39	-28.39																																																																										
1,000 G	1,845 G	1,000 M	1,249578 G	-39.56	-26.56																																																																										
1,915 G	3,000 G	1,000 M	2,280916 G	-39.18	-26.18																																																																										
3,000 G	7,000 G	1,000 M	3,128000 G	-34.16	-21.16																																																																										
7,000 G	13,600 G	1,000 M	9,186250 G	-36.07	-23.07																																																																										
13,600 G	19,100 G	1,000 M	17,016188 G	-25.13	-12.13																																																																										
Highest Channel	Highest Channel																																																																														
 <table border="1" data-bbox="207 1691 734 1769"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>Power [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr> <td>30,000 M</td> <td>820,000 M</td> <td>1,000 M</td> <td>778,722500 M</td> <td>-43.90</td> <td>-30.90</td> </tr> <tr> <td>835,000 M</td> <td>1,000 G</td> <td>1,000 M</td> <td>858,036250 M</td> <td>-35.59</td> <td>-22.59</td> </tr> <tr> <td>1,000 G</td> <td>3,000 G</td> <td>1,000 M</td> <td>1,697500 G</td> <td>-32.87</td> <td>-19.87</td> </tr> <tr> <td>3,000 G</td> <td>7,000 G</td> <td>1,000 M</td> <td>3,123000 G</td> <td>-35.48</td> <td>-22.48</td> </tr> <tr> <td>7,000 G</td> <td>9,000 G</td> <td>1,000 M</td> <td>7,955500 G</td> <td>-36.79</td> <td>-23.79</td> </tr> </tbody> </table> <p>Date: 20.AUG.2019 15:43:53</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	Power [dBm]	ΔLimit [dB]	30,000 M	820,000 M	1,000 M	778,722500 M	-43.90	-30.90	835,000 M	1,000 G	1,000 M	858,036250 M	-35.59	-22.59	1,000 G	3,000 G	1,000 M	1,697500 G	-32.87	-19.87	3,000 G	7,000 G	1,000 M	3,123000 G	-35.48	-22.48	7,000 G	9,000 G	1,000 M	7,955500 G	-36.79	-23.79	 <table border="1" data-bbox="861 1691 1388 1769"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>Power [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr> <td>30,000 M</td> <td>1,000 G</td> <td>1,000 M</td> <td>171,620000 M</td> <td>-23.55</td> <td>-10.55</td> </tr> <tr> <td>1,000 G</td> <td>1,845 G</td> <td>1,000 M</td> <td>1,745079 G</td> <td>-40.39</td> <td>-27.39</td> </tr> <tr> <td>1,915 G</td> <td>3,000 G</td> <td>1,000 M</td> <td>2,992019 G</td> <td>-38.93</td> <td>-25.93</td> </tr> <tr> <td>3,000 G</td> <td>7,000 G</td> <td>1,000 M</td> <td>3,130000 G</td> <td>-34.12</td> <td>-21.12</td> </tr> <tr> <td>7,000 G</td> <td>13,600 G</td> <td>1,000 M</td> <td>9,139225 G</td> <td>-35.97</td> <td>-22.97</td> </tr> <tr> <td>13,600 G</td> <td>19,100 G</td> <td>1,000 M</td> <td>17,064313 G</td> <td>-24.64</td> <td>-11.64</td> </tr> </tbody> </table> <p>Date: 20.AUG.2019 15:52:44</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	Power [dBm]	ΔLimit [dB]	30,000 M	1,000 G	1,000 M	171,620000 M	-23.55	-10.55	1,000 G	1,845 G	1,000 M	1,745079 G	-40.39	-27.39	1,915 G	3,000 G	1,000 M	2,992019 G	-38.93	-25.93	3,000 G	7,000 G	1,000 M	3,130000 G	-34.12	-21.12	7,000 G	13,600 G	1,000 M	9,139225 G	-35.97	-22.97	13,600 G	19,100 G	1,000 M	17,064313 G	-24.64	-11.64
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	Power [dBm]	ΔLimit [dB]																																																																										
30,000 M	820,000 M	1,000 M	778,722500 M	-43.90	-30.90																																																																										
835,000 M	1,000 G	1,000 M	858,036250 M	-35.59	-22.59																																																																										
1,000 G	3,000 G	1,000 M	1,697500 G	-32.87	-19.87																																																																										
3,000 G	7,000 G	1,000 M	3,123000 G	-35.48	-22.48																																																																										
7,000 G	9,000 G	1,000 M	7,955500 G	-36.79	-23.79																																																																										
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	Power [dBm]	ΔLimit [dB]																																																																										
30,000 M	1,000 G	1,000 M	171,620000 M	-23.55	-10.55																																																																										
1,000 G	1,845 G	1,000 M	1,745079 G	-40.39	-27.39																																																																										
1,915 G	3,000 G	1,000 M	2,992019 G	-38.93	-25.93																																																																										
3,000 G	7,000 G	1,000 M	3,130000 G	-34.12	-21.12																																																																										
7,000 G	13,600 G	1,000 M	9,139225 G	-35.97	-22.97																																																																										
13,600 G	19,100 G	1,000 M	17,064313 G	-24.64	-11.64																																																																										



**Frequency Stability**

Test Conditions	Middle Channel	GSM850 (GPRS class 8)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0155	PASS
40	Normal Voltage	0.0012	
30	Normal Voltage	0.0060	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0024	
0	Normal Voltage	0.0024	
-10	Normal Voltage	0.0024	
-20	Normal Voltage	0.0060	
-30	Normal Voltage	0.0060	
20	Maximum Voltage	0.0012	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0036	

Test Conditions	Middle Channel	GSM1900 (GPRS class 8)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0027	PASS
40	Normal Voltage	0.0069	
30	Normal Voltage	0.0021	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0059	
0	Normal Voltage	0.0016	
-10	Normal Voltage	0.0037	
-20	Normal Voltage	0.0000	
-30	Normal Voltage	0.0037	
20	Maximum Voltage	0.0016	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0000	

**Note:**

- 1. Normal Voltage = 3.8 ; Battery End Point (BEP) = 3.5V. ; Maximum Voltage =4.2V
- 2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.









### A3. WCDMA

#### Peak-to-Average Ratio

Mode	WCDMA Band V	WCDMA Band II	WCDMA Band IV	Limit: 13dB
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps	Result
Lowest CH	3.12	2.08	3.04	<b>PASS</b>
Middle CH	3.20	2.48	3.04	
Highest CH	3.16	2.64	3.20	



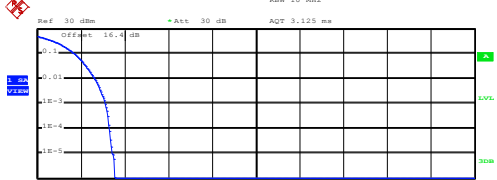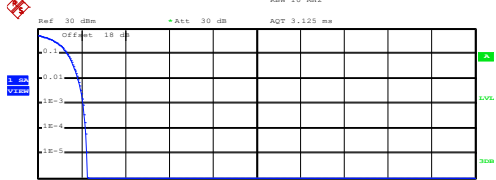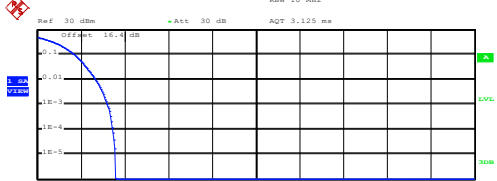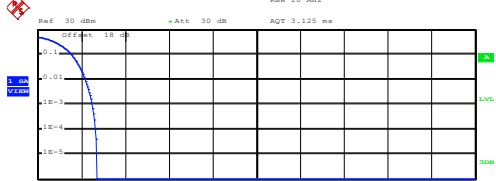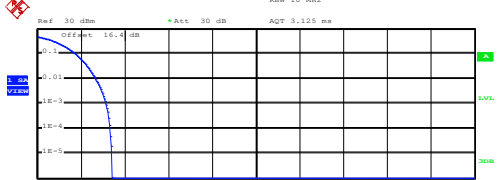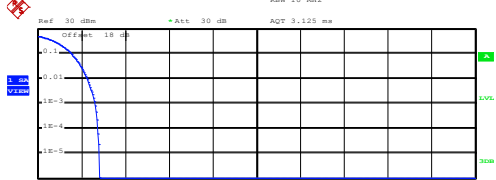


WCDMA Band V (RMC 12.2Kbps)	WCDMA Band II (RMC 12.2Kbps)
<p style="text-align: center;"><b>Lowest Channel</b></p>  <p>Center 826.4 MHz</p> <p>Complementary Cumulative Distribution Function (100000 samples)</p> <p>Trace 1</p> <p>Mean 23.67 dBm Peak 27.22 dBm Crest 3.55 dB</p> <p>10 % 1.72 dB 1 % 2.64 dB .1 % 3.12 dB .01 % 3.32 dB</p> <p>Date: 20.AUG.2019 17:14:57</p>	<p style="text-align: center;"><b>Lowest Channel</b></p>  <p>Center 1.8524 GHz</p> <p>Complementary Cumulative Distribution Function (100000 samples)</p> <p>Trace 1</p> <p>Mean 23.57 dBm Peak 25.81 dBm Crest 2.24 dB</p> <p>10 % 1.36 dB 1 % 1.84 dB .1 % 2.08 dB .01 % 2.20 dB</p> <p>Date: 20.AUG.2019 16:34:11</p>
<p style="text-align: center;"><b>Middle Channel</b></p>  <p>Center 836.0 MHz</p> <p>Complementary Cumulative Distribution Function (100000 samples)</p> <p>Trace 1</p> <p>Mean 22.72 dBm Peak 26.30 dBm Crest 3.58 dB</p> <p>10 % 1.72 dB 1 % 2.68 dB .1 % 3.20 dB .01 % 3.44 dB</p> <p>Date: 20.AUG.2019 17:15:10</p>	<p style="text-align: center;"><b>Middle Channel</b></p>  <p>Center 1.88 GHz</p> <p>Complementary Cumulative Distribution Function (100000 samples)</p> <p>Trace 1</p> <p>Mean 23.80 dBm Peak 26.52 dBm Crest 2.71 dB</p> <p>10 % 1.56 dB 1 % 2.16 dB .1 % 2.48 dB .01 % 2.64 dB</p> <p>Date: 20.AUG.2019 16:34:27</p>
<p style="text-align: center;"><b>Highest Channel</b></p>  <p>Center 846.0 MHz</p> <p>Complementary Cumulative Distribution Function (100000 samples)</p> <p>Trace 1</p> <p>Mean 23.80 dBm Peak 27.22 dBm Crest 3.42 dB</p> <p>10 % 1.76 dB 1 % 2.68 dB .1 % 3.16 dB .01 % 3.32 dB</p> <p>Date: 20.AUG.2019 17:15:25</p>	<p style="text-align: center;"><b>Highest Channel</b></p>  <p>Center 1.9370 GHz</p> <p>Complementary Cumulative Distribution Function (100000 samples)</p> <p>Trace 1</p> <p>Mean 23.76 dBm Peak 26.59 dBm Crest 2.83 dB</p> <p>10 % 1.56 dB 1 % 2.28 dB .1 % 2.64 dB .01 % 2.76 dB</p> <p>Date: 20.AUG.2019 16:34:42</p>



### WCDMA Band IV (RMC 12.2Kbps)

#### Lowest Channel

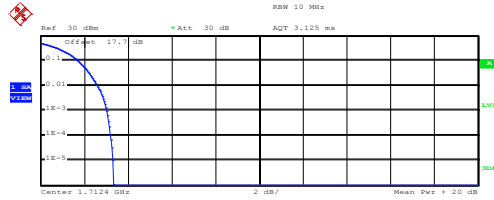


Complementary Cumulative Distribution Function (100000 samples)

Trace 1  
Mean 23.47 dBm  
Peak 26.80 dBm  
Crest 3.33 dB  
  
10 % 1.72 dB  
1 % 2.60 dB  
.1 % 3.04 dB  
.01 % 3.20 dB

Date: 20.AUG.2019 16:49:34

#### Middle Channel

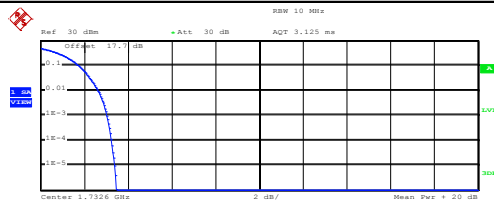


Complementary Cumulative Distribution Function (100000 samples)

Trace 1  
Mean 23.41 dBm  
Peak 26.87 dBm  
Crest 3.46 dB  
  
10 % 1.76 dB  
1 % 2.64 dB  
.1 % 3.04 dB  
.01 % 3.24 dB

Date: 20.AUG.2019 16:49:49

#### Highest Channel

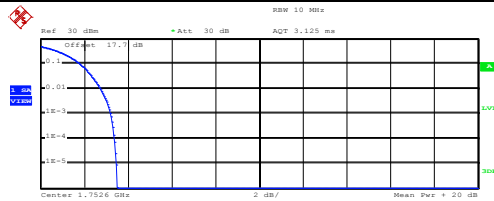

Complementary Cumulative Distribution Function (100000 samples)

Trace 1  
Mean 23.37 dBm  
Peak 26.87 dBm  
Crest 3.49 dB  
  
10 % 1.80 dB  
1 % 2.76 dB  
.1 % 3.20 dB  
.01 % 3.40 dB

Date: 20.AUG.2019 16:50:01



**26dB Bandwidth**

Mode	WCDMA Band V	WCDMA Band II	WCDMA Band IV
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.72	4.77	4.71
Middle CH	4.71	4.72	4.70
Highest CH	4.71	4.72	4.69





WCDMA Band V (RMC 12.2Kbps)

WCDMA Band II (RMC 12.2Kbps)

Lowest Channel

Lowest Channel

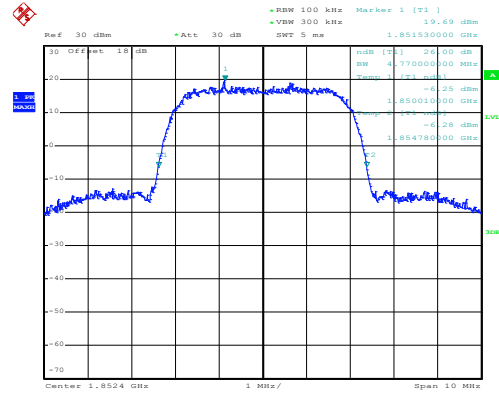
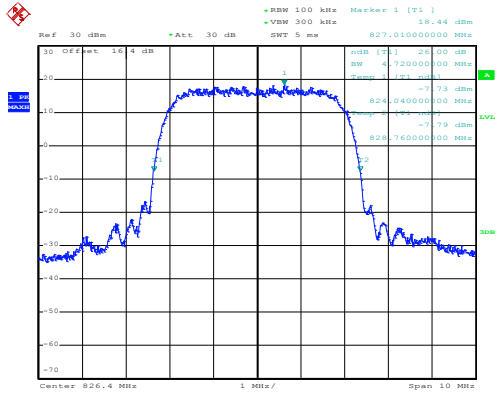


Date: 20.AUG.2019 17:00:27

Date: 20.AUG.2019 16:04:05

Middle Channel

Middle Channel

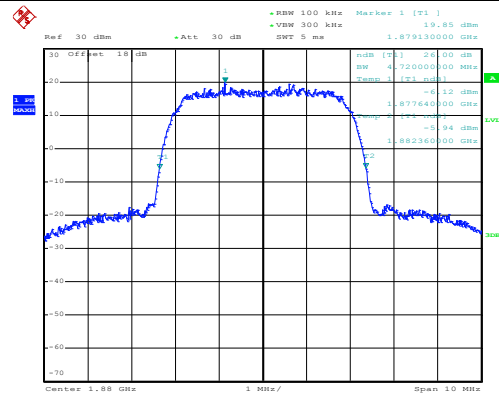
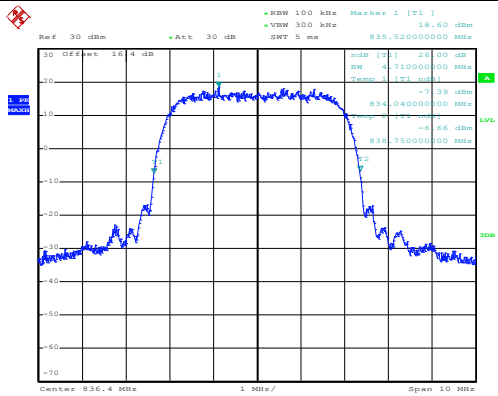


Date: 20.AUG.2019 17:01:34

Date: 20.AUG.2019 16:04:46

Highest Channel

Highest Channel

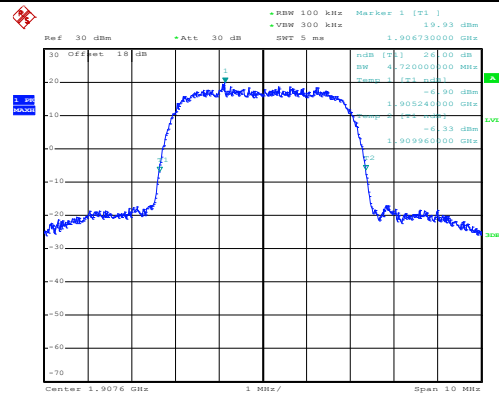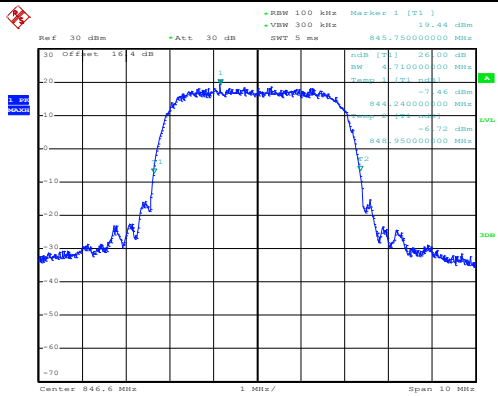


Date: 20.AUG.2019 17:02:07

Date: 20.AUG.2019 16:05:21




### WCDMA Band IV (RMC 12.2Kbps)

#### Lowest Channel

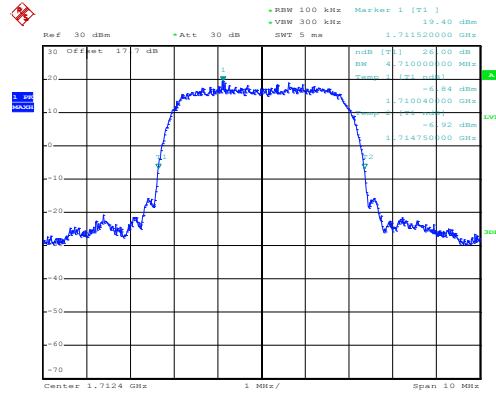


Date: 20.AUG.2019 16:36:14

#### Middle Channel

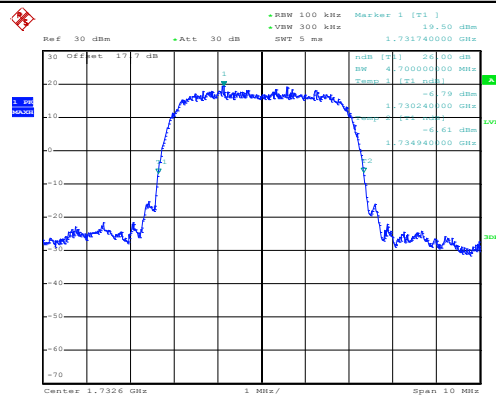

Date: 20.AUG.2019 16:36:47

#### Highest Channel

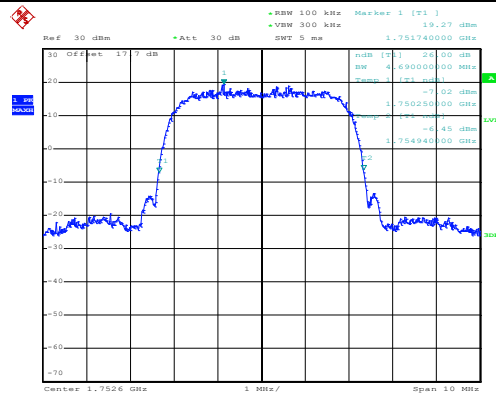

Date: 20.AUG.2019 16:37:37



### Occupied Bandwidth

Mode	WCDMA Band V	WCDMA Band II	WCDMA Band IV
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.14	4.16	4.13
Middle CH	4.14	4.15	4.13
Highest CH	4.13	4.15	4.13





WCDMA Band V (RMC 12.2Kbps)

WCDMA Band II (RMC 12.2Kbps)

Lowest Channel

Lowest Channel

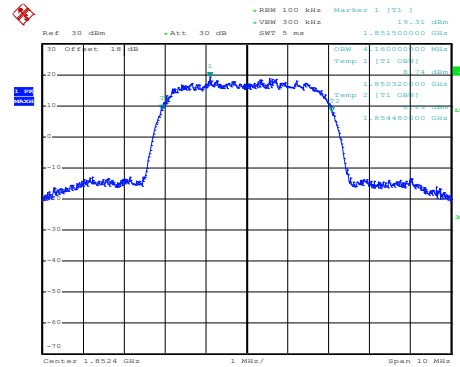
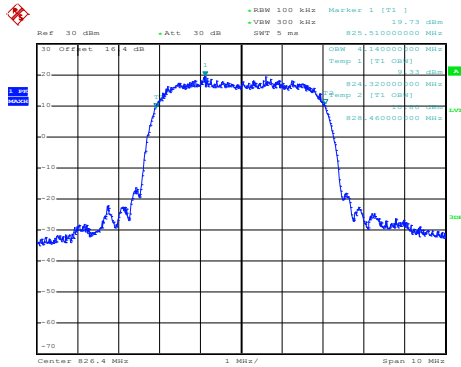


Date: 20.AUG.2019 17:05:48

Date: 20.AUG.2019 16:08:58

Middle Channel

Middle Channel

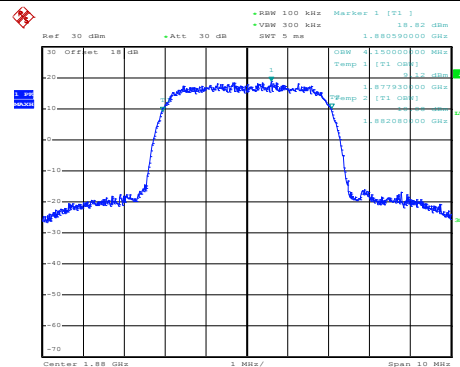
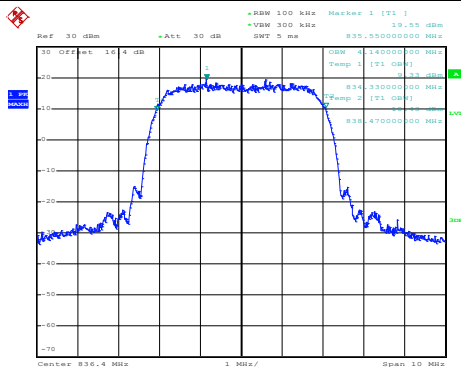


Date: 20.AUG.2019 17:06:25

Date: 20.AUG.2019 16:09:34

Highest Channel

Highest Channel

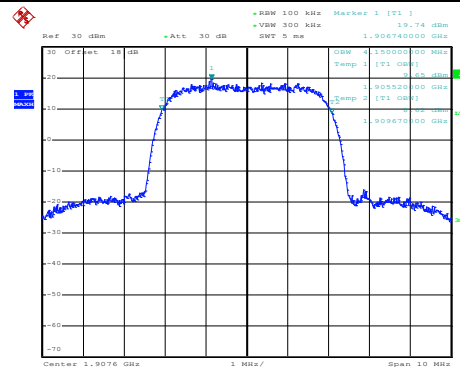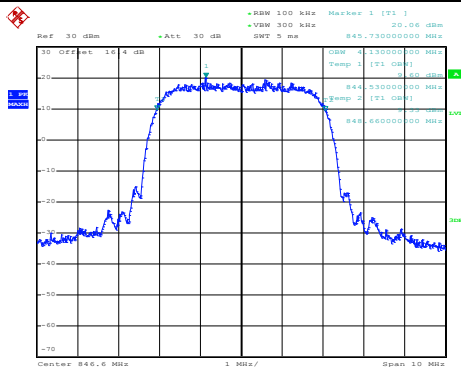


Date: 20.AUG.2019 17:07:30

Date: 20.AUG.2019 16:10:10




### WCDMA Band IV (RMC 12.2Kbps)

#### Lowest Channel

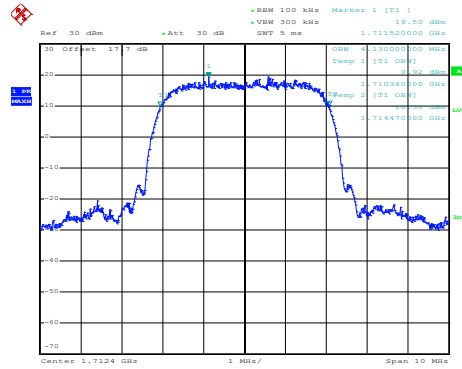


Date: 20.AUG.2019 16:41:08

#### Middle Channel

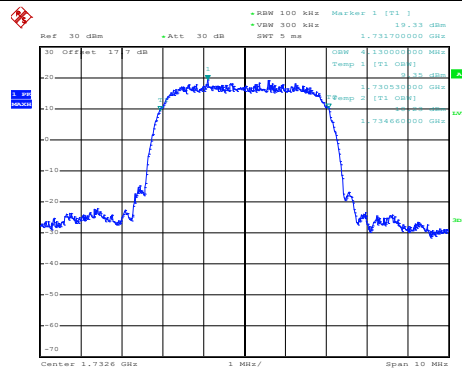

Date: 20.AUG.2019 16:41:44

#### Highest Channel

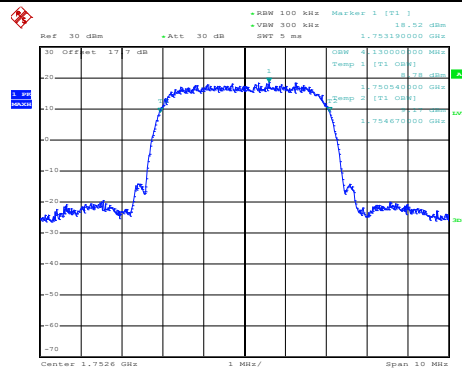

Date: 20.AUG.2019 16:42:20






# Conducted Band Edge


## WCDMA Band V (RMC 12.2Kbps)

### Lowest Band Edge

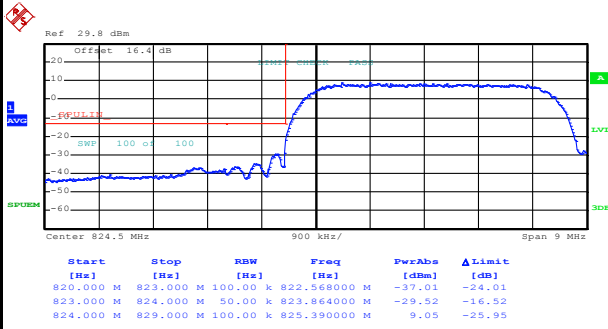

Date: 20.AUG.2019 17:11:26

### Highest Band Edge

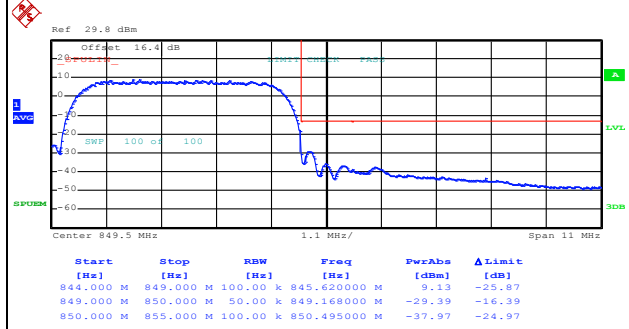


Date: 20.AUG.2019 17:14:16




WCDMA Band II (RMC 12.2Kbps)

Lowest Band Edge

Highest Band Edge

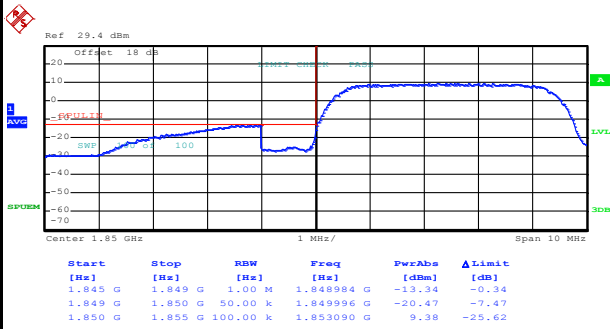

Date: 20.AUG.2019 16:13:06

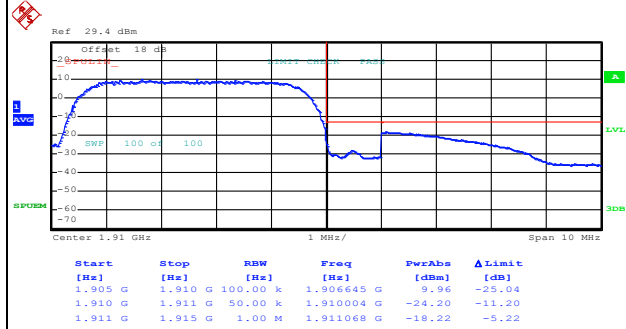


Date: 20.AUG.2019 16:15:53




WCDMA Band IV (RMC 12.2Kbps)

Lowest Band Edge

Highest Band Edge

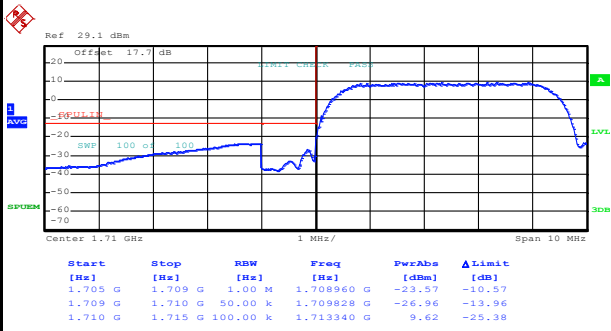







Date: 20.AUG.2019 16:45:25

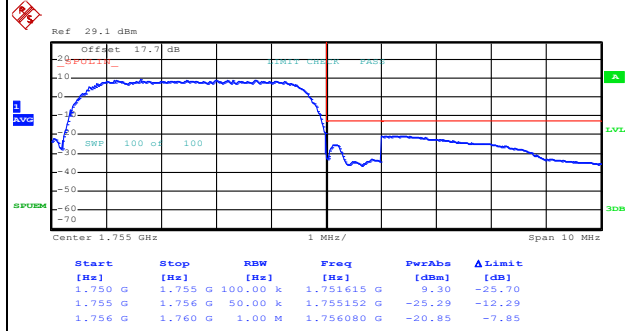

Date: 20.AUG.2019 16:48:58




# Conducted Spurious Emission

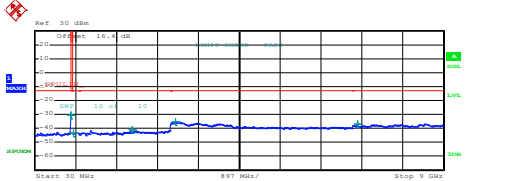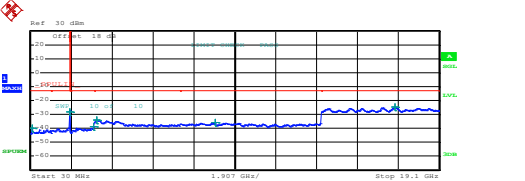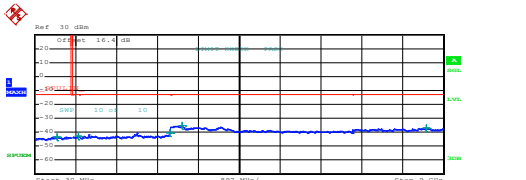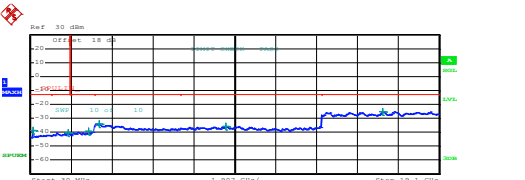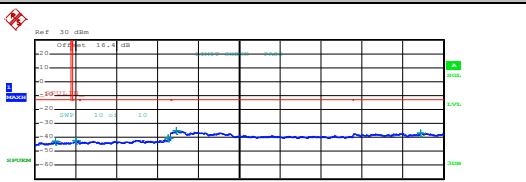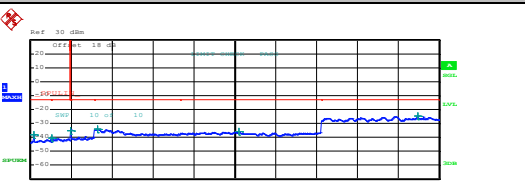WCDMA Band V (RMC 12.2Kbps)	WCDMA Band II (RMC 12.2Kbps)																																																																														
Lowest Channel	Lowest Channel																																																																														
 <table border="1" data-bbox="239 660 750 739"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PerAbn [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr> <td>30,000 M</td> <td>820,000 M</td> <td>1,000 M</td> <td>819,012500 M</td> <td>-30.64</td> <td>-17.64</td> </tr> <tr> <td>835,000 M</td> <td>1,000 G</td> <td>1,000 G</td> <td>877,438750 M</td> <td>-43.33</td> <td>-30.33</td> </tr> <tr> <td>1,000 G</td> <td>3,000 G</td> <td>1,000 M</td> <td>2,172000 G</td> <td>-41.30</td> <td>-28.30</td> </tr> <tr> <td>3,000 G</td> <td>7,000 G</td> <td>1,000 M</td> <td>3,115000 G</td> <td>-35.33</td> <td>-22.33</td> </tr> <tr> <td>7,000 G</td> <td>9,000 G</td> <td>1,000 M</td> <td>7,108000 G</td> <td>-37.05</td> <td>-24.05</td> </tr> </tbody> </table> <p>Date: 20.AUG.2019 17:03:04</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PerAbn [dBm]	ΔLimit [dB]	30,000 M	820,000 M	1,000 M	819,012500 M	-30.64	-17.64	835,000 M	1,000 G	1,000 G	877,438750 M	-43.33	-30.33	1,000 G	3,000 G	1,000 M	2,172000 G	-41.30	-28.30	3,000 G	7,000 G	1,000 M	3,115000 G	-35.33	-22.33	7,000 G	9,000 G	1,000 M	7,108000 G	-37.05	-24.05	 <table border="1" data-bbox="893 660 1404 739"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PerAbn [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr> <td>30,000 M</td> <td>1,000 G</td> <td>1,000 M</td> <td>114,875000 M</td> <td>-19.95</td> <td>-26.95</td> </tr> <tr> <td>1,000 G</td> <td>1,845 G</td> <td>1,000 M</td> <td>1,844578 G</td> <td>-28.27</td> <td>-15.27</td> </tr> <tr> <td>1,915 G</td> <td>3,000 G</td> <td>1,000 M</td> <td>2,973300 G</td> <td>-38.73</td> <td>-25.73</td> </tr> <tr> <td>3,000 G</td> <td>7,000 G</td> <td>1,000 M</td> <td>3,136000 G</td> <td>-33.77</td> <td>-20.77</td> </tr> <tr> <td>7,000 G</td> <td>13,600 G</td> <td>1,000 M</td> <td>8,643000 G</td> <td>-35.93</td> <td>-22.93</td> </tr> <tr> <td>13,600 G</td> <td>19,100 G</td> <td>1,000 M</td> <td>17,038387 G</td> <td>-24.36</td> <td>-11.36</td> </tr> </tbody> </table> <p>Date: 20.AUG.2019 16:06:17</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PerAbn [dBm]	ΔLimit [dB]	30,000 M	1,000 G	1,000 M	114,875000 M	-19.95	-26.95	1,000 G	1,845 G	1,000 M	1,844578 G	-28.27	-15.27	1,915 G	3,000 G	1,000 M	2,973300 G	-38.73	-25.73	3,000 G	7,000 G	1,000 M	3,136000 G	-33.77	-20.77	7,000 G	13,600 G	1,000 M	8,643000 G	-35.93	-22.93	13,600 G	19,100 G	1,000 M	17,038387 G	-24.36	-11.36
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PerAbn [dBm]	ΔLimit [dB]																																																																										
30,000 M	820,000 M	1,000 M	819,012500 M	-30.64	-17.64																																																																										
835,000 M	1,000 G	1,000 G	877,438750 M	-43.33	-30.33																																																																										
1,000 G	3,000 G	1,000 M	2,172000 G	-41.30	-28.30																																																																										
3,000 G	7,000 G	1,000 M	3,115000 G	-35.33	-22.33																																																																										
7,000 G	9,000 G	1,000 M	7,108000 G	-37.05	-24.05																																																																										
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PerAbn [dBm]	ΔLimit [dB]																																																																										
30,000 M	1,000 G	1,000 M	114,875000 M	-19.95	-26.95																																																																										
1,000 G	1,845 G	1,000 M	1,844578 G	-28.27	-15.27																																																																										
1,915 G	3,000 G	1,000 M	2,973300 G	-38.73	-25.73																																																																										
3,000 G	7,000 G	1,000 M	3,136000 G	-33.77	-20.77																																																																										
7,000 G	13,600 G	1,000 M	8,643000 G	-35.93	-22.93																																																																										
13,600 G	19,100 G	1,000 M	17,038387 G	-24.36	-11.36																																																																										
Middle Channel	Middle Channel																																																																														
 <table border="1" data-bbox="239 1176 750 1254"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PerAbn [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr> <td>30,000 M</td> <td>820,000 M</td> <td>1,000 M</td> <td>519,800000 M</td> <td>-43.11</td> <td>-30.11</td> </tr> <tr> <td>835,000 M</td> <td>1,000 G</td> <td>1,000 M</td> <td>983,760000 M</td> <td>-43.01</td> <td>-30.01</td> </tr> <tr> <td>1,000 G</td> <td>3,000 G</td> <td>1,000 M</td> <td>2,999000 G</td> <td>-40.25</td> <td>-27.25</td> </tr> <tr> <td>3,000 G</td> <td>7,000 G</td> <td>1,000 M</td> <td>3,236000 G</td> <td>-39.26</td> <td>-26.26</td> </tr> <tr> <td>7,000 G</td> <td>9,000 G</td> <td>1,000 M</td> <td>8,419000 G</td> <td>-36.71</td> <td>-23.71</td> </tr> </tbody> </table> <p>Date: 20.AUG.2019 17:03:58</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PerAbn [dBm]	ΔLimit [dB]	30,000 M	820,000 M	1,000 M	519,800000 M	-43.11	-30.11	835,000 M	1,000 G	1,000 M	983,760000 M	-43.01	-30.01	1,000 G	3,000 G	1,000 M	2,999000 G	-40.25	-27.25	3,000 G	7,000 G	1,000 M	3,236000 G	-39.26	-26.26	7,000 G	9,000 G	1,000 M	8,419000 G	-36.71	-23.71	 <table border="1" data-bbox="893 1176 1404 1254"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PerAbn [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr> <td>30,000 M</td> <td>1,000 G</td> <td>1,000 M</td> <td>141,060000 M</td> <td>-38.59</td> <td>-25.59</td> </tr> <tr> <td>1,000 G</td> <td>1,845 G</td> <td>1,000 M</td> <td>3,881483 G</td> <td>-40.55</td> <td>-27.55</td> </tr> <tr> <td>1,915 G</td> <td>3,000 G</td> <td>1,000 M</td> <td>2,724933 G</td> <td>-39.50</td> <td>-26.50</td> </tr> <tr> <td>3,000 G</td> <td>7,000 G</td> <td>1,000 M</td> <td>3,236000 G</td> <td>-33.82</td> <td>-20.82</td> </tr> <tr> <td>7,000 G</td> <td>13,600 G</td> <td>1,000 M</td> <td>8,147475 G</td> <td>-35.91</td> <td>-22.91</td> </tr> <tr> <td>13,600 G</td> <td>19,100 G</td> <td>1,000 M</td> <td>16,460687 G</td> <td>-25.12</td> <td>-12.12</td> </tr> </tbody> </table> <p>Date: 20.AUG.2019 16:07:20</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PerAbn [dBm]	ΔLimit [dB]	30,000 M	1,000 G	1,000 M	141,060000 M	-38.59	-25.59	1,000 G	1,845 G	1,000 M	3,881483 G	-40.55	-27.55	1,915 G	3,000 G	1,000 M	2,724933 G	-39.50	-26.50	3,000 G	7,000 G	1,000 M	3,236000 G	-33.82	-20.82	7,000 G	13,600 G	1,000 M	8,147475 G	-35.91	-22.91	13,600 G	19,100 G	1,000 M	16,460687 G	-25.12	-12.12
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PerAbn [dBm]	ΔLimit [dB]																																																																										
30,000 M	820,000 M	1,000 M	519,800000 M	-43.11	-30.11																																																																										
835,000 M	1,000 G	1,000 M	983,760000 M	-43.01	-30.01																																																																										
1,000 G	3,000 G	1,000 M	2,999000 G	-40.25	-27.25																																																																										
3,000 G	7,000 G	1,000 M	3,236000 G	-39.26	-26.26																																																																										
7,000 G	9,000 G	1,000 M	8,419000 G	-36.71	-23.71																																																																										
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PerAbn [dBm]	ΔLimit [dB]																																																																										
30,000 M	1,000 G	1,000 M	141,060000 M	-38.59	-25.59																																																																										
1,000 G	1,845 G	1,000 M	3,881483 G	-40.55	-27.55																																																																										
1,915 G	3,000 G	1,000 M	2,724933 G	-39.50	-26.50																																																																										
3,000 G	7,000 G	1,000 M	3,236000 G	-33.82	-20.82																																																																										
7,000 G	13,600 G	1,000 M	8,147475 G	-35.91	-22.91																																																																										
13,600 G	19,100 G	1,000 M	16,460687 G	-25.12	-12.12																																																																										
Highest Channel	Highest Channel																																																																														
 <table border="1" data-bbox="239 1691 750 1769"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PerAbn [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr> <td>30,000 M</td> <td>820,000 M</td> <td>1,000 M</td> <td>469,435000 M</td> <td>-42.76</td> <td>-29.76</td> </tr> <tr> <td>835,000 M</td> <td>1,000 G</td> <td>1,000 M</td> <td>919,851254 M</td> <td>-42.43</td> <td>-29.43</td> </tr> <tr> <td>1,000 G</td> <td>3,000 G</td> <td>1,000 M</td> <td>2,963000 G</td> <td>-40.62</td> <td>-27.62</td> </tr> <tr> <td>3,000 G</td> <td>7,000 G</td> <td>1,000 M</td> <td>3,139000 G</td> <td>-35.37</td> <td>-22.37</td> </tr> <tr> <td>7,000 G</td> <td>9,000 G</td> <td>1,000 M</td> <td>8,491000 G</td> <td>-37.04</td> <td>-24.04</td> </tr> </tbody> </table> <p>Date: 20.AUG.2019 17:05:12</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PerAbn [dBm]	ΔLimit [dB]	30,000 M	820,000 M	1,000 M	469,435000 M	-42.76	-29.76	835,000 M	1,000 G	1,000 M	919,851254 M	-42.43	-29.43	1,000 G	3,000 G	1,000 M	2,963000 G	-40.62	-27.62	3,000 G	7,000 G	1,000 M	3,139000 G	-35.37	-22.37	7,000 G	9,000 G	1,000 M	8,491000 G	-37.04	-24.04	 <table border="1" data-bbox="893 1691 1404 1769"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PerAbn [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr> <td>30,000 M</td> <td>1,000 G</td> <td>1,000 M</td> <td>170,185000 M</td> <td>-38.18</td> <td>-25.18</td> </tr> <tr> <td>1,000 G</td> <td>1,845 G</td> <td>1,000 M</td> <td>1,010140 G</td> <td>-40.53</td> <td>-27.53</td> </tr> <tr> <td>1,915 G</td> <td>3,000 G</td> <td>1,000 M</td> <td>2,953212 G</td> <td>-39.25</td> <td>-26.25</td> </tr> <tr> <td>3,000 G</td> <td>7,000 G</td> <td>1,000 M</td> <td>3,153000 G</td> <td>-34.19</td> <td>-21.19</td> </tr> <tr> <td>7,000 G</td> <td>13,600 G</td> <td>1,000 M</td> <td>9,798700 G</td> <td>-36.05</td> <td>-23.05</td> </tr> <tr> <td>13,600 G</td> <td>19,100 G</td> <td>1,000 M</td> <td>18,090662 G</td> <td>-24.84</td> <td>-11.84</td> </tr> </tbody> </table> <p>Date: 20.AUG.2019 16:08:10</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PerAbn [dBm]	ΔLimit [dB]	30,000 M	1,000 G	1,000 M	170,185000 M	-38.18	-25.18	1,000 G	1,845 G	1,000 M	1,010140 G	-40.53	-27.53	1,915 G	3,000 G	1,000 M	2,953212 G	-39.25	-26.25	3,000 G	7,000 G	1,000 M	3,153000 G	-34.19	-21.19	7,000 G	13,600 G	1,000 M	9,798700 G	-36.05	-23.05	13,600 G	19,100 G	1,000 M	18,090662 G	-24.84	-11.84
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PerAbn [dBm]	ΔLimit [dB]																																																																										
30,000 M	820,000 M	1,000 M	469,435000 M	-42.76	-29.76																																																																										
835,000 M	1,000 G	1,000 M	919,851254 M	-42.43	-29.43																																																																										
1,000 G	3,000 G	1,000 M	2,963000 G	-40.62	-27.62																																																																										
3,000 G	7,000 G	1,000 M	3,139000 G	-35.37	-22.37																																																																										
7,000 G	9,000 G	1,000 M	8,491000 G	-37.04	-24.04																																																																										
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PerAbn [dBm]	ΔLimit [dB]																																																																										
30,000 M	1,000 G	1,000 M	170,185000 M	-38.18	-25.18																																																																										
1,000 G	1,845 G	1,000 M	1,010140 G	-40.53	-27.53																																																																										
1,915 G	3,000 G	1,000 M	2,953212 G	-39.25	-26.25																																																																										
3,000 G	7,000 G	1,000 M	3,153000 G	-34.19	-21.19																																																																										
7,000 G	13,600 G	1,000 M	9,798700 G	-36.05	-23.05																																																																										
13,600 G	19,100 G	1,000 M	18,090662 G	-24.84	-11.84																																																																										




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

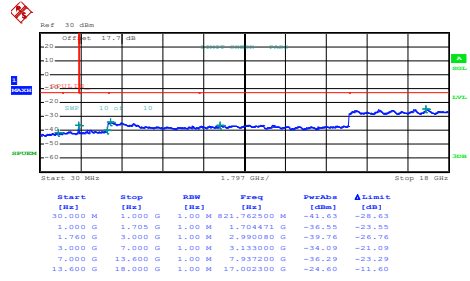


Date: 20.AUG.2019 16:38:33

Middle Channel

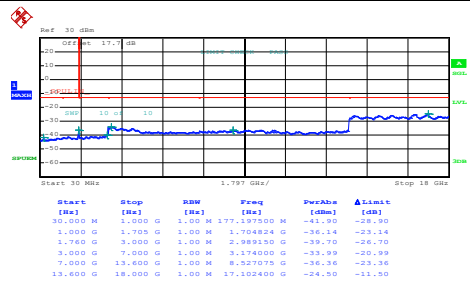

Date: 20.AUG.2019 16:39:20

Highest Channel

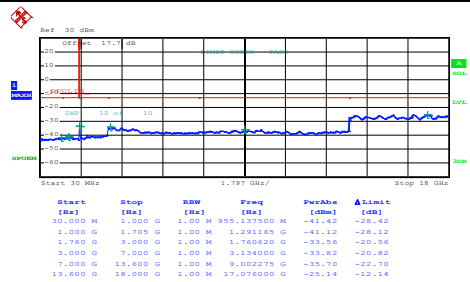

Date: 20.AUG.2019 16:40:22



**Frequency Stability**

Test Conditions	Middle Channel	WCDMA Band V (RMC 12.2Kbps)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0012	PASS
40	Normal Voltage	0.0024	
30	Normal Voltage	0.0024	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0012	
0	Normal Voltage	0.0012	
-10	Normal Voltage	0.0024	
-20	Normal Voltage	0.0036	
-30	Normal Voltage	0.0024	
20	Maximum Voltage	0.0012	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0024	

Test Conditions	Middle Channel	WCDMA Band II (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0005	PASS
40	Normal Voltage	0.0005	
30	Normal Voltage	0.0021	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0000	
0	Normal Voltage	0.0011	
-10	Normal Voltage	0.0011	
-20	Normal Voltage	0.0005	
-30	Normal Voltage	0.0005	
20	Maximum Voltage	0.0000	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0011	



Test Conditions	Middle Channel	WCDMA Band IV (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0006	PASS
40	Normal Voltage	0.0006	
30	Normal Voltage	0.0012	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0006	
0	Normal Voltage	0.0000	
-10	Normal Voltage	0.0000	
-20	Normal Voltage	0.0000	
-30	Normal Voltage	0.0006	
20	Maximum Voltage	0.0012	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0006	

**Note:**

1. Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.5 V. ; Maximum Voltage =4.2 V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



## Appendix B. Test Results of ERP/EIRP and Radiated Test

### ERP/EIRP

Channel	Mode	Conducted		ERP	
		Power (dBm)	Power (Watts)	ERP(dBm)	ERP(W)
Lowest	GSM850 GPRS class 8 (GT - LC = -4.3 dB)	34.80	3.0200	28.35	0.6839
Middle		34.81	3.0269	28.36	0.6855
Highest		34.72	2.9648	28.27	0.6714
Lowest	WCDMA Band V RMC 12.2Kbps (GT - LC = -4.3 dB)	24.98	0.3148	18.53	0.0713
Middle		24.99	0.3155	18.54	0.0714
Highest		25.00	0.3162	18.55	0.0716
Limit	ERP < 7W	Result		PASS	

Channel	Mode	Conducted		EIRP	
		Power (dBm)	Power (Watts)	EIRP(dBm)	EIRP(W)
Lowest	GSM1900 GPRS class 8 (GT - LC = 0.1 dB)	31.45	1.3964	31.55	1.4289
Middle		31.34	1.3614	31.44	1.3932
Highest		31.35	1.3646	31.45	1.3964
Lowest	WCDMA Band II RMC 12.2Kbps (GT - LC = 0.1 dB)	23.54	0.2259	23.64	0.2312
Middle		23.66	0.2323	23.76	0.2377
Highest		23.85	0.2427	23.95	0.2483
Limit	EIRP < 2W	Result		PASS	

Channel	Mode	Conducted		EIRP	
		Power (dBm)	Power (Watts)	EIRP(dBm)	EIRP(W)
Lowest	WCDMA Band IV RMC 12.2Kbps (GT - LC = -0.2 dB)	23.99	0.2506	23.79	0.2393
Middle		23.94	0.2477	23.74	0.2366
Highest		23.97	0.2495	23.77	0.2382
Limit	EIRP < 1W	Result		PASS	





**Radiated Spurious Emission**

<Main Ant.>

**GPRS850**

GPRS 850									
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1648	-53.76	-13	-40.76	-66.22	-55.52	0.98	4.89	H
	2472	-40.08	-13	-27.08	-57.67	-41.96	1.28	5.32	H
	3296	-58.18	-13	-45.18	-77.79	-61.59	1.54	7.10	H
									H
	1648	-45.48	-13	-32.48	-58.42	-47.24	0.98	4.89	V
	2472	-29.45	-13	-16.45	-47.54	-31.33	1.28	5.32	V
	3296	-57.31	-13	-44.31	-77.42	-60.72	1.54	7.10	V
									V
Middle	1672	-55.37	-13	-42.37	-68.13	-57.05	0.99	4.82	H
	2512	-38.68	-13	-25.68	-56.42	-40.65	1.29	5.41	H
	3344	-57.78	-13	-44.78	-77.78	-61.39	1.56	7.31	H
									H
	1672	-46.47	-13	-33.47	-59.81	-48.15	0.99	4.82	V
	2512	-35.66	-13	-22.66	-53.81	-37.63	1.29	5.41	V
	3344	-57.67	-13	-44.67	-77.92	-61.28	1.56	7.31	V
									V
Highest	1696	-53.65	-13	-40.65	-66.52	-55.25	1.00	4.75	H
	2544	-41.11	-13	-28.11	-58.84	-43.09	1.30	5.44	H
	3392	-57.45	-13	-44.45	-77.7	-61.25	1.57	7.52	H
									H
	1696	-47.02	-13	-34.02	-60.34	-48.62	1.00	4.75	V
	2544	-36.41	-13	-23.41	-54.62	-38.39	1.30	5.44	V
	3392	-57.47	-13	-44.47	-77.81	-61.27	1.57	7.52	V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA 850

WCDMA 850									
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1648	-61.91	-13	-48.91	-74.42	-63.67	0.98	4.89	H
	2480	-46.11	-13	-33.11	-63.69	-48.02	1.28	5.34	H
	3304	-57.67	-13	-44.67	-77.61	-61.11	1.54	7.14	H
									H
	1648	-61.01	-13	-48.01	-73.94	-62.77	0.98	4.89	V
	2480	-43.12	-13	-30.12	-61.17	-45.03	1.28	5.34	V
	3304	-56.68	-13	-43.68	-76.84	-60.12	1.54	7.14	V
									V
Middle	1672	-62.14	-13	-49.14	-74.78	-63.82	0.99	4.82	H
	2512	-46.64	-13	-33.64	-64.33	-48.61	1.29	5.41	H
	3344	-57.95	-13	-44.95	-77.98	-61.56	1.56	7.31	H
									H
	1672	-60.87	-13	-47.87	-74.07	-62.55	0.99	4.82	V
	2512	-46.85	-13	-33.85	-65	-48.82	1.29	5.41	V
	3344	-57.53	-13	-44.53	-77.75	-61.14	1.56	7.31	V
									V
Highest	1688	-62.74	-13	-49.74	-75.51	-64.37	1.00	4.77	H
	2536	-51.28	-13	-38.28	-68.98	-53.26	1.30	5.43	H
	3384	-57.51	-13	-44.51	-77.76	-61.28	1.57	7.49	H
									H
	1688	-61.74	-13	-48.74	-74.91	-63.37	1.00	4.77	V
	2536	-49.97	-13	-36.97	-68.16	-51.95	1.30	5.43	V
	3384	-57.28	-13	-44.28	-77.6	-61.05	1.57	7.49	V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



**WCDMA 1700**

WCDMA 1700									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3426	-56.18	-13	-43.18	-76.89	-62.27	1.58	7.67	H
	5142	-53.01	-13	-40.01	-77.13	-60.29	2.42	9.70	H
	6849	-50.47	-13	-37.47	-77.33	-58.45	2.64	10.62	H
									H
	3426	-56.15	-13	-43.15	-76.9	-62.24	1.58	7.67	V
	5142	-52.51	-13	-39.51	-76.5	-59.79	2.42	9.70	V
	6849	-51.03	-13	-38.03	-77.83	-59.01	2.64	10.62	V
									V
Middle	3462	-55.23	-13	-42.23	-76.15	-61.47	1.59	7.83	H
	5197	-52.43	-13	-39.43	-76.66	-59.68	2.45	9.70	H
	6930	-50.41	-13	-37.41	-77.32	-58.51	2.61	10.72	H
									H
	3462	-56.32	-13	-43.32	-77.1	-62.56	1.59	7.83	V
	5197	-52.49	-13	-39.49	-76.65	-59.74	2.45	9.70	V
	6930	-50.43	-13	-37.43	-77.34	-58.53	2.61	10.72	V
									V
Highest	3504	-54.07	-13	-41.07	-75.13	-60.47	1.61	8.00	H
	5257	-51.96	-13	-38.96	-76.31	-59.17	2.49	9.70	H
	7010	-49.88	-13	-36.88	-76.85	-58.11	2.59	10.82	H
									H
	3504	-54.17	-13	-41.17	-75.03	-60.57	1.61	8.00	V
	5257	-52.52	-13	-39.52	-76.78	-59.73	2.49	9.70	V
	7010	-49.84	-13	-36.84	-76.87	-58.07	2.59	10.82	V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



**GPRS 1900**

GPRS 1900									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3702	-46.01	-13	-33.01	-67.12	-52.58	1.67	8.24	H
	5550	-42.99	-13	-29.99	-68.4	-50.06	2.65	9.72	H
	7404	-50.71	-13	-37.71	-78.07	-59.86	2.46	11.61	H
									H
	3702	-48.68	-13	-35.68	-69.74	-55.25	1.67	8.24	V
	5550	-35.29	-13	-22.29	-60.56	-42.36	2.65	9.72	V
	7404	-48.91	-13	-35.91	-76.29	-58.06	2.46	11.61	V
									V
Middle	3762	-54.42	-13	-41.42	-75.48	-61.05	1.69	8.31	H
	5640	-39.72	-13	-26.72	-65.31	-46.77	2.71	9.76	H
	7518	-49.72	-13	-36.72	-77.22	-59.11	2.42	11.81	H
									H
	3762	-52.74	-13	-39.74	-73.76	-59.37	1.69	8.31	V
	5640	-33.31	-13	-20.31	-58.85	-40.36	2.71	9.76	V
	7518	-48.68	-13	-35.68	-76.38	-58.07	2.42	11.81	V
									V
Highest	3822	-53.64	-13	-40.64	-74.66	-60.32	1.71	8.39	H
	5730	-40.42	-13	-27.42	-66.26	-47.45	2.76	9.79	H
	7638	-47.54	-13	-34.54	-75.3	-57.04	2.38	11.88	H
									H
	3822	-50.91	-13	-37.91	-71.91	-57.59	1.71	8.39	V
	5730	-35.18	-13	-22.18	-60.99	-42.21	2.76	9.79	V
	7638	-44.04	-13	-31.04	-72.16	-53.54	2.38	11.88	V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA 1900

WCDMA 1900									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3708	-55.85	-13	-42.85	-76.99	-62.43	1.67	8.25	H
	5562	-52.72	-13	-39.72	-78.16	-59.78	2.66	9.72	H
	7416	-50.68	-13	-37.68	-78.03	-59.86	2.46	11.63	H
									H
	3708	-56.24	-13	-43.24	-77.35	-62.82	1.67	8.25	V
	5562	-52.63	-13	-39.63	-78.07	-59.69	2.66	9.72	V
	7416	-50.63	-13	-37.63	-78.19	-59.81	2.46	11.63	V
									V
Middle	3756	-56.07	-13	-43.07	-77.17	-62.69	1.68	8.31	H
	5640	-52.06	-13	-39.06	-77.65	-59.11	2.71	9.76	H
	7518	-50.18	-13	-37.18	-77.73	-59.57	2.42	11.81	H
									H
	3756	-56.44	-13	-43.44	-77.53	-63.06	1.68	8.31	V
	5640	-52.03	-13	-39.03	-77.6	-59.08	2.71	9.76	V
	7518	-49.83	-13	-36.83	-77.58	-59.22	2.42	11.81	V
									V
Highest	3816	-55.29	-13	-42.29	-76.23	-61.97	1.70	8.38	H
	5724	-51.51	-13	-38.51	-77.36	-58.55	2.75	9.79	H
	7632	-48.68	-13	-35.68	-76.51	-58.17	2.39	11.88	H
									H
	3816	-56.43	-13	-43.43	-77.5	-63.11	1.70	8.38	V
	5724	-52.01	-13	-39.01	-77.83	-59.05	2.75	9.79	V
	7632	-48.51	-13	-35.51	-76.51	-58	2.39	11.88	V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



<Aux. Ant.>

**GPRS850**

GPRS 850									
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1648	-52.33	-13	-39.33	-64.52	-54.09	0.98	4.89	H
	2472	-50.28	-13	-37.28	-67.66	-52.16	1.28	5.32	H
	3296	-57.66	-13	-44.66	-77.14	-61.07	1.54	7.10	H
									H
	1648	-54.23	-13	-41.23	-66.89	-55.99	0.98	4.89	V
	2472	-52.17	-13	-39.17	-69.98	-54.05	1.28	5.32	V
	3296	-57.71	-13	-44.71	-77.5	-61.12	1.54	7.10	V
									V
Middle	1672	-53.28	-13	-40.28	-65.77	-54.96	0.99	4.82	H
	2512	-49.57	-13	-36.57	-67.03	-51.54	1.29	5.41	H
	3344	-57.88	-13	-44.88	-77.61	-61.49	1.56	7.31	H
									H
	1672	-54.89	-13	-41.89	-67.84	-56.57	0.99	4.82	V
	2512	-53.94	-13	-40.94	-71.86	-55.91	1.29	5.41	V
	3344	-56.97	-13	-43.97	-76.94	-60.58	1.56	7.31	V
									V
Highest	1696	-53.61	-13	-40.61	-66.24	-55.21	1.00	4.75	H
	2544	-46.39	-13	-33.39	-63.87	-48.37	1.30	5.44	H
	3392	-57.64	-13	-44.64	-77.63	-61.44	1.57	7.52	H
									H
	1696	-54.58	-13	-41.58	-67.66	-56.18	1.00	4.75	V
	2544	-53.08	-13	-40.08	-71.05	-55.06	1.30	5.44	V
	3392	-57.56	-13	-44.56	-77.64	-61.36	1.57	7.52	V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA 850

WCDMA 850									
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1648	-61.11	-13	-48.11	-73.31	-62.87	0.98	4.89	H
	2472	-58.96	-13	-45.96	-76.35	-60.84	1.28	5.32	H
	3296	-57.78	-13	-44.78	-77.25	-61.19	1.54	7.10	H
									H
	1648	-62.29	-13	-49.29	-74.95	-64.05	0.98	4.89	V
	2472	-58.48	-13	-45.48	-76.29	-60.36	1.28	5.32	V
	3296	-57.68	-13	-44.68	-77.47	-61.09	1.54	7.10	V
									V
Middle	1672	-61.84	-13	-48.84	-74.38	-63.52	0.99	4.82	H
	2512	-59.17	-13	-46.17	-76.62	-61.14	1.29	5.41	H
	3344	-57.88	-13	-44.88	-77.6	-61.49	1.56	7.31	H
									H
	1672	-62.19	-13	-49.19	-75.17	-63.87	0.99	4.82	V
	2512	-58.94	-13	-45.94	-76.86	-60.91	1.29	5.41	V
	3344	-57.67	-13	-44.67	-77.6	-61.28	1.56	7.31	V
									V
Highest	1696	-62.64	-13	-49.64	-75.26	-64.24	1.00	4.75	H
	2544	-59.06	-13	-46.06	-76.54	-61.04	1.30	5.44	H
	3392	-57.53	-13	-44.53	-77.5	-61.33	1.57	7.52	H
									H
	1696	-62.22	-13	-49.22	-75.29	-63.82	1.00	4.75	V
	2544	-58.51	-13	-45.51	-76.48	-60.49	1.30	5.44	V
	3392	-57.62	-13	-44.62	-77.68	-61.42	1.57	7.52	V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.