

Report No. : E5/2019/C0017 Page: 1 of 261

SAR TEST REPORT



The following samples were submitted and identified on behalf of the client as:

Equipment Under Test	Smart phone
Company Name	Sharp Corporation, Mobile Communication B.U.
Company Address	2-13-1, Hachihonmatsu-Iida, Higashi-hiroshima-shi, Hiroshima, 739-0192, Japan
Standards	IEEE/ANSI C95.1-1992, IEEE 1528-2013,
	KDB248227D01v02r02,KDB865664D01v01r04,
	KDB865664D02v01r02,KDB941225D01v03r01,
	KDB941225D06v02r01,KDB447498D01v06,
	KDB648474D04v01r03,KDB941225D05v02r05,
	KDB941225D05Av01r02
FCC ID	APYHRO00282
Date of Receipt	Dec. 23, 2019
Date of Test(s)	Jan. 05, 2020 ~ Jan. 15, 2020
Date of Issue	Feb. 13, 2020
	IT as we will a distribution of a second and a second fixed with a second

In the configuration tested, the EUT complied with the standards specified above.

Remarks:

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Taiwan Electronic & Communication Laboratory or testing done by SGS Taiwan Electronic & Communication Laboratory in connection with distribution or use of the product described in this report must be approved by SGS Taiwan Electronic & Communication Laboratory in writing.

Signed on behalf of SGS

Clerk / Ruby Ou	Engineer / Bond Tsai	Asst. Manager / John Yeh
Kuby Ou	Bonditrai	John Teh
		Date: Feb. 13. 2020

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⁹⁰天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

f (886-2) 2298-0488

www.tw.sas.com

Member of SGS Group



Report No. : E5/2019/C0017 Page: 2 of 261

	Highest SAR Summary					
Equipment class	Frequency Band	Head (Separation 0mm)	Body-worn (Separation 10mm)	Hotspot (Separation 10mm)	product specific 10g- SAR (Separation 0 mm)	Highest Simultaneous Transmission 1g SAR(W/Kg)
				1g SAR(W/Ko	g)	
Licensed	LTE Band 7	0.18	0.58	1.05	-	
DTS	2.4GHz WLAN	0.17	0.12	0.12	-	1.11
NII	5GHz WLAN	0.54	0.14	0.11	0.28	1.11
DSS	Bluetooth	0.08	0.04	-	0.14	
Date	Date of Testing 2020/1/5~2020/1/15					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd. t (886-2) 2299-3279



Report No. : E5/2019/C0017 Page: 3 of 261

Revision History

Report Number	Revision	Description	Issue Date
E5/2019/C0017	Rev.00	Initial creation of document	Feb. 13, 2020

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

f (886-2) 2298-0488



Report No. : E5/2019/C0017 Page: 4 of 261

Contents

1. General Information	5
1.1 Testing Laboratory	5
1.2 Details of Applicant	5
1.3 Description of EUT	6
1.3.1 LTE Downlink CA specification	111
1.4 Test Environment	113
1.5 Operation Description	113
1.6 Positioning Procedure	118
1.7 Evaluation Procedures	120
1.8 Probe Calibration Procedures	122
1.9 The SAR Measurement System	125
1.10 System Components	127
1.11 SAR System Verification	129
1.12 Tissue Simulant Fluid for the Frequency Band	131
1.13 Test Standards and Limits	134
2. Summary of Results	
2.1 Decision rules	
2.2 Summary of Results	136
2.3 Reporting statements of conformity	149
3. Simultaneous Transmission Analysis	150
3.1 Estimated SAR calculation	151
3.2 SPLSR evaluation and analysis	151
4. Instruments List	182
5. Measurements	
6. SAR System Performance Verification	
7. Uncertainty Budget	
Appendixes	
E52019C0017 SAR_Appendix A Photographs	
E52019C0017 SAR_Appendix B DAE & Probe Cal. Certificate	
E52019C0017 SAR_Appendix C Phantom Description & Dipole Cal. Certificate	261

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



1. General Information

1.1 Testing Laboratory

SGS Taiwan Ltd. Electronics & Communication Laboratory		
No. 2, Keji 1st Rd., Guishan Township, Taoyuan County, 33383, Taiwan		
Tel	+886-2-2299-3279	
ax +886-2-2298-0488		
Internet	nternet http://www.tw.sgs.com/	

1.2 Details of Applicant

Company Name	Sharp Corporation, Mobile Communication B.U.
	2-13-1, Hachihonmatsu-Iida, Higashi-hiroshima-shi, Hiroshima, 739-0192, Japan

1.2.1 Details of Manufacturer

Company Name	Sharp Corporation
Company Address	1 Takumi-cho, Sakai-ku, Sakai City,Osaka 590-8522,Japan

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.

台灣檢驗科技股份有限公司 t (886-2) 2299-3279 f (886-2) 2298-0488

Member of SGS Group



1.3 Description of EUT

EUT Name	Smart phone					
FCC ID	APYHRO00282					
Mode of Operation	HSDPA HSUPA LTE FDD LTE TDD					
	WLAN802.11 a/b/g/n/ac/ax(20M/40M/80M)					
	GSM (DTM multi class B)	1/8.3				
	GPRS (support multi class 12 max)	1/2 (1Dn4UP) 1/2.76 (1Dn3UP) 1/4.1 (1Dn2UP) 1/8.3 (1Dn1UP)				
Duty Cycle	LTE FDD	1				
	LTE TDD	0.633				
	WCDMA	1				
	WLAN802.11a/b/g/n/ac/ax	1				
	(20M/40M/80M)	'				
	Bluetooth	1				
	GSM850	824 — 849				
	GSM1900	1850 — 1910				
	WCDMA Band II	1850 — 1910				
	WCDMA Band IV	1710 — 1755				
	WCDMA Band V	824 — 849				
	LTE FDD Band 2	1850 — 1910				
	LTE FDD Band 4	1710 — 1755				
TX Frequency Range	LTE FDD Band 5	824 — 849				
(MHz)	LTE FDD Band 7	2500 — 2570				
	LTE FDD Band 12	699 — 716				
	LTE FDD Band 13	777 — 787				
	LTE FDD Band 17	704 — 716				
	LTE TDD Band 38	2570 — 2620				
	LTE TDD Band 41	2496 — 2690				
	WiFi 2.4GHz	2400 — 2462				
	WiFi 5GHz	5150 — 5825				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No. : E5/2019/C0017 Page: 7 of 261

TX Frequency Range (MHz)	Bluetooth	2402	_	2480
	GSM850	128	—	251
	GSM1900	512	—	810
	WCDMA Band II	9262	—	9538
	WCDMA Band IV	1312	_	1513
	WCDMA Band V	4132	_	4233
	LTE FDD Band 2	18607	_	19193
	LTE FDD Band 4	19957	_	20393
	LTE FDD Band 5	20407	_	20643
Channel Number (ARFCN)	LTE FDD Band 7	20775	_	21425
	LTE FDD Band 12	23017	_	23173
	LTE FDD Band 13	23205	_	23255
	LTE FDD Band 17	23755	_	23825
	LTE TDD Band 38	37775	_	38225
	LTE TDD Band 41	39675	_	41565
	WiFi 2.4GHz	1	_	11
	WiFi 5GHz	36	_	165
	Bluetooth	0	_	78

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

f (886-2) 2298-0488

www.tw.sgs.com

Member of SGS Group



WWAN

Max. SAR (1-g) (Unit: W/Kg)					
Mode	Band	Measured	Reported	Position / Channel	
	GSM 850	0.05	0.06	□Left ⊠Right ⊠Cheek □Tilt <u>128</u> Channel	
	GSM 1900	0.08	0.11	☐Left ☐Right ☐Cheek ☐Tilt 810 Channel	
Head	WCDMA Band II	0.13	0.16	⊠Left ⊡Right ⊠Cheek ⊡Tilt <u>9400</u> Channel	
	WCDMA Band IV	0.08	0.10	⊠Left ⊡Right ⊠Cheek ⊡Tilt <u>1513</u> Channel	
	WCDMA Band V	0.11	0.14	□Left ⊠Right ⊠Cheek □Tilt <u>4183</u> Channel	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's induced of this document is advised information contained reliefor reliefor the company's induced at the time of its intervention only and within the initial contained information contained reliefor reliefor the company's induced at the time of its relieformer and the induced at the time of its client as a structure of the induced at the time of its client as a structure of the company's induced at the time of its client as a structure of the induced at the time of its client as a structure of the its client as a structure of the company's induced at the time of its client as a structure of the time o prosecuted to the fullest extent of the law.

```
www.tw.sgs.com
```



WWAN

Max. SAR (1-g) (Unit: W/Kg)						
Mode	Band	Measured	Reported	Position / Channel		
	LTE FDD Band 2	0.11	0.14	Left Right Cheek Tilt <u>18700</u> Channel		
	LTE FDD Band 4	0.08	0.10	⊠Left ⊡Right ⊠Cheek ⊡Tilt <u>20300</u> Channel		
	LTE FDD Band 5	0.09	0.12	☐Left ⊠Right ⊠Cheek ☐Tilt <u>20525</u> Channel		
	LTE FDD Band 7	0.15	0.18	Left Right Cheek Tilt <u>21350</u> Channel		
Head	LTE FDD Band 12	0.10	0.14	□Left ⊠Right ⊠Cheek □Tilt 23095 Channel		
	LTE FDD Band 13	0.04	0.05	☐Left ⊠Right ⊠Cheek ☐Tilt <u>23230</u> Channel		
	LTE FDD Band 17	0.10	0.14	☐Left ⊠Right ⊠Cheek ☐Tilt <u>23790</u> Channel		
	LTE TDD Band 38	0.07	0.08	⊠Left ⊡Right ⊠Cheek ⊡Tilt <u>38000</u> Channel		
	LTE TDD Band 41	0.06	0.07	□Left □Right □Cheek □Tilt 41490 Channel		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's induced of this document is advised information contained reliefor reliefor the company's induced at the time of its intervention only and within the initial contained information contained reliefor reliefor the company's induced at the time of its relieformer and the induced at the time of its client as a structure of the induced at the time of its client as a structure of the company's induced at the time of its client as a structure of the induced at the time of its client as a structure of the its client as a structure of the company's induced at the time of its client as a structure of the time o prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

f (886-2) 2298-0488



WLAN Antenna 0

Max. SAR (1-g) (Unit: W/Kg)							
Mode	Band	Position / Channel					
	WLAN802.11 b	0.16	0.17	⊠Left ⊡Right ⊠Cheek ⊡Tilt <u>10</u> Channel			
	WLAN802.11ac(80M)5.2G	0.18	0.18	∐Left ☐Right ⊠Cheek ☐Tilt <u>42</u> Channel			
lleed	WLAN802.11ac(80M)5.3G	0.19	0.20	⊠Left ⊡Right ⊠Cheek ⊡Tilt <u>58</u> Channel			
Head	WLAN802.11ac(80M)5.6G	0.52	0.54	∐Left			
	WLAN802.11ac(80M)5.8G	0.49	0.50	⊠Left ⊡Right ⊠Cheek ⊡Tilt <u>155 C</u> hannel			
	Bluetooth	0.06	0.08	∐Left ☐Right ⊠Cheek ☐Tilt <u>39</u> Channel			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

```
www.tw.sgs.com
```



WLAN Antenna 1

Max. SAR (1-g) (Unit: W/Kg)							
Mode	Band	Position / Channel					
	WLAN802.11 b	0.07	0.07	□Left ⊠Right ⊠Cheek □Tilt <u>11 Channel</u>			
	WLAN802.11ac(80M)5.2G	0.16	0.18	☐Left ⊠Right ⊠Cheek ☐Tilt <u>42</u> Channel			
Head	WLAN802.11ac(80M)5.3G	0.18	0.19	□Left ⊠Right ⊠Cheek □Tilt <u>58</u> Channel			
	WLAN802.11ac(80M)5.6G	0.16	0.17	□Left ⊠Right ⊠Cheek □Tilt <u>138</u> Channel			
	WLAN802.11ac(80M)5.8G	0.18	0.19	□Left ⊠Right ⊠Cheek □Tilt <u>155</u> Channel			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



WWAN

Max. SAR (1-g) (Unit: W/Kg)						
Mode	Band	Measured	Reported	Position / Channel		
	GSM 850	0.17	0.22	□Front ⊠Back <u>128</u> Channel		
	GSM 1900	0.20	0.28	☐Front ⊠Back <u>810</u> Channel		
	WCDMA Band II	0.33	0.40	☐Front ⊠Back <u>9400</u> Channel		
	WCDMA Band IV	0.20	0.25	☐Front ⊠Back <u>1513</u> Channel		
	WCDMA Band V	0.37	0.48	☐Front ⊠Back <u>4183</u> Channel		
	LTE FDD Band 2	0.29	0.36	☐Front ⊠Back <u>18700</u> Channel		
Body-worn	LTE FDD Band 4	0.19	0.24	☐Front ⊠Back <u>20300</u> Channel		
	LTE FDD Band 5	0.27	0.36	☐Front ⊠Back <u>20525</u> Channel		
	LTE FDD Band 7	0.49	0.58	□Front ⊠Back 21350 Channel		
	LTE FDD Band 12	0.31	0.42	☐Front ⊠Back <u>23095</u> Channel		
	LTE FDD Band 13	0.10	0.13	Front Back <u>23230</u> Channel		
	LTE FDD Band 17	0.31	0.42	Front Back <u>23790</u> Channel		
	LTE TDD Band 38	0.21	0.25	Front ⊠Back <u>38000</u> Channel		
	LTE TDD Band 41	0.17	0.20	Front Back <u>41490</u> Channel		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd. t (886-2) 2299-3279



WLAN Antenna 0

Max. SAR (1-g) (Unit: W/Kg)							
Mode	Band Measured Reported Position / C						
	WLAN802.11 b	0.06	0.06	☐Front ⊠Back <u>10</u> Channel			
	WLAN802.11ac(80M)5.2G	0.12	0.12	☐Front ⊠Back <u>42</u> Channel			
Body worn	WLAN802.11ac(80M)5.3G	0.09	0.09	☐Front ⊠Back <u>58</u> Channel			
Body-worn	WLAN802.11ac(80M)5.6G	0.10	0.10	☐Front ⊠Back <u>138</u> Channel			
	WLAN802.11ac(80M)5.8G	0.11	0.11	☐Front ⊠Back <u>155</u> Channel			
	Bluetooth	0.03	0.04	☐Front ⊠Back <u>39</u> Channel			

WLAN Antenna 1

Max. SAR (1-g) (Unit: W/Kg)						
Mode	Band Measured Reported Position / Ch					
	WLAN802.11 b	0.12	0.12	☐Front ⊠Back Channel		
	WLAN802.11ac(80M)5.2G	0.12	0.14	☐Front ⊠Back <u>42</u> Channel		
Body-worn	WLAN802.11ac(80M)5.3G	0.13	0.14	☐Front ⊠Back <u>58</u> Channel		
	WLAN802.11ac(80M)5.6G	0.08	0.08	☐Front ⊠Back <u>138</u> Channel		
	WLAN802.11ac(80M)5.8G	0.10	0.11	☐Front ⊠Back <u>155</u> Channel		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



WWAN

	Max. SAR (1-g) (Unit: W/Kg)					
Mode	Band	Measured	Reported	Position / Channel		
	GPRS 850 (1Dn4UP)	0.19	0.23	☐Front ⊠Back ☐Top ☐Right ☐Left ☐Bottom <u>190 Channel</u>		
	GPRS 1900 (1Dn4UP)	0.22	0.33	☐Front ⊠Back ☐Top ☐Right ☐Left ☐Bottom <u>810 </u> Channel		
	WCDMA Band II	0.33	0.40	☐Front ⊠Back ☐Top ☐Right ☐Left ☐Bottom 9400 Channel		
	WCDMA Band IV	0.20	0.25	☐Front ⊠Back ☐Top ☐Right ☐Left ☐Bottom 1513 Channel		
Hotspot mode	WCDMA Band V	0.37	0.48	☐Front ⊠Back ☐Top ☐Right ☐Left ☐Bottom <u>4183</u> Channel		
	LTE FDD Band 2	0.29	0.36	☐Front ⊠Back ☐Top ☐Right ☐Left ☐Bottom <u>18700</u> Channel		
	LTE FDD Band 4	0.19	0.24	☐Front ⊠Back ☐Top ☐Right ☐Left ☐Bottom <u>20300</u> Channel		
	LTE FDD Band 5	0.27	0.36	□Front ⊠Back □Top □Right □Left □Bottom 20525 Channel		
	LTE FDD Band 7	0.86	1.05	☐Front ☐Back ☐Top ☐Right ☐Left ⊠Bottom <u>21100</u> Channel		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

f (886-2) 2298-0488

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 www.tw.sgs.com



WWAN

Max. SAR (1-g) (Unit: W/Kg)					
Mode	Band	Measured	Reported	Position / Channel	
Hotspot mode	LTE FDD Band 12	0.31	0.42	☐Front ⊠Back ☐Top ☐Right ☐Left ☐Bottom <u>23095</u> Channel	
	LTE FDD Band 13	0.10	0.13	<pre> Front ⊠Back Top Right Left Bottom 23230 Channel</pre>	
	LTE FDD Band 17	0.31	0.42	□Front ⊠Back □Top □Right □Left □Bottom 23790 Channel	
	LTE TDD Band 38	0.35	0.42	<pre> Front Back Top Right Left ⊠Bottom 38000 Channel</pre>	
	LTE TDD Band 41	0.31	0.37	☐Front ☐Back ☐Top ☐Right ☐Left ⊠Bottom Channel	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



WLAN Antenna 0

Max. SAR (1-g) (Unit: W/Kg)						
Mode	Band	Measured	Reported	Position / Channel		
Hotspot	WLAN802.11 b 0.06 0.06 Hotspot mode WLAN802.11ac(80M)5.8G 0.11 0.11	0.06	☐Front ⊠Back ☐Top ☐Right ☐Left ☐Bottom Channel			
mode		0.11	☐Front ⊠Back ☐Top ☐Right ☐Left ☐Bottom <u>155 C</u> hannel			

WLAN Antenna 1

Max. SAR (1-g) (Unit: W/Kg)						
Mode	Band	Measured	Reported	Position / Channel		
Hotspot	WLAN802.11 b 0.12	0.12	☐Front ⊠Back ☐Top ☐Right ☐Left ☐Bottom Channel			
mode	WLAN802.11ac(80M)5.8G	0.10	0.11	☐Front ⊠Back ☐Top ☐Right ☐Left ☐Bottom <u>155</u> Channel		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



WLAN Antenna 0

Max. SAR (10 g) (Unit: W/Kg)								
Mode	Band	Band Measured Reported Position / Cha						
Product specific 10-g SAR	Bluetooth(GFSK)	0.11	0.14	Front Back Top Right Left Bottom <u>39</u> Channel				
	WLAN802.11ac(80M)5.2G	0.22	0.22	Front Back Top Right Left Bottom 42 Channel				
	WLAN802.11ac(80M)5.3G	0.24	0.25	Front Back Top Right Left Bottom <u>58</u> Channel				
	WLAN802.11ac(80M)5.6G	0.13	0.13	Front Back Top Right Left Bottom <u>138</u> Channel				

WLAN Antenna 1

Max. SAR (10 g) (Unit: W/Kg)						
Mode	Band Measured Reported Position / Cha					
Product specific 10-g SAR	WLAN802.11ac(80M)5.2G	0.25	0.28	☐Front ⊠Back ☐Top ☐Right ☐Left ☐Bottom <u>42 </u> Channel		
	WLAN802.11ac(80M)5.3G	0.22	0.23	☐Front ⊠Back ☐Top ☐Right ☐Left ☐Bottom <u>58</u> Channel		
	WLAN802.11ac(80M)5.6G	0.14	0.15	☐Front ⊠Back ☐Top ☐Right ☐Left ☐Bottom <u>138 </u> Channel		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



GSM 850 - conducted power table:

EUT mode Frequency (MHz)	Frequency	Max. Rated Avg. Power + Max.Tolerance		Burst average power	Source-based time average power	
	(101112)	(dBm)	Avg. (dBm)	Avg. (dBm)		
0014.050	824.2	128	33.5	32.48	23.45	
GSM 850 (GMSK)	836.6	190	33.5	32.29	23.26	
	848.8	251	33.5	32.28	23.25	
	The division factor compared to the number of TX time slot					
Division factor			1 TX time slot			
				-9.	03	

GPRS 850 - conducted power table:

			Burst avera	age power		
	ted Avg. Pow olerance (dBr		33.5	31.5	29.8	29
			1Dn1UP 1Dn2UP 1Dn		1Dn3UP	1Dn4UP
EUT mode	mode Frequency (MHz) CH		Avg. (dBm)	Avg. (dBm)	Avg. (dBm)	Avg. (dBm)
GPRS	824.2	128	32.48	30.57	28.95	28.13
850	836.6	190	32.29	30.60	29.04	28.15
050	848.8	251	32.28	30.45	28.88	28.05
		Sc	ource-based tim	e average powe	er	
GPRS	824.2	128	23.45	24.55	24.69	25.12
850	836.6	190	23.26	24.58	24.78	25.14
050	848.8	251	23.25	24.43	24.62	25.04
	The div	ision fa	ctor compared	to the number c	of TX time slot	
Div	ision factor		1 TX time slot	2 TX time slot	3 TX time slot	4 TX time slot
			-9.03	-6.02	-4.26	-3.01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

f (886-2) 2298-0488



GSM 1900 - conducted power table:

EUT mode	Frequency (MHz)	СН	Max. Rated Avg. Power + Max.Tolerance	Burst average power	Source-based time average power		
	(11112)		(dBm)	Avg. (dBm)	Avg. (dBm)		
0.014000	1850.2	512	30.5	28.91	19.88		
GSM1900 (GMSK)	1800 661		30.5	28.93	19.90		
	1909.8	810	30.5 29.01		19.98		
	The d	ivision factor	compared to the numb	er of TX time slot			
	Divi	sion factor		1 TX time slot			
	DIM	SIGNIACION		-9.03			

GPRS 1900 - conducted power table:

			Burst avera	age power		
	ted Avg. Pow olerance (dBr		30.5	28.5	27	26
			1Dn1UP	1Dn2UP	1Dn3UP	1Dn4UP
EUT mode	ode Frequency CH		Avg. (dBm)	Avg. (dBm)	Avg. (dBm)	Avg. (dBm)
GPRS	1850.2	512	28.91	26.75	25.04	24.11
1900	1880	661	28.93	26.87	25.15	24.12
1900	1909.8	810	29.01	26.98	25.40	24.29
		Sc	ource-based tim	e average powe	er	
GPRS	1850.2	512	19.88	20.73	20.78	21.10
1900	1880	661	19.90	20.85	20.89	21.11
1900	1909.8	810	19.98	20.96	21.14	21.28
	The div	ision fa	ctor compared	to the number c	of TX time slot	
Div	ision factor		1 TX time slot -9.03	2 TX time slot -6.02	3 TX time slot -4.26	4 TX time slot -3.01
			-3.05	-0.02	-4.20	-0.01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

f (886-2) 2298-0488



WCDMA Band II / Band IV / Band V - HSDPA / HSUPA Conducted power table (Unit: dBm):

	Band		WCDMA II	
	TX Channel	9262	9400	9538
	Frequency (MHz)	1852.4	1880	1907.6
Max. Rated Av	g. Power+Max. Tolerance (dBm)		23.30	
3GPP Rel 99	RMC 12.2Kbps	22.37	22.42	22.33
	HSDPA Subtest-1	21.38	21.47	21.35
3GPP Rel 5	HSDPA Subtest-2	20.88	20.96	20.86
JOFF Rei J	HSDPA Subtest-3	20.86	20.95	20.86
	HSDPA Subtest-4	20.90	20.94	20.83
	HSUPA Subtest-1	21.34	21.38	21.34
	HSUPA Subtest-2	19.35	19.38	19.33
3GPP Rel 6	HSUPA Subtest-3	20.33	20.38	20.35
	HSUPA Subtest-4	19.34	19.44	19.34
	HSUPA Subtest-5	21.35	21.41	21.30

	Band		WCDMA IV	
	TX Channel	1312	1412	1513
	Frequency (MHz)	1712.4	1732.4	1752.6
Max. Rated Av	/g. Power+Max. Tolerance (dBm)		23.30	
3GPP Rel 99	RMC 12.2Kbps	22.27	22.23	22.28
	HSDPA Subtest-1	21.27	21.29	21.30
3GPP Rel 5	HSDPA Subtest-2	20.77	20.77	20.78
JOFT Ref J	HSDPA Subtest-3	20.78	20.74	20.80
	HSDPA Subtest-4	20.76	20.73	20.77
	HSUPA Subtest-1	21.27	21.22	21.29
	HSUPA Subtest-2	19.20	19.25	19.27
3GPP Rel 6	HSUPA Subtest-3	20.20	20.19	20.23
	HSUPA Subtest-4	19.23	19.26	19.29
	HSUPA Subtest-5	21.18	21.22	21.24

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

f (886-2) 2298-0488



	Band		WCDMA V	
	TX Channel	4132	4183	4233
	Frequency (MHz)	826.4	836.6	846.6
Max. Rated Av	/g. Power+Max. Tolerance (dBm)		25.00	
3GPP Rel 99	RMC 12.2Kbps	23.70	23.83	23.75
	HSDPA Subtest-1	22.67	22.62	22.66
3GPP Rel 5	HSDPA Subtest-2	22.20	22.25	22.18
JOFT Ref J	HSDPA Subtest-3	22.14	22.22	22.24
	HSDPA Subtest-4	22.18	22.26	22.23
	HSUPA Subtest-1	22.67	22.78	22.76
	HSUPA Subtest-2	20.71	20.79	20.75
3GPP Rel 6	HSUPA Subtest-3	21.71	21.81	21.74
	HSUPA Subtest-4	20.70	20.78	20.77
	HSUPA Subtest-5	22.68	22.84	20.82

Subtests for WCDMA Release 5 HSDPA

SUB-TEST	β _c	β_d	β _d (SF)	β _c /β _d	β _{HS} (Note1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15	15/15	64	12/15	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Subtests for WCDMA Release 6 HSUPA

SUB-TEST	βc	βd	β₀ (SF)	β _o /β _d	_{βнs} (Note1)	β _{ec}	β _{ed} (Note 5) (Note 6)	β _{ed} (SF)	β _{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15	15/15	64	11/15	22/15	209/225	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β _{ed} 1: 47/15 β _{ed} 2: 47/15	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	15/15	64	15/15	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

f (886-2) 2298-0488




LTE FDD Band 2 / Band 4 / Band 5 / Band 7 / Band 12 / Band 13 / Band 17conducted power table:

				FDD Band 2	2			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)
				1860	18700	22.16	23.3	0
			0	1880	18900	22.19	23.3	0
				1900	19100	22.16	23.3	0
				1860	18700	22.02	23.3	0
		1 RB	50	1880	18900	22.20	23.3	0
				1900	19100	22.07	23.3	0
				1860	18700	22.33	23.3	0
			99	1880	18900	22.17	23.3	0
				1900	19100	22.18	23.3	0
			1860	18700	21.31	22.3	0-1	
	QPSK		0	1880	18900	21.28	22.3	0-1
				1900	19100	21.21	22.3	0-1
				1860	18700	21.30	22.3	0-1
		18 RB	25	1880	18900	21.23	22.3	0-1
				1900	19100	21.30	22.3	0-1
				1860	18700	21.45	22.3	0-1
			50	1880	18900	21.31	22.3	0-1
				1900	19100	21.41	22.3	0-1
				1860	18700	21.42	22.3	0-1
		100	ORB	1880	18900	21.31	22.3	0-1
20				1900	19100	21.19	22.3	0-1
20			0	1860	18700	21.15	22.3	0-1
				1880	18900	21.44	22.3	0-1
				1900	19100	21.54	22.3	0-1
				1860	18700	21.42	22.3	0-1
		1 RB	50	1880	18900	21.71	22.3	0-1
				1900	19100	21.35	22.3	0-1
				1860	18700	21.73	22.3	0-1
			99	1880	18900	21.32	22.3	0-1
				1900	19100	21.71	22.3	0-1
				1860	18700	20.19	21.3	0-2
	16-QAM		0	1880	18900	20.24	21.3	0-2
				1900	19100	20.30	21.3	0-2
				1860	18700	20.36	21.3	0-2
		50 RB	25	1880	18900	20.27	21.3	0-2
				1900	19100	20.38	21.3	0-2
				1860	18700	20.43	21.3	0-2
			50	1880	18900	20.44	21.3	0-2
				1900	19100	20.47	21.3	0-2
				1860	18700	20.35	21.3	0-2
		100	ORB	1880	18900	20.35	21.3	0-2
				1900	19100	20.28	21.3	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





				FDD Band 2	2			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)
				1860	18700	20.25	21.3	0-2
			0	1880	18900	20.63	21.3	0-2
				1900	19100	20.66	21.3	0-2
				1860	18700	20.61	21.3	0-2
		1 RB	50	1880	18900	20.90	21.3	0-2
				1900	19100	20.46	21.3	0-2
			99	1860	18700	20.93	21.3	0-2
				1880	18900	20.48	21.3	0-2
				1900	19100	20.88	21.3	0-2
			0	1860	18700	19.39	20.3	0-3
20	64-QAM			1880	18900	19.40	20.3	0-3
				1900	19100	19.49	20.3	0-3
				1860	18700	19.54	20.3	0-3
		50 RB	25	1880	18900	19.38	20.3	0-3
				1900	19100	19.49	20.3	0-3
				1860	18700	19.59	20.3	0-3
			50	1880	18900	19.56	20.3	0-3
			1900	19100	19.65	20.3	0-3	
			1860	18700	19.46	20.3	0-3	
		100)RB	1880	18900	19.51	20.3	0-3
				1900	19100	19.46	20.3	0-3

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.






				FDD Band 2	2			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)
				1857.5	18675	22.17	23.3	0
			0	1880	18900	22.29	23.3	0
				1902.5	19125	22.25	23.3	0
				1857.5	18675	22.18	23.3	0
		1 RB	36	1880	18900	22.27	23.3	0
				1902.5	19125	22.15	23.3	0
				1857.5	18675	22.12	23.3	0
			74	1880	18900	22.26	23.3	0
				1902.5	19125	22.25	23.3	0
				1857.5	18675	21.14	22.3	0-1
	QPSK		0	1880	18900	21.19	22.3	0-1
				1902.5	19125	21.25	22.3	0-1
				1857.5	18675	21.29	22.3	0-1
		36 RB	18	1880	18900	21.35	22.3	0-1
				1902.5	19125	21.28	22.3	0-1
			37	1857.5	18675	21.36	22.3	0-1
				1880	18900	21.38	22.3	0-1
				1902.5	19125	21.28	22.3	0-1
				1857.5	18675	21.29	22.3	0-1
		75	RB	1880	18900	21.22	22.3	0-1
15			-	1902.5	19125	21.34	22.3	0-1
			0	1857.5	18675	21.45	22.3	0-1
				1880	18900	21.34	22.3	0-1
				1902.5	19125	21.15	22.3	0-1
				1857.5	18675	21.74	22.3	0-1
		1 RB	36	1880	18900	21.40	22.3	0-1
				1902.5	19125	21.33	22.3	0-1
				1857.5	18675	21.41	22.3	0-1
			74	1880	18900	21.87	22.3	0-1
				1902.5	19125	21.26	22.3	0-1
	40.000		_	1857.5	18675	20.23	21.3	0-2
	16-QAM		0	1880	18900	20.24	21.3	0-2
				1902.5	19125	20.16	21.3	0-2
		00 55	10	1857.5	18675	20.39	21.3	0-2
		36 RB	18	1880	18900	20.18	21.3	0-2
				1902.5	19125	20.36	21.3	0-2
			07	1857.5	18675	20.36	21.3	0-2
			37	1880	18900	20.42	21.3	0-2
				1902.5	19125	20.41	21.3	0-2
			חח	1857.5	18675	20.35	21.3	0-2
		/5	RB	1880	18900	20.31	21.3	0-2
				1902.5	19125	20.30	21.3	0-2

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd. t (886-2) 2299-3279


f (886-2) 2298-0488





				FDD Band 2	2			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)
				1857.5	18675	20.55	21.3	0-2
			0	1880	18900	20.51	21.3	0-2
				1902.5	19125	20.27	21.3	0-2
				1857.5	18675	20.92	21.3	0-2
		1 RB	50	1880	18900	20.60	21.3	0-2
				1902.5	19125	20.49	21.3	0-2
				1857.5	18675	20.53	21.3	0-2
			99	1880	18900	21.03	21.3	0-2
				1902.5	19125	20.42	21.3	0-2
			0	1857.5	18675	19.33	20.3	0-3
15	64-QAM			1880	18900	19.39	20.3	0-3
				1902.5	19125	19.27	20.3	0-3
				1857.5	18675	19.54	20.3	0-3
		36 RB	25	1880	18900	19.31	20.3	0-3
				1902.5	19125	19.49	20.3	0-3
				1857.5	18675	19.53	20.3	0-3
			50	1880	18900	19.57	20.3	0-3
			1902.5	19125	19.52	20.3	0-3	
			-	1857.5	18675	19.46	20.3	0-3
		75	RB	1880	18900	19.50	20.3	0-3
				1902.5	19125	19.47	20.3	0-3

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.






				FDD Band 2	2			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)
				1855	18650	22.03	23.3	0
			0	1880	18900	22.06	23.3	0
				1905	19150	22.03	23.3	0
				1855	18650	21.89	23.3	0
		1 RB	25	1880	18900	22.07	23.3	0
				1905	19150	21.94	23.3	0
				1855	18650	22.08	23.3	0
			49	1880	18900	22.04	23.3	0
				1905	19150	22.05	23.3	0
				1855	18650	21.18	22.3	0-1
	QPSK		0	1880	18900	21.15	22.3	0-1
				1905	19150	21.08	22.3	0-1
				1855	18650	21.17	22.3	0-1
		25 RB	12	1880	18900	21.10	22.3	0-1
				1905	19150	21.17	22.3	0-1
				1855	18650	21.32	22.3	0-1
			25	1880	18900	21.18	22.3	0-1
				1905	19150	21.28	22.3	0-1
				1855	18650	21.29	22.3	0-1
		50	RB	1880	18900	21.18	22.3	0-1
10				1905	19150	21.06	22.3	0-1
_				1855	18650	21.02	22.3	0-1
			0	1880	18900	21.31	22.3	0-1
				1905	19150	21.41	22.3	0-1
				1855	18650	21.29	22.3	0-1
		1 RB	25	1880	18900	21.58	22.3	0-1
				1905	19150	21.22	22.3	0-1
				1855	18650	21.60	22.3	0-1
			49	1880	18900	21.19	22.3	0-1
				1905	19150	21.58	22.3	0-1
	40.0414		0	1855	18650	20.06	21.3	0-2
	16-QAM		0	1880	18900	20.11	21.3	0-2
				1905	19150	20.17	21.3	0-2
			10	1855	18650	20.23	21.3	0-2
		25 RB	12	1880	18900	20.14	21.3	0-2
				1905	19150	20.25	21.3	0-2
			25	1855	18650	20.30	21.3	0-2
			25	1880	18900	20.31	21.3	0-2
			<u> </u>	1905	19150	20.34	21.3	0-2
		50	סס	1855	18650	20.22	21.3	0-2
		50	RB	1880	18900	20.22	21.3	0-2
				1905	19150	20.15	21.3	0-2

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.





FDD Band 2															
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)							
				1855	18650	20.04	21.3	0-2							
			0	1880	18900	20.50	21.3	0-2							
			1905	19150	20.50	21.3	0-2								
		4.00			1855	18650	20.47	21.3	0-2						
	1 RB	1 RB	25	1880	18900	20.73	21.3	0-2							
				1905	19150	20.32	21.3	0-2							
				1855	18650	20.78	21.3	0-2							
			49	1880	18900	20.20	21.3	0-2							
				1905	19150	20.65	21.3	0-2							
				1855	18650	19.16	20.3	0-3							
10	64-QAM									0	1880	18900	19.26	20.3	0-3
				1905	19150	19.21	20.3	0-3							
				1855	18650	19.30	20.3	0-3							
		25 RB	12	1880	18900	19.28	20.3	0-3							
				1905	19150	19.41	20.3	0-3							
				1855	18650	19.45	20.3	0-3							
			25	1880	18900	19.40	20.3	0-3							
				1905	19150	19.40	20.3	0-3							
				1855	18650	19.22	20.3	0-3							
		50	RB	1880	18900	19.31	20.3	0-3							
				1905	19150	19.23	20.3	0-3							

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.






				FDD Band 2	2			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)
				1852.5	18625	22.08	23.3	0
			0	1880	18900	21.98	23.3	0
				1907.5	19175	21.88	23.3	0
				1852.5	18625	22.09	23.3	0
		1 RB	12	1880	18900	22.06	23.3	0
				1907.5	19175	21.91	23.3	0
				1852.5	18625	22.00	23.3	0
			24	1880	18900	22.12	23.3	0
				1907.5	19175	21.92	23.3	0
				1852.5	18625	21.07	22.3	0-1
	QPSK	0	1880	18900	21.04	22.3	0-1	
				1907.5	19175	21.09	22.3	0-1
				1852.5	18625	21.18	22.3	0-1
		12 RB	6	1880	18900	21.10	22.3	0-1
		13		1907.5	19175	21.09	22.3	0-1
				1852.5	18625	21.08	22.3	0-1
			13	1880	18900	21.11	22.3	0-1
				1907.5	19175	21.10	22.3	0-1
		25RB		1852.5	18625	21.05	22.3	0-1
				1880 1907.5	18900	21.06	22.3	0-1
5					19175	21.01	22.3	0-1
Ű				1852.5	18625	21.15	22.3	0-1
			0	1880	18900	21.06	22.3	0-1
				1907.5	19175	21.05	22.3	0-1
				1852.5	18625	21.50	22.3	0-1
		1 RB	12	1880	18900	21.60	22.3	0-1
				1907.5	19175	21.12	22.3	0-1
				1852.5	18625	21.14	22.3	0-1
			24	1880	18900	21.51	22.3	0-1
				1907.5	19175	21.22	22.3	0-1
				1852.5	18625	20.11	21.3	0-2
	16-QAM		0	1880	18900	20.02	21.3	0-2
				1907.5	19175	20.02	21.3	0-2
		· • = =		1852.5	18625	20.13	21.3	0-2
		12 RB	6	1880	18900	20.09	21.3	0-2
				1907.5	19175	20.07	21.3	0-2
			40	1852.5	18625	20.17	21.3	0-2
			13	1880	18900	20.01	21.3	0-2
				1907.5	19175	20.10	21.3	0-2
				1852.5	18625	20.16	21.3	0-2
		25	RB	1880	18900	20.05	21.3	0-2
				1907.5	19175	20.14	21.3	0-2

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.


f (886-2) 2298-0488





FDD Band 2										
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)		
				1852.5	18625	20.28	21.3	0-2		
			0	1880	18900	20.20	21.3	0-2		
			1907.5	19175	20.18	21.3	0-2			
		4.00		1852.5	18625	20.68	21.3	0-2		
	1 RB	1 RB	12	1880	18900	20.75	21.3	0-2		
				1907.5	19175	20.28	21.3	0-2		
			24	1852.5	18625	20.14	21.3	0-2		
				1880	18900	20.63	21.3	0-2		
				1907.5	19175	20.23	21.3	0-2		
				1852.5	18625	19.26	20.3	0-3		
5	64-QAM		0	1880	18900	19.09	20.3	0-3		
				1907.5	19175	19.04	20.3	0-3		
				1852.5	18625	19.21	20.3	0-3		
		12 RB	6	1880	18900	19.20	20.3	0-3		
				1907.5	19175	19.20	20.3	0-3		
				1852.5	18625	19.36	20.3	0-3		
			13	1880	18900	19.01	20.3	0-3		
				1907.5	19175	19.25	20.3	0-3		
				1852.5	18625	19.28	20.3	0-3		
		25	RB	1880	18900	19.06	20.3	0-3		
				1907.5	19175	19.24	20.3	0-3		

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.






				FDD Band 2	2			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)
				1851.5	18615	21.95	23.3	0
			0	1880	18900	22.02	23.3	0
				1908.5	19185	21.90	23.3	0
			7	1851.5	18615	21.97	23.3	0
	1 RB	1 RB		1880	18900	21.92	23.3	0
				1908.5	19185	21.91	23.3	0
				1851.5	18615	22.05	23.3	0
			14	1880	18900	22.05	23.3	0
				1908.5	19185	21.97	23.3	0
				1851.5	18615	21.03	22.3	0-1
	QPSK		0	1880	18900	21.07	22.3	0-1
				1908.5	19185	21.04	22.3	0-1
				1851.5	18615	21.14	22.3	0-1
		8 RB	4	1880	18900	21.15	22.3	0-1
				1908.5	19185	21.13	22.3	0-1
			-	1851.5	18615	21.03	22.3	0-1
			7	1880	18900	21.16	22.3	0-1
				1908.5	19185	21.04	22.3	0-1
		(500		1851.5 1880	18615	21.09	22.3	0-1
		15	15RB		18900	21.12	22.3	0-1
3				1908.5	19185	21.11	22.3	0-1
				1851.5	18615	21.07	22.3	0-1
			0	1880	18900	20.92	22.3	0-1
				1908.5	19185	21.53	22.3	0-1
		(55	_	1851.5	18615	20.91	22.3	0-1
		1 RB	7	1880	18900	21.54	22.3	0-1
				1908.5	19185	21.38	22.3	0-1
			14	1851.5	18615	21.46	22.3	0-1
			14	1880 1908.5	18900 19185	21.25 21.17	22.3 22.3	0-1 0-1
				1908.5	18615	20.01	22.3	0-1
	16-QAM		0	1880	18900	20.01	21.3	0-2
			U	1908.5	19185	20.14	21.3	0-2
				1851.5	18615	20.10	21.3	0-2
		8 RB	4	1880	18900	20.19	21.3	0-2
	8 RB	010	т	1908.5	19185	20.22	21.3	0-2
				1851.5	18615	20.09	21.3	0-2
			7	1880	18900	20.03	21.3	0-2
				1908.5	19185	20.14	21.3	0-2
			<u>I</u>	1851.5	18615	20.22	21.3	0-2
		15	RB	1880	18900	20.14	21.3	0-2
				1908.5	19185	20.11	21.3	0-2

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.


f (886-2) 2298-0488





FDD Band 2										
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)		
				1851.5	18615	20.14	21.3	0-2		
			0	1880	18900	20.03	21.3	0-2		
				1908.5	19185	20.68	21.3	0-2		
				1851.5	18615	20.06	21.3	0-2		
		1 RB	7	1880	18900	20.60	21.3	0-2		
				1908.5	19185	20.43	21.3	0-2		
				1851.5	18615	20.61	21.3	0-2		
			14	1880	18900	20.27	21.3	0-2		
				1908.5	19185	20.20	21.3	0-2		
				1851.5	18615	19.21	20.3	0-3		
3	64-QAM		0	1880	18900	19.33	20.3	0-3		
				1908.5	19185	19.34	20.3	0-3		
				1851.5	18615	19.38	20.3	0-3		
		8 RB	4	1880	18900	19.41	20.3	0-3		
				1908.5	19185	19.28	20.3	0-3		
				1851.5	18615	19.28	20.3	0-3		
			7	1880	18900	19.21	20.3	0-3		
			1908.5	19185	19.12	20.3	0-3			
				1851.5	18615	19.29	20.3	0-3		
		15	RB	1880	18900	19.14	20.3	0-3		
				1908.5	19185	19.13	20.3	0-3		

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





				FDD Band 2	2			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)
				1850.7	18607	21.93	23.3	0
			0	1880	18900	21.95	23.3	0
				1909.3	19193	21.90	23.3	0
	1			1850.7	18607	21.92	23.3	0
		1 RB	2	1880	18900	22.01	23.3	0
				1909.3	19193	21.97	23.3	0
				1850.7	18607	21.87	23.3	0
			5	1880	18900	22.02	23.3	0
				1909.3	19193	21.86	23.3	0
				1850.7	18607	21.93	23.3	0
	QPSK		0	1880	18900	21.95	23.3	0
				1909.3	19193	21.93	23.3	0
				1850.7	18607	22.03	23.3	0
		3 RB	2	1880	18900	22.04	23.3	0
				1909.3	19193	21.83	23.3	0
				1850.7	18607	21.93	23.3	0
			3	1880	18900	21.97	23.3	0
				1909.3	19193	21.93	23.3	0
		6RB		1850.7	18607	21.04	22.3	0-1
				1880	18900	21.10	22.3	0-1
1.4				1909.3	19193	21.04	22.3	0-1
				1850.7	18607	21.11	22.3	0-1
			0	1880	18900	21.50	22.3	0-1
				1909.3	19193	20.92	22.3	0-1
				1850.7	18607	21.17	22.3	0-1
		1 RB	2	1880	18900	21.39	22.3	0-1
				1909.3	19193	21.46	22.3	0-1
				1850.7	18607	21.44	22.3	0-1
			5	1880	18900	20.95	22.3	0-1
				1909.3	19193	21.17	22.3	0-1
	40.044			1850.7	18607	21.07	22.3	0-1
	16-QAM		0	1880	18900	21.04	22.3	0-1
				1909.3	19193	20.99	22.3	0-1
		0.00		1850.7	18607	21.14	22.3	0-1
		3 RB	2	1880	18900	20.98	22.3	0-1
				1909.3	19193	21.09	22.3	0-1
			_	1850.7	18607	21.11	22.3	0-1
			3	1880	18900	21.16	22.3	0-1
			<u> </u>	1909.3	19193	21.00	22.3	0-1
		er	סכ	1850.7	18607	20.09	21.3	0-2
		01	RB	1880 1909.3	18900 19193	20.20 20.13	21.3 21.3	0-2
				1909.3	19193	20.13	21.3	0-2


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

台灣檢驗科技股份有限公司

t (886-2) 2299-3279


f (886-2) 2298-0488





FDD Band 2										
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)		
				1850.7	18607	20.30	21.3	0-2		
	1 RB	0	1880	18900	20.57	21.3	0-2			
				1909.3	19193	19.97	21.3	0-2		
			1850.7	18607	20.17	21.3	0-2			
		2	1880	18900	20.53	21.3	0-2			
				1909.3	19193	20.56	21.3	0-2		
				1850.7	18607	20.63	21.3	0-2		
			5	1880	18900	20.13	21.3	0-2		
				1909.3	19193	20.30	21.3	0-2		
				1850.7	18607	20.17	21.3	0-2		
1.4	64-QAM		0	1880	18900	20.21	21.3	0-2		
				1909.3	19193	20.13	21.3	0-2		
				1850.7	18607	20.16	21.3	0-2		
		3 RB	2	1880	18900	20.03	21.3	0-2		
				1909.3	19193	20.22	21.3	0-2		
				1850.7	18607	20.22	21.3	0-2		
			3	1880	18900	20.20	21.3	0-2		
				1909.3	19193	20.15	21.3	0-2		
				1850.7	18607	19.21	20.3	0-3		
		6F	RB	1880	18900	19.30	20.3	0-3		
				1909.3	19193	19.23	20.3	0-3		

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





				FDD Band 4	1			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)
				1720	20050	21.95	23.3	0
			0	1732.5	20175	22.13	23.3	0
				1745	20300	22.27	23.3	0
				1720	20050	21.82	23.3	0
		1 RB	50	1732.5	20175	21.83	23.3	0
				1745	20300	21.96	23.3	0
				1720	20050	21.99	23.3	0
			99	1732.5	20175	22.12	23.3	0
				1745	20300	22.13	23.3	0
				1720	20050	21.20	22.3	0-1
	QPSK		0	1732.5	20175	21.23	22.3	0-1
				1745	20300	21.29	22.3	0-1
				1720	20050	21.27	22.3	0-1
		50 RB	25	1732.5	20175	21.25	22.3	0-1
				1745	20300	21.12	22.3	0-1
				1720	20050	21.28	22.3	0-1
			50	1732.5	20175	21.15	22.3	0-1
				1745	20300	21.15	22.3	0-1
				1720	20050	21.13	22.3	0-1
		100)RB	1732.5	20175	21.25	22.3	0-1
20				1745	20300	21.26	22.3	0-1
-				1720	20050	21.24	22.3	0-1
			0	1732.5	20175	21.51	22.3	0-1
				1745	20300	21.41	22.3	0-1
				1720	20050	21.28	22.3	0-1
		1 RB	50	1732.5	20175	21.14	22.3	0-1
				1745	20300	21.39	22.3	0-1
				1720	20050	21.49	22.3	0-1
			99	1732.5	20175	21.27	22.3	0-1
				1745	20300	21.71	22.3	0-1
				1720	20050	20.21	21.3	0-2
	16-QAM		0	1732.5	20175	20.22	21.3	0-2
				1745	20300	20.29	21.3	0-2
			05	1720	20050	20.32	21.3	0-2
		50 RB	25	1732.5	20175	20.20	21.3	0-2
				1745	20300	20.28	21.3	0-2
			50	1720	20050	20.22	21.3	0-2
			50	1732.5	20175	20.22	21.3	0-2
			<u> </u>	1745	20300	20.28	21.3	0-2
		100)RB	1720 1732.5	20050 20175	20.23 20.30	21.3 21.3	0-2
		100		1732.5	20175	20.30	21.3	0-2
				1740	20300	20.10	21.3	0-2


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

台灣檢驗科技股份有限公司

t (886-2) 2299-3279


f (886-2) 2298-0488





FDD Band 4										
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)		
				1720	20050	20.40	21.3	0-2		
		0	1732.5	20175	20.66	21.3	0-2			
				1745	20300	20.52	21.3	0-2		
				1720	20050	20.46	21.3	0-2		
		1 RB	50	1732.5	20175	20.33	21.3	0-2		
				1745	20300	20.54	21.3	0-2		
			99	1720	20050	20.60	21.3	0-2		
				1732.5	20175	20.39	21.3	0-2		
				1745	20300	20.81	21.3	0-2		
				1720	20050	19.34	20.3	0-3		
20	64-QAM		0	1732.5	20175	19.40	20.3	0-3		
				1745	20300	19.41	20.3	0-3		
				1720	20050	19.48	20.3	0-3		
		50 RB	25	1732.5	20175	19.32	20.3	0-3		
				1745	20300	19.44	20.3	0-3		
				1720	20050	19.34	20.3	0-3		
			50	1732.5	20175	19.41	20.3	0-3		
				1745	20300	19.47	20.3	0-3		
				1720	20050	19.34	20.3	0-3		
		100)RB	1732.5	20175	19.43	20.3	0-3		
				1745	20300	19.33	20.3	0-3		

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.






				FDD Band 4	1			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)
				1717.5	20025	22.01	23.3	0
			0	1732.5	20175	22.06	23.3	0
				1747.5	20325	22.23	23.3	0
				1717.5	20025	21.95	23.3	0
		1 RB	36	1732.5	20175	22.03	23.3	0
				1747.5	20325	22.03	23.3	0
				1717.5	20025	22.04	23.3	0
			74	1732.5	20175	21.94	23.3	0
				1747.5	20325	22.11	23.3	0
				1717.5	20025	21.29	22.3	0-1
	QPSK		0	1732.5	20175	21.15	22.3	0-1
				1747.5	20325	21.28	22.3	0-1
				1717.5	20025	21.20	22.3	0-1
		36 RB	18	1732.5	20175	21.18	22.3	0-1
				1747.5	20325	21.33	22.3	0-1
				1717.5	20025	21.18	22.3	0-1
			37	1732.5	20175	21.24	22.3	0-1
				1747.5	20325	21.27	22.3	0-1
				1717.5	20025	21.21	22.3	0-1
		75	RB	1732.5	20175	21.22	22.3	0-1
15			•	1747.5	20325	21.13	22.3	0-1
				1717.5	20025	21.74	22.3	0-1
			0	1732.5	20175	21.70	22.3	0-1
				1747.5	20325	21.47	22.3	0-1
				1717.5	20025	21.11	22.3	0-1
		1 RB	36	1732.5	20175	21.28	22.3	0-1
				1747.5	20325	21.34	22.3	0-1
			_	1717.5	20025	21.21	22.3	0-1
			74	1732.5	20175	21.35	22.3	0-1
				1747.5	20325	21.55	22.3	0-1
				1717.5	20025	20.24	21.3	0-2
	16-QAM		0	1732.5	20175	20.25	21.3	0-2
				1747.5	20325	20.32	21.3	0-2
		00 55	40	1717.5	20025	20.24	21.3	0-2
	3	36 RB	18	1732.5	20175	20.22	21.3	0-2
				1747.5	20325	20.31	21.3	0-2
			07	1717.5	20025	20.19	21.3	0-2
			37	1732.5	20175	20.24	21.3	0-2
				1747.5	20325	20.26	21.3	0-2
			חח	1717.5	20025	20.26	21.3	0-2
		/5	RB	1732.5	20175	20.27	21.3	0-2
				1747.5	20325	20.27	21.3	0-2

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488


No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.





				FDD Band 4	1			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)
				1717.5	22.51	20.88	21.3	0-2
			0	1732.5	22.58	20.87	21.3	0-2
				1747.5	22.77	20.65	21.3	0-2
				1717.5	22.12	20.31	21.3	0-2
		1 RB	36	1732.5	22.7	20.40	21.3	0-2
				1747.5	22.44	20.49	21.3	0-2
				1717.5	22.42	20.35	21.3	0-2
			74	1732.5	22.7	20.48	21.3	0-2
				1747.5	22.73	20.66	21.3	0-2
				1717.5	21.22	19.42	20.3	0-3
15	64-QAM		0	1732.5	21.38	19.44	20.3	0-3
				1747.5	21.52	19.51	20.3	0-3
				1717.5	21.24	19.37	20.3	0-3
		36 RB	18	1732.5	21.34	19.38	20.3	0-3
				1747.5	21.41	19.44	20.3	0-3
				1717.5	21.25	19.33	20.3	0-3
			37	1732.5	21.29	19.37	20.3	0-3
				1747.5	21.46	19.37	20.3	 Allow ed per 3GPP(dB) 0-2 0-2 0-2 0-2 0-2 0-2 0-2 0-2 0-2 0-3
				1717.5	21.22	19.45	20.3	0-3
		75	RB	1732.5	21.35	19.40	20.3	0-3
				1747.5	21.43	19.45	20.3	0-3

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





				FDD Band 4	1					
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)		
				1715	20000	21.69	23.3	0		
			0	1732.5	20175	21.72	23.3	0		
				1750	20350	22.10	23.3	0		
				1715	20000	21.74	23.3	0		
		1 RB	25	1732.5	20175	21.86	23.3	0		
				1750	20350	21.96	23.3	0		
				1715	20000	21.75	23.3	0		
			49	1732.5	20175	21.83	23.3	0		
				1750	20350	21.91	23.3	0		
				1715	20000	20.99	22.3	0-1		
	QPSK		0	1732.5	20175	20.82	22.3	0-1		
				1750	20350	20.96	22.3	0-1		
				1715	20000	21.00	22.3	0-1		
		25 RB	12	1732.5	20175	21.05	22.3	0-1		
				1750	20350	21.04	22.3	0-1		
				1715	20000	21.02	22.3	0-1		
			25	1732.5	20175	21.00	22.3	0-1		
				1750	20350	21.12	22.3	0-1		
				1715	20000	21.02	22.3	0-1		
		50	RB	1732.5	20175	21.01	22.3	Allow ed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		
10				1750	20350	20.94	22.3	-		
				1715	20000	21.14	22.3	-		
			0	1732.5	20175	21.17	22.3	-		
				1750	20350	21.59	22.3			
				1715	20000	21.48	22.3			
		1 RB	25	1732.5	20175	21.06	22.3	-		
				1750	20350	21.21	22.3			
				1715	20000	20.89	22.3	-		
			49	1732.5	20175	21.05	22.3	-		
				1750	20350	21.27	22.3	-		
				1715	20000	19.90	21.3			
	16-QAM		0	1732.5	20175	19.98	21.3			
				1750	20350	19.98	21.3			
			40	1715	20000	20.07	21.3			
		25 RB	12	1732.5	20175	19.92	21.3			
				1750	20350	20.05	21.3			
			05	1715	20000	20.04	21.3			
			25	1732.5	20175	20.03	21.3			
				1750	20350	19.97	21.3			
		F 0	חח	1715	20000	20.05	21.3			
		50RB		1732.5	20175	20.08	21.3			
				1750	20350	20.06	21.3	0-2		


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488






				FDD Band 4	1			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)
				1715	20000	20.31	21.3	0-2
			0	1732.5	20175	20.32	21.3	0-2
				1750	20350	20.69	21.3	0-2
				1715	20000	20.66	21.3	0-2
		1 RB	25	1732.5	20175	20.23	21.3	0-2
				1750	20350	20.40	21.3	0-2
				1715	20000	20.08	21.3	0-2
			49	1732.5	20175	20.20	21.3	0-2
				1750	20350	20.38	21.3	0-2
				1715	20000	19.04	20.3	0-3
10	64-QAM		0	1732.5	20175	19.16	20.3	0-3
				1750	20350	19.11	20.3	0-3
				1715	20000	19.24	20.3	0-3
		25 RB	12	1732.5	20175	19.08	20.3	0-3
				1750	20350	19.24	20.3	0-3
				1715	20000	19.21	20.3	0-3
			25	1732.5	20175	19.23	20.3	0-3
				1750	20350	19.10	20.3	0-3
				1715	20000	19.17	20.3	Allow ed per 3GPP(dB) 0-2 0-2 0-2 0-2 0-2 0-2 0-2 0-2 0-2 0-2
		50	RB	1732.5	20175	19.28	20.3	0-3
				1750	20350	19.22	20.3	0-3

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


```
www.tw.sgs.com
```





				FDD Band 4	1						
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)			
				1712.5	19975	21.68	23.3	0			
			0	1732.5	20175	21.77	23.3	0			
				1752.5	20375	21.97	23.3	0			
				1712.5	19975	21.89	23.3	0			
		1 RB	12	1732.5	20175	22.07	23.3	0			
				1752.5	20375	21.97	23.3	0			
				1712.5	19975	22.03	23.3	0			
			24	1732.5	20175	21.91	23.3	0			
				1752.5	20375	21.98	23.3	0			
				1712.5	19975	20.99	22.3	0-1			
	QPSK		0	1732.5	20175	20.87	22.3	0-1			
				1752.5	20375	20.97	22.3	0-1			
				1712.5	19975	20.98	22.3	0-1			
		12 RB	6	1732.5	20175	21.04	22.3	0-1			
				1752.5	20375	21.09	22.3	0-1			
				1712.5	19975	20.99	22.3	0-1			
			13	1732.5	20175	20.93	22.3	0-1			
				1752.5	20375	21.08	22.3	0-1			
				1712.5	19975	20.95	22.3	0-1			
		25	RB	1732.5	20175	20.90	22.3	0-1			
5			•	1752.5	20375	21.00	22.3	0 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-			
_				1712.5	19975	21.02	22.3	-			
			0	1732.5	20175	21.29	22.3	-			
				1752.5	20375	21.25	22.3				
				1712.5	19975	21.15	22.3				
		1 RB	12	1732.5	20175	20.97	22.3	-			
				1752.5	20375	21.55	22.3				
				1712.5	19975	21.32	22.3	-			
			24	1732.5	20175	21.03	22.3	-			
				1752.5	20375	21.40	22.3	-			
				1712.5	19975	20.05	21.3				
	16-QAM		0	1732.5	20175	19.88	21.3				
				1752.5	20375	20.06	21.3				
		10 55		1712.5	19975	20.04	21.3	0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-2 0-2 0-2 0-2 0-2 0-2 0-2 0-2 0-2 0-2 0-2 0-2 0-2 0-2 0-2			
		12 RB	6	1732.5	20175	19.97	21.3				
				1752.5	20375	20.11	21.3	0 0			
			40	1712.5	19975	20.06	21.3				
			13	1732.5	20175	20.04	21.3				
				1752.5	20375	20.09	21.3				
		05	חח	1712.5	19975	19.94	21.3				
		25RB		1732.5	20175	20.07	21.3				
				1752.5	20375	19.97	21.3	0-2			


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





				FDD Band 4	1			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)
				1712.5	19975	20.13	21.3	0-2
			0	1732.5	20175	20.44	21.3	0-2
				1752.5	20375	20.36	21.3	0-2
				1712.5	19975	20.29	21.3	0-2
		1 RB	12	1732.5	20175	20.08	21.3	0-2
				1752.5	20375	20.69	21.3	0-2
				1712.5	19975	20.44	21.3	0-2
			24	1732.5	20175	20.21	21.3	0-2
				1752.5	20375	20.51	21.3	0-2
				1712.5	19975	19.22	20.3	0-3
5	64-QAM		0	1732.5	20175	19.01	20.3	0-3
				1752.5	20375	19.21	20.3	0-3
				1712.5	19975	19.21	20.3	0-3
		12 RB	6	1732.5	20175	19.17	20.3	0-3
				1752.5	20375	19.27	20.3	0-3
				1712.5	19975	19.23	20.3	0-3
			13	1732.5	20175	19.17	20.3	0-3
				1752.5	20375	19.20	20.3	0-3
			-	1712.5	19975	19.12	20.3	0-3
		25RB		1732.5	20175	19.18	20.3	0-3
				1752.5	20375	19.16	20.3	0-3

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.






				FDD Band 4	1					
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)		
				1711.5	19965	21.78	23.3	0		
			0	1732.5	20175	21.77	23.3	0		
				1753.5	20385	21.96	23.3	0		
				1711.5	19965	21.89	23.3	0		
		1 RB	7	1732.5	20175	21.93	23.3	0		
				1753.5	20385	21.86	23.3	0		
				1711.5	19965	21.80	23.3	0		
			14	1732.5	20175	21.92	23.3	0		
				1753.5	20385	21.96	23.3	0		
				1711.5	19965	20.94	22.3	0-1		
	QPSK		0	1732.5	20175	20.91	22.3	0-1		
				1753.5	20385	21.04	22.3	-		
				1711.5	19965	20.96	22.3	0-1		
		8 RB	4	1732.5	20175	20.93	22.3	-		
				1753.5	20385	21.05	22.3			
				1711.5	19965	20.98	22.3			
			7	1732.5	20175	20.90	22.3			
				1753.5	20385	20.96	22.3			
				1711.5	19965	20.94	22.3	-		
		15	RB	1732.5	20175	21.01	22.3	0 0		
3				1753.5	20385	21.01	22.3	-		
			0	1711.5	19965	21.04	22.3			
			0	1732.5	20175	21.41	22.3	-		
				1753.5	20385	21.16	22.3	-		
			-	1711.5	19965	20.80	22.3			
		1 RB	7	1732.5 1753.5	20175 20385	21.46 21.46	22.3 22.3	-		
				1753.5 1711.5						
			14	1711.5	19965 20175	21.07 21.47	22.3 22.3			
			14	1753.5	20175	21.47	22.3	-		
				1755.5	19965	20.12	22.3			
	16-QAM		0	1732.5	20175	19.97	21.3			
			Ŭ	1753.5	20175	19.96	21.3			
				1700.0	19965	19.93	21.3			
		8 RB	4	1732.5	20175	19.93	21.3			
				1753.5	20385	20.15	21.3	0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-2		
				1711.5	19965	20.11	21.3			
			7	1732.5	20175	19.97	21.3			
				1753.5	20385	20.15	21.3			
	15R		<u>l</u>	1711.5	19965	19.99	21.3			
		RB	1732.5	20175	20.05	21.3				
				1753.5	20385	20.10	21.3	0-2		

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd. t (886-2) 2299-3279

f (886-2) 2298-0488





				FDD Band 4	1			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)
				1711.5	19965	20.17	21.3	0-2
			0	1732.5	20175	20.58	21.3	0-2
				1753.5	20385	20.35	21.3	0-2
				1711.5	19965	19.99	21.3	0-2
		1 RB	7	1732.5	20175	20.59	21.3	0-2
				1753.5	20385	20.63	21.3	0-2
				1711.5	19965	20.18	21.3	0-2
			14	1732.5	20175	20.63	21.3	0-2
				1753.5	20385	20.52	21.3	0-2
				1711.5	19965	19.27	20.3	0-3
3	64-QAM		0	1732.5	20175	19.08	20.3	0-3
				1753.5	20385	19.07	20.3	0-3
				1711.5	19965	19.08	20.3	0-3
		8 RB	4	1732.5	20175	19.11	20.3	0-3
				1753.5	20385	19.25	20.3	0-3
				1711.5	19965	19.22	20.3	0-3
			7	1732.5	20175	19.14	20.3	0-3
				1753.5	20385	19.26	20.3	0-3
				1711.5	19965	19.18	20.3	0-3
		15RB		1732.5	20175	19.19	20.3	0-3
				1753.5	20385	19.25	20.3	0-3

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No. : E5/2019/C0017 Page: 44 of 261

				FDD Band 4	4				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)	
				1710.7	19957	21.77	23.3	0	
			0	1732.5	20175	21.84	23.3	0	
				1754.3	20393	21.80	23.3	0	
				1710.7	19957	21.83	23.3	0	
		1 RB	2	1732.5	20175	21.77	23.3	0	
				1754.3	20393	21.87	23.3	0	
				1710.7	19957	21.74	23.3	0	
			5	1732.5	20175	21.83	23.3	0	
				1754.3	20393	21.88	23.3	0	
				1710.7	19957	21.76	23.3	0	
	QPSK		0	1732.5	20175	21.80	23.3	0	
				1754.3	20393	21.81	23.3	0	
				1710.7	19957	21.88	23.3	0	
		3 RB	2	1732.5	20175	21.89	23.3	0	
				1754.3	20393	21.92	23.3	0	
				1710.7	19957	21.78	23.3	0	
			3	1732.5	20175	21.79	23.3	0	
				1754.3	20393	21.82	23.3	0	
				1710.7	19957	20.93	22.3	0-1	
		6F	RB	1732.5	20175	20.87	22.3	Allow ed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	
1.4			-	1754.3	20393	20.90	22.3	0-1	
				1710.7	19957	21.03	22.3		
			0	1732.5	20175	21.30	22.3	-	
				1754.3	20393	21.01	22.3		
				1710.7	19957	21.46	22.3	0-1	
		1 RB	2	1732.5	20175	21.10	22.3	-	
				1754.3	20393	20.86	22.3		
				1710.7	19957	21.19	22.3	-	
			5	1732.5	20175	20.93	22.3	-	
				1754.3	20393	21.37	22.3		
				1710.7	19957	20.86	22.3	-	
	16-QAM		0	1732.5	20175	20.83	22.3		
				1754.3	20393	21.07	22.3		
				1710.7	19957	20.93	22.3		
		3 RB	2	1732.5	20175	21.05	22.3		
				1754.3	20393	21.02	22.3		
				1710.7	19957	20.96	22.3	0-1 0-1 0-1 0-1 0-1	
			3	1732.5	20175	21.01	22.3		
				1754.3	20393	20.88	22.3	0 0	
				1710.7	19957	19.98	21.3		
	6RE	RB	1732.5	20175	19.88	21.3			
				1754.3	20393	20.07	21.3	0-2	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd. t (886-2) 2299-3279

f (886-2) 2298-0488

```
www.tw.sgs.com
```

Member of SGS Group





				FDD Band 4	1			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)
				1710.7	19957	20.17	21.3	0-2
			0	1732.5	20175	20.46	21.3	0-2
				1754.3	20393	20.04	21.3	0-2
				1710.7	19957	20.53	21.3	0-2
		1 RB	2	1732.5	20175	20.13	21.3	0-2
				1754.3	20393	19.95	21.3	0-2
				1710.7	19957	20.34	21.3	0-2
			5	1732.5	20175	20.06	21.3	0-2
				1754.3	20393	20.51	21.3	0-2
				1710.7	19957	19.94	21.3	0-2
1.4	64-QAM		0	1732.5	20175	19.97	21.3	0-2
				1754.3	20393	20.15	21.3	0-2
				1710.7	19957	20.00	21.3	0-2
		3 RB	2	1732.5	20175	20.13	21.3	0-2
				1754.3	20393	20.22	21.3	0-2
				1710.7	19957	20.02	21.3	0-2
			3	1732.5	20175	20.19	21.3	0-2
				1754.3	20393	19.91	21.3	0-2
			-	1710.7	19957	19.10	20.3	0-3
		6F	6RB	1732.5	20175	19.01	20.3	0-3
				1754.3	20393	19.22	20.3	0-3

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No. : E5/2019/C0017 Page: 46 of 261


				FDD Band &	5						
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)			
				829	20450	22.47	24	0			
			0	836.5	20525	22.51	24	0			
				844	20600	22.60	24	0			
				829	20450	22.57	24	0			
		1 RB	25	836.5	20525	22.57	24	0			
				844	20600	22.59	24	0			
				829	20450	22.58	24	0			
			49	836.5	20525	22.75	24	0			
				844	20600	22.39	24	0			
				829	20450	21.63	23	0-1			
	QPSK		0	836.5	20525	21.65	23	0-1			
				844	20600	21.62	23	0-1			
				829	20450	21.68	23	0-1			
		25 RB	12	836.5	20525	21.71	23	0-1			
				844	20600	21.69	23	0-1			
				829	20450	21.72	23	0-1			
			25	836.5	20525	21.73	23	0-1			
				844	20600	21.74	23				
				829	20450	21.60	23	0-1			
		50	RB	836.5	20525	21.67	23	Allow ed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0			
10			-	844	20600	21.66	23	0 0 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1			
				829	20450	22.16	23				
			0	836.5	20525	22.05	23				
				844	20600	21.94	23				
				829	20450	21.76	23				
		1 RB	25	836.5	20525	22.06	23				
				844	20600	22.23	23				
				829	20450	22.20	23	-			
			49	836.5	20525	21.94	23				
				844	20600	21.68	23				
				829	20450	20.45	22				
	16-QAM		0	836.5	20525	20.68	22				
				844	20600	20.64	22				
				829	20450	20.84	22				
		25 RB	12	836.5	20525	20.70	22				
				844	20600	20.58	22				
			0.5	829	20450	20.65	22	0-1 0-1 0-1 0-1 0-1 0-1 0-2			
			25	836.5	20525	20.78	22				
				844	20600	20.62	22				
		F.04	ססנ	829	20450	20.73	22				
		500)RB	836.5	20525	20.71	22				
				844	20600	20.67	22	0-2			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

f (886-2) 2298-0488





				FDD Band &	5			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)
				829	20450	21.65	22	0-2
			0	836.5	20525	21.39	22	0-2
				844	20600	21.38	22	0-2
				829	20450	21.11	22	0-2
		1 RB	25	836.5	20525	21.41	22	0-2
				844	20600	21.57	22	0-2
				829	20450	21.51	22	0-2
			49	836.5	20525	21.30	22	0-2
				844	20600	21.17	22	0-2
				829	20450	19.93	21	0-3
10	64-QAM		0	836.5	20525	20.17	21	0-3
				844	20600	19.97	21	0-3
				829	20450	20.32	21	0-3
		25 RB	12	836.5	20525	20.14	21	0-3
				844	20600	19.91	21	0-3
				829	20450	20.11	21	0-3
			25	836.5	20525	20.18	21	0-3
				844	20600	20.01	21	0-3
			_	829	20450	20.23	21	0-3
		500RB		836.5	20525	20.05	21	0-3
				844	20600	20.12	21	0-3

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Report No. : E5/2019/C0017 Page: 48 of 261

				FDD Band &	5				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)	
				826.5	20425	22.57	24	0	
			0	836.5	20525	22.64	24	0	
				846.5	20625	22.65	24	0	
				826.5	20425	22.51	24	0	
		1 RB	12	836.5	20525	22.74	24	0	
				846.5	20625	22.61	24	0	
				826.5	20425	22.51	24	0	
			24	836.5	20525	22.69	24	0	
				846.5	20625	22.60	24	0	
				826.5	20425	21.66	23	0-1	
	QPSK		0	836.5	20525	21.77	23	0-1	
				846.5	20625	21.62	23	0-1	
				826.5	20425	21.66	23	0-1	
		12 RB	6	836.5	20525	21.69	23	0-1	
				846.5	20625	21.60	23	0-1	
				826.5	20425	21.61	23	Allow ed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-2 0-2 0-2 0-2 0-2 0-2 0-2	
			13	836.5	20525	21.72	23		
				846.5	20625	21.55	23		
				826.5	20425	21.58	23	Allow ed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0	
		25	RB	836.5	20525	21.62	23	0-1	
5				846.5	20625	21.50	23	-	
Ū.				826.5	20425	22.24	23	0-1	
			0	836.5	20525	22.25	23	0-1	
				846.5	20625	21.61	23		
				826.5	20425	22.11	23		
		1 RB	12	836.5	20525	22.21	23		
				846.5	20625	22.08	23		
				826.5	20425	21.65	23	-	
			24	836.5	20525	22.25	23		
				846.5	20625	21.78	23		
				826.5	20425	20.67	22		
	16-QAM		0	836.5	20525	20.82	22		
				846.5	20625	20.64	22		
				826.5	20425	20.63	22	0-1 0-2 0-2 0-2 0-2 0-2 0-2 0-2 0-2 0-2 0-2 0-2 0-2	
		12 RB	6	836.5	20525	20.65	22		
				846.5	20625	20.68	22		
				826.5	20425	20.50	22		
			13	836.5	20525	20.72	22		
				846.5	20625	20.61	22		
		05	חח	826.5	20425	20.66	22		
		25F		836.5	20525	20.74	22		
				846.5	20625	20.63	22	0-2	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.





				FDD Band &	5			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)
				826.5	20425	21.65	22	0-2
			0	836.5	20525	21.61	22	0-2
				846.5	20625	21.04	22	0-2
				826.5	20425	21.45	22	0-2
		1 RB	12	836.5	20525	21.57	22	0-2
				846.5	20625	21.45	22	0-2
				826.5	20425	21.01	22	0-2
			24	836.5	20525	21.70	22	0-2
				846.5	20625	21.15	22	0-2
				826.5	20425	20.00	21	0-3
5	64-QAM		0	836.5	20525	20.14	21	0-3
				846.5	20625	20.10	21	0-3
				826.5	20425	19.95	21	0-3
		12 RB	6	836.5	20525	19.97	21	0-3
				846.5	20625	20.16	21	0-3
				826.5	20425	19.95	21	0-3
			13	836.5	20525	20.18	21	0-3
				846.5	20625	20.02	21	0-3
			•	826.5	20425	20.01	21	0-3
		25	RB	836.5	20525	20.10	21	0-3
			846.5	20625	20.11	21	0-3	

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No. : E5/2019/C0017 Page: 50 of 261

				FDD Band &	5					
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)		
				825.5	20415	22.35	24	0		
			0	836.5	20525	22.39	24	0		
				847.5	20635	22.48	24	0		
				825.5	20415	22.45	24	0		
		1 RB	7	836.5	20525	22.45	24	0		
				847.5	20635	22.47	24	0		
				825.5	20415	22.46	24	0		
			14	836.5	20525	22.53	24	0		
				847.5	20635	22.27	24	0		
				825.5	20415	21.51	23	0-1		
	QPSK		0	836.5	20525	21.53	23	0-1		
				847.5	20635	21.50	23	0-1		
				825.5	20415	21.56	23	0-1		
		8 RB	4	836.5	20525	21.59	23	0-1		
				847.5	20635	21.57	23	0-1		
				825.5	20415	21.60	23	0-1		
			7	836.5	20525	21.61	23	0-1		
				847.5	20635	21.62	23			
				825.5	20415	21.48	23			
		15	RB	836.5	20525	21.55	23	Allow ed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		
3				847.5	20635	21.55	23	-		
-			0	825.5	20415	22.04	23			
			0	836.5	20525	21.93	23			
				847.5	20635	21.82	23	-		
				825.5	20415	21.64	23			
		1 RB	7	836.5	20525	21.94	23			
				847.5	20635	22.11	23			
				825.5	20415	22.08	23	-		
			14	836.5	20525	21.82	23			
				847.5	20635	21.56	23			
	40.000			825.5	20415	20.33	22			
	16-QAM		0	836.5	20525	20.56	22			
				847.5	20635	20.52	22			
		סם ס		825.5	20415	20.72	22	0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1		
		8 RB	4	836.5 847.5	20525 20635	20.58	22			
				847.5 825.5	20635	20.46 20.53	22 22	3GPP(dB) 0		
			7	825.5 836.5	20415	20.53	22			
				836.5 847.5	20525	20.66	22			
				847.5 825.5		20.50	22			
		16	PB	825.5 836.5	20415 20525	20.61	22			
		15RB		836.5 847.5	20525	20.59	22			
					20035	20.55	22	0-2		


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279

```
f (886-2) 2298-0488
```





				FDD Band &	5			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)
				825.5	20415	21.52	22	0-2
			0	836.5	20525	21.40	22	0-2
				847.5	20635	21.17	22	0-2
				825.5	20415	21.07	22	0-2
		1 RB	7	836.5	20525	21.27	22	0-2
				847.5	20635	21.48	22	0-2
				825.5	20415	21.55	22	0-2
			14	836.5	20525	21.18	22	0-2
				847.5	20635	20.95	22	0-2
				825.5	20415	19.82	21	0-3
3	64-QAM		0	836.5	20525	20.04	21	0-3
				847.5	20635	19.91	21	0-3
				825.5	20415	20.05	21	0-3
		8 RB	4	836.5	20525	20.04	21	0-3
				847.5	20635	19.79	21	0-3
				825.5	20415	20.01	21	0-3
			7	836.5	20525	20.01	21	Allow ed per 3GPP(dB) 0-2 0-2 0-2 0-2 0-2 0-2 0-2 0-2 0-2 0-2
				847.5	20635	19.84	21	0-3
			-	825.5	20415	20.06	21	0-3
		15	RB	836.5	20525	19.92	21	0-3
				847.5	20635	19.94	21	0-3

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No. : E5/2019/C0017 Page: 52 of 261


				FDD Band &	5							
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)				
				824.7	20407	22.46	24	0				
			0	836.5	20525	22.51	24	0				
				848.3	20643	22.50	24	0				
				824.7	20407	22.51	24	0				
		1 RB	2	836.5	20525	22.57	24	0				
				848.3	20643	22.54	24	0				
				824.7	20407	22.50	24	0				
			5	836.5	20525	22.54	24	0				
				848.3	20643	22.36	24	0				
				824.7	20407	22.49	24	0				
	QPSK		0	836.5	20525	22.49	24					
				848.3	20643	22.46	24	0				
				824.7	20407	22.54	24	0				
		3 RB	2	836.5	20525	22.62	24	0				
				848.3	20643	22.51	24	0				
				824.7	20407	22.51	24	0				
			3	836.5	20525	22.58	24	0				
				848.3	20643	22.48	24					
				824.7	20407	21.55	23	0-1				
		61	RB	836.5	20525	21.60	23	Allow ed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
1.4				848.3	20643	21.50	23	0-1 0-1 0-1 0-1				
				824.7	20407	21.91	23					
			0	836.5	20525	21.71	23					
				848.3	20643	21.48	23					
				824.7	20407	21.65	23					
		1 RB	2	836.5	20525	21.92	23					
				848.3	20643	21.94	23					
				824.7	20407	22.10	23	-				
			5	836.5	20525	22.12	23					
				848.3	20643	21.98	23					
				824.7	20407	21.61	23					
	16-QAM		0	836.5	20525	21.56	23					
				848.3	20643	21.57	23					
		0.55		824.7	20407	21.58	23					
		3 RB	2	836.5	20525	21.61	23					
				848.3	20643	21.59	23	0 0				
				824.7	20407	21.67	23					
			3	836.5	20525	21.54	23					
				848.3	20643	21.60	23					
		-	חר	824.7	20407	20.77	22					
		6RB		836.5 848.3	20525	20.57	22					
			[20643	20.55	22	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

f (886-2) 2298-0488





	FDD Band 5											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)				
				824.7	20407	21.30	22	0-2				
			0	836.5	20525	21.03	22	0-2				
				848.3	20643	20.83	22	0-2				
				824.7	20407	20.95	22	0-2				
		1 RB	2	836.5	20525	21.35	22	0-2				
				848.3	20643	21.39	22	0-2				
				824.7	20407	21.55	22	0-2				
			5	836.5	20525	21.57	22	0-2				
				848.3	20643	21.37	22	0-2				
				824.7	20407	21.04	22	0-2				
1.4	64-QAM		0	836.5	20525	20.88	22	0-2				
				848.3	20643	21.06	22	0-2				
				824.7	20407	21.00	22	0-2				
		3 RB	2	836.5	20525	20.92	22	0-2				
				848.3	20643	20.97	22	0-2				
				824.7	20407	21.06	22	0-2				
			3	836.5	20525	20.96	22	0-2				
				848.3	20643	20.94	22	0-2				
			-	824.7	20407	20.21	21	0-3				
		6F	RB	836.5	20525	20.04	21	Allow ed per 3GPP(dB) 0-2 0-2 0-2 0-2 0-2 0-2 0-2 0-2 0-2 0-2				
				848.3	20643	19.85	21	0-3				

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No. : E5/2019/C0017 Page: 54 of 261

FDD Band 7											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)			
				2510	20850	22.96	24	0			
			0	2535	21100	22.93	24	0			
				2560	21350	22.95	24	0			
				2510	20850	23.11	24	0			
		1 RB	50	2535	21100	22.98	24	0			
				2560	21350	23.02	24	0			
				2510	20850	23.17	24	0			
			99	2535	21100	23.14	24	0			
				2560	21350	23.24	24	0			
				2510	20850	22.23	23	0-1			
	QPSK		0	2535	21100	22.19	23	0-1			
				2560	21350	22.12	23	0-1			
				2510	20850	22.34	23	0-1			
		50 RB	25	2535	21100	22.13	23	0-1			
				2560	21350	22.25	23	-			
				2510	20850	22.27	23	Allow ed per 3GPP(dB) 0			
			50	2535	21100	22.32	23				
				2560	21350	22.30	23	0-1			
				2510	20850	22.33	23	0-1			
		100	ORB	2535	21100	22.16	23	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$			
20				2560	21350	22.25	23				
				2510	20850	22.44	23	-			
			0	2535	21100	22.02	23				
				2560	21350	22.58	23	-			
				2510	20850	22.70	23				
		1 RB	50	2535	21100	22.26	23				
				2560	21350	22.59	23	-			
				2510	20850	22.52	23				
			99	2535	21100	22.31	23				
				2560	21350	22.78	23				
				2510	20850	21.17	22				
	16-QAM		0	2535	21100	21.12	22				
				2560	21350	21.10	22				
				2510	20850	21.27	22				
		50 RB	25	2535	21100	21.21	22				
				2560	21350	21.41	22				
			50	2510	20850	21.40	22				
			50	2535	21100	21.35	22				
				2560	21350	21.28	22				
				2510	20850	21.34	22				
	100F	JKB	2535	21100	21.13	22					
				2560	21350	21.32	22	0-2			


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279

f (886-2) 2298-0488





	FDD Band 7											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)				
				2510	20850	21.63	22	0-2				
			0	2535	21100	21.14	22	0-2				
				2560	21350	21.73	22	0-2				
				2510	20850	21.84	22	0-2				
		1 RB	50	2535	21100	21.39	22	0-2				
				2560	21350	21.62	22	0-2				
				2510	20850	21.70	22	0-2				
			99	2535	21100	21.39	22	0-2				
				2560	21350	21.90	22	0-2				
				2510	20850	20.27	21	0-3				
20	64-QAM		0	2535	21100	20.12	21	0-3				
				2560	21350	20.27	21	0-3				
				2510	20850	20.32	21	0-3				
		50 RB	25	2535	21100	20.22	21	0-3				
				2560	21350	20.56	21	0-3				
				2510	20850	20.46	21	0-3				
			50	2535	21100	20.52	21	0-3				
				2560	21350	20.42	21	0-3				
			-	2510	20850	20.44	22 22 22 22 21	0-3				
		100	RB	2535	21100	20.17	21	0-3				
				2560	21350	20.37	21	0-3				

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No. : E5/2019/C0017 Page: 56 of 261

				FDD Band	7						
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)			
				2507.5	20825	22.97	24	0			
			0	2535	21100	22.99	24	0			
				2562.5	21375	22.61	24	0			
				2507.5	20825	23.04	24	0			
		1 RB	36	2535	21100	23.16	24	0			
				2562.5	21375	22.67	24	0			
				2507.5	20825	23.21	24	0			
			74	2535	21100	23.13	24	0			
				2562.5	21375	22.94	24	0			
				2507.5	20825	22.24	23	0-1			
	QPSK		0	2535	21100	22.16	23	0-1			
				2562.5	21375	21.94	23	0-1			
				2507.5	20825	22.28	23	0-1			
		36 RB	18	2535	21100	22.20	23	0-1			
				2562.5	21375	21.89	23	0-1			
				2507.5	20825	22.34	23	0-1			
			37	2535	21100	22.27	23	0-1			
				2562.5	21375	22.20	23	0-1			
				2507.5	20825	22.25	23	0-1			
		75	RB	2535	21100	22.20	23	0 0 0 0 0-1			
15				2562.5	21375	21.96	23				
				2507.5	20825	22.31	23				
			0	2535	21100	22.53	23	-			
				2562.5	21375	22.39	23	-			
				2507.5	20825	22.73	23	-			
		1 RB	36	2535	21100	22.69	23				
				2562.5	21375	22.11	23				
				2507.5	20825	22.43	23	-			
			74	2535	21100	22.77	23				
				2562.5	21375	22.24	23				
				2507.5	20825	21.21	22				
	16-QAM		0	2535	21100	21.14	22				
				2562.5	21375	21.12	22				
		~~~~		2507.5	20825	21.34	22	0-1           0-1           0-1           0-1           0-1           0-1           0-1           0-1           0-1           0-1           0-1           0-1           0-1           0-1           0-1           0-1           0-1           0-1           0-1           0-1           0-1           0-1           0-1           0-1           0-1           0-1           0-1           0-1			
		36 RB	18	2535	21100	21.20	22				
				2562.5	21375	21.03	22				
			67	2507.5	20825	21.32	22				
			37	2535	21100	21.19	22				
				2562.5	21375	21.13	22	0 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-			
			חח	2507.5	20825	21.25	22				
		75	RB	2535	21100	21.04	22				
				2562.5	21375	21.16	22	0-2			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279

f (886-2) 2298-0488

www.tw.sgs.com

Member of SGS Group





	FDD Band 7											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)				
				2507.5	20825	21.47	22	0-2				
			0	2535	21100	21.70	22	0-2				
				2562.5	21375	21.51	22	0-2				
				2507.5	20825	21.84	22	0-2				
		1 RB	36	2535	21100	21.72	22	0-2				
				2562.5	21375	21.26	22	0-2				
				2507.5	20825	21.51	22	0-2				
			74	2535	21100	21.88	22	0-2				
				2562.5	21375	21.42	22	0-2				
				2507.5	20825	20.22	21	0-3				
15	64-QAM		0	2535	21100	20.14	21	0-3				
				2562.5	21375	20.29	21	0-3				
				2507.5	20825	20.47	21	0-3				
		36 RB	18	2535	21100	20.31	21	0-3				
				2562.5	21375	20.23	21	0-3				
				2507.5	20825	20.45	21	0-3				
			37	2535	21100	20.27	21	0-3				
				2562.5	21375	20.16	21	0-3				
				2507.5	20825	20.44	21	Allow ed per 3GPP(dB) 0-2 0-2 0-2 0-2 0-2 0-2 0-2 0-2 0-2 0-2				
		75RB		2535	21100	20.08	21	0-3				
				2562.5	21375	20.33	21	0-3				

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




# Report No. : E5/2019/C0017 Page: 58 of 261

				FDD Band	7						
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)			
				2505	20800	22.88	24	0			
			0	2535	21100	22.66	24	0			
				2565	21400	22.63	24	0			
				2505	20800	22.80	24	0			
		1 RB	25	2535	21100	22.65	24	0			
				2565	21400	22.77	24	0			
				2505	20800	22.90	24	0			
			49	2535	21100	22.82	24	0			
				2565	21400	22.91	24	0			
				2505	20800	22.04	23	0-1			
	QPSK		0	2535	21100	21.97	23	0-1			
				2565	21400	21.93	23	0-1			
				2505	20800	22.06	23	0-1			
		25 RB	12	2535	21100	21.88	23	0-1			
				2565	21400	22.05	23	-			
				2505	20800	22.09	23	Allow ed per 3GPP(dB)         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0-1         0-1         0-1         0-1         0-1         0-1         0-1         0-1         0-1         0-1         0-1         0-1         0-1         0-1         0-1         0-1         0-1         0-1         0-1         0-1         0-1         0-1         0-1         0-1         0-1         0-1         0-1         0-1         0-2         0-2         0-2         0-2         0-2         0-2			
			25	2535	21100	22.01	23	0-1			
				2565	21400	22.03	23	0-1			
				2505	20800	22.10	23	0-1			
		50	RB	2535	21100	21.90	23	0           0           0           0           0           0           0           0           0           0           0           0           0           0           0           0           0           0           0           0           0           0           0           0           0           0           0           0           0           0           0           0           0           0           0           0           0           0           0           0           0           0           0           0           0           0           0           0           0           0           0           0           0           0			
10				2565	21400	21.97	23				
				2505	20800	22.49	23	-			
			0	2535	21100	22.06	23				
				2565	21400	22.04	23	-			
				2505	20800	22.06	23				
		1 RB	25	2535	21100	22.44	23				
				2565	21400	22.27	23	-			
				2505	20800	22.57	23				
			49	2535	21100	22.17	23				
				2565	21400	22.54	23				
			_	2505	20800	21.07	22				
	16-QAM		0	2535	21100	20.96	22				
				2565	21400	20.95	22				
				2505	20800	21.05	22	0-1           0-1           0-1           0-1           0-1           0-1           0-1           0-1           0-1           0-1           0-1           0-1           0-1           0-1           0-1           0-1           0-1           0-1           0-1           0-1           0-1           0-1           0-1           0-1           0-1           0-1           0-1           0-1           0-1           0-1           0-2           0-2           0-2           0-2           0-2           0-2           0-2           0-2           0-2           0-2           0-2           0-2           0-2           0-2           0-2           0-2           0-2           0-2           0-2           0-2           0-2			
		25 RB	12	2535	21100	20.88	22				
				2565	21400	21.11	22				
			67	2505	20800	21.15	22				
			25	2535	21100	20.95	22				
				2565	21400	21.12	22				
			DD	2505	20800	21.08	22				
	50RI	КB	2535	21100	20.98	22					
				2565	21400	20.96	22	0-2			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.





	FDD Band 7											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)				
				2505	20800	21.52	22	0-2				
			0	2535	21100	21.17	22	0-2				
				2565	21400	21.22	22	0-2				
				2505	20800	21.16	22	0-2				
		1 RB	25	2535	21100	21.46	22	0-2				
				2565	21400	21.43	22	0-2				
				2505	20800	21.64	22	0-2				
			49	2535	21100	21.30	22	0-2				
				2565	21400	21.61	22	0-2				
				2505	20800	20.26	21	0-3				
10	64-QAM		0	2535	21100	20.08	21	0-3				
				2565	21400	20.06	21	0-3				
				2505	20800	20.07	21	0-3				
		25 RB	12	2535	21100	20.00	21	0-3				
				2565	21400	20.23	21	0-3				
				2505	20800	20.17	21	0-3				
			25	2535	21100	20.05	21	Allow ed per 3GPP(dB) 0-2 0-2 0-2 0-2 0-2 0-2 0-2 0-2 0-2 0-2				
				2565	21400	20.32	21	0-3				
				2505	20800	20.25	21	Allow ed per 3GPP(dB) 0-2 0-2 0-2 0-2 0-2 0-2 0-2 0-2 0-2 0-2				
		50	RB	2535	21100	20.10	21	0-3				
				2565	21400	19.99	21	0-3				


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





				FDD Band 7	7						
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)			
				2502.5	20775	22.94	24	0			
			0	2535	21100	22.75	24	0			
				2567.5	21425	22.76	24	0			
				2502.5	20775	22.85	24	0			
		1 RB	12	2535	21100	22.78	24	0			
				2567.5	21425	22.87	24	0			
				2502.5	20775	23.02	24	0			
			24	2535	21100	22.92	24	0			
				2567.5	21425	23.02	24	0			
				2502.5	20775	22.10	23	0-1			
	QPSK		0	2535	21100	21.99	23	0-1			
				2567.5	21425	21.99	23	0-1			
				2502.5	20775	22.04	23	0-1			
		12 RB	6	2535	21100	21.91	23	0-1			
				2567.5	21425	22.06	23	0-1			
				2502.5	20775	22.08	23	0-1			
			13	2535	21100	22.00	23	0-1			
				2567.5	21425	22.04	23	0-1			
				2502.5	20775	22.03	23	0-1			
		25	RB	2535	21100	21.94	23	0-1			
5				2567.5	21425	22.05	23	0           0           0           0           0           0           0           0           0           0           0           0           0-1           0-1           0-1           0-1           0-1           0-1           0-1           0-1           0-1           0-1           0-1           0-1			
J J				2502.5	20775	22.39	23				
			0	2535	21100	21.95	23	-			
				2567.5	21425	22.01	23				
				2502.5	20775	22.24	23	-			
		1 RB	12	2535	21100	22.34	23				
				2567.5	21425	22.57	23				
				2502.5	20775	22.57	23	-			
			24	2535	21100	22.22	23	-			
				2567.5	21425	22.21	23	-			
				2502.5	20775	21.05	22				
	16-QAM		0	2535	21100	20.97	22				
				2567.5	21425	21.06	22				
		10		2502.5	20775	21.11	22				
		12 RB	6	2535	21100	20.94	22				
				2567.5	21425	21.17	22				
			40	2502.5	20775	21.08	22				
			13	2535	21100	21.03	22				
1				2567.5	21425	21.03	22				
				2502.5	20775	21.00	22	0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1			
1		25RB		2535 2567.5	21100	21.01	22				
					21425	21.00	22	0-2			

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





	FDD Band 7											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)				
				2502.5	20775	21.55	22	0-2				
			0	2535	21100	21.09	22	0-2				
				2567.5	21425	21.17	22	0-2				
				2502.5	20775	21.43	22	0-2				
		1 RB	B 12	2535	21100	21.40	22	0-2				
				2567.5	21425	21.58	22	0-2				
				2502.5	20775	21.66	22	0-2				
			24	2535	21100	21.28	22	0-2				
				2567.5	21425	21.29	22	0-2				
			0	2502.5	20775	20.09	21	0-3				
5	64-QAM			2535	21100	20.13	21	0-3				
				2567.5	21425	20.24	21	0-3				
				2502.5	20775	20.29	21	0-3				
		12 RB	6	2535	21100	19.94	21	0-3				
				2567.5	21425	20.35	21	0-3				
				2502.5	20775	20.27	21	0-3				
			13	2535	21100	20.20	21	0-3				
				2567.5	21425	20.12	21	0-3				
				2502.5	20775	20.16	21	0-3				
	25		RB	2535	21100	20.05	21	0-3				
				2567.5	21425	20.01	21	0-3				

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



# Report No. : E5/2019/C0017 Page: 62 of 261


FDD Band 12										
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)		
				704	23060	22.39	24	0		
			0	707.5	23095	22.35	24	0		
				711	23130	22.45	24	0		
				704	23060	22.47	24	0		
		1 RB	25	707.5	23095	22.40	24	0		
				711	23130	22.47	24	0		
				704	23060	22.58	24	0		
			49	707.5	23095	22.67	24	0		
				711	23130	22.59	24	0		
				704	23060	21.42	23	0-1		
	QPSK		0	707.5	23095	21.49	23	0-1		
				711	23130	21.54	23	0-1		
		25 RB		704	23060	21.60	23	0-1		
			12	707.5	23095	21.60	23	0-1		
				711	23130	21.62	23	0-1		
				704	23060	21.61	23	0-1		
			25	707.5	23095	21.64	23	0-1		
				711	23130	21.59	23	0-1		
				704	23060	21.61	23	0-1		
		50RB		707.5	23095	21.55	23	0-1		
10				711	23130	21.51	23	0-1		
10			0	704	23060	21.69	23	0-1		
				707.5	23095	21.84	23	0-1		
				711	23130	21.50	23	0-1		
				704	23060	21.73	23	0-1		
		1 RB	25	707.5	23095	21.84	23	0-1		
				711	23130	22.13	23	0-1		
				704	23060	21.60	23	0-1		
			49	707.5	23095	21.70	23	0-1		
				711	23130	21.80	23	0-1		
				704	23060	20.49	22	0-2		
	16-QAM		0	707.5	23095	20.39	22	0-2		
				711	23130	20.55	22	0-2		
				704	23060	20.58	22	0-2		
		25 RB	12	707.5	23095	20.57	22	0-2		
				711	23130	20.58	22	0-2		
			65	704	23060	20.57	22	0-2		
			25	707.5	23095	20.72	22	0-2		
				711	23130	20.68	22	0-2		
			חח	704	23060	20.67	22	0-2		
		50RB		707.5	23095	20.64	22	0-2		
				711	23130	20.57	22	0-2		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

f (886-2) 2298-0488





	FDD Band 12											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)				
				704	23060	21.05	22	0-2				
		1 RB	0	707.5	23095	21.20	22	0-2				
				711	23130	20.73	22	0-2				
					704	23060	20.97	22	0-2			
			25	707.5	23095	21.12	22	0-2				
				711	23130	21.49	22	0-2				
			49	704	23060	20.96	22	0-2				
				707.5	23095	20.98	22	0-2				
				711	23130	21.13	22	0-2				
			0	704	23060	19.84	21	0-3				
10	64-QAM			707.5	23095	19.70	21	0-3				
				711	23130	19.77	21	0-3				
				704	23060	19.95	21	0-3				
		25 RB	12	707.5	23095	19.97	21	0-3				
				711	23130	19.90	21	0-3				
				704	23060	19.92	21	0-3				
			25	707.5	23095	20.03	21	0-3				
				711	23130	19.95	21	0-3				
				704	23060	19.88	21	0-3				
		50	RB	707.5	23095	19.93	21	0-3				
				711	23130	19.87	21	0-3				

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



# Report No. : E5/2019/C0017 Page: 64 of 261


FDD Band 12										
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)		
				701.5	23035	22.51	24	0		
			0	707.5	23095	22.37	24	0		
				713.5	23155	22.48	24	0		
				701.5	23035	22.44	24	0		
		1 RB	12	707.5	23095	22.51	24	0		
				713.5	23155	22.58	24	0		
			24	701.5	23035	22.39	24	0		
				707.5	23095	22.55	24	0		
				713.5	23155	22.57	24	0		
				701.5	23035	21.54	23	0-1		
	QPSK		0	707.5	23095	21.62	23	0-1		
		12 RB		713.5	23155	21.58	23	0-1		
				701.5	23035	21.50	23	0-1		
			6	707.5	23095	21.54	23	0-1		
				713.5	23155	21.53	23	0-1		
				701.5	23035	21.48	23	0-1		
			13	707.5	23095	21.63	23	0-1		
				713.5	23155	21.61	23	0-1		
				701.5	23035	21.50	23	0-1		
		25	RB	707.5	23095	21.52	23	0-1		
5				713.5	23155	21.55	23	0-1		
			0	701.5	23035	21.65	23	0-1		
				707.5	23095	22.10	23	0-1		
				713.5	23155	21.71	23	0-1		
				701.5	23035	21.76	23	0-1		
		1 RB	12	707.5	23095	21.96	23	0-1		
				713.5	23155	21.84	23	0-1		
				701.5	23035	21.74	23	0-1		
			24	707.5	23095	21.91	23	0-1		
				713.5	23155	21.50	23	0-1		
	40.0414		0	701.5	23035	20.55	22	0-2		
	16-QAM		0	707.5	23095	20.69	22	0-2		
				713.5	23155	20.60	22	0-2		
		10 00	e e	701.5	23035	20.52	22	0-2		
		12 RB	6	707.5 713.5	23095	20.60	22 22	0-2 0-2		
				713.5	23155 23035	20.61 20.52	22	0-2		
			13	701.5	23035	20.52	22	0-2		
			13	707.5	23095	20.62	22	0-2		
				713.5	23155	20.55	22	0-2		
		25	RB	701.5	23035	20.64	22	0-2		
		25RB		707.5	23095	20.58	22	0-2		
				713.3	20100	20.00	22	0-2		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

f (886-2) 2298-0488





				FDD Band 1	2			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)
				701.5	23035	20.96	22	0-2
			0	707.5	23095	21.46	22	0-2
				713.5	23155	21.06	22	0-2
				701.5	23035	21.14	22	0-2
		1 RB	12	707.5	23095	21.18	22	0-2
				713.5	23155	21.06	22	0-2
			24	701.5	23035	20.97	22	0-2
				707.5	23095	21.17	22	0-2
				713.5	23155	20.83	22	0-2
			0	701.5	23035	19.88	21	0-3
5	64-QAM			707.5	23095	19.91	21	0-3
				713.5	23155	19.88	21	0-3
				701.5	23035	19.90	21	0-3
		12 RB	6	707.5	23095	19.97	21	0-3
				713.5	23155	19.87	21	0-3
				701.5	23035	19.88	21	0-3
			13	707.5	23095	20.02	21	0-3
				713.5	23155	19.78	21	0-3
			-	701.5	23035	19.97	21	0-3
		25	RB	707.5	23095	19.78	21	0-3
				713.5	23155	19.85	21	0-3

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



# Report No. : E5/2019/C0017 Page: 66 of 261


FDD Band 12										
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)		
				700.5	23025	22.40	24	0		
			0	707.5	23095	22.48	24	0		
				714.5	23165	22.51	24	0		
				700.5	23025	22.44	24	0		
		1 RB	7	707.5	23095	22.47	24	0		
				714.5	23165	22.54	24	0		
				700.5	23025	22.42	24	0		
			14	707.5	23095	22.52	24	0		
				714.5	23165	22.53	24	0		
		QPSK 8 RB	0	700.5	23025	21.50	23	0-1		
	QPSK			707.5	23095	21.48	23	0-1		
				714.5	23165	21.57	23	0-1		
				700.5	23025	21.54	23	0-1		
			4	707.5	23095	21.58	23	0-1		
				714.5	23165	21.66	23	0-1		
				700.5	23025	21.54	23	0-1		
			7	707.5	23095	21.53	23	0-1		
				714.5	23165	21.58	23	0-1		
				700.5	23025	21.52	23	0-1		
		15	RB	707.5	23095	21.58	23	0-1		
3				714.5	23165	21.53	23	0-1		
-			0	700.5	23025	21.90	23	0-1		
				707.5	23095	21.63	23	0-1		
				714.5	23165	21.67	23	0-1		
				700.5	23025	21.67	23	0-1		
		1 RB	7	707.5	23095	21.80	23	0-1		
				714.5	23165	21.58	23	0-1		
				700.5	23025	22.04	23	0-1		
			14	707.5	23095	22.16	23	0-1		
				714.5	23165	21.44	23	0-1		
				700.5	23025	20.63	22	0-2		
	16-QAM		0	707.5	23095	20.60	22	0-2		
				714.5	23165	20.63	22	0-2		
		0.55		700.5	23025	20.52	22	0-2		
		8 RB	4	707.5	23095	20.53	22	0-2		
				714.5	23165	20.74	22	0-2		
			-	700.5	23025	20.50	22	0-2		
			7	707.5	23095	20.58	22	0-2		
				714.5	23165	20.77	22	0-2		
		4 6	DB	700.5 707.5	23025	20.67	22 22	0-2 0-2		
		15RB		707.5	23095 23165	20.55		0-2		
				/ 14.5	23105	20.63	22	0-2		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

f (886-2) 2298-0488





	FDD Band 12											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)				
				700.5	23025	21.24	22	0-2				
			0	707.5	23095	20.91	22	0-2				
		1 RB		714.5	23165	21.06	22	0-2				
					700.5	23025	21.02	22	0-2			
			IRB 7	707.5	23095	21.20	22	0-2				
				714.5	23165	20.78	22	0-2				
				700.5	23025	21.44	22	0-2				
			14	707.5	23095	21.39	22	0-2				
				714.5	23165	20.80	22	0-2				
			0	700.5	23025	19.97	21	0-3				
3	64-QAM			707.5	23095	19.84	21	0-3				
				714.5	23165	19.94	21	0-3				
				700.5	23025	19.77	21	0-3				
		8 RB	4	707.5	23095	19.79	21	0-3				
				714.5	23165	20.12	21	0-3				
				700.5	23025	19.83	21	0-3				
			7	707.5	23095	19.81	21	0-3				
				714.5	23165	20.05	21	0-3				
			-	700.5	23025	19.91	21	0-3				
		15	RB	707.5	23095	19.84	21	0-3				
				714.5	23165	19.88	21	0-3				

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



# Report No. : E5/2019/C0017 Page: 68 of 261

BW(Mnz)         Modulation         RB Size         RB Offset         Frequency (MHz)         Channel         pow er (dBm)         Pow er (dBm)         Pow er (dBm)         Allowed Tolerance (dBm)         Allowed 3GPR(           Nodulation         RB Size         RB Offset         699.7         23017         22.38         24         0           707.5         23095         22.24         24         0         0         715.3         23173         22.35         244         0           699.7         23017         22.31         24         0         0         715.3         23173         22.45         24         0           699.7         23017         22.245         24         0         0         715.3         23173         22.44         24         0           699.7         23017         22.21         24         0         0         707.5         23095         22.24         24         0           707.5         23097         23173         22.245         24         0         0           707.5         23097         22.17         24         0         0         707.5         23095         22.21         24         0         0           707.5	FDD Band 12										
1.4         0         707.5         23095         22.24         24         0           1 RB         2         707.5         23017         22.35         24         0           1 RB         2         707.5         23095         22.38         24         0           707.5         23095         22.38         24         0         0           707.5         23095         22.38         24         0           707.5         23095         22.38         24         0           707.5         23095         22.42         24         0           707.5         23095         22.42         24         0           707.5         23095         22.29         24         0           707.5         23095         22.29         24         0           707.5         23095         22.29         24         0           707.5         23095         22.21         24         0           707.5         23095         22.20         24         0           707.5         23095         22.15         24         0           707.5         23095         22.15         24         0 <td>BW(Mhz)</td> <td>Modulation</td> <td>RB Size</td> <td>RB Offset</td> <td></td> <td>Channel</td> <td>pow er</td> <td>Pow er + Max. Tolerance</td> <td>MPR Allow ed per 3GPP(dB)</td>	BW(Mhz)	Modulation	RB Size	RB Offset		Channel	pow er	Pow er + Max. Tolerance	MPR Allow ed per 3GPP(dB)		
1.4         715.3         23173         22.35         2.4         0           1 RB         2         699.7         23017         22.31         2.4         0           707.5         23095         22.38         2.4         0         0         715.3         23173         22.45         2.4         0           715.3         23173         22.45         2.44         0         0         715.3         23173         22.45         2.44         0         0           5         707.5         23095         22.42         2.44         0         0         0         715.3         23173         22.24         2.44         0         0         707.5         23095         22.21         2.44         0         0         707.5         23095         22.21         2.44         0         0         707.5         23095         22.21         2.44         0         0         707.5         23095         22.21         2.44         0         0         707.5         23095         22.21         2.44         0         0         707.5         23095         22.21         2.44         0         0         707.5         23095         22.21         2.44         0					699.7	23017	22.38	24	0		
1.4         699.7         23017         22.31         24         0           1 RB         2         707.5         23095         22.38         24         0           715.3         23173         22.45         24         0         0         7         15.3         23173         22.45         24         0         0           5         707.5         23095         22.42         24         0         0         7         7         23017         22.26         24         0         0         7         7         23095         22.42         24         0         0         7         7         23017         22.21         24         0         0         7         7         23017         22.21         24         0         0         7         7         23017         22.21         24         0         0         7         7         23017         22.17         24         0         0         7         7         23017         22.17         24         0         0         7         7         23017         22.15         24         0         0         7         7         3         0         1         1         0         7				0	707.5	23095	22.24	24	0		
I.4         1 RB         2         707.5         23095         22.38         24         0           OPSK         699.7         23017         22.45         24         0           715.3         23173         22.42         24         0           707.5         23095         22.42         24         0           707.5         23095         22.42         24         0           715.3         23173         22.44         24         0           707.5         23095         22.29         24         0           707.5         23095         22.29         24         0           707.5         23095         22.17         24         0           707.5         23095         22.20         24         0           707.5         23095         22.20         24         0           707.5         23095         22.30         24         0           707.5         23095         22.30         24         0           707.5         23095         21.37         23         0-1           707.5         23095         21.39         23         0-1           707.5         23095 </td <td></td> <td></td> <td></td> <td></td> <td>715.3</td> <td>23173</td> <td>22.35</td> <td>24</td> <td>0</td>					715.3	23173	22.35	24	0		
$1.4 \\ 1.4 \\ 1.4 \\ 1.4 \\ 1.4 \\ 1.6-QAM \\ 16-QAM \\ 16-QAM$						23017	22.31	24	0		
Ambuar Matrix         Ambuar M			1 RB	2		23095	22.38		0		
1.4         5         707.5         23095         22.42         24         0           QPSK         699.7         23017         22.21         24         0           707.5         23095         22.29         24         0           707.5         23095         22.29         24         0           707.5         23095         22.29         24         0           707.5         23095         22.25         24         0           707.5         23095         22.25         24         0           707.5         23095         22.21         24         0           707.5         23095         22.20         24         0           707.5         23095         22.20         24         0           707.5         23095         22.30         24         0           707.5         23095         22.30         24         0           707.5         23095         22.30         23         0-1           68B         707.5         23095         21.39         23         0-1           699.7         23017         21.52         23         0-1           715.3         23173<									0		
I.4         715.3         23173         22.44         24         0           OPSK         699.7         23017         22.21         24         0           715.3         23173         22.29         24         0           715.3         23173         22.29         24         0           715.3         23173         22.25         24         0           707.5         23095         22.21         24         0           699.7         23017         22.17         24         0           707.5         23095         22.20         24         0           707.5         23095         22.20         24         0           707.5         23095         22.30         24         0           707.5         23095         22.30         24         0           707.5         23095         21.39         23         0-1           707.5         23095         21.37         23         0-1           707.5         23095         21.39         23         0-1           715.3         23173         21.42         23         0-1           707.5         23095         21.97 <t< td=""><td></td><td></td><td></td><td></td><td></td><td></td><td>24</td><td>0</td></t<>								24	0		
APPSK         699.7         23017         22.21         24         0           707.5         23095         22.29         24         0           707.5         23095         22.29         24         0           707.5         23095         22.29         24         0           707.5         23095         22.21         24         0           707.5         23095         22.21         24         0           707.5         23095         22.21         24         0           707.5         23095         22.21         24         0           707.5         23095         22.20         24         0           707.5         23095         22.30         24         0           707.5         23095         22.30         24         0           707.5         23095         21.39         23         0-1           707.5         23095         21.39         23         0-1           707.5         23095         21.97         23         0-1           707.5         23095         21.97         23         0-1           707.5         23095         21.97         23 <t< td=""><td></td><td></td><td></td><td>5</td><td></td><td></td><td>22.42</td><td>24</td><td>0</td></t<>				5			22.42	24	0		
QPSK         0         707.5         23095         22.29         24         0           3 RB         2         715.3         23173         22.25         24         0           3 RB         2         707.5         23095         22.21         24         0           3 RB         2         707.5         23095         22.21         24         0           715.3         23173         22.20         24         0         0           715.3         23173         22.20         24         0           699.7         23017         22.15         24         0           707.5         23095         22.30         24         0           707.5         23095         21.39         23         0.1           707.5         23095         21.39         23         0.1           707.5         23095         21.39         23         0.1           707.5         23095         21.39         23         0.1           707.5         23095         21.39         23         0.1           707.5         23095         21.33         21.97         23         0.1           705.5         2309					715.3	23173	22.44		0		
$1.4 \\ 1.4 \\ 1.6 \text{-QAM} \\ 16 $				0					0		
1.4         699.7         23017         22.17         24         0           3 RB         2         707.5         23095         22.21         24         0           3 RB         2         707.5         23095         22.20         24         0           3         699.7         23017         22.15         24         0           3         707.5         23095         22.30         24         0           3         707.5         23095         22.30         24         0           715.3         23173         22.28         24         0           6RB         699.7         23017         21.37         23         0-1           707.5         23095         21.39         23         0-1           707.5         23095         21.39         23         0-1           707.5         23095         21.97         23         0-1           707.5         23095         21.97         23         0-1           707.5         23095         21.97         23         0-1           707.5         23095         21.83         23         0-1           707.5         23095         21.8		QPSK									
1.4         3 RB         2         707.5         23095         22.21         24         0           3 RB         2         715.3         23173         22.20         24         0           3         699.7         23017         22.15         24         0           3         707.5         23095         22.30         24         0           715.3         23173         22.28         24         0           707.5         23095         21.39         23         0-1           6RB         707.5         23095         21.39         23         0-1           715.3         23173         21.42         23         0-1           715.3         23173         21.42         23         0-1           715.3         23173         21.42         23         0-1           715.3         23173         21.58         23         0-1           715.3         23173         21.58         23         0-1           715.3         23173         21.63         23         0-1           715.3         23173         21.71         23         0-1           707.5         23095         21.83											
1.4         715.3         23173         22.20         24         0           3         699.7         23017         22.15         24         0           3         707.5         23095         22.30         24         0           715.3         23173         22.28         24         0           715.3         23173         22.28         24         0           6RB         707.5         23095         21.39         23         0-1           715.3         23173         21.42         23         0-1           715.3         23173         21.42         23         0-1           715.3         23173         21.42         23         0-1           715.3         23173         21.42         23         0-1           715.3         23173         21.58         23         0-1           707.5         23095         21.83         23         0-1           707.5         23095         21.83         23         0-1           707.5         23095         21.83         23         0-1           5         707.5         23095         21.78         23         0-1 <td< td=""><td></td><td></td><td rowspan="3">3 RB</td><td rowspan="2">2</td><td></td><td></td><td></td><td></td><td></td></td<>			3 RB	2							
1.4         699.7         23017         22.15         24         0           3         707.5         23095         22.30         24         0           715.3         23173         22.28         24         0           68B         699.7         23017         21.37         23         0.1           707.5         23095         21.39         23         0.1           707.5         23095         21.39         23         0.1           707.5         23095         21.39         23         0.1           707.5         23095         21.39         23         0.1           715.3         23173         21.42         23         0.1           707.5         23095         21.97         23         0.1           715.3         23173         21.58         23         0.1           715.3         23173         21.63         23         0.1           715.3         23173         21.61         23         0.1           715.3         23173         21.71         23         0.1           715.3         23173         21.37         23         0.1           707.5         23095											
1.4         3         707.5         23095         22.30         24         0           6RB         699.7         23017         21.37         23         0-1           707.5         23095         21.39         23         0-1           707.5         23095         21.39         23         0-1           707.5         23095         21.39         23         0-1           707.5         23095         21.39         23         0-1           707.5         23095         21.39         23         0-1           707.5         23095         21.39         23         0-1           707.5         23095         21.97         23         0-1           707.5         23095         21.97         23         0-1           707.5         23095         21.97         23         0-1           707.5         23095         21.83         23         0-1           707.5         23095         21.83         23         0-1           707.5         23095         21.78         23         0-1           707.5         23095         21.78         23         0-1           715.3         23173<											
1.4         715.3         23173         22.28         24         0           6RB         699.7         23017         21.37         23         0-1           707.5         23095         21.39         23         0-1           715.3         23173         21.42         23         0-1           715.3         23173         21.42         23         0-1           715.3         23173         21.42         23         0-1           707.5         23095         21.97         23         0-1           699.7         23017         21.52         23         0-1           707.5         23095         21.97         23         0-1           707.5         23095         21.97         23         0-1           707.5         23095         21.83         23         0-1           715.3         23173         21.71         23         0-1           715.3         23173         21.71         23         0-1           715.3         23173         21.78         23         0-1           715.3         23173         21.37         23         0-1           715.3         23173         21											
1.4         6RB         699.7         23017         21.37         23         0-1           707.5         23095         21.39         23         0-1           715.3         23173         21.42         23         0-1           715.3         23173         21.42         23         0-1           699.7         23017         21.52         23         0-1           707.5         23095         21.97         23         0-1           707.5         23095         21.97         23         0-1           707.5         23095         21.97         23         0-1           707.5         23095         21.97         23         0-1           715.3         23173         21.58         23         0-1           707.5         23095         21.83         23         0-1           707.5         23095         21.83         23         0-1           715.3         23173         21.71         23         0-1           707.5         23095         21.83         23         0-1           715.3         23173         21.78         23         0-1           715.3         23173				3							
1.4         6RB         707.5         23095         21.39         23         0-1           715.3         23173         21.42         23         0-1           715.3         23173         21.42         23         0-1           707.5         23095         21.97         23         0-1           707.5         23095         21.97         23         0-1           707.5         23095         21.97         23         0-1           707.5         23095         21.97         23         0-1           707.5         23095         21.97         23         0-1           715.3         23173         21.58         23         0-1           707.5         23095         21.83         23         0-1           715.3         23173         21.71         23         0-1           715.3         23173         21.71         23         0-1           707.5         23095         21.83         23         0-1           715.3         23173         21.71         23         0-1           715.3         23173         21.37         23         0-1           715.3         23095											
1.4         715.3         23173         21.42         23         0-1           1.4         699.7         23017         21.52         23         0-1           707.5         23095         21.97         23         0-1           715.3         23173         21.52         23         0-1           707.5         23095         21.97         23         0-1           715.3         23173         21.58         23         0-1           715.3         23173         21.58         23         0-1           715.3         23173         21.63         23         0-1           715.3         23173         21.71         23         0-1           715.3         23173         21.71         23         0-1           715.3         23173         21.71         23         0-1           715.3         23173         21.78         23         0-1           715.3         23173         21.37         23         0-1           715.3         23173         21.36         23         0-1           715.3         23173         21.36         23         0-1           715.3         23173									-		
1.4       0       699.7       23017       21.52       23       0-1         707.5       23095       21.97       23       0-1         715.3       23173       21.58       23       0-1         715.3       23173       21.63       23       0-1         707.5       23095       21.97       23       0-1         715.3       23173       21.63       23       0-1         707.5       23095       21.83       23       0-1         707.5       23095       21.83       23       0-1         715.3       23173       21.71       23       0-1         715.3       23173       21.71       23       0-1         707.5       23095       21.83       23       0-1         715.3       23173       21.71       23       0-1         715.3       23173       21.37       23       0-1         707.5       23095       21.36       23       0-1         715.3       23173       21.27       23       0-1         715.3       23173       21.27       23       0-1         715.3       23173       21.27       23			61	RB					-		
0         707.5         23095         21.97         23         0-1           715.3         23173         21.58         23         0-1           715.3         23173         21.58         23         0-1           699.7         23017         21.63         23         0-1           707.5         23095         21.83         23         0-1           707.5         23095         21.83         23         0-1           707.5         23095         21.83         23         0-1           715.3         23173         21.71         23         0-1           715.3         23173         21.71         23         0-1           707.5         23095         21.78         23         0-1           715.3         23173         21.37         23         0-1           715.3         23173         21.37         23         0-1           715.3         23095         21.36         23         0-1           715.3         23173         21.27         23         0-1           715.3         23173         21.27         23         0-1           715.3         23173         21.27	1.4			•					-		
1 RB         715.3         23173         21.58         23         0-1           1 RB         2         699.7         23017         21.63         23         0-1           707.5         23095         21.83         23         0-1           715.3         23173         21.71         23         0-1           707.5         23095         21.83         23         0-1           715.3         23173         21.71         23         0-1           715.3         23173         21.71         23         0-1           715.3         23173         21.71         23         0-1           707.5         23095         21.78         23         0-1           715.3         23173         21.37         23         0-1           715.3         23173         21.37         23         0-1           707.5         23095         21.36         23         0-1           715.3         23173         21.27         23         0-1           715.3         23173         21.27         23         0-1           715.3         23173         21.27         23         0-1           715.3         23				0					-		
1 RB         2         699.7         23017         21.63         23         0-1           707.5         23095         21.83         23         0-1           715.3         23173         21.71         23         0-1           715.3         23173         21.71         23         0-1           707.5         23095         21.83         23         0-1           715.3         23173         21.71         23         0-1           5         707.5         23095         21.78         23         0-1           715.3         23173         21.37         23         0-1           715.3         23173         21.37         23         0-1           707.5         23095         21.78         23         0-1           707.5         23095         21.36         23         0-1           707.5         23095         21.36         23         0-1           715.3         23173         21.27         23         0-1           715.3         23173         21.27         23         0-1           715.3         23173         21.27         23         0-1           699.7         23017								-	-		
1 RB         2         707.5         23095         21.83         23         0-1           715.3         23173         21.71         23         0-1           715.3         23173         21.71         23         0-1           699.7         23017         21.61         23         0-1           5         707.5         23095         21.78         23         0-1           715.3         23173         21.71         23         0-1           707.5         23095         21.78         23         0-1           715.3         23173         21.37         23         0-1           707.5         23095         21.36         23         0-1           707.5         23095         21.36         23         0-1           715.3         23173         21.22         23         0-1           715.3         23173         21.27         23         0-1           715.3         23173         21.27         23         0-1           715.3         23173         21.27         23         0-1           715.3         23017         21.19         23         0-1									-		
16-QAM         0         715.3         23173         21.71         23         0-1           16-QAM         0         699.7         23017         21.61         23         0-1           16-QAM         0         699.7         23017         21.78         23         0-1           16-QAM         0         699.7         23017         21.37         23         0-1           16-QAM         0         707.5         23095         21.36         23         0-1			1 55						-		
699.7         23017         21.61         23         0-1           5         707.5         23095         21.78         23         0-1           715.3         23173         21.37         23         0-1           715.3         23173         21.37         23         0-1           707.5         23095         21.36         23         0-1           715.3         23173         21.37         23         0-1           707.5         23095         21.36         23         0-1           715.3         23173         21.27         23         0-1           715.3         23173         21.27         23         0-1           699.7         23017         21.19         23         0-1			1 RB	2				-			
5         707.5         23095         21.78         23         0-1           715.3         23173         21.37         23         0-1           16-QAM         0         699.7         23017         21.22         23         0-1           16-QAM         0         707.5         23095         21.36         23         0-1           16-QAM         0         707.5         23095         21.36         23         0-1           16-QAM         0         699.7         23017         21.27         23         0-1								-	-		
16-QAM         715.3         23173         21.37         23         0-1           0         699.7         23017         21.22         23         0-1           707.5         23095         21.36         23         0-1           715.3         23173         21.27         23         0-1           699.7         23017         21.27         23         0-1           715.3         23173         21.27         23         0-1           699.7         23017         21.19         23         0-1				-							
16-QAM         699.7         23017         21.22         23         0-1           707.5         23095         21.36         23         0-1           715.3         23173         21.27         23         0-1           699.7         23017         21.19         23         0-1				Э							
16-QAM         0         707.5         23095         21.36         23         0-1           715.3         23173         21.27         23         0-1           699.7         23017         21.19         23         0-1											
715.3         23173         21.27         23         0-1           699.7         23017         21.19         23         0-1		16 OAM		0							
699.7 23017 21.19 23 0-1											
			3 PR	2					0-1		
			510	<u> </u>					0-1		
									0-1		
				3					0-1		
									0-1		
				<u> </u>					0-1		
			RB					0-2			
			6RB						0-2		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279

```
f (886-2) 2298-0488
```

www.tw.sgs.com

Member of SGS Group



# Report No. : E5/2019/C0017 Page: 69 of 261

	FDD Band 12											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)				
				699.7	23017	20.87	22	0-2				
			0	707.5	23095	21.33	22	0-2				
		1 RB		715.3	23173	20.93	22	0-2				
				699.7	23017	20.98	22	0-2				
			1 RB 2	2	707.5	23095	21.19	22	0-2			
				715.3	23173	20.92	22	0-2				
			5	699.7	23017	20.87	22	0-2				
				707.5	23095	21.02	22	0-2				
				715.3	23173	20.63	22	0-2				
			0	699.7	23017	20.49	22	0-2				
1.4	64-QAM			707.5	23095	20.63	22	0-2				
				715.3	23173	20.48	22	0-2				
				699.7	23017	20.57	22	0-2				
		3 RB	2	707.5	23095	20.64	22	0-2				
				715.3	23173	20.60	22	0-2				
				699.7	23017	20.55	22	0-2				
			3	707.5	23095	20.67	22	0-2				
				715.3	23173	20.54	22	0-2				
				699.7	23017	19.74	21	0-3				
		6F	RB	707.5	23095	19.80	21	0-3				
				715.3	23173	19.75	21	0-3				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

f (886-2) 2298-0488

# Report No. : E5/2019/C0017 Page: 70 of 261



BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)
			0	782	23230	22.45	24	0
		1 RB	25	782	23230	22.72	24	0
			49	782	23230	22.54	24	0
QPSK		0	782	23230	21.74	23	0-1	
		25 RB	12	782	23230	21.76	23	0-1
			25	782	23230	21.77	23	0-1
		50	RB	782	23230	21.79	23	0-1
		1 RB	0	782	23230	22.00	23	0-1
			25	782	23230	21.62	23	0-1
			49	782	23230	21.88	23	0-1
10	16-QAM		0	782	23230	20.66	22	0-2
		25 RB	12	782	23230	20.72	22	0-2
			25	782	23230	20.86	22	0-2
		50	RB	782	23230	20.83	22	0-2
			0	782	23230	21.25	22	0-2
		1 RB	25	782	23230	20.90	22	0-2
			49	782	23230	21.08	22	0-2
	64-QAM		0	782	23230	19.92	21	0-3
		25 RB	12	782	23230	19.94	21	0-3
			25	782	23230	20.15	21	0-3
	-	50	RB	782	23230	20.18	21	0-3

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488



# Report No. : E5/2019/C0017 Page: 71 of 261

FDD Band 13										
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)		
				779.5	23205	22.40	24	0		
			0	782	23230	22.42	24	0		
				784.5	23255	22.47	24	0		
				779.5	23205	22.55	24	0		
		1 RB	12	782	23230	22.43	24	0		
				784.5	23255	22.59	24	0		
				779.5	23205	22.62	24	0		
			24	782	23230	22.70	24	0		
				784.5	23255	22.66	24	0		
				779.5	23205	21.72	23	0-1		
	QPSK		0	782	23230	21.71	23	0-1		
		12 RB		784.5	23255	21.70	23	0-1		
				779.5	23205	21.75	23	0-1		
			6	782	23230	21.72	23	0-1		
				784.5	23255	21.78	23	0-1		
				779.5	23205	21.68	23	0-1		
			13	782	23230	21.75	23	0-1		
				784.5	23255	21.77	23	0-1		
				779.5	23205	21.71	23	0-1		
		25	RB	782	23230	21.67	23	0-1		
5				784.5	23255	21.74	23	0-1		
-			о	779.5	23205	22.12	23	0-1		
				782	23230	21.80	23	0-1		
				784.5	23255	21.94	23	0-1		
				779.5	23205	21.73	23	0-1		
		1 RB	12	782	23230	21.95	23	0-1		
				784.5	23255	21.87	23	0-1		
				779.5	23205	21.73	23	0-1		
			24	782	23230	21.92	23	0-1		
				784.5	23255	22.03	23	0-1		
				779.5	23205	20.77	22	0-2		
	16-QAM		0	782	23230	20.76	22	0-2		
				784.5	23255	20.79	22	0-2		
		10 55		779.5	23205	20.76	22	0-2		
		12 RB	6	782	23230	20.80	22	0-2		
				784.5	23255	20.81	22	0-2		
			10	779.5	23205	20.66	22	0-2		
			13	782	23230	20.73	22	0-2		
				784.5	23255	20.89	22	0-2		
		05	DB	779.5	23205	20.81	22	0-2		
		25RB		782 784.5	23230	20.68 20.77	22 22	0-2 0-2		
					23255	20.77	22	0-2		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

```
www.tw.sgs.com
```



# Report No. : E5/2019/C0017 Page: 72 of 261

	FDD Band 13											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)				
				779.5	23205	21.48	22	0-2				
			0	782	23230	21.19	22	0-2				
				784.5	23255	21.29	22	0-2				
			1 RB 12	779.5	23205	21.08	22	0-2				
		1 RB		782	23230	21.32	22	0-2				
				784.5	23255	21.10	22	0-2				
				779.5	23205	20.96	22	0-2				
			24	782	23230	21.24	22	0-2				
				784.5	23255	21.30	22	0-2				
				779.5	23205	20.11	21	0-3				
5	64-QAM		0	782	23230	20.16	21	0-3				
				784.5	23255	20.05	21	0-3				
				779.5	23205	20.03	21	0-3				
		12 RB	6	782	23230	20.13	21	0-3				
				784.5	23255	20.07	21	0-3				
				779.5	23205	19.88	21	0-3				
			13	782	23230	20.09	21	0-3				
				784.5	23255	20.11	21	0-3				
	25F			779.5	23205	20.09	21	0-3				
		RB	782	23230	20.04	21	0-3					
				784.5	23255	20.16	21	0-3				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd. t (886-2) 2299-3279



#### Report No. : E5/2019/C0017 Page: 73 of 261


FDD Band 17											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)			
				709	23780	22.46	24	0			
			0	710	23790	22.32	24	0			
				711	23800	22.40	24	0			
				709	23780	22.34	24	0			
		1 RB	25	710	23790	22.52	24	0			
				711	23800	22.45	24	0			
				709	23780	22.66	24	0			
			49	710	23790	22.68	24	0			
				711	23800	22.54	24	0			
				709	23780	21.47	23	0-1			
	QPSK		0	710	23790	21.51	23	0-1			
				711	23800	21.52	23	0-1			
			12	709	23780	21.70	23	0-1			
		25 RB		710	23790	21.52	23	0-1			
				711	23800	21.54	23	0-1			
				709	23780	21.75	23	0-1			
			25	710	23790	21.60	23	0-1			
				711	23800	21.58	23	0-1			
				709	23780	21.63	23	0-1			
		50RB		710	23790	21.61	23	0-1			
10				711	23800	21.52	23	0-1			
10			0	709	23780	21.62	23	0-1			
				710	23790	21.51	23	0-1			
				711	23800	21.71	23	0-1			
				709	23780	22.10	23	0-1			
		1 RB	25	710	23790	22.09	23	0-1			
				711	23800	21.73	23	0-1			
				709	23780	21.93	23	0-1			
			49	710	23790	21.83	23	0-1			
				711	23800	21.81	23	0-1			
				709	23780	20.56	22	0-2			
	16-QAM		0	710	23790	20.58	22	0-2			
				711	23800	20.59	22	0-2			
				709	23780	20.71	22	0-2			
		25 RB	12	710	23790	20.59	22	0-2			
				711	23800	20.64	22	0-2			
			65	709	23780	20.59	22	0-2			
			25	710	23790	20.71	22	0-2			
			<u> </u>	711	23800	20.82	22	0-2			
		חח	709	23780	20.66	22	0-2				
		50RB	710	23790	20.59	22	0-2				
				711	23800	20.61	22	0-2			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

f (886-2) 2298-0488 www.tw.sgs.com





	FDD Band 17											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)				
				709	23780	21.00	22	0-2				
			0	710	23790	20.75	22	0-2				
				711	23800	21.03	22	0-2				
			1 RB 25	709	23780	21.35	22	0-2				
		1 RB		710	23790	21.45	22	0-2				
				711	23800	21.04	22	0-2				
				709	23780	21.25	22	0-2				
			49	710	23790	21.06	22	0-2				
				711	23800	21.11	22	0-2				
			0	709	23780	19.96	21	0-3				
10	64-QAM			710	23790	19.83	21	0-3				
				711	23800	19.91	21	0-3				
				709	23780	19.93	21	0-3				
		25 RB	12	710	23790	19.95	21	0-3				
				711	23800	19.85	21	0-3				
				709	23780	19.91	21	0-3				
			25	710	23790	19.94	21	0-3				
				711	23800	20.17	21	0-3				
			•	709	23780	20.02	21	0-3				
		50RB		710	23790	19.97	21	0-3				
				711	23800	19.82	21	0-3				

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




#### Report No. : E5/2019/C0017 Page: 75 of 261

BW(M12)         Modulation         RB Size         RB Offset         Frequency (MHz)         Channel (MHz)         Conducted power (dBm)         Target Power (dBm)         MPR Network Tolerance (dBm)           NPR         706.5         23755         22.40         24         0           713.5         23825         22.48         24         0           713.5         23825         22.48         24         0           713.5         23825         22.48         24         0           713.5         23825         22.43         24         0           713.5         23825         22.43         24         0           713.5         23825         22.43         24         0           706.5         23755         22.60         24         0           713.5         23825         21.61         23         0-1           713.5         23825         21.61         23         0-1           713.5         23825         21.61         23         0-1           713.5         23825         21.61         23         0-1           713.5         23825         21.64         23         0-1           713.5         23825					FDD Band 1	7			
5 1 RB 1 RB 0	BW(Mhz)	Modulation	RB Size	RB Offset		Channel	pow er	Pow er + Max. Tolerance	Allow ed per
5         713.5         23826         22.48         24         0           1 RB         12         706.5         23755         22.48         24         0           713.5         23826         22.43         24         0         0         0           713.5         23826         22.43         24         0         0         0           713.5         23826         22.43         24         0         0         0           713.5         23826         22.61         24         0         0         0           710         23756         21.57         23         0.1         0         0           713.5         23826         21.61         23         0.1         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0	-				706.5	23755	22.40	24	0
5         1 RB         12         706.5         23765         22.48         24         0           11 RB         12         710.5         23825         22.43         24         0           713.5         23825         22.43         24         0         0         0           706.5         23755         22.58         24         0         0         0           706.5         23755         22.60         24         0         0         0           706.5         23755         21.57         23         0.1         0         0           706.5         23755         21.50         23         0.1         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0				0	710	23790	22.41	24	0
5         1 RB         12         710         23790         22.51         24         0           713.5         23825         22.43         24         0         0           706.5         23755         22.58         24         0           710         23790         22.61         24         0           710         23790         22.61         24         0           713.5         23825         22.60         24         0           706.5         23755         21.57         23         0.1           713.5         23825         21.50         23         0.1           713.5         23825         21.50         23         0.1           713.5         23825         21.56         23         0.1           713.5         23825         21.56         23         0.1           713.5         23825         21.58         23         0.1           713.5         23825         21.58         23         0.1           713.5         23825         21.55         23         0.1           713.5         23825         21.55         23         0.1           713.5         238					713.5	23825	22.48	24	0
OPSK         713.5         23825         22.43         24         0           24         710.5         23755         22.58         24         0           713.5         23825         22.60         24         0           713.5         23825         22.60         24         0           713.5         23825         22.60         24         0           710         233790         21.61         23         0.1           710         233790         21.61         23         0.1           710         23790         21.61         23         0.1           710         23790         21.61         23         0.1           710         23790         21.58         23         0.1           711         23790         21.58         23         0.1           713.5         23825         21.64         23         0.1           711         23790         21.65         23         0.1           713.5         23825         21.64         23         0.1           713.5         23825         21.64         23         0.1           713.5         23825         21.62 <td< td=""><td></td><td></td><td></td><td></td><td></td><td>23755</td><td>22.48</td><td>24</td><td>0</td></td<>						23755	22.48	24	0
OPSK         706.5         23755         22.58         24         0           710         23790         22.60         24         0           713.5         23825         22.60         24         0           713.5         23825         21.57         23         0.1           713.5         23825         21.50         23         0.1           713.5         23825         21.50         23         0.1           713.5         23825         21.50         23         0.1           710         23790         21.58         23         0.1           713.5         23825         21.50         23         0.1           710         23790         21.58         23         0.1           710         23790         21.65         23         0.1           713.5         23825         21.64         23         0.1           713.5         23825         21.64         23         0.1           713.5         23825         21.64         23         0.1           713.5         23825         21.64         23         0.1           713.5         23825         21.64         23			1 RB	12		23790	22.51		0
3         24         710         23790         22.61         24         0           713.5         23825         22.60         24         0           713.5         23825         21.57         23         0.1           710         23790         21.61         23         0.1           713.5         23825         21.50         23         0.1           713.5         23825         21.50         23         0.1           706.5         23755         21.56         23         0.1           706.5         23755         21.58         23         0.1           706.5         23755         21.58         23         0.1           705.5         23755         21.58         23         0.1           713.5         23825         21.64         23         0.1           713.5         23825         21.64         23         0.1           713.5         23825         21.64         23         0.1           713.5         23825         21.64         23         0.1           710         23790         21.98         23         0.1           710.5         23825         21.60									0
Image: space of the system of the s								24	0
5				24				24	0
QPSK         0         710         23790         21.61         23         0-1           713.5         23825         21.50         23         0-1           710         23790         21.68         23         0-1           713.5         23825         21.50         23         0-1           706.5         23755         21.58         23         0-1           713.5         23825         21.54         23         0-1           713.5         23825         21.54         23         0-1           713.5         23825         21.64         23         0-1           713.5         23825         21.64         23         0-1           713.5         23825         21.64         23         0-1           713.5         23825         21.64         23         0-1           713.5         23825         21.64         23         0-1           713.5         23825         21.64         23         0-1           713.5         23825         21.64         23         0-1           713.5         23825         21.64         23         0-1           713.5         23825         21.64							22.60	24	0
5         713.5         23825         21.50         23         0-1           12 RB         6         710.5         23755         21.56         23         0-1           713.5         23825         21.56         23         0-1         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0         0 <t< td=""><td></td><td></td><td></td><td rowspan="3">0</td><td></td><td></td><td>21.57</td><td>23</td><td>0-1</td></t<>				0			21.57	23	0-1
5         12 RB         6 12 RB         706.5 6 6 13         23755 710         21.56 23755         21.54 21.54         23 23         0-1 0-1           713.5         23825         21.54         23         0-1           710         23790         21.58         23         0-1           713.5         23825         21.54         23         0-1           710         23790         21.65         23         0-1           713.5         23825         21.64         23         0-1           713.5         23825         21.64         23         0-1           713.5         23825         21.64         23         0-1           710         23790         21.55         23         0-1           7110         23790         21.64         23         0-1           713.5         23825         21.64         23         0-1           713.5         23825         21.64         23         0-1           713.5         23825         21.64         23         0-1           713.5         23825         21.64         23         0-1           713.5         23825         21.64         23         0-1 </td <td></td> <td>QPSK</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>-</td>		QPSK							-
1         RB         6         710         23790         21.58         23         0-1           713.5         23825         21.54         23         0-1           13         706.5         23755         21.58         23         0-1           710         23790         21.65         23         0-1           713.5         23825         21.64         23         0-1           713.5         23825         21.64         23         0-1           710         23790         21.55         23         0-1           710         23790         21.55         23         0-1           710         23790         21.55         23         0-1           710         23790         21.55         23         0-1           713.5         23825         21.64         23         0-1           713.5         23825         21.60         23         0-1           713.5         23825         21.60         23         0-1           713.5         23825         21.60         23         0-1           713.5         23825         21.60         23         0-1           713.5 <td< td=""><td></td><td></td><td></td><td></td><td></td><td></td><td>-</td><td>-</td></td<>								-	-
5         713.5         23825         21.54         23         0-1           13         706.5         23755         21.58         23         0-1           713.5         23825         21.64         23         0-1           713.5         23825         21.64         23         0-1           713.5         23755         21.55         23         0-1           710         23790         21.55         23         0-1           710         23790         21.55         23         0-1           713.5         23825         21.64         23         0-1           713.5         23825         21.64         23         0-1           713.5         23825         21.64         23         0-1           713.5         23825         21.66         23         0-1           713.5         23825         21.64         23         0-1           713.5         23825         21.64         23         0-1           713.5         23825         21.64         23         0-1           713.5         23825         21.64         23         0-1           713.5         23825         21.64 </td <td rowspan="4"></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>									
5         706.5         23755         21.58         23         0-1           13         710         23790         21.65         23         0-1           713.5         23825         21.64         23         0-1           710         23790         21.55         23         0-1           710         23755         21.55         23         0-1           710         23790         21.55         23         0-1           710         23790         21.55         23         0-1           713.5         23825         21.64         23         0-1           713.5         23825         21.64         23         0-1           710         23790         21.98         23         0-1           713.5         23825         21.64         23         0-1           710         23790         22.09         23         0-1           713.5         23825         21.64         23         0-1           710         23790         22.09         23         0-1           713.5         23825         21.64         23         0-1           713.5         23825         21.64			12 RB	6					
13         710         23790         21.65         23         0-1           713.5         23825         21.64         23         0-1           706.5         23755         21.55         23         0-1           706.5         23790         21.65         23         0-1           706.5         23790         21.55         23         0-1           713.5         23825         21.64         23         0-1           713.5         23825         21.64         23         0-1           706.5         23755         21.42         23         0-1           713.5         23825         21.64         23         0-1           713.5         23825         21.66         23         0-1           713.5         23825         21.66         23         0-1           713.5         23825         21.60         23         0-1           713.5         23825         21.60         23         0-1           713.5         23825         21.60         23         0-1           713.5         23825         21.60         23         0-1           713.5         23825         20.63         2									
5         713.5         23825         21.64         23         0-1           25RB         706.5         23755         21.55         23         0-1           713.5         23825         21.64         23         0-1           710         23790         21.55         23         0-1           710         23790         21.55         23         0-1           710         23790         21.98         23         0-1           710         23790         21.98         23         0-1           710         23790         21.98         23         0-1           711.5         23825         21.64         23         0-1           710         23790         21.98         23         0-1           713.5         23825         21.60         23         0-1           713.5         23825         21.60         23         0-1           713.5         23825         21.64         23         0-1           713.5         23825         21.64         23         0-1           710         23790         22.07         23         0-1           710         23755         20.43									-
5         706.5         23755         21.55         23         0-1           710         23790         21.55         23         0-1           713.5         23825         21.64         23         0-1           710         23790         21.55         23         0-1           713.5         23825         21.64         23         0-1           710         23790         21.98         23         0-1           710         23790         21.98         23         0-1           710         23790         21.98         23         0-1           713.5         23825         21.66         23         0-1           713.5         23825         21.56         23         0-1           713.5         23825         21.60         23         0-1           713.5         23825         21.60         23         0-1           713.5         23825         21.64         23         0-1           713.5         23825         20.61         22         0-2           710         23790         20.55         22         0-2           713.5         23825         20.63         22				13					
5         25RB         710         23790         21.55         23         0.1           713.5         23825         21.64         23         0.1           713.5         23825         21.64         23         0.1           710         23790         21.98         23         0.1           710         23790         21.98         23         0.1           710         23790         21.98         23         0.1           710         23790         21.98         23         0.1           713.5         23825         21.60         23         0.1           713.5         23825         21.60         23         0.1           713.5         23825         21.60         23         0.1           713.5         23825         21.64         23         0.1           713.5         23825         21.64         23         0.1           713.5         23825         21.64         23         0.1           713.5         23825         21.64         23         0.1           713.5         23825         22.07         23         0.1           713.5         23825         20.63									-
5         713.5         23825         21.64         23         0-1           713.5         23755         21.42         23         0-1           710         23790         21.98         23         0-1           713.5         23825         21.56         23         0-1           713.5         23825         21.56         23         0-1           713.5         23825         21.56         23         0-1           710         23790         22.09         23         0-1           713.5         23825         21.60         23         0-1           713.5         23825         21.60         23         0-1           710         23790         22.09         23         0-1           711.5         23825         21.64         23         0-1           713.5         23825         20.62         23         0-1           713.5         23825         20.43         22         0-2           713.5         23825         20.43         22         0-2           713.5         23825         20.58         22         0-2           713.5         23825         20.65         22 <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>-</td>									-
5         706.5         23755         21.42         23         0-1           710         23790         21.98         23         0-1           710         23790         21.98         23         0-1           713.5         23825         21.56         23         0-1           710         23790         22.09         23         0-1           710         23790         22.09         23         0-1           713.5         23825         21.60         23         0-1           713.5         23825         21.60         23         0-1           713.5         23825         21.60         23         0-1           713.5         23825         21.60         23         0-1           713.5         23825         21.64         23         0-1           710         23790         22.07         23         0-1           713.5         23825         20.43         22         0-2           710         23790         20.55         22         0-2           713.5         23825         20.63         22         0-2           713.5         23825         20.63         22			25RB						-
1 RB         0         710         23790         21.98         23         0-1           713.5         23825         21.56         23         0-1           710         23790         22.09         23         0-1           713.5         23825         21.60         23         0-1           710         23790         22.09         23         0-1           713.5         23825         21.60         23         0-1           710         23790         22.09         23         0-1           713.5         23825         21.60         23         0-1           710         23790         22.07         23         0-1           713.5         23825         22.22         23         0-1           713.5         23825         20.43         22         0-2           710         23790         20.55         22         0-2           713.5         23825         20.63         22         0-2           710         23790         20.64         22         0-2           713.5         23825         20.63         22         0-2           713.5         23825         20.63	5								
16-QAM         178.5         23825         21.56         23         0-1           1 RB         12         706.5         23755         21.79         23         0-1           710         23790         22.09         23         0-1           713.5         23825         21.60         23         0-1           713.5         23825         21.60         23         0-1           713.5         23825         21.64         23         0-1           706.5         23750         22.07         23         0-1           713.5         23825         22.22         23         0-1           713.5         23825         22.22         23         0-1           713.5         23825         20.43         22         0-2           713.5         23825         20.43         22         0-2           713.5         23825         20.58         22         0-2           12 RB         6         710         23790         20.64         22         0-2           713.5         23825         20.63         22         0-2           713.5         23825         20.64         22         0-2      <									-
1 RB         1 RB         12         706.5         23755         21.79         23         0-1           710         23790         22.09         23         0-1           713.5         23825         21.60         23         0-1           706.5         23755         21.64         23         0-1           706.5         23755         21.64         23         0-1           706.5         23755         21.64         23         0-1           706.5         23755         22.07         23         0-1           706.5         23755         20.43         22         0-2           710         23790         20.55         22         0-2           710         23790         20.55         22         0-2           713.5         23825         20.65         22         0-2           710         23790         20.64         22         0-2           713.5         23825         20.63         22         0-2           713.5         23825         20.63         22         0-2           713.5         23825         20.64         22         0-2           710         23790				0	-			-	-
1 RB         12         710         23790         22.09         23         0-1           713.5         23825         21.60         23         0-1           706.5         23755         21.64         23         0-1           24         710         23790         22.07         23         0-1           710         23790         22.07         23         0-1           710         23790         22.07         23         0-1           710         23790         22.07         23         0-1           713.5         23825         22.22         23         0-1           710         23790         20.55         22         0-2           713.5         23825         20.58         22         0-2           713.5         23825         20.65         22         0-2           713.5         23825         20.65         22         0-2           713.5         23825         20.63         22         0-2           713.5         23825         20.63         22         0-2           13         710         23790         20.64         22         0-2           713.5         <									-
16-QAM         12 RB         12 RB         713.5         23825         21.60         23         0-1           706.5         23755         21.64         23         0-1           713.5         23825         22.07         23         0-1           713.5         23825         22.22         23         0-1           713.5         23825         22.22         23         0-1           710         23790         20.55         22         0-2           710         23790         20.55         22         0-2           713.5         23825         20.58         22         0-2           713.5         23825         20.65         22         0-2           710         23790         20.64         22         0-2           713.5         23825         20.63         22         0-2           713.5         23825         20.64         22         0-2           713.5         23825         20.58         22         0-2           713.5         23825         20.58         22         0-2           713.5         23825         20.58         22         0-2           713.5         2			1 55	10					-
16-QAM         706.5         23755         21.64         23         0-1           16-QAM         710         23790         22.07         23         0-1           16-QAM         710         23790         22.07         23         0-1           112 RB         706.5         23755         20.43         22         0-2           710         23790         20.55         22         0-2           713.5         23825         20.58         22         0-2           713.5         23825         20.65         22         0-2           713.5         23825         20.65         22         0-2           710         23790         20.64         22         0-2           713.5         23825         20.63         22         0-2           713.5         23825         20.63         22         0-2           713         710         23790         20.64         22         0-2           13         710         23790         20.64         22         0-2           713.5         23825         20.58         22         0-2           713.5         23825         20.58         22         0-2			1 RB	12				-	
16-QAM         24         710         23790         22.07         23         0-1           16-QAM         0         713.5         23825         22.22         23         0-1           16-QAM         0         710         23790         20.55         22         0-2           710         23790         20.55         22         0-2           710         23790         20.55         22         0-2           713.5         23825         20.68         22         0-2           713.5         23755         20.65         22         0-2           710         23790         20.64         22         0-2           713.5         23825         20.63         22         0-2           713.5         23825         20.63         22         0-2           713.5         23825         20.63         22         0-2           13         710         23790         20.64         22         0-2           713.5         23825         20.58         22         0-2           713.5         23825         20.58         22         0-2           713.5         23825         20.58         22								-	-
16-QAM         713.5         23825         22.22         23         0-1           16-QAM         0         713.5         23755         20.43         22         0-2           710         23790         20.55         22         0-2           713.5         23825         20.65         22         0-2           713.5         23825         20.65         22         0-2           710         23790         20.65         22         0-2           710         23790         20.64         22         0-2           713.5         23825         20.63         22         0-2           713.5         23825         20.63         22         0-2           713.5         23825         20.63         22         0-2           713.5         23825         20.64         22         0-2           13         710         23790         20.64         22         0-2           713.5         23825         20.58         22         0-2           713.5         23825         20.58         22         0-2           713.5         23825         20.58         22         0-2           25RB				0.4					
16-QAM         706.5         23755         20.43         22         0-2           710         23790         20.55         22         0-2           713.5         23825         20.65         22         0-2           710         23790         20.55         22         0-2           713.5         23825         20.65         22         0-2           710         23790         20.64         22         0-2           713.5         23825         20.63         22         0-2           713.5         23825         20.63         22         0-2           713.5         23825         20.63         22         0-2           713.5         23825         20.63         22         0-2           13         710         23790         20.64         22         0-2           13         710         23790         20.64         22         0-2           713.5         23825         20.58         22         0-2           713.5         23825         20.58         22         0-2           25RB         710         23790         20.59         22         0-2				24					
16-QAM         0         710         23790         20.55         22         0-2           713.5         23825         20.58         22         0-2           713.5         23825         20.65         22         0-2           710         23790         20.65         22         0-2           710         23790         20.64         22         0-2           713.5         23825         20.63         22         0-2           710         23790         20.64         22         0-2           713.5         23825         20.63         22         0-2           713.5         23755         20.71         22         0-2           13         710         23790         20.64         22         0-2           713.5         23825         20.58         22         0-2           713.5         23825         20.58         22         0-2           713.5         23825         20.58         22         0-2           710         23790         20.59         22         0-2           25RB         710         23790         20.59         22         0-2									
12 RB         713.5         23825         20.58         22         0-2           12 RB         6         710         23790         20.64         22         0-2           713.5         23825         20.63         22         0-2           713.5         23825         20.63         22         0-2           713.5         23825         20.63         22         0-2           713.5         23825         20.63         22         0-2           13         706.5         23755         20.71         22         0-2           13         710         23790         20.64         22         0-2           713.5         23825         20.58         22         0-2           713.5         23825         20.58         22         0-2           713.5         23825         20.58         22         0-2           25RB         710         23790         20.59         22         0-2		16-0AM		0					
12 RB         706.5         23755         20.65         22         0-2           710         23790         20.64         22         0-2           713.5         23825         20.63         22         0-2           713.5         23755         20.63         22         0-2           13         706.5         23755         20.71         22         0-2           13         710         23790         20.64         22         0-2           713.5         23825         20.58         22         0-2           713.5         23825         20.58         22         0-2           713.5         23825         20.58         22         0-2           713.5         23825         20.58         22         0-2           25RB         710         23790         20.59         22         0-2									
12 RB         6         710         23790         20.64         22         0-2           713.5         23825         20.63         22         0-2           13         706.5         23755         20.71         22         0-2           13         710         23790         20.64         22         0-2           13         710         23790         20.64         22         0-2           713.5         23825         20.58         22         0-2           706.5         23755         20.58         22         0-2           25RB         710         23790         20.59         22         0-2									
713.5         23825         20.63         22         0-2           13         706.5         23755         20.71         22         0-2           13         710         23790         20.64         22         0-2           713.5         23825         20.58         22         0-2           713.5         23825         20.58         22         0-2           706.5         23755         20.58         22         0-2           25RB         710         23790         20.59         22         0-2			12 PB	6					
706.5         23755         20.71         22         0-2           13         710         23790         20.64         22         0-2           713.5         23825         20.58         22         0-2           706.5         23755         20.58         22         0-2           706.5         23755         20.58         22         0-2           25RB         710         23790         20.59         22         0-2									
13         710         23790         20.64         22         0-2           713.5         23825         20.58         22         0-2           706.5         23755         20.58         22         0-2           25RB         710         23790         20.59         22         0-2									
713.5         23825         20.58         22         0-2           706.5         23755         20.58         22         0-2           25RB         710         23790         20.59         22         0-2		25RB		13					
706.5         23755         20.58         22         0-2           25RB         710         23790         20.59         22         0-2									
25RB 710 23790 20.59 22 0-2				<u> </u>					
			RB						
			20KR		713.5	23825	20.60	22	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

```
www.tw.sgs.com
```





				FDD Band 1	7			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Pow er + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)
				706.5	23755	20.73	22	0-2
			0	710	23790	21.31	22	0-2
				713.5	23825	20.85	22	0-2
				706.5	23755	21.15	22	0-2
		1 RB	12	710	23790	21.47	22	0-2
				713.5	23825	20.99	22	0-2
				706.5	23755	20.87	22	0-2
			24	710	23790	21.43	22	0-2
				713.5	23825	21.57	22	0-2
			0	706.5	23755	19.77	21	0-3
5	64-QAM			710	23790	19.90	21	0-3
				713.5	23825	19.80	21	0-3
				706.5	23755	19.88	21	0-3
		12 RB	6	710	23790	20.02	21	0-3
				713.5	23825	19.88	21	0-3
				706.5	23755	19.96	21	0-3
			13	710	23790	19.85	21	0-3
				713.5	23825	19.82	21	0-3
			-	706.5	23755	19.84	21	0-3
		25	RB	710	23790	19.90	21	0-3
				713.5	23825	19.89	21	0-3

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



### LTE TDD Band 38 / Band 41 power table:


TDD Band 38										
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)		
				2580	37850	23.06	24	0		
			0	2595	38000	23.10	24	0		
				2610	38150	23.03	24	0		
				2580	37850	22.93	24	0		
		1 RB	50	2595	38000	23.22	24	0		
				2610	38150	22.98	24	0		
				2580	37850	23.01	24	0		
			99	2595	38000	23.02	24	0		
				2610	38150	22.93	24	0		
				2580	37850	22.26	23	0-1		
	QPSK	QPSK 50 RB	0	2595	38000	22.27	23	0-1		
				2610	38150	22.30	23	0-1		
				2580	37850	22.29	23	0-1		
			25	2595	38000	22.25	23	0-1		
				2610	38150	22.14	23	0-1		
				2580	37850	22.17	23	0-1		
			50	2595	38000	22.22	23	0-1		
				2610	38150	22.28	23	0-1		
				2580	37850	22.26	23	0-1		
		100	)RB	2595	38000	22.36	23	0-1		
20				2610	38150	22.15	23	0-1		
20			0	2580	37850	22.40	23	0-1		
				2595	38000	22.43	23	0-1		
				2610	38150	22.44	23	0-1		
				2580	37850	22.55	23	0-1		
		1 RB	50	2595	38000	22.45	23	0-1		
				2610	38150	22.37	23	0-1		
				2580	37850	22.33	23	0-1		
			99	2595	38000	22.39	23	0-1		
				2610	38150	22.36	23	0-1		
				2580	37850	21.20	22	0-2		
	16-QAM		0	2595	38000	21.36	22	0-2		
				2610	38150	21.33	22	0-2		
				2580	37850	21.35	22	0-2		
		50 RB	25	2595	38000	21.32	22	0-2		
				2610	38150	21.24	22	0-2		
				2580	37850	21.27	22	0-2		
			50	2595	38000	21.42	22	0-2		
				2610	38150	21.24	22	0-2		
				2580	37850	21.23	22	0-2		
		100RB		2595	38000	21.22	22	0-2		
				2610	38150	21.19	22	0-2		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

f (886-2) 2298-0488





	TDD Band 38												
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)					
				2580	37850	21.53	22	0-2					
			0	2595	38000	21.66	22	0-2					
				2610	38150	21.58	22	0-2					
			50	2580	37850	21.82	22	0-2					
		1 RB		2595	38000	21.67	22	0-2					
		-		2610	38150	21.54	22	0-2					
				2580	37850	21.59	22	0-2					
			99	2595	38000	21.52	22	0-2					
				2610	38150	21.59	22	0-2					
			0	2580	37850	20.45	21	0-3					
20	64-QAM			2595	38000	20.62	21	0-3					
				2610	38150	20.46	21	0-3					
				2580	37850	20.55	21	0-3					
		50 RB	25	2595	38000	20.48	21	0-3					
				2610	38150	20.44	21	0-3					
				2580	37850	20.51	21	0-3					
			50	2595	38000	20.62	21	0-3					
	100F			2610	38150	20.51	21	0-3					
			2580	37850	20.52	21	0-3						
		RB	2595	38000	20.43	21	0-3						
				2610	38150	20.41	21	0-3					

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

```
www.tw.sgs.com
```



#### Report No. : E5/2019/C0017 Page: 79 of 261

				TDD Band 38				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)
				2577.5	37825	23.00	24	0
			0	2595	38000	23.05	24	0
				2612.5	38175	23.04	24	0
				2577.5	37825	23.10	24	0
		1 RB	36	2595	38000	23.18	24	0
				2612.5	38175	23.14	24	0
				2577.5	37825	22.95	24	0
			74	2595	38000	23.05	24	0
				2612.5	38175	22.97	24	0
				2577.5	37825	22.24	23	0-1
	QPSK		0	2595	38000	22.27	23	0-1
				2612.5	38175	22.24	23	0-1
		36 RB		2577.5	37825	22.27	23	0-1
			18	2595	38000	22.25	23	0-1
				2612.5	38175	22.21	23	0-1
				2577.5	37825	22.16	23	0-1
			37	2595	38000	22.28	23	0-1
				2612.5	38175	22.19	23	0-1
				2577.5	37825	22.23	23	0-1
		75RB		2595	38000	22.26	23	0-1
15				2612.5	38175	22.17	23	0-1
10				2577.5	37825	22.26	23	0-1
			0	2595	38000	22.45	23	0-1
				2612.5	38175	22.37	23	0-1
				2577.5	37825	22.34	23	0-1
		1 RB	36	2595	38000	22.39	23	0-1
				2612.5	38175	22.38	23	0-1
				2577.5	37825	22.30	23	0-1
			74	2595	38000	22.44	23	0-1
		-		2612.5	38175	22.32	23	0-1
				2577.5	37825	21.24	22	0-2
	16-QAM		0	2595	38000	21.29	22	0-2
				2612.5	38175	21.16	22	0-2
				2577.5	37825	21.23	22	0-2
		36 RB	18	2595	38000	21.18	22	0-2
				2612.5	38175	21.22	22	0-2
				2577.5	37825	21.17	22	0-2
			37	2595	38000	21.29	22	0-2
				2612.5	38175	21.20	22	0-2
		75RB		2577.5	37825	21.25	22	0-2
				2595	38000	21.27	22	0-2
				2612.5	38175	21.16	22	0-2


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

f (886-2) 2298-0488

www.tw.sgs.com





	TDD Band 38											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)				
				2577.5	37825	21.56	22	0-2				
			0	2595	38000	21.71	22	0-2				
				2612.5	38175	21.63	22	0-2				
				2577.5	37825	21.56	22	0-2				
		1 RB	36	2595	38000	21.65	22	0-2				
				2612.5	38175	21.61	22	0-2				
				2577.5	37825	21.57	22	0-2				
			74	2595	38000	21.68	22	0-2				
				2612.5	38175	21.56	22	0-2				
				2577.5	37825	20.49	21	0-3				
15	64-QAM		0	2595	38000	20.41	21	0-3				
				2612.5	38175	20.31	21	0-3				
				2577.5	37825	20.39	21	0-3				
		36 RB	18	2595	38000	20.44	21	0-3				
				2612.5	38175	20.46	21	0-3				
				2577.5	37825	20.45	21	0-3				
			37	2595	38000	20.43	21	0-3				
				2612.5	38175	20.38	21	0-3				
			•	2577.5	37825	20.45	21	0-3				
		75	RB	2595	38000	20.41	21	0-3				
				2612.5	38175	20.33	21	0-3				

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



#### Report No. : E5/2019/C0017 Page: 81 of 261

				TDD Band 38				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)
				2575	37800	22.80	24	0
			0	2595	38000	22.91	24	0
				2615	38200	22.95	24	0
				2575	37800	22.70	24	0
		1 RB	25	2595	38000	22.83	24	0
				2615	38200	22.87	24	0
				2575	37800	22.93	24	0
			49	2595	38000	22.91	24	0
				2615	38200	22.87	24	0
				2575	37800	21.90	23	0-1
	QPSK		0	2595	38000	22.06	23	0-1
				2615	38200	22.05	23	0-1
				2575	37800	22.11	23	0-1
		25 RB	12	2595	38000	22.03	23	0-1
				2615	38200	22.09	23	0-1
				2575	37800	22.00	23	0-1
			25	2595	38000	22.12	23	0-1
				2615	38200	22.05	23	0-1
				2575	37800	22.04	23	0-1
		50	RB	2595	38000	22.05	23	0-1
10				2615	38200	22.02	23	0-1
10				2575	37800	22.69	23	0-1
			0	2595	38000	22.27	23	0-1
				2615	38200	22.19	23	0-1
				2575	37800	22.17	23	0-1
		1 RB	25	2595	38000	22.20	23	0-1
				2615	38200	22.15	23	0-1
				2575	37800	22.14	23	0-1
			49	2595	38000	22.15	23	0-1
				2615	38200	22.15	23	0-1
				2575	37800	21.12	22	0-2
	16-QAM		0	2595	38000	20.94	22	0-2
				2615	38200	21.07	22	0-2
				2575	37800	21.12	22	0-2
		25 RB	12	2595	38000	21.16	22	0-2
				2615	38200	21.10	22	0-2
				2575	37800	20.95	22	0-2
			25	2595	38000	21.13	22	0-2
				2615	38200	21.07	22	0-2
				2575	37800	21.02	22	0-2
		50	RB	2595	38000	21.15	22	0-2
				2615	38200	21.10	22	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

f (886-2) 2298-0488

www.tw.sgs.com

Member of SGS Group





	TDD Band 38											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)				
				2575	37800	21.87	22	0-2				
			0	2595	38000	21.44	22	0-2				
				2615	38200	21.49	22	0-2				
				2575	37800	21.39	22	0-2				
		1 RB	25	2595	38000	21.36	22	0-2				
				2615	38200	21.32	22	0-2				
				2575	37800	21.32	22	0-2				
			49	2595	38000	21.29	22	0-2				
				2615	38200	21.39	22	0-2				
			0	2575	37800	20.29	21	0-3				
10	64-QAM			2595	38000	20.15	21	0-3				
				2615	38200	20.30	21	0-3				
				2575	37800	20.31	21	0-3				
		25 RB	12	2595	38000	20.30	21	0-3				
				2615	38200	20.34	21	0-3				
				2575	37800	20.08	21	0-3				
			25	2595	38000	20.32	21	0-3				
				2615	38200	20.37	21	0-3				
			2575	37800	20.24	21	0-3					
		50R	RB	2595	38000	20.43	21	0-3				
				2615	38200	20.25	21	0-3				

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



#### Report No. : E5/2019/C0017 Page: 83 of 261


				TDD Band 38				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)
				2572.5	37775	22.87	24	0
			0	2595	38000	22.92	24	0
				2617.5	38225	22.91	24	0
				2572.5	37775	22.97	24	0
		1 RB	12	2595	38000	23.05	24	0
				2617.5	38225	23.01	24	0
				2572.5	37775	22.82	24	0
			24	2595	38000	22.92	24	0
				2617.5	38225	22.84	24	0
				2572.5	37775	22.11	23	0-1
	QPSK		0	2595	38000	22.14	23	0-1
				2617.5	38225	22.11	23	0-1
		12 RB	6	2572.5	37775	22.14	23	0-1
				2595	38000	22.12	23	0-1
				2617.5	38225	22.08	23	0-1
				2572.5	37775	22.03	23	0-1
			13	2595	38000	22.15	23	0-1
				2617.5	38225	22.06	23	0-1
				2572.5	37775	22.10	23	0-1
		25	RB	2595	38000	22.13	23	0-1
5				2617.5	38225	22.04	23	0-1
0				2572.5	37775	22.13	23	0-1
			0	2595	38000	22.32	23	0-1
				2617.5	38225	22.24	23	0-1
				2572.5	37775	22.21	23	0-1
		1 RB	12	2595	38000	22.26	23	0-1
				2617.5	38225	22.25	23	0-1
				2572.5	37775	22.17	23	0-1
			24	2595	38000	22.31	23	0-1
				2617.5	38225	22.19	23	0-1
				2572.5	37775	21.11	22	0-2
	16-QAM		0	2595	38000	21.16	22	0-2
				2617.5	38225	21.03	22	0-2
				2572.5	37775	21.10	22	0-2
		12 RB	6	2595	38000	21.05	22	0-2
				2617.5	38225	21.09	22	0-2
				2572.5	37775	21.04	22	0-2
			13	2595	38000	21.16	22	0-2
				2617.5 2572.5	38225	21.07	22	0-2
			I		37775	21.12	22	0-2
		25RE	RB	2595	38000	21.14	22	0-2
				2617.5	38225	21.03	22	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd. t (886-2) 2299-3279


www.tw.sgs.com





				TDD Band 38				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)
				2572.5	37775	21.37	22	0-2
			0	2595	38000	21.60	22	0-2
				2617.5	38225	21.38	22	0-2
			12	2572.5	37775	21.41	22	0-2
		1 RB		2595	38000	21.50	22	0-2
				2617.5	38225	21.39	22	0-2
				2572.5	37775	21.33	22	0-2
			24	2595	38000	21.46	22	0-2
				2617.5	38225	21.36	22	0-2
			0	2572.5	37775	20.29	21	0-3
5	64-QAM			2595	38000	20.36	21	0-3
				2617.5	38225	20.27	21	0-3
				2572.5	37775	20.27	21	0-3
		12 RB	6	2595	38000	20.19	21	0-3
				2617.5	38225	20.33	21	0-3
				2572.5	37775	20.22	21	0-3
			13	2595	38000	20.43	21	0-3
				2617.5	38225	20.17	21	0-3
				2572.5	37775	20.27	21	0-3
		25	RB	2595	38000	20.25	21	0-3
				2617.5	38225	20.26	21	0-3

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.






TDD Band 41										
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)		
				2506	39750	23.40	24.5	0		
				2549.5	40185	23.41	24.5	0		
			0	2593	40620	23.57	24.5	0		
				2636.5	41055	23.43	24.5	0		
				2680	41490	23.35	24.5	0		
				2506	39750	23.29	24.5	0		
				2549.5	40185	23.39	24.5	0		
		1 RB	50	2593	40620	23.46	24.5	0		
				2636.5	41055	23.61	24.5	0		
				2680	41490	23.74	24.5	0		
			2506	39750	23.26	24.5	0			
			99	2549.5	40185	23.40	24.5	0		
				2593	40620	23.58	24.5	0		
				2636.5	41055	23.10	24.5	0		
				2680	41490	23.61	24.5	0		
			0	2506	39750	22.54	23.5	0-1		
				2549.5	40185	22.56	23.5	0-1		
20	QPSK			2593	40620	22.78	23.5	0-1		
				2636.5	41055	22.84	23.5	0-1		
				2680	41490	22.88	23.5	0-1		
				2506	39750	22.53	23.5	0-1		
				2549.5	40185	22.67	23.5	0-1		
		50 RB	25	2593	40620	22.80	23.5	0-1		
				2636.5	41055	22.87	23.5	0-1		
				2680	41490	22.93	23.5	0-1		
				2506	39750	22.55	23.5	0-1		
				2549.5	40185	22.64	23.5	0-1		
			50	2593	40620	22.77	23.5	0-1		
				2636.5	41055	22.64	23.5	0-1		
				2680	41490	22.84	23.5	0-1		
			-	2506	39750	22.59	23.5	0-1		
				2549.5	40185	22.74	23.5	0-1		
		100	RB	2593	40620	22.78	23.5	0-1		
				2636.5	41055	22.68	23.5	0-1		
				2680	41490	22.75	23.5	0-1		

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

f (886-2) 2298-0488






TDD Band 41										
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)		
				2506	39750	22.69	23.5	0-1		
				2549.5	40185	22.80	23.5	0-1		
			0	2593	40620	23.03	23.5	0-1		
				2636.5	41055	22.82	23.5	0-1		
				2680	41490	22.70	23.5	0-1		
				2506	39750	22.62	23.5	0-1		
				2549.5	40185	22.74	23.5	0-1		
		1 RB	50	2593	40620	22.84	23.5	0-1		
				2636.5	41055	22.97	23.5	0-1		
				2680	41490	23.13	23.5	0-1		
				2506	39750	22.64	23.5	0-1		
			99	2549.5	40185	22.74	23.5	0-1		
				2593	40620	22.92	23.5	0-1		
				2636.5	41055	22.53	23.5	0-1		
				2680	41490	22.92	23.5	0-1		
			0	2506	39750	21.58	22.5	0-2		
				2549.5	40185	21.72	22.5	0-2		
20	16-QAM			2593	40620	21.78	22.5	0-2		
				2636.5	41055	21.84	22.5	0-2		
				2680	41490	21.85	22.5	0-2		
				2506	39750	21.60	22.5	0-2		
				2549.5	40185	21.78	22.5	0-2		
		50 RB	25	2593	40620	21.84	22.5	0-2		
				2636.5	41055	21.89	22.5	0-2		
				2680	41490	22.03	22.5	0-2		
				2506	39750	21.62	22.5	0-2		
				2549.5	40185	21.67	22.5	0-2		
			50	2593	40620	21.80	22.5	0-2		
				2636.5	41055	21.67	22.5	0-2		
				2680	41490	21.94	22.5	0-2		
				2506	39750	21.64	22.5	0-2		
				2549.5	40185	21.72	22.5	0-2		
		100	)RB	2593	40620	21.79	22.5	0-2		
				2636.5	41055	21.76	22.5	0-2		
L				2680	41490	21.81	22.5	0-2		

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.






TDD Band 41										
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)		
				2506	39750	21.88	22.5	0-2		
				2549.5	40185	21.96	22.5	0-2		
			0	2593	40620	22.29	22.5	0-2		
				2636.5	41055	21.94	22.5	0-2		
				2680	41490	21.85	22.5	0-2		
				2506	39750	21.72	22.5	0-2		
				2549.5	40185	21.92	22.5	0-2		
		1 RB	50	2593	40620	21.95	22.5	0-2		
				2636.5	41055	22.17	22.5	0-2		
				2680	41490	22.35	22.5	0-2		
			99	2506	39750	21.92	22.5	0-2		
				2549.5	40185	21.97	22.5	0-2		
				2593	40620	22.03	22.5	0-2		
				2636.5	41055	21.79	22.5	0-2		
				2680	41490	22.19	22.5	0-2		
			0	2506	39750	20.86	21.5	0-3		
				2549.5	40185	20.97	21.5	0-3		
20	64-QAM			2593	40620	20.91	21.5	0-3		
				2636.5	41055	20.94	21.5	0-3		
				2680	41490	21.07	21.5	0-3		
				2506	39750	20.76	21.5	0-3		
				2549.5	40185	20.88	21.5	0-3		
		50 RB	25	2593	40620	21.06	21.5	0-3		
				2636.5	41055	21.06	21.5	0-3		
				2680	41490	21.26	21.5	0-3		
				2506	39750	20.76	21.5	0-3		
				2549.5	40185	20.88	21.5	0-3		
			50	2593	40620	20.96	21.5	0-3		
				2636.5	41055	20.94	21.5	0-3		
				2680	41490	21.24	21.5	0-3		
				2506	39750	20.87	21.5	0-3		
				2549.5	40185	20.94	21.5	0-3		
		100	)RB	2593	40620	20.94	21.5	0-3		
				2636.5	41055	20.90	21.5	0-3		
			-	2680	41490	20.99	21.5	0-3		

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.






TDD Band 41										
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)		
				2503.5	39725	23.35	24.5	0		
				2548.3	40173	23.36	24.5	0		
			0	2593	40620	23.52	24.5	0		
				2637.8	41068	23.38	24.5	0		
				2682.5	41515	23.30	24.5	0		
				2503.5	39725	23.24	24.5	0		
				2548.3	40173	23.36	24.5	0		
		1 RB	36	2593	40620	23.41	24.5	0		
				2637.8	41068	23.56	24.5	0		
				2682.5	41515	23.69	24.5	0		
			74	2503.5	39725	23.21	24.5	0		
				2548.3	40173	23.35	24.5	0		
				2593	40620	23.53	24.5	0		
				2637.8	41068	23.05	24.5	0		
				2682.5	41515	23.56	24.5	0		
				2503.5	39725	22.49	23.5	0-1		
			0	2548.3	40173	22.51	23.5	0-1		
15	QPSK			2593	40620	22.73	23.5	0-1		
				2637.8	41068	22.79	23.5	0-1		
				2682.5	41515	22.83	23.5	0-1		
				2503.5	39725	22.48	23.5	0-1		
				2548.3	40173	22.62	23.5	0-1		
		36 RB	18	2593	40620	22.75	23.5	0-1		
				2637.8	41068	22.82	23.5	0-1		
				2682.5	41515	22.88	23.5	0-1		
				2503.5	39725	22.50	23.5	0-1		
				2548.3	40173	22.59	23.5	0-1		
			37	2593	40620	22.72	23.5	0-1		
				2637.8	41068	22.59	23.5	0-1		
				2682.5	41515	22.79	23.5	0-1		
			-	2503.5	39725	22.54	23.5	0-1		
				2548.3	40173	22.70	23.5	0-1		
		75	RB	2593	40620	22.73	23.5	0-1		
					41068	22.63	23.5	0-1		
				2682.5	41515	22.70	23.5	0-1		

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.






TDD Band 41										
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)		
				2503.5	39725	22.64	23.5	0-1		
				2548.3	40173	22.75	23.5	0-1		
			0	2593	40620	22.98	23.5	0-1		
				2637.8	41068	22.77	23.5	0-1		
				2682.5	41515	22.65	23.5	0-1		
				2503.5	39725	22.57	23.5	0-1		
				2548.3	40173	22.69	23.5	0-1		
		1 RB	36	2593	40620	22.79	23.5	0-1		
				2637.8	41068	22.92	23.5	0-1		
				2682.5	41515	23.08	23.5	0-1		
			74	2503.5	39725	22.59	23.5	0-1		
				2548.3	40173	22.69	23.5	0-1		
				2593	40620	22.87	23.5	0-1		
				2637.8	41068	22.48	23.5	0-1		
				2682.5	41515	22.87	23.5	0-1		
				2503.5	39725	21.53	22.5	0-2		
		6-QAM	0	2548.3	40173	21.67	22.5	0-2		
15	16-QAM			2593	40620	21.73	22.5	0-2		
				2637.8	41068	21.79	22.5	0-2		
				2682.5	41515	21.80	22.5	0-2		
				2503.5	39725	21.55	22.5	0-2		
				2548.3	40173	21.73	22.5	0-2		
		36 RB	18	2593	40620	21.79	22.5	0-2		
				2637.8	41068	21.84	22.5	0-2		
				2682.5	41515	21.98	22.5	0-2		
				2503.5	39725	21.57	22.5	0-2		
				2548.3	40173	21.62	22.5	0-2		
			37	2593	40620	21.75	22.5	0-2		
				2637.8	41068	21.62	22.5	0-2		
				2682.5	41515	21.89	22.5	0-2		
				2503.5	39725	21.59	22.5	0-2		
				2548.3	40173	21.67	22.5	0-2		
		75	RB	2593	40620	21.74	22.5	0-2		
				2637.8	41068	21.71	22.5	0-2		
				2682.5	41515	21.76	22.5	0-2		

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.






TDD Band 41										
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)		
				2503.5	39725	21.78	22.5	0-2		
				2548.3	40173	22.04	22.5	0-2		
			0	2593	40620	22.13	22.5	0-2		
				2637.8	41068	21.99	22.5	0-2		
				2682.5	41515	21.75	22.5	0-2		
				2503.5	39725	21.73	22.5	0-2		
				2548.3	40173	21.94	22.5	0-2		
		1 RB	36	2593	40620	22.01	22.5	0-2		
				2637.8	41068	22.11	22.5	0-2		
				2682.5	41515	22.27	22.5	0-2		
				2503.5	39725	21.72	22.5	0-2		
				2548.3	40173	21.86	22.5	0-2		
			74	2593	40620	22.14	22.5	0-2		
				2637.8	41068	21.76	22.5	0-2		
				2682.5	41515	22.11	22.5	0-2		
				2503.5	39725	20.74	21.5	0-3		
		M	0	2548.3	40173	20.80	21.5	0-3		
15	64-QAM			2593	40620	20.94	21.5	0-3		
				2637.8	41068	21.05	21.5	0-3		
				2682.5	41515	20.91	21.5	0-3		
				2503.5	39725	20.79	21.5	0-3		
				2548.3	40173	20.95	21.5	0-3		
		36 RB	18	2593	40620	20.95	21.5	0-3		
				2637.8	41068	20.94	21.5	0-3		
				2682.5	41515	21.19	21.5	0-3		
				2503.5	39725	20.73	21.5	0-3		
				2548.3	40173	20.75	21.5	0-3		
			37	2593	40620	20.99	21.5	0-3		
				2637.8	41068	20.84	21.5	0-3		
				2682.5	41515	21.10	21.5	0-3		
				2503.5	39725	20.86	21.5	0-3		
				2548.3	40173	20.96	21.5	0-3		
		75	RB	2593	40620	20.85	21.5	0-3		
				2637.8	41068	20.96	21.5	0-3		
L				2682.5	41515	21.03	21.5	0-3		

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

```
www.tw.sgs.com
```






TDD Band 41											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)			
				2501	39700	23.30	24.5	0			
				2547	40160	23.31	24.5	0			
			0	2593	40620	23.47	24.5	0			
				2639	41080	23.33	24.5	0			
				2685	41540	23.25	24.5	0			
				2501	39700	23.19	24.5	0			
				2547	40160	23.31	24.5	0			
		1 RB	25	2593	40620	23.36	24.5	0			
				2639	41080	23.51	24.5	0			
				2685	41540	23.64	24.5	0			
			49	2501	39700	23.16	24.5	0			
				2547	40160	23.30	24.5	0			
				2593	40620	23.48	24.5	0			
				2639	41080	23.00	24.5	0			
				2685	41540	23.51	24.5	0			
			0	2501	39700	22.44	23.5	0-1			
				2547	40160	22.46	23.5	0-1			
10	QPSK			2593	40620	22.68	23.5	0-1			
				2639	41080	22.74	23.5	0-1			
				2685	41540	22.78	23.5	0-1			
				2501	39700	22.43	23.5	0-1			
				2547	40160	22.57	23.5	0-1			
		25 RB	12	2593	40620	22.70	23.5	0-1			
				2639	41080	22.77	23.5	0-1			
				2685	41540	22.83	23.5	0-1			
				2501	39700	22.45	23.5	0-1			
				2547	40160	22.54	23.5	0-1			
			25	2593	40620	22.67	23.5	0-1			
				2639	41080	22.54	23.5	0-1			
				2685	41540	22.74	23.5	0-1			
				2501	39700	22.49	23.5	0-1			
				2547	40160	22.65	23.5	0-1			
		50	RB	2593	40620	22.68	23.5	0-1			
				2639	41080	22.58	23.5	0-1			
				2685	41540	22.65	23.5	0-1			

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.






BW(Mhz)         Modulation         RB Size         RB Offset         Frequency (MHz)         Channel         Conducted pow er (dBm)         Target Power (Mbz) (dBm)         MRR Allow ed per 3GPP(dB)           NMR         NMR         Allow ed per 3GPP(dB)         39700         22.59         23.5         0-1           2547         40160         22.70         23.5         0-1           2633         40620         22.83         23.5         0-1           2685         41540         22.60         23.5         0-1           2685         41540         22.62         23.5         0-1           2685         41540         22.62         23.5         0-1           2593         40620         22.74         23.5         0-1           2593         40620         22.87         23.5         0-1           2593         40620         22.87         23.5         0-1           2501         39700         22.64         23.5         0-1           2503         40620         22.87         23.5         0-1           2503         40620         22.84         23.5         0-1           2593         40620         21.84         22.5         0-2 <th></th> <th colspan="11">TDD Band 41</th>		TDD Band 41										
10         16-QAM         16-QAM         0         2547         40160         22.70         23.5         0-1           10         16-QAM         2639         41080         22.72         23.5         0-1           2639         41080         22.72         23.5         0-1           2685         41540         22.60         23.5         0-1           2685         41540         22.60         23.5         0-1           2501         39700         22.52         23.5         0-1           2533         40620         22.74         23.5         0-1           2593         40620         22.74         23.5         0-1           2639         41080         22.87         23.5         0-1           2685         41540         23.03         23.5         0-1           2593         40620         22.82         23.5         0-1           2583         40620         22.82         23.5         0-1           2685         41540         22.82         23.5         0-1           2685         41600         21.68         22.5         0-2           2639         41080         21.74         22.5	BW(Mhz)	Modulation	RB Size	RB Offset		Channel	pow er	Power + Max. Tolerance	Allow ed per			
10         16-QAM         0         2593         40620         22.93         23.5         0-1           2639         41080         22.72         23.5         0-1           2685         41540         22.60         23.5         0-1           2685         41540         22.64         23.5         0-1           2593         40620         22.74         23.5         0-1           2639         41080         22.64         23.5         0-1           2639         41080         22.87         23.5         0-1           2685         41540         23.03         23.5         0-1           2685         41540         23.03         23.5         0-1           2685         41540         23.03         23.5         0-1           2685         41540         23.03         23.5         0-1           2501         39700         22.82         23.5         0-1           2639         41080         22.43         23.5         0-1           2639         41080         21.62         22.5         0-2           2547         40160         21.62         22.5         0-2           2685					2501	39700	22.59	23.5	0-1			
10         16-QAM         25 RB         2639         41080         22.72         23.5         0-1           2685         41540         22.60         23.5         0-1           2501         39700         22.64         23.5         0-1           2639         41060         22.64         23.5         0-1           2639         41080         22.74         23.5         0-1           2639         41080         22.84         23.5         0-1           2685         41540         23.03         23.5         0-1           2686         41540         23.03         23.5         0-1           2639         41080         22.54         23.5         0-1           2639         41080         22.64         23.5         0-1           2639         41080         22.62         23.5         0-1           2685         41540         22.82         23.5         0-1           2685         41540         22.5         0-2         253         40620         21.48         22.5         0-2           2639         41080         21.74         22.5         0-2         253         40620         21.68         2					2547	40160	22.70	23.5	0-1			
10         16-QAM         26 RB         41540         22.60         23.5         0-1           2501         39700         22.52         23.5         0-1           2547         40160         22.64         23.5         0-1           2639         40620         22.74         23.5         0-1           2639         40620         22.74         23.5         0-1           2685         41540         23.03         23.5         0-1           2685         41540         23.03         23.5         0-1           2685         41540         23.03         23.5         0-1           2593         40620         22.82         23.5         0-1           2639         41060         22.64         23.5         0-1           2639         41060         22.62         23.5         0-1           2639         41060         21.62         22.5         0-2           2639         41080         21.62         22.5         0-2           2639         41080         21.74         22.5         0-2           2639         41080         21.57         22.5         0-2           2639         41080<				0	2593	40620	22.93	23.5	0-1			
10         16-QAM         25 RB         2501         39700         22.52         23.5         0-1           10         16-QAM         25         2593         40620         22.74         23.5         0-1           2685         41540         23.03         23.5         0-1           2685         41540         23.03         23.5         0-1           2685         41540         23.03         23.5         0-1           2685         41540         23.03         23.5         0-1           2685         41540         22.84         23.5         0-1           2685         41600         22.64         23.5         0-1           2685         41600         22.82         23.5         0-1           2685         41540         22.82         23.5         0-1           2685         41540         22.82         23.5         0-1           2685         41540         22.82         23.5         0-2           2639         40620         21.68         22.5         0-2           2639         4080         21.74         22.5         0-2           2639         4080         21.74         22.5 </td <td></td> <td></td> <td rowspan="3"></td> <td></td> <td>2639</td> <td>41080</td> <td>22.72</td> <td>23.5</td> <td>0-1</td>					2639	41080	22.72	23.5	0-1			
10         16-QAM         25 RB         25         2547         40160         22.64         23.5         0-1           2639         40620         22.74         23.5         0-1           2639         41080         22.87         23.5         0-1           2685         41540         23.03         23.5         0-1           2693         40620         22.82         23.5         0-1           2593         40620         22.82         23.5         0-1           2593         40620         22.82         23.5         0-1           2685         41540         22.82         23.5         0-1           2685         41540         22.82         23.5         0-1           2685         41540         22.82         23.5         0-1           2685         41540         21.62         22.5         0-2           2685         41540         21.74         22.5         0-2           2689         41080         21.74         22.5         0-2           2639         41080         21.74         22.5         0-2           2639         40620         21.74         22.5         0-2 <tr< td=""><td></td><td></td><td></td><td>2685</td><td>41540</td><td>22.60</td><td>23.5</td><td>0-1</td></tr<>					2685	41540	22.60	23.5	0-1			
1 RB         25         2593         40620         22.74         23.5         0-1           2639         41080         22.87         23.5         0-1           2685         41540         23.03         23.5         0-1           2685         41540         23.03         23.5         0-1           2501         39700         22.54         23.5         0-1           2593         40620         22.82         23.5         0-1           2639         41080         22.43         23.5         0-1           2639         41080         22.43         23.5         0-1           2685         41540         22.82         23.5         0-1           2685         41540         22.82         23.5         0-1           2685         41540         22.82         23.5         0-2           2593         40620         21.68         22.5         0-2           2593         40620         21.68         22.5         0-2           2639         41080         21.74         22.5         0-2           2639         41080         21.74         22.5         0-2           2593         40620 <td></td> <td></td> <td></td> <td>2501</td> <td>39700</td> <td>22.52</td> <td>23.5</td> <td>0-1</td>					2501	39700	22.52	23.5	0-1			
10         16-QAM         26         2639         41080         22.87         23.5         0-1           2685         41540         23.03         23.5         0-1           2501         39700         22.54         23.5         0-1           2593         40620         22.82         23.5         0-1           2639         41080         22.43         23.5         0-1           2685         41540         22.82         23.5         0-1           2685         41540         22.82         23.5         0-1           2685         41540         22.82         23.5         0-1           2685         41540         22.82         23.5         0-1           2685         41540         22.82         23.5         0-1           2685         41540         22.82         23.5         0-2           2593         40620         21.68         22.5         0-2           2685         41540         21.74         22.5         0-2           2684         41540         21.79         22.5         0-2           2593         40620         21.74         22.5         0-2           2685					2547	40160	22.64	23.5	0-1			
10         16-QAM         26 RB         41540         23.03         23.5         0-1           49         2501         39700         22.54         23.5         0-1           2593         40600         22.64         23.5         0-1           2639         41080         22.43         23.5         0-1           2639         41080         22.43         23.5         0-1           2639         41080         22.43         23.5         0-1           2639         41080         22.43         23.5         0-1           2639         41080         22.43         23.5         0-1           2685         41540         22.82         23.5         0-1           2685         41540         22.82         23.5         0-2           2517         40160         21.62         22.5         0-2           2639         41080         21.74         22.5         0-2           2685         41540         21.75         22.5         0-2           2501         39700         21.50         22.5         0-2           2639         41080         21.79         22.5         0-2           2639 <td></td> <td></td> <td>1 RB</td> <td>25</td> <td>2593</td> <td>40620</td> <td>22.74</td> <td>23.5</td> <td>0-1</td>			1 RB	25	2593	40620	22.74	23.5	0-1			
10         16-QAM         25 RB         2501         39700         22.54         23.5         0-1           10         16-QAM         0         2593         40620         22.82         23.5         0-1           10         16-QAM         0         2685         41080         22.43         23.5         0-1           10         16-QAM         0         2685         41080         22.43         23.5         0-1           10         16-QAM         0         2685         41540         22.82         23.5         0-2           2685         41540         22.82         23.5         0-2         0-2           2501         39700         21.48         22.5         0-2           2593         40620         21.68         22.5         0-2           2639         41080         21.74         22.5         0-2           2685         41540         21.50         22.5         0-2           2593         40620         21.74         22.5         0-2           2593         40620         21.74         22.5         0-2           2593         40620         21.74         22.5         0-2					2639	41080	22.87		0-1			
10         16-QAM         25 RB         12         2517         40160         22.64         23.5         0-1           10         16-QAM         2639         41080         22.43         23.5         0-1           10         16-QAM         16-QAM         2685         41540         22.82         23.5         0-1           10         16-QAM         16-QAM <t< td=""><td></td><td rowspan="2"></td><td></td><td></td><td></td><td></td><td></td><td></td><td>0-1</td></t<>									0-1			
10         16-QAM         49         2593         40620         22.82         23.5         0-1           10         16-QAM         16-QAM         2639         41080         22.43         23.5         0-1           10         16-QAM         16-QAM         2593         40620         21.48         22.5         0-2           2501         39700         21.48         22.5         0-2         2593         40620         21.68         22.5         0-2           2685         41540         21.62         22.5         0-2         2639         41080         21.74         22.5         0-2           2685         41540         21.75         22.5         0-2         2685         41540         21.75         22.5         0-2           2685         41540         21.75         22.5         0-2         2639         41080         21.79         22.5         0-2           2639         41080         21.79         22.5         0-2         2639         41080         21.79         22.5         0-2           2685         41540         21.93         22.5         0-2         2685         41540         21.93         22.5         0-2				49	2501	39700	22.54		0-1			
10         16-QAM         2639         41080         22.43         23.5         0.1           10         16-QAM         2685         41540         22.82         23.5         0.2           2501         39700         21.48         22.5         0.2           2547         40160         21.62         22.5         0.2           2639         41080         21.74         22.5         0.2           2639         41080         21.74         22.5         0.2           2639         41080         21.74         22.5         0.2           2685         41540         21.75         22.5         0.2           2685         41540         21.75         22.5         0.2           2501         39700         21.68         22.5         0.2           2547         40160         21.68         22.5         0.2           2593         40620         21.74         22.5         0.2           2639         41080         21.93         22.5         0.2           2639         41080         21.93         22.5         0.2           2547         40160         21.57         22.5         0.2 <t< td=""><td rowspan="3"></td><td></td><td></td><td></td><td></td><td></td><td></td></t<>												
10         16-QAM         2685         41540         22.82         23.5         0-1           10         16-QAM         0         2501         39700         21.48         22.5         0-2           2593         40620         21.68         22.5         0-2           2685         41540         21.74         22.5         0-2           2639         41080         21.74         22.5         0-2           2639         41080         21.74         22.5         0-2           2685         41540         21.75         22.5         0-2           2685         41540         21.75         22.5         0-2           2685         41540         21.74         22.5         0-2           258         12         2593         40620         21.74         22.5         0-2           2639         41080         21.79         22.5         0-2           2685         41540         21.93         22.5         0-2           2685         41540         21.93         22.5         0-2           2593         40620         21.70         22.5         0-2           2593         40620         21.70									-			
10         16-QAM         25 RB         2501         39700         21.48         22.5         0-2           2593         40620         21.68         22.5         0-2           2639         41080         21.74         22.5         0-2           2639         41080         21.74         22.5         0-2           2639         41080         21.74         22.5         0-2           2685         41540         21.75         22.5         0-2           2685         41540         21.74         22.5         0-2           2685         41540         21.74         22.5         0-2           258B         12         2593         40620         21.74         22.5         0-2           2639         41080         21.79         22.5         0-2           2639         41080         21.79         22.5         0-2           2639         41080         21.57         22.5         0-2           2593         40620         21.70         22.5         0-2           2593         40620         21.70         22.5         0-2           2639         41080         21.57         22.5         0-2<									-			
10         16-QAM         0         2547         40160         21.62         22.5         0-2           2639         40620         21.68         22.5         0-2           2639         41080         21.74         22.5         0-2           2685         41540         21.75         22.5         0-2           2685         41540         21.75         22.5         0-2           2685         41540         21.74         22.5         0-2           258         12         2593         40620         21.68         22.5         0-2           2547         40160         21.68         22.5         0-2           2593         40620         21.74         22.5         0-2           2639         41080         21.79         22.5         0-2           2685         41540         21.93         22.5         0-2           2501         39700         21.52         22.5         0-2           2593         40620         21.70         22.5         0-2           2593         40620         21.67         22.5         0-2           2639         41080         21.57         22.5         0-2									-			
10         16-QAM         0         2593         40620         21.68         22.5         0-2           2639         41080         21.74         22.5         0-2           2685         41540         21.75         22.5         0-2           2501         39700         21.50         22.5         0-2           2501         39700         21.68         22.5         0-2           2501         39700         21.68         22.5         0-2           2593         40620         21.74         22.5         0-2           2593         40620         21.74         22.5         0-2           2639         41080         21.79         22.5         0-2           2639         41080         21.79         22.5         0-2           2639         41080         21.93         22.5         0-2           2685         41540         21.93         22.5         0-2           2593         40620         21.70         22.5         0-2           2593         40620         21.70         22.5         0-2           2639         41080         21.57         22.5         0-2           2639				0								
2639         41080         21.74         22.5         0-2           2685         41540         21.75         22.5         0-2           2685         41540         21.75         22.5         0-2           2501         39700         21.50         22.5         0-2           2501         39700         21.50         22.5         0-2           2593         40620         21.74         22.5         0-2           2639         41080         21.79         22.5         0-2           2639         41080         21.79         22.5         0-2           2639         41080         21.79         22.5         0-2           2685         41540         21.93         22.5         0-2           2685         41540         21.93         22.5         0-2           2501         39700         21.57         22.5         0-2           2593         40620         21.70         22.5         0-2           2639         41080         21.57         22.5         0-2           2639         41080         21.54         22.5         0-2           2685         41540         21.84         22.5<												
2685         41540         21.75         22.5         0-2           25 RB         12         2501         39700         21.50         22.5         0-2           25 RB         12         2593         40620         21.74         22.5         0-2           2639         41080         21.79         22.5         0-2           2639         41080         21.79         22.5         0-2           2639         41080         21.79         22.5         0-2           2685         41540         21.93         22.5         0-2           2685         41540         21.93         22.5         0-2           2685         41540         21.93         22.5         0-2           2685         41540         21.93         22.5         0-2           2501         39700         21.52         22.5         0-2           2593         40620         21.70         22.5         0-2           2685         41540         21.84         22.5         0-2           2685         41540         21.84         22.5         0-2           2685         41540         21.62         22.5         0-2	10	16-QAM						-	-			
25 RB         25 RB         2501         39700         21.50         22.5         0-2           25 RB         12         2593         40620         21.74         22.5         0-2           2639         41080         21.79         22.5         0-2           2639         41080         21.79         22.5         0-2           2639         41080         21.79         22.5         0-2           2685         41540         21.93         22.5         0-2           2685         41540         21.93         22.5         0-2           2547         40160         21.57         22.5         0-2           2547         40160         21.57         22.5         0-2           2547         40160         21.57         22.5         0-2           2593         40620         21.70         22.5         0-2           2639         41080         21.57         22.5         0-2           2685         41540         21.84         22.5         0-2           2685         41540         21.62         22.5         0-2           2501         39700         21.54         22.5         0-2      <												
25 RB         12         2547         40160         21.68         22.5         0-2           2639         41080         21.74         22.5         0-2           2639         41080         21.79         22.5         0-2           2685         41540         21.93         22.5         0-2           2685         41540         21.93         22.5         0-2           2685         41540         21.93         22.5         0-2           2685         41540         21.93         22.5         0-2           2547         40160         21.57         22.5         0-2           2547         40160         21.57         22.5         0-2           2593         40620         21.70         22.5         0-2           2639         41080         21.57         22.5         0-2           2639         41080         21.57         22.5         0-2           2685         41540         21.84         22.5         0-2           2501         39700         21.54         22.5         0-2           2547         40160         21.62         22.5         0-2           2593         40620 <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>												
25 RB         12         2593         40620         21.74         22.5         0-2           2639         41080         21.79         22.5         0-2           2685         41540         21.93         22.5         0-2           2685         41540         21.93         22.5         0-2           2685         41540         21.93         22.5         0-2           2685         41540         21.52         22.5         0-2           2501         39700         21.52         22.5         0-2           2547         40160         21.57         22.5         0-2           2593         40620         21.70         22.5         0-2           2639         41080         21.57         22.5         0-2           2639         41080         21.57         22.5         0-2           2685         41540         21.84         22.5         0-2           2501         39700         21.54         22.5         0-2           2547         40160         21.62         22.5         0-2           2593         40620         21.69         22.5         0-2           2639         41080 <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>-</td>									-			
2639         41080         21.79         22.5         0-2           2685         41540         21.93         22.5         0-2           2685         41540         21.93         22.5         0-2           2501         39700         21.52         22.5         0-2           2547         40160         21.57         22.5         0-2           2593         40620         21.70         22.5         0-2           2639         41080         21.57         22.5         0-2           2639         41080         21.57         22.5         0-2           2639         41080         21.57         22.5         0-2           2639         41080         21.57         22.5         0-2           2685         41540         21.84         22.5         0-2           2501         39700         21.54         22.5         0-2           2547         40160         21.62         22.5         0-2           2593         40620         21.69         22.5         0-2           2639         41080         21.66         22.5         0-2				10								
2685         41540         21.93         22.5         0-2           2501         39700         21.52         22.5         0-2           2547         40160         21.57         22.5         0-2           2593         40620         21.70         22.5         0-2           2639         41080         21.57         22.5         0-2           2639         41080         21.57         22.5         0-2           2639         41080         21.57         22.5         0-2           2685         41540         21.84         22.5         0-2           2685         41540         21.84         22.5         0-2           2501         39700         21.54         22.5         0-2           2547         40160         21.62         22.5         0-2           2547         40160         21.62         22.5         0-2           2593         40620         21.69         22.5         0-2           2639         41080         21.66         22.5         0-2			25 RB	12								
2501         39700         21.52         22.5         0-2           2547         40160         21.57         22.5         0-2           2593         40620         21.70         22.5         0-2           2639         41080         21.57         22.5         0-2           2685         41540         21.84         22.5         0-2           2685         41540         21.84         22.5         0-2           2685         41540         21.54         22.5         0-2           2685         41540         21.84         22.5         0-2           2501         39700         21.54         22.5         0-2           2547         40160         21.62         22.5         0-2           2593         40620         21.69         22.5         0-2           2593         40620         21.69         22.5         0-2           2639         41080         21.66         22.5         0-2								_	-			
25         2547         40160         21.57         22.5         0-2           25         2593         40620         21.70         22.5         0-2           2639         41080         21.57         22.5         0-2           2685         41540         21.84         22.5         0-2           2685         41540         21.84         22.5         0-2           2685         41540         21.54         22.5         0-2           2501         39700         21.54         22.5         0-2           2547         40160         21.62         22.5         0-2           2593         40620         21.69         22.5         0-2           2639         41080         21.66         22.5         0-2												
25         2593         40620         21.70         22.5         0-2           2639         41080         21.57         22.5         0-2           2685         41540         21.84         22.5         0-2           2685         41540         21.54         22.5         0-2           2501         39700         21.54         22.5         0-2           2547         40160         21.62         22.5         0-2           2593         40620         21.69         22.5         0-2           2639         41080         21.66         22.5         0-2												
2639         41080         21.57         22.5         0-2           2685         41540         21.84         22.5         0-2           2501         39700         21.54         22.5         0-2           2501         39700         21.54         22.5         0-2           2547         40160         21.62         22.5         0-2           2639         40620         21.69         22.5         0-2           2639         41080         21.66         22.5         0-2				25								
2685         41540         21.84         22.5         0-2           2501         39700         21.54         22.5         0-2           2547         40160         21.62         22.5         0-2           2593         40620         21.69         22.5         0-2           2639         41080         21.66         22.5         0-2				20								
2501         39700         21.54         22.5         0-2           2547         40160         21.62         22.5         0-2           50RB         2593         40620         21.69         22.5         0-2           2639         41080         21.66         22.5         0-2												
2547         40160         21.62         22.5         0-2           50RB         2593         40620         21.69         22.5         0-2           2639         41080         21.66         22.5         0-2								-	-			
50RB         2593         40620         21.69         22.5         0-2           2639         41080         21.66         22.5         0-2												
2639 41080 21.66 22.5 0-2			50	RB								
			50									
					2685	41540	21.00	22.5	0-2			

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

```
www.tw.sgs.com
```






TDD Band 41										
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)		
				2501	39700	21.78	22.5	0-2		
				2547	40160	21.93	22.5	0-2		
			0	2593	40620	22.12	22.5	0-2		
				2639	41080	21.85	22.5	0-2		
				2685	41540	21.80	22.5	0-2		
				2501	39700	21.75	22.5	0-2		
				2547	40160	21.87	22.5	0-2		
		1 RB	25	2593	40620	21.92	22.5	0-2		
				2639	41080	22.09	22.5	0-2		
				2685	41540	22.18	22.5	0-2		
			49	2501	39700	21.80	22.5	0-2		
				2547	40160	21.84	22.5	0-2		
				2593	40620	21.93	22.5	0-2		
				2639	41080	21.69	22.5	0-2		
				2685	41540	22.01	22.5	0-2		
				2501	39700	20.61	21.5	0-3		
			0	2547	40160	20.81	21.5	0-3		
10	64-QAM			2593	40620	20.93	21.5	0-3		
				2639	41080	20.88	21.5	0-3		
				2685	41540	20.98	21.5	0-3		
				2501	39700	20.64	21.5	0-3		
				2547	40160	20.89	21.5	0-3		
		25 RB	12	2593	40620	20.87	21.5	0-3		
				2639	41080	21.09	21.5	0-3		
				2685	41540	21.07	21.5	0-3		
				2501	39700	20.79	21.5	0-3		
				2547	40160	20.70	21.5	0-3		
			25	2593	40620	20.88	21.5	0-3		
				2639	41080	20.85	21.5	0-3		
				2685	41540	21.02	21.5	0-3		
				2501	39700	20.84	21.5	0-3		
				2547	40160	20.78	21.5	0-3		
		50	RB	2593	40620	20.84	21.5	0-3		
				2639	41080	20.81	21.5	0-3		
				2685	41540	21.01	21.5	0-3		

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.






TDD Band 41										
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)		
				2498.5	39675	23.26	24.5	0		
				2547.8	40148	23.27	24.5	0		
			0	2593	40620	23.43	24.5	0		
				2640.3	41093	23.29	24.5	0		
				2687.5	41565	23.21	24.5	0		
				2498.5	39675	23.15	24.5	0		
				2547.8	40148	23.27	24.5	0		
		1 RB	12	2593	40620	23.32	24.5	0		
				2640.3	41093	23.47	24.5	0		
				2687.5	41565	23.60	24.5	0		
				2498.5	39675	23.12	24.5	0		
				2547.8	40148	23.26	24.5	0		
			24	2593	40620	23.44	24.5	0		
				2640.3	41093	22.96	24.5	0		
				2687.5	41565	23.47	24.5	0		
				2498.5	39675	22.40	23.5	0-1		
			0	2547.8	40148	22.42	23.5	0-1		
5	QPSK			2593	40620	22.64	23.5	0-1		
				2640.3	41093	22.70	23.5	0-1		
				2687.5	41565	22.74	23.5	0-1		
				2498.5	39675	22.39	23.5	0-1		
				2547.8	40148	22.53	23.5	0-1		
		12 RB	6	2593	40620	22.66	23.5	0-1		
				2640.3	41093	22.73	23.5	0-1		
				2687.5	41565	22.79	23.5	0-1		
				2498.5	39675	22.41	23.5	0-1		
				2547.8	40148	22.50	23.5	0-1		
			13	2593	40620	22.63	23.5	0-1		
				2640.3	41093	22.50	23.5	0-1		
				2687.5	41565	22.70	23.5	0-1		
				2498.5	39675	22.45	23.5	0-1		
				2547.8	40148	22.61	23.5	0-1		
		25	RB	2593	40620	22.64	23.5	0-1		
					41093	22.54	23.5	0-1		
				2687.5	41565	22.61	23.5	0-1		

t (886-2) 2299-3279


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





TDD Band 41										
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)		
				2498.5	39675	22.55	23.5	0-1		
				2547.8	40148	22.66	23.5	0-1		
			0	2593	40620	22.89	23.5	0-1		
				2640.3	41093	22.68	23.5	0-1		
				2687.5	41565	22.56	23.5	0-1		
				2498.5	39675	22.48	23.5	0-1		
				2547.8	40148	22.60	23.5	0-1		
		1 RB	12	2593	40620	22.70	23.5	0-1		
				2640.3	41093	22.83	23.5	0-1		
				2687.5	41565	22.99	23.5	0-1		
			24	2498.5	39675	22.50	23.5	0-1		
				2547.8	40148	22.60	23.5	0-1		
				2593	40620	22.78	23.5	0-1		
				2640.3	41093	22.39	23.5	0-1		
				2687.5	41565	22.78	23.5	0-1		
				2498.5	39675	21.44	22.5	0-2		
			0	2547.8	40148	21.58	22.5	0-2		
5	16-QAM	-QAM		2593	40620	21.64	22.5	0-2		
				2640.3	41093	21.70	22.5	0-2		
				2687.5	41565	21.71	22.5	0-2		
				2498.5	39675	21.46	22.5	0-2		
				2547.8	40148	21.64	22.5	0-2		
		12 RB	6	2593	40620	21.70	22.5	0-2		
				2640.3	41093	21.75	22.5	0-2		
				2687.5	41565	21.89	22.5	0-2		
				2498.5	39675	21.48	22.5	0-2		
				2547.8	40148	21.53	22.5	0-2		
			13	2593	40620	21.66	22.5	0-2		
				2640.3	41093	21.53	22.5	0-2		
				2687.5	41565	21.80	22.5	0-2		
			-	2498.5	39675	21.50	22.5	0-2		
				2547.8	40148	21.58	22.5	0-2		
		25	RB	2593	40620	21.65	22.5	0-2		
			l I		41093	21.62	22.5	0-2		
L				2687.5	41565	21.67	22.5	0-2		

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





TDD Band 41										
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted pow er (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allow ed per 3GPP(dB)		
				2498.5	39675	21.72	22.5	0-2		
				2547.8	40148	21.93	22.5	0-2		
			0	2593	40620	22.14	22.5	0-2		
				2640.3	41093	21.93	22.5	0-2		
				2687.5	41565	21.74	22.5	0-2		
				2498.5	39675	21.62	22.5	0-2		
				2547.8	40148	21.84	22.5	0-2		
		1 RB	12	2593	40620	21.92	22.5	0-2		
				2640.3	41093	22.03	22.5	0-2		
				2687.5	41565	22.27	22.5	0-2		
			24	2498.5	39675	21.60	22.5	0-2		
				2547.8	40148	21.76	22.5	0-2		
				2593	40620	21.90	22.5	0-2		
				2640.3	41093	21.57	22.5	0-2		
				2687.5	41565	21.97	22.5	0-2		
				2498.5	39675	20.65	21.5	0-3		
		м	0	2547.8	40148	20.79	21.5	0-3		
5	64-QAM			2593	40620	20.82	21.5	0-3		
				2640.3	41093	20.99	21.5	0-3		
				2687.5	41565	20.96	21.5	0-3		
				2498.5	39675	20.70	21.5	0-3		
				2547.8	40148	20.90	21.5	0-3		
		12 RB	6	2593	40620	20.96	21.5	0-3		
				2640.3	41093	21.03	21.5	0-3		
				2687.5	41565	21.09	21.5	0-3		
				2498.5	39675	20.66	21.5	0-3		
				2547.8	40148	20.65	21.5	0-3		
			13	2593	40620	20.82	21.5	0-3		
				2640.3	41093	20.71	21.5	0-3		
				2687.5	41565	21.08	21.5	0-3		
			-	2498.5	39675	20.79	21.5	0-3		
				2547.8	40148	20.79	21.5	0-3		
		25	RB	2593	40620	20.79	21.5	0-3		
			1		41093	20.91	21.5	0-3		
L				2687.5	41565	20.80	21.5	0-3		

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



		ANT	0 Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		1	2412		12.00	11.57
	802.11b	6	2437	1Mbps	12.00	11.66
	802.110	10	2457		12.00	11.84
		11	2462		12.00	11.63
	802.11g	1	2412		12.00	11.33
		2	2417		12.00	11.56
		6	2437	6Mbps	12.00	11.61
		10	2457		12.00	11.73
		11	2462		12.00	11.59
2450 MHz		1	2412		12.00	11.76
		2	2417		12.00	11.69
	802.11n20-HT0	6	2437	MCS0	12.00	11.64
		10	2457		12.00	11.80
		11	2462		12.00	11.52
		3	2422		12.00	11.56
		4	2427		12.00	11.70
	802.11n40-HT0	6	2437	MCS0	12.00	11.60
		8	2447		12.00	11.58
		9	2452		12.00	11.52

# WLAN802.11 a/b/g/n/ac/ax (20M/40M/80M) conducted power table:

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



		ANT	0 Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		36	5180		12.00	11.94
	802.11a	44	5220	6Mbps	12.00	11.85
		48	5240		12.00	11.89
		36	5180		12.00	11.86
	802.11n20-HT0	44	5220	MCS0	12.00	11.57
		48	5240		12.00	11.74
5.15-5.25 GHz		36	5180		12.00	11.71
5.15-5.25 GHz	802.11ac20-VHT0	44	5220	MCS0	12.00	11.51
		48	5240		12.00	11.63
	802.11n40-HT0	38	5190	MCS0	12.00	11.63
		46	5230	WC30	12.00	11.89
	802.11ac40-VHT0	38	5190	MCS0	12.00	11.62
	002.110040-0110	46	5230	IVIC30	12.00	11.87
	802.11ac80-VHT0	42	5210	MCS0	12.00	11.93
		ANT	0 Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		52	5260		12.00	11.84
	802.11a	60	5300	6Mbps	12.00	11.91
		64	5320		12.00	11.95
		52	5260		12.00	11.82
	802.11n20-HT0	60	5300	MCS0	12.00	11.83
		64	5320		12.00	11.90
5.25-5.35 GHz		52	5260		12.00	11.72
0.25-5.35 GHZ	802.11ac20-VHT0	60	5300	MCS0	12.00	11.82
		64	5320		12.00	11.74
	902 11×40 LITO	54	5270	MCCO	12.00	11.67
	802.11n40-HT0	62	5310	MCS0	12.00	11.66
		54	5270	MCCO	12.00	11.60
	802.11ac40-VHT0	62	5310	MCS0	12.00	11.61
	802.11ac80-VHT0	58	5290	MCS0	12.00	11.83

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

```
f (886-2) 2298-0488
```



		ANT	0 Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		100	5500		12.00	11.86
	802.11a	116	5580	6Mbps	12.00	11.72
	002.11a	140	5700	olviops	12.00	11.89
		144	5720		12.00	11.83
		100	5500		12.00	11.86
	802.11n20-HT0	116	5580	MCS0	12.00	11.62
		140	5700	MOOO	12.00	11.62
		144	5720		12.00	11.68
	802.11ac20-VHT0	100	5500		12.00	11.81
		116	5580	MCS0	12.00	11.57
		140	5700	meee	12.00	11.56
5600 MHz		144	5720		12.00	11.62
		102	5510		12.00	11.86
	802.11n40-HT0	110	5550	MCS0	12.00	11.59
	002.1111401110	134	5670	meee	12.00	11.84
		142	5710		12.00	11.81
		102	5510		12.00	11.85
	802.11ac40-VHT0	110	5550	MCS0	12.00	11.55
		134	5670	10000	12.00	11.79
		142	5710		12.00	11.65
		106	5530		12.00	11.77
	802.11ac80-VHT0		5610	MCS0	12.00	11.78
		138	5690		12.00	11.85

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



		ANT	0 Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		149	5745		12.00	11.82
	802.11a	157	5785	6Mbps	12.00	11.83
		165	5825		12.00	11.85
	802.11n20-HT0	149	5745		12.00	11.64
		157	5785	MCS0	12.00	11.57
		165	5825		12.00	11.59
5800 MHz		149	5745		12.00	11.58
5000 1011 12	802.11ac20-VHT0	157	5785	MCS0	12.00	11.51
		165	5825		12.00	11.50
	802.11n40-HT0	151	5755	MCS0	12.00	11.67
	002.11140-1110	159	5795	WC30	12.00	11.53
	802.11ac40-VHT0	151	5755	MCS0	12.00	11.62
	002.114040-0110	159	5795	10000	12.00	11.47
	802.11ac80-VHT0	155	5775	MCS0	12.00	11.88

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd. t (886-2) 2299-3279

www.tw.sgs.com



		ANT	1 Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		1	2412		12.00	11.88
	802.11b	6	2437	1Mbps	12.00	11.69
	002.110	10	2457	TNIDPS	12.00	11.93
		11	2462		12.00	11.94
	802.11g	1	2412		12.00	11.38
		2	2417		12.00	11.81
		6	2437	6Mbps	12.00	11.71
		10	2457		12.00	11.84
		11	2462		12.00	11.78
2450 MHz		1	2412		12.00	11.91
		2	2417		12.00	11.81
	802.11n20-HT0	6	2437	MCS0	12.00	11.70
		10	2457		12.00	11.86
		11	2462		12.00	11.79
		3	2422		12.00	11.69
		4	2427		12.00	11.85
	802.11n40-HT0	6	2437	MCS0	12.00	11.70
		8	2447		12.00	11.62
		9	2452		12.00	11.58

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



		Ant	1 Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		36	5180		12.00	11.65
	802.11a	44	5220	6Mbps	12.00	11.57
		48	5240		12.00	11.50
		36	5180		12.00	11.58
	802.11n20-HT0	44	5220	MCS0	12.00	11.52
		48	5240		12.00	11.62
		36	5180		12.00	11.45
5.15-5.25 GHz	802.11ac20-VHT0	44	5220	MCS0	12.00	11.40
		48	5240		12.00	11.60
	802.11n40-HT0	38	5190	MCS0	12.00	11.60
		46	5230	IVIC SU	12.00	11.71
	802.11ac40-VHT0	38	5190	MCS0	12.00	11.52
	002.118040-1110	46	5230	WC30	12.00	11.65
	802.11ac80-VHT0	42	5210	MCS0	12.00	11.46
		Ant	1 Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		52	5260		12.00	11.80
	802.11a	60	5300	6Mbps	12.00	11.73
		64	5320		12.00	11.50
		52	5260		12.00	11.51
	802.11n20-HT0	60	5300	MCS0	12.00	11.44
		64	5320		12.00	11.53
5.25-5.35 GHz		52	5260		12.00	11.45
5.25-5.55 GHZ	802.11ac20-VHT0	60	5300	MCS0	12.00	11.42
		64	5320		12.00	11.47
	002 11p40 UT0	54	5270	MCSO	12.00	11.65
	802.11n40-HT0	62	5310	MCS0	12.00	11.49
		54	5270	MCCO	12.00	11.58
	802.11ac40-VHT0	62	5310	MCS0	12.00	11.49
	802.11ac80-VHT0	58	5290	MCS0	12.00	11.73

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

```
f (886-2) 2298-0488
```

www.tw.sgs.com



		Ant	1 Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		100	5500		12.00	11.67
	802.11a	116	5580	6Mbps	12.00	11.65
	002.11a	140	5700	olviops	12.00	11.55
		144	5720		12.00	11.76
		100	5500		12.00	11.44
	802.11n20-HT0	116	5580	MCS0	12.00	11.50
	002.111201110	140	5700	MCSU	12.00	11.58
		144	5720		12.00	11.61
	802.11ac20-VHT0	100	5500		12.00	11.41
		116	5580	MCS0	12.00	11.47
		140	5700	MOOO	12.00	11.55
5600 MHz		144	5720		12.00	11.55
		102	5510		12.00	11.50
	802.11n40-HT0	110	5550	MCS0	12.00	11.55
	002.111401110	134	5670	MOOO	12.00	11.62
		142	5710		12.00	11.50
		102	5510		12.00	11.47
	802.11ac40-VHT0	110	5550	MCS0	12.00	11.49
		134	5670	MOOO	12.00	11.62
		142	5710		12.00	11.42
		106	5530		12.00	11.54
	802.11ac80-VHT0	·	5610	MCS0	12.00	11.77
		138	5690		12.00	11.83

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

www.tw.sgs.com



		Ant	1 Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		149	5745		12.00	11.68
	802.11a	157	5785	6Mbps	12.00	11.59
		165	5825		12.00	11.54
	802.11n20-HT0	149	5745		12.00	11.52
		157	5785	MCS0	12.00	11.52
		165	5825		12.00	11.57
5800 MHz		149	5745		12.00	11.42
3000 1011 12	802.11ac20-VHT0	157	5785	MCS0	12.00	11.47
		165	5825		12.00	11.43
	802.11n40-HT0	151	5755	MCS0	12.00	11.53
	002.11140-1110	159	5795	WC30	12.00	11.49
	802.11ac40-VHT0	151	5755	MCS0	12.00	11.49
	002.110040-0010	159	5795	IVIC30	12.00	11.44
	802.11ac80-VHT0	155	5775	MCS0	12.00	11.69

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



# AX power

			ANT 0 Ante	enna			
Band	Mode	Channel	Frequency (MHz)	RU config	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
				Full		12.00	11.78
	802.11ax20-HE0	1	2412	26/0		12.00	11.75
		1	2412	52/37		12.00	11.58
				106/53		12.00	11.48
		6	2437	Full	MCS0	12.00	11.45
			2462	Full		12.00	11.62
2450 MHz		11		26/8		12.00	11.49
2400 1011 12				52/40		12.00	11.55
				106/54		12.00	11.42
		3	2422	Full		12.00	11.68
		5	2422	242/61		11.00	10.66
	802.11ax40-HE0	6	2437	Full	MCS0	12.00	11.40
		9	2452	Full		12.00	11.44
		J	2402	242/62		11.00	10.65

			ANT 0 Ante	enna			
Band	Mode	Channel	Frequency (MHz)	RU config	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
	802.11ax20-HE0			Full		12.00	11.81
		36	5180	26/0	MCS0	11.00	10.68
				52/37		12.00	11.87
				106/53	10000	12.00	11.76
		44	5220	Full		12.00	11.95
5.15-5.25 GHz		48	5240	Full		12.00	11.81
		38	5190	Full		12.00	11.79
	802.11ax40-HE0	30	5190	242/61	MCS0	12.00	11.87
		46	5230	Full		12.00	11.80
	802.11ax80-HE0	42	5210	Full	MCS0	12.00	11.85
		42	5210	484/65	10000	8.00	7.89

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

```
www.tw.sgs.com
```



			ANT 0 Ante	enna			
Band	Mode	Channel	Frequency (MHz)	RU config	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
	802.11ax20-HE0	52	5260	Full		12.00	11.83
		60	5300	Full		12.00	11.81
		64	5320	Full	MCS0	12.00	11.76
				26/8		11.00	10.66
				52/40		12.00	11.79
5.15-5.25 GHz				106/54		12.00	11.81
		54	5270	Full		12.00	11.79
	802.11ax40-HE0	62	5210	Full	MCS0	12.00	11.85
		02	5310	242/62		12.00	11.67
	802.11ax80-HE0	58	5290	Full	MCS0	12.00	11.82
	002.11ax00-11L0	50	5290	484/66	10000	8.00	7.85

			ANT 0 Ante	enna			
Band	Mode	Channel	Frequency (MHz)	RU config	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
				Full		12.00	11.95
		100	5500	26/0		11.00	10.82
		100	5500	52/37		12.00	11.87
	802.11ax20-HE0		5500	106/53		12.00	11.87
		116	5580	Full	MCS0	12.00	11.84
		140		Full	10050	12.00	11.86
			5700	26/8		11.00	10.78
				52/40		12.00	11.78
				106/54		12.00	11.86
5600 MHz		144	5720	Full		12.00	11.84
3000 1011 12		102	5510	Full		12.00	11.87
		102	5510	242/61		12.00	11.75
	802.11ax40-HE0	110	5550	Full	MCS0	12.00	11.82
	002.11aX40-HEU	134	5670	Full	WC30	12.00	11.78
		134	5070	242/62		12.00	11.73
		142	5710	Full		12.00	11.78
		106	5530	Full		12.00	11.85
	802.11ax80-HE0	106	5550	484/65	MCS0	8.00	7.81
	002.11ax00-HEU	122	5610	Full	IVIC30	12.00	11.83
		138	5690	Full		12.00	11.84

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd. t (886-2) 2299-3279

f (886-2) 2298-0488

www.tw.sgs.com



ANT 0 Antenna								
Band	Mode	Channel	Frequency (MHz)	RU config	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)	
5800 MHz	802.11ax20-HE0	149	5745	Full	MCS0	12.00	11.88	
				26/0		11.00	10.75	
				52/37		12.00	11.90	
				106/53		12.00	11.74	
		157	5785	Full		12.00	11.83	
		165	5825	full		12.00	11.79	
				26/8		11.00	10.71	
				52/40		12.00	11.78	
				106/54		12.00	11.89	
	802.11ax40-HE0	151	5755	Full	MCS0	12.00	11.94	
				242/61		12.00	11.89	
		159	5795	full		12.00	11.94	
				242/62		12.00	11.72	
	802.11ax80-HE0	155	5775	Full	MCS0	12.00	11.90	
				484/65		8.00	7.86	
				484/66		8.00	7.67	

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

```
www.tw.sgs.com
```



ANT 1 Antenna								
Band	Mode	Channel	Frequency (MHz)	RU config	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)	
2450 MHz	802.11ax20-HE0	1	2412	Full	MCS0	12.00	11.91	
				26/0		12.00	11.82	
				52/37		12.00	11.89	
				106/53		12.00	11.79	
		6	2437	Full		12.00	11.77	
		11	2462	Full		12.00	11.92	
				26/8		12.00	11.88	
				52/40		12.00	11.92	
				106/54		12.00	11.77	
	802.11ax40-HE0	3	2422	Full		12.00	11.90	
				242/61		11.00	10.75	
		6	2437	Full	MCS0	12.00	11.57	
		9	2452	Full		12.00	11.58	
				242/62		11.00	10.71	

ANT 1 Antenna								
Band	Mode	Channel	Frequency (MHz)	RU config	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)	
5.15-5.25 GHz	802.11ax20-HE0	36	5180	Full	MCS0	12.00	11.82	
				26/0		11.00	10.64	
				52/37		12.00	11.58	
				106/53		12.00	11.49	
		44	5220	Full		12.00	11.73	
		48	5240	Full		12.00	11.68	
	802.11ax40-HE0	38	5190	Full	MCS0	12.00	11.77	
				242/61		12.00	11.69	
		46	5230	Full		12.00	11.82	
	802.11ax80-HE0	42	5210	Full	MCS0	12.00	11.81	
				484/65		8.00	7.84	

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd. t (886-2) 2299-3279

www.tw.sgs.com



			ANT 1 Ante	enna			
Band	Mode	Channel	Frequency (MHz)	RU config	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		52	5260	Full		12.00	11.64
	802.11ax20-HE0	60	5300	Full		12.00	11.70
		64	5320	Full	MCS0	12.00	11.64
	002.11ax20-11L0			26/8		11.00	10.60
				52/40		12.00	11.54
5.15-5.25 GHz				106/54		12.00	11.61
		54	5270	Full		12.00	11.77
	802.11ax40-HE0	62	5310	Full	MCS0	12.00	11.66
		02	5510	242/62		12.00	11.46
	802.11ax80-HE0	58	5290	Full	MCS0	12.00	11.78
	002.11ax00-11L0	50	5290	484/66	10000	8.00	7.67

			ANT 1 Ante	enna			
Band	Mode	Channel	Frequency (MHz)	RU config	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
				Full		12.00	11.90
		100	5500	26/0		11.00	10.53
	802.11ax20-HE0	100	5500	52/37		12.00	11.80
				106/53		12.00	11.88
		116	5580	Full	MCS0	12.00	11.72
		140	5700	Full	MC30	12.00	11.76
				26/8		11.00	10.62
				52/40		12.00	11.79
				106/54		12.00	11.62
5600 MHz		144	5720	Full		12.00	11.51
3000 1011 12		102	5510	Full		12.00	11.73
		102	5510	242/61		12.00	11.73
	802.11ax40-HE0	110	5550	Full	MCS0	12.00	11.58
	002.11ax40-11L0	134	5670	Full	10050	12.00	11.53
		134	5070	242/62		12.00	11.53
		142	5710	Full		12.00	11.51
		106	5530	Full		12.00	11.73
	802.11ax80-HE0	100	5550	484/65	MCS0	8.00	7.54
	002.11ax00-ITEU	122	5610	Full	WC30	12.00	11.42
		138	5690	Full		12.00	11.81

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

f (886-2) 2298-0488



			ANT 1 Ante	enna			
Band	Mode	Channel	Frequency (MHz)	RU config	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
				Full		12.00	11.70
	802.11ax20-HE0	149	5745	26/0		11.00	10.50
		149	5745	52/37		12.00	11.58
				106/53		12.00	11.62
		157	5785	Full	MCS0	12.00	11.71
		165	5825	full		12.00	11.61
				26/8		11.00	10.55
5800 MHz				52/40		12.00	11.71
0000 10112				106/54		12.00	11.69
		151	5755	Full		12.00	11.66
	802.11ax40-HE0	101	5755	242/61	MCS0	12.00	11.54
	002.11aA+0-11L0	159	5795	full	10000	12.00	11.94
		155	5755	242/62		12.00	11.72
		155		Full		12.00	11.71
	802.11ax80-HE0		5775	484/65	MCS0	8.00	7.27
				484/66		8.00	7.36

#### Bluetooth maximum power table:

Mode	Channel	Frequency	Average	Max. Rated Avg. Power + Max.			
Mode	Channel	(MHz)	1Mbps	2Mbps	3Mbps	Tolerance (dBm)	
	CH 00	2402	11.31	9.48	9.47		
BR/EDR	CH 39	2441	11.31	9.43	9.52	12.5	
	CH 78	2480	10.84	9.16	9.13		

Mode	Channel	Frequency	Average Output Power (dBm)	Max. Rated Avg. Power + Max.	
woue	Channel	(MHz)	GFSK	Tolerance (dBm)	
	CH 00	2402	7.40		
LE	CH 19 2442		7.43	12.5	
	CH 39	2480	7.28		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279

f (886-2) 2298-0488



# 1.3.1 LTE Downlink CA specification

#### LTE Downlink 2CA conducted power table

	Two Component Carrier Maximum Conducted Power													
			PCC					S	CC		Power			
PCC Band	PCC Bandwidth [MHz]	PCC (UL) Channel	PCC (UL) Frequency [MHz]	Modulation	PCC (DL) Channel	PCC (DL) Frequency [MHz]	SCC Band	SCC Bandwidth [MHz]	SCC (DL) Channel	SCC (DL) Frequency [MHz]	LTE Tx.Power with DL CA active (dBm)	LTE Tx.Power with DL CA inactive (dBm)	Configurations	Maximum power
LTE B41	100	39750	2506	QPSK	39750	2506	LTE B41	100	39948	2525.8	22.73	23.74	CA_41C	Full power
LTE B41	100	41490	2680	QPSK	41490	2680	LTE B41	100	41292	2660.2	22.87	23.74	CA_41C	Full power

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd. t (886-2) 2299-3279

f (886-2) 2298-0488

Member of SGS Group

www.tw.sgs.com



# LTE CA information

# A)

The device supports downlink LTE Carrier Aggregation (CA) only. It supports a maximum of 2 carriers in the downlink. Other Release 10 features or higher features are not supported, including Uplink Carrier Aggregation, Enhanced SC-FDMA and Uplink MIMO or other antenna diversity configurations etc. All uplink communications are identical to the Release 8 Specifications. The possible downlink LTE CA combinations supported by this device are as below tables per 3GPP TS 36.521-1 V16.0.0. The conducted power measurement results of downlink LTE CA are provided as above per 3GPP TS 36.521-1 V16.0.0. According to KDB 941225 D05A and RF exposure procedures in TCB workshop April 2018, the downlink LTE CA SAR test is not required.

# B)

CA combination table

Index	2CC	Restriction	Completely Covered by Measurement Superset
2CC #1	CA 41C	No	

Note:

1) The channel spacing and aggregated channel bandwidth for CA are identical to the associated specification in 3GPP TS 36.521-1 V16.0.0.

The reference test frequencies for CA refers to 3GPP TS 36.508 V16.1.0

3) Testing is not required in bands or modes not intended/allowed for US operation 4) Based on TCB workshop April 2018, only indicate "No" in CA combination table need power measurement.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



## **1.4 Test Environment**

Ambient Temperature: 22±2° C Tissue Simulating Liquid: 22±2° C

## **1.5 Operation Description**

- 1. The EUT is controlled by using a Radio Communication Tester (MT8820C), and the communication between the EUT and the tester is established by air link.
- 2. Measurements are performed respectively on the lowest, middle and highest channels of the operating band(s). The EUT is set to maximum power level during all tests, and at the beginning of each test the battery is fully charged.
- 3. During the SAR testing, the DASY 5 system checks power drift by comparing the e-field strength of one specific location measured at the beginning with that measured at the end of the SAR testing.
- 4. SAR test reduction for GPRS mode is determined by the source-based time-averaged output power. The data mode with highest specified time-averaged output power should be tested for SAR compliance.
- 5. The 3G SAR test reduction procedure is applied to HSDPA with 12.2 kbps RMC as the primary mode. Since the maximum output power in a secondary mode (HSDPA) is  $\leq \frac{1}{4}$  dB higher than the primary mode (WCDMA), SAR measurement is not required for the secondary mode (HSDPA).

Sub-test	βc	βa	βd (SF)	βc/βa	β _{HS} ⁽¹⁾⁽²⁾	CM ⁽³⁾ (dB)	MPR ⁽³⁾ (dB)			
1	2/15	15/15	64	2/15	4/15	0.0	0.0			
2	12/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	12/15 ⁽⁴⁾	24/15	1.0	0.0			
3	15/15	8/15	64	15/8	30/15	1.5	0.5			
4	15/15	4/15	64	15/4	30/15	1.5	0.5			
Note 2: For the H clause 5.1	Note 1: Δ _{ACK} , Δ _{NACK} and Δ _{COI} = 30/15 with β _{HS} = 30/15 * β _c . Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ _{ACK} and Δ _{NACK} = 30/15 with β _{HS} = 30/15 * β _c , and Δ _{COI} = 24/15 with β _{HS} = 24/15 * β _c .									
relative C	24/15 With βHs = 24/15 ° βc. Note 3: CM = 1 for β ₀ /β _d = 12/15, β _{H5} /β _c = 24/15. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases. Note 4: For subtest 2 the β ₀ /θ _e ratio of 12/15 for the TFC during the measurement period (TF1. TF0) is achieved by setting the signalled gain									

6. The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) with 12.2 kbps RMC as the primary mode. Since the maximum output power in a secondary mode (HSPA) is  $\leq \frac{1}{4}$  dB higher than the primary mode (WCDMA), SAR measurement is not required for the secondary mode (HSPA).

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

factors for the reference TFC (TF1, TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ .


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

> No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

Member of SGS Group

f (886-2) 2298-0488





Sub-test	βε	βd	β₀ (SF)	βc/βd	β _{HS} (1)	βes	β _{ed} ⁽⁴⁾⁽⁵⁾	β _{ed} (SF)	β _{ed} (Codes)	CM (2) (dB)	MPR (2)(6) (dB)	AG (5) Index	E-TFCI
1	11/15 (३)	15/15 (រ)	64	11/15 (រ)	22/15	209/225	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	βed1: 47/15 βed2: 47/15		2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67
Note 2: CM diffe Note 3: For (TF1 Note 4: In ca Note 5: βead	<ul> <li>Is 1/3 0 0 1/2 0/1</li> <li>Is 1/3 0/1</li> <li>Is 1/1</li> <li>Is 1/1</li></ul>												

## 7. LTE modes test according to KDB 941225D05v02r05.

a. Per Section 5.2.1, the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation.

Using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.

When the reported SAR is  $\leq$  0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel.

When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

b. Per Section 5.2.2, the largest channel bandwidth and measure SAR for QPSK with 50% RB allocation

The procedures required for 1 RB allocation in 5.2.1 are applied to measure the SAR for QPSK with 50% RB allocation.

c. Per Section 5.2.3, the largest channel bandwidth and measure SAR for QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 5.2.1 and 5.2.2 are  $\leq$  0.8 W/kg.

Otherwise, SAR is measured for the highest output power channel and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

d. Per Section 5.2.4, Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in sections 5.2.1, 5.2.2 and 5.2.3 to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is >

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⁹⁰天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



1/2 dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

e. Per Section 5.3, other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section 5.2 to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is >  $\frac{1}{2}$  dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg. The equivalent channel configuration for the RB allocation, RB offset and modulation etc. is determined for the smaller channel bandwidth according to the same number of RB allocated in the largest channel bandwidth.

TDD LTE was tested at highest duty factor using UL-DL configuration 0 with 6 UL subframes and 2 S subframes using extended cyclic prefix only and special subframe configuration 6. SAR tests were performed at maximum output power and worst-case transmission duty factor in extended cyclic prefix. Per 3GPP 36.211 Section 4, the duty factor for special subframe configuration 6 using extended cyclic prefix is 0.633.

## **WLAN**

802.11b DSSS SAR Test Requirements:

- 8. SAR is measured for 2.4 GHz 802.11b DSSS mode using the highest measured maximum output power channel, when the reported SAR of the highest measured maximum output power channel for the exposure configuration is  $\leq 0.8$  W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 9. When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

802.11g/n OFDM SAR Test Exclusion Requirements:

10. SAR is not required for 802.11g/n since the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.

Initial Test Configuration:

11. An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⁹⁰天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



highest maximum output power specified for production units in each standalone and aggregated frequency band.

- 12. SAR is measured using the highest measured maximum output power channel. When the reported SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.
- 13. Since the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg, SAR is not required for subsequent test configuration.
- 14. Based on FCC guidance, general principles of KDB248227D01 can be applied to 802.11ax to determine initial test configuration with 802.11ax being considered as the highest 802.11 mode for the appropriate frequency band.
- 15.BT and WLAN Ant 0 use the same antenna path and Bluetooth may transmit with WLAN Ant 1 simultaneously.
- 16. According to KDB447498D01v06, testing of other required channels is not required when the reported 1-g SAR for the highest output channel is  $\leq 0.8$  W/kg, when the transmission band is  $\leq$  100MHz.
- 17. According to KDB865664D01v01r04, SAR measurement variability must be assessed for each frequency band. When the original highest measured SAR is  $\geq$ 0.8 W/kg, repeated that measurement once. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is  $\geq$  1.45 W/kg (~ 10% from the 1-g SAR limit)
- 18. For 2.4/5GHz WLAN Ant 0 and Ant 1 antennas, the maximum output power of each antenna during simultaneous transmission is the same with or less than that used in standalone transmission, and we used the sum of 1-g SAR provision in KDB447498D01 to exclude the simultaneous transmitted SAR measurement.
- 19.LTE downlink CA (KDB942225 D05A), the device supports a maximum of 2 carriers in the downlink. All uplink communications are identical to the Release 8 specifications. only for the channel with highest measured maximum output power when downlink carrier aggregation is inactive, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than 1/4 dB higher than the maximum output power measured when downlink carrier aggregation inactive.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⁹⁰天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



- 20. The downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements. The nominal channel spacing is determined by [BW1 + BW2 - 0.1*|BW1 - BW2|]/2 MHz, where BW1 and BW2 are the channel bandwidths of the CC in a 2-CC aggregation configuration.
- 21. The downlink PCC channel should be paired with the uplink channel according to normal configurations, as if there is no carrier aggregation. The downlink SCC should be adjacent to the PCC and remain within the downlink transmission band for contiguous intra-band CA. For non-contiguous intra-band CA, the SCC should be selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band. For inter-band CA, the SCC should be near the middle of its transmission band.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⁹⁰天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Report No. : E5/2019/C0017 Page: 118 of 261

# **1.6 Positioning Procedure**

Head SAR measurement statement

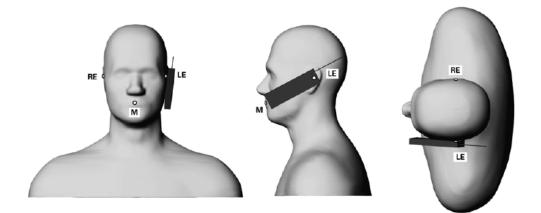

Phone position 1, "cheek" or "touch" position. The reference points for the right ear (RE), left ear (LE) and mouth (M), which define the reference plane for phone positioning.

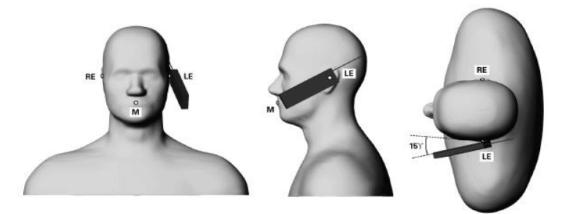

Phone position 2, "tilted position." The reference points for the right ear (RE), left ear (LE) and mouth (M), which define the reference plane for phone positioning.

## Cheek/Touch Position:

The handset was brought toward the mouth of the head phantom by pivoting against the ear reference point until any point of the mouthpiece or keypad touched the phantom.

## Ear/Tilt Position:

With the phone aligned in the Cheek/Touch position, the handset was tilted away from the mouth with respect to the test device reference point by 15 degrees.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⁹⁰天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 f (886-2) 2298-0488

www.tw.sas.com





#### **Body SAR measurement statement**

1. Body-worn exposure: 10mm

Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in KDB Publication 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. When the same wireless transmission configuration is used for testing body-worn accessory and hotspot mode SAR, respectively, in voice and data mode, SAR results for the most conservative test separation distance configuration may be used to support both SAR conditions. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for the body-worn accessory with a headset attached to the handset.

2. Hotspot exposure: 10mm

A test separation distance of 10 mm is required between the phantom and all surfaces and edges with a transmitting antenna located within 25 mm from that surface or edge when the form factor of a handset is larger than 9 cm x 5 cm.

3. Phablet SAR test consideration

Since the device is a phablet (overall diagonal dimension > 16.0 cm), the UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at  $\leq 25$  mm from that surface or edge, in direct contact with a flat phantom, for product specific 10-g SAR. When hotspot mode applies, product specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg. Since the highest reported hotspot SAR for WWAN/WLAN 2.4GHz is less than 1.2, 10-g extremity SAR is not required for them. For WLAN 5 GHz, product specific 10g-SAR is required since hotspot function is not supported in them.

4. Based on KDB941225D06v02r01, the hotspot mode and body-worn accessory SAR test configurations may overlap for handsets. When the same wireless mode transmission configurations for voice and data are required for SAR measurements, the more conservative configuration with a smaller separation distance should be tested for the overlapping SAR configurations. For WCDMA / LTE / WLAN, since the maximum power is the same between body-worn and hotspot mode, and the test distance of hotspot mode is the same with that of body-worn mode, hotspot mode SAR is used to support body-worn SAR. For GSM850/1900, since the wireless mode transmission configurations is different between body-worn and hotspot mode, body-worn SAR is performed.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⁹⁰天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



## **1.7 Evaluation Procedures**

The entire evaluation of the spatial peak values is performed within the Post-processing engine (SEMCAD). The system always gives the maximum values for the 1 g and 10 g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- 1. The extraction of the measured data (grid and values) from the Zoom Scan.
- 2. The calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters).
- 3. The generation of a high-resolution mesh within the measured volume.
- 4. The interpolation of all measured values from the measurement grid to the high-resolution grid.
- 5. The extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface.
- 6. The calculation of the averaged SAR within masses of 1g and 10g.

The probe is calibrated at the center of the dipole sensors that is located 1 to 2.7mm away from the probe tip. During measurements, the probe stops shortly above the phantom surface, depending on the probe and the surface detecting system. Both distances are included as parameters in the probe configuration file. The software always knows exactly how far away the measured point is from the surface. As the probe cannot directly measure at the surface, the values between the deepest measured point and the surface must be extrapolated. The angle between the probe axis and the surface normal line is less than 30 degree.

In the Area Scan, the gradient of the interpolation function is evaluated to find all the extreme of the SAR distribution. The uncertainty on the locations of the extreme is less than 1/20 of the grid size. Only local maximum within -2 dB of the global maximum are searched and passed for the Cube Scan measurement. In the Cube Scan, the interpolation function is used to extrapolate the Peak SAR from the lowest measurement points to the inner phantom surface (the extrapolation distance). The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5mm.

The maximum search is automatically performed after each area scan measurement. It is based on splines in two or three dimensions. The procedure can find the maximum for most SAR distributions even with relatively large grid spacing. After the area scanning measurement, the probe is automatically moved to a position at the interpolated maximum. The following scan can directly use this position for reference, e.g., for a finer resolution grid or the cube evaluations. The 1g and 10g peak evaluations are only available for the predefined cube 7x7x7 scans.

The routines are verified and optimized for the grid dimensions used in these cube measurements. The measured volume of 30x30x30mm contains about 30g of tissue. The first procedure is an extrapolation (incl. Boundary correction) to get the points between the lowest measured plane and the surface. The next step uses 3D interpolation to get all points within the measured volume. In the last step, a 1g cube is placed numerically into the volume and its averaged SAR is calculated. This cube is

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⁹⁰天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No. : E5/2019/C0017 Page: 121 of 261


the moved around until the highest averaged SAR is found.

If the highest SAR is found at the edge of the measured volume, the system will issue a warning: higher SAR values might be found outside of the measured volume. In that case the cube measurement can be repeated, using the new interpolated maximum as the center.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⁹⁰天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號 t (886-2) 2299-3279





## **1.8 Probe Calibration Procedures**

For the calibration of E-field probes in lossy liquids, an electric field with an accurately known field strength must be produced within the measured liquid. For standardization purposes it would be desirable if all measurements which are necessary to assess the correct field strength would be traceable to standardized measurement procedures. In the following two different calibration techniques are summarized:

# **1.8.1 Transfer Calibration with Temperature Probes**

In lossy liquids the specific absorption rate (SAR) is related both to the electric field (*E*) and the temperature gradient  $(\delta T / \delta t)$  in the liquid.

$$SAR = C \frac{\delta T}{\delta t},$$

Whereby  $\sigma$  is the conductivity,  $\rho$  the density and c the heat capacity of the liquid.

Hence, the electric field in lossy liquid can be measured indirectly by measuring the temperature gradient in the liquid. Non-disturbing temperature probes (optical probes or thermistor probes with resistive lines) with high spatial resolution (<1-2 mm) and fast reaction time (<1 s) are available and can be easily calibrated with high precision [1]. The setup and the exciting source have no influence on the calibration; only the relative positioning uncertainties of the standard temperature probe and the E-field probe to be calibrated must be considered. However, several problems limit the available accuracy of probe calibrations with temperature probes:

1. The temperature gradient is not directly measurable but must be evaluated from temperature measurements at different time steps. Special precaution is necessary to avoid measurement errors caused by temperature gradients due to energy equalizing effects or convection currents in the liquid. Such effects cannot be completely avoided, as the measured field itself destroys the thermal equilibrium in the liquid. With a careful setup these errors can be kept

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⁹⁰天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



small.

- 2. The measured volume around the temperature probe is not well defined. It is difficult to calculate the energy transfer from a surrounding gradient temperature field into the probe. These effects must be considered, since temperature probes are calibrated in liquid with homogeneous temperatures. There is no traceable standard for temperature rise measurements.
- 3. The calibration depends on the assessment of the specific density, the heat capacity and the conductivity of the medium. While the specific density and heat capacity can be measured accurately with standardized procedures (~ 2% for c; much better for  $\rho$ ), there is no standard for the measurement of the conductivity. Depending on the method and liquid, the error can well exceed ±5%.
- 4. Temperature rise measurements are not very sensitive and therefore are often performed at a higher power level than the E-field measurements. The nonlinearities in the system (e.g., power measurements, different components, etc.) must be considered.

Considering these problems, the possible accuracy of the calibration of E-field probes with temperature gradient measurements in a carefully designed setup is about ±10% (RSS) [2]. Recently, a setup which is a combination of the waveguide techniques and the thermal measurements was presented in [3]. The estimated uncertainty of the setup is ±5% (RSS) when the same liquid is used for the calibration and for actual measurements and ±7-9% (RSS) when not, which is in good agreement with the estimates given in [2].

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⁹⁰天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Report No. : E5/2019/C0017 Page: 124 of 261



## **1.8.2 Calibration with Analytical Fields**

In this method a technical setup is used in which the field can be calculated analytically from measurements of other physical magnitudes (e.g., input power). This corresponds to the standard field method for probe calibration in air; however, there is no standard defined for fields in lossy liquids.

When using calculated fields in lossy liquids for probe calibration, several points must be considered in the assessment of the uncertainty:

- 1. The setup must enable accurate determination of the incident power.
- 2. The accuracy of the calculated field strength will depend on the assessment of the dielectric parameters of the liquid.
- 3. Due to the small wavelength in liquids with high permittivity, even small setups might be above the resonant cutoff frequencies. The field distribution in the setup must be carefully checked for conformity with the theoretical field distribution.

## References

- (1) N. Kuster, Q. Balzano, and J.C. Lin, Eds., Mobile Communications Safety, Chapman & Hall, London, 1997.
- (2) K. Meier, M. Burkhardt, T. Schmid, and N. Kuster, \Broadband calibration of E-field probes in lossy media", IEEE Transactions on Microwave Theory and Techniques, vol. 44, no. 10, pp. 1954{1962, Oct. 1996.
- (3) K. Jokela, P. Hyysalo, and L. Puranen, \Calibration of specific absorption rate (SAR) probes in waveguide at 900 MHz", IEEE Transactions on Instrumentation and Measurements, vol. 47, no. 2, pp. 432{438, Apr. 1998.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No. : E5/2019/C0017 Page: 125 of 261

## 1.9 The SAR Measurement System

A block diagram of the SAR measurement system is given in Fig. a. This SAR measurement system uses a Computer-controlled 3-D stepper motor system (SPEAG DASY 5 professional system). Model EX3DV4 field probes are used to determine the internal electric fields. The SAR can be obtained from the equation SAR=  $\sigma$  (|Ei|2)/ $\rho$ where  $\sigma$  and  $\rho$  are the conductivity and mass density of the tissue-simulant.

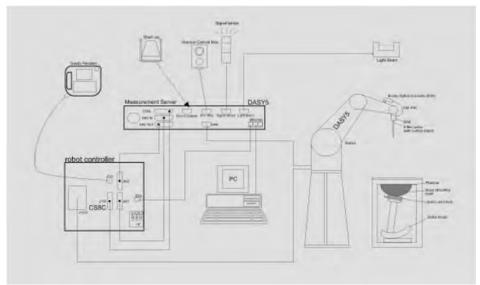


Fig. a A block diagram of the SAR measurement system

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

f (886-2) 2298-0488

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⁹⁰天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



The DASY 5 system for performing compliance tests consists of the following items:

- 1. A standard high precision 6-axis robot (Staubli RX family) with controller, teach pendant and software. An arm extension is for accommodating the data acquisition electronics (DAE).
- 2. A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- 3. Data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- 4. The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- 5. The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- 6. A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- 7. A computer operating Windows7
- 8. DASY 5 software.
- 9. Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- 10. The SAM twin phantom enabling testing left-hand and right-hand usage.
- The device holder for handheld mobile phones. 11.
- Tissue simulating liquid mixed according to the given recipes. 12.
- 13. Validation dipole kits allowing to validate the proper functioning of the system.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



## **1.10 System Components**

## **EX3DV4 E-Field Probe**

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents e.g. DGBE)
Calibration	material (resistant to organic solvents, e.g., DGBE)Basic Broad Band Calibration in airConversion Factors (CF) forHSL750/835/1750/1900/2450/2600/5200/5300/56005800 MHz Additional CF for other liquids and
	frequencies upon request
Frequency	10 MHz to > 6 GHz, Linearity: $\pm$ 0.6 dB
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic	10 μW/g to > 100 mW/g
Range	Linearity: $\pm$ 0.2 dB (noise: typically < 1 $\mu$ W/g)
Dimensions	Tip diameter: 2.5 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Phantom							
Model	Twin SAM						
Construction	The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.						
Shell Thickness	2 ± 0.2 mm						
Filling Volume	Approx. 25 liters						
Dimensions	Height: 850 mm; Length: 1000 mm; Width: 500 mm						

# **DEVICE HOLDER**

Construction	In combination with the Twin SAM Phantom	1
	V4.0/V4.0C or Twin SAM, the Mounting	ALC: NO.
	Device (made from POM) enables the	
	rotation of the mounted transmitter in	
	spherical coordinates, whereby the rotation	
	point is the ear opening. The devices can	
	be easily and accurately positioned	1
	according to IEC, IEEE, CENELEC, FCC or	
	other specifications. The device holder can	
	be locked at different phantom locations	Device Holder
	(left head, right head, flat phantom).	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's induced of this document is advised information contained reliefor reliefor the company's induced at the time of its intervention only and within the initial contained information contained reliefor reliefor the company's induced at the time of its relieformer and the induced at the time of its client as a structure of the induced at the time of its client as a structure of the company's induced at the time of its client as a structure of the induced at the time of its client as a structure of the its client as a structure of the company's induced at the time of its client as a structure of the time o prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd. t (886-2) 2299-3279 f (886-2) 2298-0488

```
www.tw.sgs.com
```



## 1.11 SAR System Verification

The microwave circuit arrangement for system verification is sketched in Fig. b. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within +/- 10% (according to KDB865664D01) from the target SAR values.

These tests were done at 750/835/1750/1900/2450/2600/5200/5300/5600/5800 MHz. The tests were conducted on the same days as the measurement of the DUT. The obtained results from the system accuracy verification are displayed in the table 1. During the tests, the liquid depth above the ear reference points was above 15 cm (≤3G) or 10 cm (>3G) in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

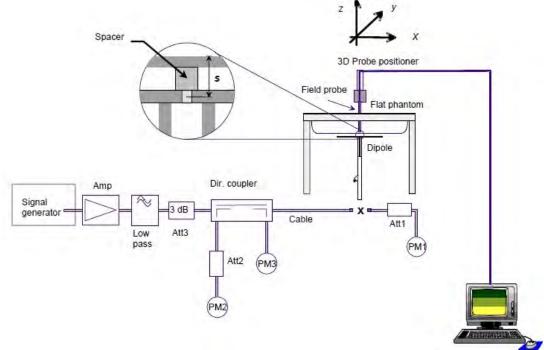


Fig. b The block diagram of system verification

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

> No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.



#### Report No. : E5/2019/C0017 Page: 130 of 261

Validation Kit	S/N	Frequ (Mł	•	1W Target SAR-1g (mW/g)	pin=250mW Measured SAR-1g (mW/g)	Measured SAR-1g normalized to 1W (mW/g)	Deviation (%)	Measured Date
D750V3	1015	750 Head		8.6	2.17	8.68	0.93%	Jan, 08, 2020
0/00/0	1010	750 Head		8.6	2.18	8.72	1.40%	Jan, 09, 2020
D835V2	4d063	835	Head	9.57	2.42	9.68	1.15%	Jan, 08, 2020
D00072	40000	835 Head		9.57	2.40	9.60	0.31%	Jan, 10, 2020
D1750V2	1008	1750	Head	36.8	9.12	36.48	-0.87%	Jan, 11, 2020
D1900V2	5d173	1900	Head	40.2	9.95	39.80	-1.00%	Jan, 12, 2020
D2450V2	727	2450	Head	53	13.50	54.00	1.89%	Jan, 05, 2020
D2600V2	1005	2600	Head	55.3	14.20	56.80	2.71%	Jan, 06, 2020
D2000V2	1005	2000	пеац	55.3	14.10	56.40	1.99%	Jan, 07, 2020
Validation Kit	S/N	Frequ (Mł	-	1W Target SAR-1g (mW/g)	pin=100mW Measured SAR-1g (mW/g)	Measured SAR-1g normalized to 1W (mW/g)	Deviation (%)	Measured Date
	1000	5000	Llood	79.2	7.92	79.20	0.00%	Jan, 13, 2020
	1023	5200	Head	79.2	7.93	79.30	0.13%	Jan, 14, 2020
	1023	5300	Head	82.6	8.27	82.70	0.12%	Jan, 13, 2020
	1023	5300	пеац	82.6	8.27	82.70	0.12%	Jan, 14, 2020
D5GHzV2	4000	5000		85.7	8.60	86.00	0.35%	Jan, 13, 2020
	1023	5600	Head	85.7	8.58	85.80	0.12%	Jan, 15, 2020
	1000	5000	Llaad	80.4	7.95	79.50	-1.12%	Jan, 13, 2020
	1023	5800	Head	80.4	7.93	79.30	-1.37%	Jan, 15, 2020

Validation Kit	S/N	Frequency (MHz)		1W Target SAR-10g (mW/g)	pin=250mW Measured SAR-10g (mW/g)	Measured SAR-10g normalized to 1W (mW/g)	Deviation (%)	Measured Date
D2450V2	727	2450 Head		24.7	6.25	25.00	1.21%	Jan, 05, 2020
Validation Kit	S/N	Frequency (MHz)		1W Target SAR-10g (mW/g)	pin=100mW Measured SAR-10g (mW/g)	asured SAR-10g R-10g normalized to		Measured Date
	1023	5200	Head	22.5	2.23	22.30	-0.89%	Jan, 13, 2020
	1025	5200	Tieau	22.5	2.25	22.50	0.00%	Jan, 14, 2020
D5GHzV2	1023	5300	Head	23.5	2.35	23.50	0.00%	Jan, 13, 2020
0301272	1025	5500	rieau	23.5	2.36	23.60	0.43%	Jan, 14, 2020
	1023	5600	Head	24.4	2.45	24.50	0.41%	Jan, 13, 2020
	1023	5000	Tieau	24.4	2.43	24.30	-0.41%	Jan, 15, 2020

Table 1. Results of system validation

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's induced of this document is advised information contained reliefor reliefor the company's induced at the time of its intervention only and within the initial contained information contained reliefor reliefor the company's induced at the time of its relieformer and the induced at the time of its client as a structure of the induced at the time of its client as a structure of the company's induced at the time of its client as a structure of the induced at the time of its client as a structure of the its client as a structure of the company's induced at the time of its client as a structure of the time o prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279

```
f (886-2) 2298-0488
```



## 1.12 Tissue Simulant Fluid for the Frequency Band

The dielectric properties for this Head-simulant fluid were measured by using the Agilent Model 85070E Dielectric Probe (rates frequency band 200 MHz to 20 GHz) in conjunction with Network Analyzer.

All dielectric parameters of tissue simulates were measured within 24 hours of SAR measurements. The depth of the tissue simulant in the flat section of the phantom was at least 15 cm (≤3G) or 10 cm (>3G) during all tests. (Appendix Fig. 2)

Tissue Type	Measurement Date	Measured Frequency (MHz)	Target Dielectric Constant, εr	Target Conductivity, σ (S/m)	Measured Dielectric Constant, εr	Measured Conductivity, σ (S/m)	% dev ɛr	% dev σ
		704	42.181	0.890	41.832	0.884	-0.83%	-0.65%
		707.5	42.162	0.890	41.829	0.885	-0.79%	-0.57%
	Jan, 08. 2020	709	42.155	0.890	41.824	0.886	-0.78%	-0.47%
	Jan, 00. 2020	710	42.149	0.890	41.816	0.887	-0.79%	-0.37%
		750	41.942	0.893	41.592	0.889	-0.83%	-0.49%
		782	41.775	0.896	41.417	0.892	-0.86%	-0.43%
		704	42.181	0.890	41.839	0.881	-0.81%	-0.99%
		707.5	42.162	0.890	41.828	0.883	-0.79%	-0.79%
	lan 00 0000	709	42.155	0.890	41.815	0.889	-0.81%	-0.13%
	Jan, 09. 2020	710	42.149	0.890	41.811	0.891	-0.80%	0.08%
		750	41.942	0.893	41.597	0.892	-0.82%	-0.15%
		782	41.775	0.896	41.419	0.893	-0.85%	-0.32%
		824.2	41.556	0.899	41.348	0.894	-0.50%	-0.57%
		835	41.500	0.900	41.319	0.895	-0.44%	-0.56%
	Jan, 08. 2020	836.5	41.500	0.902	41.311	0.896	-0.46%	-0.62%
		836.6	41.500	0.902	41.309	0.896	-0.46%	-0.63%
Head		844	41.500	0.910	41.287	0.904	-0.51%	-0.63%
		824.2	41.556	0.899	41.346	0.892	-0.51%	-0.80%
		835	41.500	0.900	41.319	0.900	-0.44%	0.00%
	Jan, 10. 2020	836.5	41.500	0.902	41.314	0.900	-0.45%	-0.18%
		836.6	41.500	0.902	41.307	0.899	-0.47%	-0.30%
		844	41.500	0.910	41.304	0.908	-0.47%	-0.19%
		1745	40.087	1.368	40.273	1.382	0.46%	1.01%
	Jan, 11. 2020	1750	40.079	1.371	40.267	1.384	0.47%	0.94%
		1752.6	40.075	1.373	40.258	1.385	0.46%	0.91%
	-	1860	40.000	1.400	40.207	1.404	0.52%	0.29%
	1 10 0000	1880	40.000	1.400	40.184	1.406	0.46%	0.43%
	Jan, 12. 2020	1900	40.000	1.400	40.183	1.408	0.46%	0.57%
		1909.8	40.000	1.400	40.175	1.409	0.44%	0.64%
		2441	39.216	1.792	38.840	1.775	-0.96%	-0.95%
	Inc. 05, 0000	2450	39.200	1.800	38.786	1.783	-1.06%	-0.94%
	Jan, 05. 2020	2457	39.191	1.808	38.770	1.792	-1.07%	-0.87%
		2462	39.185	1.813	38.767	1.795	-1.07%	-1.00%

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⁹⁰天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路134號



#### Report No. : E5/2019/C0017 Page: 132 of 261

Tissue Type	Measurement Date	Measured Frequency (MHz)	Target Dielectric Constant, εr	Target Conductivity, σ (S/m)	Measured Dielectric Constant, εr	Measured Conductivity, σ (S/m)	% dev ɛr	% dev σ
		2510	39.124	1.865	38.709	1.849	-1.06%	-0.88%
		2560	39.060	1.920	38.671	1.901	-1.00%	-0.99%
		2593	39.018	1.956	38.609	1.937	-1.05%	-0.97%
	Jan, 06. 2020	2595	39.015	1.958	38.608	1.940	-1.04%	-0.93%
		2600	39.009	1.964	38.603	1.945	-1.04%	-0.95%
		2610	38.996	1.975	38.602	1.958	-1.01%	-0.84%
		2680	38.907	2.051	38.545	2.031	-0.93%	-0.97%
		2510	39.124	1.865	38.721	1.851	-1.03%	-0.77%
		2535	39.092	1.893	38.717	1.879	-0.96%	-0.73%
		2560	39.060	1.920	38.669	1.903	-1.00%	-0.89%
	Jan, 07. 2020	2593	39.018	1.956	38.604	1.935	-1.06%	-1.07%
		2595	39.015	1.958	38.603	1.940	-1.06%	-0.93%
		2600	39.009	1.964	38.601	1.942	-1.05%	-1.10%
		2610	38.996	1.975	38.593	1.955	-1.03%	-0.99%
		2680	38.907	2.051	38.511	2.030	-1.02%	-1.02%
Head		5200	35.986	4.655	35.617	4.633	-1.02%	-0.47%
		5210	35.974	4.665	35.613	4.645	-1.00%	-0.43%
		5290	35.883	4.747	35.523	4.724	-1.00%	-0.49%
	Jan, 13. 2020	5300	35.871	4.758	35.497	4.736	-1.04%	-0.45%
	Jan, 13. 2020	5600	35.529	5.065	35.177	5.041	-0.99%	-0.47%
		5690	35.426	5.157	35.080	5.130	-0.98%	-0.53%
		5775	35.329	5.244	34.979	5.219	-0.99%	-0.48%
		5800	35.300	5.270	34.928	5.244	-1.05%	-0.49%
		5200	35.986	4.655	35.618	4.634	-1.02%	-0.45%
		5210	35.974	4.665	35.611	4.644	-1.01%	-0.46%
	Jan, 14. 2020	5290	35.883	4.747	35.514	4.727	-1.03%	-0.43%
		5300	35.871	4.758	35.498	4.734	-1.04%	-0.49%
		5600	35.529	5.065	35.175	5.046	-1.00%	-0.38%
		5690	35.426	5.157	35.071	5.132	-1.00%	-0.49%
	Jan, 15. 2020	5775	35.329	5.244	34.969	5.224	-1.02%	-0.39%
		5800	35.300	5.270	34.916	5.245	-1.09%	-0.47%

Table 2. Dielectric Parameters of Tissue Simulant Fluid

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's induced of this document is advised information contained reliefor reliefor the company's induced at the time of its intervention only and within the initial contained information contained reliefor reliefor the company's induced at the time of its relieformer and the induced at the time of its client as a structure of the induced at the time of its client as a structure of the company's induced at the time of its client as a structure of the induced at the time of its client as a structure of the its client as a structure of the company's induced at the time of its client as a structure of the time o prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd. 1



The composition of the tissue simulating liquid:	The	composition	n of the t	tissue	simulating	liquid:
--------------------------------------------------	-----	-------------	------------	--------	------------	---------

<b></b>				Ingre	edient			Tatal
Frequency (MHz)	Mode	DGMBE	Water	Salt	Preventol D-7	Cellulose	Sugar	Total amount
750	Head	—	532.98 g	18.3 g	2.4 g	3.2 g	766 g	1.3L(Kg)
850	Head	—	532.98 g	18.3 g	2.4 g	3.2 g	766 g	1.3L(Kg)
1750	Head	444.52 g	552.42 g	3.06 g	—		I	1.0L(Kg)
1900	Head	444.52 g	552.42 g	3.06 g	_		I	1.0L(Kg)
2450	Head	550ml	450ml		_			1.0L(Kg)
2600	Head	550ml	450ml		_	_	_	1.0L(Kg)

#### Simulating Liquids for 5 GHz, Manufactured by SPEAG:

Ingredients	Water	Esters, Emulsifiers, Inhibitors	Sodium and Salt
(% by weight)	60-80	20-40	0-1.5

Table 3. Recipes for tissue simulating liquid

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488



## 1.13 Test Standards and Limits

According to FCC 47CFR §2.1093(d) The limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate ("SAR") in Section 4.2 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz," ANSI/IEEE C95.1, By the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017. These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in "Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields," NCRP Report No. 86, Section 17.4.5. Copyright NCRP, 1986, Bethesda, Maryland 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards. The criteria to be used are specified in paragraphs (d)(1) and (d)(2) of this section and shall apply for portable devices transmitting in the frequency range from 100 kHz to 6 GHz. Portable devices that transmit at frequencies above 6 GHz are to be evaluated in terms of the MPE limits specified in § 1.1310 of this chapter.

Measurements and calculations to demonstrate compliance with MPE field strength or power density limits for devices operating above 6 GHz should be made at a minimum distance of 5 cm from the radiating source.

1. Limits for Occupational/Controlled exposure: 0.4 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 8 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 20 W/kg, as averaged over a 10 grams of tissue (defined as a tissue volume in the shape of a cube).

Occupational/Controlled limits apply when persons are exposed as а consequence of their employment provided these persons are fully aware of and exercise control over their exposure. Awareness of exposure can be accomplished by use of warning labels or by specific training or education through appropriate means, such as an RF safety program in a work environment.

2. Limits for General Population/Uncontrolled exposure: 0.08 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 1.6 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube).

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⁹⁰天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 4 W/kg, as averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube).

General Population/Uncontrolled limits apply when the general public may be exposed, or when persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or do not exercise control over their exposure.

Warning labels placed on consumer devices such as cellular telephones will not be sufficient reason to allow these devices to be evaluated subject to limits for occupational/controlled exposure in paragraph (d)(1) of this section. (Table .6)

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR (Brain)	1.60 W/kg	8.00 W/kg
Spatial Average SAR (Whole Body)	0.08 W/kg	0.40 W/kg
Spatial Peak SAR (Hands/Feet/Ankle/Wrist)	4.00 W/kg	20.00 W/kg

Table 4. RF exposure limits

Notes:

- 1. Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.
- Controlled environments are defined as locations where there is potential exposure of 2. individuals who have knowledge of their potential exposure and can exercise control over their exposure.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



# 2. Summary of Results

## 2.1 Decision rules

Reported measurement data comply with IEEE 1528-2013: Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

## 2.2 Summary of Results

#### **GSM 850**

Mode	Position	ion Distance (mm)	CH Freq. (MHz)		Max. Rated Avg. Measured Power + Max. Avg. Power S Tolerance (dBm) (dBm)	Scaling	Averaged S (W/	•	Plot page	
					Tolerance (abin)	(abiii)		Measured	Reported	
	Re Cheek	-	128	824.2	33.5	32.48	126.47%	0.05	0.06	183
Head	Re Tilt	-	128	824.2	33.5	32.48	126.47%	0.03	0.04	-
(GSM)	Le Cheek	-	128	824.2	33.5	32.48	126.47%	0.05	0.06	-
	Le Tilt	-	128	824.2	33.5	32.48	126.47%	0.02	0.03	-
Body-worn	Front side	10	128	824.2	33.5	32.48	126.47%	0.15	0.19	-
(GSM)	Back side	10	128	824.2	33.5	32.48	126.47%	0.17	0.22	184
	Front side	10	190	836.6	29.0	28.15	121.62%	0.18	0.22	-
	Back side	10	190	836.6	29.0	28.15	121.62%	0.19	0.23	185
Hotspot (GPRS)	Top side	10	190	836.6	29.0	28.15	121.62%	0.02	0.02	-
<1Dn4Up>	Bottom side	10	190	836.6	29.0	28.15	121.62%	0.14	0.17	-
	Right side	10	190	836.6	29.0	28.15	121.62%	0.16	0.19	-
	Left side	10	190	836.6	29.0	28.15	121.62%	0.04	0.05	-

#### **GSM 1900**

Mode	Position	Position Distance (mm)	CH Freq. (MHz)	Max. Rated Avg. Measured Power + Max. Avg. Power Tolerance (dBm) (dBm)	Scaling	Averaged S (W/	•	Plot page		
						(abiii)		Measured	Reported	
	Re Cheek	-	810	1909.8	30.5	29.01	140.93%	0.05	0.07	-
Head	Re Tilt	-	810	1909.8	30.5	29.01	140.93%	0.03	0.04	-
(GSM)	Le Cheek	-	810	1909.8	30.5	29.01	140.93%	0.08	0.11	186
	Le Tilt	-	810	1909.8	30.5	29.01	140.93%	0.04	0.06	-
Body-worn	Front side	10	810	1909.8	30.5	29.01	140.93%	0.20	0.28	-
(GSM)	Back side	10	810	1909.8	30.5	29.01	140.93%	0.20	0.28	187
	Front side	10	810	1909.8	26.0	24.29	148.25%	0.20	0.30	-
	Back side	10	810	1909.8	26.0	24.29	148.25%	0.22	0.33	188
Hotspot	Top side	10	810	1909.8	26.0	24.29	148.25%	0.02	0.03	-
(GPRS) <1Dn4Up>	Bottom side	10	810	1909.8	26.0	24.29	148.25%	0.18	0.27	-
	Right side	10	810	1909.8	26.0	24.29	148.25%	0.03	0.04	-
	Left side	10	810	1909.8	26.0	24.29	148.25%	0.12	0.18	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⁹⁰天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

```
f (886-2) 2298-0488
```



#### WCDMA Band II

Mode	Position	Position Distance (mm)	CHI	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Scaling	Averaged S (W/	0	Plot page
						(dbiii)		Measured	Reported	
	RE Cheek	-	9400	1880	23.3	22.42	122.46%	0.09	0.11	-
R99	RE Tilt	-	9400	1880	23.3	22.42	122.46%	0.06	0.07	-
(Head)	LE Cheek	-	9400	1880	23.3	22.42	122.46%	0.13	0.16	189
	LE Tilt	-	9400	1880	23.3	22.42	122.46%	0.07	0.09	-
Body-Worn	Front side	10	9400	1880	23.3	22.42	122.46%	0.32	0.39	-
Body-Wolff	Back side	10	9400	1880	23.3	22.42	122.46%	0.33	0.40	-
	Front side	10	9400	1880	23.3	22.42	122.46%	0.32	0.39	-
	Back side	10	9400	1880	23.3	22.42	122.46%	0.33	0.40	190
Hotspot	Top side	10	9400	1880	23.3	22.42	122.46%	0.02	0.02	-
погерог	Bottom side	10	9400	1880	23.3	22.42	122.46%	0.26	0.32	-
	Right side	10	9400	1880	23.3	22.42	122.46%	0.06	0.07	-
	Left side	10	9400	1880	23.3	22.42	122.46%	0.19	0.23	-

#### WCDMA Band IV

Mode	Position Distance (mm)		CH Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Scaling	Averaged S (W/	0	Plot page	
						(dBiii)		Measured	Reported	
	RE Cheek	-	1513	1752.6	23.3	22.28	126.47%	0.06	0.08	-
R99	RE Tilt	-	1513	1752.6	23.3	22.28	126.47%	0.04	0.05	-
(Head)	LE Cheek	-	1513	1752.6	23.3	22.28	126.47%	0.08	0.10	191
	LE Tilt	-	1513	1752.6	23.3	22.28	126.47%	0.05	0.06	-
Body-Worn	Front side	10	1513	1752.6	23.3	22.28	126.47%	0.19	0.24	-
Body-wonn	Back side	10	1513	1752.6	23.3	22.28	126.47%	0.20	0.25	-
	Front side	10	1513	1752.6	23.3	22.28	126.47%	0.19	0.24	-
	Back side	10	1513	1752.6	23.3	22.28	126.47%	0.20	0.25	192
Hotspot	Top side	10	1513	1752.6	23.3	22.28	126.47%	0.01	0.01	-
Ποιδροι	Bottom side	10	1513	1752.6	23.3	22.28	126.47%	0.16	0.20	-
	Right side	10	1513	1752.6	23.3	22.28	126.47%	0.04	0.05	-
	Left side	10	1513	1752.6	23.3	22.28	126.47%	0.12	0.15	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's induced of this document is advised information contained reliefor reliefor the company's induced at the time of its intervention only and within the initial contained information contained reliefor reliefor the company's induced at the time of its relieformer and the induced at the time of its client as a structure of the induced at the time of its client as a structure of the company's induced at the time of its client as a structure of the induced at the time of its client as a structure of the its client as a structure of the company's induced at the time of its client as a structure of the time o prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd. t (886-2) 2299-3279

f (886-2) 2298-0488



#### WCDMA Band V

Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Scaling	Averaged S (W/	0	Plot page
					reletation (april)	(32)		Measured	Reported	
	RE Cheek	-	4183	836.6	25	23.83	130.92%	0.11	0.14	193
R99	RE Tilt	-	4183	836.6	25	23.83	130.92%	0.04	0.05	-
(Head)	LE Cheek	-	4183	836.6	25	23.83	130.92%	0.09	0.12	-
	LE Tilt	-	4183	836.6	25	23.83	130.92%	0.04	0.05	-
Body-Worn	Front side	10	4183	836.6	25	23.83	130.92%	0.31	0.41	-
Body-Wolff	Back side	10	4183	836.6	25	23.83	130.92%	0.37	0.48	-
	Front side	10	4183	836.6	25	23.83	130.92%	0.31	0.41	-
	Back side	10	4183	836.6	25	23.83	130.92%	0.37	0.48	194
Hotspot	Top side	10	4183	836.6	25	23.83	130.92%	0.02	0.03	-
погерог	Bottom side	10	4183	836.6	25	23.83	130.92%	0.21	0.27	-
	Right side	10	4183	836.6	25	23.83	130.92%	0.32	0.42	-
	Left side	10	4183	836.6	25	23.83	130.92%	0.04	0.05	-

#### LTE FDD Band 2

Mode	Bandwidth (MHz)	Modulation	RB Size	RB start	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Scaling	Averaged S (W/		Plot page
												Measured	Reported	
					RE Cheek	-	18700	1860	23.3	22.33	125.03%	0.08	0.10	-
			1 DD	00	RE Tilt	-	18700	1860	23.3	22.33	125.03%	0.05	0.06	-
			IND	33	LE Cheek	-	18700	1860	23.3	22.33	125.03%	0.11	0.14	195
					LE Tilt	-	18700	1860	23.3	22.33	125.03%	0.08	0.10	-
					RE Cheek	-	18700	1860	22.3	21.45	121.62%	0.05	0.06	-
Head	20MHz	QPSK	50 RB	RB     99       0 RB     50       100 RB       RB     99       RB     99       RB     99	RE Tilt	-	18700	1860	22.3	21.45	121.62%	0.04	0.05	-
neau	20101112	QI OIX	50 KB		LE Cheek	-	18700	1860	22.3	21.45	121.62%	0.08	0.10	-
					LE Tilt	-	18700	1860	22.3	21.45	121.62%	0.05	0.06	-
					RE Cheek	-	18700	1860	22.3	21.42	122.46%	0.05	0.06	-
			10		RE Tilt	-	18700	1860	22.3	21.42	122.46%	0.03	0.04	-
			10		LE Cheek	-	18700	1860	22.3	21.42	122.46%	0.07	0.09	-
					LE Tilt	-	18700	1860	22.3	21.42	122.46%	0.05	0.06	-
Body-worn	20MHz	QPSK	1RB	aa	Front side	10	18700	1860	23.3	22.33	125.03%	0.27	0.34	-
Dody Wolff	2011112		IND	100 RB	Back side	10	18700	1860	23.3	22.33	125.03%	0.29	0.36	-
					Front side	10	18700	1860	23.3	22.33	125.03%	0.27	0.34	-
				100 RB	Back side	10	18700	1860	23.3	22.33	125.03%	0.29	0.36	196
			1 RB		Top side	10	18700	1860	23.3	22.33	125.03%	0.02	0.03	-
			TIND		Bottom side	10	18700	1860	23.3	22.33	125.03%	0.23	0.29	-
					Right side	10	18700	1860	23.3	22.33	125.03%	0.04	0.05	-
					Left side	10	18700	1860	23.3	22.33	125.03%	0.15	0.19	-
					Front side	10	18700	1860	22.3	21.45	121.62%	0.18	0.22	-
					Back side	10	18700	1860	22.3	21.45	121.62%	0.19	0.23	-
Hotspot	20MHz	QPSK	50 RB	50	Top side	10	18700	1860	22.3	21.45	121.62%	0.01	0.01	-
Hotspot	20101112	QFSK	50 KB	50	Bottom side	10	18700	1860	22.3	21.45	121.62%	0.16	0.19	-
					Right side	10	18700	1860	22.3	21.45	121.62%	0.03	0.04	-
					Left side	10	18700	1860	22.3	21.45	121.62%	0.11	0.13	-
					Front side	10	18700	1860	22.3	21.42	122.46%	0.18	0.22	-
					Back side	10	18700	1860	22.3	21.42	122.46%	0.19	0.23	-
			10	0 RB	Top side	10	18700	1860	22.3	21.42	122.46%	0.01	0.01	-
			10		Bottom side	10	18700	1860	22.3	21.42	122.46%	0.15	0.18	-
					Right side	10	18700	1860	22.3	21.42	122.46%	0.03	0.04	-
					Left side	10	18700	1860	22.3	21.42	122.46%	0.10	0.12	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's induced of this document is advised information contained reliefor reliefor the company's induced at the time of its intervention only and within the initial contained information contained reliefor reliefor the company's induced at the time of its relieformer and the induced at the time of its client as a structure of the induced at the time of its client as a structure of the company's induced at the time of its client as a structure of the induced at the time of its client as a structure of the its client as a structure of the company's induced at the time of its client as a structure of the time o prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd. t (886-2) 2299-3279

f (886-2) 2298-0488

```
www.tw.sgs.com
```



#### Report No. : E5/2019/C0017 Page: 139 of 261

#### LTE FDD Band 4

Mode	Bandwidth (MHz)	Modulation	RB Size	RB start	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Scaling	Averaged S (W/		Plot page
												Measured	Reported	
					RE Cheek	-	20300	1745	23.3	22.27	126.77%	0.05	0.06	-
			1 RB	0	RE Tilt	-	20300	1745	23.3	22.27	126.77%	0.04	0.05	-
			IND	0	LE Cheek	-	20300	1745	23.3	22.27	126.77%	0.08	0.10	197
					LE Tilt	-	20300	1745	23.3	22.27	126.77%	0.04	0.05	-
					RE Cheek	-	20300	1745	22.3	21.29	126.18%	0.03	0.04	-
Head	20MHz	QPSK	50 RB	0	RE Tilt	-	20300	1745	22.3	21.29	126.18%	0.02	0.03	-
ricad	2011112	QI OIX	30 10		LE Cheek	-	20300	1745	22.3	21.29	126.18%	0.05	0.06	-
					LE Tilt	-	20300	1745	22.3	21.29	126.18%	0.02	0.03	-
					RE Cheek	-	20300	1745	22.3	21.26	127.06%	0.04	0.05	-
			10	0 RB	RE Tilt	-	20300	1745	22.3	21.26	127.06%	0.02	0.03	-
			10		LE Cheek	-	20300	1745	22.3	21.26	127.06%	0.05	0.06	-
					LE Tilt	-	20300	1745	22.3	21.26	127.06%	0.02	0.03	-
Body-worn	20MHz	QPSK	1RB	0	Front side	10	20300	1745	23.3	22.27	126.77%	0.18	0.23	-
body wom	2011112	6	inte	Ŭ	Back side	10	20300	1745	23.3	22.27	126.77%	0.19	0.24	-
					Front side	10	20300	1745	23.3	22.27	126.77%	0.18	0.23	-
					Back side	10	20300	1745	23.3	22.27	126.77%	0.19	0.24	198
			1 RB	0	Top side	10	20300	1745	23.3	22.27	126.77%	0.01	0.01	-
			TIND		Bottom side	10	20300	1745	23.3	22.27	126.77%	0.15	0.19	-
					Right side	10	20300	1745	23.3	22.27	126.77%	0.03	0.04	-
					Left side	10	20300	1745	23.3	22.27	126.77%	0.12	0.15	-
					Front side	10	20300	1745	22.3	21.29	126.18%	0.12	0.15	-
					Back side	10	20300	1745	22.3	21.29	126.18%	0.13	0.16	-
Hotopot	20MHz	QPSK	50 RB	0	Top side	10	20300	1745	22.3	21.29	126.18%	0.01	0.01	-
Hotspot		QPSK	50 KB	0	Bottom side	10	20300	1745	22.3	21.29	126.18%	0.09	0.11	-
					Right side	10	20300	1745	22.3	21.29	126.18%	0.02	0.03	-
					Left side	10	20300	1745	22.3	21.29	126.18%	0.08	0.10	-
1					Front side	10	20300	1745	22.3	21.26	127.06%	0.11	0.14	-
					Back side	10	20300	1745	22.3	21.26	127.06%	0.13	0.17	-
			10	0 RB	Top side	10	20300	1745	22.3	21.26	127.06%	0.01	0.01	-
1			10	UKD	Bottom side	10	20300	1745	22.3	21.26	127.06%	0.09	0.11	-
1					Right side	10	20300	1745	22.3	21.26	127.06%	0.02	0.03	-
					Left side	10	20300	1745	22.3	21.26	127.06%	0.07	0.09	-

## LTE FDD Band 5

Mode	Bandwidth (MHz)	Modulation	RB Size	RB start	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Scaling	Averaged S. (W/I		Plot page
										(, ,		Measured	Reported	
					RE Cheek	-	20525	836.5	24	22.75	133.35%	0.09	0.12	199
			1 RB	49	RE Tilt	-	20525	836.5	24	22.75	133.35%	0.03	0.04	-
			IKD	49	LE Cheek	-	20525	836.5	24	22.75	133.35%	0.07	0.09	-
					LE Tilt	-	20525	836.5	24	22.75	133.35%	0.03	0.04	-
					RE Cheek	-	20600	844	23	21.74	133.66%	0.06	0.08	-
Head	10MHz	QPSK	25 RB	25	RE Tilt	-	20600	844	23	21.74	133.66%	0.03	0.04	-
ricaa	1010112	di on	2310	2.5	LE Cheek	-	20600	844	23	21.74	133.66%	0.04	0.05	-
					LE Tilt	-	20600	844	23	21.74	133.66%	0.02	0.03	-
					RE Cheek	-	20525	836.5	23	21.67	135.83%	0.06	0.08	-
			50	) RB	RE Tilt	-	20525	836.5	23	21.67	135.83%	0.02	0.03	-
			00		LE Cheek	-	20525	836.5	23	21.67	135.83%	0.04	0.05	-
					LE Tilt	-	20525	836.5	23	21.67	135.83%	0.02	0.03	-
Body-worn	10MHz	QPSK	1RB	49	Front side	10	20525	836.5	24	22.75	133.35%	0.25	0.33	-
body wom	1010112		ind	45	Back side	10	20525	836.5	24	22.75	133.35%	0.27	0.36	-
					Front side	10	20525	836.5	24	22.75	133.35%	0.25	0.33	-
					Back side	10	20525	836.5	24	22.75	133.35%	0.27	0.36	200
			1 RB	49	Top side	10	20525	836.5	24	22.75	133.35%	0.01	0.01	-
			TILD	43	Bottom side	10	20525	836.5	24	22.75	133.35%	0.19	0.25	-
					Right side	10	20525	836.5	24	22.75	133.35%	0.25	0.33	-
					Left side	10	20525	836.5	24	22.75	133.35%	0.04	0.05	-
					Front side	10	20600	844	23	21.74	133.66%	0.17	0.23	-
					Back side	10	20600	844	23	21.74	133.66%	0.20	0.27	-
Hotspot	10MHz	OPSK	25 RB	25	Top side	10	20600	844	23	21.74	133.66%	0.01	0.01	-
Hoispoi		QPSK	20 KD	25	Bottom side	10	20600	844	23	21.74	133.66%	0.12	0.16	-
					Right side	10	20600	844	23	21.74	133.66%	0.18	0.24	-
					Left side	10	20600	844	23	21.74	133.66%	0.03	0.04	-
1					Front side	10	20525	836.5	23	21.67	135.83%	0.17	0.23	-
1					Back side	10	20525	836.5	23	21.67	135.83%	0.18	0.24	-
1			50	) RB	Top side	10	20525	836.5	23	21.67	135.83%	0.01	0.01	-
1			50		Bottom side	10	20525	836.5	23	21.67	135.83%	0.12	0.16	-
					Right side	10	20525	836.5	23	21.67	135.83%	0.17	0.23	-
					Left side	10	20525	836.5	23	21.67	135.83%	0.02	0.03	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. t (886-2) 2299-3279 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 f (886-2) 2298-0488

www.tw.sgs.com

Member of SGS Group



#### LTE FDD Band 7

Mode	Bandwidth (MHz)	Modulation	RB Size	RB start	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Scaling	Averaged S (W/		Plot page
										. ,		Measured	Reported	
					RE Cheek	-	21350	2560	24	23.24	119.12%	0.06	0.07	-
			1 RB	99	RE Tilt	-	21350	2560	24	23.24	119.12%	0.06	0.07	-
			IND	33	LE Cheek	-	21350	2560	24	23.24	119.12%	0.15	0.18	201
					LE Tilt	-	21350	2560	24	23.24	119.12%	0.05	0.06	-
					RE Cheek	-	20850	2510	23	22.34	116.41%	0.04	0.05	-
Head	20MHz	OPSK	50 RB	25	RE Tilt	-	20850	2510	23	22.34	116.41%	0.04	0.05	-
ricad	2011112	di oli	3010	20	LE Cheek	-	20850	2510	23	22.34	116.41%	0.11	0.13	-
					LE Tilt	-	20850	2510	23	22.34	116.41%	0.03	0.03	-
					RE Cheek	-	20850	2510	23	22.33	116.68%	0.04	0.05	-
			10	0 RB	RE Tilt	-	20850	2510	23	22.33	116.68%	0.04	0.05	-
			10	0 ND	LE Cheek	-	20850	2510	23	22.33	116.68%	0.10	0.12	-
					LE Tilt	-	20850	2510	23	22.33	116.68%	0.04	0.05	-
Body-worn	20MHz	QPSK	1RB	99	Front side	10	21350	2560	24	23.24	119.12%	0.36	0.43	-
Dody wom	2011112	di oli	inte		Back side	10	21350	2560	24	23.24	119.12%	0.49	0.58	-
					Front side	10	21350	2560	24	23.24	119.12%	0.36	0.43	-
					Back side	10	21350	2560	24	23.24	119.12%	0.49	0.58	-
					Top side	10	21350	2560	24	23.24	119.12%	0.01	0.01	-
			1 RB	99	Bottom side	10	20850	2510	24	23.17	121.06%	0.75	0.91	-
			TRO		Bottom side	10	21100	2535	24	23.14	121.90%	0.86	1.05	202
					Bottom side	10	21350	2560	24	23.24	119.12%	0.78	0.93	-
					Right side	10	21350	2560	24	23.24	119.12%	0.05	0.06	-
					Left side	10	21350	2560	24	23.24	119.12%	0.16	0.19	-
					Front side	10	20850	2510	23	22.34	116.41%	0.23	0.27	-
Hotspot	20MHz	QPSK			Back side	10	20850	2510	23	22.34	116.41%	0.32	0.37	-
Потэрог	2011112	GI OK	50 RB	25	Top side	10	20850	2510	23	22.34	116.41%	0.01	0.01	-
			30 KB	25	Bottom side	10	20850	2510	23	22.34	116.41%	0.52	0.61	-
					Right side	10	20850	2510	23	22.34	116.41%	0.03	0.03	-
					Left side	10	20850	2510	23	22.34	116.41%	0.11	0.13	-
					Front side	10	20850	2510	23	22.33	116.68%	0.23	0.27	-
					Back side	10	20850	2510	23	22.33	116.68%	0.32	0.37	-
			10	0 RB	Top side	10	20850	2510	23	22.33	116.68%	0.01	0.01	-
			1 10	UIND	Bottom side	10	20850	2510	23	22.33	116.68%	0.52	0.61	-
					Right side	10	20850	2510	23	22.33	116.68%	0.03	0.04	-
					Left side	10	20850	2510	23	22.33	116.68%	0.11	0.13	-

## LTE FDD Band 12

Mode	Bandwidth (MHz)	Modulation	RB Size	RB start	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Scaling	Averaged S (W/		Plot page
												Measured	Reported	
					RE Cheek	-	23095	707.5	24	22.67	135.83%	0.10	0.14	203
			1 RB	49	RE Tilt	-	23095	707.5	24	22.67	135.83%	0.03	0.04	-
			TRD	43	LE Cheek	-	23095	707.5	24	22.67	135.83%	0.06	0.08	-
					LE Tilt	-	23095	707.5	24	22.67	135.83%	0.03	0.04	-
					RE Cheek	-	23095	707.5	23	21.64	136.77%	0.06	0.08	-
Head	10MHz	QPSK	25 RB	25	RE Tilt	-	23095	707.5	23	21.64	136.77%	0.02	0.03	-
rieau	1011112	GI OK	20 KD	20	LE Cheek	-	23095	707.5	23	21.64	136.77%	0.04	0.05	-
					LE Tilt	-	23095	707.5	23	21.64	136.77%	0.02	0.03	-
					RE Cheek	-	23060	704	23	21.61	137.72%	0.07	0.10	-
			50	) RB	RE Tilt	-	23060	704	23	21.61	137.72%	0.02	0.03	-
			50		LE Cheek	-	23060	704	23	21.61	137.72%	0.04	0.06	-
					LE Tilt	-	23060	704	23	21.61	137.72%	0.02	0.03	-
Body-worn	10MHz	QPSK	1RB	49	Front side	10	23095	707.5	24	22.67	135.83%	0.27	0.37	-
body wom	1010112	di bit	inte	40	Back side	10	23095	707.5	24	22.67	135.83%	0.31	0.42	-
					Front side	10	23095	707.5	24	22.67	135.83%	0.27	0.37	-
					Back side	10	23095	707.5	24	22.67	135.83%	0.31	0.42	204
			1 RB	49	Top side	10	23095	707.5	24	22.67	135.83%	0.02	0.03	-
			TRO	40	Bottom side	10	23095	707.5	24	22.67	135.83%	0.10	0.14	-
					Right side	10	23095	707.5	24	22.67	135.83%	0.26	0.35	-
					Left side	10	23095	707.5	24	22.67	135.83%	0.04	0.05	-
					Front side	10	23095	707.5	23	21.64	136.77%	0.18	0.25	-
					Back side	10	23095	707.5	23	21.64	136.77%	0.20	0.27	-
Hotspot	10MHz	QPSK	25 RB	25	Top side	10	23095	707.5	23	21.64	136.77%	0.01	0.01	-
riotspot	1011112	GI OK	2310	25	Bottom side	10	23095	707.5	23	21.64	136.77%	0.07	0.10	-
					Right side	10	23095	707.5	23	21.64	136.77%	0.17	0.23	-
					Left side	10	23095	707.5	23	21.64	136.77%	0.03	0.04	-
1					Front side	10	23060	704	23	21.61	137.72%	0.18	0.25	-
1					Back side	10	23060	704	23	21.61	137.72%	0.21	0.29	-
1				) RB	Top side	10	23060	704	23	21.61	137.72%	0.01	0.01	-
1			50	, ND	Bottom side	10	23060	704	23	21.61	137.72%	0.07	0.10	-
1					Right side	10	23060	704	23	21.61	137.72%	0.17	0.23	-
1					Left side	10	23060	704	23	21.61	137.72%	0.02	0.03	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 f (886-2) 2298-0488



#### Report No. : E5/2019/C0017 Page: 141 of 261

#### LTE FDD Band 13

Mode	Bandwidth (MHz)	Modulation	RB Size	RB start	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Scaling	Averaged S (W/		Plot page
										(, ,		Measured	Reported	
					RE Cheek	-	23230	782	24	22.72	134.28%	0.04	0.05	205
			1 RB	25	RE Tilt	-	23230	782	24	22.72	134.28%	0.02	0.03	-
			IND	25	LE Cheek	-	23230	782	24	22.72	134.28%	0.03	0.04	-
					LE Tilt	-	23230	782	24	22.72	134.28%	0.02	0.03	-
					RE Cheek	-	23230	782	23	21.77	132.74%	0.03	0.04	-
Head	10MHz	QPSK	25 RB	25	RE Tilt	-	23230	782	23	21.77	132.74%	0.01	0.01	-
Tieau	TOWITZ	QI SIX	20 KD	25	LE Cheek	-	23230	782	23	21.77	132.74%	0.02	0.03	-
					LE Tilt	-	23230	782	23	21.77	132.74%	0.01	0.01	-
					RE Cheek	-	23230	782	23	21.79	132.13%	0.03	0.04	-
			50	RB	RE Tilt	-	23230	782	23	21.79	132.13%	0.01	0.01	-
			00		LE Cheek	-	23230	782	23	21.79	132.13%	0.02	0.03	-
					LE Tilt	-	23230	782	23	21.79	132.13%	0.01	0.01	-
Body-worn	10MHz	QPSK	1RB	25	Front side	10	23230	782	24	22.72	134.28%	0.09	0.12	-
Douy-woin	1010112	9	IND	20	Back side	10	23230	782	24	22.72	134.28%	0.10	0.13	-
					Front side	10	23230	782	24	22.72	134.28%	0.09	0.12	-
					Back side	10	23230	782	24	22.72	134.28%	0.10	0.13	206
			1 RB	25	Top side	10	23230	782	24	22.72	134.28%	0.01	0.01	-
			IND	25	Bottom side	10	23230	782	24	22.72	134.28%	0.04	0.05	-
					Right side	10	23230	782	24	22.72	134.28%	0.09	0.12	-
					Left side	10	23230	782	24	22.72	134.28%	0.01	0.01	-
					Front side	10	23230	782	23	21.77	132.74%	0.06	0.08	-
					Back side	10	23230	782	23	21.77	132.74%	0.07	0.09	-
Hotspot	10MHz	QPSK	25 RB	25	Top side	10	23230	782	23	21.77	132.74%	0.00	0.00	-
HOISPOL	TOWINZ	QFSK	20 KD	25	Bottom side	10	23230	782	23	21.77	132.74%	0.03	0.04	-
					Right side	10	23230	782	23	21.77	132.74%	0.06	0.08	-
					Left side	10	23230	782	23	21.77	132.74%	0.01	0.01	-
					Front side	10	23230	782	23	21.79	132.13%	0.06	0.08	-
					Back side	10	23230	782	23	21.79	132.13%	0.07	0.09	-
1			50	RB	Top side	10	23230	782	23	21.79	132.13%	0.00	0.00	-
			50	N KD	Bottom side	10	23230	782	23	21.79	132.13%	0.03	0.04	-
1					Right side	10	23230	782	23	21.79	132.13%	0.05	0.07	-
1					Left side	10	23230	782	23	21.79	132.13%	0.01	0.01	-

## LTE FDD Band 17

Mode	Bandwidth (MHz)	Modulation	RB Size	RB start	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Scaling	Averaged S (W/		Plot page
												Measured	Reported	
					RE Cheek	-	23790	710	24	22.68	135.52%	0.10	0.14	207
			1 RB	49	RE Tilt	-	23790	710	24	22.68	135.52%	0.03	0.04	-
			TRD	43	LE Cheek	-	23790	710	24	22.68	135.52%	0.06	0.08	-
					LE Tilt	-	23790	710	24	22.68	135.52%	0.03	0.04	-
					RE Cheek	-	23780	709	23	21.75	133.35%	0.06	0.08	-
Head	10MHz	QPSK	25 RB	25	RE Tilt	-	23780	709	23	21.75	133.35%	0.02	0.03	-
ricad	10101112	di oli	2510	2.5	LE Cheek	-	23780	709	23	21.75	133.35%	0.04	0.05	-
					LE Tilt	-	23780	709	23	21.75	133.35%	0.02	0.03	-
					RE Cheek	-	23780	709	23	21.63	137.09%	0.06	0.08	-
			50	) RB	RE Tilt	-	23780	709	23	21.63	137.09%	0.02	0.03	-
					LE Cheek	-	23780	709	23	21.63	137.09%	0.04	0.05	-
					LE Tilt	-	23780	709	23	21.63	137.09%	0.02	0.03	-
Body-worn	10MHz	QPSK	1RB	49	Front side	10	23790	710	24	22.68	135.52%	0.27	0.37	-
Dody wom	1010112	di bit	into	40	Back side	10	23790	710	24	22.68	135.52%	0.31	0.42	-
					Front side	10	23790	710	24	22.68	135.52%	0.27	0.37	-
					Back side	10	23790	710	24	22.68	135.52%	0.31	0.42	208
			1 RB	49	Top side	10	23790	710	24	22.68	135.52%	0.01	0.01	-
			TRD	43	Bottom side	10	23790	710	24	22.68	135.52%	0.10	0.14	-
					Right side	10	23790	710	24	22.68	135.52%	0.24	0.33	-
					Left side	10	23790	710	24	22.68	135.52%	0.04	0.05	-
					Front side	10	23780	709	23	21.75	133.35%	0.17	0.23	-
					Back side	10	23780	709	23	21.75	133.35%	0.20	0.27	-
Hotspot	10MHz	QPSK	25 RB	25	Top side	10	23780	709	23	21.75	133.35%	0.01	0.01	-
Hotspot	TOMP	QFSK	20 KD	20	Bottom side	10	23780	709	23	21.75	133.35%	0.07	0.09	-
					Right side	10	23780	709	23	21.75	133.35%	0.16	0.21	-
					Left side	10	23780	709	23	21.75	133.35%	0.02	0.03	-
					Front side	10	23780	709	23	21.63	137.09%	0.16	0.22	-
					Back side	10	23780	709	23	21.63	137.09%	0.20	0.27	-
			50	) RB	Top side	10	23780	709	23	21.63	137.09%	0.01	0.01	-
			50	) KD	Bottom side	10	23780	709	23	21.63	137.09%	0.06	0.08	-
					Right side	10	23780	709	23	21.63	137.09%	0.15	0.21	-
					Left side	10	23780	709	23	21.63	137.09%	0.02	0.03	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 f (886-2) 2298-0488



#### Report No. : E5/2019/C0017 Page: 142 of 261

#### LTE TDD Band 38

Mode	Bandwidth (MHz)	Modulation	RB Size	RB start	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Scaling	Averaged S (W/		Plot page
									, , , , , , , , , , , , , , , , , , , ,	(, ,		Measured	Reported	
					RE Cheek	-	38000	2595	24	23.22	119.67%	0.05	0.06	-
			1 RB	50	RE Tilt	-	38000	2595	24	23.22	119.67%	0.04	0.05	-
			IND	50	LE Cheek	-	38000	2595	24	23.22	119.67%	0.07	0.08	209
					LE Tilt	-	38000	2595	24	23.22	119.67%	0.04	0.05	-
					RE Cheek	-	38150	2610	23	22.30	117.49%	0.03	0.04	-
Head	20MHz	QPSK	50 RB	0	RE Tilt	-	38150	2610	23	22.30	117.49%	0.02	0.02	-
riodd	2011112	Q. 0.1	50112	Ŭ	LE Cheek	-	38150	2610	23	22.30	117.49%	0.05	0.06	-
					LE Tilt	-	38150	2610	23	22.30	117.49%	0.02	0.02	-
					RE Cheek	-	38000	2595	23	22.36	115.88%	0.03	0.03	-
			10	0 RB	RE Tilt	-	38000	2595	23	22.36	115.88%	0.02	0.02	-
				0110	LE Cheek	-	38000	2595	23	22.36	115.88%	0.05	0.06	-
					LE Tilt	-	38000	2595	23	22.36	115.88%	0.02	0.02	-
Body-worn	20MHz	QPSK	1RB	50	Front side	10	38000	2595	24	23.22	119.67%	0.18	0.22	-
					Back side	10	38000	2595	24	23.22	119.67%	0.21	0.25	-
					Front side	10	38000	2595	24	23.22	119.67%	0.18	0.22	-
					Back side	10	38000	2595	24	23.22	119.67%	0.21	0.25	-
			1 RB	50	Top side	10	38000	2595	24	23.22	119.67%	0.01	0.01	-
				00	Bottom side	10	38000	2595	24	23.22	119.67%	0.35	0.42	210
					Right side	10	38000	2595	24	23.22	119.67%	0.03	0.04	-
					Left side	10	38000	2595	24	23.22	119.67%	0.07	0.08	-
					Front side	10	38150	2610	23	22.30	117.49%	0.12	0.14	-
					Back side	10	38150	2610	23	22.30	117.49%	0.14	0.16	-
Hotspot	20MHz	QPSK	50 RB	0	Top side	10	38150	2610	23	22.30	117.49%	0.01	0.01	-
Tiotopot	2011112	QI OIX	50112	Ŭ	Bottom side	10	38150	2610	23	22.30	117.49%	0.23	0.27	-
					Right side	10	38150	2610	23	22.30	117.49%	0.02	0.02	-
					Left side	10	38150	2610	23	22.30	117.49%	0.05	0.06	-
					Front side	10	38000	2595	23	22.36	115.88%	0.10	0.12	-
					Back side	10	38000	2595	23	22.36	115.88%	0.13	0.15	-
			10	0 RB	Top side	10	38000	2595	23	22.36	115.88%	0.01	0.01	-
			10		Bottom side	10	38000	2595	23	22.36	115.88%	0.21	0.24	-
					Right side	10	38000	2595	23	22.36	115.88%	0.02	0.02	-
					Left side	10	38000	2595	23	22.36	115.88%	0.05	0.06	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

f (886-2) 2298-0488



#### Report No. : E5/2019/C0017 Page: 143 of 261

#### LTE TDD Band 41

Mode	Bandwidth (MHz)	Modulation	RB Size	RB start	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Scaling	Averaged S (W/		Plot page
										. ,		Measured	Reported	
					RE Cheek	-	41490	2680	24.5	23.74	119.12%	0.04	0.05	-
			1 RB	50	RE Tilt	•	41490	2680	24.5	23.74	119.12%	0.03	0.04	-
			IND	50	LE Cheek	-	41490	2680	24.5	23.74	119.12%	0.06	0.07	211
					LE Tilt	-	41490	2680	24.5	23.74	119.12%	0.03	0.04	-
					RE Cheek	-	41490	2680	23.5	22.93	114.02%	0.02	0.02	-
Head	20MHz	QPSK	50 RB	25	RE Tilt	-	41490	2680	23.5	22.93	114.02%	0.01	0.01	-
neau	20101112	Qi OK	30 10	25	LE Cheek	-	41490	2680	23.5	22.93	114.02%	0.03	0.03	-
					LE Tilt	-	41490	2680	23.5	22.93	114.02%	0.01	0.01	-
					RE Cheek	-	40620	2593	23.5	22.78	118.03%	0.02	0.02	-
			10	0 RB	RE Tilt	-	40620	2593	23.5	22.78	118.03%	0.01	0.01	-
			10		LE Cheek	-	40620	2593	23.5	22.78	118.03%	0.03	0.04	-
					LE Tilt	-	40620	2593	23.5	22.78	118.03%	0.01	0.01	-
Body-worn	20MHz	QPSK	1RB	50	Front side	10	41490	2680	24.5	23.74	119.12%	0.14	0.17	-
Dody Wolff	2011112	Gron	into		Back side	10	41490	2680	24.5	23.74	119.12%	0.17	0.20	-
					Front side	10	41490	2680	24.5	23.74	119.12%	0.14	0.17	-
					Back side	10	41490	2680	24.5	23.74	119.12%	0.17	0.20	-
			1 RB	50	Top side	10	41490	2680	24.5	23.74	119.12%	0.01	0.01	-
			TIND	50	Bottom side	10	41490	2680	24.5	23.74	119.12%	0.31	0.37	212
					Right side	10	41490	2680	24.5	23.74	119.12%	0.02	0.02	-
					Left side	10	41490	2680	24.5	23.74	119.12%	0.05	0.06	-
					Front side	10	41490	2680	23.5	22.93	114.02%	0.09	0.10	-
					Back side	10	41490	2680	23.5	22.93	114.02%	0.12	0.14	-
Hotspot	20MHz	QPSK	50 RB	25	Top side	10	41490	2680	23.5	22.93	114.02%	0.01	0.01	-
Hotspot	20101112	QFSK	50 KB	25	Bottom side	10	41490	2680	23.5	22.93	114.02%	0.22	0.25	-
					Right side	10	41490	2680	23.5	22.93	114.02%	0.02	0.02	-
					Left side	10	41490	2680	23.5	22.93	114.02%	0.04	0.05	-
					Front side	10	40620	2593	23.5	22.78	118.03%	0.09	0.11	-
					Back side	10	40620	2593	23.5	22.78	118.03%	0.11	0.13	-
			10	0 RB	Top side	10	40620	2593	23.5	22.78	118.03%	0.01	0.01	-
			10	UKD	Bottom side	10	40620	2593	23.5	22.78	118.03%	0.21	0.25	-
					Right side	10	40620	2593	23.5	22.78	118.03%	0.02	0.02	-
					Left side	10	40620	2593	23.5	22.78	118.03%	0.04	0.05	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

f (886-2) 2298-0488

www.tw.sgs.com

Member of SGS Group



#### WLAN 802.11b (Ant 0 antenna)

Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged S (W/	0	Plot page
						Tolerance (dBm)	(dBm)		Measured	Reported	
		RE Cheek	-	10	2457	12	11.84	103.75%	0.14	0.15	-
	Head	RE Tilt	-	10	2457	12	11.84	103.75%	0.10	0.10	-
	neau	LE Cheek	-	10	2457	12	11.84	103.75%	0.16	0.17	213
		LE Tilt	-	10	2457	12	11.84	103.75%	0.13	0.13	-
	Body-	Front side	10	10	2457	12	11.84	103.75%	0.05	0.05	-
Ant 0	worn	Back side	10	10	2457	12	11.84	103.75%	0.06	0.06	-
Anto		Front side	10	10	2457	12	11.84	103.75%	0.05	0.05	-
		Back side	10	10	2457	12	11.84	103.75%	0.06	0.06	214
	Hotopot	Top side	10	10	2457	12	11.84	103.75%	0.05	0.05	-
	Hotspot	Bottom side	10	10	2457	12	11.84	103.75%	0.00	0.00	-
		Right side	10	10	2457	12	11.84	103.75%	0.05	0.05	-
		Left side	10	10	2457	12	11.84	103.75%	0.02	0.02	-

## **Bluetooth (GFSK)**

Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Scaling	Averaged S (W/	0	Plot page
						TOIEIAIICE (UBIII)	(ubiii)		Measured	Reported	
		RE Cheek	-	39	2441	12.5	11.31	131.52%	0.05	0.07	-
	Head	RE Tilt	-	39	2441	12.5	11.31	131.52%	0.04	0.05	-
Ant 0	Tieau	LE Cheek	-	39	2441	12.5	11.31	131.52%	0.06	0.08	215
Anto		LE Tilt	-	39	2441	12.5	11.31	131.52%	0.06	0.08	-
	Body-	Front side	10	39	2441	12.5	11.31	131.52%	0.03	0.04	-
	worn	Back side	10	39	2441	12.5	11.31	131.52%	0.03	0.04	216
Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged SA (W/	•	Plot page
Antenna	Mode	Position		СН	•	U U		Scaling	U U	•	
Antenna	Mode	Position Front side		CH 39	•	Power + Max.	Avg. Power	Scaling 131.52%	(W/	'kg)	
Antenna			(mm)		(MHz)	Power + Max. Tolerance (dBm)	Avg. Power (dBm)		(W/ Measured	'kg) Reported	page
	product	Front side	(mm) 0	39	(MHz) 2441	Power + Max. Tolerance (dBm) 12.5	Avg. Power (dBm) 11.31	131.52%	(W/ Measured 0.11	(kg) Reported 0.14	page 217
Antenna Ant 0	product specific	Front side Back side	(mm) 0 0	39 39	(MHz) 2441 2441	Power + Max. Tolerance (dBm) 12.5 12.5	Avg. Power (dBm) 11.31 11.31	131.52% 131.52%	(W/ Measured 0.11 0.09	kg) Reported 0.14 0.12	page 217 -
	product	Front side Back side Top side	(mm) 0 0 0	39 39 39	(MHz) 2441 2441 2441	Power + Max. Tolerance (dBm) 12.5 12.5 12.5	Avg. Power (dBm) 11.31 11.31 11.31	131.52% 131.52% 131.52%	(W/ Measured 0.11 0.09 0.06	kg) Reported 0.14 0.12 0.08	page 217 - -

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

```
www.tw.sas.com
```



# WLAN 802.11ac(80M) 5.2G (Ant 0 antenna)

Antenna	Antenna Mode Positi		Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power	Scaling	Averaged S (W/	•	Plot page
						TOIEIAIICE (UBIII)	(dBm)		Measured	Reported	
		RE Cheek	-	42	5210	12	11.93	101.59%	0.17	0.17	-
	Head	RE Tilt	-	42	5210	12	11.93	101.59%	0.09	0.09	-
Ant 0	neau	LE Cheek	-	42	5210	12	11.93	101.59%	0.18	0.18	218
Anto		LE Tilt	-	42	5210	12	11.93	101.59%	0.11	0.11	-
	Body-	Front side	10	42	5210	12	11.93	101.59%	0.09	0.09	-
	worn	Back side	10	42	5210	12	11.93	101.59%	0.12	0.12	219
Antenna	Mode	Position	Distance (mm)	сн	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged SA (W/	•	Plot page
Antenna	Mode	Position		СН	•	•		Scaling	U U	•	
Antenna	Mode	Position Front side		CH 42	•	Power + Max.	Avg. Power	Scaling 101.59%	(W/	'kg)	
Antenna			(mm)		(MHz)	Power + Max. Tolerance (dBm)	Avg. Power (dBm)		(W/ Measured	'kg) Reported	page
	product	Front side	(mm) 0	42	(MHz) 5210	Power + Max. Tolerance (dBm) 12	Avg. Power (dBm) 11.93	101.59%	(W/ Measured 0.22	kg) Reported 0.22	page 220
Antenna Ant 0		Front side Back side	(mm) 0 0	42 42	(MHz) 5210 5210	Power + Max. Tolerance (dBm) 12 12	Avg. Power (dBm) 11.93 11.93	101.59% 101.59%	(W/ Measured 0.22 0.20	kg) Reported 0.22 0.20	page 220 -
	product specific	Front side Back side Top side	(mm) 0 0 0	42 42 42 42	(MHz) 5210 5210 5210	Power + Max. Tolerance (dBm) 12 12 12 12	Avg. Power (dBm) 11.93 11.93 11.93	101.59% 101.59% 101.59%	(W/ Measured 0.22 0.20 0.04	(kg) Reported 0.22 0.20 0.04	page 220 - -

# WLAN 802.11ac(80M) 5.3G (Ant 0 antenna)

Antenna	Antenna Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power	Scaling	Averaged S (W/	•	Plot page
						Tolerance (dBm)	(dBm)		Measured	Reported	
		RE Cheek	-	58	5290	12	11.83	103.96%	0.19	0.20	-
	Head	RE Tilt	-	58	5290	12	11.83	103.96%	0.09	0.09	-
Ant 0	neau	LE Cheek	-	58	5290	12	11.83	103.96%	0.19	0.20	221
Anto		LE Tilt	-	58	5290	12	11.83	103.96%	0.10	0.10	-
	Body-	Front side	10	58	5290	12	11.83	103.96%	0.08	0.08	-
	worn	Back side	10	58	5290	12	11.83	103.96%	0.09	0.09	222
Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged SA (W/	•	Plot page
Antenna	Mode	Position		СН	•	0		Scaling	Ŭ	•	
Antenna	Mode	Position Front side		CH 58	•	Power + Max.	Avg. Power	Scaling 103.96%	(W/	′kg)	
Antenna			(mm)	-	(MHz)	Power + Max. Tolerance (dBm)	Avg. Power (dBm)		(W/ Measured	(kg) Reported	page
	product	Front side	(mm) 0	58	(MHz) 5290	Power + Max. Tolerance (dBm) 12	Avg. Power (dBm) 11.83	103.96%	(W/ Measured 0.24	/kg) Reported 0.25	page 223
Antenna Ant 0		Front side Back side	(mm) 0 0	58 58	(MHz) 5290 5290	Power + Max. Tolerance (dBm) 12 12	Avg. Power (dBm) 11.83 11.83	103.96% 103.96%	(W/ Measured 0.24 0.23	(kg) Reported 0.25 0.24	page 223 -
	product specific	Front side Back side Top side	(mm) 0 0 0	58 58 58	(MHz) 5290 5290 5290	Power + Max. Tolerance (dBm) 12 12 12 12	Avg. Power (dBm) 11.83 11.83 11.83	103.96% 103.96% 103.96%	(W/ Measured 0.24 0.23 0.04	(kg) Reported 0.25 0.24 0.04	page 223 - -

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279



## WLAN 802.11ac(80M) 5.6G (Ant 0 antenna)

Antenna Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged S (W/	•	Plot page	
						Tolerance (dBm)	(dBm)		Measured	Reported	
		RE Cheek	-	138	5690	12	11.85	103.48%	0.51	0.53	-
	Head	RE Tilt	-	138	5690	12	11.85	103.48%	0.22	0.23	-
Ant 0	neau	LE Cheek	-	138	5690	12	11.85	103.48%	0.52	0.54	224
Anto		LE Tilt	-	138	5690	12	11.85	103.48%	0.34	0.35	-
	Body-	Front side	10	138	5690	12	11.85	103.48%	0.08	0.08	-
	worn	Back side	10	138	5690	12	11.85	103.48%	0.10	0.10	225
Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged SA (W/	•	Plot page
Antenna	Mode	Position		СН		•		Scaling	<b>U</b>	•	
Antenna	Mode	Position Front side		CH 138		Power + Max.	Avg. Power	Scaling 103.48%	(W/	'kg)	
Antenna			(mm)	-	(MHz)	Power + Max. Tolerance (dBm)	Avg. Power (dBm)		(W/ Measured	(kg) Reported	page
	product	Front side	(mm) 0	138	(MHz) 5690	Power + Max. Tolerance (dBm) 12	Avg. Power (dBm) 11.85	103.48%	(W/ Measured 0.13	kg) Reported 0.13	page 226
Antenna Ant 0		Front side Back side	(mm) 0 0	138 138	(MHz) 5690 5690	Power + Max. Tolerance (dBm) 12 12	Avg. Power (dBm) 11.85 11.85	103.48% 103.48%	(W/ Measured 0.13 0.12	kg) Reported 0.13 0.12	page 226
	product	Front side Back side Top side	(mm) 0 0 0	138 138 138	(MHz) 5690 5690 5690	Power + Max. Tolerance (dBm) 12 12 12 12	Avg. Power (dBm) 11.85 11.85 11.85	103.48% 103.48% 103.48%	(W/ Measured 0.13 0.12 0.04	(kg) Reported 0.13 0.12 0.04	page 226 -

# WLAN 802.11ac(80M) 5.8G (Ant 0 antenna)

Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged SAR over 1g (W/kg)		Plot page
						Tolerance (dBm)	(dBm)		Measured	Reported	
		RE Cheek	-	155	5775	12	11.88	102.77%	0.47	0.48	-
	Head	RE Tilt	-	155	5775	12	11.88	102.77%	0.20	0.21	-
	Tieau	LE Cheek	-	155	5775	12	11.88	102.77%	0.49	0.50	227
		LE Tilt	-	155	5775	12	11.88	102.77%	0.31	0.32	-
	Body-	Front side	10	155	5775	12	11.88	102.77%	0.10	0.10	-
Ant 0	worn	Back side	10	155	5775	12	11.88	102.77%	0.11	0.11	-
		Front side	10	155	5775	12	11.88	102.77%	0.10	0.10	-
		Back side	10	155	5775	12	11.88	102.77%	0.11	0.11	228
	Hotspot	Top side	10	155	5775	12	11.88	102.77%	0.01	0.01	-
	riotspot	Bottom side	10	155	5775	12	11.88	102.77%	0.00	0.00	-
		Right side	10	155	5775	12	11.88	102.77%	0.06	0.06	-
		Left side	10	155	5775	12	11.88	102.77%	0.02	0.02	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

f (886-2) 2298-0488



#### WLAN 802.11b (Ant 1 antenna)

Antenna	Antenna Mode F		Distance (mm)	СН	CH Freq. (MHz)	Power + Max	Measured Avg. Power (dBm)	Scaling	Averaged SAR over 1g (W/kg)		Plot page
						Tolerance (dbm)	(abm)		Measured	Reported	
		RE Cheek	-	11	2462	12	11.94	101.39%	0.07	0.07	229
	Head	RE Tilt	-	11	2462	12	11.94	101.39%	0.06	0.06	-
	пеац	LE Cheek	-	11	2462	12	11.94	101.39%	0.05	0.05	-
		LE Tilt	-	11	2462	12	11.94	101.39%	0.04	0.04	-
	Body-	Front side	10	11	2462	12	11.94	101.39%	0.02	0.02	-
Ant 1	worn	Back side	10	11	2462	12	11.94	101.39%	0.12	0.12	-
Anti		Front side	10	11	2462	12	11.94	101.39%	0.02	0.02	-
		Back side	10	11	2462	12	11.94	101.39%	0.12	0.12	230
	Hotspot	Top side	10	11	2462	12	11.94	101.39%	0.01	0.01	-
	HOISPOI	Bottom side	10	11	2462	12	11.94	101.39%	0.00	0.00	-
		Right side	10	11	2462	12	11.94	101.39%	0.02	0.02	-
		Left side	10	11	2462	12	11.94	101.39%	0.05	0.05	-

## WLAN 802.11ac(80M) 5.2G (Ant 1 antenna)

Antenna Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Scaling	Averaged S (W/	•	Plot page	
						TOIEIAIICE (UBIII)	(ubiii)		Measured	Reported	
		RE Cheek	-	42	5210	12	11.46	113.20%	0.16	0.18	231
	Head	RE Tilt	-	42	5210	12	11.46	113.20%	0.09	0.10	-
Ant 1	Tieau	LE Cheek	-	42	5210	12	11.46	113.20%	0.15	0.17	-
Anti		LE Tilt	-	42	5210	12	11.46	113.20%	0.08	0.09	-
	Body-	Front side	10	42	5210	12	11.46	113.20%	0.10	0.11	-
	worn	Back side	10	42	5210	12	11.46	113.20%	0.12	0.14	232
Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged SA (W/	•	Plot page
Antenna	Mode	Position		СН	•	<b>.</b>		Scaling	Ŭ	•	
Antenna	Mode	Position Front side		CH 42	•	Power + Max.	Avg. Power	Scaling 113.20%	(W/	'kg)	
Antenna			(mm)		(MHz)	Power + Max. Tolerance (dBm)	Avg. Power (dBm)		(W/ Measured	'kg) Reported	page
	product	Front side	(mm) 0	42	(MHz) 5210	Power + Max. Tolerance (dBm) 12	Avg. Power (dBm) 11.46	113.20%	(W/ Measured 0.18	kg) Reported 0.20	page
Antenna Ant 1		Front side Back side	(mm) 0 0	42 42	(MHz) 5210 5210	Power + Max. Tolerance (dBm) 12 12	Avg. Power (dBm) 11.46 11.46	113.20% 113.20%	(W/ Measured 0.18 0.25	kg) Reported 0.20 0.28	page - 233
	product specific	Front side Back side Top side	(mm) 0 0 0	42 42 42	(MHz) 5210 5210 5210	Power + Max. Tolerance (dBm) 12 12 12 12	Avg. Power (dBm) 11.46 11.46 11.46	113.20% 113.20% 113.20%	(W/ Measured 0.18 0.25 0.06	kg) Reported 0.20 0.28 0.07	page - 233 -

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

f (886-2) 2298-0488



Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power	Scaling	Averaged S (W/	0	Plot page
						Tolerance (dBm)	(dBm)		Measured	Reported	
		RE Cheek	-	58	5290	12	11.73	106.38%	0.18	0.19	234
	Head	RE Tilt	-	58	5290	12	11.73	106.38%	0.10	0.11	-
Ant 1	Tieau	LE Cheek	-	58	5290	12	11.73	106.38%	0.16	0.17	-
		LE Tilt	-	58	5290	12	11.73	106.38%	0.09	0.10	-
	Body-	Front side	10	58	5290	12	11.73	106.38%	0.10	0.11	-
	worn	Back side	10	58	5290	12	11.73	106.38%	0.13	0.14	235
Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged SA (W/	•	Plot page
Antenna	Mode	Position		СН		0		Scaling	U U	•	
Antenna	Mode	Position Front side		CH 58		Power + Max.	Avg. Power	Scaling 106.38%	(W/	kg)	
Antenna			(mm)		(MHz)	Power + Max. Tolerance (dBm)	Avg. Power (dBm)		(W/ Measured	kg) Reported	page
	product	Front side	(mm) 0	58	(MHz) 5290	Power + Max. Tolerance (dBm) 12	Avg. Power (dBm)	106.38%	(W/ Measured 0.12	kg) Reported 0.13	page
Antenna Ant 1		Front side Back side	(mm) 0 0	58 58	(MHz) 5290 5290	Power + Max. Tolerance (dBm) 12 12	Avg. Power (dBm) 11.73 11.73	106.38% 106.38%	(W/ Measured 0.12 0.22	kg) Reported 0.13 0.23	page - 236
	product	Front side Back side Top side	(mm) 0 0 0	58 58 58	(MHz) 5290 5290 5290	Power + Max. Tolerance (dBm) 12 12 12 12	Avg. Power (dBm) 11.73 11.73 11.73	106.38% 106.38% 106.38%	(W/ Measured 0.12 0.22 0.04	kg) Reported 0.13 0.23 0.04	page - 236

# WLAN 802.11ac(80M) 5.3G (Ant 1 antenna)

# WLAN 802.11ac(80M) 5.6G (Ant 1 antenna)


Antenna Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power	Scaling	Averaged S (W/	•	Plot page	
						Tolerance (dBm)	(dBm)		Measured	Reported	
		RE Cheek	-	138	5690	12	11.83	103.96%	0.16	0.17	237
	Head	RE Tilt	-	138	5690	12	11.83	103.96%	0.09	0.09	-
Ant 1	neau	LE Cheek	-	138	5690	12	11.83	103.96%	0.15	0.16	-
		LE Tilt	-	138	5690	12	11.83	103.96%	0.08	0.08	-
	Body-	Front side	10	138	5690	12	11.83	103.96%	0.06	0.06	-
	worn	Back side	10	138	5690	12	11.83	103.96%	0.08	0.08	238
Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged SA (W/	•	Plot page
Antenna	Mode	Position		СН		U U		Scaling	Ŭ	•	
Antenna	Mode	Position Front side		CH 138		Power + Max.	Avg. Power	Scaling 103.96%	(W/	'kg)	
Antenna			(mm)	-	(MHz)	Power + Max. Tolerance (dBm)	Avg. Power (dBm)		(W/ Measured	'kg) Reported	page
	product	Front side	(mm) 0	138	(MHz) 5690	Power + Max. Tolerance (dBm) 12	Avg. Power (dBm) 11.83	103.96%	(W/ Measured 0.10	kg) Reported 0.10	page
Antenna Ant 1		Front side Back side	(mm) 0 0	138 138	(MHz) 5690 5690	Power + Max. Tolerance (dBm) 12 12	Avg. Power (dBm) 11.83 11.83	103.96% 103.96%	(W/ Measured 0.10 0.14	kg) Reported 0.10 0.15	page - 239
	product specific	Front side Back side Top side	(mm) 0 0	138 138 138	(MHz) 5690 5690 5690	Power + Max. Tolerance (dBm) 12 12 12 12	Avg. Power (dBm) 11.83 11.83 11.83	103.96% 103.96% 103.96%	(W/ Measured 0.10 0.14 0.03	(kg) Reported 0.10 0.15 0.03	page - 239 -

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⁹⁰天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279





## WLAN 802.11ac(80M) 5.8G (Ant 1 antenna)

Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged SAR over 1g (W/kg)		Plot page
						Tolerance (dBm)	(dBm)		Measured	Reported	
		RE Cheek	-	155	5775	12	11.69	107.36%	0.18	0.19	240
	Head	RE Tilt	-	155	5775	12	11.69	107.36%	0.10	0.11	-
	пеац	LE Cheek	-	155	5775	12	11.69	107.36%	0.16	0.17	-
		LE Tilt	-	155	5775	12	11.69	107.36%	0.09	0.10	-
	Body-	Front side	10	155	5775	12	11.69	107.36%	0.10	0.11	-
Ant 1	worn	Back side	10	155	5775	12	11.69	107.36%	0.10	0.11	-
		Front side	10	155	5775	12	11.69	107.36%	0.10	0.11	-
		Back side	10	155	5775	12	11.69	107.36%	0.10	0.11	241
	Hotspot	Top side	10	155	5775	12	11.69	107.36%	0.02	0.02	-
	Ποιδροι	Bottom side	10	155	5775	12	11.69	107.36%	0.00	0.00	-
		Right side	10	155	5775	12	11.69	107.36%	0.02	0.02	-
		Left side	10	155	5775	12	11.69	107.36%	0.03	0.03	-

Note:

Scaling =  $\frac{\text{reported SAR}}{\text{measured SAR}} = \frac{P2(mW)}{P1(mW)} = 10^{\left(\frac{P2-P1}{10}\right)(dBm)}$ Reported SAR = measured SAR * (scaling) Where P2 is maximum specified power, P1 is measured conducted power

## 2.3 Reporting statements of conformity

The conformity statement in this report is based solely on the test results, measurement uncertainty is excluded.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



# 3. Simultaneous Transmission Analysis Simultaneous Transmission Scenarios:

Simultaneous Transmit Configurations	Head	Body-Worn	Hotspot	Product specific 10-g SAR
GSM + 2.4GHz Wi-Fi Ant 0 + 2.4GHz WiFi Ant 1	Yes	Yes	No	Yes
GPRS + 2.4GHz Wi-Fi Ant 0 + 2.4GHz WiFi Ant 1	No	No	Yes	Yes
WCDMA + 2.4GHz Wi-Fi Ant 0 + 2.4GHz WiFi Ant 1	Yes	Yes	Yes	Yes
LTE + 2.4GHz Wi-Fi Ant 0 + 2.4GHz WiFi Ant 1	Yes	Yes	Yes	Yes
GSM + 2.4GHz Wi-Fi Ant 0 + 5GHz WiFi Ant 1	Yes	Yes	No	Yes
GPRS + 2.4GHz Wi-Fi Ant 0 + 5GHz WiFi Ant 1	No	No	Yes / No ( Wi-Fi 5.2G/5.3G/5.6G)	Yes
WCDMA + 2.4GHz Wi-Fi Ant 0 + 5GHz WiFi Ant 1	Yes	Yes	Yes / No ( Wi-Fi 5.2G/5.3G/5.6G)	Yes
LTE + 2.4GHz Wi-Fi Ant 0 + 5GHz WiFi Ant 1	Yes	Yes	Yes / No ( Wi-Fi 5.2G/5.3G/5.6G)	Yes
GSM + 5GHz Wi-Fi Ant 0 + 5GHz Wi-Fi Ant 1	Yes	Yes	No	Yes
GPRS + 5GHz Wi-Fi Ant 0 + 5GHz Wi-Fi Ant 1	No	No	Yes / No ( Wi-Fi 5.2G/5.3G/5.6G)	Yes
WCDMA + 5GHz Wi-Fi Ant 0 + 5GHz Wi-Fi Ant 1	Yes	Yes	Yes / No ( Wi-Fi 5.2G/5.3G/5.6G)	Yes
LTE + 5GHz Wi-Fi Ant 0 + 5GHz Wi-Fi Ant 1	Yes	Yes	Yes / No ( Wi-Fi 5.2G/5.3G/5.6G)	Yes
GSM + 5GHz Wi-Fi Ant 0 + 2.4GHz Wi-Fi Ant 1	Yes	Yes	No	Yes
GPRS + 5GHz Wi-Fi Ant 0 + 2.4GHz Wi-Fi Ant 1	No	No	Yes / No ( Wi-Fi 5.2G/5.3G/5.6G)	Yes
WCDMA + 5GHz Wi-Fi Ant 0 + 2.4GHz Wi-Fi Ant 1	Yes	Yes	Yes / No ( Wi-Fi 5.2G/5.3G/5.6G)	Yes
LTE + 5GHz Wi-Fi Ant 0 + 2.4GHz Wi-Fi Ant 1	Yes	Yes	Yes / No ( Wi-Fi 5.2G/5.3G/5.6G)	Yes
GSM + (2.4GHz + 5GHz) Wi-Fi Ant 0 + (2.4GHz + 5GHz) Wi-Fi Ant 1	Yes	Yes	No	Yes
GPRS + (2.4GHz + 5GHz) Wi-Fi Ant 0 + (2.4GHz + 5GHz) Wi-Fi Ant 1	No	No	Yes / No ( Wi-Fi 5.2G/5.3G/5.6G)	Yes
WCDMA + (2.4GHz + 5GHz) Wi-Fi Ant 0 + (2.4GHz + 5GHz) Wi-Fi Ant 1	Yes	Yes	Yes / No ( Wi-Fi 5.2G/5.3G/5.6G)	Yes
LTE + (2.4GHz + 5GHz) Wi-Fi Ant 0 + (2.4GHz + 5GHz) Wi-Fi Ant 1	Yes	Yes	Yes / No ( Wi-Fi 5.2G/5.3G/5.6G)	Yes
GSM + 5GHz Wi-Fi Ant 0 + BT + 5GHz Wi-Fi Ant 1	Yes	Yes	No	Yes
GPRS + 5GHz Wi-Fi Ant 0 + BT + 5GHz Wi-Fi Ant 1	No	No	No	Yes
WCDMA + 5GHz Wi-Fi Ant 0 + BT + 5GHz Wi-Fi Ant 1	Yes	Yes	No	Yes
LTE + 5GHz Wi-Fi Ant 0 + BT + 5GHz Wi-Fi Ant 1	Yes	Yes	No	Yes
GSM + BT + 5GHz WiFi Ant 1	Yes	Yes	No	Yes
GPRS + BT + 5GHz WiFi Ant 1	No	No	No	Yes
WCDMA + BT + 5GHz Wi-Fi Ant 1	Yes	Yes	No	Yes
LTE + BT + 5GHz Wi-Fi Ant 1	Yes	Yes	No	Yes

Note:

1. The device does not support DTM function. Body-worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.

2. Based on KDB447498D01 note 36, when SAR test exclusion is allowed by other published RF exposure KDB procedures, such as the 2.5 cm hotspot mode SAR test exclusion for an edge or surface, then estimated SAR is not required to determine simultaneous SAR test exclusion.

3: Based on KDB 648474 D04v01r03 note 6, simultaneous transmission SAR for 10-g extremity SAR requires consideration only when standalone 10-g SAR is required.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⁹⁰天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司



### 3.1 Estimated SAR calculation

According to KDB447498 D01v06 – When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

Estimated SAR =  $\frac{\text{Max. tune up power (mW)}}{\text{Min. test separation distance(mm)}} \times \frac{\sqrt{f(\text{GHz})}}{7.5}$ 

If the minimum test separation distance is < 5mm, a distance of 5mm is used for estimated SAR calculation. When the test separation distance is >50mm, the 0.4W/kg is used for SAR-1g.

## 3.2 SPLSR evaluation and analysis

Per KDB447498D01, when the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR sum to peak location separation ratio(SPLSR).

The simultaneous transmitting antennas in each operating mode and exposure condition combination must be considered one pair at a time to determine the SAR to peak location separation ratio to qualify for test exclusion.

The ratio is determined by (SAR1 + SAR2)^1.5/Ri, rounded to two decimal digits, and must be ≤ 0.04 for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion.

SAR1 and SAR2 are the highest reported or estimated SAR for each antenna in the pair, and Ri is the separation distance between the peak SAR locations for the antenna pair in mm.

When standalone test exclusion applies, SAR is estimated; the peak location is assumed to be at the feed-point or geometric center of the antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

www.tw.sas.com



#### Report No. : E5/2019/C0017 Page: 152 of 261

		R WWAN and	I WLAN 2.4GHz MIMO, ΣSAR evaluation					
Frequency	_		rep	oorted SAR / W	/kg	ΣSAR		
band	Р	osition	WWAN	Ant 0	Aant 1	<1.6W/kg		
		Right cheek	0.06	0.15	0.07	0.28		
C C M 850	Llood	Right tilt	0.04	0.10	0.06	0.20		
GSM 850	Head	Left cheek	0.06	0.17	0.05	0.28		
		Left tilt	0.03	0.13	0.04	0.20		
		Front side	0.22	0.05	0.02	0.29		
		Back side	0.23	0.06	0.12	0.41		
GPRS 850	11-1	Top side	0.02	0.05	0.01	0.08		
(1Dn4UP)	Hotspot	Bottom side	0.17	0.00	0.00	0.17		
		Right side	0.19	0.05	0.02	0.26		
		Left side	0.05	0.02	0.05	0.12		
		Right cheek	0.07	0.15	0.07	0.29		
0014 4000		Right tilt	0.04	0.10	0.06	0.20		
GSM 1900	Head	Left cheek	0.11	0.17	0.05	0.33		
		Left tilt	0.06	0.13	0.04	0.23		
		Front side	0.30	0.05	0.02	0.37		
		Back side	0.33	0.06	0.12	0.51		
GPRS 1900	11-1	Top side	0.03	0.05	0.01	0.09		
(1Dn4UP)	Hotspot	Bottom side	0.27	0.00	0.00	0.27		
		Right side	0.04	0.05	0.02	0.11		
		Left side	0.18	0.02	0.05	0.25		
		Right cheek	0.11	0.15	0.07	0.33		
	Head	Right tilt	0.07	0.10	0.06	0.23		
	neau	Left cheek	0.16	0.17	0.05	0.38		
		Left tilt	0.09	0.13	0.04	0.26		
WCDMA		Front side	0.39	0.05	0.02	0.46		
Band II		Back side	0.40	0.06	0.12	0.58		
	Hotopet	Top side	0.02	0.05	0.01	0.08		
	Hotspot	Bottom side	0.32	0.00	0.00	0.32		
		Right side	0.07	0.05	0.02	0.14		
		Left side	0.23	0.02	0.05	0.30		

#### Simultaneous Transmission Combination

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's induced of this document is advised information contained reliefor reliefor the company's induced at the time of its intervention only and within the initial contained information contained reliefor reliefor the company's induced at the time of its relieformer and the induced at the time of its client as a structure of the induced at the time of its client as a structure of the company's induced at the time of its client as a structure of the induced at the time of its client as a structure of the its client as a structure of the company's induced at the time of its client as a structure of the time o prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd. t (886-2) 2299-3279



#### Report No. : E5/2019/C0017 Page: 153 of 261

re	eported SA	R WWAN and	WLAN 2.4GI	Hz MIMO, ΣSA	R evaluation	1
Frequency		osition	rep	oorted SAR / W	/kg	ΣSAR
band	P	osition	WWAN	Ant 0	Ant 1	<1.6W/kg
		Right cheek	0.08	0.15	0.07	0.30
	Head	Right tilt	0.05	0.10	0.06	0.21
	пеац	Left cheek	0.10	0.17	0.05	0.32
		Left tilt	0.06	0.13	0.04	0.23
WCDMA Band IV		Front side	0.24	0.05	0.02	0.31
Banuity		Back side	0.25	0.06	0.12	0.43
	Hotspot	Top side	0.01	0.05	0.01	0.07
	потерот	Bottom side	0.20	0.00	0.00	0.20
		Right side	0.05	0.05	0.02	0.12
		Left side	0.15	0.02	0.05	0.22
		Right cheek	0.14	0.15	0.07	0.36
	Head	Right tilt	0.05	0.10	0.06	0.21
	неао	Left cheek	0.12	0.17	0.05	0.34
		Left tilt	0.05	0.13	0.04	0.22
WCDMA Band V		Front side	0.41	0.05	0.02	0.48
Band V		Back side	0.48	0.06	0.12	0.66
	Hotopot	Top side	0.03	0.05	0.01	0.09
	Hotspot	Bottom side	0.27	0.00	0.00	0.27
		Right side	0.42	0.05	0.02	0.49
		Left side	0.05	0.02	0.05	0.12
		Right cheek	0.10	0.15	0.07	0.32
	Head	Right tilt	0.06	0.10	0.06	0.22
	неао	Left cheek	0.14	0.17	0.05	0.36
		Left tilt	0.10	0.13	0.04	0.27
LTE FDD		Front side	0.34	0.05	0.02	0.41
Band 2		Back side	0.36	0.06	0.12	0.54
	Hotopet	Top side	0.03	0.05	0.01	0.09
	Hotspot	Bottom side	0.29	0.00	0.00	0.29
		Right side	0.05	0.05	0.02	0.12
		Left side	0.19	0.02	0.05	0.26

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

```
www.tw.sgs.com
```



#### Report No. : E5/2019/C0017 Page: 154 of 261

reported SAR WWAN and WLAN 2.4GHz MIMO, $\Sigma SAR$ evaluation									
Frequency		aaitian	rep	ΣSAR					
band	P	Position -		Ant 0	Ant 1	<1.6W/kg			
		Right cheek	0.06	0.15	0.07	0.28			
	Head	Right tilt	0.05	0.10	0.06	0.21			
	neau	Left cheek	0.10	0.17	0.05	0.32			
		Left tilt	0.05	0.13	0.04	0.22			
LTE FDD		Front side	0.23	0.05	0.02	0.30			
Band 4		Back side	0.24	0.06	0.12	0.42			
	Hotspot	Top side	0.01	0.05	0.01	0.07			
	потерот	Bottom side	0.19	0.00	0.00	0.19			
		Right side	0.04	0.05	0.02	0.11			
		Left side	0.15	0.02	0.05	0.22			
	Head	Right cheek	0.12	0.15	0.07	0.34			
		Right tilt	0.04	0.10	0.06	0.20			
		Left cheek	0.09	0.17	0.05	0.31			
		Left tilt	0.04	0.13	0.04	0.21			
LTE FDD		Front side	0.33	0.05	0.02	0.40			
Band 5	Hotspot	Back side	0.36	0.06	0.12	0.54			
		Top side	0.01	0.05	0.01	0.07			
		Bottom side	0.25	0.00	0.00	0.25			
		Right side	0.33	0.05	0.02	0.40			
		Left side	0.05	0.02	0.05	0.12			
		Right cheek	0.07	0.15	0.07	0.29			
	Head	Right tilt	0.07	0.10	0.06	0.23			
	neau	Left cheek	0.18	0.17	0.05	0.40			
		Left tilt	0.06	0.13	0.04	0.23			
LTE FDD		Front side	0.43	0.05	0.02	0.50			
Band 7		Back side	0.58	0.06	0.12	0.76			
	Hotspot	Top side	0.01	0.05	0.01	0.07			
	rioispot	Bottom side	1.05	0.00	0.00	1.05			
		Right side	0.06	0.05	0.02	0.13			
		Left side	0.19	0.02	0.05	0.26			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.



#### Report No. : E5/2019/C0017 Page: 155 of 261

reported SAR WWAN and WLAN 2.4GHz MIMO, $\Sigma SAR$ evaluation										
Frequency		:4:	rep	oorted SAR / W	/kg	ΣSAR				
band	P	Position -		Ant 0	Ant 1	<1.6W/kg				
		Right cheek	0.14	0.15	0.07	0.36				
	Head	Right tilt	0.04	0.10	0.06	0.20				
	Heau	Left cheek	0.08	0.17	0.05	0.30				
		Left tilt	0.04	0.13	0.04	0.21				
LTE FDD		Front side	0.37	0.05	0.02	0.44				
Band 12		Back side	0.42	0.06	0.12	0.60				
	Hotspot	Top side	0.03	0.05	0.01	0.09				
	Πυιδρυι	Bottom side	0.14	0.00	0.00	0.14				
		Right side	0.35	0.05	0.02	0.42				
		Left side	0.05	0.02	0.05	0.12				
	Head	Right cheek	0.05	0.15	0.07	0.27				
		Right tilt	0.03	0.10	0.06	0.19				
		Left cheek	0.04	0.17	0.05	0.26				
		Left tilt	0.03	0.13	0.04	0.20				
LTE FDD		Front side	0.12	0.05	0.02	0.19				
Band 13	Hotspot	Back side	0.13	0.06	0.12	0.31				
		Top side	0.01	0.05	0.01	0.07				
		Bottom side	0.05	0.00	0.00	0.05				
		Right side	0.12	0.05	0.02	0.19				
		Left side	0.01	0.02	0.05	0.08				
		Right cheek	0.14	0.15	0.07	0.36				
	Head	Right tilt	0.04	0.10	0.06	0.20				
	Heau	Left cheek	0.08	0.17	0.05	0.30				
		Left tilt	0.04	0.13	0.04	0.21				
LTE FDD		Front side	0.37	0.05	0.02	0.44				
Band 17		Back side	0.42	0.06	0.12	0.60				
	Hotopot	Top side	0.01	0.05	0.01	0.07				
	Hotspot	Bottom side	0.14	0.00	0.00	0.14				
		Right side	0.33	0.05	0.02	0.40				
		Left side	0.05	0.02	0.05	0.12				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.



reported SAR WWAN and WLAN 2.4GHz MIMO, $\Sigma$ SAR evaluation									
Frequency	В	osition	rep	reported SAR / W/kg					
band		USILION	WWAN	Ant 0	Ant 1	<1.6W/kg			
		Right cheek	0.06	0.15	0.07	0.28			
	Head	Right tilt	0.05	0.10	0.06	0.21			
	Heau	Left cheek	0.08	0.17	0.05	0.30			
		Left tilt	0.05	0.13	0.04	0.22			
LTE TDD		Front side	0.22	0.05	0.02	0.29			
Band 38		Back side	0.25	0.06	0.12	0.43			
	Hotspot	Top side	0.01	0.05	0.01	0.07			
	потерог	Bottom side	0.42	0.00	0.00	0.42			
		Right side	0.04	0.05	0.02	0.11			
		Left side	0.08	0.02	0.05	0.15			
		Right cheek	0.05	0.15	0.07	0.27			
	Head	Right tilt	0.04	0.10	0.06	0.20			
	Heau	Left cheek	0.07	0.17	0.05	0.29			
		Left tilt	0.04	0.13	0.04	0.21			
LTE TDD		Front side	0.17	0.05	0.02	0.24			
Band 41		Back side	0.20	0.06	0.12	0.38			
	Hotspot	Top side	0.01	0.05	0.01	0.07			
	riotspot	Bottom side	0.37	0.00	0.00	0.37			
		Right side	0.02	0.05	0.02	0.09			
		Left side	0.06	0.02	0.05	0.13			

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

```
www.tw.sgs.com
```



#### Report No. : E5/2019/C0017 Page: 157 of 261

reported SAR WWAN and WLAN 5GHz MIMO, $\Sigma$ SAR evaluation									
Frequency		141	rep	oorted SAR / W	/kg	ΣSAR			
band	Position -		WWAN	Ant 0	Aant 1	<1.6W/kg			
		Right cheek	0.06	0.53	0.19	0.78			
GSM 850	Head	Right tilt	0.04	0.23	0.11	0.38			
GSIM 850	nead	Left cheek	0.06	0.54	0.17	0.77			
		Left tilt	0.03	0.35	0.10	0.48			
		Front side	0.22	0.10	0.11	0.43			
		Back side	0.23	0.11	0.11	0.45			
GPRS 850	Hotspot	Top side	0.02	0.01	0.02	0.05			
(1Dn4UP)	Πυιδροι	Bottom side	0.17	0.00	0.00	0.17			
		Right side	0.19	0.06	0.02	0.27			
		Left side	0.05	0.02	0.03	0.10			
	Head	Right cheek	0.07	0.53	0.19	0.79			
GSM 1900		Right tilt	0.04	0.23	0.11	0.38			
GSM 1900		Left cheek	0.11	0.54	0.17	0.82			
		Left tilt	0.06	0.35	0.10	0.51			
		Front side	0.30	0.10	0.11	0.51			
		Back side	0.33	0.11	0.11	0.55			
GPRS 1900	Listanat	Top side	0.03	0.01	0.02	0.06			
(1Dn4UP)	Hotspot	Bottom side	0.27	0.00	0.00	0.27			
		Right side	0.04	0.06	0.02	0.12			
		Left side	0.18	0.02	0.03	0.23			
		Right cheek	0.11	0.53	0.19	0.83			
	Head	Right tilt	0.07	0.23	0.11	0.41			
	neau	Left cheek	0.16	0.54	0.17	0.87			
		Left tilt	0.09	0.35	0.10	0.54			
WCDMA		Front side	0.39	0.10	0.11	0.60			
Band II		Back side	0.40	0.11	0.11	0.62			
	Hotopet	Top side	0.02	0.01	0.02	0.05			
	Hotspot	Bottom side	0.32	0.00	0.00	0.32			
		Right side	0.07	0.06	0.02	0.15			
		Left side	0.23	0.02	0.03	0.28			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

```
www.tw.sgs.com
```



#### Report No. : E5/2019/C0017 Page: 158 of 261

reported SAR WWAN and WLAN 5GHz MIMO, ΣSAR evaluation									
Frequency			rep	reported SAR / W/kg					
band	P	Position		Ant 0	Ant 1	<1.6W/kg			
		Right cheek	0.08	0.53	0.19	0.80			
	Head	Right tilt	0.05	0.23	0.11	0.39			
	neau	Left cheek	0.10	0.54	0.17	0.81			
		Left tilt	0.06	0.35	0.10	0.51			
WCDMA Band IV		Front side	0.24	0.10	0.11	0.45			
Banuity		Back side	0.25	0.11	0.11	0.47			
	Hotspot	Top side	0.01	0.01	0.02	0.04			
	Ποιδροι	Bottom side	0.20	0.00	0.00	0.20			
		Right side	0.05	0.06	0.02	0.13			
		Left side	0.15	0.02	0.03	0.20			
		Right cheek	0.14	0.53	0.19	0.86			
	Head	Right tilt	0.05	0.23	0.11	0.39			
		Left cheek	0.12	0.54	0.17	0.83			
		Left tilt	0.05	0.35	0.10	0.50			
WCDMA Band V		Front side	0.41	0.10	0.11	0.62			
Band V		Back side	0.48	0.11	0.11	0.70			
	Hotspot	Top side	0.03	0.01	0.02	0.06			
		Bottom side	0.27	0.00	0.00	0.27			
		Right side	0.42	0.06	0.02	0.50			
		Left side	0.05	0.02	0.03	0.10			
		Right cheek	0.10	0.53	0.19	0.82			
	Head	Right tilt	0.06	0.23	0.11	0.40			
	neau	Left cheek	0.14	0.54	0.17	0.85			
		Left tilt	0.10	0.35	0.10	0.55			
LTE FDD		Front side	0.34	0.10	0.11	0.55			
Band 2		Back side	0.36	0.11	0.11	0.58			
	Hotspot	Top side	0.03	0.01	0.02	0.06			
	TOISPOL	Bottom side	0.29	0.00	0.00	0.29			
		Right side	0.05	0.06	0.02	0.13			
		Left side	0.19	0.02	0.03	0.24			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

```
www.tw.sgs.com
```



#### Report No. : E5/2019/C0017 Page: 159 of 261

reported SAR WWAN and WLAN 5GHz MIMO, ΣSAR evaluation									
Frequency		aaitian	rep	ΣSAR					
band	Position -		WWAN	Ant 0	Ant 1	<1.6W/kg			
		Right cheek	0.06	0.53	0.19	0.78			
	Head	Right tilt	0.05	0.23	0.11	0.39			
	neau	Left cheek	0.10	0.54	0.17	0.81			
		Left tilt	0.05	0.35	0.10	0.50			
LTE FDD		Front side	0.23	0.10	0.11	0.44			
Band 4		Back side	0.24	0.11	0.11	0.46			
	Hotspot	Top side	0.01	0.01	0.02	0.04			
	потерот	Bottom side	0.19	0.00	0.00	0.19			
		Right side	0.04	0.06	0.02	0.12			
		Left side	0.15	0.02	0.03	0.20			
		Right cheek	0.12	0.53	0.19	0.84			
	Head	Right tilt	0.04	0.23	0.11	0.38			
		Left cheek	0.09	0.54	0.17	0.80			
		Left tilt	0.04	0.35	0.10	0.49			
LTE FDD		Front side	0.33	0.10	0.11	0.54			
Band 5		Back side	0.36	0.11	0.11	0.58			
	Hotspot	Top side	0.01	0.01	0.02	0.04			
		Bottom side	0.25	0.00	0.00	0.25			
		Right side	0.33	0.06	0.02	0.41			
		Left side	0.05	0.02	0.03	0.10			
		Right cheek	0.07	0.53	0.19	0.79			
	Head	Right tilt	0.07	0.23	0.11	0.41			
	neau	Left cheek	0.18	0.54	0.17	0.89			
		Left tilt	0.06	0.35	0.10	0.51			
LTE FDD		Front side	0.43	0.10	0.11	0.64			
Band 7		Back side	0.58	0.11	0.11	0.80			
	Hotspot	Top side	0.01	0.01	0.02	0.04			
	TOISPOL	Bottom side	1.05	0.00	0.00	1.05			
		Right side	0.06	0.06	0.02	0.14			
		Left side	0.19	0.02	0.03	0.24			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

```
www.tw.sgs.com
```




#### Report No. : E5/2019/C0017 Page: 160 of 261

reported SAR WWAN and WLAN 5GHz MIMO, ΣSAR evaluation									
Frequency		:4:	rep	reported SAR / W/kg					
band	P	osition	WWAN	Ant 0	Ant 1	<1.6W/kg			
		Right cheek	0.14	0.53	0.19	0.86			
	Head	Right tilt	0.04	0.23	0.11	0.38			
	Heau	Left cheek	0.08	0.54	0.17	0.79			
		Left tilt	0.04	0.35	0.10	0.49			
LTE FDD		Front side	0.37	0.10	0.11	0.58			
Band 12		Back side	0.42	0.11	0.11	0.64			
	Hotspot	Top side	0.03	0.01	0.02	0.06			
	Πυιδρυι	Bottom side	0.14	0.00	0.00	0.14			
		Right side	0.35	0.06	0.02	0.43			
		Left side	0.05	0.02	0.03	0.10			
	Head	Right cheek	0.05	0.53	0.19	0.77			
		Right tilt	0.03	0.23	0.11	0.37			
		Left cheek	0.04	0.54	0.17	0.75			
		Left tilt	0.03	0.35	0.10	0.48			
LTE FDD		Front side	0.12	0.10	0.11	0.33			
Band 13	Hotspot	Back side	0.13	0.11	0.11	0.35			
		Top side	0.01	0.01	0.02	0.04			
		Bottom side	0.05	0.00	0.00	0.05			
		Right side	0.12	0.06	0.02	0.20			
		Left side	0.01	0.02	0.03	0.06			
		Right cheek	0.14	0.53	0.19	0.86			
	Head	Right tilt	0.04	0.23	0.11	0.38			
	neau	Left cheek	0.08	0.54	0.17	0.79			
		Left tilt	0.04	0.35	0.10	0.49			
LTE FDD		Front side	0.37	0.10	0.11	0.58			
Band 17		Back side	0.42	0.11	0.11	0.64			
	Hotspot	Top side	0.01	0.01	0.02	0.04			
	HUISPOL	Bottom side	0.14	0.00	0.00	0.14			
		Right side	0.33	0.06	0.02	0.41			
		Left side	0.05	0.02	0.03	0.10			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd. t (886-2) 2299-3279





reported SAR WWAN and WLAN 5GHz MIMO, $\Sigma SAR$ evaluation									
Frequency	Р	osition	rep	reported SAR / W/kg					
band	F	USILION	WWAN	Ant 0	Ant 1	<1.6W/kg			
		Right cheek	0.06	0.53	0.19	0.78			
	Head	Right tilt	0.05	0.23	0.11	0.39			
	rieau	Left cheek	0.08	0.54	0.17	0.79			
		Left tilt	0.05	0.35	0.10	0.50			
LTE TDD		Front side	0.22	0.10	0.11	0.43			
Band 38		Back side	0.25	0.11	0.11	0.47			
	Hotspot	Top side	0.01	0.01	0.02	0.04			
	Ποιδροι	Bottom side	0.42	0.00	0.00	0.42			
		Right side	0.04	0.06	0.02	0.12			
		Left side	0.08	0.02	0.03	0.13			
		Right cheek	0.05	0.53	0.19	0.77			
	Head	Right tilt	0.04	0.23	0.11	0.38			
	Tieau	Left cheek	0.07	0.54	0.17	0.78			
		Left tilt	0.04	0.35	0.10	0.49			
LTE TDD		Front side	0.17	0.10	0.11	0.38			
Band 41		Back side	0.20	0.11	0.11	0.42			
	Hotspot	Top side	0.01	0.01	0.02	0.04			
	Hotspot	Bottom side	0.37	0.00	0.00	0.37			
		Right side	0.02	0.06	0.02	0.10			
		Left side	0.06	0.02	0.03	0.11			

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



#### Report No. : E5/2019/C0017 Page: 162 of 261

repo	reported SAR WWAN and WLAN 2.4GHz MIMO, $\Sigma SAR$ evaluation								
Frequency			reported SAR / W/kg			ΣSAR			
band	Р	osition	WWAN	Ant 0	Ant 1	<1.6W/kg			
GSM 850	body-	Front side	0.19	0.05	0.02	0.26			
6310050	worn	Back side	0.22	0.06	0.12	0.40			
GSM 1900	body-	Front side	0.28	0.05	0.02	0.35			
03101900	worn	Back side	0.28	0.06	0.12	0.46			
WCDMA Band II	body-	Front side	0.39	0.05	0.02	0.46			
	worn	Back side	0.40	0.06	0.12	0.58			
WCDMA Band IV	body-	Front side	0.24	0.05	0.02	0.31			
WCDINA Ballu IV	worn	Back side	0.25	0.06	0.12	0.43			
WCDMA Band V	body-	Front side	0.41	0.05	0.02	0.48			
WCDIVIA Barlu V	worn	Back side	0.48	0.06	0.12	0.66			
LTE FDD Band 2	body-	Front side	0.34	0.05	0.02	0.41			
LTE FDD Ballu 2	worn	Back side	0.36	0.06	0.12	0.54			
LTE FDD Band 4	body-	Front side	0.23	0.05	0.02	0.30			
LTE FDD Ballu 4	worn	Back side	0.24	0.06	0.12	0.42			
LTE FDD Band 5	body-	Front side	0.33	0.05	0.02	0.40			
ETET DD Band 5	worn	Back side	0.36	0.06	0.12	0.54			
LTE FDD Band 7	body-	Front side	0.43	0.05	0.02	0.50			
	worn	Back side	0.58	0.06	0.12	0.76			
LTE FDD Band 12	body-	Front side	0.37	0.05	0.02	0.44			
ETET DD Band 12	worn	Back side	0.42	0.06	0.12	0.60			
LTE FDD Band 13	body-	Front side	0.12	0.05	0.02	0.19			
ETET DD Dana 15	worn	Back side	0.13	0.06	0.12	0.31			
LTE FDD Band 17	body-	Front side	0.37	0.05	0.02	0.44			
	worn	Back side	0.42	0.06	0.12	0.60			
LTE TDD Band 38	body-	Front side	0.22	0.05	0.02	0.29			
ETE TOD Dand 30	worn	Back side	0.25	0.06	0.12	0.43			
LTE TDD Band 41	body-	Front side	0.17	0.05	0.02	0.24			
	worn	Back side	0.20	0.06	0.12	0.38			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

```
www.tw.sgs.com
```



reported SAR WWAN and WLAN 2.4GHz Ant 0 and WLAN 5GHz Ant 1, $\Sigma SAR$ evaluation								
Frequency			repo	reported SAR / W/kg				
band	Р	Position		Ant 0	Ant 1	<1.6W/kg		
		Right cheek	0.06	0.15	0.19	0.40		
	Head	Right tilt	0.04	0.10	0.11	0.25		
GSM 850	пеац	Left cheek	0.06	0.17	0.17	0.40		
GSIVI 050		Left tilt	0.03	0.13	0.10	0.26		
	body-	Front side	0.19	0.05	0.11	0.35		
	worn	Back side	0.22	0.06	0.14	0.42		
		Right cheek	0.07	0.15	0.19	0.41		
	Head	Right tilt	0.04	0.10	0.11	0.25		
GSM 1900	неао	Left cheek	0.11	0.17	0.17	0.45		
GSIM 1900		Left tilt	0.06	0.13	0.10	0.29		
	body-	Front side	0.28	0.05	0.11	0.44		
	worn	Back side	0.28	0.06	0.14	0.48		
		Right cheek	0.11	0.15	0.19	0.45		
	11	Right tilt	0.07	0.10	0.11	0.28		
	Head	Left cheek	0.16	0.17	0.17	0.50		
WCDMA Band II		Left tilt	0.09	0.13	0.10	0.32		
	body-	Front side	0.39	0.05	0.11	0.55		
	worn	Back side	0.40	0.06	0.14	0.60		
		Right cheek	0.08	0.15	0.19	0.42		
	Head	Right tilt	0.05	0.10	0.11	0.26		
WCDMA Band IV	пеац	Left cheek	0.10	0.17	0.17	0.44		
WCDIVIA Band IV		Left tilt	0.06	0.13	0.10	0.29		
	body-	Front side	0.24	0.05	0.11	0.40		
	worn	Back side	0.25	0.06	0.14	0.45		
		Right cheek	0.14	0.15	0.19	0.48		
	Head	Right tilt	0.05	0.10	0.11	0.26		
WCDMA Band V	Head	Left cheek	0.12	0.17	0.17	0.46		
WODIVIA Band V		Left tilt	0.05	0.13	0.10	0.28		
	body-	Front side	0.41	0.05	0.11	0.57		
	worn	Back side	0.48	0.06	0.14	0.68		

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

```
www.tw.sgs.com
```



reported SA	reported SAR WWAN and WLAN 2.4GHz Ant 0 and WLAN 5GHz Ant 1, $\Sigma SAR$ evaluation								
Frequency	_		reported SAR / W/kg			ΣSAR			
band	Position		WWAN	Ant 0	Ant 1	<1.6W/kg			
		Right cheek	0.10	0.15	0.19	0.44			
	Lined	Right tilt	0.06	0.10	0.11	0.27			
LTE FDD Band 2	Head	Left cheek	0.14	0.17	0.17	0.48			
LTE FDD Band 2		Left tilt	0.10	0.13	0.10	0.33			
	body-	Front side	0.34	0.05	0.11	0.50			
	worn	Back side	0.36	0.06	0.14	0.56			
		Right cheek	0.06	0.15	0.19	0.40			
	llood	Right tilt	0.05	0.10	0.11	0.26			
LTE FDD Band 4	Head	Left cheek	0.10	0.17	0.17	0.44			
LTE FDD Band 4		Left tilt	0.05	0.13	0.10	0.28			
	body-	Front side	0.23	0.05	0.11	0.39			
	worn	Back side	0.24	0.06	0.14	0.44			
		Right cheek	0.12	0.15	0.19	0.46			
	Head	Right tilt	0.04	0.10	0.11	0.25			
LTE FDD Band 5	пеао	Left cheek	0.09	0.17	0.17	0.43			
LIE FDD Band 5		Left tilt	0.04	0.13	0.10	0.27			
	body-	Front side	0.33	0.05	0.11	0.49			
	worn	Back side	0.36	0.06	0.14	0.56			
		Right cheek	0.07	0.15	0.19	0.41			
	Head	Right tilt	0.07	0.10	0.11	0.28			
LTE FDD Band 7	neau	Left cheek	0.18	0.17	0.17	0.52			
LTE FDD Band 7		Left tilt	0.06	0.13	0.10	0.29			
	body-	Front side	0.43	0.05	0.11	0.59			
	worn	Back side	0.58	0.06	0.14	0.78			
		Right cheek	0.14	0.15	0.19	0.48			
	Head	Right tilt	0.04	0.10	0.11	0.25			
LTE FDD Band 12	neau	Left cheek	0.08	0.17	0.17	0.42			
LTE FOD Ballu 12		Left tilt	0.04	0.13	0.10	0.27			
	body-	Front side	0.37	0.05	0.11	0.53			
	worn	Back side	0.42	0.06	0.14	0.62			
		Right cheek	0.05	0.15	0.19	0.39			
	Head	Right tilt	0.03	0.10	0.11	0.24			
LTE FDD Band 13	пеаа	Left cheek	0.04	0.17	0.17	0.38			
ETET DD Ballu 13		Left tilt	0.03	0.13	0.10	0.26			
	body-	Front side	0.12	0.05	0.11	0.28			
	worn	Back side	0.13	0.06	0.14	0.33			

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.



#### Report No. : E5/2019/C0017 Page: 165 of 261

reported SAR WWAN and WLAN 2.4GHz Ant 0 and WLAN 5GHz Ant 1, $\Sigma SAR$ evaluation								
Frequency	П	osition	repo	orted SAR / W	//kg	ΣSAR		
band	P	osition	WWAN	Ant 0	Ant 1	<1.6W/kg		
		Right cheek	0.14	0.15	0.19	0.48		
	Head	Right tilt	0.04	0.10	0.11	0.25		
LTE EDD Band 17	Tieau	Left cheek	0.08	0.17	0.17	0.42		
ETET DD Band Tr		Left tilt	0.04	0.13	0.10	0.27		
	body-	Front side	0.37	0.05	0.11	0.53		
	worn	Back side	0.42	0.06	0.14	0.62		
	Head	Right cheek	0.06	0.15	0.19	0.40		
		Right tilt	0.05	0.10	0.11	0.26		
LTE TDD Band 38		Left cheek	0.08	0.17	0.17	0.42		
LTE TOD Dand 30		Left tilt	0.05	0.13	0.10	0.28		
	body-	Front side	0.22	0.05	0.11	0.38		
	worn	Back side	0.25	0.06	0.14	0.45		
		Right cheek	0.05	0.15	0.19	0.39		
	Head	Right tilt	0.04	0.10	0.11	0.25		
LTE TDD Band 41	riedu	Left cheek	0.07	0.17	0.17	0.41		
ETE TOD Band 41		Left tilt	0.04	0.13	0.10	0.27		
	body-	Front side	0.17	0.05	0.11	0.33		
	worn	Back side	0.20	0.06	0.14	0.40		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

f (886-2) 2298-0488

```
www.tw.sgs.com
```

Member of SGS Group



reported SA	RWWAN	and WLAN 5GHz	Ant 0 and WL	AN 2.4GHz Ant	1, ΣSAR evalu	ation
Frequency			repo	orted SAR / W	//kg	ΣSAR
band	Position		WWAN	Ant 0	Ant 1	<1.6W/kg
		Right cheek	0.06	0.53	0.07	0.66
	Head	Right tilt	0.04	0.23	0.06	0.33
GSM 850	пеац	Left cheek	0.06	0.54	0.05	0.65
GSIVI 650		Left tilt	0.03	0.35	0.04	0.42
	body-	Front side	0.19	0.10	0.02	0.31
	worn	Back side	0.22	0.12	0.12	0.46
		Right cheek	0.07	0.53	0.07	0.67
	Head	Right tilt	0.04	0.23	0.06	0.33
COM 4000	неао	Left cheek	0.11	0.54	0.05	0.70
GSM 1900		Left tilt	0.06	0.35	0.04	0.45
	body-	Front side	0.28	0.10	0.02	0.40
	worn	Back side	0.28	0.12	0.12	0.52
		Right cheek	0.11	0.53	0.07	0.71
	Head	Right tilt	0.07	0.23	0.06	0.36
WCDMA Band II	Tieau	Left cheek	0.16	0.54	0.05	0.75
WCDIVIA Band II		Left tilt	0.09	0.35	0.04	0.48
	body-	Front side	0.39	0.10	0.02	0.51
	worn	Back side	0.40	0.12	0.12	0.64
		Right cheek	0.08	0.53	0.07	0.68
	Head	Right tilt	0.05	0.23	0.06	0.34
WCDMA Band IV	пеац	Left cheek	0.10	0.54	0.05	0.69
		Left tilt	0.06	0.35	0.04	0.45
	body-	Front side	0.24	0.10	0.02	0.36
	worn	Back side	0.25	0.12	0.12	0.49
		Right cheek	0.14	0.53	0.07	0.74
	Head	Right tilt	0.05	0.23	0.06	0.34
WCDMA Band V	пеац	Left cheek	0.12	0.54	0.05	0.71
		Left tilt	0.05	0.35	0.04	0.44
	body-	Front side	0.41	0.10	0.02	0.53
	worn	Back side	0.48	0.12	0.12	0.72

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.



reported SA	RWWAN	and WLAN 5GHz	Ant 0 and WL	AN 2.4GHz Ant	1, ΣSAR eval	uation
Frequency		osition	repo	orted SAR / W	//kg	ΣSAR
band	P	osition	WWAN	Ant 0	Ant 1	<1.6W/kg
		Right cheek	0.10	0.53	0.07	0.70
	Head	Right tilt	0.06	0.23	0.06	0.35
LTE FDD Band 2	Heau	Left cheek	0.14	0.54	0.05	0.73
LTE FDD Ballu 2		Left tilt	0.10	0.35	0.04	0.49
	body-	Front side	0.34	0.10	0.02	0.46
	worn	Back side	0.36	0.12	0.12	0.60
		Right cheek	0.06	0.53	0.07	0.66
	Head	Right tilt	0.05	0.23	0.06	0.34
LTE FDD Band 4	neau	Left cheek	0.10	0.54	0.05	0.69
LTE FDD Ballu 4		Left tilt	0.05	0.35	0.04	0.44
	body-	Front side	0.23	0.10	0.02	0.35
	worn	Back side	0.24	0.12	0.12	0.48
		Right cheek	0.12	0.53	0.07	0.72
	Head	Right tilt	0.04	0.23	0.06	0.33
LTE FDD Band 5		Left cheek	0.09	0.54	0.05	0.68
LTE FDD Band 5		Left tilt	0.04	0.35	0.04	0.43
	body-	Front side	0.33	0.10	0.02	0.45
	worn	Back side	0.36	0.12	0.12	0.60
	Head	Right cheek	0.07	0.53	0.07	0.67
		Right tilt	0.07	0.23	0.06	0.36
LTE FDD Band 7		Left cheek	0.18	0.54	0.05	0.77
LTE FDD Ballu /		Left tilt	0.06	0.35	0.04	0.45
	body-	Front side	0.43	0.10	0.02	0.55
	worn	Back side	0.58	0.12	0.12	0.82
		Right cheek	0.14	0.53	0.07	0.74
	Head	Right tilt	0.04	0.23	0.06	0.33
LTE FDD Band 12	Heau	Left cheek	0.08	0.54	0.05	0.67
LTE FDD Ballu 12		Left tilt	0.04	0.35	0.04	0.43
	body-	Front side	0.37	0.10	0.02	0.49
	worn	Back side	0.42	0.12	0.12	0.66
		Right cheek	0.05	0.53	0.07	0.65
	Head	Right tilt	0.03	0.23	0.06	0.32
LTE FDD Band 13	пеаа	Left cheek	0.04	0.54	0.05	0.63
ETET DD Banu 13		Left tilt	0.03	0.35	0.04	0.42
	body-	Front side	0.12	0.10	0.02	0.24
	worn	Back side	0.13	0.12	0.12	0.37

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.



#### Report No. : E5/2019/C0017 Page: 168 of 261

reported SA	reported SAR WWAN and WLAN 5GHz Ant 0 and WLAN 2.4GHz Ant 1, $\Sigma SAR$ evaluation									
Frequency		osition	repo	orted SAR / W	//kg	ΣSAR				
band	Position		WWAN	Ant 0	Ant 1	<1.6W/kg				
		Right cheek	0.14	0.53	0.07	0.74				
	Head	Right tilt	0.04	0.23	0.06	0.33				
LTE FDD Band 17	Tieau	Left cheek	0.08	0.54	0.05	0.67				
LIE FDD Band I7		Left tilt	0.04	0.35	0.04	0.43				
	body-	Front side	0.37	0.10	0.02	0.49				
	worn	Back side	0.42	0.12	0.12	0.66				
	Head	Right cheek	0.06	0.53	0.07	0.66				
		Right tilt	0.05	0.23	0.06	0.34				
LTE TDD Band 38		Left cheek	0.08	0.54	0.05	0.67				
LTE TOD Ballu 36		Left tilt	0.05	0.35	0.04	0.44				
	body-	Front side	0.22	0.10	0.02	0.34				
	worn	Back side	0.25	0.12	0.12	0.49				
		Right cheek	0.05	0.53	0.07	0.65				
	Head	Right tilt	0.04	0.23	0.06	0.33				
LTE TDD Band 41	neau	Left cheek	0.07	0.54	0.05	0.66				
LIE IDD Ballu 41		Left tilt	0.04	0.35	0.04	0.43				
	body-	Front side	0.17	0.10	0.02	0.29				
	worn	Back side	0.20	0.12	0.12	0.44				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

```
www.tw.sgs.com
```

Member of SGS Group



repor	ted SAR W	WAN and WLAN	12.4GHz+5GH	Iz Ant 0 and W	LAN 2.4GHz+5	GHz Ant 1, ΣSA	R evaluation		
Frequency	Position			reported SAR / W/kg					
band	F	USITION	WWAN	2.4G Ant 0	5G Ant 0	2.4G Ant 1	5G Ant 1	<1.6W/kg	
		Right cheek	0.06	0.15	0.53	0.07	0.19	1.00	
	Head	Right tilt	0.04	0.10	0.23	0.06	0.11	0.54	
0014.050	пеац	Left cheek	0.06	0.17	0.54	0.05	0.17	0.99	
GSM 850		Left tilt	0.03	0.13	0.35	0.04	0.10	0.65	
	body-	Front side	0.19	0.05	0.10	0.02	0.11	0.47	
	worn	Back side	0.22	0.06	0.12	0.12	0.14	0.66	
		Right cheek	0.07	0.15	0.53	0.07	0.19	1.01	
	Head	Right tilt	0.04	0.10	0.23	0.06	0.11	0.54	
GSM 1900	Heau	Left cheek	0.11	0.17	0.54	0.05	0.17	1.04	
G2W 1900		Left tilt	0.06	0.13	0.35	0.04	0.10	0.68	
	body-	Front side	0.28	0.05	0.10	0.02	0.11	0.56	
	worn	Back side	0.28	0.06	0.12	0.12	0.14	0.72	
		Right cheek	0.11	0.15	0.53	0.07	0.19	1.05	
	Head	Right tilt	0.07	0.10	0.23	0.06	0.11	0.57	
WCDMA Band II	пеац	Left cheek	0.16	0.17	0.54	0.05	0.17	1.09	
WCDIMA Band II		Left tilt	0.09	0.13	0.35	0.04	0.10	0.71	
	body- worn	Front side	0.39	0.05	0.10	0.02	0.11	0.67	
		Back side	0.40	0.06	0.12	0.12	0.14	0.84	
		Right cheek	0.08	0.15	0.53	0.07	0.19	1.02	
	11	Right tilt	0.05	0.10	0.23	0.06	0.11	0.55	
WCDMA Band IV	Head	Left cheek	0.10	0.17	0.54	0.05	0.17	1.03	
WCDIVIA Band IV		Left tilt	0.06	0.13	0.35	0.04	0.10	0.68	
	body-	Front side	0.24	0.05	0.10	0.02	0.11	0.52	
	worn	Back side	0.25	0.06	0.12	0.12	0.14	0.69	
		Right cheek	0.14	0.15	0.53	0.07	0.19	1.08	
	Head	Right tilt	0.05	0.10	0.23	0.06	0.11	0.55	
	Head	Left cheek	0.12	0.17	0.54	0.05	0.17	1.05	
WCDMA Band V		Left tilt	0.05	0.13	0.35	0.04	0.10	0.67	
	body-	Front side	0.41	0.05	0.10	0.02	0.11	0.69	
	worn	Back side	0.48	0.06	0.12	0.12	0.14	0.92	
		Right cheek	0.10	0.15	0.53	0.07	0.19	1.04	
	112	Right tilt	0.06	0.10	0.23	0.06	0.11	0.56	
	Head	Left cheek	0.14	0.17	0.54	0.05	0.17	1.07	
LTE FDD Band 2		Left tilt	0.10	0.13	0.35	0.04	0.10	0.72	
	body-	Front side	0.34	0.05	0.10	0.02	0.11	0.62	
	worn	Back side	0.36	0.06	0.12	0.12	0.14	0.80	
		Right cheek	0.06	0.15	0.53	0.07	0.19	1.00	
	1.141	Right tilt	0.05	0.10	0.23	0.06	0.11	0.55	
	Head	Left cheek	0.10	0.17	0.54	0.05	0.17	1.03	
LTE FDD Band 4		Left tilt	0.05	0.13	0.35	0.04	0.10	0.67	
	body-	Front side	0.23	0.05	0.10	0.02	0.11	0.51	
	worn	Back side	0.24	0.06	0.12	0.12	0.14	0.68	

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



repor	ted SAR W	WAN and WLAN	12.4GHz+5GH	Iz Ant 0 and WI	LAN 2.4GHz+5	GHz Ant 1, ΣSA	R evaluation		
Frequency	P	osition		reported SAR / W/kg					
band	P	USITION	WWAN	2.4G Ant 0	5G Ant 0	2.4G Ant 1	5G Ant 1	<1.6W/kg	
		Right cheek	0.12	0.15	0.53	0.07	0.19	1.06	
	Head	Right tilt	0.04	0.10	0.23	0.06	0.11	0.54	
LTE FDD Band 5	Head	Left cheek	0.09	0.17	0.54	0.05	0.17	1.02	
LIE FUD Band 5		Left tilt	0.04	0.13	0.35	0.04	0.10	0.66	
	body-	Front side	0.33	0.05	0.10	0.02	0.11	0.61	
	worn	Back side	0.36	0.06	0.12	0.12	0.14	0.80	
		Right cheek	0.07	0.15	0.53	0.07	0.19	1.01	
	Head	Right tilt	0.07	0.10	0.23	0.06	0.11	0.57	
LTE FDD Band 7	neau	Left cheek	0.18	0.17	0.54	0.05	0.17	1.11	
LIE FUD Band 7		Left tilt	0.06	0.13	0.35	0.04	0.10	0.68	
	body-	Front side	0.43	0.05	0.10	0.02	0.11	0.71	
	worn	Back side	0.58	0.06	0.12	0.12	0.14	1.02	
		Right cheek	0.14	0.15	0.53	0.07	0.19	1.08	
		Right tilt	0.04	0.10	0.23	0.06	0.11	0.54	
	Head	Left cheek	0.08	0.17	0.54	0.05	0.17	1.01	
LTE FDD Band 12		Left tilt	0.04	0.13	0.35	0.04	0.10	0.66	
	body-	Front side	0.37	0.05	0.10	0.02	0.11	0.65	
	worn	Back side	0.42	0.06	0.12	0.12	0.14	0.86	
		Right cheek	0.05	0.15	0.53	0.07	0.19	0.99	
		Right tilt	0.03	0.10	0.23	0.06	0.11	0.53	
	Head	Left cheek	0.04	0.17	0.54	0.05	0.17	0.97	
LTE FDD Band 13		Left tilt	0.03	0.13	0.35	0.04	0.10	0.65	
	body-	Front side	0.12	0.05	0.10	0.02	0.11	0.40	
	worn	Back side	0.13	0.06	0.12	0.12	0.14	0.57	
		Right cheek	0.14	0.15	0.53	0.07	0.19	1.08	
		Right tilt	0.04	0.10	0.23	0.06	0.11	0.54	
	Head	Left cheek	0.08	0.17	0.54	0.05	0.17	1.01	
LTE FDD Band 17		Left tilt	0.04	0.13	0.35	0.04	0.10	0.66	
	body-	Front side	0.37	0.05	0.10	0.02	0.11	0.65	
	worn	Back side	0.42	0.06	0.12	0.12	0.14	0.86	
		Right cheek	0.06	0.15	0.53	0.07	0.19	1.00	
		Right tilt	0.05	0.10	0.23	0.06	0.11	0.55	
	Head	Left cheek	0.08	0.17	0.54	0.05	0.17	1.01	
LTE TDD Band 38		Left tilt	0.05	0.13	0.35	0.04	0.10	0.67	
	body-	Front side	0.22	0.05	0.10	0.02	0.11	0.50	
	worn	Back side	0.25	0.06	0.12	0.12	0.14	0.69	
		Right cheek	0.05	0.15	0.53	0.07	0.19	0.99	
		Right tilt	0.04	0.10	0.23	0.06	0.11	0.54	
	Head	Left cheek	0.07	0.17	0.54	0.05	0.17	1.00	
LTE TDD Band 41		Left tilt	0.04	0.13	0.35	0.04	0.10	0.66	
	body-	Front side	0.17	0.05	0.10	0.02	0.11	0.45	
	worn	Back side	0.20	0.06	0.12	0.12	0.14	0.64	

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



#### Report No. : E5/2019/C0017 Page: 171 of 261

repo	orted SAR	WWAN and V	VLAN 5GHz N	/IMO, ΣSAR	evaluation	
Frequency			repo	orted SAR / W	//kg	ΣSAR
band	Р	osition	WWAN	Ant 0	Ant 1	<1.6W/kg
GSM 850	body-	Front side	0.19	0.10	0.11	0.40
G2IM 920	worn	Back side	0.22	0.12	0.14	0.48
GSM 1900	body-	Front side	0.28	0.10	0.11	0.49
G3M 1900	worn	Back side	0.28	0.12	0.14	0.54
WCDMA Band II	body-	Front side	0.39	0.10	0.11	0.60
	worn	Back side	0.40	0.12	0.14	0.66
WCDMA Band IV	body-	Front side	0.24	0.10	0.11	0.45
	worn	Back side	0.25	0.12	0.14	0.51
WCDMA Band V	body-	Front side	0.41	0.10	0.11	0.62
	worn	Back side	0.48	0.12	0.14	0.74
LTE FDD Band 2	body- worn	Front side	0.34	0.10	0.11	0.55
LTE FDD Barlu 2		Back side	0.36	0.12	0.14	0.62
LTE FDD Band 4	body-	Front side	0.23	0.10	0.11	0.44
	worn	Back side	0.24	0.12	0.14	0.50
LTE FDD Band 5	body-	Front side	0.33	0.10	0.11	0.54
ETET DD Band 5	worn	Back side	0.36	0.12	0.14	0.62
LTE FDD Band 7	body-	Front side	0.43	0.10	0.11	0.64
	worn	Back side	0.58	0.12	0.14	0.84
LTE FDD Band 12	body-	Front side	0.37	0.10	0.11	0.58
LILIDD Band 12	worn	Back side	0.42	0.12	0.14	0.68
LTE FDD Band 13	body-	Front side	0.12	0.10	0.11	0.33
ETET DD Balld 15	worn	Back side	0.13	0.12	0.14	0.39
LTE FDD Band 17	body-	Front side	0.37	0.10	0.11	0.58
	worn	Back side	0.42	0.12	0.14	0.68
LTE TDD Band 38	body-	Front side	0.22	0.10	0.11	0.43
LIE IDD Ballu 30	worn	Back side	0.25	0.12	0.14	0.51
LTE TDD Band 41	body-	Front side	0.17	0.10	0.11	0.38
ETE TOD Band 41	worn	Back side	0.20	0.12	0.14	0.46

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

```
www.tw.sgs.com
```



repor	ted SAR V	WWAN and WL	AN 5GHz MII	MO and Blue	tooth, ΣSAR	evaluation	
Frequency				reported S	AR / W/kg		ΣSAR
band	P	osition	WWAN	Ant 0	Ant 1	BT	<1.6W/kg
		Right cheek	0.06	0.53	0.19	0.07	0.85
	Head	Right tilt	0.04	0.23	0.11	0.05	0.43
GSM 850	пеао	Left cheek	0.06	0.54	0.17	0.08	0.85
G3W 650		Left tilt	0.03	0.35	0.10	0.08	0.56
	body-	Front side	0.19	0.10	0.11	0.04	0.44
	worn	Back side	0.22	0.12	0.14	0.04	0.52
		Right cheek	0.07	0.53	0.19	0.07	0.86
	Head	Right tilt	0.04	0.23	0.11	0.05	0.43
GSM 1900	Tieau	Left cheek	0.11	0.54	0.17	0.08	0.90
001011300		Left tilt	0.06	0.35	0.10	0.08	0.59
	body-	Front side	0.28	0.10	0.11	0.04	0.53
	worn	Back side	0.28	0.12	0.14	0.04	0.58
		Right cheek	0.11	0.53	0.19	0.07	0.90
	Head	Right tilt	0.07	0.23	0.11	0.05	0.46
WCDMA Band II		Left cheek	0.16	0.54	0.17	0.08	0.95
WODIVIA Balid II		Left tilt	0.09	0.35	0.10	0.08	0.62
	body-	Front side	0.39	0.10	0.11	0.04	0.64
	worn	Back side	0.40	0.12	0.14	0.04	0.70
	Head	Right cheek	0.08	0.53	0.19	0.07	0.87
		Right tilt	0.05	0.23	0.11	0.05	0.44
WCDMA Band IV		Left cheek	0.10	0.54	0.17	0.08	0.89
WODWA Band W		Left tilt	0.06	0.35	0.10	0.08	0.59
	body-	Front side	0.24	0.10	0.11	0.04	0.49
	worn	Back side	0.25	0.12	0.14	0.04	0.55
		Right cheek	0.14	0.53	0.19	0.07	0.93
	Head	Right tilt	0.05	0.23	0.11	0.05	0.44
WCDMA Band V	ricau	Left cheek	0.12	0.54	0.17	0.08	0.91
WODIN/CDana V		Left tilt	0.05	0.35	0.10	0.08	0.58
	body-	Front side	0.41	0.10	0.11	0.04	0.66
	worn	Back side	0.48	0.12	0.14	0.04	0.78
		Right cheek	0.10	0.53	0.19	0.07	0.89
	Head	Right tilt	0.06	0.23	0.11	0.05	0.45
LTE FDD Band 2	rioud	Left cheek	0.14	0.54	0.17	0.08	0.93
		Left tilt	0.10	0.35	0.10	0.08	0.63
	body-	Front side	0.34	0.10	0.11	0.04	0.59
	worn	Back side	0.36	0.12	0.14	0.04	0.66

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.



repor	ted SAR V	VWAN and WL	AN 5GHz MI	MO and Blue	tooth, ΣSAR	evaluation		
Frequency				reported SAR / W/kg				
band	P	osition	WWAN	Ant 0	Ant 1	BT	<1.6W/kg	
		Right cheek	0.06	0.53	0.19	0.07	0.85	
	L la sal	Right tilt	0.05	0.23	0.11	0.05	0.44	
	Head	Left cheek	0.10	0.54	0.17	0.08	0.89	
LTE FDD Band 4		Left tilt	0.05	0.35	0.10	0.08	0.58	
	body-	Front side	0.23	0.10	0.11	0.04	0.48	
	worn	Back side	0.24	0.12	0.14	0.04	0.54	
		Right cheek	0.12	0.53	0.19	0.07	0.91	
	المعط	Right tilt	0.04	0.23	0.11	0.05	0.43	
LTE FDD Band 5	Head	Left cheek	0.09	0.54	0.17	0.08	0.88	
LTE FUD Band 5		Left tilt	0.04	0.35	0.10	0.08	0.57	
	body-	Front side	0.33	0.10	0.11	0.04	0.58	
	worn	Back side	0.36	0.12	0.14	0.04	0.66	
		Right cheek	0.07	0.53	0.19	0.07	0.86	
	L la sed	Right tilt	0.07	0.23	0.11	0.05	0.46	
	Head	Left cheek	0.18	0.54	0.17	0.08	0.97	
LTE FDD Band 7		Left tilt	0.06	0.35	0.10	0.08	0.59	
	body-	Front side	0.43	0.10	0.11	0.04	0.68	
	worn	Back side	0.58	0.12	0.14	0.04	0.88	
		Right cheek	0.14	0.53	0.19	0.07	0.93	
	L la sed	Right tilt	0.04	0.23	0.11	0.05	0.43	
	Head	Left cheek	0.08	0.54	0.17	0.08	0.87	
LTE FDD Band 12		Left tilt	0.04	0.35	0.10	0.08	0.57	
	body-	Front side	0.37	0.10	0.11	0.04	0.62	
	worn	Back side	0.42	0.12	0.14	0.04	0.72	
	Head	Right cheek	0.05	0.53	0.19	0.07	0.84	
		Right tilt	0.03	0.23	0.11	0.05	0.42	
		Left cheek	0.04	0.54	0.17	0.08	0.83	
LTE FDD Band 13		Left tilt	0.03	0.35	0.10	0.08	0.56	
	body-	Front side	0.12	0.10	0.11	0.04	0.37	
	worn	Back side	0.13	0.12	0.14	0.04	0.43	
		Right cheek	0.14	0.53	0.19	0.07	0.93	
		Right tilt	0.04	0.23	0.11	0.05	0.43	
	Head	Left cheek	0.08	0.54	0.17	0.08	0.87	
LTE FDD Band 17		Left tilt	0.04	0.35	0.10	0.08	0.57	
	body-	Front side	0.37	0.10	0.11	0.04	0.62	
	worn	Back side	0.42	0.12	0.14	0.04	0.72	
		Right cheek	0.06	0.53	0.19	0.07	0.85	
	Llaad	Right tilt	0.05	0.23	0.11	0.05	0.44	
LTE TOD Band 00	Head	Left cheek	0.08	0.54	0.17	0.08	0.87	
LTE TDD Band 38		Left tilt	0.05	0.35	0.10	0.08	0.58	
	body-	Front side	0.22	0.10	0.11	0.04	0.47	
	worn	Back side	0.25	0.12	0.14	0.04	0.55	
		Right cheek	0.05	0.53	0.19	0.07	0.84	
	110-1	Right tilt	0.04	0.23	0.11	0.05	0.43	
LTE TOD Dand 44	Head	Left cheek	0.07	0.54	0.17	0.08	0.86	
LTE TDD Band 41		Left tilt	0.04	0.35	0.10	0.08	0.57	
	body-	Front side	0.17	0.10	0.11	0.04	0.42	
	worn	Back side	0.20	0.12	0.14	0.04	0.50	

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.



reported SA	AR WWAN	and WLAN 5G	Hz Ant 1 and	d Bluetooth,	ΣSAR evalua	ation
Frequency			repo	orted SAR / W	//kg	ΣSAR
band	Р	osition	WWAN	Ant 1	BT	<1.6W/kg
		Right cheek	0.06	0.19	0.07	0.32
	Head	Right tilt	0.04	0.11	0.05	0.20
0014 050	пеаа	Left cheek	0.06	0.17	0.08	0.31
GSM 850		Left tilt	0.03	0.10	0.08	0.21
	body-	Front side	0.19	0.11	0.04	0.34
	worn	Back side	0.22	0.14	0.04	0.40
		Right cheek	0.07	0.19	0.07	0.33
	Head	Right tilt	0.04	0.11	0.05	0.20
GSM 1900	nead	Left cheek	0.11	0.17	0.08	0.36
GSM 1900		Left tilt	0.06	0.10	0.08	0.24
	body-	Front side	0.28	0.11	0.04	0.43
	worn	Back side	0.28	0.14	0.04	0.46
		Right cheek	0.11	0.19	0.07	0.37
	Head	Right tilt	0.07	0.11	0.05	0.23
WCDMA Band II		Left cheek	0.16	0.17	0.08	0.41
		Left tilt	0.09	0.10	0.08	0.27
	body-	Front side	0.39	0.11	0.04	0.54
	worn	Back side	0.40	0.14	0.04	0.58
	Head	Right cheek	0.08	0.19	0.07	0.34
		Right tilt	0.05	0.11	0.05	0.21
WCDMA Band IV	neau	Left cheek	0.10	0.17	0.08	0.35
WCDIVIA Band IV		Left tilt	0.06	0.10	0.08	0.24
	body-	Front side	0.24	0.11	0.04	0.39
	worn	Back side	0.25	0.14	0.04	0.43
		Right cheek	0.14	0.19	0.07	0.40
	Head	Right tilt	0.05	0.11	0.05	0.21
WCDMA Band V	neau	Left cheek	0.12	0.17	0.08	0.37
		Left tilt	0.05	0.10	0.08	0.23
	body-	Front side	0.41	0.11	0.04	0.56
	worn	Back side	0.48	0.14	0.04	0.66
		Right cheek	0.10	0.19	0.07	0.36
	Hood	Right tilt	0.06	0.11	0.05	0.22
	Head	Left cheek	0.14	0.17	0.08	0.39
LTE FDD Band 2		Left tilt	0.10	0.10	0.08	0.28
	body-	Front side	0.34	0.11	0.04	0.49
	worn	Back side	0.36	0.14	0.04	0.54

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.



reported SA	RWWAN	and WLAN 5G	Hz Ant 1 and	d Bluetooth,	ΣSAR evalu	ation
Frequency	P	osition	repo	orted SAR / W	//kg	ΣSAR
band	•		WWAN	Ant 1	BT	<1.6W/kg
		Right cheek	0.06	0.19	0.07	0.32
	Head	Right tilt	0.05	0.11	0.05	0.21
LTE FDD Band 4	ricau	Left cheek	0.10	0.17	0.08	0.35
		Left tilt	0.05	0.10	0.08	0.23
	body-	Front side	0.23	0.11	0.04	0.38
	worn	Back side	0.24	0.14	0.04	0.42
		Right cheek	0.12	0.19	0.07	0.38
	Head	Right tilt	0.04	0.11	0.05	0.20
LTE FDD Band 5	Tieau	Left cheek	0.09	0.17	0.08	0.34
ETE T DD Dano 5		Left tilt	0.04	0.10	0.08	0.22
	body-	Front side	0.33	0.11	0.04	0.48
	worn	Back side	0.36	0.14	0.04	0.54
		Right cheek	0.07	0.19	0.07	0.33
	Head	Right tilt	0.07	0.11	0.05	0.23
LTE FDD Band 7	Tieau	Left cheek	0.18	0.17	0.08	0.43
LIE FOD Band 7		Left tilt	0.06	0.10	0.08	0.24
	body-	Front side	0.43	0.11	0.04	0.58
	worn	Back side	0.58	0.14	0.04	0.76
		Right cheek	0.14	0.19	0.07	0.40
	Head	Right tilt	0.04	0.11	0.05	0.20
LTE EDD Band 40		Left cheek	0.08	0.17	0.08	0.33
LTE FDD Band 12		Left tilt	0.04	0.10	0.08	0.22
	body-	Front side	0.37	0.11	0.04	0.52
	worn	Back side	0.42	0.14	0.04	0.60
		Right cheek	0.05	0.19	0.07	0.31
	Head	Right tilt	0.03	0.11	0.05	0.19
LTE FDD Band 13	Heau	Left cheek	0.04	0.17	0.08	0.29
LIE FUU Band 13		Left tilt	0.03	0.10	0.08	0.21
	body-	Front side	0.12	0.11	0.04	0.27
	worn	Back side	0.13	0.14	0.04	0.31
		Right cheek	0.14	0.19	0.07	0.40
	Llaad	Right tilt	0.04	0.11	0.05	0.20
LTE FDD Band 17	Head	Left cheek	0.08	0.17	0.08	0.33
LIE FUD Band 17		Left tilt	0.04	0.10	0.08	0.22
	body-	Front side	0.37	0.11	0.04	0.52
	worn	Back side	0.42	0.14	0.04	0.60
		Right cheek	0.06	0.19	0.07	0.32
		Right tilt	0.05	0.11	0.05	0.21
LTE TDD Band 38	Head	Left cheek	0.08	0.17	0.08	0.33
		Left tilt	0.05	0.10	0.08	0.23
	body-	Front side	0.22	0.11	0.04	0.37
	worn	Back side	0.25	0.14	0.04	0.43
		Right cheek	0.05	0.19	0.07	0.31
	1 1 41	Right tilt	0.04	0.11	0.05	0.20
TE TOD Dood 44	Head	Left cheek	0.07	0.17	0.08	0.32
LTE TDD Band 41		Left tilt	0.04	0.10	0.08	0.22
	body-	Front side	0.17	0.11	0.04	0.32
	worn	Back side	0.20	0.14	0.04	0.38

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



reported SA	AR WWAN	and WLAN 2.	4GHz Ant0 +	WLAN 5GHz /	Ant1, ΣSAR e	valuation
Frequency	D	osition	rep	oorted SAR / W	/kg	ΣSAR
band	F	USILION	WWAN	Ant 0	Aant 1	<1.6W/kg
		Front side	0.22	0.05	0.11	0.38
		Back side	0.23	0.06	0.11	0.40
GPRS 850	Hotspot	Top side	0.02	0.05	0.02	0.09
(1Dn4UP)	Ποιδροι	Bottom side	0.17	0.00	0.00	0.17
		Right side	0.19	0.05	0.02	0.26
		Left side	0.05	0.02	0.03	0.10
		Front side	0.30	0.05	0.11	0.46
		Back side	0.33	0.06	0.11	0.50
GPRS 1900	1.1	Top side	0.03	0.05	0.02	0.10
(1Dn4UP)	Hotspot	Bottom side	0.27	0.00	0.00	0.27
		Right side	0.04	0.05	0.02	0.11
		Left side	0.18	0.02	0.03	0.23
		Front side	0.39	0.05	0.11	0.55
		Back side	0.40	0.06	0.11	0.57
WCDMA		Top side	0.02	0.05	0.02	0.09
Band II	Hotspot	Bottom side	0.32	0.00	0.00	0.32
		Right side	0.07	0.05	0.02	0.14
		Left side	0.23	0.02	0.03	0.28
		Front side	0.24	0.05	0.11	0.40
		Back side	0.25	0.06	0.11	0.42
WCDMA		Top side	0.01	0.05	0.02	0.08
Band IV	Hotspot	Bottom side	0.20	0.00	0.00	0.20
		Right side	0.05	0.05	0.02	0.12
		Left side	0.15	0.02	0.03	0.20
		Front side	0.41	0.05	0.11	0.57
		Back side	0.48	0.06	0.11	0.65
WCDMA		Top side	0.03	0.05	0.02	0.10
Band V	Hotspot	Bottom side	0.27	0.00	0.00	0.27
		Right side	0.42	0.05	0.02	0.49
		Left side	0.05	0.02	0.03	0.10
		Front side	0.34	0.05	0.11	0.50
		Back side	0.36	0.06	0.11	0.53
LTE FDD		Top side	0.03	0.05	0.02	0.10
Band 2	Hotspot	Bottom side	0.29	0.00	0.00	0.29
		Right side	0.05	0.05	0.02	0.12
		Left side	0.19	0.02	0.03	0.24
		Front side	0.23	0.05	0.11	0.39
		Back side	0.24	0.06	0.11	0.41
LTE FDD		Top side	0.01	0.05	0.02	0.08
Band 4	Hotspot	Bottom side	0.19	0.00	0.00	0.19
		Right side	0.04	0.05	0.02	0.11
		Left side		0.02		
		Left side	0.15	0.02	0.03	0.20

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.



reported S	AR WWAN	and WLAN 2.	4GHz Ant0 +	WLAN 5GHz A	Ant1, ΣSAR e	valuation
Frequency	Р	osition	rep	oorted SAR / W	/kg	ΣSAR
band	F	USILION	WWAN	Ant 0	Ant 1	<1.6W/kg
		Front side	0.33	0.05	0.11	0.49
		Back side	0.36	0.06	0.11	0.53
LTE FDD	Hotopot	Top side	0.01	0.05	0.02	0.08
Band 5	Hotspot	Bottom side	0.25	0.00	0.00	0.25
		Right side	0.33	0.05	0.02	0.40
		Left side	0.05	0.02	0.03	0.10
		Front side	0.43	0.05	0.11	0.59
		Back side	0.58	0.06	0.11	0.75
LTE FDD	LTE FDD Hotspot	Top side	0.01	0.05	0.02	0.08
Band 7	погерог	Bottom side	1.05	0.00	0.00	1.05
		Right side	0.06	0.05	0.02	0.13
		Left side	0.19	0.02	0.03	0.24
		Front side	0.37	0.05	0.11	0.53
	Back side	0.42	0.06	0.11	0.59	
LTE FDD	Listenet	Top side	0.03	0.05	0.02	0.10
Band 12	Hotspot	Bottom side	0.14	0.00	0.00	0.14
		Right side	0.35	0.05	0.02	0.42
		Left side	0.05	0.02	0.03	0.10
		Front side	0.12	0.05	0.11	0.28
		Back side	0.13	0.06	0.11	0.30
LTE FDD	11-1	Top side	0.01	0.05	0.02	0.08
Band 13	Hotspot	Bottom side	0.05	0.00	0.00	0.05
		Right side	0.12	0.05	0.02	0.19
		Left side	0.01	0.02	0.03	0.06
		Front side	0.37	0.05	0.11	0.53
		Back side	0.42	0.06	0.11	0.59
LTE FDD	Links	Top side	0.01	0.05	0.02	0.08
Band 17	Hotspot	Bottom side	0.14	0.00	0.00	0.14
		Right side	0.33	0.05	0.02	0.40
		Left side	0.05	0.02	0.03	0.10
		Front side	0.22	0.05	0.11	0.38
		Back side	0.25	0.06	0.11	0.42
LTE TDD	Listenet	Top side	0.01	0.05	0.02	0.08
Band 38	Hotspot	Bottom side	0.42	0.00	0.00	0.42
		Right side	0.04	0.05	0.02	0.11
		Left side	0.08	0.02	0.03	0.13
		Front side	0.17	0.05	0.11	0.33
		Back side	0.20	0.06	0.11	0.37
LTE TDD		Top side	0.01	0.05	0.02	0.08
Band 41	Hotspot	Bottom side	0.37	0.00	0.00	0.37
		Right side	0.02	0.05	0.02	0.09
		Left side	0.06	0.02	0.03	0.11

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.



reported SAR WWAN and WLAN 5GHz Ant0 + WLAN 2.4GHz Ant1, ΣSAR evaluation								
Frequency	Position		rep	ΣSAR				
band			WWAN	Ant 0	Aant 1	<1.6W/kg		
GPRS 850 (1Dn4UP)		Front side	0.22	0.10	0.02	0.34		
		Back side	0.23	0.11	0.12	0.46		
	Hotopot	Top side	0.02	0.01	0.01	0.04		
	Hotspot	Bottom side	0.17	0.00	0.00	0.17		
		Right side	0.19	0.06	0.02	0.27		
		Left side	0.05	0.02	0.05	0.12		
		Front side	0.30	0.10	0.02	0.42		
		Back side	0.33	0.11	0.12	0.56		
GPRS 1900	Hotepot	Top side	0.03	0.01	0.01	0.05		
(1Dn4UP)	Hotspot	Bottom side	0.27	0.00	0.00	0.27		
		Right side	0.04	0.06	0.02	0.12		
		Left side	0.18	0.02	0.05	0.25		
		Front side	0.39	0.10	0.02	0.51		
		Back side	0.40	0.11	0.12	0.63		
WCDMA Band II	Hotspot	Top side	0.02	0.01	0.01	0.04		
		Bottom side	0.32	0.00	0.00	0.32		
		Right side	0.07	0.06	0.02	0.15		
		Left side	0.23	0.02	0.05	0.30		
	Hotspot	Front side	0.24	0.10	0.02	0.36		
		Back side	0.25	0.11	0.12	0.48		
WCDMA		Top side	0.01	0.01	0.01	0.03		
Band IV		Bottom side	0.20	0.00	0.00	0.20		
		Right side	0.05	0.06	0.02	0.13		
		Left side	0.15	0.02	0.05	0.22		
	Hotspot	Front side	0.41	0.10	0.02	0.53		
		Back side	0.48	0.11	0.12	0.71		
WCDMA Band V		Top side	0.03	0.01	0.01	0.05		
		Bottom side	0.27	0.00	0.00	0.27		
		Right side	0.42	0.06	0.02	0.50		
		Left side	0.05	0.02	0.05	0.12		
	Hotspot	Front side	0.34	0.10	0.02	0.46		
		Back side	0.36	0.11	0.12	0.59		
LTE FDD Band 2		Top side	0.03	0.01	0.01	0.05		
		Bottom side	0.29	0.00	0.00	0.29		
		Right side	0.05	0.06	0.02	0.13		
		Left side	0.19	0.02	0.05	0.26		
LTE FDD Band 4	Hotspot	Front side	0.23	0.10	0.02	0.35		
		Back side	0.24	0.11	0.12	0.47		
		Top side	0.01	0.01	0.01	0.03		
		Bottom side	0.19	0.00	0.00	0.19		
		Right side	0.04	0.06	0.02	0.12		
		Left side	0.15	0.02	0.05	0.22		

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.



reported SAR WWAN and WLAN 5GHz Ant0 + WLAN 2.4GHz Ant1, ΣSAR evaluation								
Frequency	Р	Desition		reported SAR / W/kg				
band	Position		WWAN	Ant 0	Ant 1	<1.6W/kg		
LTE FDD Band 5		Front side	0.33	0.10	0.02	0.45		
		Back side	0.36	0.11	0.12	0.59		
	Hotopot	Top side	0.01	0.01	0.01	0.03		
	Hotspot	Bottom side	0.25	0.00	0.00	0.25		
		Right side	0.33	0.06	0.02	0.41		
		Left side	0.05	0.02	0.05	0.12		
		Front side	0.43	0.10	0.02	0.55		
LTE FDD Band 7		Back side	0.58	0.11	0.12	0.81		
	Hotopot	Top side	0.01	0.01	0.01	0.03		
	Hotspot	Bottom side	1.05	0.00	0.00	1.05		
		Right side	0.06	0.06	0.02	0.14		
		Left side	0.19	0.02	0.05	0.26		
		Front side	0.37	0.10	0.02	0.49		
		Back side	0.42	0.11	0.12	0.65		
LTE FDD	11-1	Top side	0.03	0.01	0.01	0.05		
Band 12	Hotspot	Bottom side	0.14	0.00	0.00	0.14		
		Right side	0.35	0.06	0.02	0.43		
		Left side	0.05	0.02	0.05	0.12		
	Hotspot	Front side	0.12	0.10	0.02	0.24		
		Back side	0.13	0.11	0.12	0.36		
LTE FDD		Top side	0.01	0.01	0.01	0.03		
Band 13		Bottom side	0.05	0.00	0.00	0.05		
		Right side	0.12	0.06	0.02	0.20		
		Left side	0.01	0.02	0.05	0.08		
	Hotspot	Front side	0.37	0.10	0.02	0.49		
		Back side	0.42	0.11	0.12	0.65		
LTE FDD		Top side	0.01	0.01	0.01	0.03		
Band 17		Bottom side	0.14	0.00	0.00	0.14		
		Right side	0.33	0.06	0.02	0.41		
		Left side	0.05	0.02	0.05	0.12		
	Hotspot	Front side	0.22	0.10	0.02	0.34		
		Back side	0.25	0.11	0.12	0.48		
LTE TDD		Top side	0.01	0.01	0.01	0.03		
Band 38		Bottom side	0.42	0.00	0.00	0.42		
		Right side	0.04	0.06	0.02	0.12		
		Left side	0.08	0.02	0.05	0.15		
LTE TDD Band 41	Hotspot	Front side	0.17	0.10	0.02	0.29		
		Back side	0.20	0.11	0.12	0.43		
		Top side	0.01	0.01	0.01	0.03		
		Bottom side	0.37	0.00	0.00	0.37		
		Right side	0.02	0.06	0.02	0.10		
		Left side	0.06	0.02	0.05	0.13		

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



reported SAR WWAN and WLAN 2.4GHz+ 5GHz Ant 0 and WLAN 2.4GHz+5GHz Ant 1, ΣSAR evaluation								
Frequency	P	Position		reported SAR / W/kg				
band	Position		WWAN	2.4G Ant 0	5G Ant 0	2.4G Ant 1	5G Ant 1	<1.6W/kg
GPRS 850 (1Dn4UP)		Front side	0.22	0.05	0.10	0.02	0.11	0.50
		Back side	0.23	0.06	0.11	0.12	0.11	0.63
	11-1	Top side	0.02	0.05	0.01	0.01	0.02	0.11
	Hotspot	Bottom side	0.17	0.00	0.00	0.00	0.00	0.17
		Right side	0.19	0.05	0.06	0.02	0.02	0.34
		Left side	0.05	0.02	0.02	0.05	0.03	0.17
GPRS 1900 (1Dn4UP)		Front side	0.30	0.05	0.10	0.02	0.11	0.58
	Hotspot	Back side	0.33	0.06	0.11	0.12	0.11	0.73
		Top side	0.03	0.05	0.01	0.01	0.02	0.12
		Bottom side	0.27	0.00	0.00	0.00	0.00	0.27
		Right side	0.04	0.05	0.06	0.02	0.02	0.19
		Left side	0.18	0.02	0.02	0.05	0.03	0.30
WCDMA Band II		Front side	0.39	0.05	0.10	0.02	0.11	0.67
		Back side	0.40	0.06	0.11	0.12	0.11	0.80
	11-1	Top side	0.02	0.05	0.01	0.01	0.02	0.11
	Hotspot	Bottom side	0.32	0.00	0.00	0.00	0.00	0.32
		Right side	0.07	0.05	0.06	0.02	0.02	0.22
		Left side	0.23	0.02	0.02	0.05	0.03	0.35
		Front side	0.24	0.05	0.10	0.02	0.11	0.52
	Hotspot	Back side	0.25	0.06	0.11	0.12	0.11	0.65
WCDMA		Top side	0.01	0.05	0.01	0.01	0.02	0.10
Band IV		Bottom side	0.20	0.00	0.00	0.00	0.00	0.20
		Right side	0.05	0.05	0.06	0.02	0.02	0.20
		Left side	0.15	0.02	0.02	0.05	0.03	0.27
		Front side	0.41	0.05	0.10	0.02	0.11	0.69
WCDMA	Hotspot	Back side	0.48	0.06	0.11	0.12	0.11	0.88
		Top side	0.03	0.05	0.01	0.01	0.02	0.12
Band V		Bottom side	0.27	0.00	0.00	0.00	0.00	0.27
		Right side	0.42	0.05	0.06	0.02	0.02	0.57
		Left side	0.05	0.02	0.02	0.05	0.03	0.17
	Hotspot	Front side	0.34	0.05	0.10	0.02	0.11	0.62
		Back side	0.36	0.06	0.11	0.12	0.11	0.76
LTE FDD		Top side	0.03	0.05	0.01	0.01	0.02	0.12
Band 2		Bottom side	0.29	0.00	0.00	0.00	0.00	0.29
		Right side	0.05	0.05	0.06	0.02	0.02	0.20
		Left side	0.19	0.02	0.02	0.05	0.03	0.31
LTE FDD Band 4		Front side	0.23	0.05	0.10	0.02	0.11	0.51
		Back side	0.24	0.06	0.11	0.12	0.11	0.64
		Top side	0.01	0.05	0.01	0.01	0.02	0.10
	Hotspot	Bottom side	0.19	0.00	0.00	0.00	0.00	0.19
		Right side	0.04	0.05	0.06	0.02	0.02	0.19
		Left side	0.15	0.02	0.02	0.05	0.03	0.27

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.



reported SAR WWAN and WLAN 2.4GHz+ 5GHz Ant 0 and WLAN 2.4GHz+5GHz Ant 1, ΣSAR evaluation										
Frequency	Position			ΣSAR						
band			WWAN	2.4G Ant 0	5G Ant 0	2.4G Ant 1	5G Ant 1	<1.6W/kg		
LTE FDD Band 5	Hotspot	Front side	0.33	0.05	0.10	0.02	0.11	0.61		
		Back side	0.36	0.06	0.11	0.12	0.11	0.76		
		Top side	0.01	0.05	0.01	0.01	0.02	0.10		
		Bottom side	0.25	0.00	0.00	0.00	0.00	0.25		
		Right side	0.33	0.05	0.06	0.02	0.02	0.48		
		Left side	0.05	0.02	0.02	0.05	0.03	0.17		
	Hotspot	Front side	0.43	0.05	0.10	0.02	0.11	0.71		
		Back side	0.58	0.06	0.11	0.12	0.11	0.98		
LTE FDD		Top side	0.01	0.05	0.01	0.01	0.02	0.10		
Band 7		Bottom side	1.05	0.00	0.00	0.00	0.00	1.05		
		Right side	0.06	0.05	0.06	0.02	0.02	0.21		
		Left side	0.19	0.02	0.02	0.05	0.03	0.31		
		Front side	0.37	0.05	0.10	0.02	0.11	0.65		
		Back side	0.42	0.06	0.11	0.12	0.11	0.82		
LTE FDD	Hotspot	Top side	0.03	0.05	0.01	0.01	0.02	0.12		
Band 12		Bottom side	0.14	0.00	0.00	0.00	0.00	0.14		
		Right side	0.35	0.05	0.06	0.02	0.02	0.50		
		Left side	0.05	0.02	0.02	0.05	0.03	0.17		
	Hotspot	Front side	0.12	0.05	0.10	0.02	0.11	0.40		
		Back side	0.13	0.06	0.11	0.12	0.11	0.53		
LTE FDD		Top side	0.01	0.05	0.01	0.01	0.02	0.10		
Band 13		Bottom side	0.05	0.00	0.00	0.00	0.00	0.05		
		Right side	0.12	0.05	0.06	0.02	0.02	0.27		
		Left side	0.01	0.02	0.02	0.05	0.03	0.13		
	Hotspot	Front side	0.37	0.05	0.10	0.02	0.11	0.65		
LTE FDD Band 17		Back side	0.42	0.06	0.11	0.12	0.11	0.82		
		Top side	0.01	0.05	0.01	0.01	0.02	0.10		
		Bottom side	0.14	0.00	0.00	0.00	0.00	0.14		
		Right side	0.33	0.05	0.06	0.02	0.02	0.48		
		Left side	0.05	0.02	0.02	0.05	0.03	0.17		
	Hotspot	Front side	0.22	0.05	0.10	0.02	0.11	0.50		
		Back side	0.25	0.06	0.11	0.12	0.11	0.65		
LTE TDD		Top side	0.01	0.05	0.01	0.01	0.02	0.10		
Band 38		Bottom side	0.42	0.00	0.00	0.00	0.00	0.42		
		Right side	0.04	0.05	0.06	0.02	0.02	0.19		
		Left side	0.08	0.02	0.02	0.05	0.03	0.20		
	Hotspot	Front side	0.17	0.05	0.10	0.02	0.11	0.45		
		Back side	0.20	0.06	0.11	0.12	0.11	0.60		
LTE TDD Band 41		Top side	0.01	0.05	0.01	0.01	0.02	0.10		
		Bottom side	0.37	0.00	0.00	0.00	0.00	0.37		
		Right side	0.02	0.05	0.06	0.02	0.02	0.17		
		Left side	0.06	0.02	0.02	0.05	0.03	0.18		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



# 4. Instruments List

Manufacturer	Device	Туре	Serial number	Date of last calibration	Date of next calibration
SPEAG	Dosimetric E-Field Probe	EX3DV4	7509	Mar.25,2019	Mar.24,2020
		D750V3	1015	Aug.23,2019	Aug.22,2020
		D835V2	4d063	Aug.23,2019	Aug.22,2020
		D1750V2	1008	Aug.23,2019	Aug.22,2020
SPEAG	System Validation Dipole	D1900V2	5d173	Apr.23,2019	Apr.22,2020
		D2450V2	727	Apr.24,2019	Apr.23,2020
		D2600V2	1005	Jan.28,2019	Jan.27,2020
		D5GHzV2	1023	Jan.30,2019	Jan.29,2020
SPEAG	Data acquisition Electronics	DAE4	877	Mar.22,2019	Mar.21,2020
SPEAG	Software	DASY 52 V52.8.8	N/A	Calibration not required	Calibration not required
SPEAG	Phantom	SAM	N/A	Calibration not required	Calibration not required
Network Analyzer	Agilent	E5071C	MY46107530	Feb.23,2019	•
Agilent	Dielectric Probe Kit	85070E	MY44300677	Calibration not required	Calibration not required
Agilent	Dual-directional	772D	MY46151242	Jul.30,2019	Jul.29,2020
Aglient	coupler	778D	MY48220468	Jul.30,2019	Jul.29,2020
Agilent	MXG Analog Signal Generator	N5181A	MY50141235	Apr.22,2019	Apr.21,2020
Agilent	Power Meter	E4417A	MY51410006	Feb.19,2019	Feb.18,2020
Agilopt	Power Sensor	E9301H	MY51470001	Feb.19,2019	Feb.18,2020
Agilent	Power Sensor		MY51470002	Feb.19,2019	Feb.18,2020
TECPEL	Digital thermometer	DTM-303A	TP130074	Mar.26,2019	Mar.25,2020
Anritsu	Radio Communication Test	MT8820C	6201061014	Dec.08,2019	Dec.07,2020

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



# 5. Measurements

Date: 2020/1/8

## GSM 850 Head Re Cheek CH 128

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3 Medium parameters used: f = 824.2 MHz;  $\sigma$  = 0.935 S/m;  $\epsilon_r$  = 39.486;  $\rho$  = 1000 kg/m³ Phantom section: Right Section Ambient temperature: 22.1°C; Liquid temperature: 21.8°C


**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(10.13, 10.13, 10.13); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (71x121x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.0601 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 4.960 V/m; Power Drift = -0.02 dB Peak SAR (extrapolated) = 0.0720 W/kg SAR(1 g) = 0.052 W/kg; SAR(10 g) = 0.041 W/kgMaximum value of SAR (measured) = 0.0628 W/kg

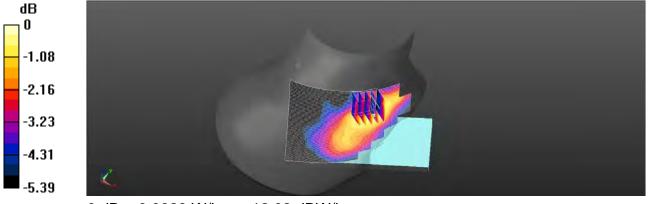

0 dB = 0.0628 W/kg = -12.02 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

```
www.tw.sas.com
```

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No. : E5/2019/C0017 Page: 184 of 261

Date: 2020/1/10

## GSM 850_Body-worn_Back side_CH 128_10mm

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3 Medium parameters used: f = 824.2 MHz;  $\sigma$  = 0.935 S/m;  $\epsilon_r$  = 39.486;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.2°C; Liquid temperature: 21.9°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(10.13, 10.13, 10.13); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (71x131x1): Interpolated grid: dx=15 mm, dy=15 mm


Maximum value of SAR (interpolated) = 0.216 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 8.113 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.263 W/kg

SAR(1 g) = 0.166 W/kg; SAR(10 g) = 0.107 W/kg

Maximum value of SAR (measured) = 0.218 W/kg

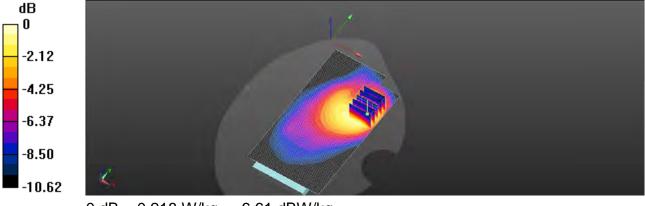

0 dB = 0.218 W/kg = -6.61 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No. : E5/2019/C0017 Page: 185 of 261

Date: 2020/1/10

## GPRS 850 Hotspot Back side CH 190 10mm

Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:2 Medium parameters used: f = 837 MHz;  $\sigma$  = 0.948 S/m;  $\epsilon_r$  = 39.286;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.2°C; Liquid temperature: 21.9°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(10.13, 10.13, 10.13); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Area Scan (71x131x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.252 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 9.051 V/m; Power Drift = -0.06 dB Peak SAR (extrapolated) = 0.303 W/kg

SAR(1 g) = 0.193 W/kg; SAR(10 g) = 0.125 W/kg

Maximum value of SAR (measured) = 0.251 W/kg

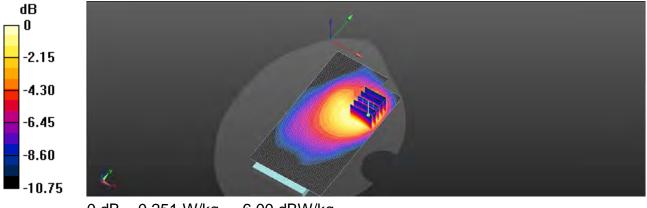

0 dB = 0.251 W/kg = -6.00 dBW/kg

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Date: 2020/1/12

# GSM 1900 Head Le Cheek CH 810

Communication System: GPRS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3 Medium parameters used: f = 1910 MHz;  $\sigma$  = 1.419 S/m;  $\epsilon_r$  = 38.096;  $\rho$  = 1000 kg/m³ Phantom section: Left Section Ambient temperature: 22.4°C; Liquid temperature: 21.9°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(8.5, 8.5, 8.5); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Area Scan (71x131x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.0944 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 3.875 V/m; Power Drift = 0.01 dB Peak SAR (extrapolated) = 0.110 W/kg

SAR(1 g) = 0.079 W/kg; SAR(10 g) = 0.057 W/kg

Maximum value of SAR (measured) = 0.0935 W/kg

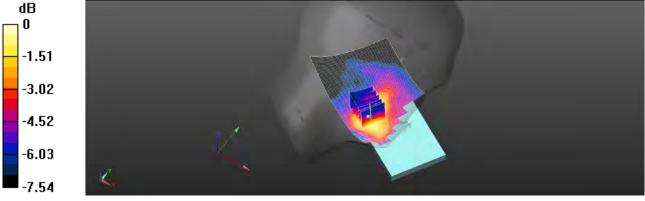

0 dB = 0.0935 W/kg = -10.29 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.



Report No. : E5/2019/C0017 Page: 187 of 261

Date: 2020/1/12

#### GSM 1900 Body-worn Back side CH 810 10mm

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3 Medium parameters used: f = 1910 MHz;  $\sigma$  = 1.419 S/m;  $\epsilon_r$  = 38.096;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.4°C; Liquid temperature: 21.9°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(8.5, 8.5, 8.5); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Area Scan (71x131x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.283 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 7.169 V/m; Power Drift = -0.01 dB Peak SAR (extrapolated) = 0.322 W/kg

SAR(1 g) = 0.202 W/kg; SAR(10 g) = 0.126 W/kg

Maximum value of SAR (measured) = 0.259 W/kg

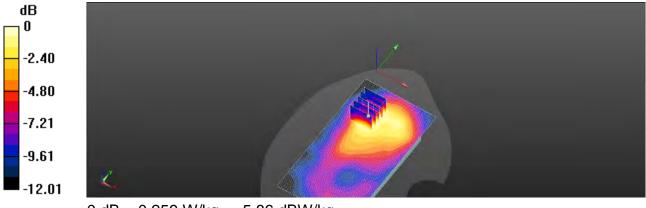

0 dB = 0.259 W/kg = -5.86 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.



Report No. : E5/2019/C0017 Page: 188 of 261

Date: 2020/1/12

## GPRS 1900 Hotspot Back side CH 810 10mm

Communication System: GPRS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:2 Medium parameters used: f = 1910 MHz;  $\sigma$  = 1.419 S/m;  $\epsilon_r$  = 38.096;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.4°C; Liquid temperature: 21.9°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(8.5, 8.5, 8.5); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Area Scan (71x131x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.323 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 7.065 V/m; Power Drift = -0.05 dB Peak SAR (extrapolated) = 0.363 W/kg

SAR(1 g) = 0.223 W/kg; SAR(10 g) = 0.136 W/kg

Maximum value of SAR (measured) = 0.292 W/kg

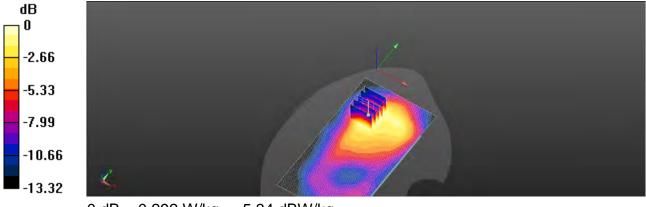

0 dB = 0.292 W/kg = -5.34 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

```
www.tw.sas.com
```



Report No. : E5/2019/C0017 Page: 189 of 261

Date: 2020/1/12

# WCDMA Band II Head Le Cheek CH 9400

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1 Medium parameters used: f = 1880 MHz;  $\sigma$  = 1.393 S/m;  $\epsilon_r$  = 38.2;  $\rho$  = 1000 kg/m³ Phantom section: Left Section Ambient temperature: 22.4°C; Liquid temperature: 21.9°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(8.5, 8.5, 8.5); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22 •
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Area Scan (71x131x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.161 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 5.151 V/m; Power Drift = 0.05 dB Peak SAR (extrapolated) = 0.173 W/kg

SAR(1 g) = 0.125 W/kg; SAR(10 g) = 0.090 W/kg

Maximum value of SAR (measured) = 0.149 W/kg

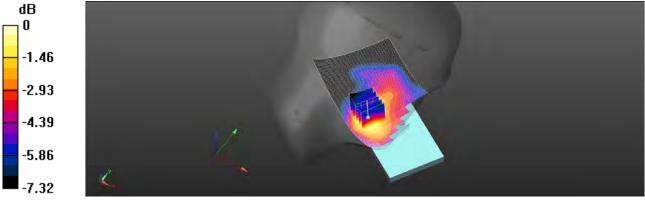

0 dB = 0.149 W/kg = -8.26 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No. : E5/2019/C0017 Page: 190 of 261

Date: 2020/1/12

## WCDMA Band II Hotspot Back side CH 9400 10mm

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1 Medium parameters used: f = 1880 MHz;  $\sigma$  = 1.393 S/m;  $\epsilon_r$  = 38.2;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.4°C; Liquid temperature: 21.9°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(8.5, 8.5, 8.5); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Area Scan (71x131x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.460 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 8.619 V/m; Power Drift = -0.01 dB Peak SAR (extrapolated) = 0.518 W/kg

SAR(1 g) = 0.326 W/kg; SAR(10 g) = 0.200 W/kg

Maximum value of SAR (measured) = 0.419 W/kg

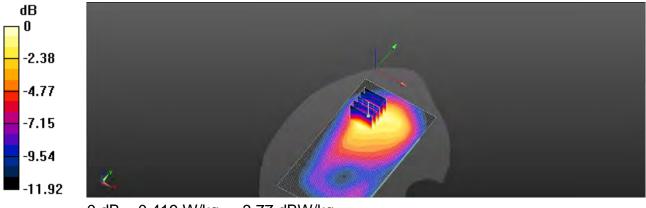

0 dB = 0.419 W/kg = -3.77 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

```
www.tw.sas.com
```



Report No. : E5/2019/C0017 Page: 191 of 261

Date: 2020/1/11

# WCDMA Band IV Head Le Cheek CH 1513

Communication System: WCDMA band IV; Frequency: 1752.6 MHz; Duty Cycle: 1:1 Medium parameters used: f = 1753 MHz;  $\sigma$  = 1.263 S/m;  $\epsilon_r$  = 38.734;  $\rho$  = 1000 kg/m³ Phantom section: Left Section Ambient temperature: 22.2°C; Liquid temperature: 21.8°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(8.84, 8.84, 8.84); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Area Scan (71x131x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.0993 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 4.694 V/m; Power Drift = -0.01 dB Peak SAR (extrapolated) = 0.107 W/kg

SAR(1 g) = 0.082 W/kg; SAR(10 g) = 0.061 W/kg

Maximum value of SAR (measured) = 0.0948 W/kg

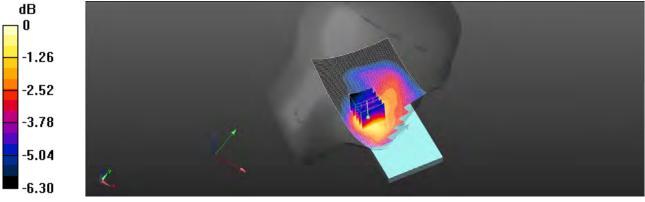

0 dB = 0.0948 W/kg = -10.23 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.



Report No. : E5/2019/C0017 Page: 192 of 261

Date: 2020/1/11

## WCDMA Band IV Hotspot Back side CH 1513 10mm

Communication System: WCDMA band IV; Frequency: 1752.6 MHz; Duty Cycle: 1:1 Medium parameters used: f = 1753 MHz;  $\sigma$  = 1.263 S/m;  $\epsilon_r$  = 38.734;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.2°C; Liquid temperature: 21.8°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(8.84, 8.84, 8.84); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Area Scan (71x131x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.264 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 7.493 V/m; Power Drift = 0.05 dB Peak SAR (extrapolated) = 0.302 W/kg

SAR(1 g) = 0.197 W/kg; SAR(10 g) = 0.125 W/kg

Maximum value of SAR (measured) = 0.253 W/kg

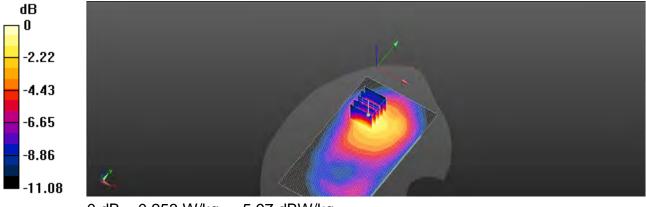

0 dB = 0.253 W/kg = -5.97 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.



Report No. : E5/2019/C0017 Page: 193 of 261

Date: 2020/1/8

# WCDMA Band V Head Re Cheek CH 4183

Communication System: WCDMA Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1 Medium parameters used: f = 837 MHz;  $\sigma$  = 0.948 S/m;  $\epsilon_r$  = 39.286;  $\rho$  = 1000 kg/m³ Phantom section: Right Section Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(10.13, 10.13, 10.13); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22 •
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Area Scan (71x131x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.131 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 4.207 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 0.149 W/kg

SAR(1 g) = 0.109 W/kg; SAR(10 g) = 0.079 W/kg

Maximum value of SAR (measured) = 0.131 W/kg

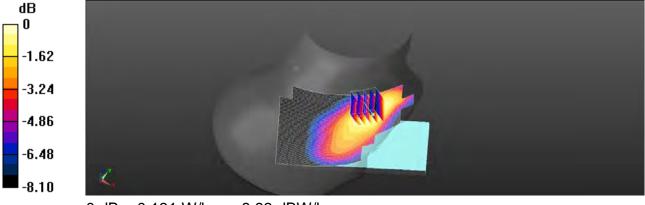

0 dB = 0.131 W/kg = -8.83 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

```
www.tw.sas.com
```



Report No. : E5/2019/C0017 Page: 194 of 261

Date: 2020/1/10

## WCDMA Band V Hotspot Back side CH 4183 10mm

Communication System: WCDMA Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1 Medium parameters used: f = 837 MHz;  $\sigma$  = 0.948 S/m;  $\epsilon_r$  = 39.286;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.2°C; Liquid temperature: 21.9°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(10.13, 10.13, 10.13); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22 •
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (71x131x1): Interpolated grid: dx=15 mm, dy=15 mm


Maximum value of SAR (interpolated) = 0.452 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 11.84 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.580 W/kg

SAR(1 g) = 0.366 W/kg; SAR(10 g) = 0.232 W/kg

Maximum value of SAR (measured) = 0.471 W/kg

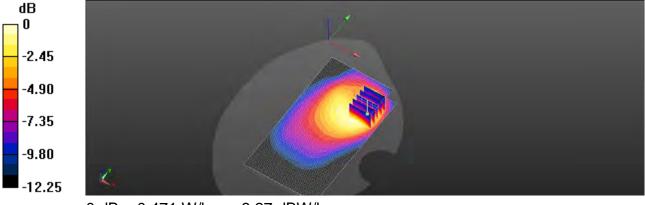

0 dB = 0.471 W/kg = -3.27 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

www.tw.sas.com



Report No. : E5/2019/C0017 Page: 195 of 261

Date: 2020/1/12

## LTE Band 2 (20MHz) Head Le Cheek CH 18700 QPSK 1-99

Communication System: LTE Band 2; Frequency: 1860 MHz; Duty Cycle: 1:1 Medium parameters used: f = 1860 MHz;  $\sigma$  = 1.369 S/m;  $\epsilon_r$  = 38.246;  $\rho$  = 1000 kg/m³ Phantom section: Left Section Ambient temperature: 22.4°C; Liquid temperature: 21.9°C

**DASY5** Configuration:


- Probe: EX3DV4 SN7509; ConvF(8.5, 8.5, 8.5); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22 •
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (71x121x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.134 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 4.907 V/m; Power Drift = -0.04 dB Peak SAR (extrapolated) = 0.151 W/kg

SAR(1 g) = 0.111 W/kg; SAR(10 g) = 0.079 W/kg Maximum value of SAR (measured) = 0.130 W/kg

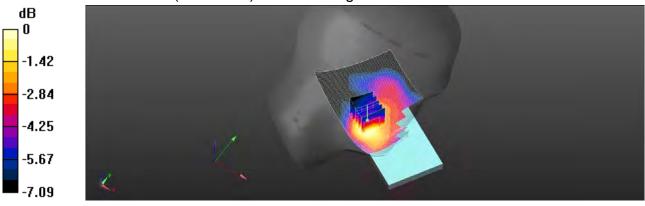

0 dB = 0.130 W/kg = -8.86 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司



Report No. : E5/2019/C0017 Page: 196 of 261

Date: 2020/1/12

#### LTE Band 2 (20MHz) Hotspot Back side CH 18700 QPSK 1-99 10mm

Communication System: LTE Band 2; Frequency: 1860 MHz; Duty Cycle: 1:1 Medium parameters used: f = 1860 MHz;  $\sigma$  = 1.369 S/m;  $\epsilon_r$  = 38.246;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.4°C; Liquid temperature: 21.9°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(8.5, 8.5, 8.5); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Area Scan (71x131x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.394 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 8.005 V/m; Power Drift = 0.03 dB Peak SAR (extrapolated) = 0.452 W/kg

SAR(1 g) = 0.285 W/kg; SAR(10 g) = 0.176 W/kg

Maximum value of SAR (measured) = 0.368 W/kg

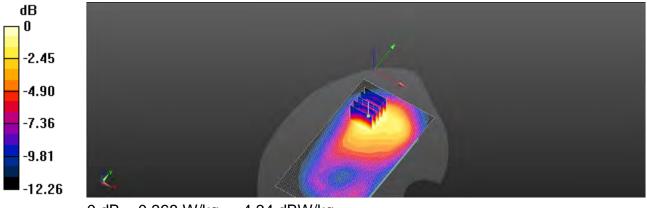

0 dB = 0.368 W/kg = -4.34 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

www.tw.sas.com



Report No. : E5/2019/C0017 Page: 197 of 261

Date: 2020/1/11

## LTE Band 4 (20MHz) Head Le Cheek CH 20300 QPSK 1-0

Communication System: LTE Band 4; Frequency: 1745 MHz; Duty Cycle: 1:1 Medium parameters used: f = 1745 MHz;  $\sigma$  = 1.259 S/m;  $\epsilon_r$  = 38.754;  $\rho$  = 1000 kg/m³ Phantom section: Left Section Ambient temperature: 22.2°C; Liquid temperature: 21.8°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(8.84, 8.84, 8.84); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22 •
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Area Scan (71x121x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.0905 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 4.584 V/m; Power Drift = -0.01 dB Peak SAR (extrapolated) = 0.101 W/kg

SAR(1 g) = 0.076 W/kg; SAR(10 g) = 0.058 W/kg

Maximum value of SAR (measured) = 0.0868 W/kg

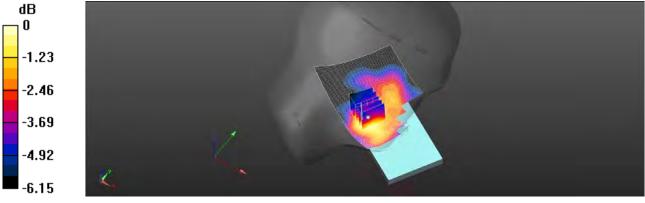

0 dB = 0.0868 W/kg = -10.62 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.



Report No. : E5/2019/C0017 Page: 198 of 261

Date: 2020/1/11

#### LTE Band 4 (20MHz) Hotspot Back side CH 20300 QPSK 1-0 10mm

Communication System: LTE Band 4; Frequency: 1745 MHz; Duty Cycle: 1:1 Medium parameters used: f = 1745 MHz;  $\sigma$  = 1.259 S/m;  $\epsilon_r$  = 38.754;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.2°C; Liquid temperature: 21.8°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(8.84, 8.84, 8.84); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Area Scan (71x131x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.245 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 7.485 V/m; Power Drift = -0.01 dB Peak SAR (extrapolated) = 0.287 W/kg

SAR(1 g) = 0.191 W/kg; SAR(10 g) = 0.123 W/kg

Maximum value of SAR (measured) = 0.240 W/kg

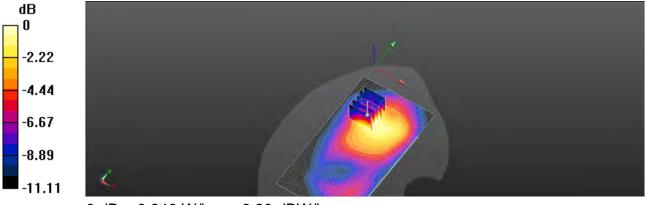

0 dB = 0.240 W/kg = -6.20 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司



Report No. : E5/2019/C0017 Page: 199 of 261

Date: 2020/1/8

# LTE Band 5 (10MHz) Head Re Cheek CH 20525 QPSK 1-49

Communication System: LTE Band 5; Frequency: 836.5 MHz; Duty Cycle: 1:1 Medium parameters used: f = 836.5 MHz;  $\sigma$  = 0.948 S/m;  $\epsilon_r$  = 39.29;  $\rho$  = 1000 kg/m³ Phantom section: Right Section Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(10.13, 10.13, 10.13); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22 •
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Area Scan (71x121x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.108 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 4.516 V/m; Power Drift = -0.02 dB Peak SAR (extrapolated) = 0.120 W/kg

SAR(1 g) = 0.091 W/kg; SAR(10 g) = 0.067 W/kg

Maximum value of SAR (measured) = 0.107 W/kg

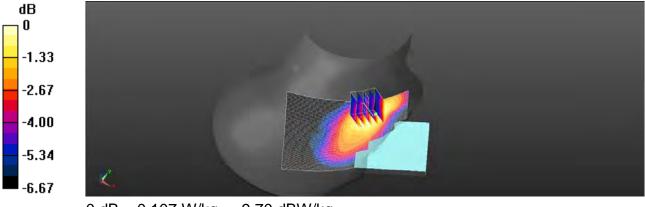

0 dB = 0.107 W/kg = -9.70 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.



Report No. : E5/2019/C0017 Page: 200 of 261

Date: 2020/1/10

#### LTE Band 5 (10MHz) Hotspot Back side CH 20525 QPSK 1-49 10mm

Communication System: LTE Band 5; Frequency: 836.5 MHz; Duty Cycle: 1:1 Medium parameters used: f = 836.5 MHz;  $\sigma$  = 0.948 S/m;  $\epsilon_r$  = 39.29;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.2°C; Liquid temperature: 21.9°C

**DASY5** Configuration:


- Probe: EX3DV4 SN7509; ConvF(10.13, 10.13, 10.13); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (81x131x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.359 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 10.10 V/m; Power Drift = -0.03 dB Peak SAR (extrapolated) = 0.422 W/kg

SAR(1 g) = 0.267 W/kg; SAR(10 g) = 0.170 W/kg Maximum value of SAR (measured) = 0.353 W/kg

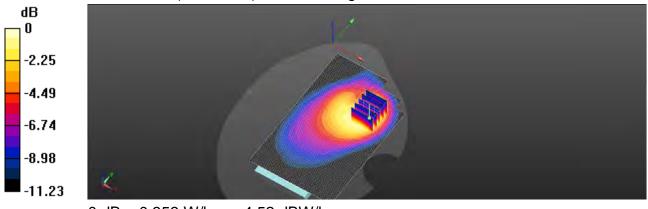

0 dB = 0.353 W/kg = -4.52 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

```
www.tw.sas.com
```



Report No. : E5/2019/C0017 Page: 201 of 261

Date: 2020/1/6

# LTE Band 7 (20MHz) Head Le Cheek CH 21350 QPSK 1-99

Communication System: LTE Band 7; Frequency: 2560 MHz; Duty Cycle: 1:1 Medium parameters used: f = 2560 MHz;  $\sigma$  = 1.854 S/m;  $\epsilon_r$  = 38.886;  $\rho$  = 1000 kg/m³ Phantom section: Left Section Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(7.7, 7.7, 7.7); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Area Scan (81x151x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.198 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 4.339 V/m; Power Drift = 0.03 dB Peak SAR (extrapolated) = 0.254 W/kg

SAR(1 g) = 0.146 W/kg; SAR(10 g) = 0.090 W/kg

Maximum value of SAR (measured) = 0.200 W/kg

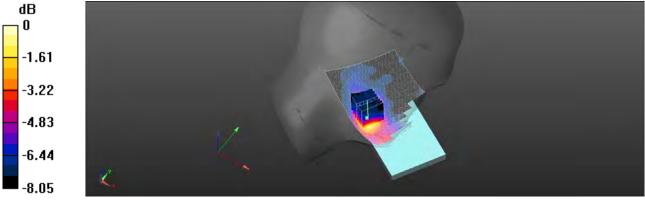

0 dB = 0.200 W/kg = -7.00 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

f (886-2) 2298-0488

www.tw.sas.com



Report No. : E5/2019/C0017 Page: 202 of 261

Date: 2020/1/7

#### LTE Band 7 (20MHz) Hotspot Bottom side CH 21100 QPSK 1-99 10mm

Communication System: LTE Band 7; Frequency: 2535 MHz; Duty Cycle: 1:1 Medium parameters used: f = 2535 MHz;  $\sigma$  = 1.837 S/m;  $\epsilon_r$  = 38.984;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.0°C; Liquid temperature: 21.8°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(7.7, 7.7, 7.7); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22 •
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Area Scan (51x101x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 1.32 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 24.91 V/m; Power Drift = -0.02 dB Peak SAR (extrapolated) = 1.79 W/kg

SAR(1 g) = 0.860 W/kg; SAR(10 g) = 0.404 W/kg

Maximum value of SAR (measured) = 1.31 W/kg

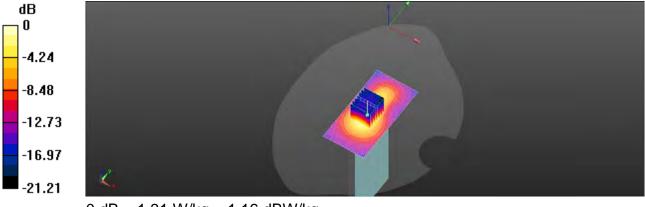

0 dB = 1.31 W/kg = 1.16 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司



Report No. : E5/2019/C0017 Page: 203 of 261

Date: 2020/1/8

## LTE Band 12 (10MHz) Head Re Cheek CH 23095 QPSK 1-49

Communication System: LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1 Medium parameters used: f = 707.5 MHz;  $\sigma$  = 0.832 S/m;  $\epsilon$ _r = 41.037;  $\rho$  = 1000 kg/m³ Phantom section: Right Section Ambient temperature: 22.3°C; Liquid temperature: 21.6°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(10.41, 10.41, 10.41); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22 •
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Area Scan (71x121x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.118 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 5.058 V/m; Power Drift = 0.03 dB Peak SAR (extrapolated) = 0.135 W/kg

SAR(1 g) = 0.100 W/kg; SAR(10 g) = 0.073 W/kg

Maximum value of SAR (measured) = 0.119 W/kg

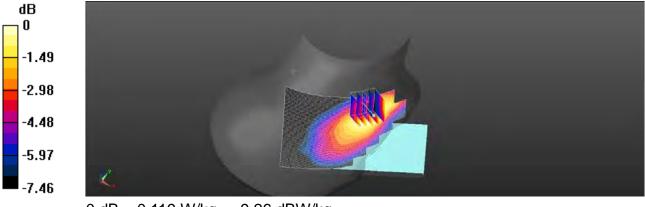

0 dB = 0.119 W/kg = -9.26 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

```
www.tw.sas.com
```



Report No. : E5/2019/C0017 Page: 204 of 261

Date: 2020/1/9

#### LTE Band 12 (10MHz)_Hotspot_Back side_CH 23095_QPSK_1-49_10mm

Communication System: LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1 Medium parameters used: f = 707.5 MHz;  $\sigma$  = 0.832 S/m;  $\epsilon_r$  = 41.037;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.1°C; Liquid temperature: 21.7°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(10.41, 10.41, 10.41); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (81x131x1): Interpolated grid: dx=15 mm, dy=15 mm


Maximum value of SAR (interpolated) = 0.414 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 10.39 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.506 W/kg

SAR(1 g) = 0.312 W/kg; SAR(10 g) = 0.196 W/kg

Maximum value of SAR (measured) = 0.414 W/kg

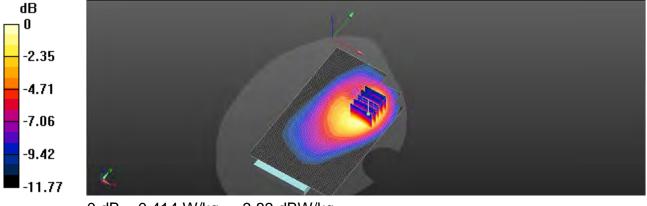

0 dB = 0.414 W/kg = -3.83 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司



Report No. : E5/2019/C0017 Page: 205 of 261

Date: 2020/1/8

## LTE Band 13 (10MHz) Head Re Cheek CH 23230 QPSK 1-25

Communication System: LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1 Medium parameters used: f = 782 MHz;  $\sigma$  = 0.898 S/m;  $\epsilon_r$  = 40.022;  $\rho$  = 1000 kg/m³ Phantom section: Right Section Ambient temperature: 22.3°C; Liquid temperature: 21.6°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(10.41, 10.41, 10.41); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22 •
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Area Scan (71x121x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.0464 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 4.605 V/m; Power Drift = -0.06 dB Peak SAR (extrapolated) = 0.0520 W/kg

SAR(1 g) = 0.043 W/kg; SAR(10 g) = 0.034 W/kg

Maximum value of SAR (measured) = 0.0471 W/kg

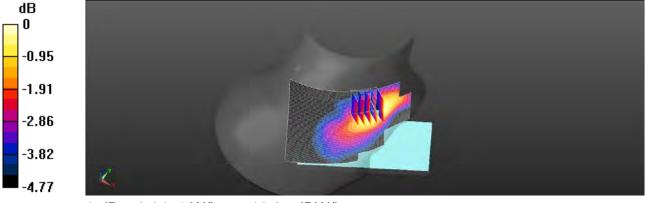

0 dB = 0.0471 W/kg = -13.27 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

www.tw.sas.com



Report No. : E5/2019/C0017 Page: 206 of 261

Date: 2020/1/9

#### LTE Band 13 (10MHz)_Hotspot_Back side_CH 23230_QPSK_1-25_10mm

Communication System: LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1 Medium parameters used: f = 782 MHz;  $\sigma$  = 0.898 S/m;  $\epsilon_r$  = 40.022;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.1°C; Liquid temperature: 21.7°C

**DASY5** Configuration:


- Probe: EX3DV4 SN7509; ConvF(10.41, 10.41, 10.41); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (81x131x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.133 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 6.644 V/m; Power Drift = -0.04 dB Peak SAR (extrapolated) = 0.160 W/kg

SAR(1 g) = 0.102 W/kg; SAR(10 g) = 0.067 W/kg Maximum value of SAR (measured) = 0.131 W/kg

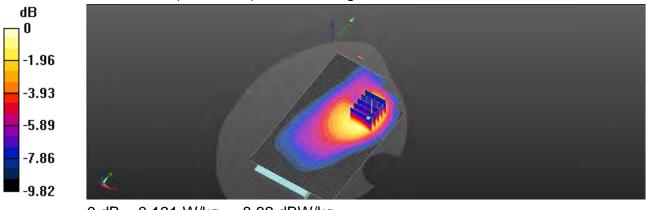

0 dB = 0.131 W/kg = -8.82 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

www.tw.sas.com



Report No. : E5/2019/C0017 Page: 207 of 261

Date: 2020/1/8

## LTE Band 17 (10MHz)_Head_Re Cheek_CH 23790_QPSK_1-49

Communication System: LTE Band 17; Frequency: 710 MHz; Duty Cycle: 1:1 Medium parameters used: f = 710 MHz;  $\sigma$  = 0.834 S/m;  $\epsilon_r$  = 41.005;  $\rho$  = 1000 kg/m³ Phantom section: Right Section Ambient temperature: 22.3°C; Liquid temperature: 21.6°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(10.41, 10.41, 10.41); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22 •
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Area Scan (71x121x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.117 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 5.520 V/m; Power Drift = -0.02 dB Peak SAR (extrapolated) = 0.138 W/kg

SAR(1 g) = 0.101 W/kg; SAR(10 g) = 0.073 W/kg

Maximum value of SAR (measured) = 0.119 W/kg

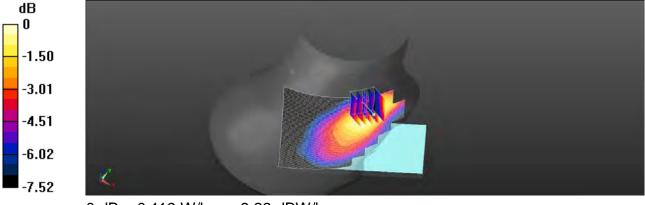

0 dB = 0.119 W/kg = -9.23 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No. : E5/2019/C0017 Page: 208 of 261

Date: 2020/1/9

#### LTE Band 17 (10MHz)_Hotspot_Back side_CH 23790_QPSK_1-49_10mm

Communication System: LTE Band 17; Frequency: 710 MHz; Duty Cycle: 1:1 Medium parameters used: f = 710 MHz;  $\sigma$  = 0.834 S/m;  $\epsilon_r$  = 41.005;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.1°C; Liquid temperature: 21.7°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(10.41, 10.41, 10.41); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Area Scan (81x131x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.405 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 10.62 V/m; Power Drift = -0.06 dB Peak SAR (extrapolated) = 0.501 W/kg

SAR(1 g) = 0.309 W/kg; SAR(10 g) = 0.193 W/kg

Maximum value of SAR (measured) = 0.413 W/kg

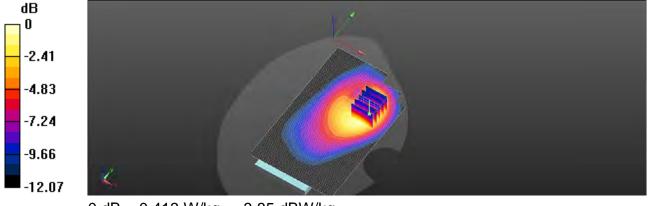

0 dB = 0.413 W/kg = -3.85 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No. : E5/2019/C0017 Page: 209 of 261

Date: 2020/1/6

# LTE Band 38 (20MHz)_Head_Le Cheek_CH 38000_QPSK_1-50

Communication System: LTE Band 38; Frequency: 2595 MHz; Duty Cycle: 1:1 Medium parameters used: f = 2595 MHz;  $\sigma$  = 1.94 S/m;  $\epsilon_r$  = 38.608;  $\rho$  = 1000 kg/m³ Phantom section: Left Section Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

**DASY5** Configuration:


- Probe: EX3DV4 SN7509; ConvF(7.7, 7.7, 7.7); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (81x151x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.0967 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 4.222 V/m; Power Drift = -0.01 dB Peak SAR (extrapolated) = 0.117 W/kg SAR(1 g) = 0.072 W/kg; SAR(10 g) = 0.050 W/kg

Maximum value of SAR (measured) = 0.0926 W/kg

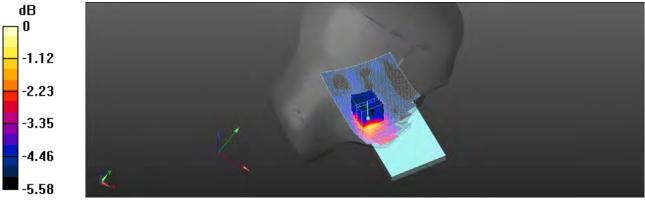

0 dB = 0.0926 W/kg = -10.33 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

www.tw.sas.com



Report No. : E5/2019/C0017 Page: 210 of 261

Date: 2020/1/7

#### LTE Band 38 (20MHz)_Hotspot_Bottom side_CH 38000_QPSK_1-50_10mm

Communication System: LTE Band 38; Frequency: 2595 MHz; Duty Cycle: 1:1 Medium parameters used: f = 2595 MHz;  $\sigma$  = 1.94 S/m;  $\epsilon$ r = 38.603;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.0°C; Liquid temperature: 21.8°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(7.7, 7.7, 7.7); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22 •
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Area Scan (51x101x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.555 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 1.925 V/m; Power Drift = 0.03 dB Peak SAR (extrapolated) = 0.746 W/kg

SAR(1 g) = 0.354 W/kg; SAR(10 g) = 0.164 W/kg

Maximum value of SAR (measured) = 0.544 W/kg

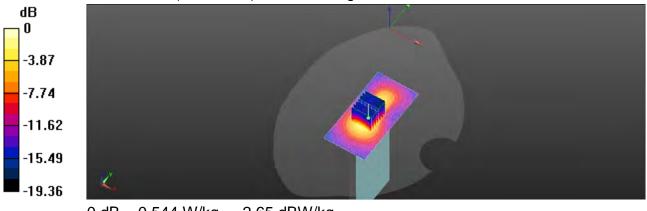

0 dB = 0.544 W/kg = -2.65 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

f (886-2) 2298-0488

www.tw.sas.com



Report No. : E5/2019/C0017 Page: 211 of 261

Date: 2020/1/6

# LTE Band 41 (20MHz)_Head_Le Cheek_CH 41490_QPSK_1-50

Communication System: LTE Band 41; Frequency: 2680 MHz; Duty Cycle: 1:1 Medium parameters used: f = 2680 MHz;  $\sigma$  = 2.031 S/m;  $\epsilon_r$  = 38.545;  $\rho$  = 1000 kg/m³ Phantom section: Left Section Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

**DASY5** Configuration:


- Probe: EX3DV4 SN7509; ConvF(7.7, 7.7, 7.7); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (81x151x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.0679 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 3.574 V/m; Power Drift = 0.06 dB Peak SAR (extrapolated) = 0.0860 W/kg

SAR(1 g) = 0.055 W/kg; SAR(10 g) = 0.043 W/kg Maximum value of SAR (measured) = 0.0675 W/kg

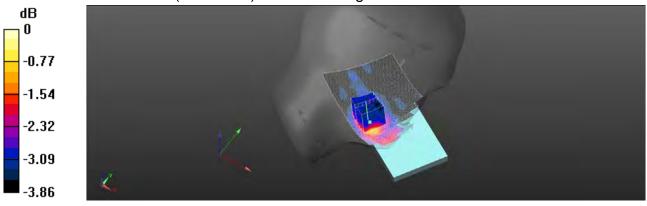

0 dB = 0.0675 W/kg = -11.70 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

```
www.tw.sas.com
```

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No. : E5/2019/C0017 Page: 212 of 261

Date: 2020/1/7

#### LTE Band 41 (20MHz)_Body_Bottom side_CH 41490_QPSK_1-50_10mm

Communication System: LTE Band 41; Frequency: 2680 MHz; Duty Cycle: 1:1 Medium parameters used: f = 2680 MHz;  $\sigma$  = 2.03 S/m;  $\epsilon_r$  = 38.511;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.0°C; Liquid temperature: 21.8°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(7.7, 7.7, 7.7); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22 •
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Area Scan (51x101x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.477 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 13.86 V/m; Power Drift = 0.05 dB Peak SAR (extrapolated) = 0.671 W/kg

SAR(1 g) = 0.306 W/kg; SAR(10 g) = 0.135 W/kg

Maximum value of SAR (measured) = 0.479 W/kg

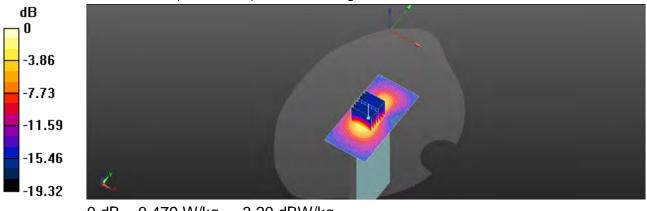

0 dB = 0.479 W/kg = -3.20 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

www.tw.sas.com



Report No. : E5/2019/C0017 Page: 213 of 261

Date: 2020/1/5

# WLAN 802.11b Head_Le Cheek_CH 10_ANT0

Communication System: WLAN 2.45G; Frequency: 2457 MHz; Duty Cycle: 1:1 Medium parameters used: f = 2457 MHz;  $\sigma$  = 1.792 S/m;  $\epsilon_r$  = 38.77;  $\rho$  = 1000 kg/m³ Phantom section: Left Section Ambient temperature: 22.2°C; Liquid temperature: 21.6°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(7.79, 7.79, 7.79); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Area Scan (91x161x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.305 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 7.777 V/m; Power Drift = 0.03 dB Peak SAR (extrapolated) = 0.256 W/kg

SAR(1 g) = 0.160 W/kg; SAR(10 g) = 0.094 W/kg

Maximum value of SAR (measured) = 0.203 W/kg

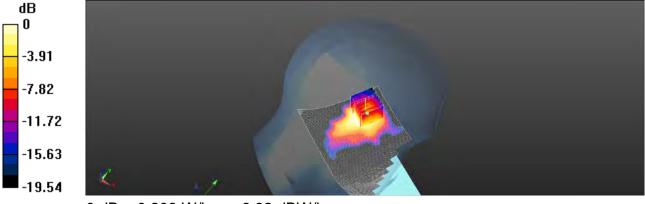

0 dB = 0.203 W/kg = -6.92 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No. : E5/2019/C0017 Page: 214 of 261

Date: 2020/1/5

#### WLAN 802.11b Hotspot Back side CH 10 10mm ANT0

Communication System: WLAN 2.45G; Frequency: 2457 MHz; Duty Cycle: 1:1 Medium parameters used: f = 2457 MHz;  $\sigma$  = 1.792 S/m;  $\epsilon_r$  = 38.77;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.2°C; Liquid temperature: 21.6°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(7.79, 7.79, 7.79); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Area Scan (91x161x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.0815 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 3.639 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 0.110 W/kg

SAR(1 g) = 0.060 W/kg; SAR(10 g) = 0.040 W/kg

Maximum value of SAR (measured) = 0.0842 W/kg

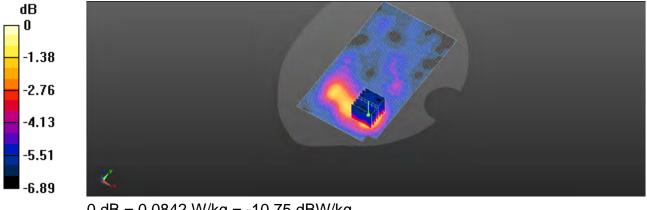

0 dB = 0.0842 W/kg = -10.75 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

f (886-2) 2298-0488

www.tw.sas.com



Report No. : E5/2019/C0017 Page: 215 of 261

Date: 2020/1/5

## Bluetooth(GFSK) Head Le Cheek CH 39 ANT0

Communication System: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1 Medium parameters used: f = 2441 MHz;  $\sigma$  = 1.775 S/m;  $\epsilon_r$  = 38.84;  $\rho$  = 1000 kg/m³ Phantom section: Left Section Ambient temperature: 22.2°C; Liquid temperature: 21.6°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(7.79, 7.79, 7.79); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Area Scan (91x161x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.110 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 4.671 V/m; Power Drift = 0.05 dB Peak SAR (extrapolated) = 0.158 W/kg

SAR(1 g) = 0.063 W/kg; SAR(10 g) = 0.030 W/kg

Maximum value of SAR (measured) = 0.103 W/kg

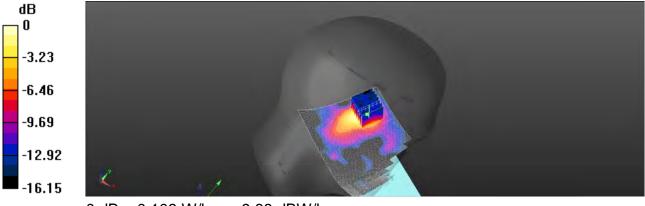

0 dB = 0.103 W/kg = -9.88 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司



Report No. : E5/2019/C0017 Page: 216 of 261

Date: 2020/1/5

## Bluetooth(GFSK)_Body-worn_Back side_CH 39_10mm_ANT0

Communication System: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1 Medium parameters used: f = 2441 MHz;  $\sigma$  = 1.775 S/m;  $\epsilon_r$  = 38.84;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.2°C; Liquid temperature: 21.6°C

**DASY5** Configuration:


- Probe: EX3DV4 SN7509; ConvF(7.79, 7.79, 7.79); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22 •
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (91x161x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.0443 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 3.456 V/m; Power Drift = -0.03 dB Peak SAR (extrapolated) = 0.0520 W/kg

SAR(1 g) = 0.034 W/kg; SAR(10 g) = 0.026 W/kg Maximum value of SAR (measured) = 0.0443 W/kg

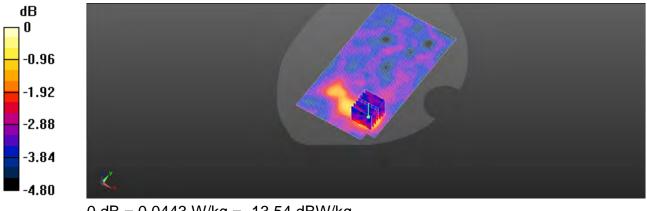

0 dB = 0.0443 W/kg = -13.54 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司



Report No. : E5/2019/C0017 Page: 217 of 261

Date: 2020/1/5

#### Bluetooth(GFSK)_product specific 10g-SAR_Front side_CH 39_0mm_ANT0

Communication System: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1 Medium parameters used: f = 2441 MHz;  $\sigma$  = 1.775 S/m;  $\epsilon_r$  = 38.84;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.2°C; Liquid temperature: 21.6°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(7.79, 7.79, 7.79); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22 •
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Area Scan (91x161x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.305 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 5.002 V/m; Power Drift = -0.02 dB Peak SAR (extrapolated) = 0.487 W/kg

SAR(1 g) = 0.183 W/kg; SAR(10 g) = 0.106 W/kg

Maximum value of SAR (measured) = 0.275 W/kg

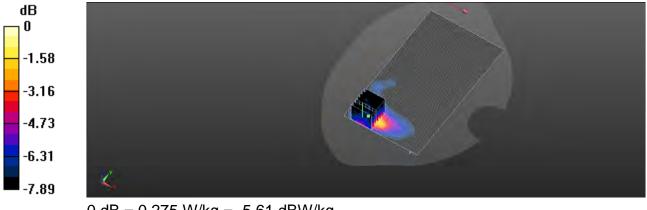

0 dB = 0.275 W/kg = -5.61 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

f (886-2) 2298-0488



Report No. : E5/2019/C0017 Page: 218 of 261

Date: 2020/1/13

### WLAN 802.11ac(80M) 5.2G_Head_Le Cheek_CH 42_ANT0

Communication System: WLAN 5G; Frequency: 5210 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5210 MHz;  $\sigma$  = 4.645 S/m;  $\epsilon_r$  = 35.613;  $\rho$  = 1000 kg/m³ Phantom section: Left Section Ambient temperature: 22.2°C; Liquid temperature: 21.7°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(5.46, 5.46, 5.46); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Area Scan (101x191x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.256 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 3.735 V/m; Power Drift = 0.04 dB Peak SAR (extrapolated) = 0.560 W/kg

SAR(1 g) = 0.177 W/kg; SAR(10 g) = 0.112 W/kg

Maximum value of SAR (measured) = 0.302 W/kg

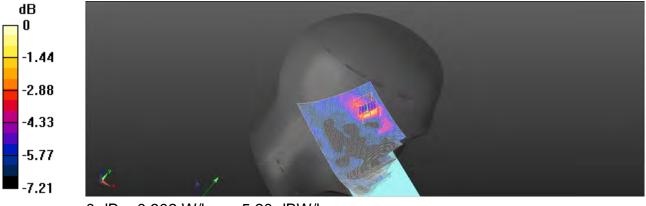

0 dB = 0.302 W/kg = -5.20 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.



Report No. : E5/2019/C0017 Page: 219 of 261

Date: 2020/1/14

### WLAN 802.11ac(80M) 5.2G_Body-worn_Back side_CH 42_10mm_ANT0

Communication System: WLAN 5G; Frequency: 5210 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5210 MHz;  $\sigma$  = 4.644 S/m;  $\epsilon_r$  = 35.611;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(5.46, 5.46, 5.46); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22 •
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Area Scan (111x191x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.120 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 3.791 V/m; Power Drift = 0.04 dB Peak SAR (extrapolated) = 0.245 W/kg

SAR(1 g) = 0.115 W/kg; SAR(10 g) = 0.095 W/kg

Maximum value of SAR (measured) = 0.169 W/kg

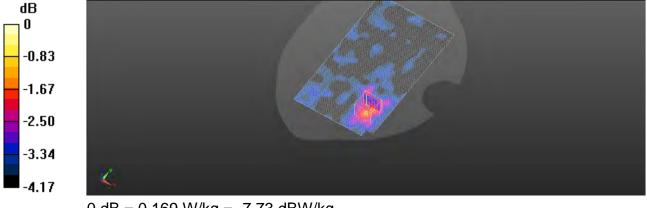

0 dB = 0.169 W/kg = -7.73 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

f (886-2) 2298-0488



Report No. : E5/2019/C0017 Page: 220 of 261

Date: 2020/1/14

### WLAN 802.11ac(80M) 5.2G product specific 10g-SAR Front side CH 42 0mm ANT0

Communication System: WLAN 5G; Frequency: 5210 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5210 MHz;  $\sigma$  = 4.644 S/m;  $\epsilon_r$  = 35.611;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(5.46, 5.46, 5.46); Calibrated: 2019/3/25; •
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (111x191x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.598 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 3.866 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.322 W/kg; SAR(10 g) = 0.218 W/kg


Maximum value of SAR (measured) = 0.662 W/kg

Zoom Scan (7x7x12)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 3.866 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.247 W/kg; SAR(10 g) = 0.182 W/kg

Maximum value of SAR (measured) = 0.418 W/kg

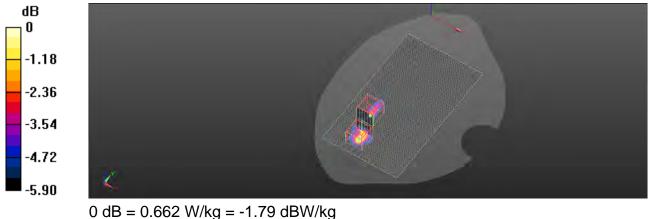

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No. : E5/2019/C0017 Page: 221 of 261

Date: 2020/1/13

### WLAN 802.11ac(80M) 5.3G_Head_Le Cheek_CH 58_ANT0

Communication System: WLAN 5G; Frequency: 5290 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5290 MHz;  $\sigma$  = 4.724 S/m;  $\epsilon_r$  = 35.523;  $\rho$  = 1000 kg/m³ Phantom section: Left Section Ambient temperature: 22.1°C; Liquid temperature: 21.7°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(5.2, 5.2, 5.2); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Area Scan (101x191x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.196 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 5.161 V/m; Power Drift = 0.01 dB Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.194 W/kg; SAR(10 g) = 0.154 W/kg

Maximum value of SAR (measured) = 0.350 W/kg

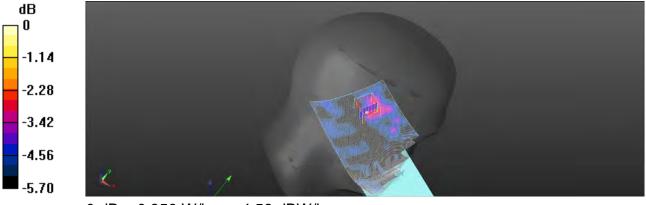

0 dB = 0.350 W/kg = -4.56 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

f (886-2) 2298-0488



Report No. : E5/2019/C0017 Page: 222 of 261

Date: 2020/1/14

#### WLAN 802.11ac(80M) 5.3G_Body-worn_Back side_CH 58_10mm_ANT0

Communication System: WLAN 5G; Frequency: 5290 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5290 MHz;  $\sigma$  = 4.727 S/m;  $\epsilon_r$  = 35.514;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

**DASY5** Configuration:


- Probe: EX3DV4 SN7509; ConvF(5.2, 5.2, 5.2); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22 •
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (111x191x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.091 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 3.545 V/m; Power Drift = 0.03 dB Peak SAR (extrapolated) = 0.203 W/kg

SAR(1 g) = 0.094 W/kg; SAR(10 g) = 0.084 W/kg Maximum value of SAR (measured) = 0.131 W/kg

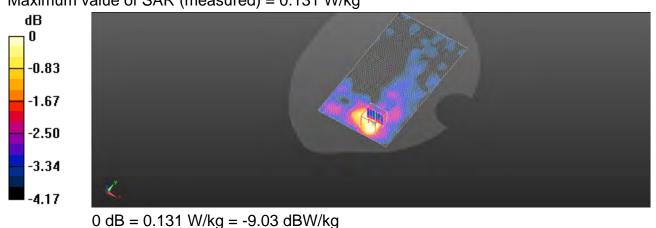

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

```
www.tw.sas.com
```



Report No. : E5/2019/C0017 Page: 223 of 261

Date: 2020/1/14

### WLAN 802.11ac(80M) 5.3G product specific 10g-SAR Front side CH 58_0mm_ANT0

Communication System: WLAN 5G; Frequency: 5290 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5290 MHz;  $\sigma$  = 4.727 S/m;  $\epsilon_r$  = 35.514;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.1°C; Liquid temperature: 21.8°C


**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(5.2, 5.2, 5.2); Calibrated: 2019/3/25; •
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (111x191x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.525 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 5.351 V/m; Power Drift = 0.06 dB Peak SAR (extrapolated) = 1.29 W/kg SAR(1 g) = 0.402 W/kg; SAR(10 g) = 0.244 W/kg Maximum value of SAR (measured) = 0.742 W/kg

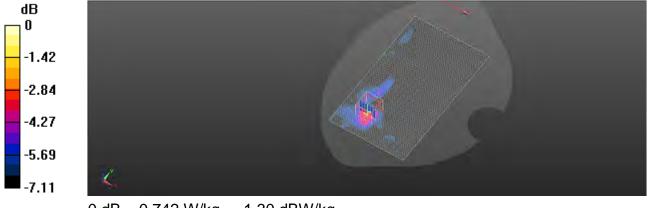

0 dB = 0.742 W/kg = -1.30 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



## WLAN 802.11ac(80M) 5.6G_Head_Le Cheek_CH 138_ANT0

Communication System: WLAN 5G; Frequency: 5690 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5690 MHz;  $\sigma$  = 5.13 S/m;  $\epsilon_r$  = 35.08;  $\rho$  = 1000 kg/m³ Phantom section: Left Section Ambient temperature: 22.3°C; Liquid temperature: 21.9°C


DASY5 Configuration:

- Probe: EX3DV4 SN7509; ConvF(4.77, 4.77, 4.77); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (101x191x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.812 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 6.620 V/m: Power Drift = 0.06 dB Peak SAR (extrapolated) = 2.46 W/kg SAR(1 g) = 0.520 W/kg; SAR(10 g) = 0.257 W/kgMaximum value of SAR (measured) = 1.04 W/kg

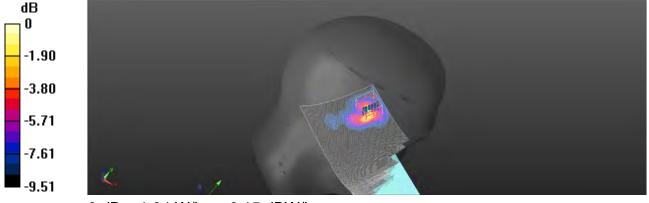

0 dB = 1.04 W/kg = 0.15 dBW/kg

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No. : E5/2019/C0017 Page: 225 of 261

Date: 2020/1/15

### WLAN 802.11ac(80M) 5.6G_Body-worn_Back side_CH 138_10mm_ANT0

Communication System: WLAN 5G; Frequency: 5690 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5690 MHz;  $\sigma$  = 5.132 S/m;  $\epsilon_r$  = 35.071;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.0°C; Liquid temperature: 21.7°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(4.77, 4.77, 4.77); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Area Scan (111x191x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.118 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 3.484 V/m; Power Drift = 0.03 dB Peak SAR (extrapolated) = 0.198 W/kg

SAR(1 g) = 0.097 W/kg; SAR(10 g) = 0.085 W/kg

Maximum value of SAR (measured) = 0.124 W/kg

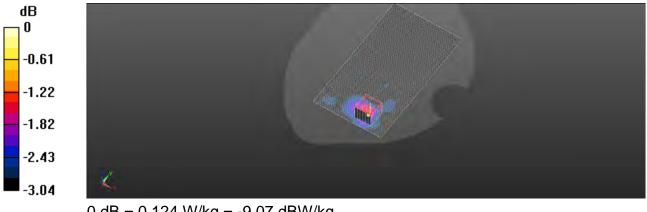

0 dB = 0.124 W/kg = -9.07 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司



Report No. : E5/2019/C0017 Page: 226 of 261

Date: 2020/1/15

### WLAN 802.11ac(80M) 5.6G product specific 10g-SAR Front side CH 138 0mm ANT0

Communication System: WLAN 5G; Frequency: 5210 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5690 MHz;  $\sigma$  = 5.132 S/m;  $\epsilon_r$  = 35.071;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.0°C; Liquid temperature: 21.7°C


**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(4.77, 4.77, 4.77); Calibrated: 2019/3/25; •
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (91x191x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.408 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 5.439 V/m; Power Drift = 0.05 dB Peak SAR (extrapolated) = 1.77 W/kg SAR(1 g) = 0.395 W/kg; SAR(10 g) = 0.127 W/kg Maximum value of SAR (measured) = 0.954 W/kg

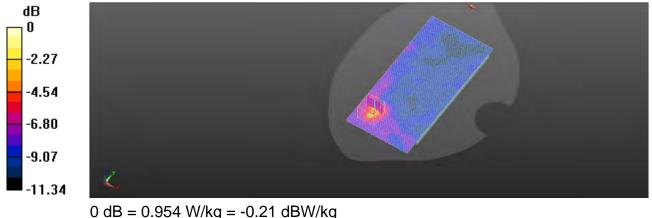

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司



Report No. : E5/2019/C0017 Page: 227 of 261

Date: 2020/1/13

### WLAN 802.11ac(80M) 5.8G_Head_Le Cheek_CH 155 ANT0

Communication System: WLAN 5G; Frequency: 5775 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5775 MHz;  $\sigma$  = 5.219 S/m;  $\epsilon_r$  = 34.979;  $\rho$  = 1000 kg/m³ Phantom section: Left Section Ambient temperature: 22.0°C; Liquid temperature: 21.8°C

**DASY5** Configuration:


- Probe: EX3DV4 SN7509; ConvF(4.94, 4.94, 4.94); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Area Scan (101x191x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.717 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 5.972 V/m; Power Drift = 0.03 dB Peak SAR (extrapolated) = 2.68 W/kg

SAR(1 g) = 0.491 W/kg; SAR(10 g) = 0.243 W/kg



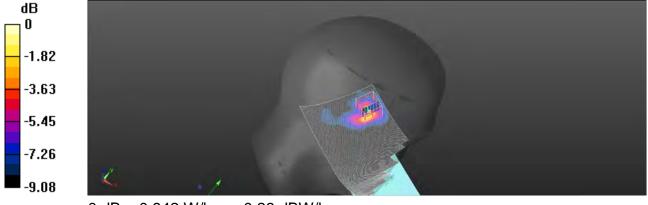

0 dB = 0.942 W/kg = -0.26 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司



Report No. : E5/2019/C0017 Page: 228 of 261

Date: 2020/1/15

### WLAN 802.11ac(80M) 5.8G_Hotspot_Back side_CH 155_10mm_ANT0

Communication System: WLAN 5G; Frequency: 5775 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5775 MHz;  $\sigma$  = 5.224 S/m;  $\epsilon_r$  = 34.969;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(4.94, 4.94, 4.94); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22 •
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Area Scan (101x181x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.105 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 3.626 V/m; Power Drift = 0.04 dB Peak SAR (extrapolated) = 0.143 W/kg

SAR(1 g) = 0.107 W/kg; SAR(10 g) = 0.101 W/kg

Maximum value of SAR (measured) = 0.130 W/kg

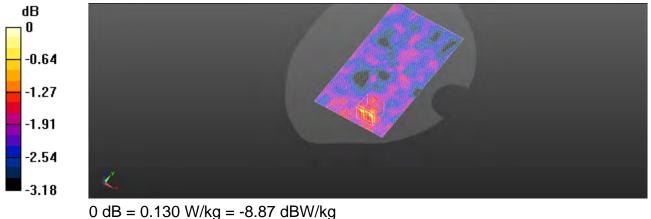

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

f (886-2) 2298-0488



Report No. : E5/2019/C0017 Page: 229 of 261

Date: 2020/1/5

## WLAN 802.11b Head_Re Cheek_CH 11_ANT1

Communication System: WLAN 2.45G; Frequency: 2462 MHz; Duty Cycle: 1:1 Medium parameters used: f = 2462 MHz;  $\sigma$  = 1.795 S/m;  $\epsilon_r$  = 38.767;  $\rho$  = 1000 kg/m³ Phantom section: Right Section Ambient temperature: 22.2°C; Liquid temperature: 21.6°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(7.79, 7.79, 7.79); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22 •
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Area Scan (91x161x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.100 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 2.733 V/m; Power Drift = 0.01 dB Peak SAR (extrapolated) = 0.100 W/kg

SAR(1 g) = 0.066 W/kg; SAR(10 g) = 0.040 W/kg

Maximum value of SAR (measured) = 0.0890 W/kg

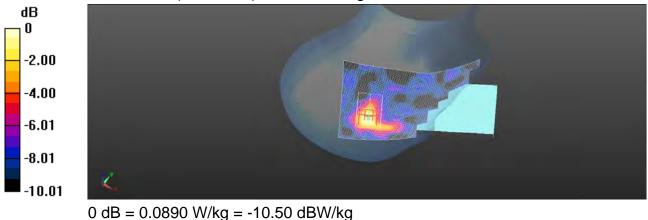

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

www.tw.sas.com



Report No. : E5/2019/C0017 Page: 230 of 261

Date: 2020/1/5

### WLAN 802.11b Hotspot Back side CH 11 10mm ANT1

Communication System: WLAN 2.45G; Frequency: 2462 MHz; Duty Cycle: 1:1 Medium parameters used: f = 2462 MHz;  $\sigma$  = 1.795 S/m;  $\epsilon_r$  = 38.767;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.2°C; Liquid temperature: 21.6°C

**DASY5** Configuration:


- Probe: EX3DV4 SN7509; ConvF(7.79, 7.79, 7.79); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22 •
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Area Scan (91x161x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.277 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 0.7460 V/m; Power Drift = 0.01 dB Peak SAR (extrapolated) = 0.207 W/kg

SAR(1 g) = 0.123 W/kg; SAR(10 g) = 0.058 W/kg



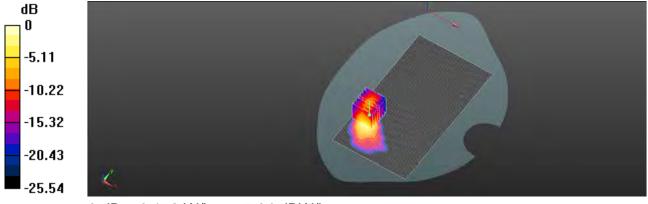

0 dB = 0.172 W/kg = -7.64 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.



Report No. : E5/2019/C0017 Page: 231 of 261

Date: 2020/1/13

### WLAN 802.11ac(80M) 5.2G_Head_Re Cheek_CH 42_ANT1

Communication System: WLAN 5G; Frequency: 5210 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5210 MHz;  $\sigma$  = 4.645 S/m;  $\epsilon_r$  = 35.613;  $\rho$  = 1000 kg/m³ Phantom section: Right Section Ambient temperature: 22.2°C; Liquid temperature: 21.7°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(5.46, 5.46, 5.46); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22 •
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Area Scan (101x201x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.159 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 5.109 V/m; Power Drift = 0.05 dB Peak SAR (extrapolated) = 0.547 W/kg

SAR(1 g) = 0.155 W/kg; SAR(10 g) = 0.145 W/kg

Maximum value of SAR (measured) = 0.547 W/kg

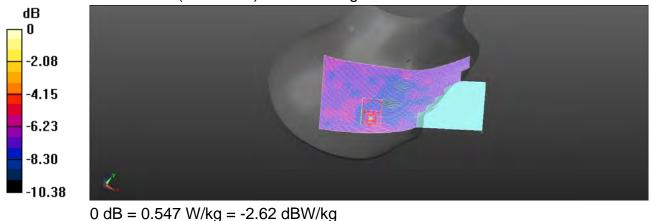

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

f (886-2) 2298-0488



Report No. : E5/2019/C0017 Page: 232 of 261

Date: 2020/1/14

### WLAN 802.11ac(80M) 5.2G_Body-worn_Back side_CH 42_10mm_ANT1

Communication System: WLAN 5G; Frequency: 5210 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5210 MHz;  $\sigma$  = 4.644 S/m;  $\epsilon_r$  = 35.611;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(5.46, 5.46, 5.46); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Area Scan (111x191x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.148 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 3.770 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 0.244 W/kg

SAR(1 g) = 0.120 W/kg; SAR(10 g) = 0.092 W/kg

Maximum value of SAR (measured) = 0.190 W/kg

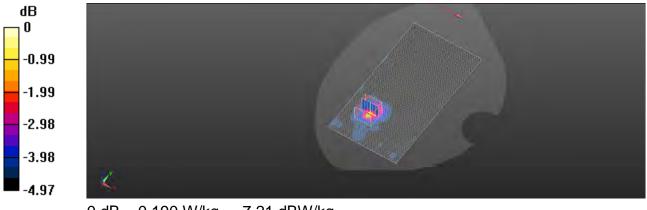

0 dB = 0.190 W/kg = -7.21 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.



Report No. : E5/2019/C0017 Page: 233 of 261

Date: 2020/1/14

### WLAN 802.11ac(80M) 5.2G product specific 10g-SAR Back side CH 42_0mm_ANT1

Communication System: WLAN 5G; Frequency: 5210 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5210 MHz;  $\sigma$  = 4.644 S/m;  $\epsilon_r$  = 35.611;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.1°C; Liquid temperature: 21.8°C


**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(5.46, 5.46, 5.46); Calibrated: 2019/3/25; •
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (111x191x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.942 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 4.921 V/m; Power Drift = 0.06 dB Peak SAR (extrapolated) = 3.62 W/kg SAR(1 g) = 0.699 W/kg; SAR(10 g) = 0.252 W/kg Maximum value of SAR (measured) = 1.92 W/kg

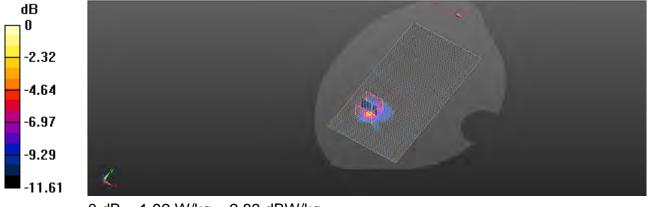

0 dB = 1.92 W/kg = 2.83 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

```
www.tw.sas.com
```



Report No. : E5/2019/C0017 Page: 234 of 261

Date: 2020/1/13

### WLAN 802.11ac(80M) 5.3G_Head_Re Cheek_CH 58_ANT1

Communication System: WLAN 5G; Frequency: 5290 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5290 MHz;  $\sigma$  = 4.724 S/m;  $\epsilon_r$  = 35.523;  $\rho$  = 1000 kg/m³ Phantom section: Right Section Ambient temperature: 22.1°C; Liquid temperature: 21.7°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(5.2, 5.2, 5.2); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22 •
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Area Scan (101x201x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.199 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 4.893 V/m; Power Drift = 0.01 dB Peak SAR (extrapolated) = 0.414 W/kg

SAR(1 g) = 0.182 W/kg; SAR(10 g) = 0.154 W/kg

Maximum value of SAR (measured) = 0.215 W/kg

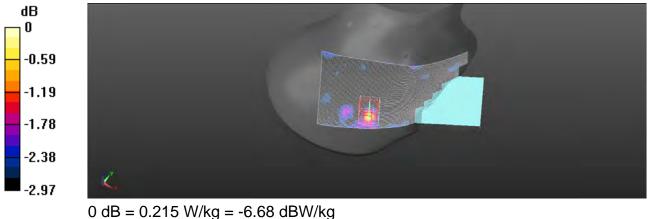

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

Member of SGS Group

f (886-2) 2298-0488



Report No. : E5/2019/C0017 Page: 235 of 261

Date: 2020/1/14

### WLAN 802.11ac(80M) 5.3G_Body-worn_Back side_CH 58_10mm_ANT1

Communication System: WLAN 5G; Frequency: 5290 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5290 MHz;  $\sigma$  = 4.727 S/m;  $\epsilon_r$  = 35.514;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(5.2, 5.2, 5.2); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22 •
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Area Scan (111x191x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.188 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 3.637 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 0.558 W/kg

SAR(1 g) = 0.132 W/kg; SAR(10 g) = 0.093 W/kg

Maximum value of SAR (measured) = 0.221 W/kg

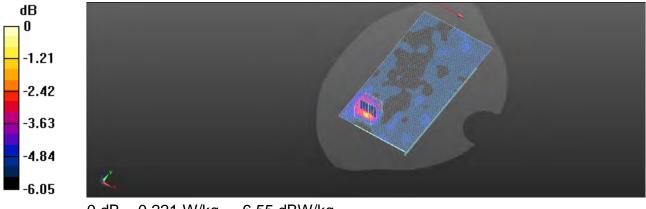

0 dB = 0.221 W/kg = -6.55 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

```
Member of SGS Group
```



Report No. : E5/2019/C0017 Page: 236 of 261

Date: 2020/1/14

### WLAN 802.11ac(80M) 5.3G product specific 10g-SAR Back side CH 58_0mm_ANT1

Communication System: WLAN 5G; Frequency: 5290 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5290 MHz;  $\sigma$  = 4.727 S/m;  $\epsilon_r$  = 35.514;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.1°C; Liquid temperature: 21.8°C


**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(5.2, 5.2, 5.2); Calibrated: 2019/3/25; •
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (111x191x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.581 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 4.840 V/m; Power Drift = 0.05 dB Peak SAR (extrapolated) = 3.42 W/kg SAR(1 g) = 0.490 W/kg; SAR(10 g) = 0.219 W/kg Maximum value of SAR (measured) = 1.01 W/kg

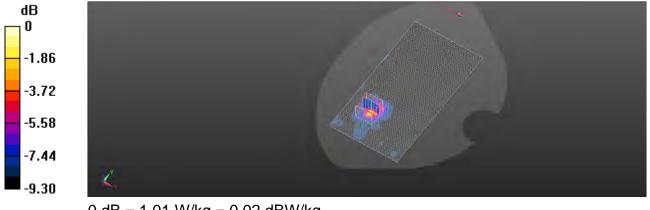

0 dB = 1.01 W/kg = 0.02 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No. : E5/2019/C0017 Page: 237 of 261

Date: 2020/1/13

### WLAN 802.11ac(80M) 5.6G_Head_Re Cheek_CH 138_ANT1

Communication System: WLAN 5G; Frequency: 5690 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5690 MHz;  $\sigma$  = 5.132 S/m;  $\epsilon_r$  = 35.071;  $\rho$  = 1000 kg/m³ Phantom section: Right Section Ambient temperature: 22.3°C; Liquid temperature: 21.9°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(4.77, 4.77, 4.77); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22 •
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Area Scan (101x191x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.415 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 5.167 V/m; Power Drift = 0.05 dB Peak SAR (extrapolated) = 0.184 W/kg

SAR(1 g) = 0.162 W/kg; SAR(10 g) = 0.153 W/kg

Maximum value of SAR (measured) = 0.184 W/kg

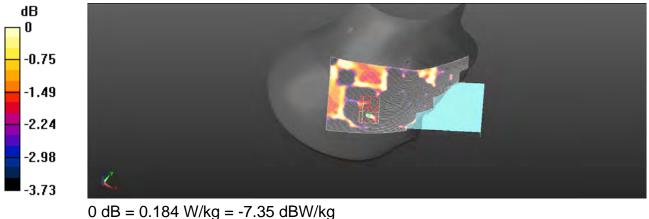

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司



Report No. : E5/2019/C0017 Page: 238 of 261

Date: 2020/1/15

### WLAN 802.11ac(80M) 5.6G_Body-worn_Back side_CH 138_10mm_ANT1

Communication System: WLAN 5G; Frequency: 5690 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5690 MHz;  $\sigma$  = 5.132 S/m;  $\epsilon_r$  = 35.071;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.0°C; Liquid temperature: 21.7°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(4.77, 4.77, 4.77); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22 •
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Area Scan (111x191x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.0985 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 3.431 V/m; Power Drift = 0.05 dB Peak SAR (extrapolated) = 0.127 W/kg

SAR(1 g) = 0.084 W/kg; SAR(10 g) = 0.079 W/kg

Maximum value of SAR (measured) = 0.102 W/kg

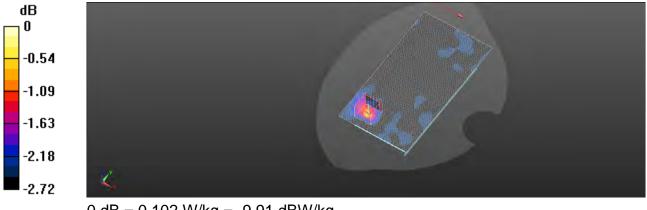

0 dB = 0.102 W/kg = -9.91 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司



Report No. : E5/2019/C0017 Page: 239 of 261

Date: 2020/1/15

### WLAN 802.11ac(80M) 5.6G product specific 10g-SAR Back side CH 138 0mm ANT1

Communication System: WLAN 5G; Frequency: 5690 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5690 MHz;  $\sigma$  = 5.132 S/m;  $\epsilon_r$  = 35.071;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.0°C; Liquid temperature: 21.7°C


**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(4.77, 4.77, 4.77); Calibrated: 2019/3/25; •
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (111x191x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.12 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 5.130 V/m; Power Drift = 0.01 dB Peak SAR (extrapolated) = 3.17 W/kg SAR(1 g) = 0.228 W/kg; SAR(10 g) = 0.143 W/kg Maximum value of SAR (measured) = 0.485 W/kg

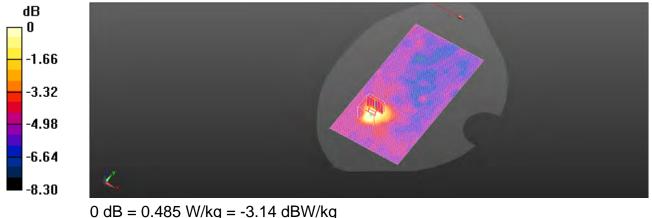

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

```
www.tw.sas.com
```

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No. : E5/2019/C0017 Page: 240 of 261

Date: 2020/1/13

### WLAN 802.11ac(80M) 5.8G_Head_Re Cheek_CH 155_ANT1

Communication System: WLAN 5G; Frequency: 5775 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5775 MHz;  $\sigma$  = 5.219 S/m;  $\epsilon_r$  = 34.979;  $\rho$  = 1000 kg/m³ Phantom section: Right Section Ambient temperature: 22.0°C; Liquid temperature: 21.8°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(4.94, 4.94, 4.94); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22 •
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Area Scan (101x201x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.163 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 4.842 V/m; Power Drift = -0.03 dB Peak SAR (extrapolated) = 0.197 W/kg

SAR(1 g) = 0.176 W/kg; SAR(10 g) = 0.164 W/kg

Maximum value of SAR (measured) = 0.197 W/kg

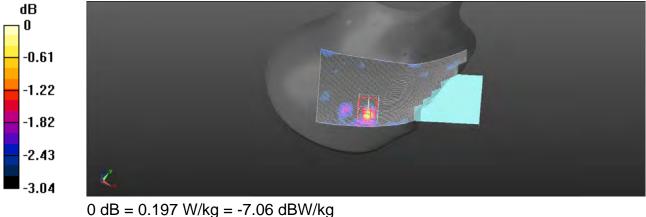

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

```
www.tw.sas.com
```



Report No. : E5/2019/C0017 Page: 241 of 261

Date: 2020/1/15

### WLAN 802.11ac(80M) 5.8G_Hotspot_Back side_CH 155_10mm_ANT1

Communication System: WLAN 5G; Frequency: 5775 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5775 MHz;  $\sigma$  = 5.224 S/m;  $\epsilon_r$  = 34.969;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(4.94, 4.94, 4.94); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22 •
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Area Scan (101x191x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.0787 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 3.235 V/m; Power Drift = 0.04 dB Peak SAR (extrapolated) = 0.128 W/kg

SAR(1 g) = 0.103 W/kg; SAR(10 g) = 0.098 W/kg

Maximum value of SAR (measured) = 0.128 W/kg

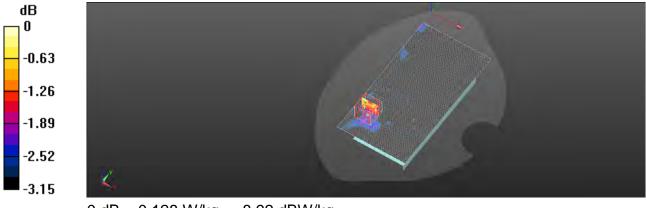


0 dB = 0.128 W/kg = -8.92 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司



## 6. SAR System Performance Verification

## Dipole 750 MHz SN:1015

Date: 2020/1/8

Communication System: CW; Frequency: 750 MHz; Duty Cycle: 1:1 Medium parameters used: f = 750 MHz;  $\sigma$  = 0.889 S/m;  $\epsilon_r$  = 41.592;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.3°C; Liquid temperature: 21.6°C

#### DASY5 Configuration:


SG:

- Probe: EX3DV4 SN7509; ConvF(10.41, 10.41, 10.41); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (51x121x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 2.78 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 61.70 V/m; Power Drift = -0.03 dB Peak SAR (extrapolated) = 3.23 W/kg SAR(1 g) = 2.17 W/kg; SAR(10 g) = 1.43 W/kg Maximum value of SAR (measured) = 2.76 W/kg

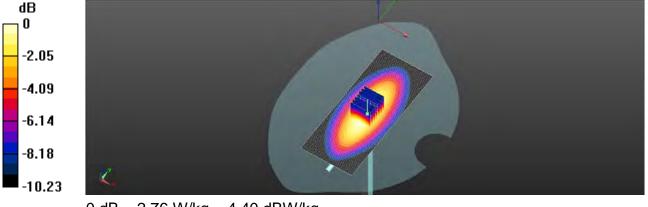

0 dB = 2.76 W/kg = 4.40 dBW/kg

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

```
www.tw.sas.com
```

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



## Dipole 750 MHz SN:1015

Communication System: CW; Frequency: 750 MHz; Duty Cycle: 1:1 Medium parameters used: f = 750 MHz;  $\sigma$  = 0.892 S/m;  $\epsilon_r$  = 41.597;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.1°C; Liquid temperature: 21.7°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(10.41, 10.41, 10.41); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22 •
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Area Scan (51x121x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 2.73 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 58.99 V/m; Power Drift = -0.01 dB Peak SAR (extrapolated) = 3.19 W/kg

SAR(1 g) = 2.18 W/kg; SAR(10 g) = 1.44 W/kg

Maximum value of SAR (measured) = 2.71 W/kg

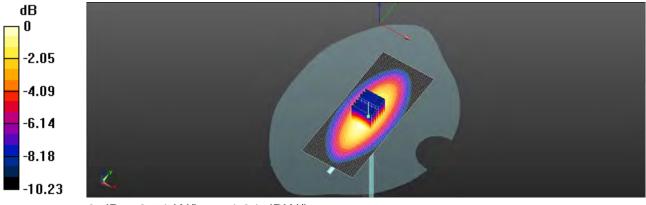

0 dB = 2.71 W/kg = 4.64 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司



## Dipole 835 MHz SN:4d063

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1 Medium parameters used: f = 835 MHz;  $\sigma$  = 0.895 S/m;  $\epsilon_r$  = 41.319;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(10.13, 10.13, 10.13); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22 •
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Area Scan (41x121x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 3.41 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 61.10 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 4.04 W/kg

SAR(1 g) = 2.42 W/kg; SAR(10 g) = 1.56 W/kg

Maximum value of SAR (measured) = 3.43 W/kg

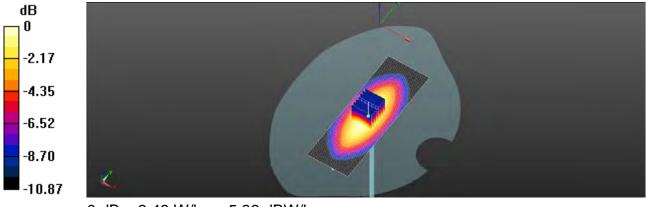

0 dB = 3.43 W/kg = 5.36 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

www.tw.sas.com



## Dipole 835 MHz SN:4d063

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1 Medium parameters used: f = 835 MHz;  $\sigma$  = 0.9 S/m;  $\epsilon_r$  = 41.319;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.2°C; Liquid temperature: 21.9°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(10.13, 10.13, 10.13); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22 •
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Area Scan (41x121x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 3.28 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 63.13 V/m; Power Drift = 0.04 dB Peak SAR (extrapolated) = 4.07 W/kg

SAR(1 g) = 2.40 W/kg; SAR(10 g) = 1.56 W/kg

Maximum value of SAR (measured) = 3.33 W/kg

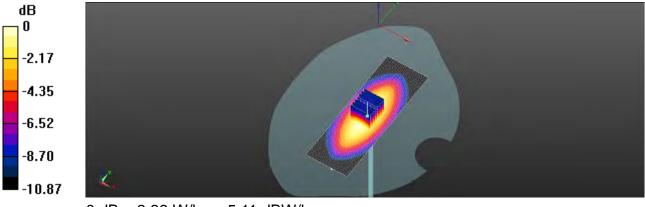

0 dB = 3.33 W/kg = 5.11 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司



## Dipole 1750 MHz SN:1008

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1 Medium parameters used: f = 1750 MHz;  $\sigma$  = 1.384 S/m;  $\epsilon_r$  = 40.267;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.2°C; Liquid temperature: 21.8°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(8.84, 8.84, 8.84); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22 •
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Area Scan (51x101x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 11.7 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 96.67 V/m; Power Drift = 0.06 dB Peak SAR (extrapolated) = 14.7 W/kg

SAR(1 g) = 9.12 W/kg; SAR(10 g) = 4.85 W/kg

Maximum value of SAR (measured) = 11.5 W/kg

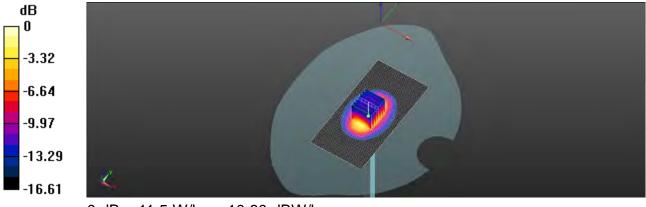

0 dB = 11.5 W/kg = 10.60 dBW/kg

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



### Dipole 1900 MHz SN:5d173

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1 Medium parameters used: f = 1900 MHz;  $\sigma$  = 1.408 S/m;  $\epsilon_r$  = 40.183;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.4°C; Liquid temperature: 21.9°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(8.5, 8.5, 8.5); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22 •
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Area Scan (51x61x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 14.2 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 100.4 V/m; Power Drift = 0.03 dB Peak SAR (extrapolated) = 17.7 W/kg

SAR(1 g) = 9.95 W/kg; SAR(10 g) = 5.24 W/kg

Maximum value of SAR (measured) = 13.9 W/kg

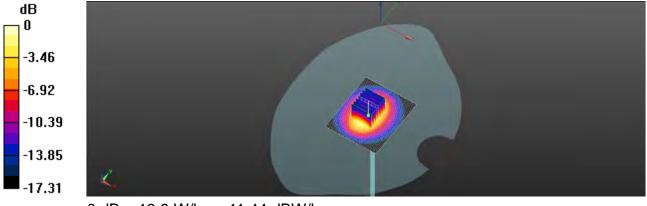

0 dB = 13.9 W/kg = 11.44 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司



## Dipole 2450 MHz SN:727

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1 Medium parameters used: f = 2450 MHz;  $\sigma$  = 1.783 S/m;  $\epsilon_r$  = 38.786;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.2°C; Liquid temperature: 21.6°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(7.79, 7.79, 7.79); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22 •
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Area Scan (71x111x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 20.0 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 104.1 V/m; Power Drift = 0.03 dB Peak SAR (extrapolated) = 25.7 W/kg

SAR(1 g) = 13.5 W/kg; SAR(10 g) = 6.25 W/kg

Maximum value of SAR (measured) = 19.2 W/kg

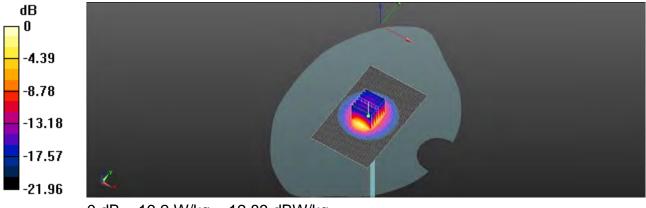

0 dB = 19.2 W/kg = 12.83 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



## Dipole 2600 MHz SN:1005

Communication System: CW; Frequency: 2600 MHz; Duty Cycle: 1:1 Medium parameters used: f = 2600 MHz;  $\sigma$  = 1.945 S/m;  $\epsilon$ r = 38.603;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(7.7, 7.7, 7.7); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22 •
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Area Scan (51x101x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 23.1 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 100.5 V/m; Power Drift = -0.06 dB Peak SAR (extrapolated) = 32.0 W/kg

SAR(1 g) = 14.2 W/kg; SAR(10 g) = 6.26 W/kg

Maximum value of SAR (measured) = 22.5 W/kg

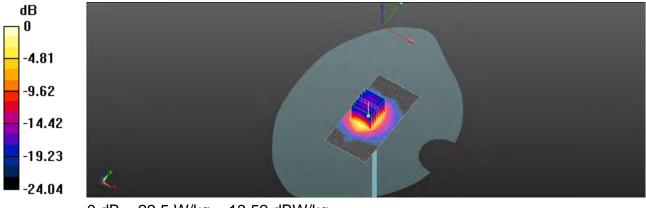

0 dB = 22.5 W/kg = 13.52 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



## Dipole 2600 MHz SN:1005

Communication System: CW; Frequency: 2600 MHz; Duty Cycle: 1:1 Medium parameters used: f = 2600 MHz;  $\sigma$  = 1.942 S/m;  $\epsilon_r$  = 38.601;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.0°C; Liquid temperature: 21.8°C

**DASY5** Configuration:

- Probe: EX3DV4 SN7509; ConvF(7.7, 7.7, 7.7); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22 •
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Area Scan (51x101x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 22.9 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 111.3 V/m; Power Drift = -0.02 dB Peak SAR (extrapolated) = 30.1 W/kg

SAR(1 g) = 14.1 W/kg; SAR(10 g) = 6.25 W/kg

Maximum value of SAR (measured) = 22.3 W/kg

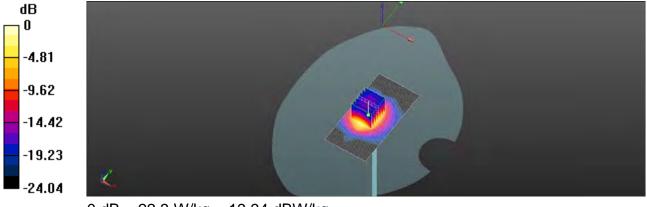

0 dB = 22.3 W/kg = 13.34 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



## Dipole 5200 MHz SN:1023

Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5200 MHz;  $\sigma$  = 4.633 S/m;  $\epsilon_r$  = 35.617;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.2°C; Liquid temperature: 21.7°C

**DASY5** Configuration:


- Probe: EX3DV4 SN7509; ConvF(5.46, 5.46, 5.46); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22 •
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)
- Area Scan (61x91x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 15.6 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 60.53 V/m; Power Drift = -0.03 dB Peak SAR (extrapolated) = 29.6 W/kg

SAR(1 g) = 7.92 W/kg; SAR(10 g) = 2.23 W/kg

Maximum value of SAR (measured) = 15.5 W/kg

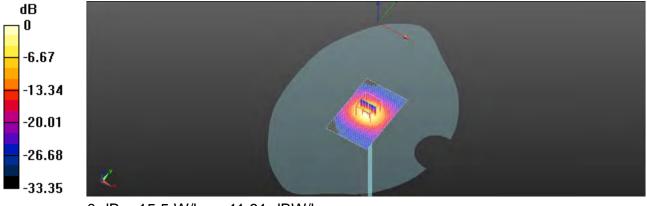

0 dB = 15.5 W/kg = 11.91 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



## Dipole 5200 MHz SN:1023

Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5200 MHz;  $\sigma$  = 4.634 S/m;  $\epsilon_r$  = 35.618;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

**DASY5** Configuration:


- Probe: EX3DV4 SN7509; ConvF(5.46, 5.46, 5.46); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22 •
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)
- Area Scan (61x91x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 15.9 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 61.39 V/m; Power Drift = -0.05 dB Peak SAR (extrapolated) = 29.9 W/kg

SAR(1 g) = 7.93 W/kg; SAR(10 g) = 2.25 W/kg

Maximum value of SAR (measured) = 15.9 W/kg

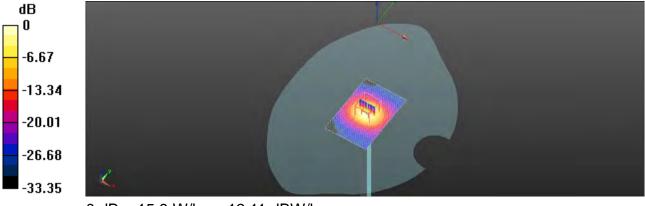

0 dB = 15.9 W/kg = 12.11 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

f (886-2) 2298-0488



## Dipole 5300 MHz SN:1023

Communication System: CW; Frequency: 5300 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5300 MHz;  $\sigma$  = 4.736 S/m;  $\epsilon_r$  = 35.497;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.1°C; Liquid temperature: 21.7°C

**DASY5** Configuration:


- Probe: EX3DV4 SN7509; ConvF(5.2, 5.2, 5.2); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22 •
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)
- Area Scan (71x91x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 17.2 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 60.68 V/m; Power Drift = 0.04 dB Peak SAR (extrapolated) = 35.9 W/kg

SAR(1 g) = 8.27 W/kg; SAR(10 g) = 2.35 W/kg

Maximum value of SAR (measured) = 16.5 W/kg

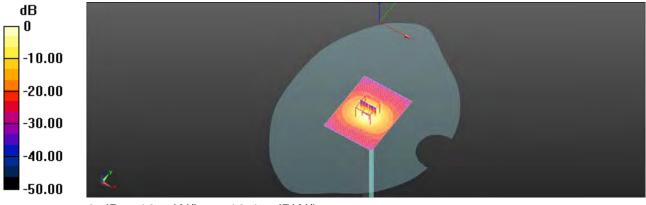

0 dB = 16.5 W/kg = 12.17 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司



## Dipole 5300 MHz SN:1023

Communication System: CW; Frequency: 5300 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5300 MHz;  $\sigma$  = 4.734 S/m;  $\epsilon_r$  = 35.498;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

**DASY5** Configuration:


- Probe: EX3DV4 SN7509; ConvF(5.2, 5.2, 5.2); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22 •
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)
- Area Scan (71x91x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 17.4 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 61.48 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 36.3 W/kg

SAR(1 g) = 8.27 W/kg; SAR(10 g) = 2.36 W/kg

Maximum value of SAR (measured) = 16.9 W/kg

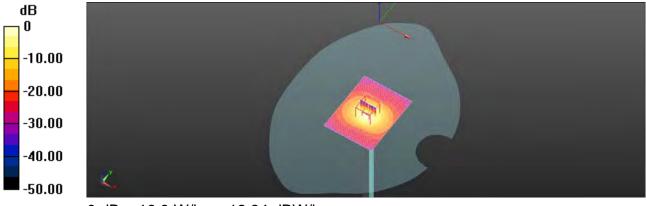

0 dB = 16.9 W/kg = 12.34 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.



## Dipole 5600 MHz SN:1023

Communication System: CW; Frequency: 5600 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5600 MHz;  $\sigma$  = 5.041 S/m;  $\epsilon_r$  = 35.177;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.3°C; Liquid temperature: 21.9°C

**DASY5** Configuration:


- Probe: EX3DV4 SN7509; ConvF(4.77, 4.77, 4.77); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22 •
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)
- Area Scan (61x81x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 18.2 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 63.32 V/m; Power Drift = -0.01 dB Peak SAR (extrapolated) = 38.5 W/kg

SAR(1 g) = 8.60 W/kg; SAR(10 g) = 2.45 W/kg

Maximum value of SAR (measured) = 18.3 W/kg

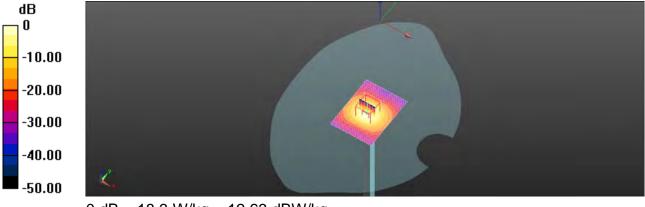

0 dB = 18.3 W/kg = 12.63 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.



## Dipole 5600 MHz SN:1023

Communication System: CW; Frequency: 5600 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5600 MHz;  $\sigma$  = 5.046 S/m;  $\epsilon_r$  = 35.175;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.0°C; Liquid temperature: 21.7°C

**DASY5** Configuration:


- Probe: EX3DV4 SN7509; ConvF(4.77, 4.77, 4.77); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22 •
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)
- Area Scan (61x81x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 17.8 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 58.95 V/m; Power Drift = -0.03 dB Peak SAR (extrapolated) = 38.1 W/kg

SAR(1 g) = 8.58 W/kg; SAR(10 g) = 2.43 W/kg

Maximum value of SAR (measured) = 17.7 W/kg

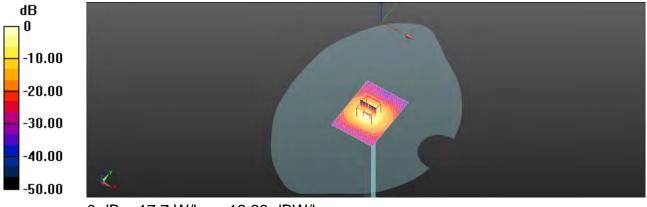

0 dB = 17.7 W/kg = 12.28 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司



## Dipole 5800 MHz SN:1023

Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5800 MHz;  $\sigma$  = 5.244 S/m;  $\epsilon_r$  = 34.928;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.0°C; Liquid temperature: 21.8°C

**DASY5** Configuration:


- Probe: EX3DV4 SN7509; ConvF(4.94, 4.94, 4.94); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22 •
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)


Area Scan (61x81x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 16.7 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 61.47 V/m; Power Drift = -0.06 dB Peak SAR (extrapolated) = 36.2 W/kg

SAR(1 g) = 7.95 W/kg; SAR(10 g) = 2.23 W/kg



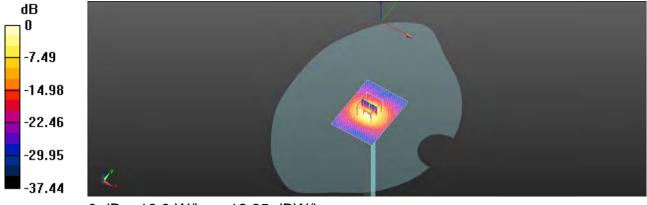

0 dB = 16.8 W/kg = 12.25 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

www.tw.sas.com



## Dipole 5800 MHz SN:1023

Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5800 MHz;  $\sigma$  = 5.245 S/m;  $\epsilon_r$  = 34.916;  $\rho$  = 1000 kg/m³ Phantom section: Flat Section Ambient temperature: 22.1°C; Liquid temperature: 21.8°C

**DASY5** Configuration:


- Probe: EX3DV4 SN7509; ConvF(4.94, 4.94, 4.94); Calibrated: 2019/3/25;
- Sensor-Surface: 2mm (Mechanical Surface Detection) •
- Electronics: DAE4 Sn877; Calibrated: 2019/3/22 •
- Phantom: SAM
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)
- Area Scan (61x81x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 16.4 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 61.05 V/m; Power Drift = -0.01 dB Peak SAR (extrapolated) = 35.8 W/kg

SAR(1 g) = 7.93 W/kg; SAR(10 g) = 2.22 W/kg

Maximum value of SAR (measured) = 16.5 W/kg

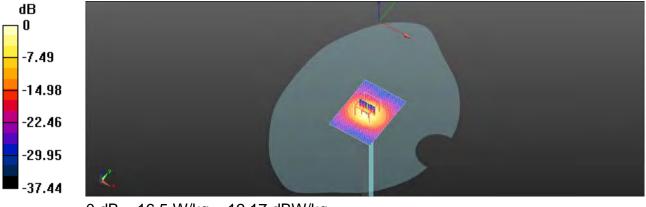

0 dB = 16.5 W/kg = 12.17 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司



# 7. Uncertainty Budget

A	с	D	е		f	g	h=c * f / e	i=c * g / e	k
Source of Uncertainty	Tolerance/ Uncertainty	Probability Distributio	Div	Div Value	ci (1g)	ci (10g)	Standard uncertainty	Standard uncertainty	vi, or Veff
Measurement system									
Probe calibration	6.00%	N	1	1	1	1	6.00%	6.00%	8
lsotropy , Axial	3.50%	R	√3	1.732	1	1	2.02%	2.02%	~
lsotropy, Hemispherical	9.60%	R	√3	1.732	1	1	5.54%	5.54%	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~
Modulation Response	2.40%	R	√3	1.732	1	1	1.40%	1.40%	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~
Boundary Effect	1.00%	R	√3	1.732	1	1	0.58%	0.58%	~
Linearity	4.70%	R	√3	1.732	1	1	2.71%	2.71%	~
Detection Limits	1.00%	R	√3	1.732	1	1	0.58%	0.58%	8
Readout Electronics	0.30%	N	1	1	1	1	0.30%	0.30%	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~
Response time	0.80%	R	√3	1.732	1	1	0.46%	0.46%	8
Integration Time	2.60%	R	√3	1.732	1	1	1.50%	1.50%	00
Measurement drift (class A evaluation)	1.75%	R	√3	1.732	1	1	1.01%	1.01%	80
RF ambient condition - noise	3.00%	R	√3	1.732	1	1	1.73%	1.73%	8
RF ambient conditions - reflections	3.00%	R	√3	1.732	1	1	1.73%	1.73%	00
Probe positioner Mechanical restrictions	0.40%	R	√3	1.732	1	1	0.23%	0.23%	00
Probe Positioning with respect to phantom shell	2.90%	R	√3	1.732	1	1	1.67%	1.67%	80
Post-processing	1.00%	R	√3	1.732	1	1	0.58%	0.58%	80
Max SAR Eval	1.00%	R	√3	1.732	1	1	0.58%	0.58%	8
Test Sample related									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	√3	1.732	1	1	2.89%	2.89%	8
Phantom and Setup									
Phantom Uncertainty	4.00%	R	√3	1.732	1	1	2.31%	2.31%	8
Liquid permittivity (mea.)	1.07%	N	1	1	0.64	0.43	0.68%	0.46%	М
Liquid Conductivity (mea.)	1.10%	N	1	1	0.6	0.49	0.66%	0.54%	М
Combined standard uncertainty		RSS					11.46%	11.43%	
Expant uncertainty (95% confidence interval), K=2							22.91%	22.86%	

Measurement Uncertainty evaluation template for DUT SAR test (0.3-3G)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.



Measurement Uncertainty evaluation template for DUT SAR test (3-6G)	

A	с	D	е		f	g	h=c * f / e	i=c * g / e	k
Source of Uncertainty	Tolerance/ Uncertainty	Probability Distributio	Div	Div Value	ci (1g)	ci (10g)	Standard uncertainty	Standard uncertainty	vi, or Veff
Measurement system									
Probe calibration	6.55%	N	1	1	1	1	6.55%	6.55%	~
lsotropy , Axial	3.50%	R	√3	1.732	1	1	2.02%	2.02%	~
lsotropy, Hemispherical	9.60%	R	√3	1.732	1	1	5.54%	5.54%	$\infty$
Modulation Response	2.40%	R	√3	1.732	1	1	1.40%	1.40%	$\infty$
Boundary Effect	1.00%	R	√3	1.732	1	1	0.58%	0.58%	8
Linearity	4.70%	R	√3	1.732	1	1	2.71%	2.71%	8
Detection Limits	1.00%	R	√3	1.732	1	1	0.58%	0.58%	8
Readout Electronics	0.30%	N	1	1	1	1	0.30%	0.30%	8
Response time	0.80%	R	√3	1.732	1	1	0.46%	0.46%	8
Integration Time	2.60%	R	√3	1.732	1	1	1.50%	1.50%	8
Measurement drift (class A evaluation)	1.75%	R	√3	1.732	1	1	1.01%	1.01%	8
RF ambient condition - noise	3.00%	R	√3	1.732	1	1	1.73%	1.73%	8
RF ambient conditions - reflections	3.00%	R	√3	1.732	1	1	1.73%	1.73%	8
Probe positioner Mechanical restrictions	0.40%	R	√3	1.732	1	1	0.23%	0.23%	8
Probe Positioning with respect to phantom shell	2.90%	R	√3	1.732	1	1	1.67%	1.67%	8
Post-processing	1.00%	R	√3	1.732	1	1	0.58%	0.58%	~
Max SAR Eval	1.00%	R	√3	1.732	1	1	0.58%	0.58%	~
Test Sample related									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	√3	1.732	1	1	2.89%	2.89%	8
Phantom and Setup									
Phantom Uncertainty	4.00%	R	√3	1.732	1	1	2.31%	2.31%	$\infty$
Liquid permittivity (mea.)	1.09%	N	1	1	0.64	0.43	0.70%	0.47%	М
Liquid Conductivity (mea.)	0.53%	N	1	1	0.6	0.49	0.32%	0.26%	М
Combined standard uncertainty		RSS					11.74%	11.72%	
Expant uncertainty (95% confidence interval), K=2							23.48%	23.44%	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ad_conditions.htm</u> and for electronic format therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd. t (886-2) 2299-3279

f (886-2) 2298-0488



Report No. : E5/2019/C0017 Page: 261 of 261

## **Appendixes**

Refer to separated files for the following appendixes.

E52019C0017 SAR_Appendix A Photographs

E52019C0017 SAR_Appendix B DAE & Probe Cal. Certificate

E52019C0017 SAR_Appendix C Phantom Description & Dipole Cal. Certificate

- End of report -

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⁹⁰天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 」 No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279