

Report No.: FG021246-01B



## FCC RADIO TEST REPORT

FCC ID : APYHRO00285 Equipment : Smart phone

Brand Name : SHARP

Applicant : SHARP CORPORATION

2-13-1, HACHIHONMATSU-IIDA,

HIGASHI-HIROSHIMA-SHI,

HIROSHIMA PREFECTURE 739-0192, JAPAN

Manufacturer: SHARP CORPORATION

1 Takumi-Cho, Sakai-Ku, Sakai-Shi, Osaka

590-8522, Japan

Standard : FCC 47 CFR Part 2, 22(H), 24(E), 27

The product was received on May 04, 2020 and testing was started from May 17, 2020 and completed on Jun. 01, 2020. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Lunis Wu

Approved by: Louis Wu

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)

TEL: 886-3-327-3456 Page Number : 1 of 24
FAX: 886-3-328-4978 Issued Date : Jun. 01, 2020

### **Table of Contents**

His	tory o	of this test report	3
Su	mmar	y of Test Result	4
1	Gene	eral Description	5
	1.1	Product Feature of Equipment Under Test	5
	1.2	Modification of EUT	5
	1.3	Testing Location	5
	1.4	Applicable Standards	6
2	Test	Configuration of Equipment Under Test	7
	2.1	Test Mode	7
	2.2	Connection Diagram of Test System	8
	2.3	Support Unit used in test configuration and system	9
	2.4	Measurement Results Explanation Example	9
	2.5	Frequency List of Low/Middle/High Channels	10
3	Cond	ducted Test Items	12
	3.1	Measuring Instruments	12
	3.2	Conducted Output Power and ERP/EIRP	13
	3.3	Peak-to-Average Ratio	14
	3.4	Occupied Bandwidth	15
	3.5	Conducted Band Edge	16
	3.6	Conducted Spurious Emission	17
	3.7	Frequency Stability	18
4	Radia	ated Test Items	19
	4.1	Measuring Instruments	19
	4.2	Radiated Spurious Emission Measurement	21
5	List	of Measuring Equipment	22
6	Unce	ertainty of Evaluation	24
Ap	pendi	x A. Test Results of Conducted Test	
Ap	pendi	x B. Test Results of ERP/EIRP and Radiated Test	
Ap	pendi	x C. Test Setup Photographs	

TEL: 886-3-327-3456 FAX: 886-3-328-4978

Report Template No.: BU5-FGLTE Version 2.4

Page Number Issued Date

: 2 of 24 : Jun. 01, 2020

Report Version

: 01

### History of this test report

Report No. : FG021246-01B

Report No.	Version	Description	Issued Date
FG021246-01B	01	Initial issue of report	Jun. 01, 2020

TEL: 886-3-327-3456 Page Number : 3 of 24
FAX: 886-3-328-4978 Issued Date : Jun. 01, 2020

### **Summary of Test Result**

Report No.: FG021246-01B

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
	§2.1046	Conducted Output Power	Reporting only	
0.0	§22.913 (a)(2)	Effective Radiated Power (Band 5)		
3.2	§24.232 (c)	Equivalent Isotropic Radiated Power (Band 2)	Pass	-
	§27.50 (d)(4)	Equivalent Isotropic Radiated Power (Band 4)		
3.3	§24.232 (d) §27.50 (d)(5)	Peak-to-Average Ratio	Pass	-
3.4	§2.1049 Occupied Bandwidth		Reporting only	-
3.5	§2.1051 §22.917 (a) §24.238 (a) §27.53 (h)	Conducted Band Edge Measurement (Band 2) (Band 4) (Band 5)	Pass	-
3.6	§2.1051 §22.917 (a) §24.238 (a) §27.53 (h)	Conducted Spurious Emission (Band 2) (Band 4) (Band 5)	Pass	-
3.7	§2.1055 §22.355 §24.235 §27.54	Frequency Stability Temperature & Voltage	Pass	-
4.2	§2.1053 §22.917 (a) §24.238 (a) §27.53 (h)	Radiated Spurious Emission (Band 2) (Band 4) (Band 5)	Pass	Under limit 24.52 dB at 5674.000 MHz

#### **Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

#### **Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang Report Producer: Lucy Wu

TEL: 886-3-327-3456 Page Number : 4 of 24
FAX: 886-3-328-4978 Issued Date : Jun. 01, 2020

### 1 General Description

### 1.1 Product Feature of Equipment Under Test

GSM/WCDMA/LTE, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n, Wi-Fi 5GHz 802.11a/n/ac, and GNSS.

Product Specification subjective to this standard					
	WWAN: PIFA Antenna				
Antenna Type	WLAN: PIFA Antenna				
Antenna Type	Bluetooth: PIFA Antenna				
	GPS / Glonass / BDS : PIFA Antenna				

Report No.: FG021246-01B

#### 1.2 Modification of EUT

No modifications are made to the EUT during all test items.

#### 1.3 Testing Location

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory						
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978						
Test Site No.	Sporton Site No.						
rest site No.	TH05-HY						
Test Engineer	Benjamin Lin						
Temperature	21~24°C						
Relative Humidity	51~55%						

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory						
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist.,  Taoyuan City, Taiwan (R.O.C.)  TEL: +886-3-327-0868  FAX: +886-3-327-0855						
Test Site No.	Sporton Site No.						
rest site No.	03CH13-HY						
Test Engineer	Jacky Hung and Wilson Wu						
Temperature	21.5~23.5°C						
Relative Humidity	49.5~55.5%						

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW0007

TEL: 886-3-327-3456 Page Number : 5 of 24 FAX: 886-3-328-4978 Issued Date : Jun. 01, 2020

### 1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

Report No.: FG021246-01B

- ANSI C63.26-2015
- ANSI / TIA-603-E
- FCC 47 CFR Part 2, 22(H), 24(E), 27
- FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- FCC KDB 414788 D01 Radiated Test Site v01r01.

#### Remark:

- 1. All test items were verified and recorded according to the standards and without any deviation during the test.
- 2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.
- 3. The TAF code is not including all the FCC KDB listed without accreditation.

TEL: 886-3-327-3456 Page Number : 6 of 24
FAX: 886-3-328-4978 Issued Date : Jun. 01, 2020

### 2 Test Configuration of Equipment Under Test

#### 2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Report No.: FG021246-01B

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane for LTE Band 2, 5; Z plane for LTE Band 4) were recorded in this report.


			В	andwid	lth (MH	lz)		N	Modulatio	n		RB#		Tes	t Chan	nel
Test Items	Band	1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	М	Н
Max.	2	v	v	v	v	v	v	٧	v		٧	v	v	٧	v	v
Output	4	v	٧	V	V	V	V	٧	v		>	٧	<b>v</b>	٧	v	v
Power	5	v	V	v	v	-	-	v	v		v	V	V	٧	v	v
	2						v	٧	v		>		٧	٧	v	v
Peak-to-Av erage Ratio	4						v	٧	v		>		٧	٧	v	v
3	5				V	•	•	٧	v		>		<b>v</b>	٧	v	v
26dB and	2	v	v	v	v	v	v	v	v				v	v	v	٧
99%	4	٧	v	v	v	v	v	v	v				v	v	v	v
Bandwidth	5	٧	٧	v	v	•	•	٧	v				V	٧	v	v
	2	v	v	v	v	v	v	v	v		v		v	v		v
Conducted Band Edge	4	v	v	v	v	v	v	v	v		v		v	v		v
	5	v	٧	v	v	-	•	٧	v		٧		٧	٧		v
Conducted	2	v	v	v	v	v	v	v	v		v			v	v	٧
Spurious	4	v	v	v	v	v	v	v	v		v			v	v	v
Emission	5	v	v	v	v	-	-	V	v		٧			٧	v	v
	2				v			v					v		v	
Frequency Stability	4				v			v					v		v	
<b>,</b>	5				v	-	-	v					v		v	

TEL: 886-3-327-3456 Page Number : 7 of 24
FAX: 886-3-328-4978 Issued Date : Jun. 01, 2020

			Bandwidth (MHz)					r	Modulatio	n		RB#		Tes	t Char	nel	
Test Items	Ва	nd	1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	М	н
	2	2	٧	v	v	v	v	v	v	v		v			v	٧	٧
E.R.P / E.I.R.P	4		٧	v	v	v	v	v	v	v		v			v	٧	٧
	5	;	v	٧	v	٧	•	•	v	v		٧			٧	v	v
Radiated	2	2						W	orst Case	)					٧	v	v
Spurious	4	ı	Worst Case									>	v	v			
Emission	5	;	Worst Case v v v										v				
Remark	The mark "v" means that this configuration is chosen for testing     The mark "-" means that this bandwidth is not supported.											nder					

Report No.: FG021246-01B

### 2.2 Connection Diagram of Test System

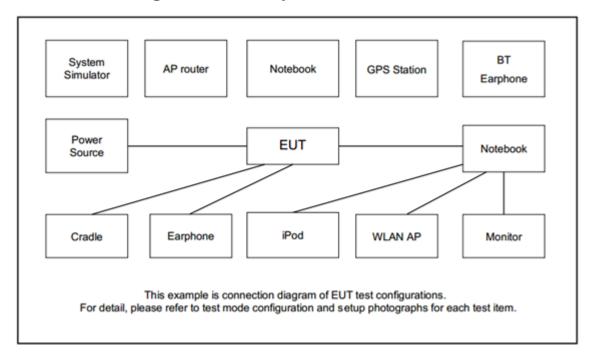

TEL: 886-3-327-3456 Page Number : 8 of 24
FAX: 886-3-328-4978 Issued Date : Jun. 01, 2020

### 2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0 m	N/A
3.	Adapter	DVE	DSA-10PFL-05 FUS 050200 a	N/A	N/A	N/A

Report No.: FG021246-01B

#### 2.4 Measurement Results Explanation Example

#### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

#### Example:

Offset(dB) = RF cable loss(dB) + attenuator factor(dB). = 4.2 + 10 = 14.2 (dB)

TEL: 886-3-327-3456 Page Number : 9 of 24
FAX: 886-3-328-4978 Issued Date : Jun. 01, 2020

### 2.5 Frequency List of Low/Middle/High Channels

LTE Band 2 Channel and Frequency List									
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest					
20	Channel	18700	18900	19100					
20	Frequency	1860	1880	1900					
45	Channel	18675	18900	19125					
15	Frequency	1857.5	1880	1902.5					
40	Channel	18650	18900	19150					
10	Frequency	1855	1880	1905					
Г	Channel	18625	18900	19175					
5	Frequency	1852.5	1880	1907.5					
^	Channel	18615	18900	19185					
3	Frequency	1851.5	1880	1908.5					
4.4	Channel	18607	18900	19193					
1.4	Frequency	1850.7	1880	1909.3					

Report No. : FG021246-01B

	LTE Band 4 Channel and Frequency List										
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest							
20	Channel	20050	20175	20300							
20	Frequency	1720	1732.5	1745							
4.5	Channel	20025	20175	20325							
15	Frequency	1717.5	1732.5	1747.5							
40	Channel	20000	20175	20350							
10	Frequency	1715	1732.5	1750							
_	Channel	19975	20175	20375							
5	Frequency	1712.5	1732.5	1752.5							
2	Channel	19965	20175	20385							
3	Frequency	1711.5	1732.5	1753.5							
1.4	Channel	19957	20175	20393							
1.4	Frequency	1710.7	1732.5	1754.3							

TEL: 886-3-327-3456 Page Number : 10 of 24
FAX: 886-3-328-4978 Issued Date : Jun. 01, 2020

LTE Band 5 Channel and Frequency List									
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest					
10	Channel	20450	20525	20600					
10	Frequency	829	836.5	844					
5	Channel	20425	20525	20625					
5	Frequency	826.5	836.5	846.5					
2	Channel	20415	20525	20635					
3	Frequency	825.5	836.5	847.5					
1.4	Channel	20407	20525	20643					
1.4	Frequency	824.7	836.5	848.3					

Report No. : FG021246-01B

TEL: 886-3-327-3456 Page Number : 11 of 24 FAX: 886-3-328-4978 Issued Date : Jun. 01, 2020


#### 3 Conducted Test Items

#### 3.1 Measuring Instruments

See list of measuring instruments of this test report.


#### 3.1.1 Test Setup

#### 3.1.2 Conducted Output Power




Report No.: FG021246-01B

# 3.1.3 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

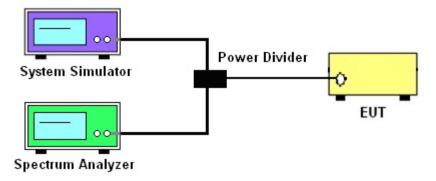

#### 3.1.4 Frequency Stability

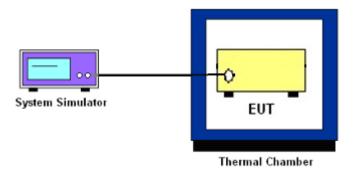

#### 3.1.5 Test Result of Conducted Test

Please refer to Appendix A.

TEL: 886-3-327-3456 Page Number : 12 of 24
FAX: 886-3-328-4978 Issued Date : Jun. 01, 2020

#### 3.2 Conducted Output Power and ERP/EIRP

# 3.2.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

Report No.: FG021246-01B

The ERP of mobile transmitters must not exceed 7 Watts for LTE Band 5

The EIRP of mobile transmitters must not exceed 2 Watts for LTE Band 2

The EIRP of mobile transmitters must not exceed 1 Watts for LTE Band 4

According to KDB 412172 D01 Power Approach,

 $EIRP = P_T + G_T - L_C$ , ERP = EIRP - 2.15, where

 $P_T$  = transmitter output power in dBm

G<sub>T</sub> = gain of the transmitting antenna in dBi

L<sub>C</sub> = signal attenuation in the connecting cable between the transmitter and antenna in dB

#### 3.2.2 Test Procedures

- 1. The transmitter output port was connected to the system simulator.
- 2. Set EUT at maximum power through the system simulator.
- 3. Select lowest, middle, and highest channels for each band and different modulation.
- 4. Measure and record the power level from the system simulator.

TEL: 886-3-327-3456 Page Number : 13 of 24
FAX: 886-3-328-4978 Issued Date : Jun. 01, 2020

#### 3.3 Peak-to-Average Ratio

#### 3.3.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

Report No.: FG021246-01B

#### 3.3.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.2.6

- 1. The EUT was connected to spectrum and system simulator via a power divider.
- 2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
- 3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
- 4. Record the deviation as Peak to Average Ratio.

TEL: 886-3-327-3456 Page Number : 14 of 24
FAX: 886-3-328-4978 Issued Date : Jun. 01, 2020

#### 3.4 Occupied Bandwidth

#### 3.4.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

Report No.: FG021246-01B

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

#### 3.4.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- The spectrum analyzer center frequency is set to the nominal EUT channel center frequency.
   The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
- 3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- 4. Set the detection mode to peak, and the trace mode to max hold.
- Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
   (this is the reference value)
- 6. Determine the "-26 dB down amplitude" as equal to (Reference Value X).
- 7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the "–X dB down amplitude" determined in step 6. If a marker is below this "-X dB down amplitude" value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
- 8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

TEL: 886-3-327-3456 Page Number : 15 of 24
FAX: 886-3-328-4978 Issued Date : Jun. 01, 2020

3.5 Conducted Band Edge

3.5.1 Description of Conducted Band Edge Measurement

22.917(a)

For operations in the 824 - 849 MHz band, the FCC limit is 43 + 10log10(P[Watts]) dB below the transmitter power P(Watts) in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

Report No.: FG021246-01B

24.238 (a)

For operations in the 1850-1910 and 1930-1990 MHz band, the FCC limit is 43 + 10log10(P[Watts]) dB below the transmitter power P(Watts) in a 1MHz bandwidth. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53 (h)

For operations in the 1710 - 1755 MHz band, the FCC limit is  $43 + 10\log_{10}(P[Watts])$  dB below the transmitter power P(Watts) in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- 2. The band edges of low and high channels for the highest RF powers were measured.
- 3. Set RBW >= 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
- 4. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
- 5. Set spectrum analyzer with RMS detector.
- The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 7. Checked that all the results comply with the emission limit line.

The limit line is derived from  $43 + 10\log(P)dB$  below the transmitter power P(Watts)

TEL: 886-3-327-3456 Page Number : 16 of 24
FAX: 886-3-328-4978 Issued Date : Jun. 01, 2020

#### 3.6 Conducted Spurious Emission

#### 3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

Report No.: FG021246-01B

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10<sup>th</sup> harmonic.

#### 3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
   The path loss was compensated to the results for each measurement.
- 3. The middle channel for the highest RF power within the transmitting frequency was measured.
- 4. The conducted spurious emission for the whole frequency range was taken.
- 5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
- 6. Set spectrum analyzer with RMS detector.
- 7. Taking the record of maximum spurious emission.
- 8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 9. The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)

TEL: 886-3-327-3456 Page Number : 17 of 24
FAX: 886-3-328-4978 Issued Date : Jun. 01, 2020

#### 3.7 Frequency Stability

#### 3.7.1 Description of Frequency Stability Measurement

22.355

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5ppm) of the center frequency.

Report No.: FG021246-01B

24.235 & 27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

#### 3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

- 1. The EUT was set up in the thermal chamber and connected with the system simulator.
- 2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
- 3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

#### 3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

- 1. The EUT was placed in a temperature chamber at 20±5° C and connected with the system simulator.
- 2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
- 3. The variation in frequency was measured for the worst case.

TEL: 886-3-327-3456 Page Number : 18 of 24
FAX: 886-3-328-4978 Issued Date : Jun. 01, 2020


#### 4 Radiated Test Items

#### 4.1 Measuring Instruments

See list of measuring instruments of this test report.


#### 4.1.1 Test Setup

#### For radiated emissions below 30MHz

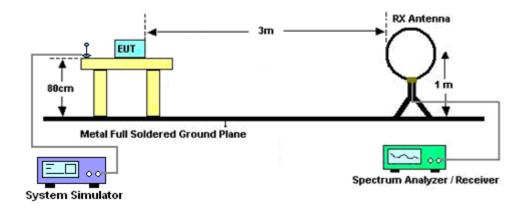


Report No.: FG021246-01B

#### For radiated test from 30MHz to 1GHz

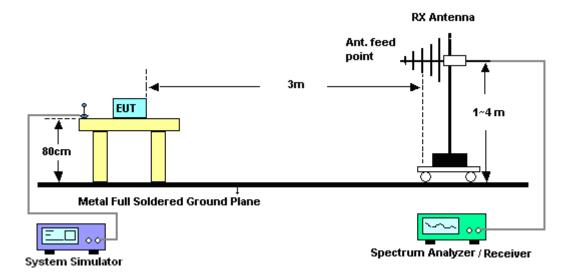

TEL: 886-3-327-3456 Page Number : 19 of 24
FAX: 886-3-328-4978 Issued Date : Jun. 01, 2020

#### For radiated test above 1GHz

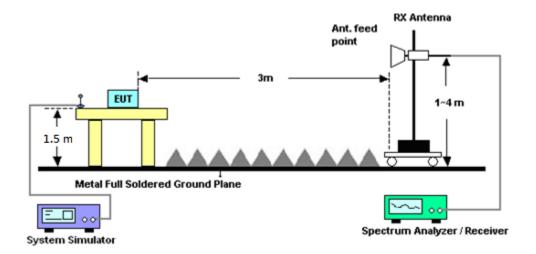

Report No.: FG021246-01B

#### 4.1.2 Test Result of Radiated Test

Please refer to Appendix B.

#### Note:

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

TEL: 886-3-327-3456 Page Number : 20 of 24 FAX: 886-3-328-4978 Issued Date : Jun. 01, 2020

#### 4.2 Radiated Spurious Emission Measurement

#### 4.2.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E.

Report No.: FG021246-01B

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

#### 4.2.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

- 1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
- 2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
- 3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
- 4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
- 5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
- 6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
- 7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- 8. Taking the record of output power at antenna port.
- 9. Repeat step 7 to step 8 for another polarization.
- The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)

EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain

ERP (dBm) = EIRP - 2.15

TEL: 886-3-327-3456 Page Number : 21 of 24
FAX: 886-3-328-4978 Issued Date : Jun. 01, 2020

## 5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Base Station (Measure)	Anritsu	MT8821C	6262025280	LTE FDD/TDD with 44) /LTE-3CC DLCA,2CC ULCA	Oct. 25, 2019	May 17, 2020~ Jun. 01, 2020	Oct. 24, 2020	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV40	101397	10Hz~40GHz	Nov. 15, 2019	May 17, 2020~ Jun. 01, 2020	Nov. 14, 2020	Conducted (TH05-HY)
Temperature Chamber	ESPEC	SH-641	92013720	-40°C ~90°C	Sep. 02, 2019	May 17, 2020~ Jun. 01, 2020	Sep. 01, 2020	Conducted (TH05-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL890094	1V~20V 0.5A~5A	Oct. 09, 2019	May 17, 2020~ Jun. 01, 2020	Oct. 08, 2020	Conducted (TH05-HY)
Coupler	Warison	20dB 25W SMA Directional Coupler	#A	1-18GHz	Jan. 13, 2020	May 17, 2020~ Jun. 01, 2020	Jan. 12, 2021	Conducted (TH05-HY)
Amplifier	Sonoma-Instru ment	310 N	187282	9KHz~1GHz	Dec. 17, 2019	May 26, 2020~ May 28, 2020	Dec. 16, 2020	Radiation (03CH13-HY)
Bilog Antenna	TESEQ	CBL 6111D&00800 N1D01N-06	40103&07	30MHz to 1GHz	Apr. 29, 2020	May 26, 2020~ May 28, 2020	Apr. 28, 2021	Radiation (03CH13-HY)
Bilog Antenna	TESEQ	CBL 6111D&00800 N1D01N-06	41912 & 07	30MHz to 1GHz	Apr. 29, 2020	May 26, 2020~ May 28, 2020	Apr. 28, 2021	Radiation (03CH13-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-1241	1GHz ~ 18GHz	Jul. 02, 2019	May 26, 2020~ May 28, 2020	Jul. 01, 2020	Radiation (03CH13-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-1212	1GHz ~ 18GHz	May 20, 2020	May 26, 2020~ May 28, 2020	May 19, 2021	Radiation (03CH13-HY)
Preamplifier	MITEQ	AMF-7D-00101 800-30-10P	1590074	1GHz~18GHz	May 19, 2020	May 26, 2020~ May 28, 2020	May 18, 2021	Radiation (03CH13-HY)
Preamplifier	Keysight	83017A	MY5327014 7	1GHz~26.5GHz	Oct. 28, 2019	May 26, 2020~ May 28, 2020	Oct. 27, 2020	Radiation (03CH13-HY)
Signal Generator	Rohde & Schwarz	SMF100A	101107	100kHz~40GHz	Aug. 27, 2019	May 26, 2020~ May 28, 2020	Aug. 26, 2020	Radiation (03CH13-HY)
Spectrum Analyzer	Keysight	N9010A	MY5537052 6	10Hz~44GHz	Mar. 20, 2020	May 26, 2020~ May 28, 2020	Mar. 19, 2021	Radiation (03CH13-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	May 26, 2020~ May 28, 2020	N/A	Radiation (03CH13-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	May 26, 2020~ May 28, 2020	N/A	Radiation (03CH13-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	May 26, 2020~ May 28, 2020	N/A	Radiation (03CH13-HY)
Software	Audix	E3 6.2009-8-24	RK-000992	N/A	N/A	May 26, 2020~ May 28, 2020	N/A	Radiation (03CH13-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz ~ 40GHz	Dec. 13, 2019	May 26, 2020~ May 28, 2020	Dec. 12, 2020	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0030/126E	30M-18G	Feb. 12, 2020	May 26, 2020~ May 28, 2020	Feb. 21, 2021	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	804793/4	30M-18G	Feb. 12, 2020	May 26, 2020~ May 28, 2020	Feb. 21, 2021	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30M~40GHz	Feb. 25, 2020	May 26, 2020~ May 28, 2020	Feb. 24, 2021	Radiation (03CH13-HY)

Report No. : FG021246-01B

TEL: 886-3-327-3456 Page Number : 22 of 24 FAX: 886-3-328-4978 Issued Date : Jun. 01, 2020

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA91705 84	18GHz- 40GHz	Dec. 10, 2019	May 26, 2020~ May 28, 2020	Dec. 09, 2020	Radiation (03CH13-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA91709 80	18GHz~40GHz	Jan. 10, 2020	May 26, 2020~ May 28, 2020	Jan. 09, 2021	Radiation (03CH13-HY)
Filter	Wainwright	WHKX12-2700 -3000-18000-6 0SS	SN2	3GHz High Pass Filter	Jul. 14, 2019	May 26, 2020~ May 28, 2020	Jul. 13, 2020	Radiation (03CH13-HY)
Filter	Wainwright	WHKX12-1080 -1200-15000-6 0SS	SN3	1.2GHz High Pass Filter	Jul. 03, 2019	May 26, 2020~ May 28, 2020	Jul. 02, 2020	Radiation (03CH13-HY)
Hygrometer	TECPEL	DTM-303B	TP157151	N/A	Jun. 17, 2019	May 26, 2020~ May 28, 2020	Jun. 16, 2020	Radiation (03CH13-HY)

Report No. : FG021246-01B

TEL: 886-3-327-3456 Page Number : 23 of 24 FAX: 886-3-328-4978 Issued Date : Jun. 01, 2020

### 6 Uncertainty of Evaluation

#### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of	2 24
Confidence of 95% (U = 2Uc(y))	3.21

Report No. : FG021246-01B

#### **Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)**

Measuring Uncertainty for a Level of	3.24
Confidence of 95% (U = 2Uc(y))	3.24

#### **Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)**

Measuring Uncertainty for a Level of	3.99
Confidence of 95% (U = 2Uc(y))	3.99

TEL: 886-3-327-3456 Page Number : 24 of 24 FAX: 886-3-328-4978 Issued Date : Jun. 01, 2020

### **Appendix A. Test Results of Conducted Test**

### Conducted Output Power(Average power)

	LTE Band 2 Maximum Average Power [dBm]									
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest				
20	1	0		21.87	21.99	21.87				
20	1	49		21.51	21.77	21.79				
20	1	99		21.80	21.71	21.82				
20	50	0	QPSK	20.92	21.06	21.05				
20	50	24		20.91	20.92	20.91				
20	50	50		20.90	20.90	20.89				
20	100	0		20.95	21.10	21.06				
20	1	0		20.38	20.35	20.97				
20	1	49		20.35	20.74	20.93				
20	1	99		20.20	20.57	20.90				
20	50	0	64-QAM	20.14	20.12	20.11				
20	50	24		20.13	20.18	20.17				
20	50	50		20.06	20.15	20.13				
20	100	0		19.98	20.10	20.15				
15	1	0		21.73	21.93	21.77				
15	1	37		21.55	21.69	21.72				
15	1	74		21.73	21.70	21.80				
15	36	0	QPSK	20.89	20.88	21.13				
15	36	20		20.83	21.11	21.04				
15	36	39		20.89	21.03	21.03				
15	75	0		20.85	21.01	21.12				
15	1	0		20.67	20.62	21.04				
15	1	37		20.62	20.71	20.89				
15	1	74		20.69	20.76	20.75				
15	36	0	16-QAM	19.90	19.99	20.03				
15	36	20		19.98	20.05	20.06				
15	36	39		19.96	20.06	20.28				
15	75	0		19.93	20.06	20.17				



### SPORTON LAB. FCC RADIO TEST REPORT

		LTE	Band 2 Max	ximum Average Po	wer [dBm]	
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0		21.75	21.93	21.84
10	1	25		21.58	21.77	21.69
10	1	49		21.70	21.64	21.75
10	25	0	QPSK	20.84	20.94	21.15
10	25	12		20.90	21.02	21.08
10	25	25		20.82	20.93	21.06
10	50	0		20.90	21.00	21.07
10	1	0		20.74	20.66	20.96
10	1	25		20.69	20.70	20.88
10	1	49		20.69	20.71	20.75
10	25	0	16-QAM	19.98	20.04	20.04
10	25	12		19.93	20.08	20.05
10	25	25		19.91	19.98	20.26
10	50	0		19.91	20.11	20.08
5	1	0		21.68	21.89	21.86
5	1	12		21.53	21.71	21.78
5	1	24		21.71	21.65	21.79
5	12	0	QPSK	20.91	20.87	21.14
5	12	7		20.91	21.07	21.09
5	12	13		20.90	20.97	21.09
5	25	0		20.94	21.01	21.11
5	1	0		20.65	20.64	21.04
5	1	12		20.69	20.78	20.85
5	1	24		20.66	20.79	20.76
5	12	0	16-QAM	19.93	19.99	20.01
5	12	7		19.90	20.08	20.04
5	12	13		19.87	20.04	20.18
5	25	0		19.97	20.10	20.08



### SPORTON LAB. FCC RADIO TEST REPORT

		LTE	Band 2 Max	ximum Average Po	wer [dBm]	
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0		21.71	21.98	21.79
3	1	8		21.53	21.73	21.72
3	1	14		21.73	21.67	21.80
3	8	0	QPSK	20.85	20.90	21.09
3	8	4		20.86	21.09	21.03
3	8	7		20.81	20.93	21.00
3	15	0		20.88	21.08	21.09
3	1	0		20.64	20.68	20.99
3	1	8		20.64	20.71	20.85
3	1	14		20.61	20.77	20.81
3	8	0	16-QAM	19.91	20.04	20.04
3	8	4		19.98	20.06	20.00
3	8	7		19.93	20.04	20.23
3	15	0		19.93	20.01	20.07
1.4	1	0		21.61	21.66	21.58
1.4	1	3		21.67	21.79	21.68
1.4	1	5		21.59	21.69	21.69
1.4	3	0	QPSK	21.66	21.75	21.83
1.4	3	1		21.72	21.88	21.90
1.4	3	3		21.74	21.73	21.89
1.4	6	0		20.57	20.60	20.75
1.4	1	0		20.59	20.50	20.50
1.4	1	3		20.67	20.59	20.73
1.4	1	5		20.52	20.58	20.53
1.4	3	0	16-QAM	20.61	20.50	20.76
1.4	3	1		20.85	20.71	20.81
1.4	3	3		20.86	20.70	20.72
1.4	6	0		19.51	19.58	19.57



	LTE Band 4 Maximum Average Power [dBm]									
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest				
20	1	0		21.33	21.22	21.47				
20	1	49		21.25	21.10	21.29				
20	1	99		21.11	21.10	21.14				
20	50	0	QPSK	20.72	20.26	20.43				
20	50	24		20.69	20.25	20.37				
20	50	50		20.59	20.23	20.25				
20	100	0		20.65	20.27	20.39				
20	1	0		20.07	20.24	20.25				
20	1	49		20.40	20.03	20.03				
20	1	99		20.18	20.00	20.01				
20	50	0	16-QAM	19.51	19.32	19.59				
20	50	24		19.66	19.32	19.31				
20	50	50		19.61	19.11	19.23				
20	100	0		19.61	19.23	19.28				
15	1	0		21.29	21.18	21.41				
15	1	37		21.17	21.01	21.14				
15	1	74		21.05	21.04	21.06				
15	36	0	QPSK	20.68	20.19	20.42				
15	36	20		20.66	20.19	20.26				
15	36	39		20.57	20.17	20.18				
15	75	0		20.45	20.07	20.34				
15	1	0		20.02	20.13	20.08				
15	1	37		20.34	20.00	20.00				
15	1	74		20.03	20.07	20.02				
15	36	0	16-QAM	19.37	19.30	19.51				
15	36	20		19.52	19.19	19.31				
15	36	39		19.50	19.00	19.17				
15	75	0		19.51	19.05	19.15				



LTE Band 4 Maximum Average Power [dBm] BW [MHz] **RB Size RB Offset** Mod Lowest Middle Highest 10 21.23 21.07 21.39 10 1 25 21.11 21.05 21.25 10 1 49 21.07 21.06 21.04 10 25 0 **QPSK** 20.65 20.07 20.29 10 25 12 20.53 20.06 20.19 10 25 25 20.42 20.19 20.17 10 50 20.59 20.14 20.27 0 10 1 0 20.21 20.00 20.08 20.35 10 1 25 20.05 20.11 10 1 49 20.07 20.15 20.03 10 25 0 19.59 16-QAM 19.40 19.12 10 25 12 19.26 19.64 19.19 10 25 25 19.55 19.22 19.18 10 50 0 19.41 19.07 19.19 5 1 0 21.14 21.18 21.44 1 5 12 21.23 21.11 21.20 5 1 24 21.05 21.06 21.10 5 12 0 **QPSK** 20.63 20.08 20.37 7 20.08 5 12 20.68 20.22 5 12 13 20.46 20.05 20.05 5 25 0 20.55 20.10 20.33 5 1 0 20.06 20.24 20.11 5 1 12 20.30 20.35 20.26 5 1 24 20.08 20.29 20.33 5 12 0 16-QAM 19.34 19.26 19.43 5 12 7 19.59 19.17 19.18 5 12 13 19.53 19.22 19.14 5 25 0 19.50 19.23 19.19



		I TE	Pand / May	kimum Average Po	wor [dPm]	
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0	IVIOG	21.30	21.13	21.41
3		8		21.30	21.13	21.24
_	1	_			_	
3	1	14	0.0014	21.04	21.05	21.20
3	8	0	QPSK	20.54	20.18	20.25
3	8	4		20.52	20.17	20.27
3	8	7		20.43	20.15	20.22
3	15	0		20.54	20.22	20.21
3	1	0		20.11	20.19	20.19
3	1	8		20.24	20.02	20.00
3	1	14		20.18	20.00	20.05
3	8	0	16-QAM	19.32	19.31	19.57
3	8	4		19.53	19.20	19.20
3	8	7		19.59	19.00	19.06
3	15	0		19.58	19.09	19.18
1.4	1	0		21.20	21.12	21.21
1.4	1	3		21.30	21.39	21.36
1.4	1	5		21.12	21.34	21.26
1.4	3	0	QPSK	21.41	21.36	21.26
1.4	3	1		21.39	21.20	21.42
1.4	3	3		21.28	21.33	21.30
1.4	6	0		20.23	20.19	20.23
1.4	1	0		20.00	20.07	20.02
1.4	1	3		20.08	20.24	20.22
1.4	1	5		20.01	20.09	20.03
1.4	3	0	16-QAM	20.22	20.15	20.33
1.4	3	1		20.27	20.50	20.46
1.4	3	3		20.21	20.30	20.51
1.4	6	0		19.04	19.37	19.29



### SPORTON LAB. FCC RADIO TEST REPORT

		LTE	Band 5 Max	kimum Average Po	wer [dBm]	
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0		23.19	23.35	23.29
10	1	25		23.04	23.18	23.04
10	1	49		22.85	23.09	22.97
10	25	0	QPSK	22.22	22.31	22.20
10	25	12		22.19	22.28	22.24
10	25	25		22.15	22.25	22.20
10	50	0		22.22	22.29	22.28
10	1	0		21.83	22.06	22.02
10	1	25		22.23	22.23	22.18
10	1	49		21.77	22.18	21.95
10	25	0	16-QAM	21.25	21.51	21.54
10	25	12		21.20	21.49	21.24
10	25	25		21.45	21.49	21.43
10	50	0		21.22	21.30	21.26
5	1	0		23.17	23.29	23.24
5	1	12		22.98	23.13	23.01
5	1	24		22.85	23.02	22.90
5	12	0	QPSK	22.13	22.18	22.23
5	12	7		22.12	22.19	22.18
5	12	13		22.09	22.19	22.18
5	25	0		22.14	22.19	22.27
5	1	0		21.82	22.03	21.94
5	1	12		22.18	22.19	22.14
5	1	24		21.71	22.10	21.92
5	12	0	16-QAM	21.17	21.44	21.53
5	12	7		21.11	21.44	21.14
5	12	13		21.42	21.49	21.37
5	25	0		21.20	21.22	21.21



		LTE	Band 5 Max	ximum Average Po	wer [dBm]	
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0		22.98	23.00	23.12
3	1	8		23.25	23.14	23.21
3	1	14		23.19	23.10	22.86
3	8	0	QPSK	22.28	22.19	22.25
3	8	4		22.35	22.19	22.22
3	8	7		22.14	22.13	22.22
3	15	0		22.27	22.21	22.24
3	1	0		21.97	22.14	22.06
3	1	8		22.07	21.91	21.91
3	1	14		21.98	21.95	21.77
3	8	0	16-QAM	21.24	21.32	21.20
3	8	4		21.31	21.23	21.25
3	8	7		21.29	21.18	21.29
3	15	0		21.19	21.07	21.16
1.4	1	0		23.19	23.28	23.17
1.4	1	3		22.92	23.15	22.85
1.4	1	5		22.78	23.05	22.87
1.4	3	0	QPSK	23.05	23.26	23.05
1.4	3	1		22.89	22.95	22.79
1.4	3	3		22.85	22.99	22.87
1.4	6	0		22.17	22.12	22.19
1.4	1	0		22.16	22.13	22.05
1.4	1	3		22.13	22.06	22.02
1.4	1	5		22.26	22.10	22.24
1.4	3	0	16-QAM	21.87	22.08	21.91
1.4	3	1		21.99	21.88	21.77
1.4	3	3		21.79	21.94	21.60
1.4	6	0		21.22	21.26	21.07


### LTE Band 2

## Peak-to-Average Ratio

Mode						
Mod.	QP	SK	16C	Limit: 13dB		
RB Size	1RB	Full RB 1RB Full R		Full RB	Result	
Lowest CH	4.23	4.58	4.96	5.48		
Middle CH	4.29	4.75	4.99	5.65	PASS	
Highest CH	4.81	4.84	5.68	5.86		


Report No. :FG021246-01B

TEL: 886-3-327-3456 Page Number : A2-1 of 39

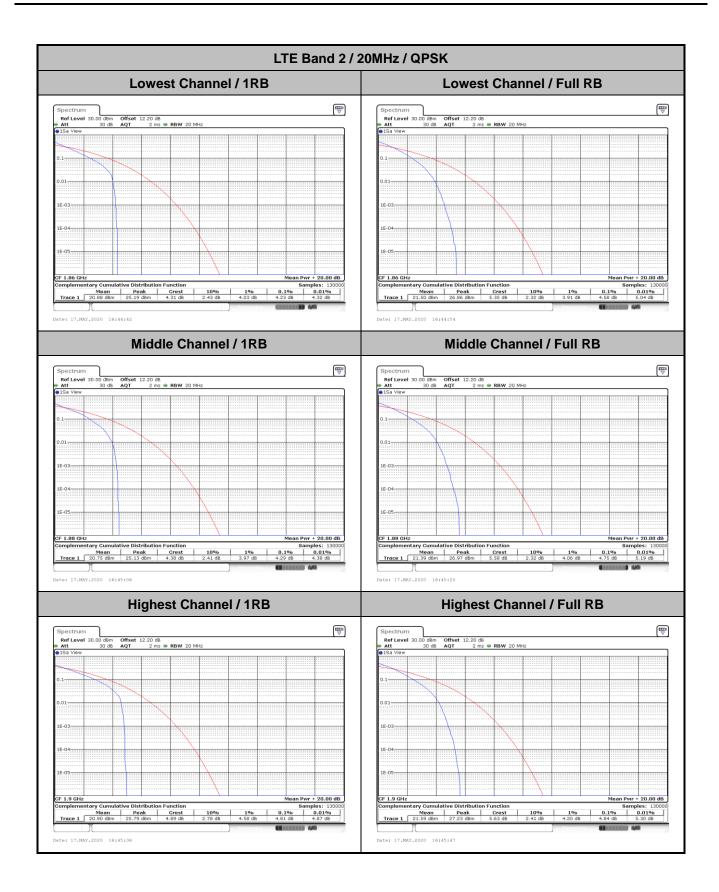

TEL: 886-3-327-3456 Page Number: A2-2 of 39



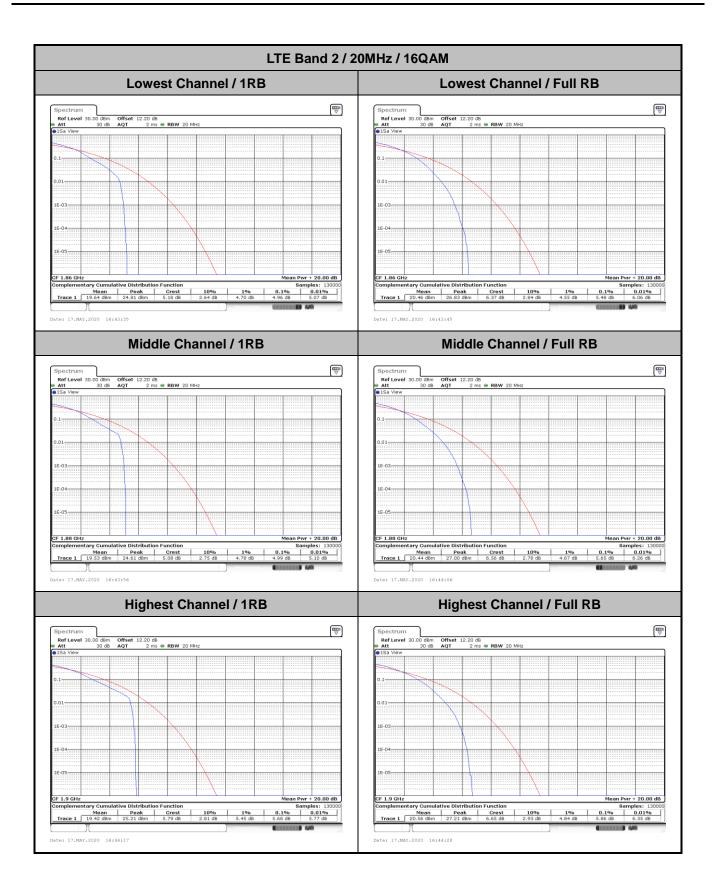

TEL: 886-3-327-3456 Page Number : A2-3 of 39

26dB Bandwidth


Mode	LTE Band 2 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.27	1.32	3.00	2.97	4.90	5.01	9.75	9.89	14.36	14.39	19.06	19.10
Middle CH	1.31	1.32	3.00	3.01	4.97	4.93	9.87	9.89	14.54	14.42	19.14	19.50
Highest CH	1.28	1.28	2.99	3.01	5.01	4.91	9.73	9.89	14.21	14.39	19.10	19.14

Report No. :FG021246-01B


TEL: 886-3-327-3456 Page Number : A2-4 of 39

FAX: 886-3-328-4978


Report No. :FG021246-01B

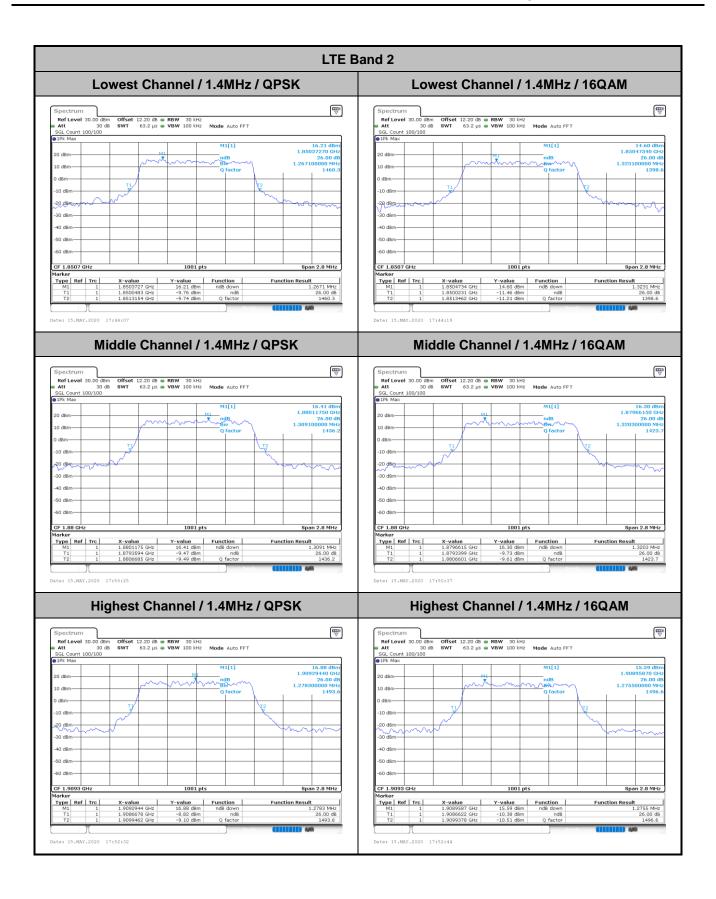

TEL: 886-3-327-3456 Page Number: A2-5 of 39

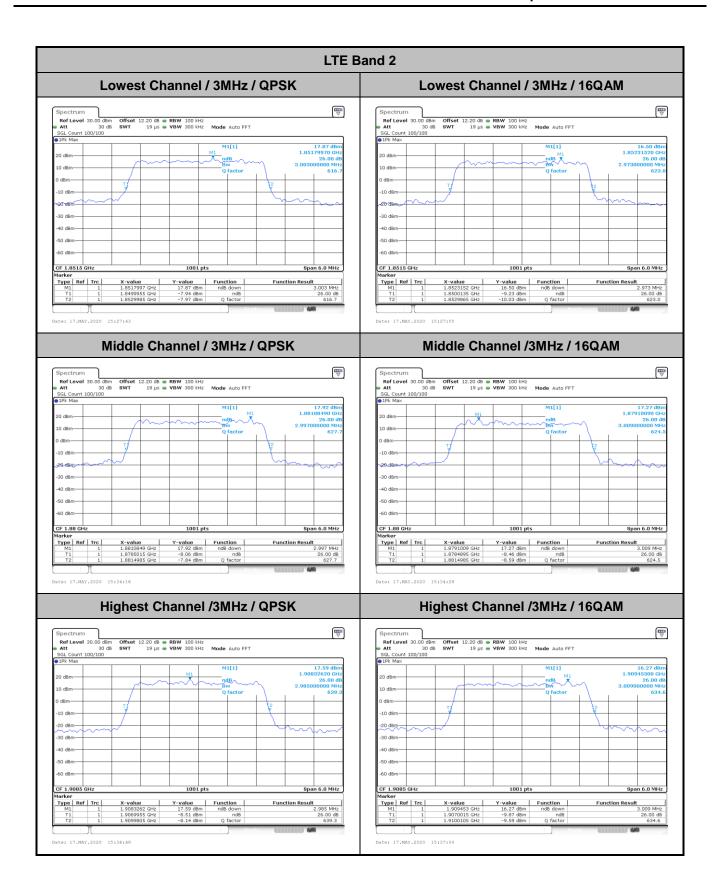


TEL: 886-3-327-3456 Page Number: A2-6 of 39

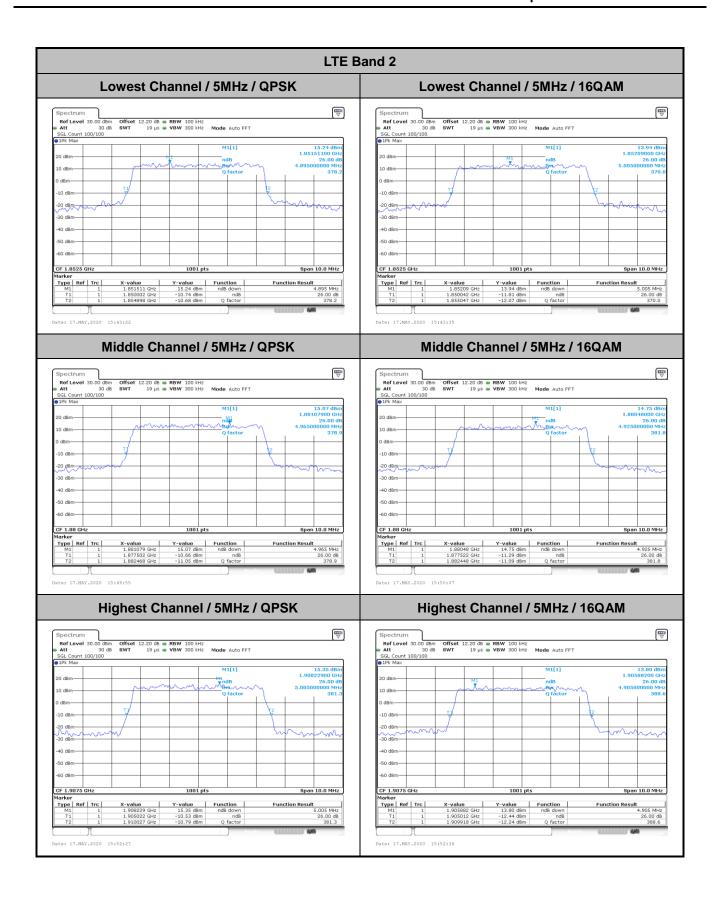

TEL: 886-3-327-3456 Page Number: A2-7 of 39



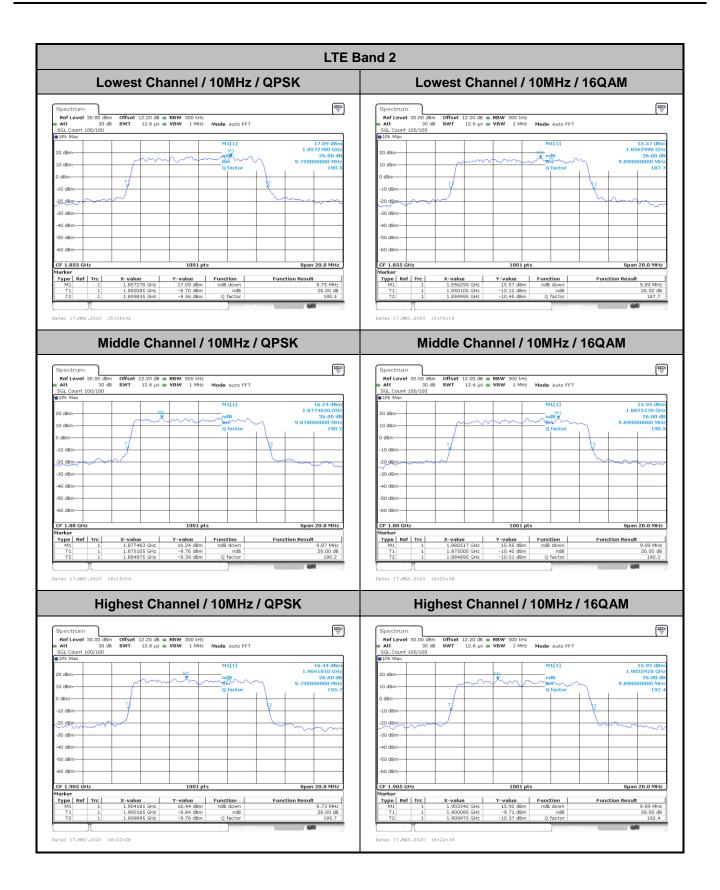


TEL: 886-3-327-3456 Page Number : A2-8 of 39




FAX: 886-3-328-4978

Report No. :FG021246-01B

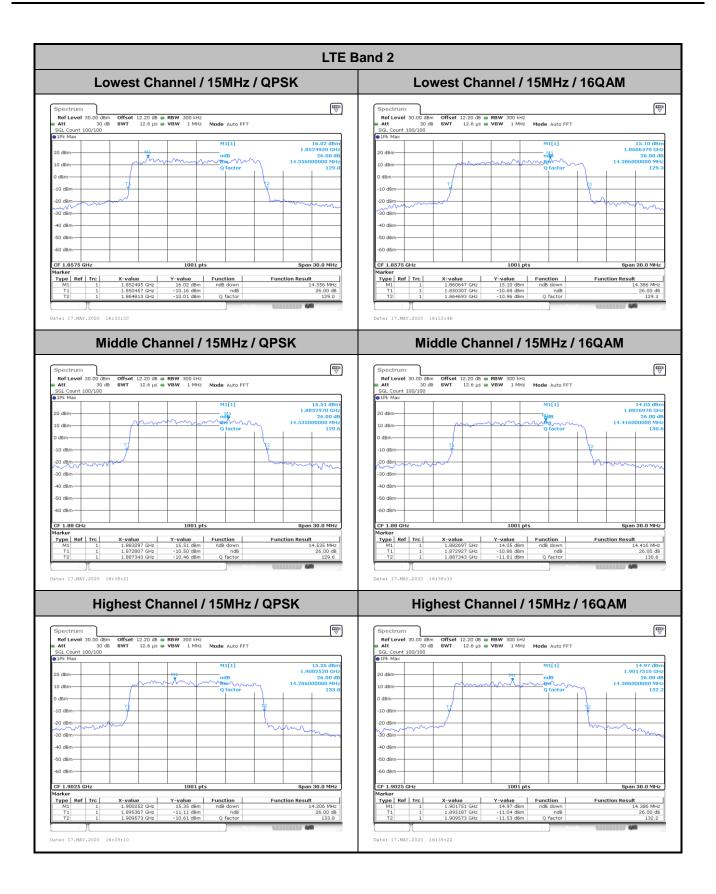

TEL: 886-3-327-3456 Page Number : A2-9 of 39



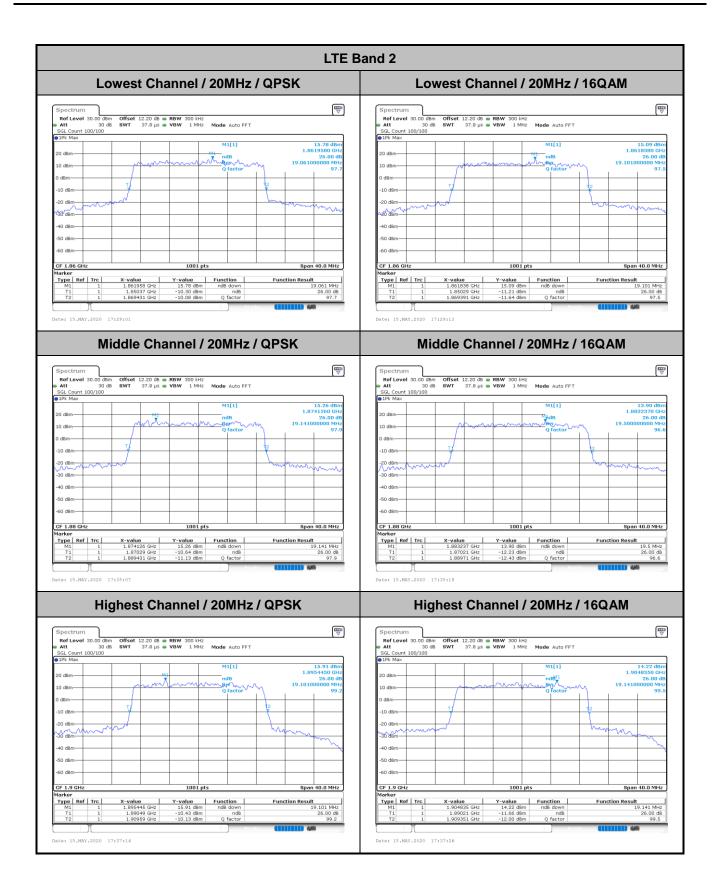

TEL: 886-3-327-3456 Page Number : A2-10 of 39 FAX: 886-3-328-4978


## **Occupied Bandwidth**

Mode	LTE Band 2 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.10	1.10	2.71	2.70	4.52	4.48	9.05	8.99	13.37	13.46	17.82	17.82
Middle CH	1.10	1.09	2.72	2.73	4.49	4.49	9.01	9.01	13.49	13.37	17.86	17.74
Highest CH	1.09	1.10	2.71	2.72	4.49	4.50	9.05	9.01	13.49	13.40	17.78	17.94

Report No. :FG021246-01B


TEL: 886-3-327-3456 Page Number : A2-11 of 39



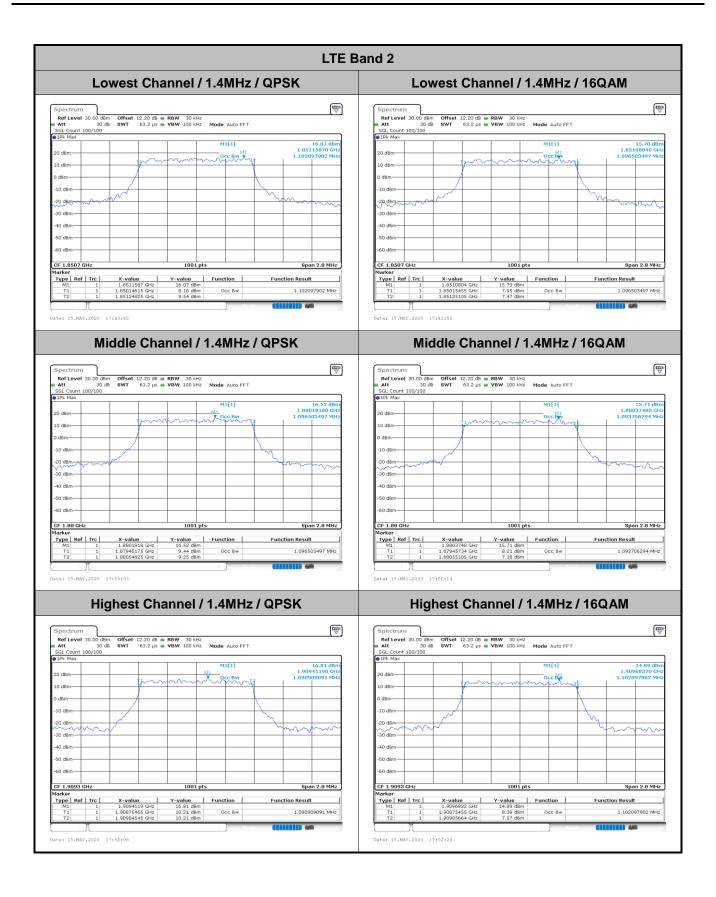

TEL: 886-3-327-3456 Page Number : A2-12 of 39



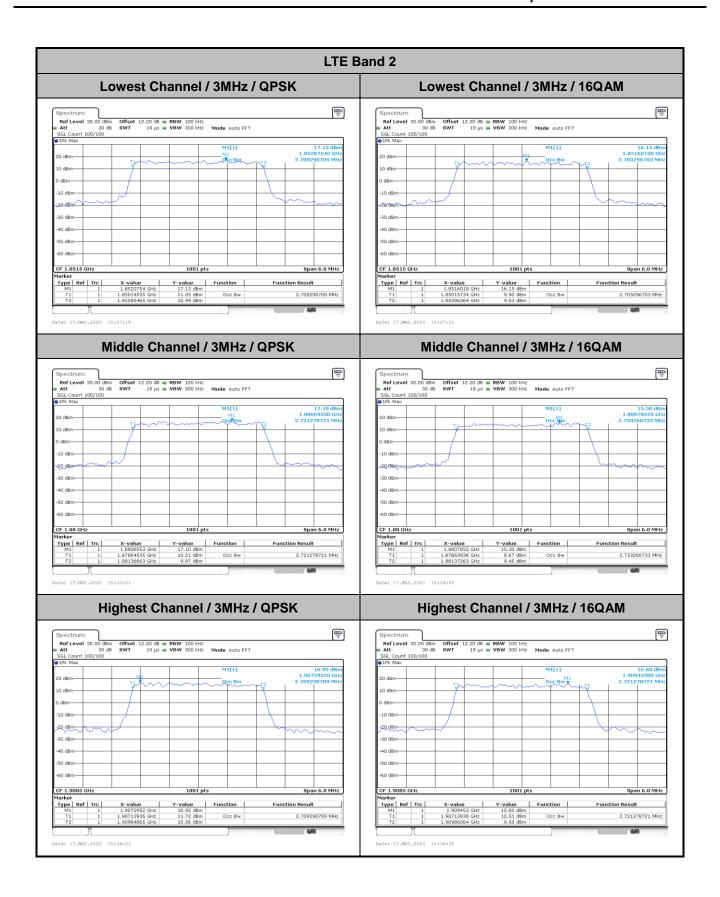

TEL: 886-3-327-3456 Page Number : A2-13 of 39



LTE Band 2 Lowest Channel / 5MHz / QPSK Lowest Channel / 5MHz / 16QAM M1[1] M1[1] 15.40 dB 14.39 dBr 10 dBmdBm--20 dBm\_ -20 dBm-30 dBm-40 dBm--50 dBm-CF 1.8525 GHz CF 1.8525 GHz 
 Marker
 Trc
 X-value
 Y-value
 Function

 M1
 1
 1.850852 GHz
 14.99 d8m
 14.70 d8m

 T1
 1
 1.8502622 GHz
 8.77 d8m
 Occ 8w

 T2
 1
 1.8547378 GHz
 8.33 d8m
 Occ 8w
 Date: 17.MAY.2020 15:42:58 Date: 17.MAY.2020 15:43:10 Middle Channel / 5MHz / QPSK Middle Channel / 5MHz / 16QAM Ref Level 30.0 dbm Offset 12.20 db @ RBW 100 kHz 

Att 30 db SWT 19 µs @ VBW 300 kHz Mode Auto FFT 
SGL Count 100/100 
BIPR Max Ref Level 30.00 dBm
Att 30 dB
SGL Count 100/100 14.53 dBr 1.88038000 GH 4.485514486 MH 14.53 dBm 1.88167800 GHz 4.485514486 MHz M1[1] M1[1] -10 dBm--20 dBm-40 dBm 40 dBm -50 dBm -50 dBm-1001 pts 
 Marker
 Y-value
 Y-value
 Function

 M1
 1
 1.881678 GHz
 14.53 dbm
 14.53 dbm

 T1
 1
 1.977622 GHz
 9.26 dbm
 Occ Bw

 T2
 1
 1.8822478 GHz
 9.21 dbm
 Occ Bw

 X-value
 Y-value
 Function

 1.88038 GHz
 14.53 dBm
 18.787522 GHz

 1.8872932 GHz
 10.09 dBm
 Occ Bw

 1.8822978 GHz
 9.78 dBm
 Function Result Function Result 4.485514486 MHz 4.485514486 MHz Highest Channel / 5MHz / QPSK Highest Channel / 5MHz / 16QAM 20 dBm-10 dBm--10 dBm--60 dBm--60 dBm-CF 1.9075 GHz CF 1.9075 GHz Marker 1001 pt: 1001 pts 
 X-value
 Y-value
 Function

 1.906301 GHz
 15.99 dBrm
 Occ Bw

 1.905222 GHz
 10.28 dBrm
 Occ Bw

 1.9097378 GHz
 9.66 dBrm

 Marker
 Trc
 X-value
 Y-value
 Function


 M1
 1
 1.90797 GHz
 15.37 dBm

 T1
 1
 1.9052433 GHz
 9.88 dBm
 Occ Bw


 T2
 1
 1.9097378 GHz
 8.77 dBm
 8.77 dBm
 Type Ref Trc Function Result Function Result 4.485514486 MHz 4.495504496 MHz Date: 17.MAY.2020 15:52:03 Date: 17.MAY.2020 15:52:15

Report No. :FG021246-01B

TEL: 886-3-327-3456 Page Number : A2-14 of 39

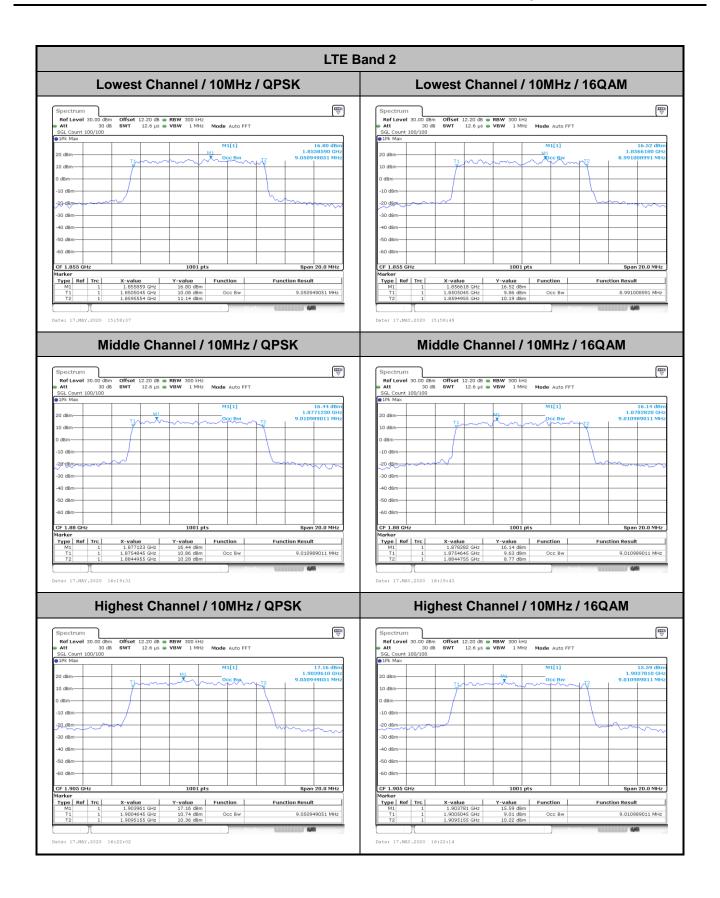


TEL: 886-3-327-3456 Page Number : A2-15 of 39 FAX: 886-3-328-4978

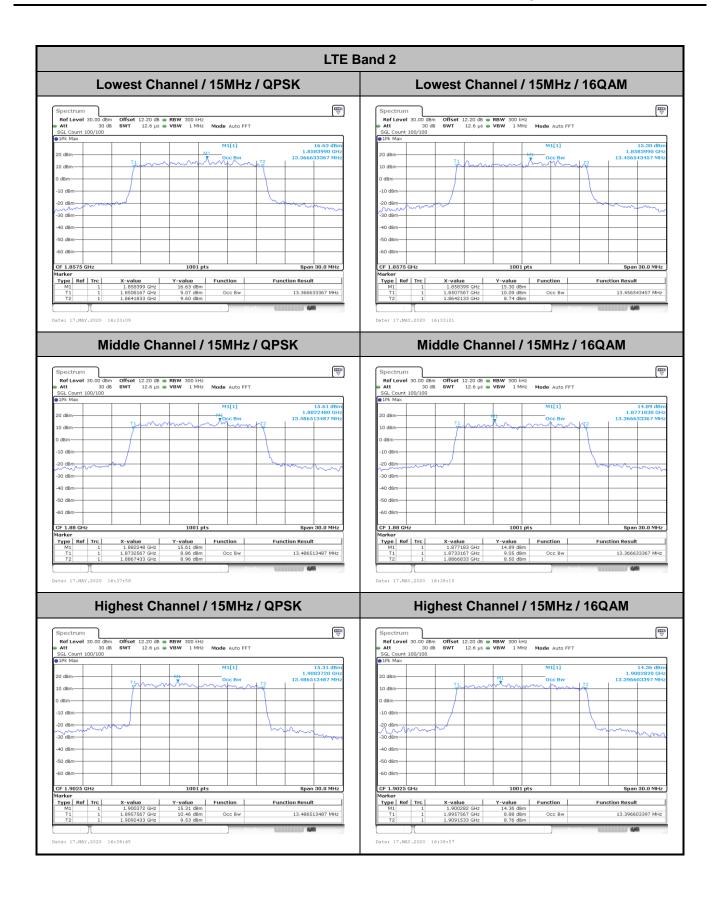


TEL: 886-3-327-3456 Page Number : A2-16 of 39 FAX: 886-3-328-4978




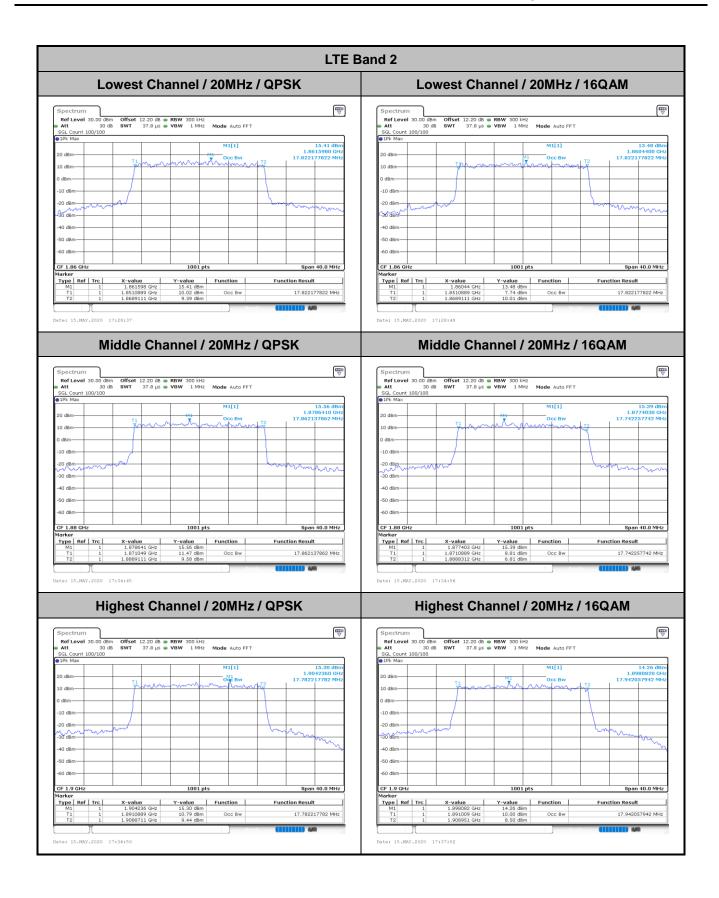


TEL: 886-3-327-3456 Page Number : A2-17 of 39

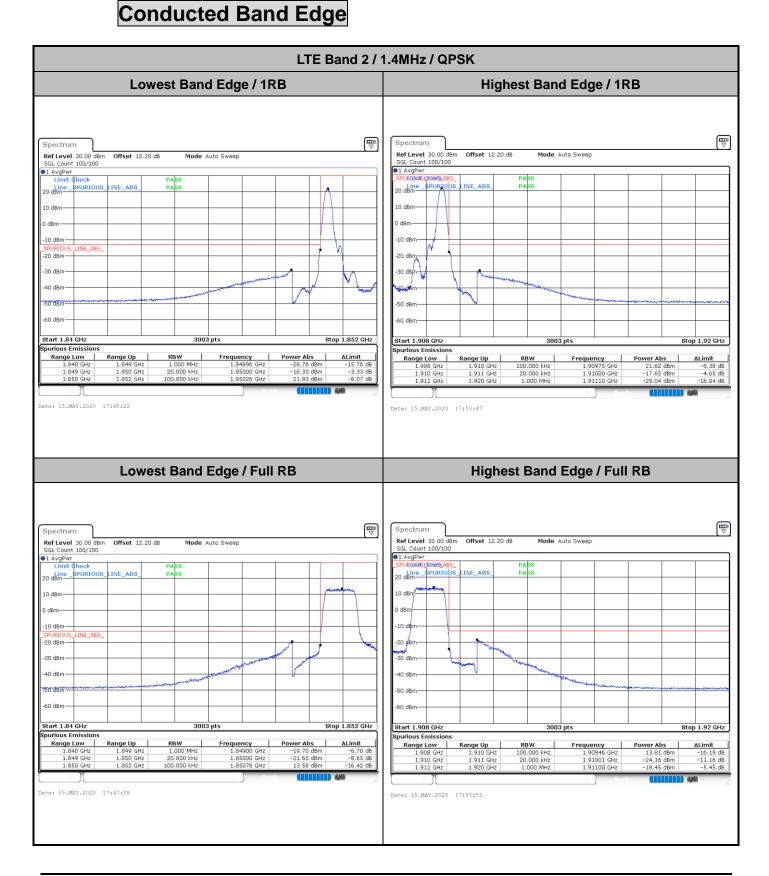


TEL: 886-3-327-3456 Page Number: A2-18 of 39 FAX: 886-3-328-4978

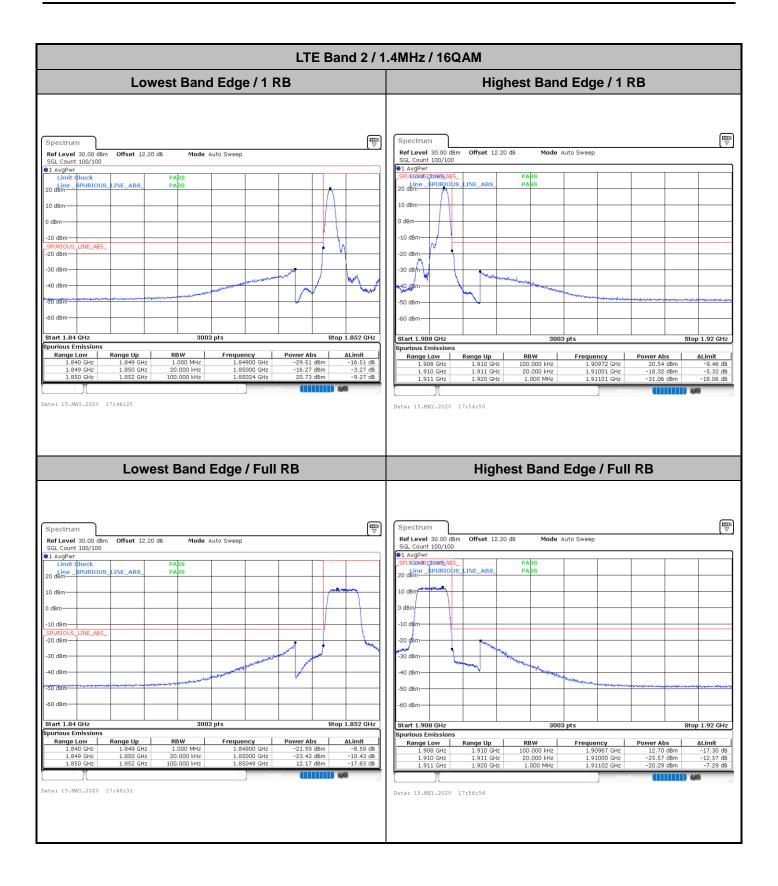


TEL: 886-3-327-3456 Page Number: A2-19 of 39

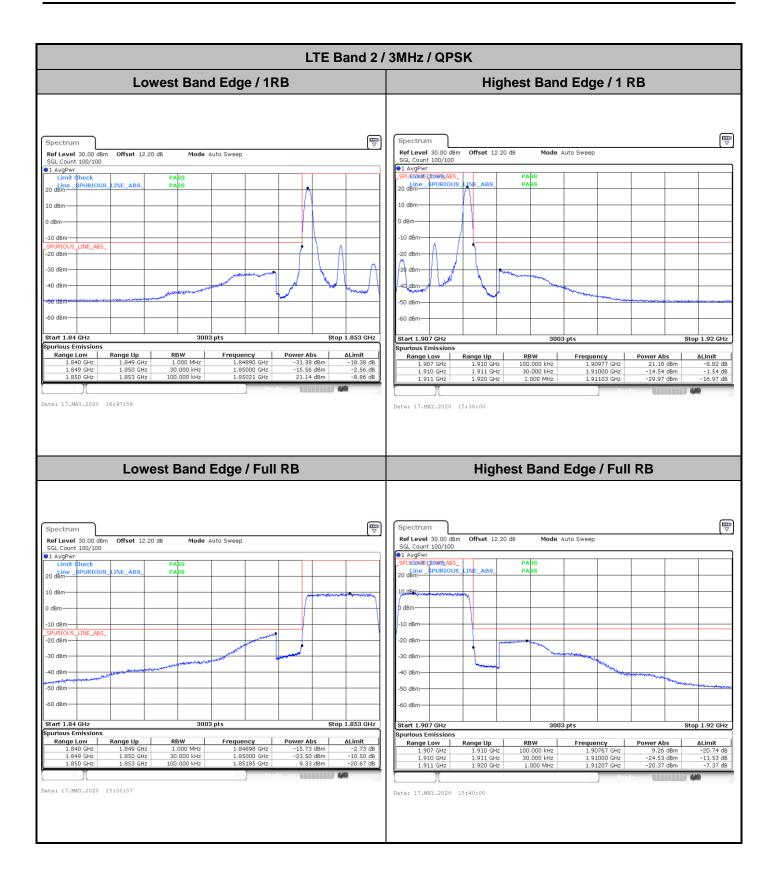


TEL: 886-3-327-3456 Page Number: A2-20 of 39

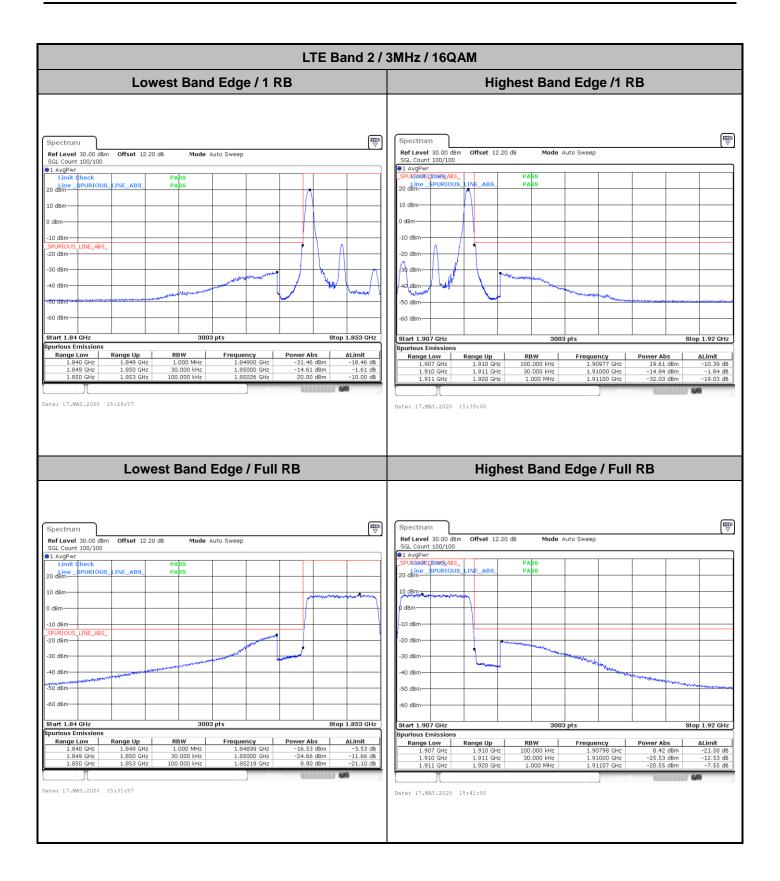

TEL: 886-3-327-3456 Page Number : A2-21 of 39

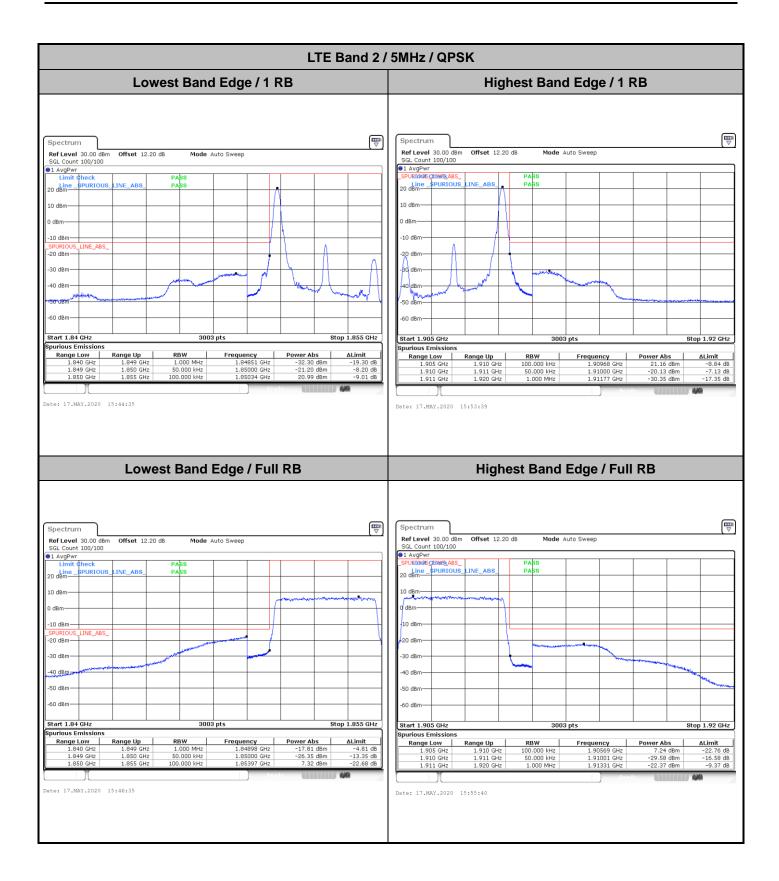

TEL: 886-3-327-3456 Page Number : A2-22 of 39

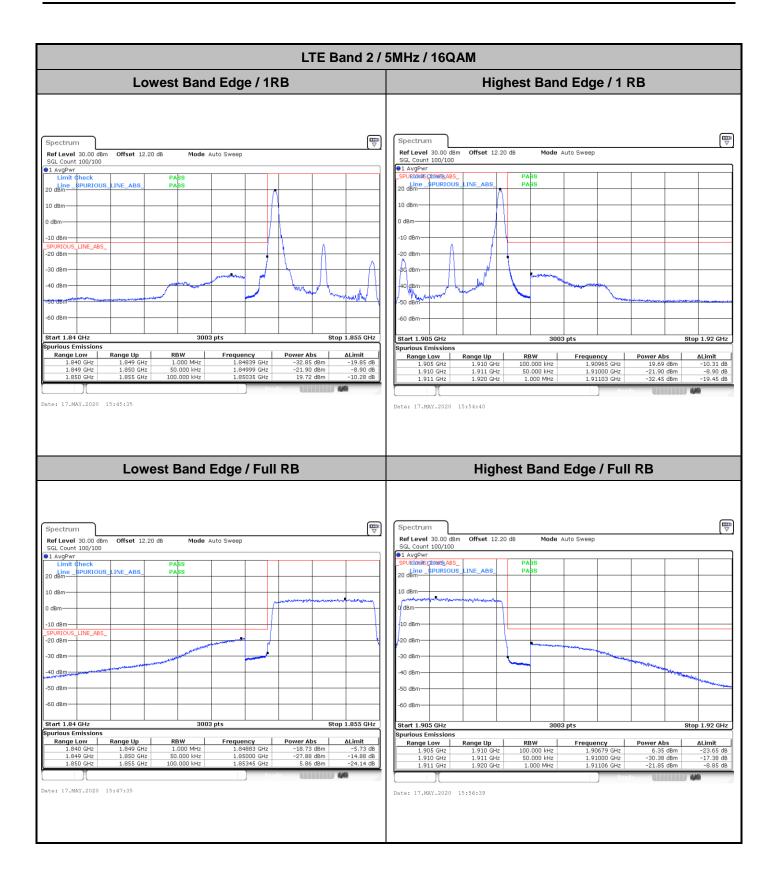

TEL: 886-3-327-3456 Page Number: A2-23 of 39