

## **APPENDIX B – TEST DATA OF RADIATED EMISSION**

### **Radiated Emission Band Edge**

The measurement results are obtained as described below:

Measure Level = Reading Level + cable loss + antenna factor

Sample calculation: (93.54 dBuV/m) = (45.74 dBμV) + (12.4 dB) + (35.4 dB), the corresponding frequency is 5180MHz.

The measurement results contain the correction factor of the duty cycle.

Carrier frequency (MHz): 5180 MHz

Channel No.:36

Test Mode: 802.11a

Polarity:Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5180	93.54	45.74	N/A	N/A	12.40	35.40
2	5150	49.40	1.60	-18.80	68.20	12.40	35.40

Carrier frequency (MHz): 5180

Channel No.:36

Test Mode: 802.11a

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5180	92.52	44.72	N/A	N/A	12.40	35.40
2	5150	48.94	1.14	-19.26	68.20	12.40	35.40

Carrier frequency (MHz): 5180 MHz

Channel No.: 36

Test Mode: 802.11a

Polarity:Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5180	91.62	43.82	N/A	N/A	12.40	35.40
2	5150	40.98	-6.82	-13.02	54.00	12.40	35.40

Carrier frequency (MHz): 5180 MHz  
Channel No.: 36  
Test Mode: 802.11a  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5180	89.89	42.09	N/A	N/A	12.40	35.40
2	5150	40.36	-7.44	-13.64	54.00	12.40	35.40

Carrier frequency (MHz): 5240 MHz  
Channel No.:48  
Test Mode: 802.11a  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5240	92.45	44.65	N/A	N/A	12.40	35.40
2	5250	50.21	2.41	-17.99	68.20	12.40	35.40

Carrier frequency (MHz): 5240 MHz  
Channel No.:48  
Test Mode: 802.11a  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5240	89.58	41.78	N/A	N/A	12.40	35.40
2	5250	49.57	1.77	-18.63	68.20	12.40	35.40

Carrier frequency (MHz): 5240 MHz  
Channel No.:48  
Test Mode: 802.11a  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5240	90.86	43.06	N/A	N/A	12.40	35.40
2	5250	39.22	-8.58	-14.78	54.00	12.40	35.40

Carrier frequency (MHz): 5240 MHz  
Channel No.:48  
Test Mode: 802.11a  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5240	88.75	40.95	N/A	N/A	12.40	35.40
2	5250	38.10	-9.70	-15.90	54.00	12.40	35.40

Carrier frequency (MHz): 5180 MHz  
Channel No.:36  
Test Mode: 802.11n (HT20)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5180	92.78	44.98	N/A	N/A	12.40	35.40
2	5150	50.50	2.70	-17.70	68.20	12.40	35.40

Carrier frequency (MHz): 5180 MHz  
Channel No.:36  
Test Mode: 802.11n (HT20)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5180	90.42	42.62	N/A	N/A	12.40	35.40
2	5150	49.00	1.20	-19.20	68.20	12.40	35.40

Carrier frequency (MHz): 5180 MHz  
Channel No.: 36  
Test Mode: 802.11n (HT20)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5180	91.09	43.29	N/A	N/A	12.40	35.40
2	5150	39.26	-8.54	-14.74	54.00	12.40	35.40

Carrier frequency (MHz): 5180 MHz  
Channel No.: 36  
Test Mode: 802.11n (HT20)  
Polarity: Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5180	88.80	41.00	N/A	N/A	12.40	35.40
2	5150	38.66	-9.14	-15.34	54.00	12.40	35.40

Carrier frequency (MHz): 5240 MHz  
Channel No.: 48  
Test Mode: 802.11n (HT20)  
Polarity: Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5240	92.69	44.89	N/A	N/A	12.40	35.40
2	5250	49.72	1.92	-18.48	68.20	12.40	35.40

Carrier frequency (MHz): 5240 MHz  
Channel No.: 48  
Test Mode: 802.11n (HT20)  
Polarity: Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5240	91.14	43.34	N/A	N/A	12.40	35.40
2	5250	48.84	1.04	-19.36	68.20	12.40	35.40

Carrier frequency (MHz): 5240 MHz  
Channel No.: 48  
Test Mode: 802.11n (HT20)  
Polarity: Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5240	90.50	42.70	N/A	N/A	12.40	35.40
2	5250	39.13	-8.67	-14.87	54.00	12.40	35.40

Carrier frequency (MHz): 5240 MHz  
Channel No.:48  
Test Mode: 802.11n (HT20)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5240	88.98	41.18	N/A	N/A	12.40	35.40
2	5250	39.04	-8.76	-14.96	54.00	12.40	35.40

Carrier frequency (MHz): 5180 MHz  
Channel No.:36  
Test Mode: 802.11ac (VHT20)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5180	93.89	46.09	N/A	N/A	12.40	35.40
2	5150	49.74	1.94	-18.46	68.20	12.40	35.40

Carrier frequency (MHz): 5180 MHz  
Channel No.:36  
Test Mode: 802.11ac (VHT20)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5180	91.72	43.92	N/A	N/A	12.40	35.40
2	5150	49.73	1.93	-18.47	68.20	12.40	35.40

Carrier frequency (MHz): 5180 MHz  
Channel No.: 36  
Test Mode: 802.11ac (VHT20)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5180	90.08	42.28	N/A	N/A	12.40	35.40
2	5150	40.11	-7.69	-13.89	54.00	12.40	35.40

Carrier frequency (MHz): 5180 MHz  
Channel No.: 36  
Test Mode: 802.11ac (VHT20)  
Polarity: Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5180	88.89	41.09	N/A	N/A	12.40	35.40
2	5150	39.12	-8.68	-14.88	54.00	12.40	35.40

Carrier frequency (MHz): 5240 MHz  
Channel No.: 48  
Test Mode: 802.11ac (VHT20)  
Polarity: Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5240	92.79	44.99	N/A	N/A	12.40	35.40
2	5250	49.44	1.64	-18.76	68.20	12.40	35.40

Carrier frequency (MHz): 5240 MHz  
Channel No.: 48  
Test Mode: 802.11ac (VHT20)  
Polarity: Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5240	91.12	43.32	N/A	N/A	12.40	35.40
2	5250	49.37	1.57	-18.83	68.20	12.40	35.40

Carrier frequency (MHz): 5240 MHz  
Channel No.: 48  
Test Mode: 802.11ac (VHT20)  
Polarity: Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5240	90.12	42.32	N/A	N/A	12.40	35.40
2	5250	40.80	-7.00	-13.20	54.00	12.40	35.40

Carrier frequency (MHz): 5240 MHz  
Channel No.:48  
Test Mode: 802.11ac (VHT20)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5240	87.74	39.94	N/A	N/A	12.40	35.40
2	5250	39.18	-8.62	-14.82	54.00	12.40	35.40

Carrier frequency (MHz): 5180 MHz  
Channel No.:36  
Test Mode: 802.11 ax (HE20)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5180	93.43	45.63	N/A	N/A	12.40	35.40
2	5150	49.46	1.66	-18.74	68.20	12.40	35.40

Carrier frequency (MHz): 5180 MHz  
Channel No.:36  
Test Mode: 802.11 ax (HE20)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5180	91.46	43.66	N/A	N/A	12.40	35.40
2	5150	48.82	1.02	-19.38	68.20	12.40	35.40

Carrier frequency (MHz): 5180 MHz  
Channel No.: 36  
Test Mode: 802.11 ax (HE20)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5180	91.40	43.60	N/A	N/A	12.40	35.40
2	5150	39.08	-8.72	-14.92	54.00	12.40	35.40

Carrier frequency (MHz): 5180 MHz  
Channel No.: 36  
Test Mode: 802.11 ax (HE20)  
Polarity: Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5180	89.14	41.34	N/A	N/A	12.40	35.40
2	5150	37.56	-10.24	-16.44	54.00	12.40	35.40

Carrier frequency (MHz): 5240 MHz  
Channel No.: 48  
Test Mode: 802.11 ax (HE20)  
Polarity: Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5240	92.87	45.07	N/A	N/A	12.40	35.40
2	5250	50.15	2.35	-18.05	68.20	12.40	35.40

Carrier frequency (MHz): 5240 MHz  
Channel No.: 48  
Test Mode: 802.11 ax (HE20)  
Polarity: Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5240	90.23	42.43	N/A	N/A	12.40	35.40
2	5250	48.77	0.97	-19.43	68.20	12.40	35.40

Carrier frequency (MHz): 5240 MHz  
Channel No.: 48  
Test Mode: 802.11 ax (HE20)  
Polarity: Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5240	91.89	44.09	N/A	N/A	12.40	35.40
2	5250	39.26	-8.54	-14.74	54.00	12.40	35.40



Carrier frequency (MHz): 5240 MHz  
Channel No.:48  
Test Mode: 802.11ax (HE20)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5240	89.61	41.81	N/A	N/A	12.40	35.40
2	5250	37.98	-9.82	-16.02	54.00	12.40	35.40

Carrier frequency (MHz): 5190 MHz  
Channel No.:38  
Test Mode: 802.11n (HT40)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5190	92.74	44.94	N/A	N/A	12.40	35.40
2	5150	49.79	1.99	-18.41	68.20	12.40	35.40

Carrier frequency (MHz): 5190 MHz  
Channel No.:38  
Test Mode: 802.11n (HT40)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5190	90.56	42.76	N/A	N/A	12.40	35.40
2	5150	48.59	0.79	-19.61	68.20	12.40	35.40

Carrier frequency (MHz): 5190 MHz  
Channel No.:38  
Test Mode: 802.11n (HT40)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5190	90.14	42.34	N/A	N/A	12.40	35.40
2	5150	40.13	-7.67	-13.87	54.00	12.40	35.40

Carrier frequency (MHz): 5190 MHz  
Channel No.:38  
Test Mode: 802.11n (HT40)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5190	88.94	41.14	N/A	N/A	12.40	35.40
2	5150	39.38	-8.42	-14.62	54.00	12.40	35.40

Carrier frequency (MHz): 5230 MHz  
Channel No.:46  
Test Mode: 802.11n (HT40)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5230	93.33	45.53	N/A	N/A	12.40	35.40
2	5250	50.80	3.00	-17.40	68.20	12.40	35.40

Carrier frequency (MHz): 5230 MHz  
Channel No.:46  
Test Mode: 802.11n (HT40)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5230	90.50	42.70	N/A	N/A	12.40	35.40
2	5250	48.91	1.11	-19.29	68.20	12.40	35.40

Carrier frequency (MHz): 5230 MHz  
Channel No.:46  
Test Mode: 802.11n (HT40)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5230	91.11	43.31	N/A	N/A	12.40	35.40
2	5250	40.07	-7.73	-13.93	54.00	12.40	35.40

Carrier frequency (MHz): 5230 MHz  
Channel No.:46  
Test Mode: 802.11n (HT40)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5230	89.17	41.37	N/A	N/A	12.40	35.40
2	5250	39.16	-8.64	-14.84	54.00	12.40	35.40

Carrier frequency (MHz): 5190 MHz  
Channel No.:38  
Test Mode: 802.11ac (VHT40)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5190	93.97	46.17	N/A	N/A	12.40	35.40
2	5150	50.49	2.69	-17.71	68.20	12.40	35.40

Carrier frequency (MHz): 5190 MHz  
Channel No.:38  
Test Mode: 802.11ac (VHT40)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5190	92.67	44.87	N/A	N/A	12.40	35.40
2	5150	49.84	2.04	-18.36	68.20	12.40	35.40

Carrier frequency (MHz): 5190 MHz  
Channel No.:38  
Test Mode: 802.11ac (VHT40)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5190	90.69	42.89	N/A	N/A	12.40	35.40
2	5150	40.29	-7.51	-13.71	54.00	12.40	35.40

Carrier frequency (MHz): 5190 MHz  
Channel No.:38  
Test Mode: 802.11ac (VHT40)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5190	88.01	40.21	N/A	N/A	12.40	35.40
2	5150	40.20	-7.60	-13.80	54.00	12.40	35.40

Carrier frequency (MHz): 5230 MHz  
Channel No.:46  
Test Mode: 802.11ac (VHT40)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5230	92.25	44.45	N/A	N/A	12.40	35.40
2	5250	50.12	2.32	-18.08	68.20	12.40	35.40

Carrier frequency (MHz): 5230 MHz  
Channel No.:46  
Test Mode: 802.11ac (VHT40)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5230	90.10	42.30	N/A	N/A	12.40	35.40
2	5250	48.33	0.53	-19.87	68.20	12.40	35.40

Carrier frequency (MHz): 5230 MHz  
Channel No.:46  
Test Mode: 802.11ac (VHT40)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5230	90.85	43.05	N/A	N/A	12.40	35.40
2	5250	40.80	-7.00	-13.20	54.00	12.40	35.40

Carrier frequency (MHz): 5230 MHz  
Channel No.:46  
Test Mode: 802.11ac (VHT40)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5230	88.86	41.06	N/A	N/A	12.40	35.40
2	5250	40.54	-7.26	-13.46	54.00	12.40	35.40

Carrier frequency (MHz): 5190 MHz  
Channel No.:38  
Test Mode: 802.11 ax (HE40)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5190	94.00	46.20	N/A	N/A	12.40	35.40
2	5150	49.99	2.19	-18.21	68.20	12.40	35.40

Carrier frequency (MHz): 5190 MHz  
Channel No.:38  
Test Mode: 802.11 ax (HE40)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5190	91.64	43.84	N/A	N/A	12.40	35.40
2	5150	49.80	2.00	-18.40	68.20	12.40	35.40

Carrier frequency (MHz): 5190 MHz  
Channel No.:38  
Test Mode: 802.11 ax (HE40)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5190	90.20	42.40	N/A	N/A	12.40	35.40
2	5150	39.96	-7.84	-14.04	54.00	12.40	35.40

Carrier frequency (MHz): 5190 MHz  
Channel No.:38  
Test Mode: 802.11 ax (HE40)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5190	87.99	40.19	N/A	N/A	12.40	35.40
2	5150	37.99	-9.81	-16.01	54.00	12.40	35.40

Carrier frequency (MHz): 5230 MHz  
Channel No.:46  
Test Mode: 802.11 ax (HE40)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5230	92.43	44.63	N/A	N/A	12.40	35.40
2	5250	50.13	2.33	-18.07	68.20	12.40	35.40

Carrier frequency (MHz): 5230 MHz  
Channel No.:46  
Test Mode: 802.11 ax (HE40)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5230	90.44	42.64	N/A	N/A	12.40	35.40
2	5250	48.87	1.07	-19.33	68.20	12.40	35.40

Carrier frequency (MHz): 5230 MHz  
Channel No.:46  
Test Mode: 802.11 ax (HE40)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5230	90.46	42.66	N/A	N/A	12.40	35.40
2	5250	40.67	-7.13	-13.33	54.00	12.40	35.40

Carrier frequency (MHz): 5230 MHz  
Channel No.:46  
Test Mode: 802.11ax (HE40)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5230	87.79	39.99	N/A	N/A	12.40	35.40
2	5250	40.01	-7.79	-13.99	54.00	12.40	35.40

Carrier frequency (MHz): 5210 MHz  
Channel No.:42  
Test Mode: 802.11ac (VHT80)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5210	89.50	41.70	N/A	N/A	12.40	35.40
2	5150	49.07	1.27	-19.13	68.20	12.40	35.40

Carrier frequency (MHz): 5210 MHz  
Channel No.:42  
Test Mode: 802.11ac (VHT80)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5210	87.98	40.18	N/A	N/A	12.40	35.40
2	5150	47.85	0.05	-20.35	68.20	12.40	35.40

Carrier frequency (MHz): 5210 MHz  
Channel No.:42  
Test Mode: 802.11ac (VHT80)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5210	87.35	39.55	N/A	N/A	12.40	35.40
2	5150	40.43	-7.37	-13.57	54.00	12.40	35.40

Carrier frequency (MHz): 5210 MHz  
Channel No.:42  
Test Mode: 802.11ac (VHT80)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5210	84.37	36.57	N/A	N/A	12.40	35.40
2	5150	40.22	-7.58	-13.78	54.00	12.40	35.40

Carrier frequency (MHz): 5210 MHz  
Channel No.:42  
Test Mode: 802.11 ax (HE80)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5210	90.29	42.49	N/A	N/A	12.40	35.40
2	5150	49.06	1.26	-19.14	68.20	12.40	35.40

Carrier frequency (MHz): 5210 MHz  
Channel No.:42  
Test Mode: 802.11 ax (HE80)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5210	87.68	39.88	N/A	N/A	12.40	35.40
2	5150	47.51	-0.29	-20.69	68.20	12.40	35.40

Carrier frequency (MHz): 5210 MHz  
Channel No.:42  
Test Mode: 802.11 ax (HE80)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5210	87.37	39.57	N/A	N/A	12.40	35.40
2	5150	40.27	-7.53	-13.73	54.00	12.40	35.40



Carrier frequency (MHz): 5210 MHz  
Channel No.:42  
Test Mode: 802.11ax (HE80)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5210	84.92	37.12	N/A	N/A	12.40	35.40
2	5150	39.46	-8.34	-14.54	54.00	12.40	35.40

Carrier frequency (MHz): 5260 MHz  
Channel No.:52  
Test Mode: 802.11a  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5260	93.96	45.96	N/A	N/A	12.60	35.40
2	5240	50.70	2.70	-17.50	68.20	12.60	35.40

Carrier frequency (MHz): 5260 MHz  
Channel No.:52  
Test Mode: 802.11a  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5260	93.58	45.58	N/A	N/A	12.60	35.40
2	5240	48.93	0.93	-19.27	68.20	12.60	35.40

Carrier frequency (MHz): 5260 MHz  
Channel No.:52  
Test Mode: 802.11a  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5260	89.52	41.52	N/A	N/A	12.60	35.40
2	5240	40.24	-7.76	-13.76	54.00	12.60	35.40

Carrier frequency (MHz): 5260 MHz  
Channel No.:52  
Test Mode: 802.11a  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5260	86.68	38.68	N/A	N/A	12.60	35.40
2	5240	39.80	-8.20	-14.20	54.00	12.60	35.40

Carrier frequency (MHz): 5320 MHz  
Channel No.:64  
Test Mode: 802.11a  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5320	93.49	45.49	N/A	N/A	12.60	35.40
2	5340	51.39	3.39	-16.81	68.20	12.60	35.40

Carrier frequency (MHz): 5320 MHz  
Channel No.:64  
Test Mode: 802.11a  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5320	93.37	45.37	N/A	N/A	12.60	35.40
2	5340	50.61	2.61	-17.59	68.20	12.60	35.40

Carrier frequency (MHz): 5320 MHz  
Channel No.:64  
Test Mode: 802.11a  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5320	90.34	42.34	N/A	N/A	12.60	35.40
2	5340	41.84	-6.16	-12.16	54.00	12.60	35.40

Carrier frequency (MHz): 5320 MHz  
Channel No.:64  
Test Mode: 802.11a  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5320	88.25	40.25	N/A	N/A	12.60	35.40
2	5340	40.31	-7.69	-13.69	54.00	12.60	35.40

Carrier frequency (MHz): 5260 MHz  
Channel No.:52  
Test Mode: 802.11n (HT20)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5260	93.75	45.75	N/A	N/A	12.60	35.40
2	5240	50.76	2.76	-17.44	68.20	12.60	35.40

Carrier frequency (MHz): 5260 MHz  
Channel No.:52  
Test Mode: 802.11n (HT20)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5260	93.03	45.03	N/A	N/A	12.60	35.40
2	5240	49.51	1.51	-18.69	68.20	12.60	35.40

Carrier frequency (MHz): 5260 MHz  
Channel No.:52  
Test Mode: 802.11n (HT20)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5260	89.20	41.20	N/A	N/A	12.60	35.40
2	5240	40.14	-7.86	-13.86	54.00	12.60	35.40

Carrier frequency (MHz): 5260 MHz  
Channel No.:52  
Test Mode: 802.11n (HT20)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5260	87.33	39.33	N/A	N/A	12.60	35.40
2	5240	40.01	-7.99	-13.99	54.00	12.60	35.40

Carrier frequency (MHz): 5320 MHz  
Channel No.:64  
Test Mode: 802.11n (HT20)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5320	93.85	45.85	N/A	N/A	12.60	35.40
2	5340	50.32	2.32	-17.88	68.20	12.60	35.40

Carrier frequency (MHz): 5320 MHz  
Channel No.:64  
Test Mode: 802.11n (HT20)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5320	94.22	46.22	N/A	N/A	12.60	35.40
2	5340	48.37	0.37	-19.83	68.20	12.60	35.40

Carrier frequency (MHz): 5320 MHz  
Channel No.:64  
Test Mode: 802.11n (HT20)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5320	90.80	42.80	N/A	N/A	12.60	35.40
2	5340	40.90	-7.10	-13.10	54.00	12.60	35.40

Carrier frequency (MHz): 5320 MHz  
Channel No.:64  
Test Mode: 802.11n (HT20)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5320	89.21	41.21	N/A	N/A	12.60	35.40
2	5340	39.86	-8.14	-14.14	54.00	12.60	35.40

Carrier frequency (MHz): 5260 MHz  
Channel No.:52  
Test Mode: 802.11ac (VHT20)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5260	93.42	45.42	N/A	N/A	12.60	35.40
2	5240	50.47	2.47	-17.73	68.20	12.60	35.40

Carrier frequency (MHz): 5260 MHz  
Channel No.:52  
Test Mode: 802.11ac (VHT20)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5260	94.12	46.12	N/A	N/A	12.60	35.40
2	5240	49.80	1.80	-18.40	68.20	12.60	35.40

Carrier frequency (MHz): 5260 MHz  
Channel No.:52  
Test Mode: 802.11ac (VHT20)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5260	89.90	41.90	N/A	N/A	12.60	35.40
2	5240	41.68	-6.32	-12.32	54.00	12.60	35.40

Carrier frequency (MHz): 5260 MHz  
Channel No.:52  
Test Mode: 802.11ac (VHT20)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5260	88.70	40.70	N/A	N/A	12.60	35.40
2	5240	41.46	-6.54	-12.54	54.00	12.60	35.40

Carrier frequency (MHz): 5320 MHz  
Channel No.:64  
Test Mode: 802.11ac (VHT20)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5320	92.02	44.02	N/A	N/A	12.60	35.40
2	5340	51.84	3.84	-16.36	68.20	12.60	35.40

Carrier frequency (MHz): 5320 MHz  
Channel No.:64  
Test Mode: 802.11ac (VHT20)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5320	91.04	43.04	N/A	N/A	12.60	35.40
2	5340	51.07	3.07	-17.13	68.20	12.60	35.40

Carrier frequency (MHz): 5320 MHz  
Channel No.:64  
Test Mode: 802.11ac (VHT20)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5320	90.52	42.52	N/A	N/A	12.60	35.40
2	5340	41.70	-6.30	-12.30	54.00	12.60	35.40

Carrier frequency (MHz): 5320 MHz  
Channel No.:64  
Test Mode: 802.11ac (VHT20)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5320	88.78	40.78	N/A	N/A	12.60	35.40
2	5340	40.05	-7.95	-13.95	54.00	12.60	35.40

Carrier frequency (MHz): 5260 MHz  
Channel No.:52  
Test Mode: 802.11 ax (HE20)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5260	92.57	44.57	N/A	N/A	12.60	35.40
2	5240	51.35	3.35	-16.85	68.20	12.60	35.40

Carrier frequency (MHz): 5260 MHz  
Channel No.:52  
Test Mode: 802.11 ax (HE20)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5260	93.49	45.49	N/A	N/A	12.60	35.40
2	5240	50.17	2.17	-18.03	68.20	12.60	35.40

Carrier frequency (MHz): 5260 MHz  
Channel No.:52  
Test Mode: 802.11 ax (HE20)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5260	89.56	41.56	N/A	N/A	12.60	35.40
2	5240	41.06	-6.94	-12.94	54.00	12.60	35.40

Carrier frequency (MHz): 5260 MHz  
Channel No.:52  
Test Mode: 802.11 ax (HE20)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5260	87.75	39.75	N/A	N/A	12.60	35.40
2	5240	40.95	-7.05	-13.05	54.00	12.60	35.40

Carrier frequency (MHz): 5320 MHz  
Channel No.:64  
Test Mode: 802.11 ax (HE20)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5320	93.17	45.17	N/A	N/A	12.60	35.40
2	5340	50.50	2.50	-17.70	68.20	12.60	35.40

Carrier frequency (MHz): 5320 MHz  
Channel No.:64  
Test Mode: 802.11 ax (HE20)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5320	92.57	44.57	N/A	N/A	12.60	35.40
2	5340	48.73	0.73	-19.47	68.20	12.60	35.40

Carrier frequency (MHz): 5320 MHz  
Channel No.:64  
Test Mode: 802.11 ax (HE20)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5320	89.53	41.53	N/A	N/A	12.60	35.40
2	5340	41.76	-6.24	-12.24	54.00	12.60	35.40



Carrier frequency (MHz): 5320 MHz  
Channel No.:64  
Test Mode: 802.11ax (HE20)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5320	86.64	38.64	N/A	N/A	12.60	35.40
2	5340	41.54	-6.46	-12.46	54.00	12.60	35.40

Carrier frequency (MHz): 5270 MHz  
Channel No.:54  
Test Mode: 802.11n (HT40)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5270	93.43	45.43	N/A	N/A	12.60	35.40
2	5230	51.67	3.67	-16.53	68.20	12.60	35.40

Carrier frequency (MHz): 5270 MHz  
Channel No.:54  
Test Mode: 802.11n (HT40)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5270	93.93	45.93	N/A	N/A	12.60	35.40
2	5230	51.63	3.63	-16.57	68.20	12.60	35.40

Carrier frequency (MHz): 5270 MHz  
Channel No.:54  
Test Mode: 802.11n (HT40)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5270	90.73	42.73	N/A	N/A	12.60	35.40
2	5230	41.04	-6.96	-12.96	54.00	12.60	35.40

Carrier frequency (MHz): 5270 MHz  
Channel No.:54  
Test Mode: 802.11n (HT40)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5270	89.48	41.48	N/A	N/A	12.60	35.40
2	5230	40.59	-7.41	-13.41	54.00	12.60	35.40

Carrier frequency (MHz): 5310 MHz  
Channel No.:62  
Test Mode: 802.11n (HT40)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5310	93.20	45.20	N/A	N/A	12.60	35.40
2	5350	50.60	2.60	-17.60	68.20	12.60	35.40

Carrier frequency (MHz): 5310 MHz  
Channel No.:62  
Test Mode: 802.11n (HT40)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5310	92.35	44.35	N/A	N/A	12.60	35.40
2	5350	48.76	0.76	-19.44	68.20	12.60	35.40

Carrier frequency (MHz): 5310 MHz  
Channel No.:62  
Test Mode: 802.11n (HT40)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5310	90.70	42.70	N/A	N/A	12.60	35.40
2	5350	41.30	-6.70	-12.70	54.00	12.60	35.40

Carrier frequency (MHz): 5310 MHz  
Channel No.:62  
Test Mode: 802.11n (HT40)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5310	87.85	39.85	N/A	N/A	12.60	35.40
2	5350	41.18	-6.82	-12.82	54.00	12.60	35.40

Carrier frequency (MHz): 5270 MHz  
Channel No.:54  
Test Mode: 802.11ac (VHT40)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5270	93.03	45.03	N/A	N/A	12.60	35.40
2	5230	51.45	3.45	-16.75	68.20	12.60	35.40

Carrier frequency (MHz): 5270 MHz  
Channel No.:54  
Test Mode: 802.11ac (VHT40)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5270	92.37	44.37	N/A	N/A	12.60	35.40
2	5230	50.67	2.67	-17.53	68.20	12.60	35.40

Carrier frequency (MHz): 5270 MHz  
Channel No.:54  
Test Mode: 802.11ac (VHT40)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5270	89.71	41.71	N/A	N/A	12.60	35.40
2	5230	40.77	-7.23	-13.23	54.00	12.60	35.40

Carrier frequency (MHz): 5270 MHz  
Channel No.:54  
Test Mode: 802.11ac (VHT40)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5270	88.17	40.17	N/A	N/A	12.60	35.40
2	5230	38.79	-9.21	-15.21	54.00	12.60	35.40

Carrier frequency (MHz): 5310 MHz  
Channel No.:62  
Test Mode: 802.11ac (VHT40)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5310	92.85	44.85	N/A	N/A	12.60	35.40
2	5350	51.04	3.04	-17.16	68.20	12.60	35.40

Carrier frequency (MHz): 5310 MHz  
Channel No.:62  
Test Mode: 802.11ac (VHT40)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5310	92.43	44.43	N/A	N/A	12.60	35.40
2	5350	50.55	2.55	-17.65	68.20	12.60	35.40

Carrier frequency (MHz): 5310 MHz  
Channel No.:62  
Test Mode: 802.11ac (VHT40)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5310	89.31	41.31	N/A	N/A	12.60	35.40
2	5350	40.72	-7.28	-13.28	54.00	12.60	35.40

Carrier frequency (MHz): 5310 MHz  
Channel No.:62  
Test Mode: 802.11ac (VHT40)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5310	87.26	39.26	N/A	N/A	12.60	35.40
2	5350	38.75	-9.25	-15.25	54.00	12.60	35.40

Carrier frequency (MHz): 5270 MHz  
Channel No.:54  
Test Mode: 802.11 ax (HE40)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5270	92.45	44.45	N/A	N/A	12.60	35.40
2	5230	51.92	3.92	-16.28	68.20	12.60	35.40

Carrier frequency (MHz): 5270 MHz  
Channel No.:54  
Test Mode: 802.11 ax (HE40)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5270	90.35	42.35	N/A	N/A	12.60	35.40
2	5230	49.60	1.60	-18.60	68.20	12.60	35.40

Carrier frequency (MHz): 5270 MHz  
Channel No.:54  
Test Mode: 802.11 ax (HE40)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5270	89.19	41.19	N/A	N/A	12.60	35.40
2	5230	41.19	-6.81	-12.81	54.00	12.60	35.40

Carrier frequency (MHz): 5270 MHz  
Channel No.:54  
Test Mode: 802.11 ax (HE40)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5270	86.88	38.88	N/A	N/A	12.60	35.40
2	5230	39.24	-8.76	-14.76	54.00	12.60	35.40

Carrier frequency (MHz): 5310 MHz  
Channel No.:62  
Test Mode: 802.11 ax (HE40)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5310	92.13	44.13	N/A	N/A	12.60	35.40
2	5350	50.10	2.10	-18.10	68.20	12.60	35.40

Carrier frequency (MHz): 5310 MHz  
Channel No.:62  
Test Mode: 802.11 ax (HE40)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5310	90.07	42.07	N/A	N/A	12.60	35.40
2	5350	49.84	1.84	-18.36	68.20	12.60	35.40

Carrier frequency (MHz): 5310 MHz  
Channel No.:62  
Test Mode: 802.11 ax (HE40)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5310	90.07	42.07	N/A	N/A	12.60	35.40
2	5350	41.02	-6.98	-12.98	54.00	12.60	35.40

Carrier frequency (MHz): 5310 MHz  
Channel No.:62  
Test Mode: 802.11ax (HE40)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5310	89.00	41.00	N/A	N/A	12.60	35.40
2	5350	40.21	-7.79	-13.79	54.00	12.60	35.40

Carrier frequency (MHz): 5290 MHz  
Channel No.:58  
Test Mode: 802.11ac (VHT80)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5290	89.39	41.39	N/A	N/A	12.60	35.40
2	5210	51.43	3.43	-16.77	68.20	12.60	35.40

Carrier frequency (MHz): 5290 MHz  
Channel No.:58  
Test Mode: 802.11ac (VHT80)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5290	88.38	40.38	N/A	N/A	12.60	35.40
2	5210	51.20	3.20	-17.00	68.20	12.60	35.40

Carrier frequency (MHz): 5290 MHz  
Channel No.:58  
Test Mode: 802.11ac (VHT80)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5290	86.16	38.16	N/A	N/A	12.60	35.40
2	5210	41.45	-6.55	-12.55	54.00	12.60	35.40

Carrier frequency (MHz): 5290 MHz  
Channel No.:58  
Test Mode: 802.11ac (VHT80)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5290	83.36	35.36	N/A	N/A	12.60	35.40
2	5210	40.13	-7.87	-13.87	54.00	12.60	35.40

Carrier frequency (MHz): 5290 MHz  
Channel No.:58  
Test Mode: 802.11 ax (HE80)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5290	89.98	41.98	N/A	N/A	12.60	35.40
2	5210	51.46	3.46	-16.74	68.20	12.60	35.40

Carrier frequency (MHz): 5290 MHz  
Channel No.:58  
Test Mode: 802.11 ax (HE80)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5290	88.34	40.34	N/A	N/A	12.60	35.40
2	5210	50.12	2.12	-18.08	68.20	12.60	35.40

Carrier frequency (MHz): 5290 MHz  
Channel No.:58  
Test Mode: 802.11 ax (HE80)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5290	87.05	39.05	N/A	N/A	12.60	35.40
2	5210	40.60	-7.40	-13.40	54.00	12.60	35.40



Carrier frequency (MHz): 5290 MHz  
Channel No.:58  
Test Mode: 802.11ax (HE80)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5290	85.87	37.87	N/A	N/A	12.60	35.40
2	5210	40.41	-7.59	-13.59	54.00	12.60	35.40

Carrier frequency (MHz): 5500 MHz  
Channel No.:100  
Test Mode: 802.11a  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5500	93.19	45.89	N/A	N/A	12.70	34.60
2	5480	51.43	4.13	-16.77	68.20	12.70	34.60

Carrier frequency (MHz): 5500 MHz  
Channel No.:100  
Test Mode: 802.11a  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5500	91.98	44.68	N/A	N/A	12.70	34.60
2	5480	51.33	4.03	-16.87	68.20	12.70	34.60

Carrier frequency (MHz): 5500 MHz  
Channel No.:100  
Test Mode: 802.11a  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5500	88.55	41.25	N/A	N/A	12.70	34.60
2	5480	41.04	-6.26	-12.96	54.00	12.70	34.60

Carrier frequency (MHz): 5500 MHz  
Channel No.:100  
Test Mode: 802.11a  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5500	86.70	39.40	N/A	N/A	12.70	34.60
2	5480	39.77	-7.53	-14.23	54.00	12.70	34.60

Carrier frequency (MHz): 5720 MHz  
Channel No.:144  
Test Mode: 802.11a  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5720	93.33	46.03	N/A	N/A	12.70	34.60
2	5740	52.52	5.22	-15.68	68.20	12.70	34.60

Carrier frequency (MHz): 5720 MHz  
Channel No.:144  
Test Mode: 802.11a  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5720	91.33	44.03	N/A	N/A	12.70	34.60
2	5740	51.14	3.84	-17.06	68.20	12.70	34.60

Carrier frequency (MHz): 5720 MHz  
Channel No.:144  
Test Mode: 802.11a  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5720	88.85	41.55	N/A	N/A	12.70	34.60
2	5740	41.69	-5.61	-12.31	54.00	12.70	34.60

Carrier frequency (MHz): 5720 MHz  
Channel No.:144  
Test Mode: 802.11a  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5720	84.59	37.29	N/A	N/A	12.70	34.60
2	5740	40.51	-6.79	-13.49	54.00	12.70	34.60

Carrier frequency (MHz): 5500 MHz  
Channel No.:100  
Test Mode: 802.11n (HT20)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5500	92.23	44.93	N/A	N/A	12.70	34.60
2	5480	51.01	3.71	-17.19	68.20	12.70	34.60

Carrier frequency (MHz): 5500 MHz  
Channel No.:100  
Test Mode: 802.11n (HT20)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5500	89.69	42.39	N/A	N/A	12.70	34.60
2	5480	50.41	3.11	-17.79	68.20	12.70	34.60

Carrier frequency (MHz): 5500 MHz  
Channel No.:100  
Test Mode: 802.11n (HT20)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5500	90.24	42.94	N/A	N/A	12.70	34.60
2	5480	40.59	-6.71	-13.41	54.00	12.70	34.60

Carrier frequency (MHz): 5500 MHz  
Channel No.:100  
Test Mode: 802.11n (HT20)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5500	87.52	40.22	N/A	N/A	12.70	34.60
2	5480	39.32	-7.98	-14.68	54.00	12.70	34.60

Carrier frequency (MHz): 5720 MHz  
Channel No.:144  
Test Mode: 802.11n (HT20)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5720	92.40	45.10	N/A	N/A	12.70	34.60
2	5740	51.82	4.52	-16.38	68.20	12.70	34.60

Carrier frequency (MHz): 5720 MHz  
Channel No.:144  
Test Mode: 802.11n (HT20)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5720	89.20	41.90	N/A	N/A	12.70	34.60
2	5740	51.33	4.03	-16.87	68.20	12.70	34.60

Carrier frequency (MHz): 5720 MHz  
Channel No.:144  
Test Mode: 802.11n (HT20)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5720	88.82	41.52	N/A	N/A	12.70	34.60
2	5740	41.53	-5.77	-12.47	54.00	12.70	34.60

Carrier frequency (MHz): 5720 MHz  
Channel No.:144  
Test Mode: 802.11n (HT20)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5720	86.31	39.01	N/A	N/A	12.70	34.60
2	5740	39.70	-7.60	-14.30	54.00	12.70	34.60

Carrier frequency (MHz): 5500 MHz  
Channel No.:100  
Test Mode: 802.11ac (VHT20)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5500	92.08	44.78	N/A	N/A	12.70	34.60
2	5480	52.97	5.67	-15.23	68.20	12.70	34.60

Carrier frequency (MHz): 5500 MHz  
Channel No.:100  
Test Mode: 802.11ac (VHT20)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5500	90.57	43.27	N/A	N/A	12.70	34.60
2	5480	51.90	4.60	-16.30	68.20	12.70	34.60

Carrier frequency (MHz): 5500 MHz  
Channel No.:100  
Test Mode: 802.11ac (VHT20)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5500	88.91	41.61	N/A	N/A	12.70	34.60
2	5480	41.43	-5.87	-12.57	54.00	12.70	34.60

Carrier frequency (MHz): 5500 MHz  
Channel No.:100  
Test Mode: 802.11ac (VHT20)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5500	87.52	40.22	N/A	N/A	12.70	34.60
2	5480	40.56	-6.74	-13.44	54.00	12.70	34.60

Carrier frequency (MHz): 5720 MHz  
Channel No.:144  
Test Mode: 802.11ac (VHT20)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5720	93.04	45.74	N/A	N/A	12.70	34.60
2	5740	52.11	4.81	-16.09	68.20	12.70	34.60

Carrier frequency (MHz): 5720 MHz  
Channel No.:144  
Test Mode: 802.11ac (VHT20)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5720	90.15	42.85	N/A	N/A	12.70	34.60
2	5740	51.76	4.46	-16.44	68.20	12.70	34.60

Carrier frequency (MHz): 5720 MHz  
Channel No.:144  
Test Mode: 802.11ac (VHT20)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5720	88.56	41.26	N/A	N/A	12.70	34.60
2	5740	41.73	-5.57	-12.27	54.00	12.70	34.60

Carrier frequency (MHz): 5720 MHz  
Channel No.:144  
Test Mode: 802.11ac (VHT20)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5720	86.52	39.22	N/A	N/A	12.70	34.60
2	5740	40.37	-6.93	-13.63	54.00	12.70	34.60

Carrier frequency (MHz): 5500 MHz  
Channel No.:100  
Test Mode: 802.11 ax (HE20)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5500	92.84	45.54	N/A	N/A	12.70	34.60
2	5480	52.36	5.06	-15.84	68.20	12.70	34.60

Carrier frequency (MHz): 5500 MHz  
Channel No.:100  
Test Mode: 802.11 ax (HE20)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5500	91.75	44.45	N/A	N/A	12.70	34.60
2	5480	51.79	4.49	-16.41	68.20	12.70	34.60

Carrier frequency (MHz): 5500 MHz  
Channel No.:100  
Test Mode: 802.11 ax (HE20)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5500	89.19	41.89	N/A	N/A	12.70	34.60
2	5480	41.21	-6.09	-12.79	54.00	12.70	34.60

Carrier frequency (MHz): 5500 MHz  
Channel No.:100  
Test Mode: 802.11 ax (HE20)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5500	88.06	40.76	N/A	N/A	12.70	34.60
2	5480	39.73	-7.57	-14.27	54.00	12.70	34.60

Carrier frequency (MHz): 5700 MHz  
Channel No.:140  
Test Mode: 802.11 ax (HE20)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5720	93.50	46.20	N/A	N/A	12.70	34.60
2	5740	52.58	5.28	-15.62	68.20	12.70	34.60

Carrier frequency (MHz): 5700 MHz  
Channel No.:140  
Test Mode: 802.11 ax (HE20)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5720	91.43	44.13	N/A	N/A	12.70	34.60
2	5740	51.73	4.43	-16.47	68.20	12.70	34.60

Carrier frequency (MHz): 5700 MHz  
Channel No.:140  
Test Mode: 802.11 ax (HE20)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5720	89.27	41.97	N/A	N/A	12.70	34.60
2	5740	41.04	-6.26	-12.96	54.00	12.70	34.60



Carrier frequency (MHz): 5700 MHz  
Channel No.:140  
Test Mode: 802.11ax (HE20)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5720	85.57	38.27	N/A	N/A	12.70	34.60
2	5740	39.75	-7.55	-14.25	54.00	12.70	34.60

Carrier frequency (MHz): 5510 MHz  
Channel No.:102  
Test Mode: 802.11n (HT40)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5510	90.54	43.24	N/A	N/A	12.70	34.60
2	5470	52.02	4.72	-16.18	68.20	12.70	34.60

Carrier frequency (MHz): 5510 MHz  
Channel No.:102  
Test Mode: 802.11n (HT40)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5510	89.44	42.14	N/A	N/A	12.70	34.60
2	5470	50.65	3.35	-17.55	68.20	12.70	34.60

Carrier frequency (MHz): 5510 MHz  
Channel No.:102  
Test Mode: 802.11n (HT40)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5510	88.45	41.15	N/A	N/A	12.70	34.60
2	5470	40.23	-7.07	-13.77	54.00	12.70	34.60

Carrier frequency (MHz): 5510 MHz  
Channel No.:102  
Test Mode: 802.11n (HT40)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5510	86.37	39.07	N/A	N/A	12.70	34.60
2	5470	38.70	-8.60	-15.30	54.00	12.70	34.60

Carrier frequency (MHz): 5710 MHz  
Channel No.:142  
Test Mode: 802.11n (HT40)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5710	90.16	42.86	N/A	N/A	12.70	34.60
2	5750	52.01	4.71	-16.19	68.20	12.70	34.60

Carrier frequency (MHz): 5710 MHz  
Channel No.:142  
Test Mode: 802.11n (HT40)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5710	87.31	40.01	N/A	N/A	12.70	34.60
2	5750	50.35	3.05	-17.85	68.20	12.70	34.60

Carrier frequency (MHz): 5710 MHz  
Channel No.:142  
Test Mode: 802.11n (HT40)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5710	86.06	38.76	N/A	N/A	12.70	34.60
2	5750	40.48	-6.82	-13.52	54.00	12.70	34.60

Carrier frequency (MHz): 5710 MHz  
Channel No.:142  
Test Mode: 802.11n (HT40)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5710	82.71	35.41	N/A	N/A	12.70	34.60
2	5750	38.73	-8.57	-15.27	54.00	12.70	34.60

Carrier frequency (MHz): 5510 MHz  
Channel No.:102  
Test Mode: 802.11ac (VHT40)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5510	90.76	43.46	N/A	N/A	12.70	34.60
2	5470	51.44	4.14	-16.76	68.20	12.70	34.60

Carrier frequency (MHz): 5510 MHz  
Channel No.:102  
Test Mode: 802.11ac (VHT40)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5510	89.36	42.06	N/A	N/A	12.70	34.60
2	5470	50.80	3.50	-17.40	68.20	12.70	34.60

Carrier frequency (MHz): 5510 MHz  
Channel No.:102  
Test Mode: 802.11ac (VHT40)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5510	88.30	41.00	N/A	N/A	12.70	34.60
2	5470	40.27	-7.03	-13.73	54.00	12.70	34.60

Carrier frequency (MHz): 5510 MHz  
Channel No.:102  
Test Mode: 802.11ac (VHT40)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5510	86.07	38.77	N/A	N/A	12.70	34.60
2	5470	40.24	-7.06	-13.76	54.00	12.70	34.60

Carrier frequency (MHz): 5710 MHz  
Channel No.:142  
Test Mode: 802.11ac (VHT40)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5710	90.56	43.26	N/A	N/A	12.70	34.60
2	5750	51.64	4.34	-16.56	68.20	12.70	34.60

Carrier frequency (MHz): 5710 MHz  
Channel No.:142  
Test Mode: 802.11ac (VHT40)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5710	87.85	40.55	N/A	N/A	12.70	34.60
2	5750	50.20	2.90	-18.00	68.20	12.70	34.60

Carrier frequency (MHz): 5710 MHz  
Channel No.:142  
Test Mode: 802.11ac (VHT40)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5710	87.03	39.73	N/A	N/A	12.70	34.60
2	5750	40.19	-7.11	-13.81	54.00	12.70	34.60

Carrier frequency (MHz): 5710 MHz  
Channel No.:142  
Test Mode: 802.11ac (VHT40)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5710	83.09	35.79	N/A	N/A	12.70	34.60
2	5750	38.90	-8.40	-15.10	54.00	12.70	34.60

Carrier frequency (MHz): 5510 MHz  
Channel No.:102  
Test Mode: 802.11 ax (HE40)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5510	90.64	43.34	N/A	N/A	12.70	34.60
2	5470	52.91	5.61	-15.29	68.20	12.70	34.60

Carrier frequency (MHz): 5510 MHz  
Channel No.:102  
Test Mode: 802.11 ax (HE40)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5510	87.66	40.36	N/A	N/A	12.70	34.60
2	5470	50.96	3.66	-17.24	68.20	12.70	34.60

Carrier frequency (MHz): 5510 MHz  
Channel No.:102  
Test Mode: 802.11 ax (HE40)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5510	87.56	40.26	N/A	N/A	12.70	34.60
2	5470	41.05	-6.25	-12.95	54.00	12.70	34.60

Carrier frequency (MHz): 5510 MHz  
Channel No.:102  
Test Mode: 802.11 ax (HE40)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5510	85.02	37.72	N/A	N/A	12.70	34.60
2	5470	39.29	-8.01	-14.71	54.00	12.70	34.60

Carrier frequency (MHz): 5710 MHz  
Channel No.:142  
Test Mode: 802.11 ax (HE40)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5710	90.63	43.33	N/A	N/A	12.70	34.60
2	5750	51.70	4.40	-16.50	68.20	12.70	34.60

Carrier frequency (MHz): 5710 MHz  
Channel No.:142  
Test Mode: 802.11 ax (HE40)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5710	86.64	39.34	N/A	N/A	12.70	34.60
2	5750	50.64	3.34	-17.56	68.20	12.70	34.60

Carrier frequency (MHz): 5710 MHz  
Channel No.:142  
Test Mode: 802.11 ax (HE40)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5710	85.90	38.60	N/A	N/A	12.70	34.60
2	5750	40.88	-6.42	-13.12	54.00	12.70	34.60

Carrier frequency (MHz): 5710 MHz  
Channel No.:142  
Test Mode: 802.11ax (HE40)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5710	83.29	35.99	N/A	N/A	12.70	34.60
2	5750	39.55	-7.75	-14.45	54.00	12.70	34.60

Carrier frequency (MHz): 5530 MHz  
Channel No.:106  
Test Mode: 802.11ac (VHT80)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5530	89.94	42.64	N/A	N/A	12.70	34.60
2	5450	52.59	5.29	-15.61	68.20	12.70	34.60

Carrier frequency (MHz): 5530 MHz  
Channel No.:106  
Test Mode: 802.11ac (VHT80)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5530	87.45	40.15	N/A	N/A	12.70	34.60
2	5450	51.97	4.67	-16.23	68.20	12.70	34.60

Carrier frequency (MHz): 5530 MHz  
Channel No.:106  
Test Mode: 802.11ac (VHT80)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5530	87.13	39.83	N/A	N/A	12.70	34.60
2	5450	41.37	-5.93	-12.63	54.00	12.70	34.60

Carrier frequency (MHz): 5530 MHz  
Channel No.:106  
Test Mode: 802.11ac (VHT80)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5530	85.35	38.05	N/A	N/A	12.70	34.60
2	5450	41.00	-6.30	-13.00	54.00	12.70	34.60

Carrier frequency (MHz): 5690 MHz  
Channel No.:138  
Test Mode: 802.11ac (VHT80)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5690	88.05	40.75	N/A	N/A	12.70	34.60
2	5770	51.45	4.15	-16.75	68.20	12.70	34.60

Carrier frequency (MHz): 5690 MHz  
Channel No.:138  
Test Mode: 802.11ac (VHT80)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5690	85.07	37.77	N/A	N/A	12.70	34.60
2	5770	50.98	3.68	-17.22	68.20	12.70	34.60

Carrier frequency (MHz): 5690 MHz  
Channel No.:138  
Test Mode: 802.11ac (VHT80)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5690	87.24	39.94	N/A	N/A	12.70	34.60
2	5770	40.02	-7.28	-13.98	54.00	12.70	34.60



Carrier frequency (MHz): 5690 MHz  
Channel No.:138  
Test Mode: 802.11ac (VHT80)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5690	85.22	37.92	N/A	N/A	12.70	34.60
2	5770	38.99	-8.31	-15.01	54.00	12.70	34.60

Carrier frequency (MHz): 5530 MHz  
Channel No.:106  
Test Mode: 802.11 ax (HE80)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5530	88.36	41.06	N/A	N/A	12.70	34.60
2	5450	52.89	5.59	-15.31	68.20	12.70	34.60

Carrier frequency (MHz): 5530 MHz  
Channel No.:106  
Test Mode: 802.11 ax (HE80)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5530	85.92	38.62	N/A	N/A	12.70	34.60
2	5450	51.38	4.08	-16.82	68.20	12.70	34.60

Carrier frequency (MHz): 5530 MHz  
Channel No.:106  
Test Mode: 802.11 ax (HE80)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5530	85.88	38.58	N/A	N/A	12.70	34.60
2	5450	40.83	-6.47	-13.17	54.00	12.70	34.60

Carrier frequency (MHz): 5530 MHz  
Channel No.:106  
Test Mode: 802.11 ax (HE80)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5530	83.23	35.93	N/A	N/A	12.70	34.60
2	5450	40.01	-7.29	-13.99	54.00	12.70	34.60

Carrier frequency (MHz): 5690 MHz  
Channel No.:138  
Test Mode: 802.11 ax (HE80)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5690	88.20	40.90	N/A	N/A	12.70	34.60
2	5770	52.02	4.72	-16.18	68.20	12.70	34.60

Carrier frequency (MHz): 5690 MHz  
Channel No.:138  
Test Mode: 802.11 ax (HE80)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5690	85.60	38.30	N/A	N/A	12.70	34.60
2	5770	51.18	3.88	-17.02	68.20	12.70	34.60

Carrier frequency (MHz): 5690 MHz  
Channel No.:138  
Test Mode: 802.11 ax (HE80)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5690	85.37	38.07	N/A	N/A	12.70	34.60
2	5770	40.59	-6.71	-13.41	54.00	12.70	34.60

Carrier frequency (MHz): 5690 MHz  
Channel No.:138  
Test Mode: 802.11ax (HE80)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5690	83.51	36.21	N/A	N/A	12.70	34.60
2	5770	39.71	-7.59	-14.29	54.00	12.70	34.60

Carrier frequency (MHz): 5745 MHz  
Channel No.:149  
Test Mode: 802.11a  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5745	91.72	44.12	N/A	N/A	12.90	34.70
2	5725	52.49	4.89	-15.71	68.20	12.90	34.70

Carrier frequency (MHz): 5745 MHz  
Channel No.:149  
Test Mode: 802.11a  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5745	90.12	42.52	N/A	N/A	12.90	34.70
2	5725	52.48	4.88	-15.72	68.20	12.90	34.70

Carrier frequency (MHz): 5745 MHz  
Channel No.:149  
Test Mode: 802.11a  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5745	88.92	41.32	N/A	N/A	12.90	34.70
2	5725	40.30	-7.30	-13.70	54.00	12.90	34.70

Carrier frequency (MHz): 5745 MHz  
Channel No.:149  
Test Mode: 802.11a  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5745	87.38	39.78	N/A	N/A	12.90	34.70
2	5725	38.45	-9.15	-15.55	54.00	12.90	34.70

Carrier frequency (MHz): 5825 MHz  
Channel No.:165  
Test Mode: 802.11a  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5825	91.36	43.76	N/A	N/A	12.90	34.70
2	5845	52.15	4.55	-16.05	68.20	12.90	34.70

Carrier frequency (MHz): 5825 MHz  
Channel No.:165  
Test Mode: 802.11a  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5825	89.71	42.11	N/A	N/A	12.90	34.70
2	5845	51.71	4.11	-16.49	68.20	12.90	34.70

Carrier frequency (MHz): 5825 MHz  
Channel No.:165  
Test Mode: 802.11a  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5825	89.82	42.22	N/A	N/A	12.90	34.70
2	5845	40.15	-7.45	-13.85	54.00	12.90	34.70

Carrier frequency (MHz): 5825 MHz  
Channel No.:165  
Test Mode: 802.11a  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5825	87.56	39.96	N/A	N/A	12.90	34.70
2	5845	38.85	-8.75	-15.15	54.00	12.90	34.70

Carrier frequency (MHz): 5745 MHz  
Channel No.:149  
Test Mode: 802.11n (HT20)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5745	91.21	43.61	N/A	N/A	12.90	34.70
2	5725	51.77	4.17	-16.43	68.20	12.90	34.70

Carrier frequency (MHz): 5745 MHz  
Channel No.:149  
Test Mode: 802.11n (HT20)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5745	88.55	40.95	N/A	N/A	12.90	34.70
2	5725	51.74	4.14	-16.46	68.20	12.90	34.70

Carrier frequency (MHz): 5745 MHz  
Channel No.:149  
Test Mode: 802.11n (HT20)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5745	88.66	41.06	N/A	N/A	12.90	34.70
2	5725	41.02	-6.58	-12.98	54.00	12.90	34.70

Carrier frequency (MHz): 5745 MHz  
Channel No.:149  
Test Mode: 802.11n (HT20)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5745	86.62	39.02	N/A	N/A	12.90	34.70
2	5725	39.25	-8.35	-14.75	54.00	12.90	34.70

Carrier frequency (MHz): 5825 MHz  
Channel No.:165  
Test Mode: 802.11n (HT20)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5825	92.30	44.70	N/A	N/A	12.90	34.70
2	5845	51.85	4.25	-16.35	68.20	12.90	34.70

Carrier frequency (MHz): 5825 MHz  
Channel No.:165  
Test Mode: 802.11n (HT20)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5825	90.42	42.82	N/A	N/A	12.90	34.70
2	5845	51.37	3.77	-16.83	68.20	12.90	34.70

Carrier frequency (MHz): 5825 MHz  
Channel No.:165  
Test Mode: 802.11n (HT20)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5825	90.08	42.48	N/A	N/A	12.90	34.70
2	5845	40.59	-7.01	-13.41	54.00	12.90	34.70

Carrier frequency (MHz): 5825 MHz  
Channel No.:165  
Test Mode: 802.11n (HT20)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5825	86.88	39.28	N/A	N/A	12.90	34.70
2	5845	40.23	-7.37	-13.77	54.00	12.90	34.70

Carrier frequency (MHz): 5745 MHz  
Channel No.:149  
Test Mode: 802.11ac (VHT20)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5745	91.18	43.58	N/A	N/A	12.90	34.70
2	5725	51.16	3.56	-17.04	68.20	12.90	34.70

Carrier frequency (MHz): 5745 MHz  
Channel No.:149  
Test Mode: 802.11ac (VHT20)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5745	88.03	40.43	N/A	N/A	12.90	34.70
2	5725	50.01	2.41	-18.19	68.20	12.90	34.70

Carrier frequency (MHz): 5745 MHz  
Channel No.:149  
Test Mode: 802.11ac (VHT20)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5745	90.03	42.43	N/A	N/A	12.90	34.70
2	5725	41.94	-5.66	-12.06	54.00	12.90	34.70

Carrier frequency (MHz): 5745 MHz  
Channel No.:149  
Test Mode: 802.11ac (VHT20)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5745	86.16	38.56	N/A	N/A	12.90	34.70
2	5725	41.68	-5.92	-12.32	54.00	12.90	34.70

Carrier frequency (MHz): 5825 MHz  
Channel No.:165  
Test Mode: 802.11ac (VHT20)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5825	91.92	44.32	N/A	N/A	12.90	34.70
2	5845	51.26	3.66	-16.94	68.20	12.90	34.70

Carrier frequency (MHz): 5825 MHz  
Channel No.:165  
Test Mode: 802.11ac (VHT20)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5825	88.24	40.64	N/A	N/A	12.90	34.70
2	5845	50.35	2.75	-17.85	68.20	12.90	34.70

Carrier frequency (MHz): 5825 MHz  
Channel No.:165  
Test Mode: 802.11ac (VHT20)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5825	88.67	41.07	N/A	N/A	12.90	34.70
2	5845	41.48	-6.12	-12.52	54.00	12.90	34.70



Carrier frequency (MHz): 5825 MHz  
Channel No.:165  
Test Mode: 802.11ac (VHT20)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5825	86.46	38.86	N/A	N/A	12.90	34.70
2	5845	41.21	-6.39	-12.79	54.00	12.90	34.70

Carrier frequency (MHz): 5745 MHz  
Channel No.:149  
Test Mode: 802.11 ax (HE20)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5745	91.49	43.89	N/A	N/A	12.90	34.70
2	5725	52.87	5.27	-15.33	68.20	12.90	34.70

Carrier frequency (MHz): 5745 MHz  
Channel No.:149  
Test Mode: 802.11 ax (HE20)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5745	88.71	41.11	N/A	N/A	12.90	34.70
2	5725	52.37	4.77	-15.83	68.20	12.90	34.70

Carrier frequency (MHz): 5745 MHz  
Channel No.:149  
Test Mode: 802.11 ax (HE20)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5745	88.57	40.97	N/A	N/A	12.90	34.70
2	5725	41.68	-5.92	-12.32	54.00	12.90	34.70

Carrier frequency (MHz): 5745 MHz  
Channel No.:149  
Test Mode: 802.11 ax (HE20)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5745	85.73	38.13	N/A	N/A	12.90	34.70
2	5725	40.46	-7.14	-13.54	54.00	12.90	34.70

Carrier frequency (MHz): 5825 MHz  
Channel No.:165  
Test Mode: 802.11 ax (HE20)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5825	91.12	43.52	N/A	N/A	12.90	34.70
2	5845	52.16	4.56	-16.04	68.20	12.90	34.70

Carrier frequency (MHz): 5825 MHz  
Channel No.:165  
Test Mode: 802.11 ax (HE20)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5825	89.83	42.23	N/A	N/A	12.90	34.70
2	5845	50.78	3.18	-17.42	68.20	12.90	34.70

Carrier frequency (MHz): 5825 MHz  
Channel No.:165  
Test Mode: 802.11 ax (HE20)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5825	90.01	42.41	N/A	N/A	12.90	34.70
2	5845	40.26	-7.34	-13.74	54.00	12.90	34.70

Carrier frequency (MHz): 5825 MHz  
Channel No.:165  
Test Mode: 802.11ax (HE20)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5825	87.43	39.83	N/A	N/A	12.90	34.70
2	5845	39.30	-8.30	-14.70	54.00	12.90	34.70

Carrier frequency (MHz): 5755 MHz  
Channel No.:151  
Test Mode: 802.11n (HT40)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5755	91.08	43.48	N/A	N/A	12.90	34.70
2	5715	52.98	5.38	-15.22	68.20	12.90	34.70

Carrier frequency (MHz): 5755 MHz  
Channel No.:151  
Test Mode: 802.11n (HT40)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5755	87.11	39.51	N/A	N/A	12.90	34.70
2	5715	52.08	4.48	-16.12	68.20	12.90	34.70

Carrier frequency (MHz): 5755 MHz  
Channel No.:151  
Test Mode: 802.11n (HT40)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5755	86.76	39.16	N/A	N/A	12.90	34.70
2	5715	41.66	-5.94	-12.34	54.00	12.90	34.70

Carrier frequency (MHz): 5755 MHz  
Channel No.:151  
Test Mode: 802.11n (HT40)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5755	83.33	35.73	N/A	N/A	12.90	34.70
2	5715	41.03	-6.57	-12.97	54.00	12.90	34.70

Carrier frequency (MHz): 5795 MHz  
Channel No.:159  
Test Mode: 802.11n (HT40)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5795	90.78	43.18	N/A	N/A	12.90	34.70
2	5835	52.69	5.09	-15.51	68.20	12.90	34.70

Carrier frequency (MHz): 5795 MHz  
Channel No.:159  
Test Mode: 802.11n (HT40)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5795	89.05	41.45	N/A	N/A	12.90	34.70
2	5835	51.12	3.52	-17.08	68.20	12.90	34.70

Carrier frequency (MHz): 5795 MHz  
Channel No.:159  
Test Mode: 802.11n (HT40)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5795	87.67	40.07	N/A	N/A	12.90	34.70
2	5835	40.56	-7.04	-13.44	54.00	12.90	34.70

Carrier frequency (MHz): 5795 MHz  
Channel No.:159  
Test Mode: 802.11n (HT40)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5795	85.61	38.01	N/A	N/A	12.90	34.70
2	5835	40.15	-7.45	-13.85	54.00	12.90	34.70

Carrier frequency (MHz): 5755 MHz  
Channel No.:151  
Test Mode: 802.11ac (VHT40)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5755	90.89	43.29	N/A	N/A	12.90	34.70
2	5715	52.61	5.01	-15.59	68.20	12.90	34.70

Carrier frequency (MHz): 5755 MHz  
Channel No.:151  
Test Mode: 802.11ac (VHT40)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5755	87.64	40.04	N/A	N/A	12.90	34.70
2	5715	50.90	3.30	-17.30	68.20	12.90	34.70

Carrier frequency (MHz): 5755 MHz  
Channel No.:151  
Test Mode: 802.11ac (VHT40)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5755	87.40	39.80	N/A	N/A	12.90	34.70
2	5715	40.67	-6.93	-13.33	54.00	12.90	34.70

Carrier frequency (MHz): 5755 MHz  
Channel No.:151  
Test Mode: 802.11ac (VHT40)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5755	83.92	36.32	N/A	N/A	12.90	34.70
2	5715	40.33	-7.27	-13.67	54.00	12.90	34.70

Carrier frequency (MHz): 5795 MHz  
Channel No.:159  
Test Mode: 802.11ac (VHT40)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5795	90.95	43.35	N/A	N/A	12.90	34.70
2	5835	52.29	4.69	-15.91	68.20	12.90	34.70

Carrier frequency (MHz): 5795 MHz  
Channel No.:159  
Test Mode: 802.11ac (VHT40)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5795	87.64	40.04	N/A	N/A	12.90	34.70
2	5835	50.61	3.01	-17.59	68.20	12.90	34.70

Carrier frequency (MHz): 5795 MHz  
Channel No.:159  
Test Mode: 802.11ac (VHT40)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5795	87.12	39.52	N/A	N/A	12.90	34.70
2	5835	41.47	-6.13	-12.53	54.00	12.90	34.70

Carrier frequency (MHz): 5795 MHz  
Channel No.:159  
Test Mode: 802.11ac (VHT40)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5795	85.43	37.83	N/A	N/A	12.90	34.70
2	5835	39.51	-8.09	-14.49	54.00	12.90	34.70

Carrier frequency (MHz): 5755 MHz  
Channel No.:151  
Test Mode: 802.11 ax (HE40)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5755	90.96	43.36	N/A	N/A	12.90	34.70
2	5715	52.24	4.64	-15.96	68.20	12.90	34.70

Carrier frequency (MHz): 5755 MHz  
Channel No.:151  
Test Mode: 802.11 ax (HE40)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5755	88.25	40.65	N/A	N/A	12.90	34.70
2	5715	51.88	4.28	-16.32	68.20	12.90	34.70

Carrier frequency (MHz): 5755 MHz  
Channel No.:151  
Test Mode: 802.11 ax (HE40)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5755	87.02	39.42	N/A	N/A	12.90	34.70
2	5715	41.98	-5.62	-12.02	54.00	12.90	34.70

Carrier frequency (MHz): 5755 MHz  
Channel No.:151  
Test Mode: 802.11 ax (HE40)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5755	85.42	37.82	N/A	N/A	12.90	34.70
2	5715	40.30	-7.30	-13.70	54.00	12.90	34.70

Carrier frequency (MHz): 5795 MHz  
Channel No.:159  
Test Mode: 802.11 ax (HE40)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5795	90.43	42.83	N/A	N/A	12.90	34.70
2	5835	51.92	4.32	-16.28	68.20	12.90	34.70

Carrier frequency (MHz): 5795 MHz  
Channel No.:159  
Test Mode: 802.11 ax (HE40)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5795	89.12	41.52	N/A	N/A	12.90	34.70
2	5835	50.67	3.07	-17.53	68.20	12.90	34.70

Carrier frequency (MHz): 5795 MHz  
Channel No.:159  
Test Mode: 802.11 ax (HE40)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5795	87.48	39.88	N/A	N/A	12.90	34.70
2	5835	41.13	-6.47	-12.87	54.00	12.90	34.70



Carrier frequency (MHz): 5795 MHz  
Channel No.:159  
Test Mode: 802.11ax (HE40)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5795	85.04	37.44	N/A	N/A	12.90	34.70
2	5835	39.53	-8.07	-14.47	54.00	12.90	34.70

Carrier frequency (MHz): 5775 MHz  
Channel No.:155  
Test Mode: 802.11ac (VHT80)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5775	89.23	41.63	N/A	N/A	12.90	34.70
2	5695	52.79	5.19	-15.41	68.20	12.90	34.70

Carrier frequency (MHz): 5775 MHz  
Channel No.:155  
Test Mode: 802.11ac (VHT80)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5775	87.87	40.27	N/A	N/A	12.90	34.70
2	5695	52.78	5.18	-15.42	68.20	12.90	34.70

Carrier frequency (MHz): 5775 MHz  
Channel No.:155  
Test Mode: 802.11ac (VHT80)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5775	86.50	38.90	N/A	N/A	12.90	34.70
2	5695	41.15	-6.45	-12.85	54.00	12.90	34.70

Carrier frequency (MHz): 5775 MHz  
Channel No.:155  
Test Mode: 802.11ac (VHT80)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5775	84.96	37.36	N/A	N/A	12.90	34.70
2	5695	39.30	-8.30	-14.70	54.00	12.90	34.70

Carrier frequency (MHz): 5775 MHz  
Channel No.:155  
Test Mode: 802.11 ax (HE80)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5775	89.15	41.55	N/A	N/A	12.90	34.70
2	5695	51.37	3.77	-16.83	68.20	12.90	34.70

Carrier frequency (MHz): 5775 MHz  
Channel No.:155  
Test Mode: 802.11 ax (HE80)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5775	87.26	39.66	N/A	N/A	12.90	34.70
2	5695	49.73	2.13	-18.47	68.20	12.90	34.70

Carrier frequency (MHz): 5775 MHz  
Channel No.:155  
Test Mode: 802.11 ax (HE80)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5775	86.79	39.19	N/A	N/A	12.90	34.70
2	5695	40.46	-7.14	-13.54	54.00	12.90	34.70

Carrier frequency (MHz): 5775 MHz  
Channel No.:155  
Test Mode: 802.11ax (HE80)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5775	83.09	35.49	N/A	N/A	12.90	34.70
2	5695	38.92	-8.68	-15.08	54.00	12.90	34.70

Carrier frequency (MHz): 5250 MHz  
Channel No.:50  
Test Mode: 802.11ac (VHT160)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5250	85.32	37.52	N/A	N/A	12.40	35.40
2	5150	49.83	2.03	-18.37	68.20	12.40	35.40

Carrier frequency (MHz): 5250 MHz  
Channel No.:50  
Test Mode: 802.11ac (VHT160)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5250	84.03	36.23	N/A	N/A	12.40	35.40
2	5150	49.75	1.95	-18.45	68.20	12.40	35.40

Carrier frequency (MHz): 5250 MHz  
Channel No.:50  
Test Mode: 802.11ac (VHT160)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5250	80.91	33.11	N/A	N/A	12.40	35.40
2	5150	40.11	-7.69	-13.89	54.00	12.40	35.40

Carrier frequency (MHz): 5250 MHz  
Channel No.:50  
Test Mode: 802.11ac (VHT160)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5250	79.00	31.20	N/A	N/A	12.40	35.40
2	5150	38.20	-9.60	-15.80	54.00	12.40	35.40

Carrier frequency (MHz): 5250 MHz  
Channel No.:50  
Test Mode: 802.11 ax (HE160)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5250	85.81	38.01	N/A	N/A	12.40	35.40
2	5150	49.56	1.76	-18.64	68.20	12.40	35.40

Carrier frequency (MHz): 5250 MHz  
Channel No.:50  
Test Mode: 802.11 ax (HE160)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5250	84.61	36.81	N/A	N/A	12.40	35.40
2	5150	48.59	0.79	-19.61	68.20	12.40	35.40

Carrier frequency (MHz): 5250 MHz  
Channel No.:50  
Test Mode: 802.11 ax (HE160)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5250	80.06	32.26	N/A	N/A	12.40	35.40
2	5150	39.88	-7.92	-14.12	54.00	12.40	35.40

Carrier frequency (MHz): 5250 MHz  
Channel No.:50  
Test Mode: 802.11ax (HE160)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5250	77.78	29.98	N/A	N/A	12.40	35.40
2	5150	38.19	-9.61	-15.81	54.00	12.40	35.40

Carrier frequency (MHz): 5570 MHz  
Channel No.:114  
Test Mode: 802.11ac (VHT160)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5570	86.78	39.48	N/A	N/A	12.70	34.60
2	5450	51.69	4.39	-16.51	68.20	12.70	34.60

Carrier frequency (MHz): 5570 MHz  
Channel No.:114  
Test Mode: 802.11ac (VHT160)  
Polarity:Horizontal  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5570	82.74	35.44	N/A	N/A	12.70	34.60
2	5450	50.92	3.62	-17.28	68.20	12.70	34.60

Carrier frequency (MHz): 5570 MHz  
Channel No.:114  
Test Mode: 802.11ac (VHT160)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5570	82.37	35.07	N/A	N/A	12.70	34.60
2	5450	41.09	-6.21	-12.91	54.00	12.70	34.60

Carrier frequency (MHz): 5570 MHz  
Channel No.:114  
Test Mode: 802.11ac (VHT160)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5570	79.71	32.41	N/A	N/A	12.70	34.60
2	5450	39.80	-7.50	-14.20	54.00	12.70	34.60

Carrier frequency (MHz): 5570 MHz  
Channel No.:114  
Test Mode: 802.11 ax (HE160)  
Polarity:Vertical  
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5570	85.95	38.65	N/A	N/A	12.70	34.60
2	5450	52.90	5.60	-15.30	68.20	12.70	34.60

Carrier frequency (MHz): 5570 MHz  
Channel No.:114  
Test Mode: 802.11 ax (HE160)  
Polarity:Horizontal  
Detector: Peak


No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5570	82.90	35.60	N/A	N/A	12.70	34.60
2	5450	51.88	4.58	-16.32	68.20	12.70	34.60

Carrier frequency (MHz): 5570 MHz  
Channel No.:114  
Test Mode: 802.11 ax (HE160)  
Polarity:Vertical  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5570	81.80	34.50	N/A	N/A	12.70	34.60
2	5450	41.66	-5.64	-12.34	54.00	12.70	34.60

Carrier frequency (MHz): 5570 MHz  
Channel No.:114  
Test Mode: 802.11ax (HE160)  
Polarity:Horizontal  
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	5570	78.66	31.36	N/A	N/A	12.70	34.60
2	5450	41.48	-5.82	-12.52	54.00	12.70	34.60

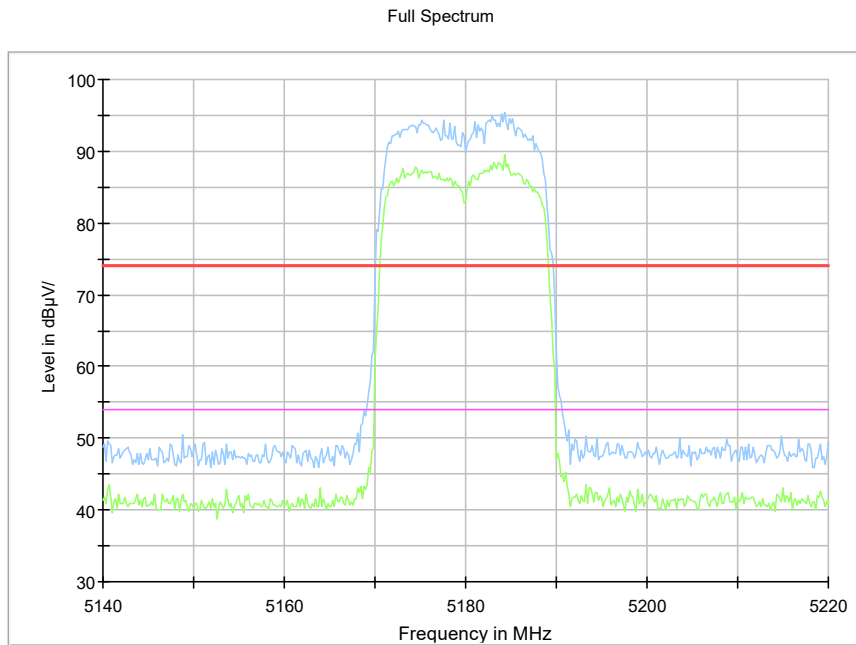

Radiated Emission Band Edge for 5180MHz

### Sample Calculations

#### Determining Spurious Emissions Levels

A “reference path loss” is established and the  $A_{Rpl}$  is the attenuation of “reference path loss”, and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{mea}} + A_{Rpl}$$

Sample calculation:  $(20.79 \text{ dB}\mu\text{V/m}) = (39.39 \text{ dB}\mu\text{V}) + (-18.6 \text{ dB/m})$ , the corresponding frequency is 39.660500MHz.

The worst case attitude: The mobile lay down.

For 802.11a Channel No.:36

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
39.660500	20.79	-18.6	39.39	Vertical	40.00
58.064000	21.31	-18.6	39.91	Vertical	40.00
154.266000	25.99	-22.1	48.09	Vertical	43.50
177.426000	23.34	-21.1	44.44	Vertical	43.50
514.096000	15.40	-10.2	25.60	Vertical	46.00
941.229500	16.45	-2.7	19.15	Vertical	46.00

For 802.11n(HT20) Channel No.:36

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
39.865500	20.76	-18.5	39.26	Vertical	40.00
58.036000	21.25	-18.6	39.85	Vertical	40.00
154.317000	25.99	-22.1	48.09	Vertical	43.50
177.403000	23.24	-21.1	44.34	Vertical	43.50
521.867000	14.05	-10.1	24.15	Vertical	46.00
942.328000	16.32	-2.7	19.02	Vertical	46.00

For 802.11ac(VHT20) Channel No.:36

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
39.891000	20.81	-18.5	39.31	Vertical	40.00
58.053000	21.34	-18.6	39.94	Vertical	40.00
154.266000	25.89	-22.1	47.99	Vertical	43.50
176.176000	23.08	-21.1	44.18	Vertical	43.50
499.928000	15.53	-10.6	26.13	Vertical	46.00
954.670000	16.50	-2.5	19.00	Vertical	46.00



For 802.11ax(HE20) Channel No.:36

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
39.920000	20.73	-18.5	39.23	Vertical	40.00
57.990000	21.32	-18.6	39.92	Vertical	40.00
154.408000	25.93	-22.1	48.03	Vertical	43.50
177.494000	23.27	-21.0	44.27	Vertical	43.50
511.496500	15.63	-10.3	25.93	Vertical	46.00
884.159500	16.02	-3.4	19.42	Vertical	46.00

For 802.11a Channel No.:44

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
39.888500	20.66	-18.5	39.16	Vertical	40.00
57.996000	21.26	-18.6	39.86	Vertical	40.00
155.880000	24.33	-22.1	46.43	Vertical	43.50
176.264500	22.98	-21.1	44.08	Vertical	43.50
510.644000	15.55	-10.3	25.85	Vertical	46.00
911.313500	16.22	-3.0	19.22	Vertical	46.00

For 802.11n(HT20) Channel No.:44

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
39.600000	20.65	-18.6	39.25	Vertical	40.00
58.021500	21.29	-18.6	39.89	Vertical	40.00
154.288000	25.41	-22.1	47.51	Vertical	43.50
177.382500	23.11	-21.1	44.21	Vertical	43.50
505.625500	14.95	-10.4	25.35	Vertical	46.00
949.577500	16.38	-2.6	18.98	Vertical	46.00

For 802.11ac(VHT20) Channel No.:44

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
39.669000	20.62	-18.6	39.22	Vertical	40.00
57.970500	21.31	-18.6	39.91	Vertical	40.00
154.388500	25.20	-22.1	47.30	Vertical	43.50
177.466000	23.11	-21.0	44.11	Vertical	43.50
510.267000	15.54	-10.3	25.84	Vertical	46.00
947.235000	16.39	-2.6	18.99	Vertical	46.00

For 802.11ax(HE20) Channel No.:44

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
39.577000	20.70	-18.6	39.30	Vertical	40.00
58.002000	21.37	-18.6	39.97	Vertical	40.00
152.890000	24.65	-22.2	46.85	Vertical	43.50
177.382500	23.03	-21.1	44.13	Vertical	43.50
514.512000	15.33	-10.2	25.53	Vertical	46.00
815.965000	14.63	-4.6	19.23	Vertical	46.00

For 802.11a Channel No.:48

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
39.828000	20.67	-18.6	39.27	Vertical	40.00
58.030000	21.47	-18.6	40.07	Vertical	40.00
153.829500	24.75	-22.2	46.95	Vertical	43.50
177.514500	23.00	-21.0	44.00	Vertical	43.50
498.082500	15.08	-10.6	25.68	Vertical	46.00
941.029500	16.34	-2.7	19.04	Vertical	46.00

For 802.11n(HT20) Channel No.:48

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
39.903000	20.78	-18.5	39.28	Vertical	40.00
58.055500	21.50	-18.6	40.10	Vertical	40.00
154.357000	25.27	-22.1	47.37	Vertical	43.50
176.281500	23.12	-21.1	44.22	Vertical	43.50
328.486500	14.73	-15.2	29.93	Vertical	46.00
959.291000	16.47	-2.5	18.97	Vertical	46.00

For 802.11ac(VHT20) Channel No.:48

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
39.891000	20.73	-18.5	39.23	Vertical	40.00
58.010500	21.44	-18.6	40.04	Vertical	40.00
154.365500	25.24	-22.1	47.34	Vertical	43.50
177.594500	22.93	-21.0	43.93	Vertical	43.50
509.143000	15.34	-10.3	25.64	Vertical	46.00
943.897000	16.34	-2.7	19.04	Vertical	46.00

For 802.11ax(HE20) Channel No.:48

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
39.175500	19.62	-18.8	38.42	Vertical	40.00
57.964500	21.43	-18.6	40.03	Vertical	40.00
154.422500	25.25	-22.1	47.35	Vertical	43.50
176.364000	23.10	-21.1	44.20	Vertical	43.50
513.453500	15.42	-10.2	25.62	Vertical	46.00
955.414500	16.45	-2.5	18.95	Vertical	46.00

For 802.11n(HT40) Channel No.:38

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
39.882500	20.82	-18.5	39.32	Vertical	40.00
58.038500	21.51	-18.6	40.11	Vertical	40.00
154.437000	25.16	-22.1	47.26	Vertical	43.50
176.236500	23.15	-21.1	44.25	Vertical	43.50
499.968000	15.41	-10.6	26.01	Vertical	46.00
920.950500	16.25	-2.9	19.15	Vertical	46.00

For 802.11ac(VHT40) Channel No.:38

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
39.903000	20.76	-18.5	39.26	Vertical	40.00
58.070000	21.50	-18.6	40.10	Vertical	40.00
154.072000	24.80	-22.2	47.00	Vertical	43.50
176.353000	23.15	-21.1	44.25	Vertical	43.50
502.064500	15.11	-10.6	25.71	Vertical	46.00
918.123000	16.16	-2.9	19.06	Vertical	46.00

For 802.11ax(HE40) Channel No.:38

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
39.982000	20.57	-18.5	39.07	Vertical	40.00
57.993500	21.51	-18.6	40.11	Vertical	40.00
154.636000	25.12	-22.1	47.22	Vertical	43.50
176.313000	23.15	-21.1	44.25	Vertical	43.50
507.420000	15.13	-10.4	25.53	Vertical	46.00
932.031500	16.26	-2.7	18.96	Vertical	46.00

For 802.11n(HT40) Channel No.:46

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
40.176000	20.28	-18.5	38.78	Vertical	40.00
58.002000	21.55	-18.6	40.15	Vertical	40.00
154.530500	25.15	-22.1	47.25	Vertical	43.50
176.310500	23.18	-21.1	44.28	Vertical	43.50
329.739000	15.59	-15.2	30.79	Vertical	46.00
928.782000	16.30	-2.8	19.10	Vertical	46.00

For 802.11ac(VHT40) Channel No.:46

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
39.515000	20.58	-18.7	39.28	Vertical	40.00
58.055500	21.62	-18.6	40.22	Vertical	40.00
154.513500	25.18	-22.1	47.28	Vertical	43.50
176.361500	23.18	-21.1	44.28	Vertical	43.50
501.111500	15.16	-10.6	25.76	Vertical	46.00
958.390000	16.47	-2.5	18.97	Vertical	46.00

For 802.11ax(HE40) Channel No.:46

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
39.406000	20.42	-18.7	39.12	Vertical	40.00
58.047000	21.53	-18.6	40.13	Vertical	40.00
154.080500	24.86	-22.2	47.06	Vertical	43.50
176.241500	23.14	-21.1	44.24	Vertical	43.50
501.676500	15.13	-10.6	25.73	Vertical	46.00
941.261000	16.35	-2.7	19.05	Vertical	46.00

For 802.11ac(VHT80) Channel No.:42

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
39.874000	21.15	-18.5	39.65	Vertical	40.00
58.013000	21.61	-18.6	40.21	Vertical	40.00
154.266000	24.88	-22.1	46.98	Vertical	43.50
176.766500	22.78	-21.1	43.88	Vertical	43.50
522.103500	14.08	-10.1	24.18	Vertical	46.00
950.858000	16.36	-2.6	18.96	Vertical	46.00

For 802.11ax(HE80) Channel No.:42

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
39.563500	21.82	-18.6	40.42	Vertical	40.00
58.164500	21.44	-18.6	40.04	Vertical	40.00
153.344500	17.95	-22.2	40.15	Vertical	43.50
176.610000	16.31	-21.1	37.41	Vertical	43.50
510.811500	14.86	-10.3	25.16	Vertical	46.00
851.559000	15.39	-4.0	19.39	Vertical	46.00

For 802.11a Channel No.:52

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
39.426500	21.76	-18.7	40.46	Vertical	40.00
58.167000	21.47	-18.6	40.07	Vertical	40.00
153.520500	16.92	-22.2	39.12	Vertical	43.50
176.467000	18.85	-21.1	39.95	Vertical	43.50
504.373000	14.99	-10.5	25.49	Vertical	46.00
930.431000	16.23	-2.8	19.03	Vertical	46.00

For 802.11n(HT20) Channel No.:52

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
39.448500	21.87	-18.7	40.57	Vertical	40.00
57.454000	18.70	-18.5	37.20	Vertical	40.00
152.990500	20.51	-22.2	42.71	Vertical	43.50
176.509500	14.66	-21.1	35.76	Vertical	43.50
516.877500	14.17	-10.1	24.27	Vertical	46.00
952.116500	16.36	-2.6	18.96	Vertical	46.00

For 802.11ac(VHT20) Channel No.:52

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
39.563500	21.74	-18.6	40.34	Vertical	40.00
57.930500	17.19	-18.6	35.79	Vertical	40.00
145.610000	21.37	-22.4	43.77	Vertical	43.50
180.518000	10.17	-20.9	31.07	Vertical	43.50
496.915000	13.18	-10.7	23.88	Vertical	46.00
942.248000	16.30	-2.7	19.00	Vertical	46.00

For 802.11ax(HE20) Channel No.:52

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
39.788000	20.99	-18.6	39.59	Vertical	40.00
58.078500	15.77	-18.6	34.37	Vertical	40.00
144.197500	20.73	-22.4	43.13	Vertical	43.50
180.720500	16.16	-20.9	37.06	Vertical	43.50
511.876000	14.11	-10.3	24.41	Vertical	46.00
904.609500	16.05	-3.1	19.15	Vertical	46.00

For 802.11a Channel No.:60

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
39.127000	19.46	-18.8	38.26	Vertical	40.00
57.454000	14.44	-18.5	32.94	Vertical	40.00
143.803500	19.96	-22.5	42.46	Vertical	43.50
179.853500	18.17	-20.9	39.07	Vertical	43.50
532.486000	12.26	-9.7	21.96	Vertical	46.00
958.426500	16.42	-2.5	18.92	Vertical	46.00

For 802.11n(HT20) Channel No.:60

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
39.705500	19.18	-18.6	37.78	Vertical	40.00
55.682500	19.25	-18.3	37.55	Vertical	40.00
150.799500	16.81	-22.3	39.11	Vertical	43.50
179.773500	17.79	-21.0	38.79	Vertical	43.50
539.310000	12.23	-9.5	21.73	Vertical	46.00
909.607500	16.14	-3.0	19.14	Vertical	46.00

For 802.11ac(VHT20) Channel No.:60

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
39.509000	21.49	-18.7	40.19	Vertical	40.00
55.670500	13.46	-18.3	31.76	Vertical	40.00
155.475000	15.45	-22.1	37.55	Vertical	43.50
179.120000	19.96	-21.0	40.96	Vertical	43.50
507.055000	14.52	-10.4	24.92	Vertical	46.00
930.177500	16.30	-2.8	19.10	Vertical	46.00

For 802.11ax(HE20) Channel No.:60

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
39.925000	21.10	-18.5	39.60	Vertical	40.00
55.793000	11.12	-18.3	29.42	Vertical	40.00
143.858000	16.76	-22.5	39.26	Vertical	43.50
175.328500	17.44	-21.1	38.54	Vertical	43.50
521.702000	12.92	-10.1	23.02	Vertical	46.00
941.143500	16.31	-2.7	19.01	Vertical	46.00

For 802.11a Channel No.:64

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
39.329500	21.82	-18.7	40.52	Vertical	40.00
78.748000	14.25	-24.2	38.45	Vertical	40.00
144.052000	17.11	-22.5	39.61	Vertical	43.50
178.510000	10.60	-21.0	31.60	Vertical	43.50
512.318500	14.17	-10.2	24.37	Vertical	46.00
930.028500	16.30	-2.8	19.10	Vertical	46.00

For 802.11n(HT20) Channel No.:64

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
40.085000	16.51	-18.5	35.01	Vertical	40.00
58.215500	13.74	-18.6	32.34	Vertical	40.00
154.245500	9.43	-22.1	31.53	Vertical	43.50
177.603000	13.33	-21.0	34.33	Vertical	43.50
505.864500	11.39	-10.4	21.79	Vertical	46.00
913.895000	16.17	-3.0	19.17	Vertical	46.00

For 802.11ac(VHT20) Channel No.:64

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
39.466500	15.90	-18.7	34.60	Vertical	40.00
58.612000	13.35	-18.6	31.95	Vertical	40.00
149.883000	9.20	-22.3	31.50	Vertical	43.50
181.257500	11.36	-20.8	32.16	Vertical	43.50
518.957000	13.36	-10.1	23.46	Vertical	46.00
926.822500	16.28	-2.8	19.08	Vertical	46.00



For 802.11ax(HE20) Channel No.:64

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.687500	10.86	-20.7	31.56	Vertical	40.00
55.990500	9.42	-18.3	27.72	Vertical	40.00
154.397000	9.58	-22.1	31.68	Vertical	43.50
176.787000	13.25	-21.1	34.35	Vertical	43.50
508.734500	11.21	-10.3	21.51	Vertical	46.00
921.578500	16.22	-2.9	19.12	Vertical	46.00

For 802.11n(HT40) Channel No.:54

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
39.968500	15.66	-18.5	34.16	Vertical	40.00
59.179500	11.99	-18.7	30.69	Vertical	40.00
151.966000	19.06	-22.2	41.26	Vertical	43.50
181.787500	5.64	-20.8	26.44	Vertical	43.50
512.087000	11.50	-10.2	21.70	Vertical	46.00
936.761500	16.19	-2.7	18.89	Vertical	46.00

For 802.11ac(VHT40) Channel No.:54

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
39.378000	15.95	-18.7	34.65	Vertical	40.00
58.278500	13.37	-18.6	31.97	Vertical	40.00
152.742000	14.75	-22.2	36.95	Vertical	43.50
180.121500	7.65	-20.9	28.55	Vertical	43.50
525.679000	11.17	-10.0	21.17	Vertical	46.00
915.980500	16.06	-2.9	18.96	Vertical	46.00

For 802.11ax(HE40) Channel No.:54

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
39.697000	15.82	-18.6	34.42	Vertical	40.00
58.304000	12.54	-18.6	31.14	Vertical	40.00
145.133500	9.61	-22.4	32.01	Vertical	43.50
190.064000	10.87	-19.9	30.77	Vertical	43.50
555.840000	12.29	-9.1	21.39	Vertical	46.00
931.175500	16.22	-2.8	19.02	Vertical	46.00



For 802.11n(HT40) Channel No.:62

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
31.247000	20.94	-21.1	42.04	Vertical	40.00
82.494500	23.49	-23.6	47.09	Vertical	40.00
153.509500	26.13	-22.2	48.33	Vertical	43.50
194.726000	22.36	-19.6	41.96	Vertical	43.50
380.306500	14.66	-13.5	28.16	Vertical	46.00
917.604000	15.71	-2.9	18.61	Vertical	46.00

For 802.11ac(VHT40) Channel No.:62

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
33.240500	20.09	-20.5	40.59	Vertical	40.00
85.202000	25.00	-22.7	47.70	Vertical	40.00
153.435500	25.99	-22.2	48.19	Vertical	43.50
194.874000	22.92	-19.5	42.42	Vertical	43.50
378.393000	14.88	-13.6	28.48	Vertical	46.00
927.894500	15.87	-2.8	18.67	Vertical	46.00

For 802.11ax(HE40) Channel No.:62

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.539500	19.63	-20.7	40.33	Vertical	40.00
84.879500	24.41	-22.8	47.21	Vertical	40.00
153.438000	26.00	-22.2	48.20	Vertical	43.50
194.869000	23.00	-19.5	42.50	Vertical	43.50
378.130000	14.79	-13.6	28.39	Vertical	46.00
882.886500	15.48	-3.5	18.98	Vertical	46.00

For 802.11ac(VHT80) Channel No.:58

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.185000	20.73	-21.4	42.13	Vertical	40.00
83.515500	24.04	-23.3	47.34	Vertical	40.00
153.509500	26.01	-22.2	48.21	Vertical	43.50
194.931000	23.04	-19.5	42.54	Vertical	43.50
380.677500	13.45	-13.5	26.95	Vertical	46.00
935.327000	15.91	-2.7	18.61	Vertical	46.00

For 802.11ax(HE) Channel No.:58

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.040000	20.56	-21.5	42.06	Vertical	40.00
85.187500	24.90	-22.7	47.60	Vertical	40.00
155.047000	25.24	-22.1	47.34	Vertical	43.50
194.939500	22.96	-19.5	42.46	Vertical	43.50
378.204000	14.83	-13.6	28.43	Vertical	46.00
916.779500	15.73	-2.9	18.63	Vertical	46.00

For 802.11a Channel No.:100

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.000000	20.53	-21.5	42.03	Vertical	40.00
83.507000	24.03	-23.3	47.33	Vertical	40.00
153.490000	25.99	-22.2	48.19	Vertical	43.50
194.871500	23.02	-19.5	42.52	Vertical	43.50
378.657500	14.66	-13.6	28.26	Vertical	46.00
934.459000	15.99	-2.7	18.69	Vertical	46.00

For 802.11n(HT20) Channel No.:100

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
31.300500	20.08	-21.1	41.18	Vertical	40.00
85.204500	24.89	-22.7	47.59	Vertical	40.00
153.948500	25.63	-22.2	47.83	Vertical	43.50
193.273500	22.76	-19.7	42.46	Vertical	43.50
376.929500	14.58	-13.6	28.18	Vertical	46.00
882.356500	15.49	-3.5	18.99	Vertical	46.00

For 802.11ac(VHT20) Channel No.:100

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.000000	20.42	-21.5	41.92	Vertical	40.00
85.219000	24.83	-22.7	47.53	Vertical	40.00
153.469500	25.98	-22.2	48.18	Vertical	43.50
193.533000	22.88	-19.7	42.58	Vertical	43.50
378.307000	14.72	-13.6	28.32	Vertical	46.00
936.584500	15.92	-2.7	18.62	Vertical	46.00

For 802.11ax(HE20) Channel No.:100

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.000000	20.49	-21.5	41.99	Vertical	40.00
84.814000	24.12	-22.8	46.92	Vertical	40.00
153.501000	25.95	-22.2	48.15	Vertical	43.50
194.823000	23.16	-19.5	42.66	Vertical	43.50
377.554000	14.61	-13.6	28.21	Vertical	46.00
926.388500	15.95	-2.8	18.75	Vertical	46.00

For 802.11a Channel No.:120

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.040000	20.38	-21.5	41.88	Vertical	40.00
85.196000	24.82	-22.7	47.52	Vertical	40.00
153.541000	25.97	-22.2	48.17	Vertical	43.50
193.581500	23.13	-19.7	42.83	Vertical	43.50
374.513000	12.84	-13.7	26.54	Vertical	46.00
927.532000	15.93	-2.8	18.73	Vertical	46.00

For 802.11n(HT20) Channel No.:120

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.040000	20.45	-21.5	41.95	Vertical	40.00
85.527000	25.04	-22.6	47.64	Vertical	40.00
153.538500	26.38	-22.2	48.58	Vertical	43.50
193.382500	21.50	-19.7	41.20	Vertical	43.50
376.590000	14.15	-13.6	27.75	Vertical	46.00
905.162500	15.65	-3.1	18.75	Vertical	46.00

For 802.11ac(VHT20) Channel No.:120

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.822000	19.74	-20.7	40.44	Vertical	40.00
85.498000	25.05	-22.6	47.65	Vertical	40.00
148.203500	23.37	-22.3	45.67	Vertical	43.50
185.112000	21.56	-20.4	41.96	Vertical	43.50
376.590000	14.17	-13.6	27.77	Vertical	46.00
880.345000	15.59	-3.5	19.09	Vertical	46.00

For 802.11ax(HE20) Channel No.:120

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.000000	20.50	-21.5	42.00	Vertical	40.00
85.538000	24.97	-22.6	47.57	Vertical	40.00
153.669500	26.47	-22.2	48.67	Vertical	43.50
195.125000	22.06	-19.5	41.56	Vertical	43.50
377.714000	14.63	-13.6	28.23	Vertical	46.00
919.573000	15.81	-2.9	18.71	Vertical	46.00

For 802.11a Channel No.:144

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.000000	22.00	-21.5	43.50	Vertical	40.00
85.475000	24.99	-22.6	47.59	Vertical	40.00
173.063500	18.11	-21.2	39.31	Vertical	43.50
196.982500	25.36	-19.3	44.66	Vertical	43.50
384.557500	14.98	-13.3	28.28	Vertical	46.00
957.143500	17.32	-2.5	19.82	Vertical	46.00

For 802.11n(HT20) Channel No.:144

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.873000	19.85	-20.6	40.45	Vertical	40.00
85.852000	23.58	-22.5	46.08	Vertical	40.00
167.454500	14.31	-21.5	35.81	Vertical	43.50
188.564000	23.52	-20.1	43.62	Vertical	43.50
413.013500	13.13	-12.6	25.73	Vertical	46.00
873.600000	15.77	-3.6	19.37	Vertical	46.00

For 802.11ac(VHT20) Channel No.:144

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.856000	20.33	-20.7	41.03	Vertical	40.00
85.202000	23.39	-22.7	46.09	Vertical	40.00
173.472000	17.21	-21.2	38.41	Vertical	43.50
194.737000	25.40	-19.6	45.00	Vertical	43.50
377.582000	13.49	-13.6	27.09	Vertical	46.00
891.791000	16.00	-3.3	19.30	Vertical	46.00

For 802.11ax(HE) Channel No.:144

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.822000	19.86	-20.7	40.56	Vertical	40.00
85.475000	24.21	-22.6	46.81	Vertical	40.00
172.550500	16.94	-21.3	38.24	Vertical	43.50
195.245000	25.32	-19.5	44.82	Vertical	43.50
405.513000	14.38	-12.7	27.08	Vertical	46.00
880.196000	16.02	-3.5	19.52	Vertical	46.00

For 802.11n(HT40) Channel No.:102

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
31.292000	20.40	-21.1	41.50	Vertical	40.00
85.620500	24.23	-22.6	46.83	Vertical	40.00
172.453500	17.24	-21.3	38.54	Vertical	43.50
195.354000	25.38	-19.5	44.88	Vertical	43.50
409.309500	14.40	-12.6	27.00	Vertical	46.00
948.827000	16.98	-2.6	19.58	Vertical	46.00

For 802.11ac(VHT40) Channel No.:102

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
52.589500	20.06	-17.9	37.96	Vertical	40.00
85.056500	23.63	-22.7	46.33	Vertical	40.00
172.775000	17.54	-21.2	38.74	Vertical	43.50
195.116500	25.50	-19.5	45.00	Vertical	43.50
407.612000	14.51	-12.7	27.21	Vertical	46.00
899.226000	16.60	-3.2	19.80	Vertical	46.00

For 802.11ax(HE) Channel No.:102

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.040000	20.50	-21.5	42.00	Vertical	40.00
85.489500	24.31	-22.6	46.91	Vertical	40.00
172.704500	17.38	-21.2	38.58	Vertical	43.50
195.274000	25.63	-19.5	45.13	Vertical	43.50
397.070500	14.20	-13.0	27.20	Vertical	46.00
919.147500	16.60	-2.9	19.50	Vertical	46.00

For 802.11n(HT40) Channel No.:118

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.873000	20.29	-20.6	40.89	Vertical	40.00
85.170500	24.10	-22.7	46.80	Vertical	40.00
172.872000	17.40	-21.2	38.60	Vertical	43.50
195.276500	25.47	-19.5	44.97	Vertical	43.50
394.244000	13.01	-13.1	26.11	Vertical	46.00
888.778000	16.26	-3.4	19.66	Vertical	46.00

For 802.11ac(VHT40) Channel No.:118

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
31.186500	19.94	-21.1	41.04	Vertical	40.00
84.146000	22.69	-23.1	45.79	Vertical	40.00
172.827000	17.31	-21.2	38.51	Vertical	43.50
195.177000	25.52	-19.5	45.02	Vertical	43.50
406.719500	14.53	-12.7	27.23	Vertical	46.00
903.467500	16.26	-3.1	19.36	Vertical	46.00

For 802.11ax(HE40) Channel No.:118

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.508000	19.55	-20.8	40.35	Vertical	40.00
84.146000	22.69	-23.1	45.79	Vertical	40.00
97.546500	14.34	-19.6	33.94	Vertical	43.50
195.636500	25.08	-19.5	44.58	Vertical	43.50
405.310500	14.31	-12.7	27.01	Vertical	46.00
924.765000	16.32	-2.8	19.12	Vertical	46.00

For 802.11n(HT40) Channel No.:142

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.844000	21.63	-20.7	42.33	Vertical	40.00
84.742500	24.85	-22.9	47.75	Vertical	40.00
173.343500	18.51	-21.2	39.71	Vertical	43.50
184.115500	22.43	-20.5	42.93	Vertical	43.50
387.145000	14.16	-13.3	27.46	Vertical	46.00
919.592500	17.27	-2.9	20.17	Vertical	46.00

For 802.11ac(VHT40) Channel No.:142

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.833000	20.88	-20.7	41.58	Vertical	40.00
85.475000	24.75	-22.6	47.35	Vertical	40.00
172.926500	17.63	-21.2	38.83	Vertical	43.50
195.491000	25.35	-19.5	44.85	Vertical	43.50
397.915500	14.80	-12.9	27.70	Vertical	46.00
912.035000	16.85	-3.0	19.85	Vertical	46.00

For 802.11ax(HE40) Channel No.:142

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.533500	19.56	-20.7	40.26	Vertical	40.00
85.153500	24.72	-22.7	47.42	Vertical	40.00
153.678000	26.44	-22.2	48.64	Vertical	43.50
186.843500	21.91	-20.2	42.11	Vertical	43.50
378.684000	14.93	-13.6	28.53	Vertical	46.00
931.778000	15.93	-2.7	18.63	Vertical	46.00

For 802.11ac(VHT80) Channel No.:106

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
52.144500	16.03	-17.8	33.83	Vertical	40.00
85.444500	24.33	-22.6	46.93	Vertical	40.00
164.499500	11.97	-21.7	33.67	Vertical	43.50
187.927500	23.43	-20.1	43.53	Vertical	43.50
405.205000	13.40	-12.7	26.10	Vertical	46.00
846.178000	15.26	-4.1	19.36	Vertical	46.00

For 802.11ax(HE80) Channel No.:106

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
31.104000	15.54	-21.1	36.64	Vertical	40.00
85.147500	24.41	-22.7	47.11	Vertical	40.00
164.042500	13.78	-21.7	35.48	Vertical	43.50
188.800500	20.74	-20.1	40.84	Vertical	43.50
394.352000	11.52	-13.0	24.52	Vertical	46.00
955.516500	16.36	-2.5	18.86	Vertical	46.00



For 802.11ac(VHT80) Channel No.:122

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
41.243000	16.94	-18.4	35.34	Vertical	40.00
85.065000	23.32	-22.7	46.02	Vertical	40.00
160.778500	11.83	-21.9	33.73	Vertical	43.50
194.492000	21.98	-19.6	41.58	Vertical	43.50
407.660500	10.79	-12.7	23.49	Vertical	46.00
909.456000	15.98	-3.0	18.98	Vertical	46.00

For 802.11ax(HE80) Channel No.:122

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
40.903500	16.98	-18.4	35.38	Vertical	40.00
85.732000	23.96	-22.5	46.46	Vertical	40.00
172.909500	14.42	-21.2	35.62	Vertical	43.50
189.159500	12.47	-20.0	32.47	Vertical	43.50
408.305500	9.98	-12.6	22.58	Vertical	46.00
944.264500	16.17	-2.7	18.87	Vertical	46.00

For 802.11ac(VHT80) Channel No.:138

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.202500	21.46	-20.8	42.26	Vertical	40.00
86.003500	27.27	-22.4	49.67	Vertical	40.00
163.220500	17.66	-21.8	39.46	Vertical	43.50
190.315000	25.36	-19.9	45.26	Vertical	43.50
391.290500	15.41	-13.1	28.51	Vertical	46.00
946.518500	16.10	-2.6	18.70	Vertical	46.00

For 802.11ax(HE80) Channel No.:138

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
31.192500	23.07	-21.1	44.17	Vertical	40.00
85.493000	27.05	-22.6	49.65	Vertical	40.00
161.959500	17.44	-21.8	39.24	Vertical	43.50
187.405000	25.07	-20.2	45.27	Vertical	43.50
390.170000	12.85	-13.2	26.05	Vertical	46.00
935.415500	16.13	-2.7	18.83	Vertical	46.00



For 802.11a Channel No.:149

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
31.557500	21.64	-21.0	42.64	Vertical	40.00
85.852000	27.21	-22.5	49.71	Vertical	40.00
166.450500	17.46	-21.6	39.06	Vertical	43.50
189.895500	25.83	-20.0	45.83	Vertical	43.50
390.394500	14.53	-13.2	27.73	Vertical	46.00
926.397000	16.09	-2.8	18.89	Vertical	46.00

For 802.11n(HT20) Channel No.:149

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
33.192000	21.36	-20.6	41.96	Vertical	40.00
85.709000	27.15	-22.5	49.65	Vertical	40.00
162.541500	17.65	-21.8	39.45	Vertical	43.50
189.604500	25.91	-20.0	45.91	Vertical	43.50
387.467500	14.85	-13.3	28.15	Vertical	46.00
896.253000	15.76	-3.3	19.06	Vertical	46.00

For 802.11ac(VHT20) Channel No.:149

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.531000	21.60	-20.7	42.30	Vertical	40.00
85.812000	27.06	-22.5	49.56	Vertical	40.00
164.108000	17.85	-21.7	39.55	Vertical	43.50
189.448000	25.94	-20.0	45.94	Vertical	43.50
397.011000	14.79	-13.0	27.79	Vertical	46.00
956.549500	16.23	-2.5	18.73	Vertical	46.00

For 802.11ax(HE20) Channel No.:149

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
31.529500	21.03	-21.0	42.03	Vertical	40.00
85.826500	27.03	-22.5	49.53	Vertical	40.00
164.262000	17.57	-21.7	39.27	Vertical	43.50
189.459000	25.88	-20.0	45.88	Vertical	43.50
396.796500	14.80	-13.0	27.80	Vertical	46.00
931.466500	16.07	-2.7	18.77	Vertical	46.00

For 802.11a Channel No.:157

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.861500	20.60	-21.2	41.80	Vertical	40.00
86.736000	25.30	-22.2	47.50	Vertical	40.00
163.203500	16.88	-21.8	38.68	Vertical	43.50
189.542500	25.84	-20.0	45.84	Vertical	43.50
370.981000	12.82	-13.8	26.62	Vertical	46.00
929.878000	15.99	-2.8	18.79	Vertical	46.00

For 802.11n(HT20) Channel No.:157

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.881500	21.56	-20.6	42.16	Vertical	40.00
85.293000	24.92	-22.7	47.62	Vertical	40.00
161.620000	16.50	-21.8	38.30	Vertical	43.50
188.067000	23.74	-20.1	43.84	Vertical	43.50
373.750500	14.21	-13.7	27.91	Vertical	46.00
903.895500	15.82	-3.1	18.92	Vertical	46.00

For 802.11ac(VHT20) Channel No.:157

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
33.192000	20.54	-20.6	41.14	Vertical	40.00
85.147500	22.57	-22.7	45.27	Vertical	40.00
160.862000	10.07	-21.9	31.97	Vertical	43.50
202.526000	23.53	-19.0	42.53	Vertical	43.50
387.399500	13.75	-13.3	27.05	Vertical	46.00
895.125500	15.83	-3.3	19.13	Vertical	46.00

For 802.11ax(HE20) Channel No.:157

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.000000	18.80	-21.5	40.30	Vertical	40.00
85.552500	23.26	-22.6	45.86	Vertical	40.00
172.823500	15.70	-21.2	36.90	Vertical	43.50
192.697500	19.25	-19.7	38.95	Vertical	43.50
401.256000	10.84	-12.8	23.64	Vertical	46.00
937.115500	16.10	-2.7	18.80	Vertical	46.00

For 802.11a Channel No.:165

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
51.591500	19.67	-17.7	37.37	Vertical	40.00
86.194000	23.84	-22.4	46.24	Vertical	40.00
161.284000	14.87	-21.9	36.77	Vertical	43.50
203.281500	21.59	-19.0	40.59	Vertical	43.50
394.742500	11.61	-13.0	24.61	Vertical	46.00
929.792000	15.94	-2.8	18.74	Vertical	46.00

For 802.11n(HT20) Channel No.:165

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
50.635000	16.45	-17.6	34.05	Vertical	40.00
85.523500	23.44	-22.6	46.04	Vertical	40.00
161.201500	15.23	-21.9	37.13	Vertical	43.50
189.728000	21.04	-20.0	41.04	Vertical	43.50
396.785500	11.04	-13.0	24.04	Vertical	46.00
949.514500	16.08	-2.6	18.68	Vertical	46.00

For 802.11ac(VHT20) Channel No.:165

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.822000	17.71	-20.7	38.41	Vertical	40.00
86.533500	22.92	-22.2	45.12	Vertical	40.00
98.279000	12.18	-19.5	31.68	Vertical	43.50
187.925000	22.72	-20.1	42.82	Vertical	43.50
397.599000	12.18	-12.9	25.08	Vertical	46.00
918.357000	15.87	-2.9	18.77	Vertical	46.00

For 802.11ax(HE20) Channel No.:165

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
41.232000	16.81	-18.4	35.21	Vertical	40.00
84.979000	21.76	-22.8	44.56	Vertical	40.00
163.560000	12.39	-21.8	34.19	Vertical	43.50
187.069000	20.88	-20.2	41.08	Vertical	43.50
521.656000	10.55	-10.1	20.65	Vertical	46.00
932.274000	15.89	-2.7	18.59	Vertical	46.00

For 802.11n(HT40) Channel No.:151

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.822000	17.33	-20.7	38.03	Vertical	40.00
85.461500	23.45	-22.6	46.05	Vertical	40.00
160.725000	11.17	-21.9	33.07	Vertical	43.50
196.637000	19.58	-19.4	38.98	Vertical	43.50
412.868000	11.03	-12.6	23.63	Vertical	46.00
929.235500	15.84	-2.8	18.64	Vertical	46.00

For 802.11ac(VHT40) Channel No.:151

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
40.924000	16.36	-18.4	34.76	Vertical	40.00
86.731000	17.35	-22.2	39.55	Vertical	40.00
164.160000	3.42	-21.7	25.12	Vertical	43.50
189.830000	21.60	-20.0	41.60	Vertical	43.50
538.576500	11.15	-9.5	20.65	Vertical	46.00
902.303500	15.79	-3.1	18.89	Vertical	46.00

For 802.11ax(HE40) Channel No.:151

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
52.652500	14.00	-17.9	31.90	Vertical	40.00
85.173000	21.20	-22.7	43.90	Vertical	40.00
97.909000	9.30	-19.6	28.90	Vertical	43.50
201.068500	16.94	-19.0	35.94	Vertical	43.50
394.438000	11.95	-13.0	24.95	Vertical	46.00
925.632000	15.94	-2.8	18.74	Vertical	46.00

For 802.11n(HT40) Channel No.:159

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.822000	17.15	-20.7	37.85	Vertical	40.00
85.264000	17.20	-22.7	39.90	Vertical	40.00
160.059500	7.60	-21.9	29.50	Vertical	43.50
186.677500	11.74	-20.3	32.04	Vertical	43.50
549.269500	11.11	-9.3	20.41	Vertical	46.00
869.646000	15.41	-3.7	19.11	Vertical	46.00

For 802.11ac(VHT40) Channel No.:159

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.120000	21.80	-21.4	43.20	Vertical	40.00
85.835000	23.39	-22.5	45.89	Vertical	40.00
158.613000	15.91	-22.0	37.91	Vertical	43.50
186.500500	21.85	-20.3	42.15	Vertical	43.50
387.242000	14.41	-13.3	27.71	Vertical	46.00
928.953000	15.88	-2.8	18.68	Vertical	46.00

For 802.11ax(HE40) Channel No.:159

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
31.566000	20.74	-21.0	41.74	Vertical	40.00
85.535500	23.15	-22.6	45.75	Vertical	40.00
97.618000	16.23	-19.6	35.83	Vertical	43.50
197.579000	24.19	-19.3	43.49	Vertical	43.50
384.526000	14.47	-13.3	27.77	Vertical	46.00
949.257500	16.15	-2.6	18.75	Vertical	46.00

For 802.11ac(VHT80) Channel No.:155

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.000000	21.50	-21.5	43.00	Vertical	40.00
85.875000	23.26	-22.5	45.76	Vertical	40.00
98.019500	16.69	-19.5	36.19	Vertical	43.50
196.024500	24.44	-19.4	43.84	Vertical	43.50
381.434000	15.45	-13.5	28.95	Vertical	46.00
926.913500	16.00	-2.8	18.80	Vertical	46.00

For 802.11ax(HE80) Channel No.:155

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
31.232500	20.92	-21.1	42.02	Vertical	40.00
85.860500	23.22	-22.5	45.72	Vertical	40.00
98.019500	16.64	-19.5	36.14	Vertical	43.50
196.200500	24.35	-19.4	43.75	Vertical	43.50
381.793000	15.18	-13.4	28.58	Vertical	46.00
919.820500	15.80	-2.9	18.70	Vertical	46.00

For 802.11ac(VHT160) Channel No.:50

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.000000	21.23	-21.5	42.73	Vertical	40.00
85.875000	22.76	-22.5	45.26	Vertical	40.00
97.711500	16.32	-19.6	35.92	Vertical	43.50
196.531500	24.12	-19.4	43.52	Vertical	43.50
381.025500	14.40	-13.5	27.90	Vertical	46.00
937.569000	16.27	-2.7	18.97	Vertical	46.00

For 802.11aX(HE160) Channel No.:50

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.850000	20.56	-20.7	41.26	Vertical	40.00
85.369500	23.60	-22.6	46.20	Vertical	40.00
157.432000	16.15	-22.0	38.15	Vertical	43.50
183.719000	22.62	-20.6	43.22	Vertical	43.50
387.807000	15.12	-13.3	28.42	Vertical	46.00
953.314500	16.03	-2.5	18.53	Vertical	46.00


For 802.11ac(VHT160) Channel No.:114

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
52.718000	20.34	-17.9	38.24	Vertical	40.00
85.841000	23.31	-22.5	45.81	Vertical	40.00
97.960000	16.59	-19.5	36.09	Vertical	43.50
182.980500	21.44	-20.6	42.04	Vertical	43.50
383.627500	15.44	-13.4	28.84	Vertical	46.00
940.133500	15.99	-2.7	18.69	Vertical	46.00


For 802.11aX(HE160) Channel No.:114

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
32.856000	20.39	-20.7	41.09	Vertical	40.00
85.846000	23.29	-22.5	45.79	Vertical	40.00
158.028500	15.48	-22.0	37.48	Vertical	43.50
197.678500	23.09	-19.3	42.39	Vertical	43.50
395.518500	12.38	-13.0	25.38	Vertical	46.00
949.597000	16.00	-2.6	18.60	Vertical	46.00

Carrier frequency (MHz): 5180  
Channel No.:36

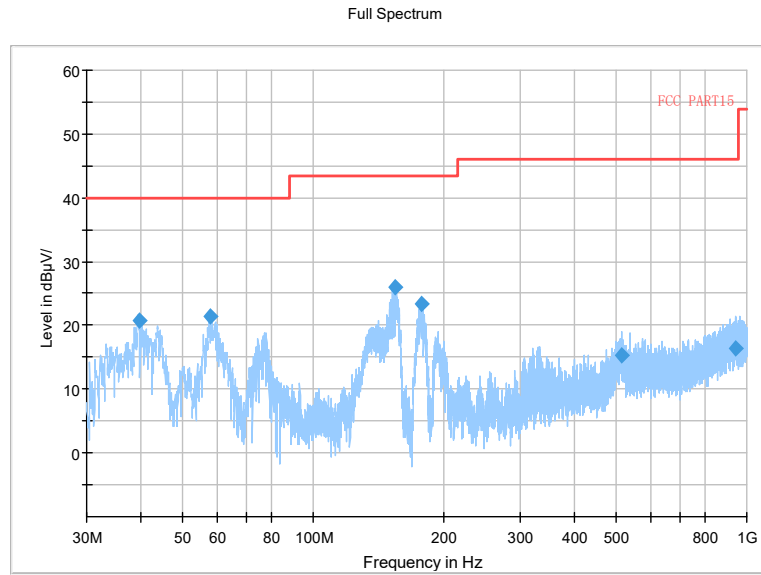


Frequency Range: 30MHz -1GHz  
Detector: QP mode  
Test Mode: 802.11a

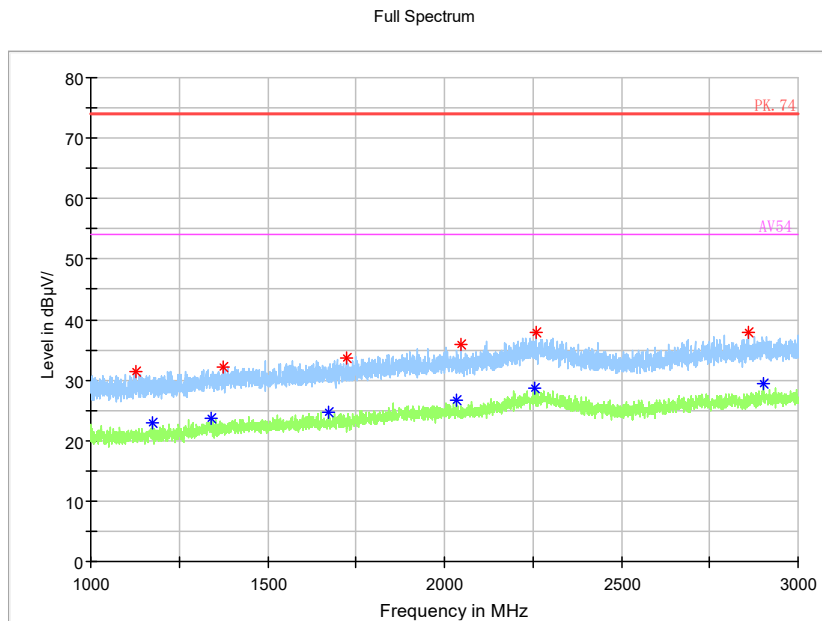


Frequency Range: 1GHz -3GHz  
Detector: Av mode and PK mode  
Modulation type: 802.11a

Full Spectrum

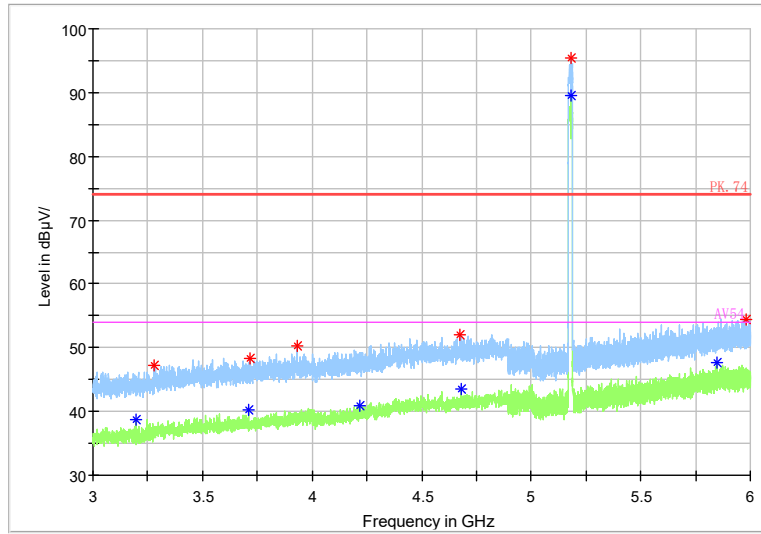

Frequency Range: 3GHz -6GHz  
Detector: Av mode and PK mode  
Modulation type: 802.11a


Full Spectrum

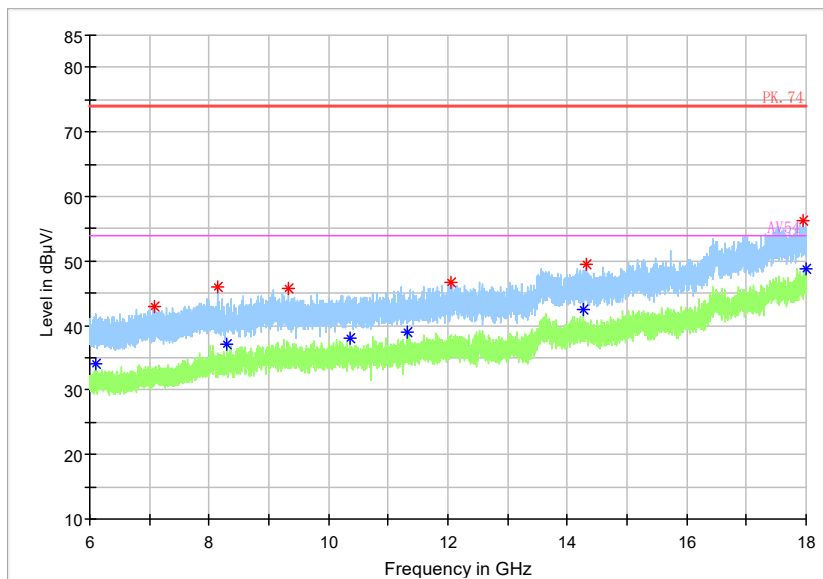

Frequency Range: 6GHz -18GHz  
Detector: Av mode and PK mode  
Modulation type: 802.11a




Full Spectrum

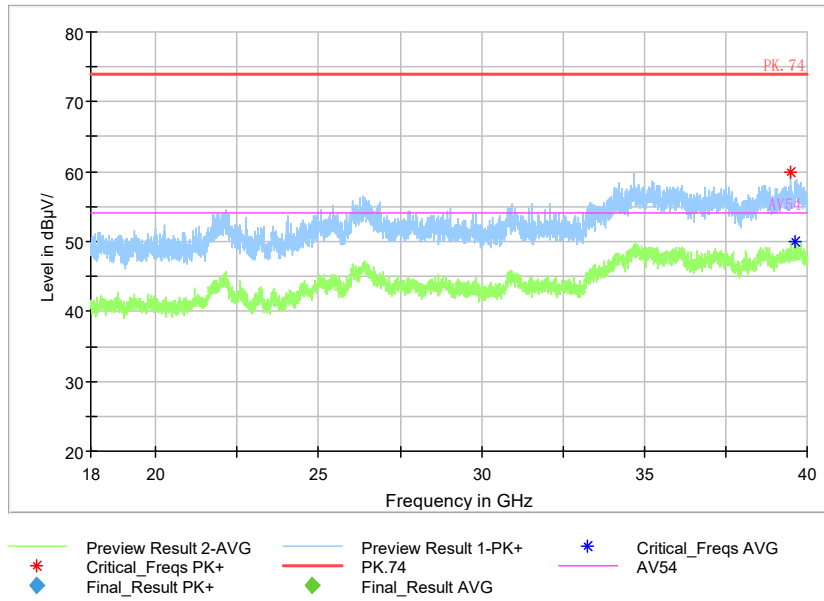


Frequency Range: 18GHz -40GHz  
 Detector: Av mode and PK mode  
 Modulation type: 802.11a

Full Spectrum

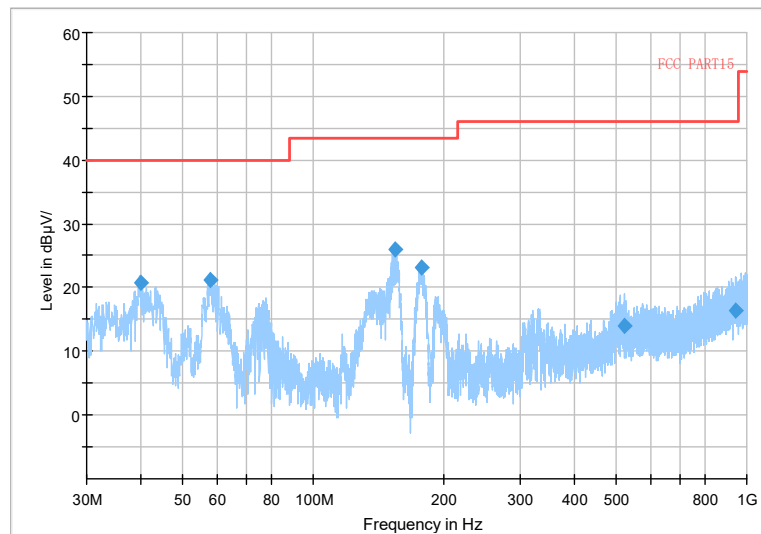


Frequency Range: 30MHz -1GHz  
 Detector: QP mode  
 Test Mode: 802.11n(HT20)

Full Spectrum

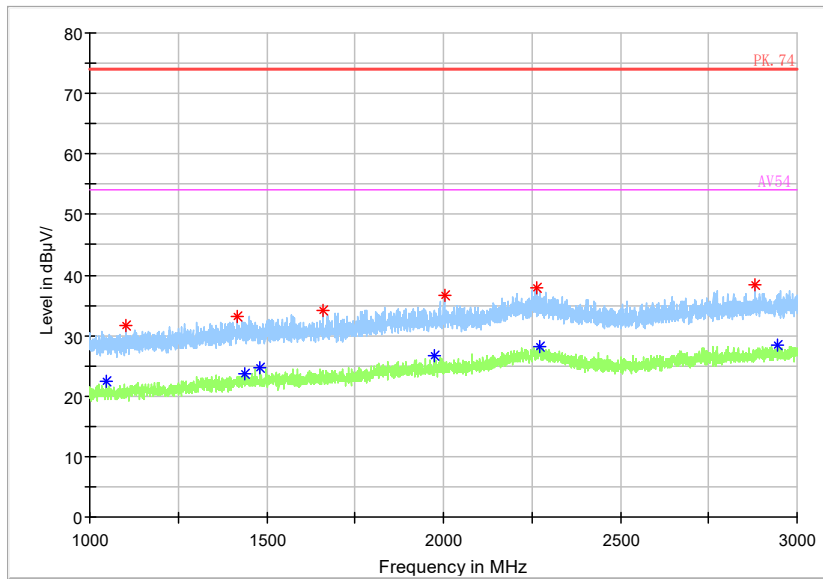


Frequency Range: 1GHz -3GHz  
 Detector: Av mode and PK mode  
 Modulation type: 802.11n(HT20)

Full Spectrum

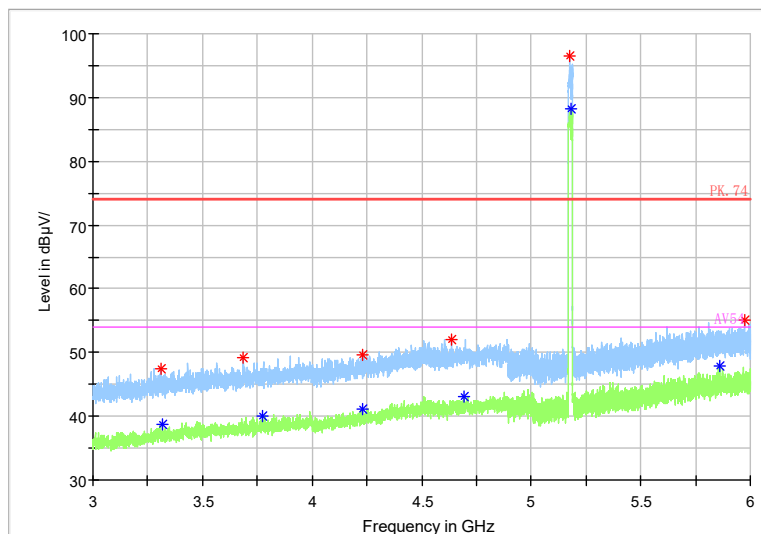


Frequency Range: 3GHz -6GHz  
 Detector: Av mode and PK mode  
 Modulation type: 802.11n(HT20)

Full Spectrum

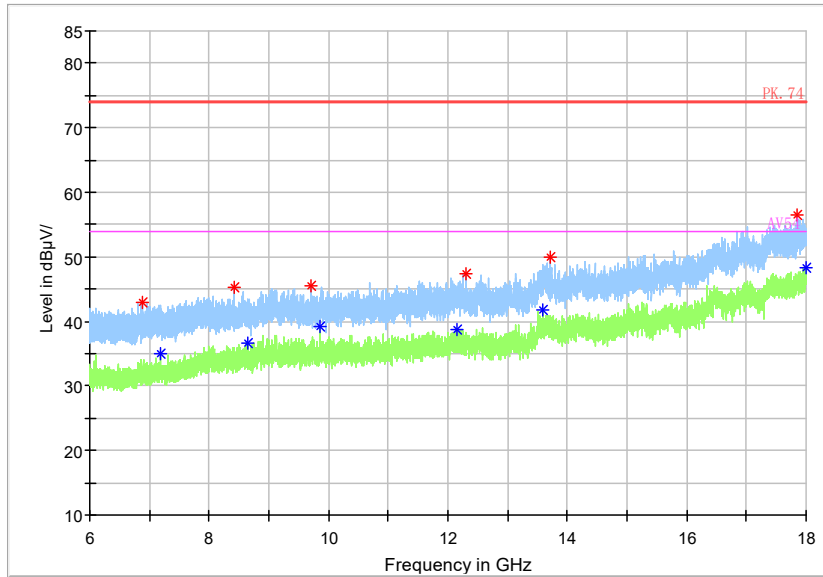

Frequency Range: 6GHz -18GHz  
 Detector: Av mode and PK mode  
 Modulation type: 802.11n(HT20)


Full Spectrum

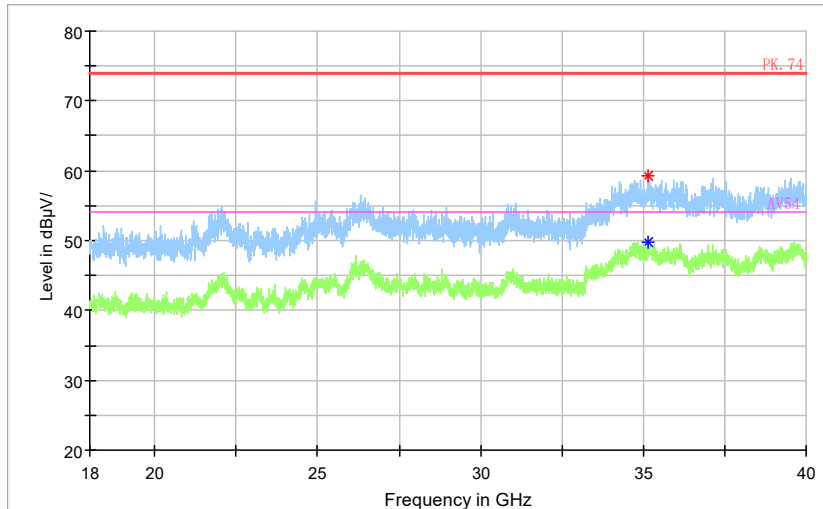

- \* Preview Result 2-AVG
- \* Preview Result 1-PK+
- \* Critical\_Freqs AVG
- \* Critical\_Freqs PK+
- PK.74
- ♦ Final\_Result AVG
- AV54
- ♦ Final\_Result PK+


Frequency Range: 18GHz -40GHz  
 Detector: Av mode and PK mode  
 Modulation type: 802.11n(HT20)

Full Spectrum

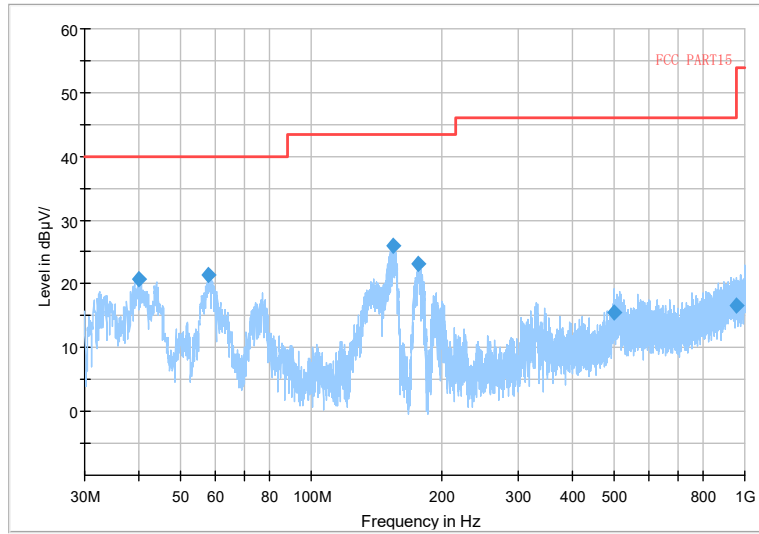


Frequency Range: 30MHz -1GHz  
Detector: QP mode  
Test Mode: 802.11ac(VHT20)

Full Spectrum

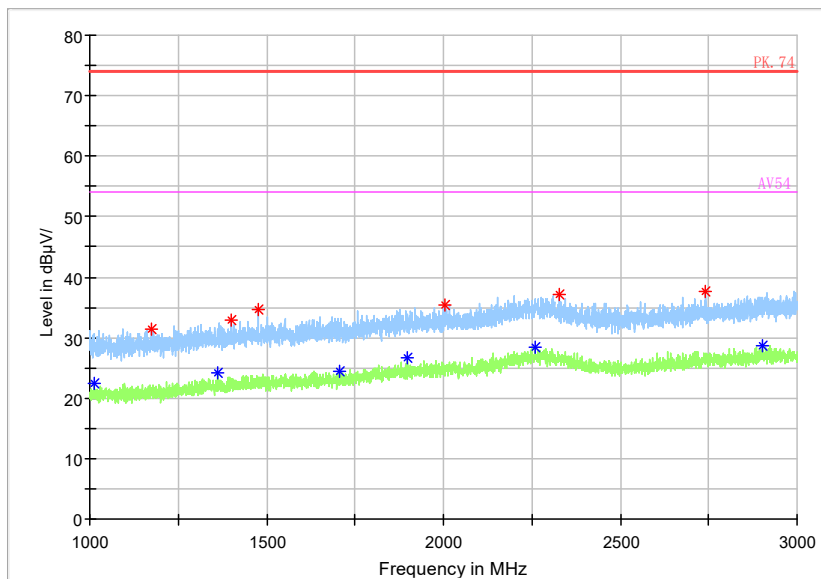


Frequency Range: 1GHz -3GHz  
Detector: Av mode and PK mode  
Test Mode: 802.11ac(VHT20)

Full Spectrum

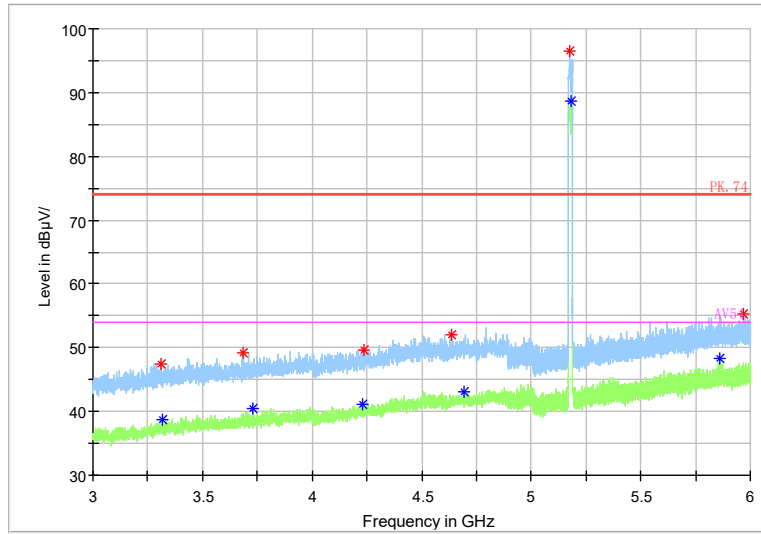


Frequency Range: 3GHz -6GHz  
Detector: Av mode and PK mode  
Test Mode: 802.11ac(VHT20)

Full Spectrum

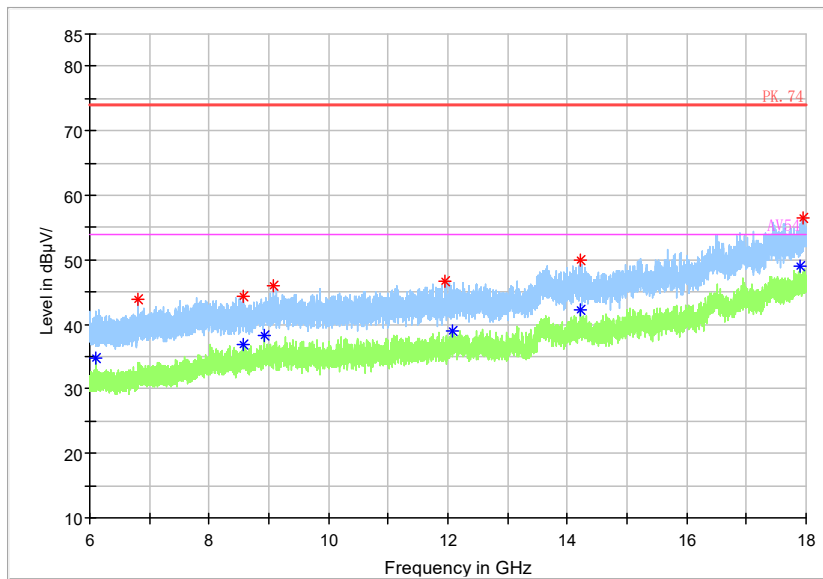


Frequency Range: 6GHz -18GHz  
Detector: Av mode and PK mode  
Test Mode: 802.11ac(VHT20)

Full Spectrum

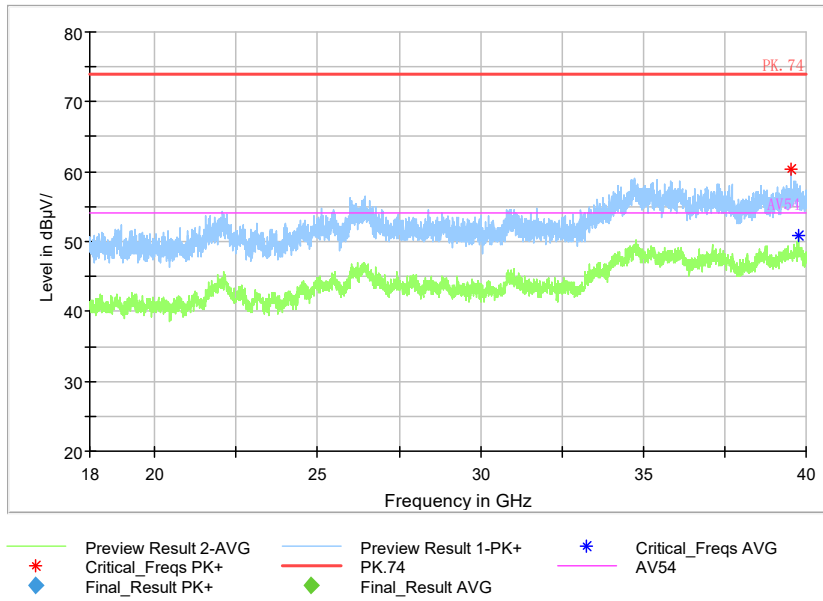


Frequency Range: 18GHz -40GHz  
 Detector: Av mode and PK mode  
 Test Mode: 802.11ac(VHT20)

Full Spectrum

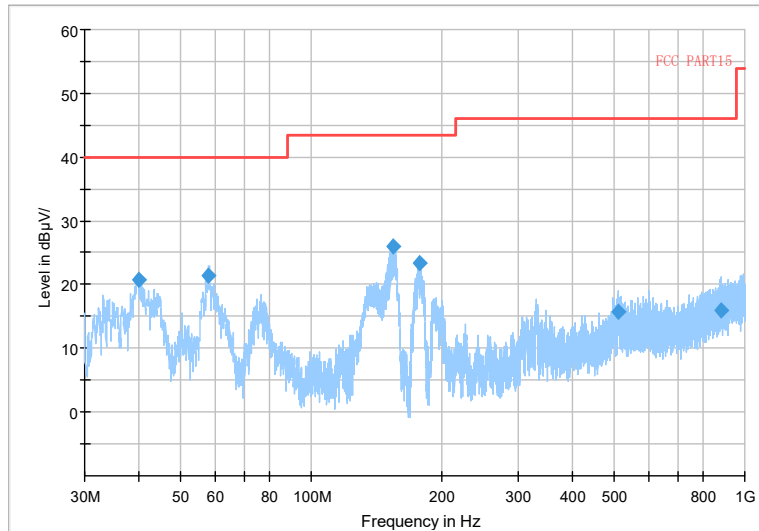


Frequency Range: 30MHz -1GHz  
 Detector: QP mode  
 Test Mode: 802.11ax(HE20)

Full Spectrum

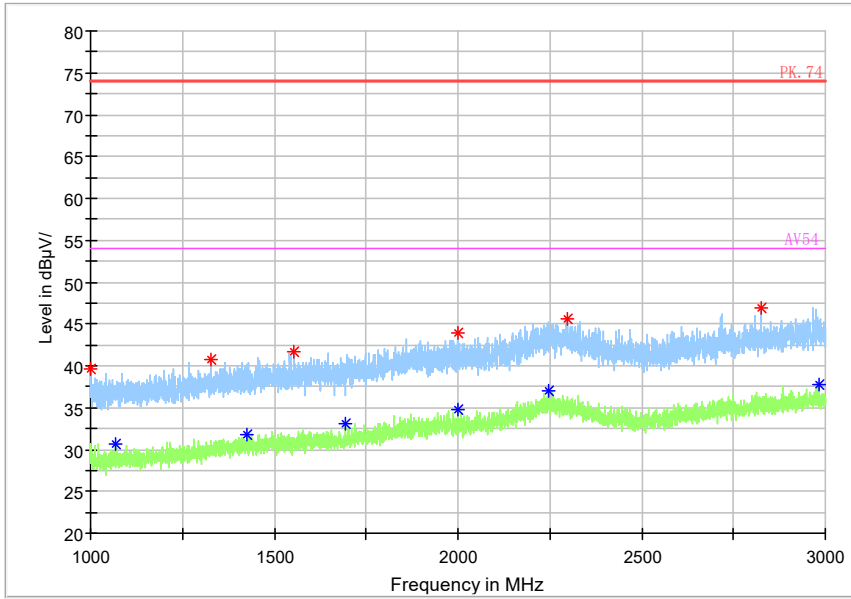


Frequency Range: 1GHz -3GHz  
Detector: Av mode and PK mode  
Modulation type: 802.11ax(HE20)

Full Spectrum

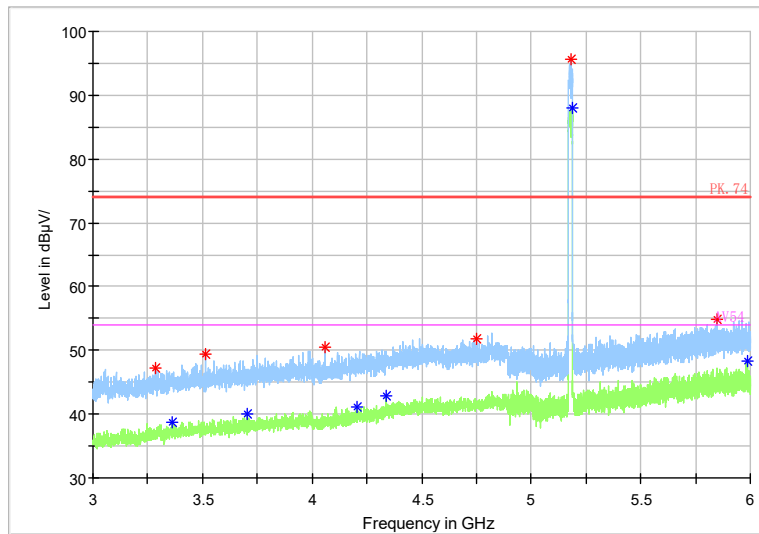


Frequency Range: 3GHz -6GHz  
Detector: Av mode and PK mode  
Modulation type: 802.11ax(HE20)

Full Spectrum

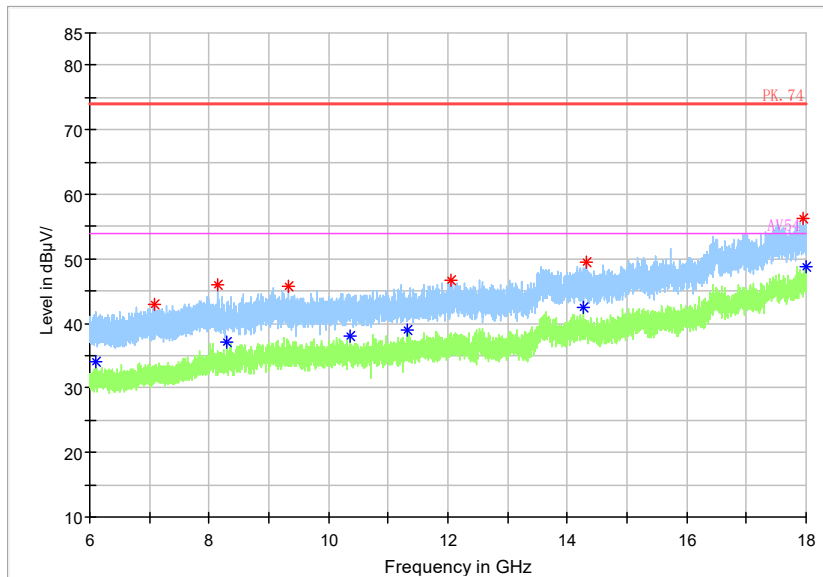

Frequency Range: 6GHz -18GHz  
Detector: Av mode and PK mode  
Modulation type: 802.11ax(HE20)

Full Spectrum

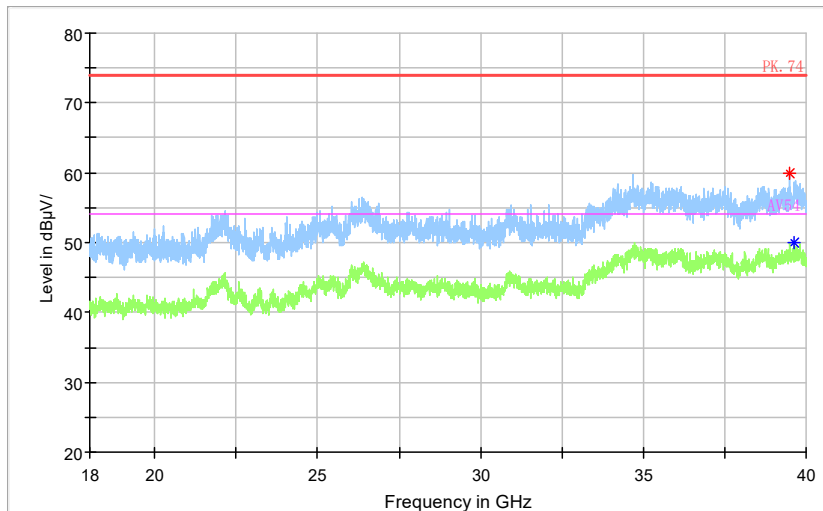


\* Preview Result 2-AVG      \* Preview Result 1-PK+      \* Critical\_Freqs AVG  
◆ Critical\_Freqs PK+      ◆ PK.74      ◆ AV54  
◆ Final\_Result PK+      ◆ Final\_Result AVG


Frequency Range: 18GHz -40GHz  
Detector: Av mode and PK mode  
Modulation type: 802.11ax(HE20)



Carrier frequency (MHz): 5200  
 Channel No.:40

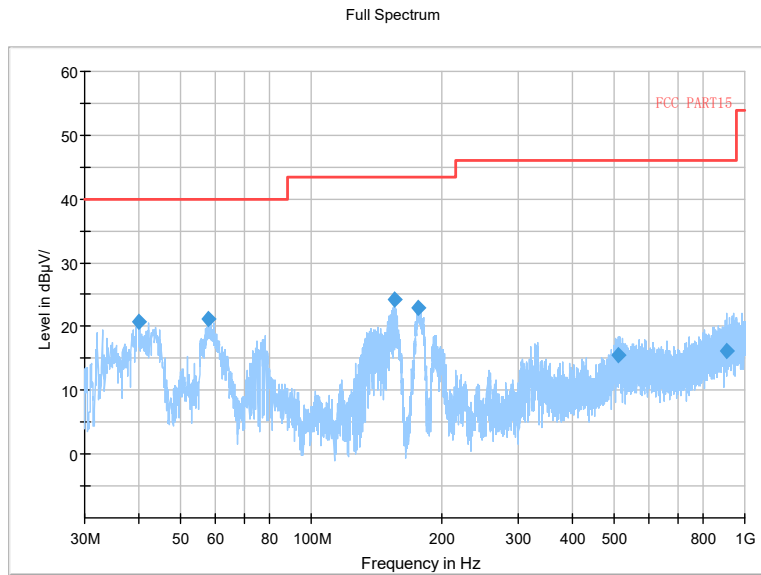


Frequency Range: 30MHz -1GHz  
 Detector: QP mode  
 Test Mode: 802.11a

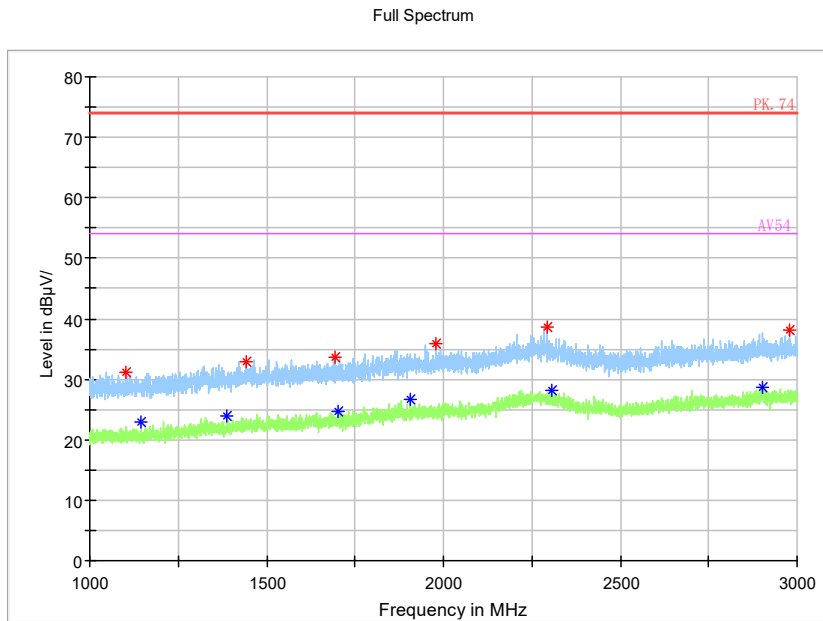


Frequency Range: 1GHz -3GHz  
 Detector: Av mode and PK mode  
 Modulation type: 802.11a

Full Spectrum

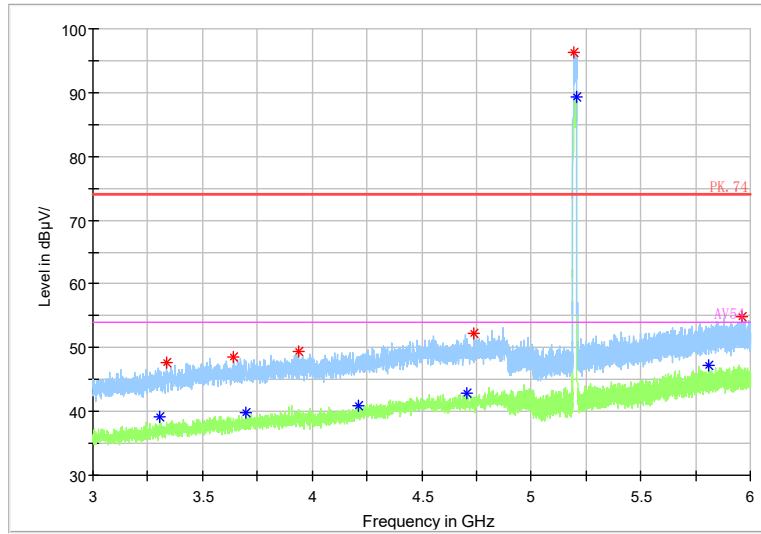


Frequency Range: 3GHz -6GHz  
 Detector: Av mode and PK mode  
 Modulation type: 802.11a

Full Spectrum

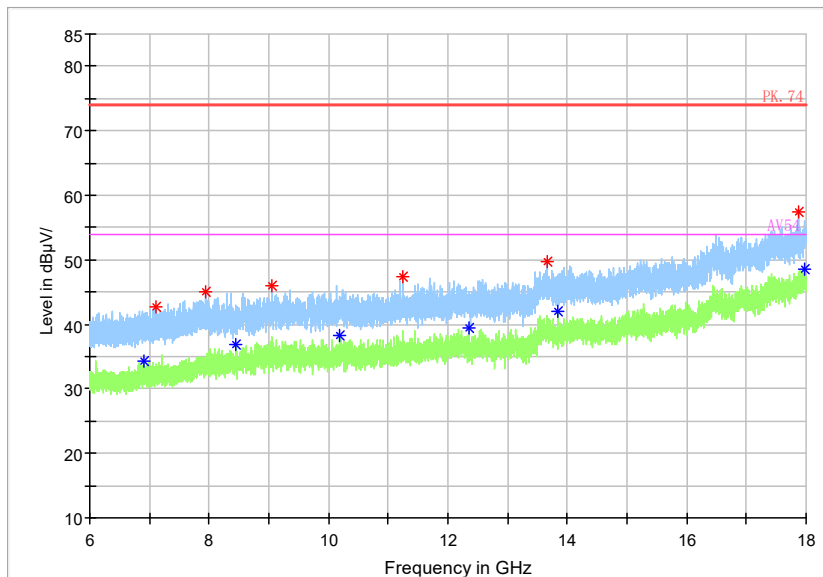


Frequency Range: 6GHz -18GHz  
 Detector: Av mode and PK mode  
 Modulation type: 802.11a

Full Spectrum

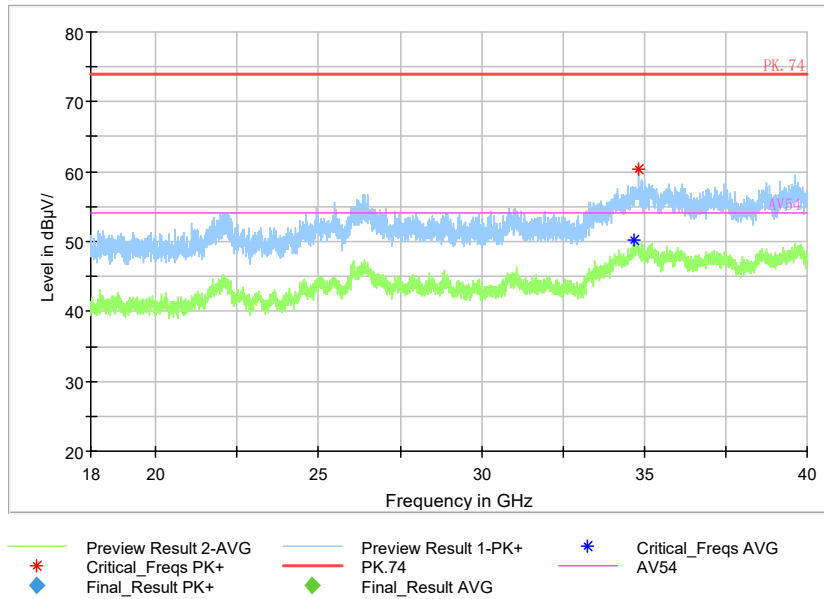


Frequency Range: 18GHz -40GHz  
 Detector: Av mode and PK mode  
 Modulation type: 802.11a

Full Spectrum

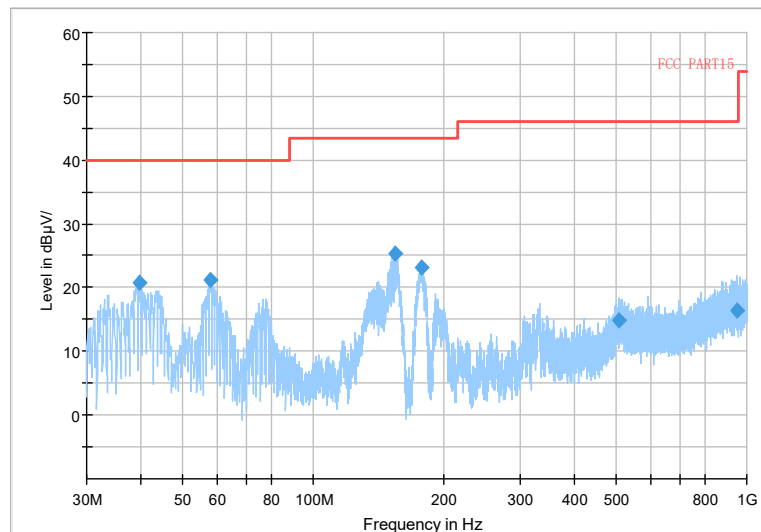


Frequency Range: 30MHz -1GHz  
 Detector: QP mode  
 Test Mode: 802.11n(HT20)

Full Spectrum

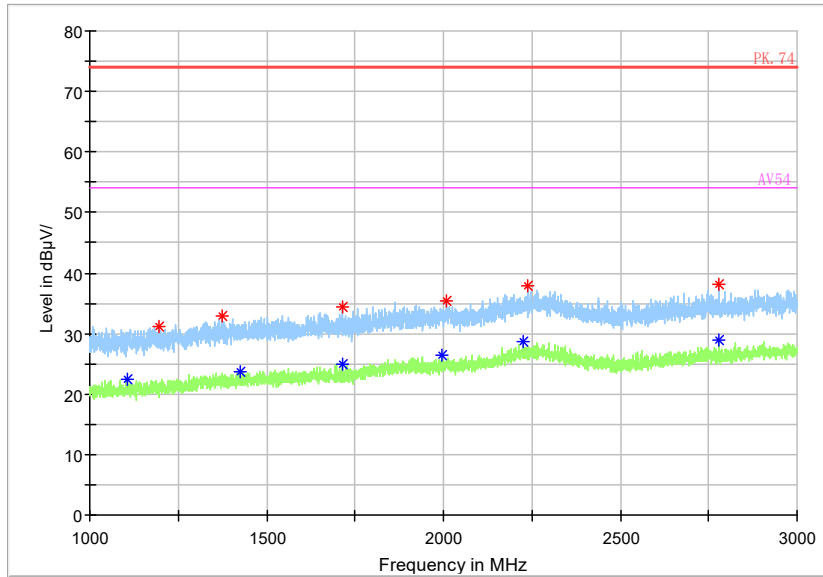


Frequency Range: 1GHz -3GHz  
 Detector: Av mode and PK mode  
 Modulation type: 802.11n(HT20)

Full Spectrum

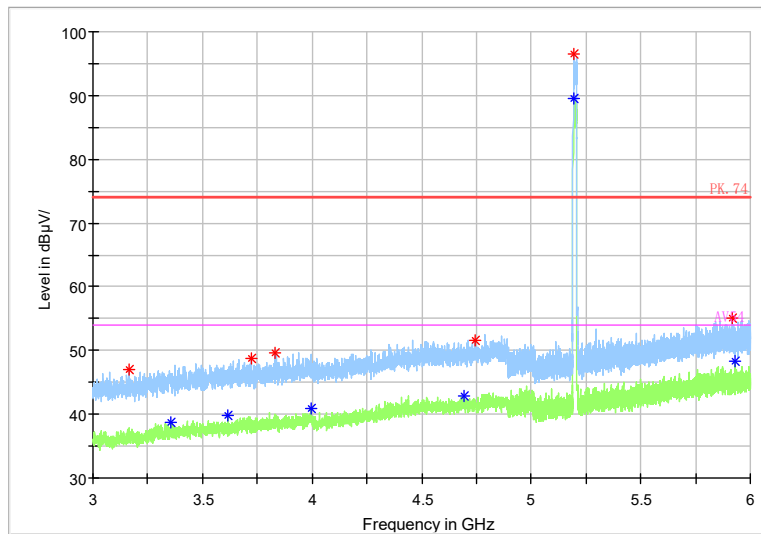


Frequency Range: 3GHz -6GHz  
 Detector: Av mode and PK mode  
 Modulation type: 802.11n(HT20)

Full Spectrum

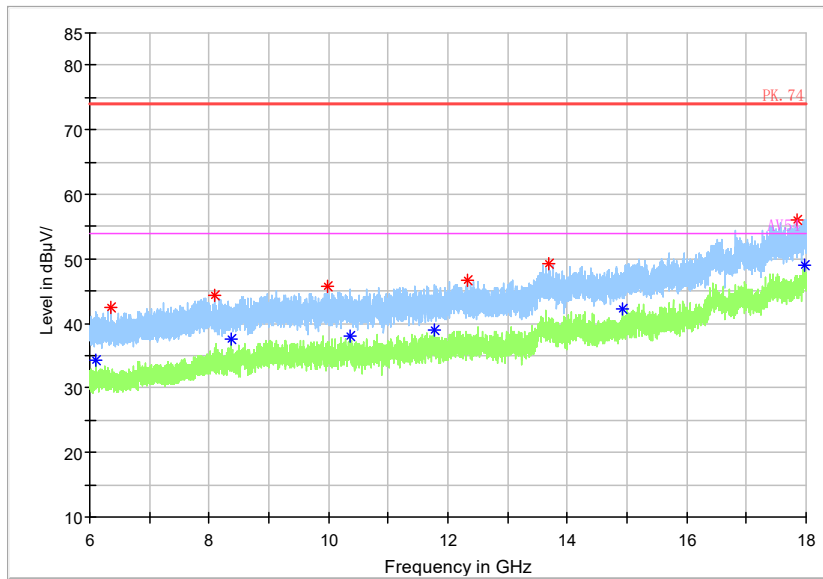

Frequency Range: 6GHz -18GHz  
 Detector: Av mode and PK mode  
 Modulation type: 802.11n(HT20)


Full Spectrum

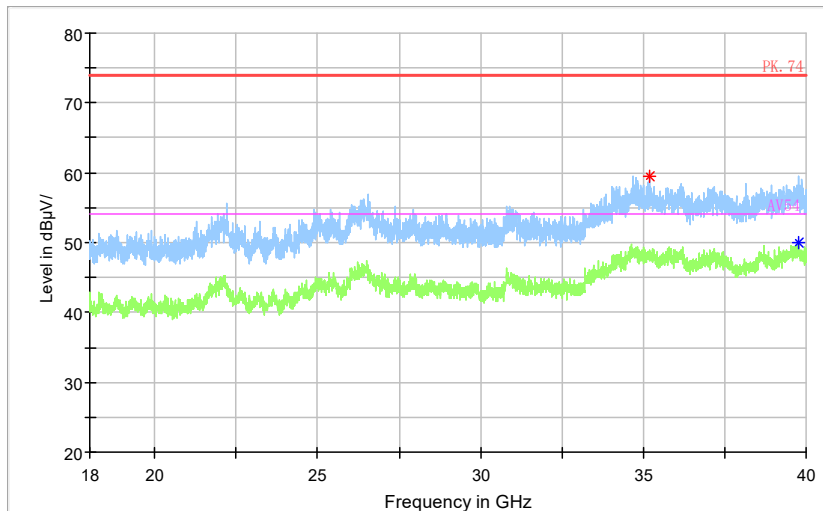

- ◆ Preview Result 2-AVG
- ◆ Preview Result 1-PK+
- \* Critical\_Freqs PK+
- ◆ Final\_Result PK+
- PK.74
- ◆ Final\_Result AVG
- \* Critical\_Freqs AVG
- AV54


Frequency Range: 18GHz -40GHz  
 Detector: Av mode and PK mode  
 Modulation type: 802.11n(HT20)

Full Spectrum

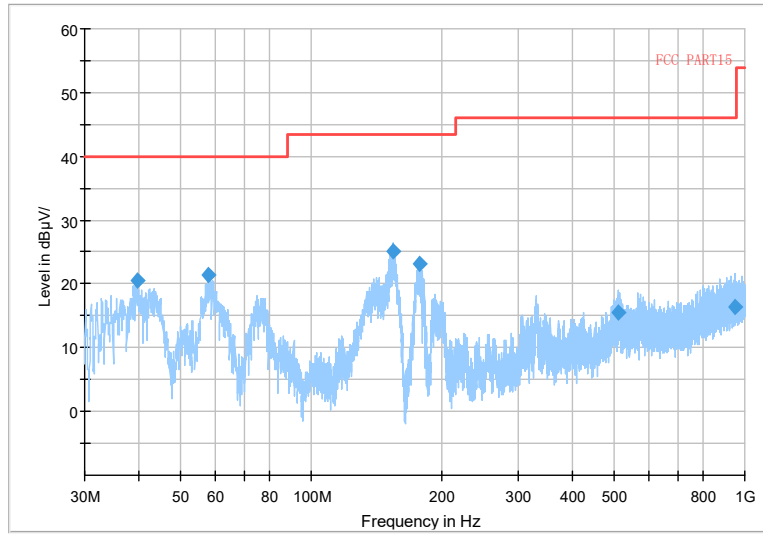


Frequency Range: 30MHz -1GHz  
 Detector: QP mode  
 Test Mode: 802.11ac(VHT20)

Full Spectrum

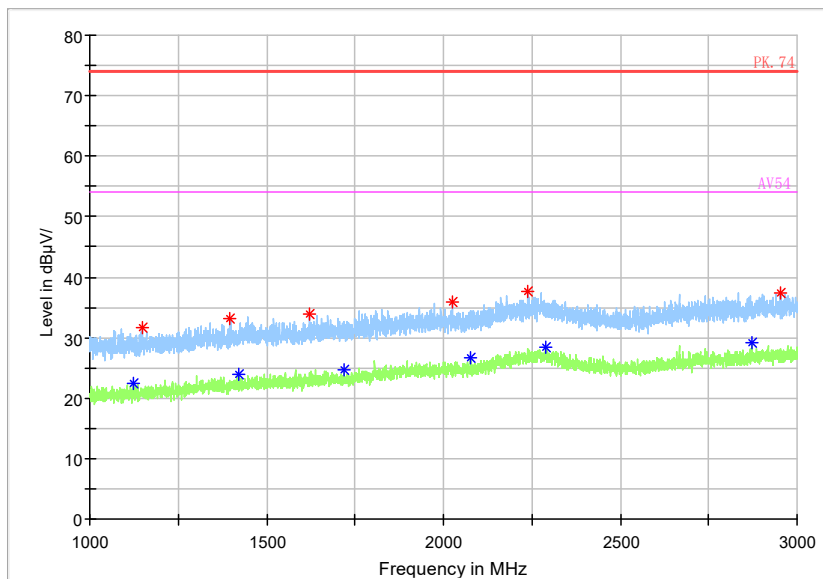


Frequency Range: 1GHz -3GHz  
 Detector: Av mode and PK mode  
 Test Mode: 802.11ac(VHT20)

Full Spectrum

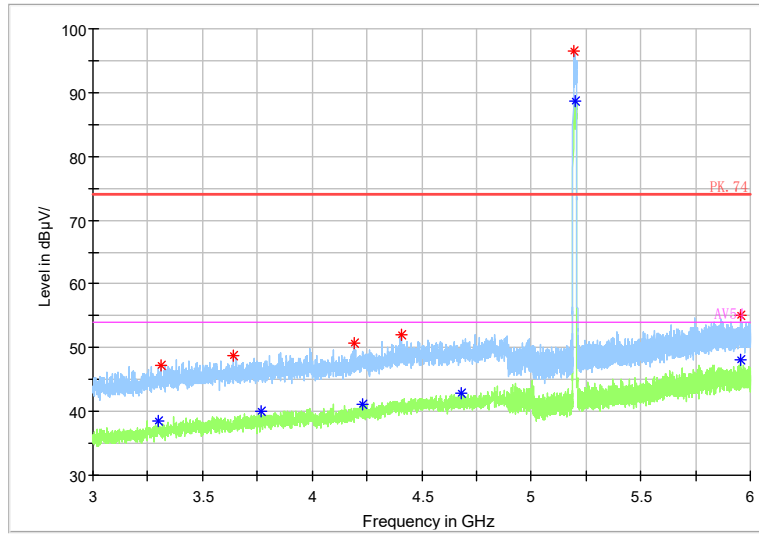

Frequency Range: 3GHz -6GHz  
 Detector: Av mode and PK mode  
 Test Mode: 802.11ac(VHT20)

Full Spectrum

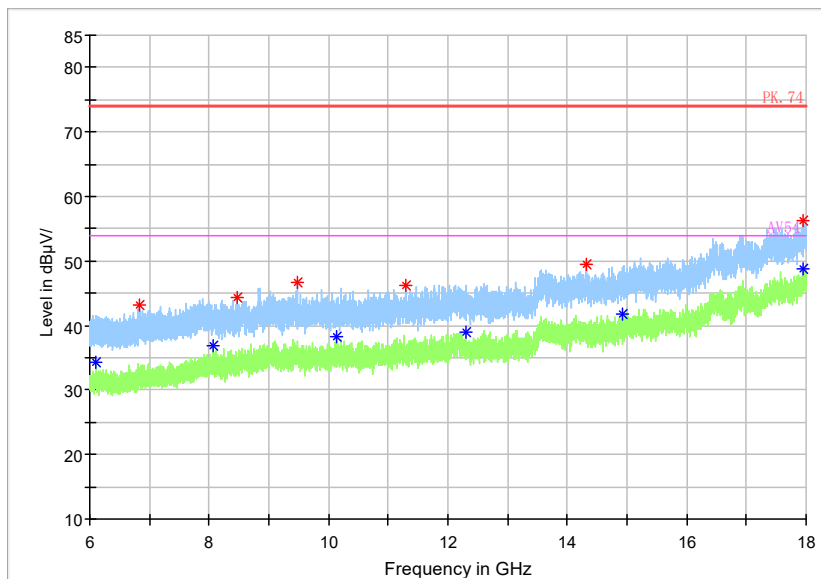


Frequency Range: 6GHz -18GHz  
 Detector: Av mode and PK mode  
 Test Mode: 802.11ac(VHT20)

Full Spectrum



Frequency Range: 18GHz -40GHz  
 Detector: Av mode and PK mode  
 Test Mode: 802.11ac(VHT20)


Full Spectrum

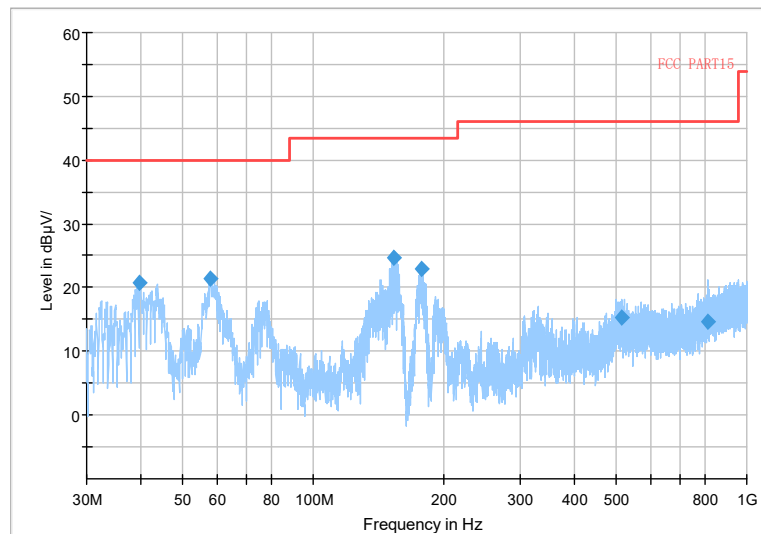

Frequency Range: 30MHz -1GHz  
 Detector: QP mode  
 Test Mode: 802.11ax(HE20)




Full Spectrum

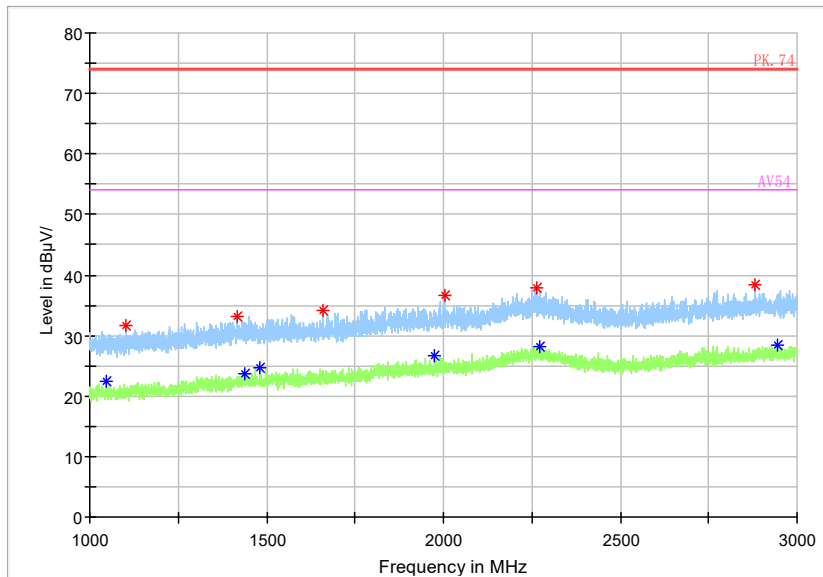


Frequency Range: 1GHz -3GHz  
Detector: Av mode and PK mode  
Modulation type: 802.11ax(HE20)

Full Spectrum

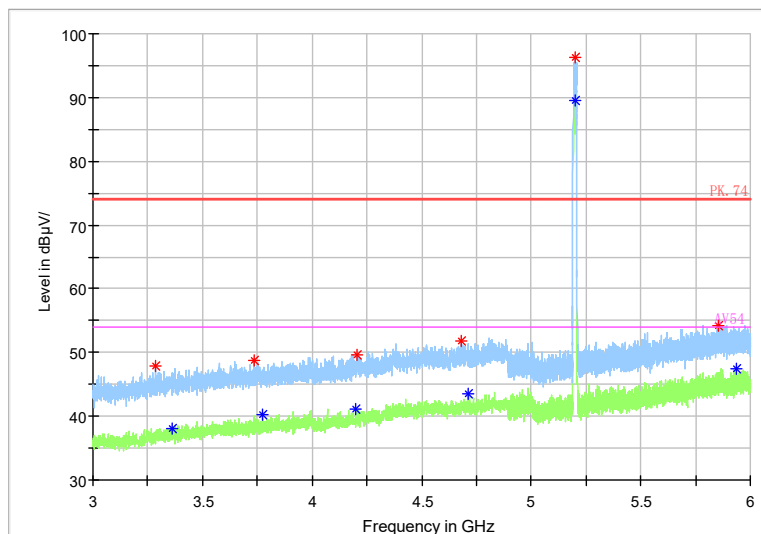


Frequency Range: 3GHz -6GHz  
Detector: Av mode and PK mode  
Modulation type: 802.11ax(HE20)

Full Spectrum

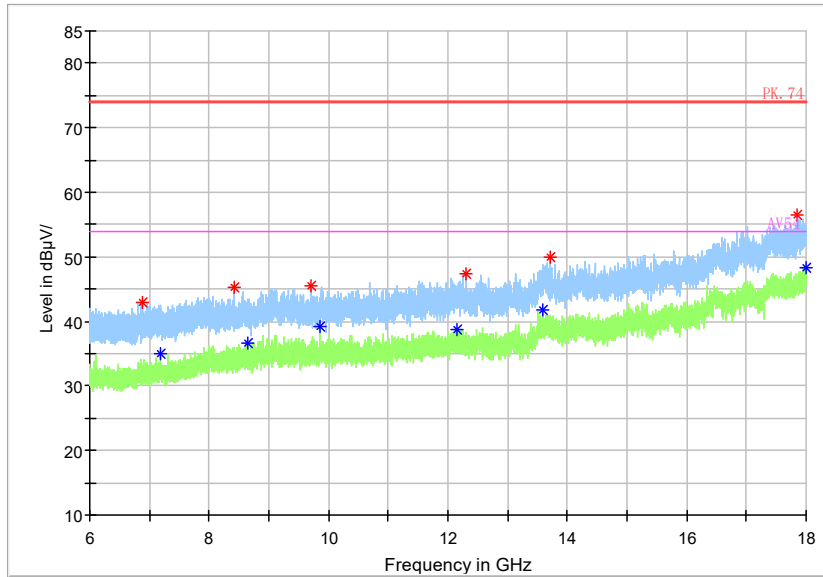

Frequency Range: 6GHz -18GHz  
 Detector: Av mode and PK mode  
 Modulation type: 802.11ax(HE20)


Full Spectrum

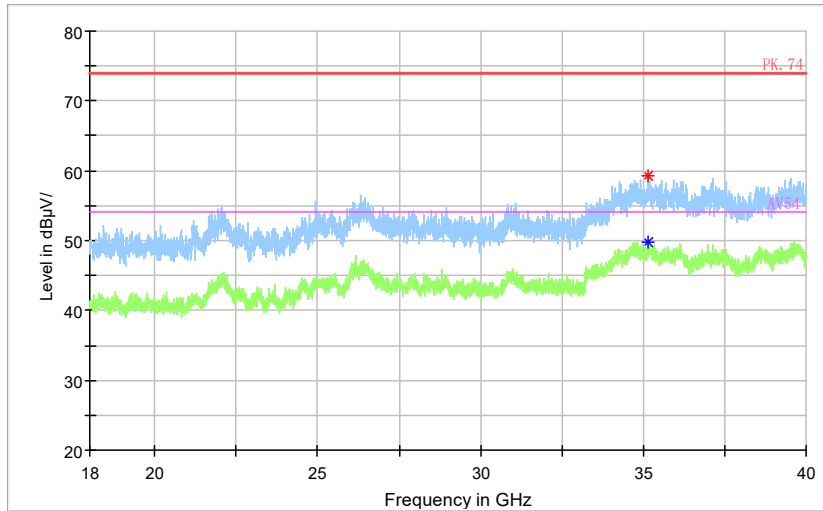


- \* Preview Result 2-AVG
- \* Preview Result 1-PK+
- \* Critical\_Freqs AVG
- \* Critical\_Freqs PK+
- PK.74
- ♦ Final\_Result AVG
- AV54
- ♦ Final\_Result PK+

Frequency Range: 18GHz -40GHz  
 Detector: Av mode and PK mode  
 Modulation type: 802.11ax(HE20)

Carrier frequency (MHz): 5240  
 Channel No.:48

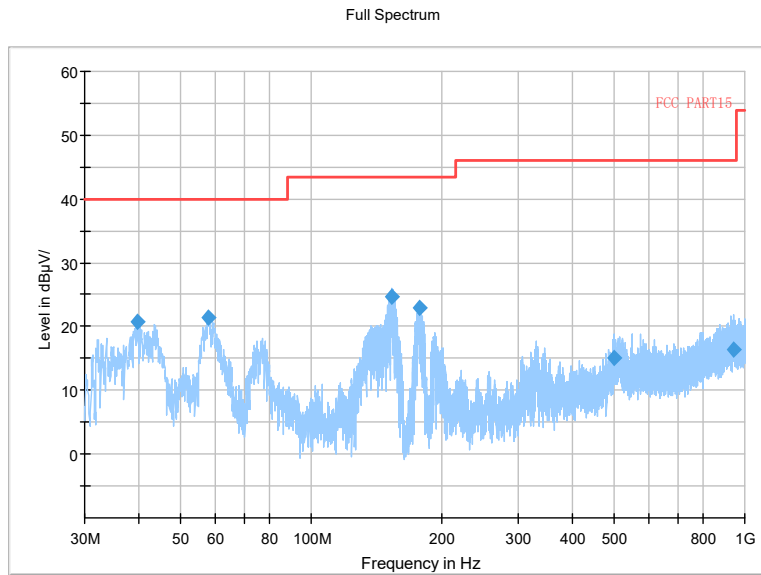


Frequency Range: 30MHz -1GHz  
 Detector: QP mode  
 Test Mode: 802.11a

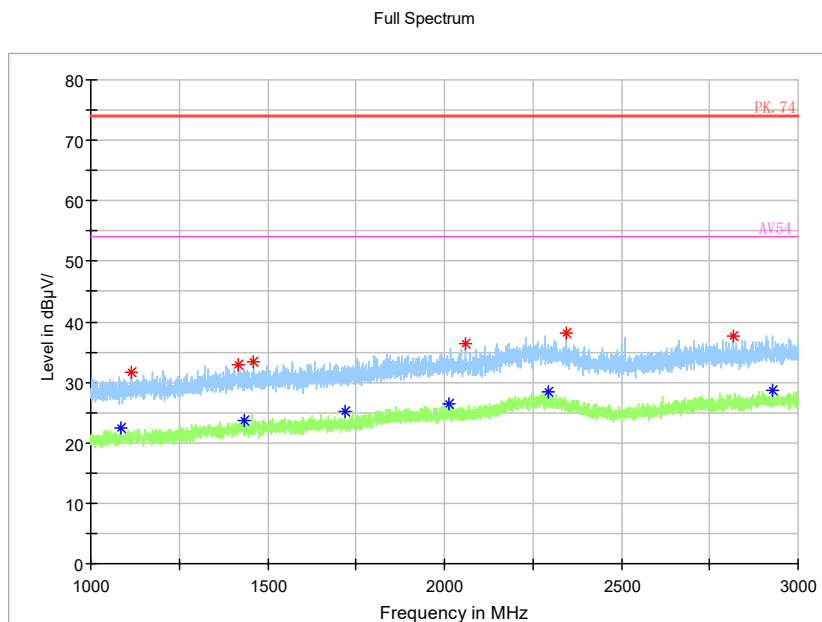


Frequency Range: 1GHz -3GHz  
 Detector: Av mode and PK mode  
 Modulation type: 802.11a

Full Spectrum

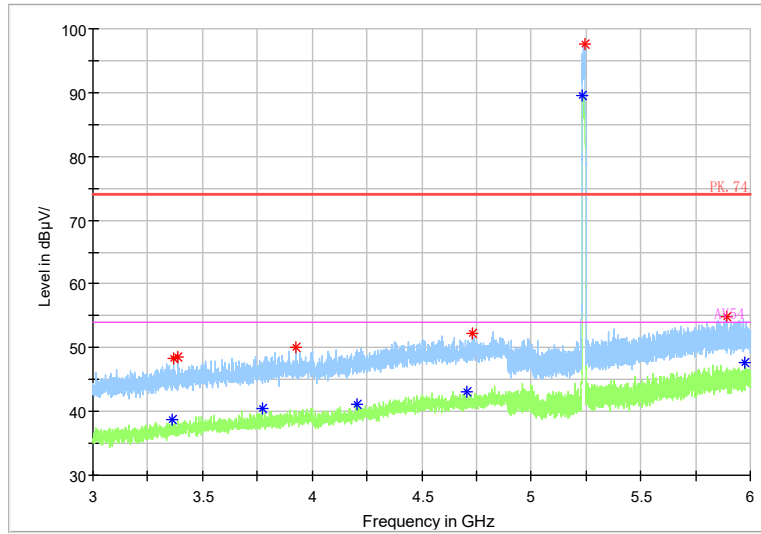


Frequency Range: 3GHz -6GHz  
Detector: Av mode and PK mode  
Modulation type: 802.11a

Full Spectrum

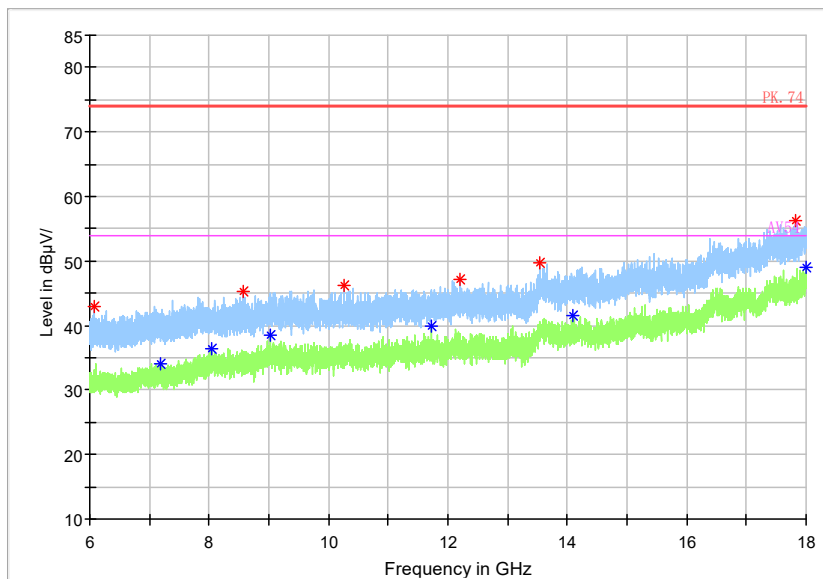


Frequency Range: 6GHz -18GHz  
Detector: Av mode and PK mode  
Modulation type: 802.11a

Full Spectrum

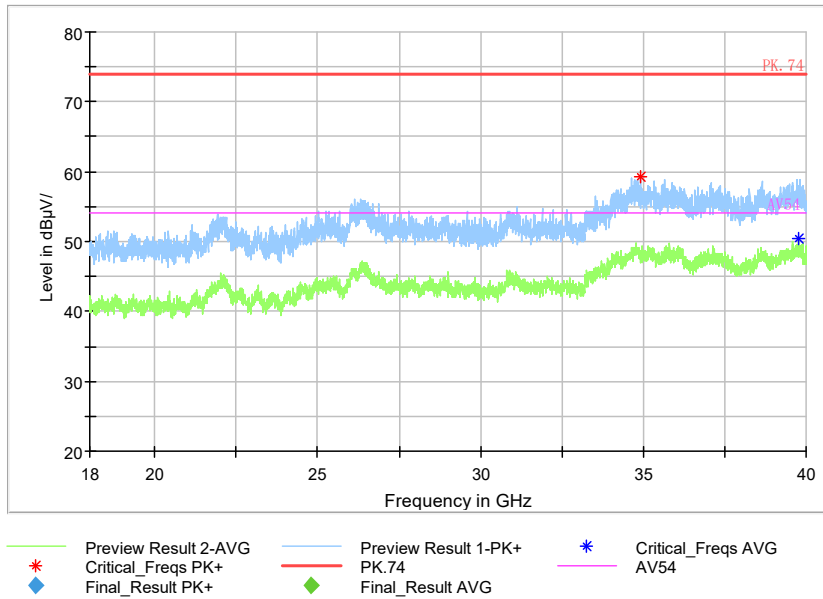


Frequency Range: 18GHz -40GHz  
Detector: Av mode and PK mode  
Modulation type: 802.11a

Full Spectrum

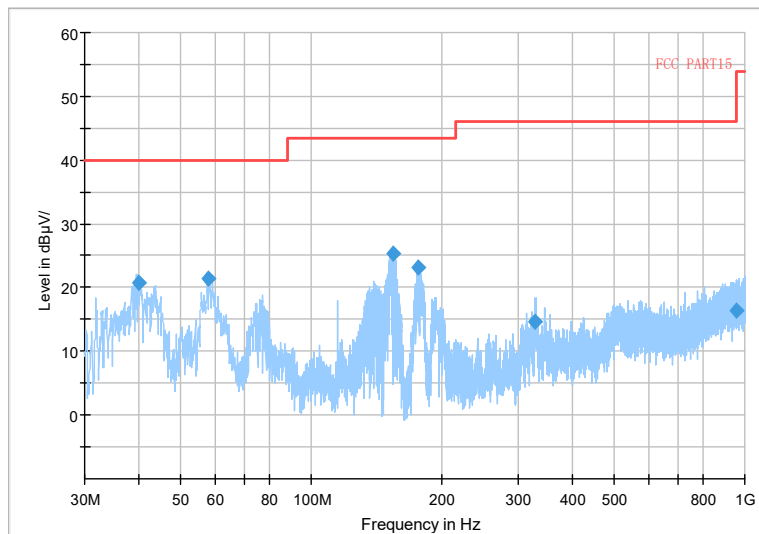


Frequency Range: 30MHz -1GHz  
Detector: QP mode  
Test Mode: 802.11n(HT20)

Full Spectrum

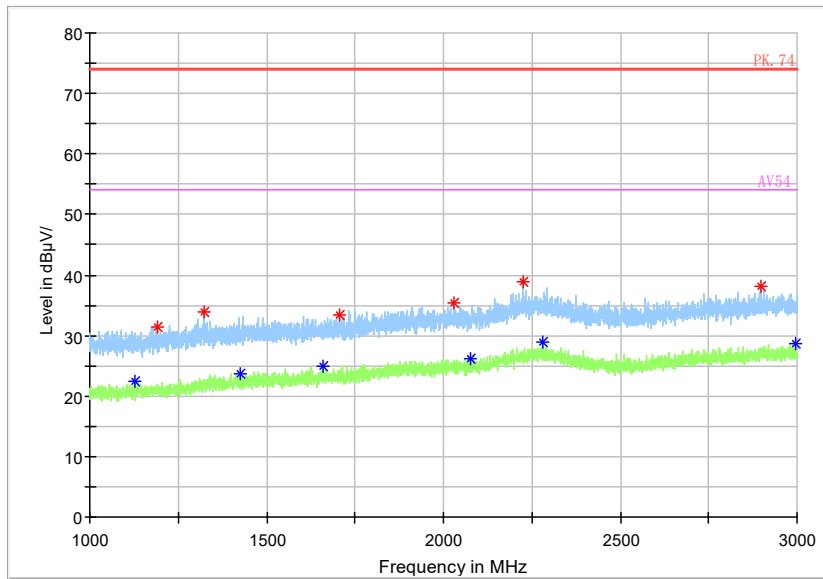


Frequency Range: 1GHz -3GHz  
 Detector: Av mode and PK mode  
 Modulation type: 802.11n(HT20)

Full Spectrum

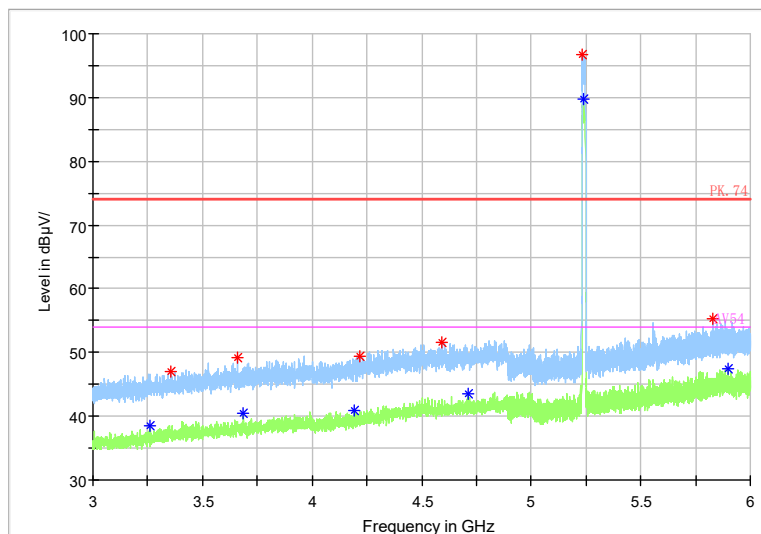


Frequency Range: 3GHz -6GHz  
 Detector: Av mode and PK mode  
 Modulation type: 802.11n(HT20)

Full Spectrum

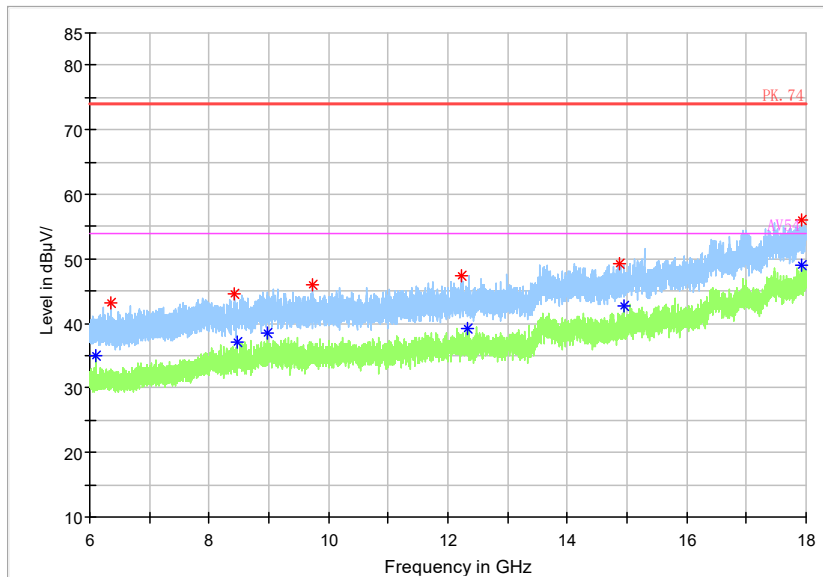

Frequency Range: 6GHz -18GHz  
 Detector: Av mode and PK mode  
 Modulation type: 802.11n(HT20)


Full Spectrum

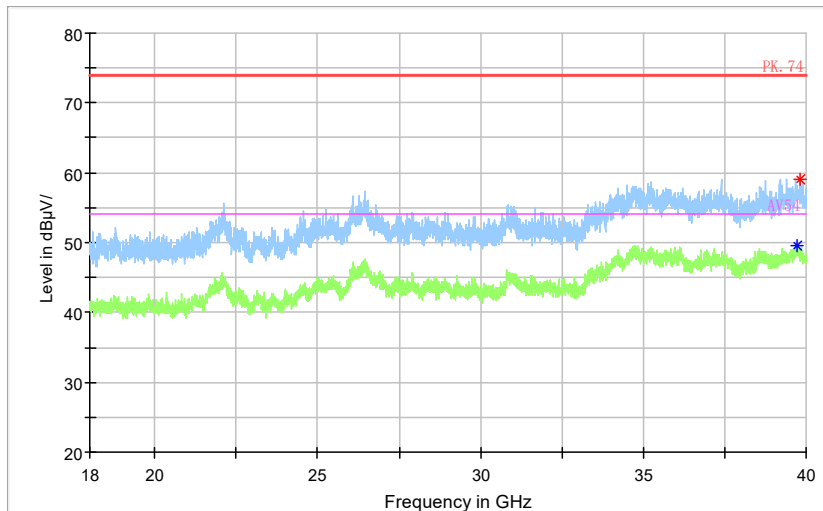

- ◆ Preview Result 2-AVG
- ◆ Preview Result 1-PK+
- ◆ Critical\_Freqs PK+
- ◆ Final\_Result PK+
- ◆ Final\_Result AVG
- ◆ Critical\_Freqs AV54


Frequency Range: 18GHz -40GHz  
 Detector: Av mode and PK mode  
 Modulation type: 802.11n(HT20)

Full Spectrum

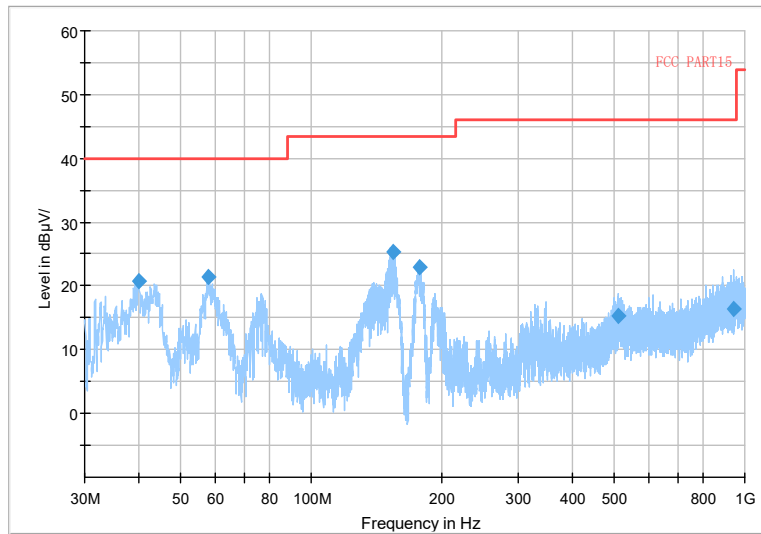

Frequency Range: 30MHz -1GHz  
 Detector: QP mode  
 Test Mode: 802.11ac(VHT20)


Full Spectrum

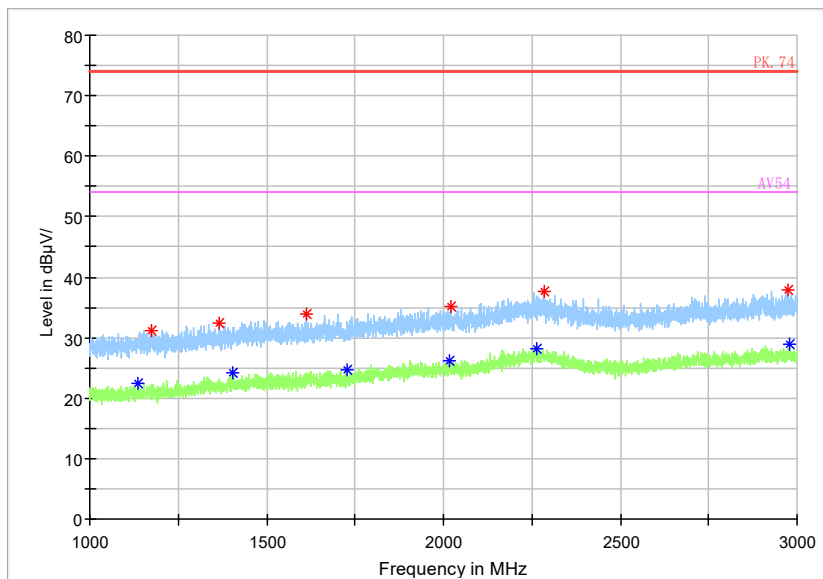

Frequency Range: 1GHz -3GHz  
 Detector: Av mode and PK mode  
 Test Mode: 802.11ac(VHT20)




Full Spectrum

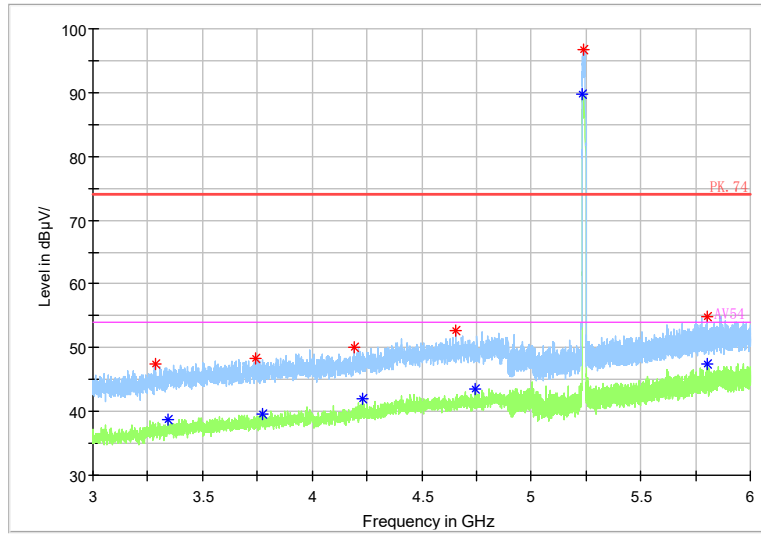


Frequency Range: 3GHz -6GHz  
 Detector: Av mode and PK mode  
 Test Mode: 802.11ac(VHT20)

Full Spectrum

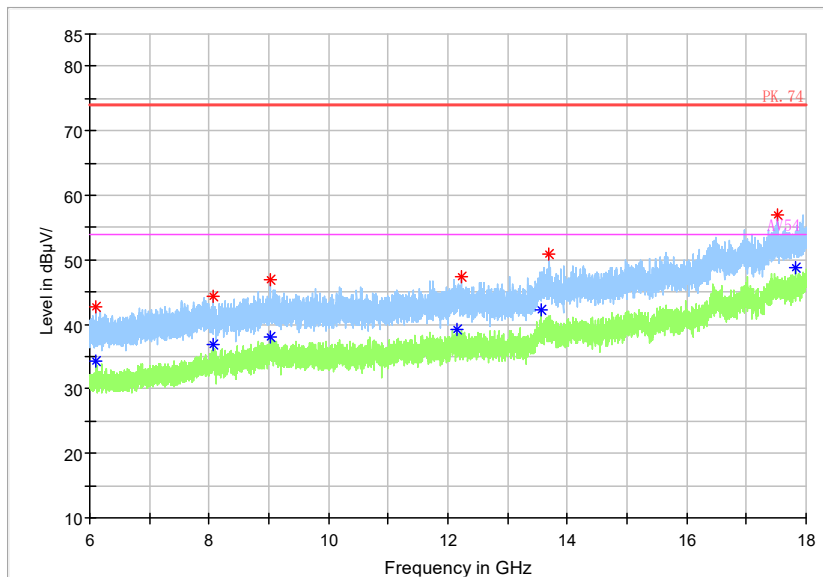


Frequency Range: 6GHz -18GHz  
 Detector: Av mode and PK mode  
 Test Mode: 802.11ac(VHT20)

Full Spectrum

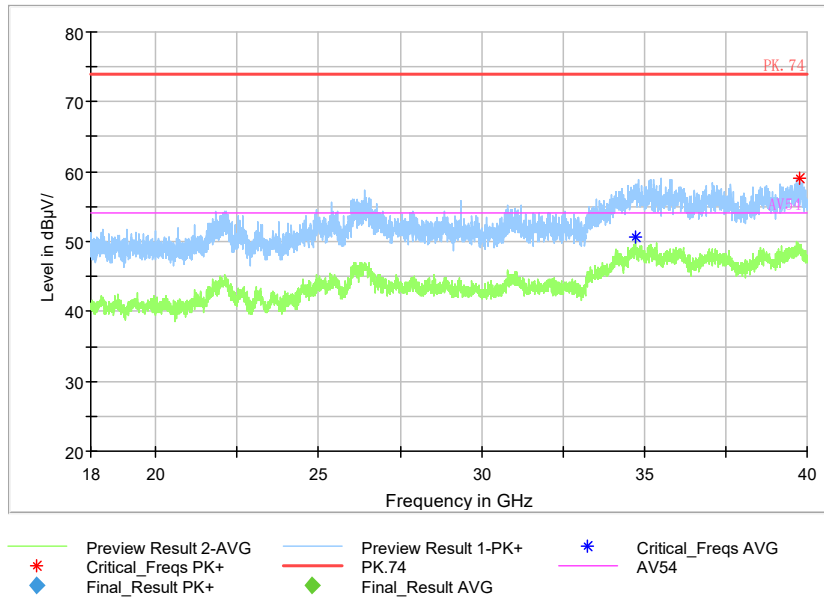


Frequency Range: 18GHz -40GHz  
Detector: Av mode and PK mode  
Test Mode: 802.11ac(VHT20)

Full Spectrum

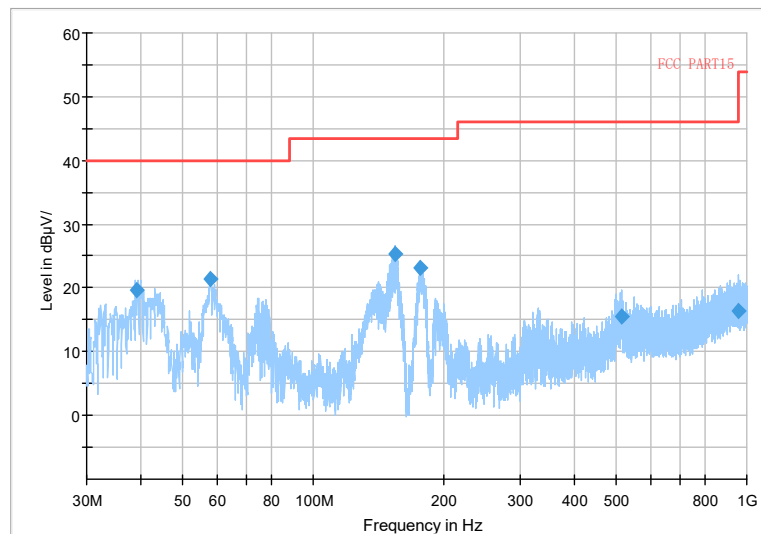


Frequency Range: 30MHz -1GHz  
Detector: QP mode  
Test Mode: 802.11ax(HE20)

Full Spectrum

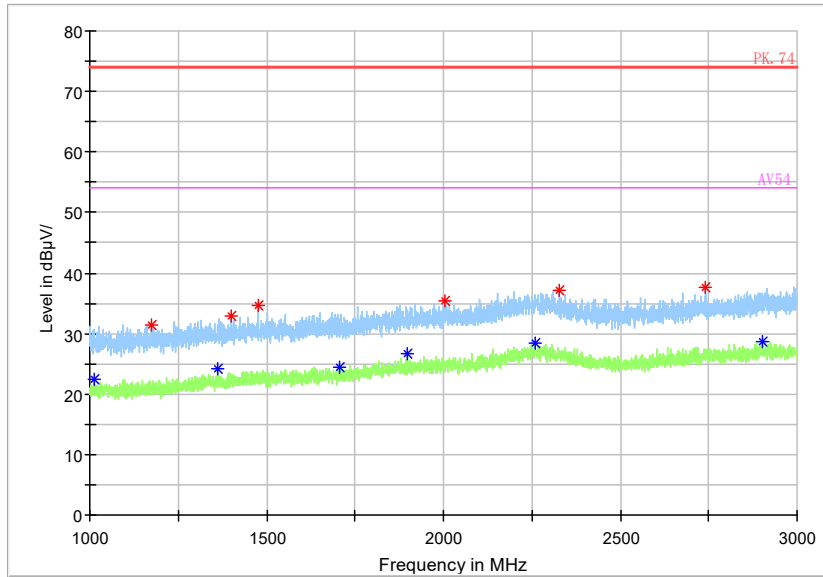


Frequency Range: 1GHz -3GHz  
 Detector: Av mode and PK mode  
 Test Mode: 802.11ax(HE20)

Full Spectrum

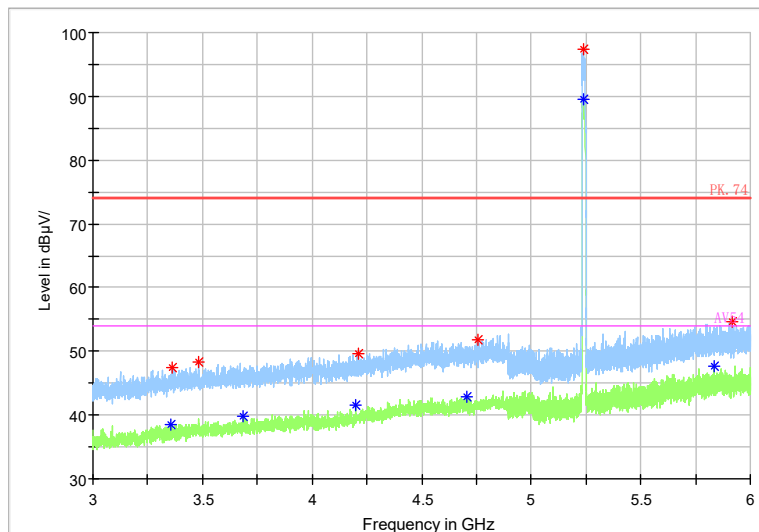


Frequency Range: 3GHz -6GHz  
 Detector: Av mode and PK mode  
 Test Mode: 802.11ax(HE20)

Full Spectrum

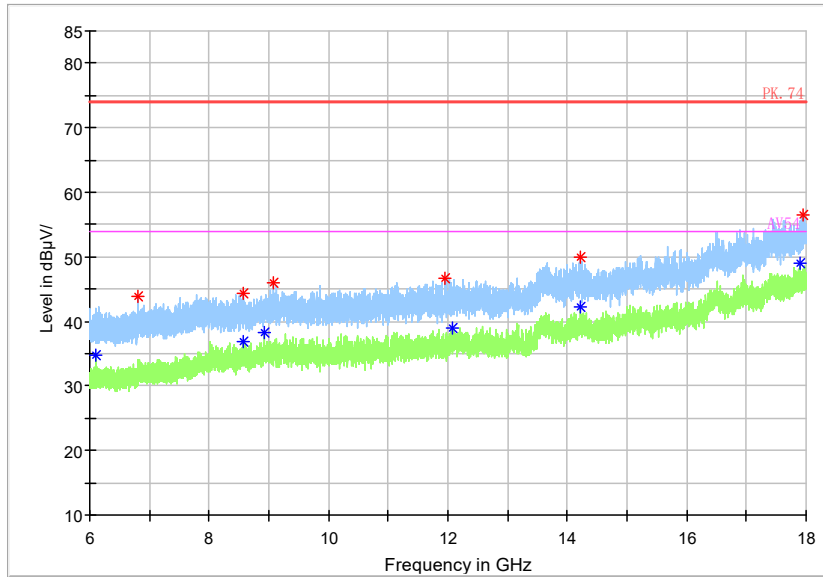

Frequency Range: 6GHz -18GHz  
 Detector: Av mode and PK mode  
 Test Mode: 802.11ax(HE20)


Full Spectrum

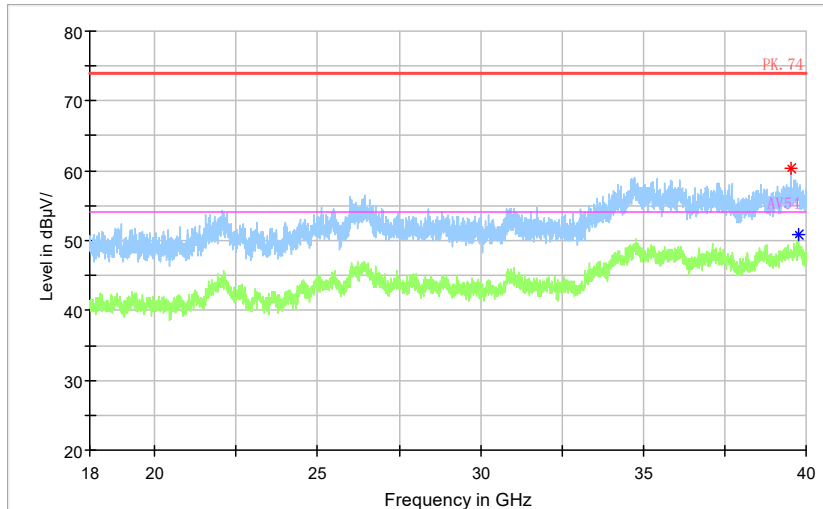


\* Preview Result 2-AVG      \* Preview Result 1-PK+      \* Critical\_Freqs AVG  
\* Critical\_Freqs PK+      \* PK.74      \* AV54  
♦ Final\_Result PK+      ♦ Final\_Result AVG

Frequency Range: 18GHz -40GHz  
 Detector: Av mode and PK mode  
 Test Mode: 802.11ax(HE20)

Carrier frequency (MHz): 5190  
 Channel No.:38

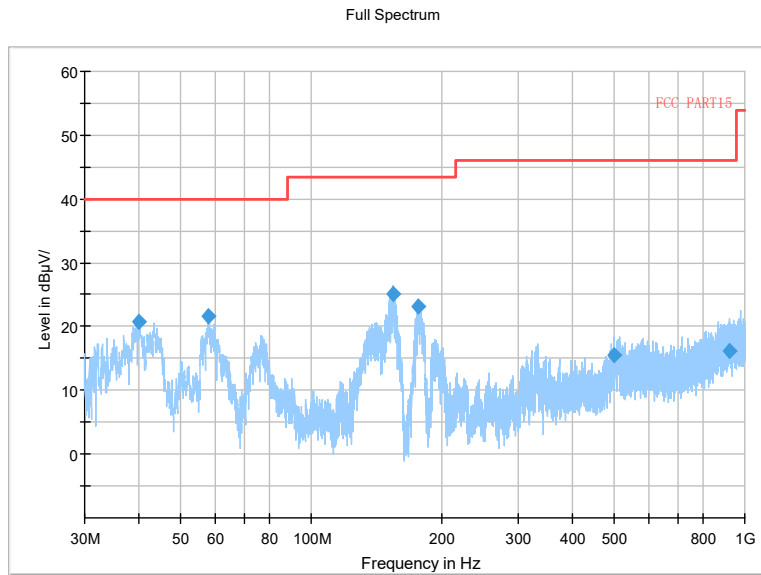


Frequency Range: 30MHz -1GHz  
 Detector: QP mode  
 Test Mode: 802.11n(HT40)

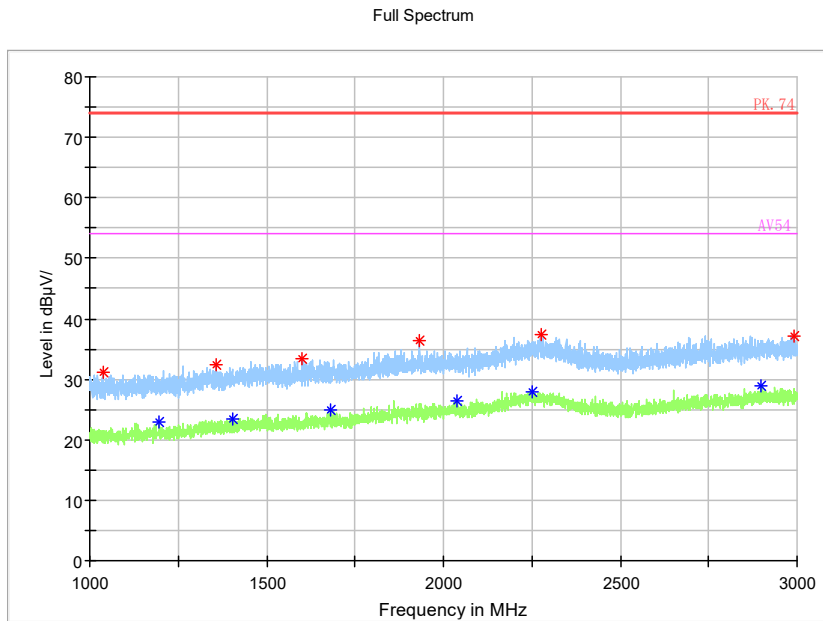


Frequency Range: 1GHz -3GHz  
 Detector: Av mode and PK mode  
 Modulation type: 802.11n(HT40)

Full Spectrum

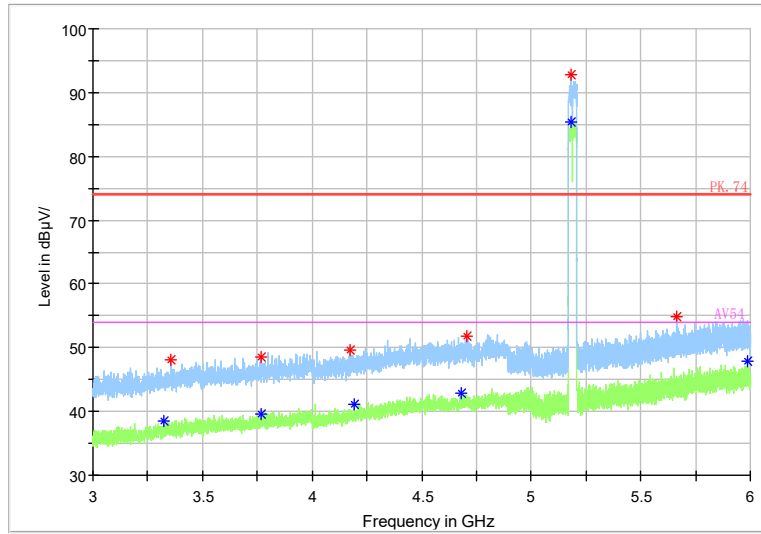

Frequency Range: 3GHz -6GHz  
 Detector: Av mode and PK mode  
 Modulation type: 802.11n(HT40)

Full Spectrum

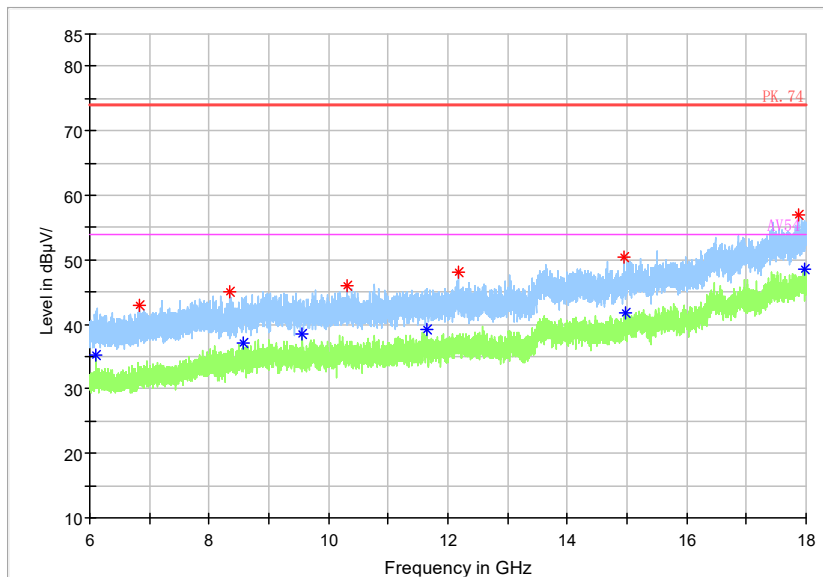


Frequency Range: 6GHz -18GHz  
 Detector: Av mode and PK mode  
 Modulation type: 802.11n(HT40)

Full Spectrum




Frequency Range: 18GHz -40GHz  
Detector: Av mode and PK mode  
Modulation type: 802.11n(HT40)

Full Spectrum

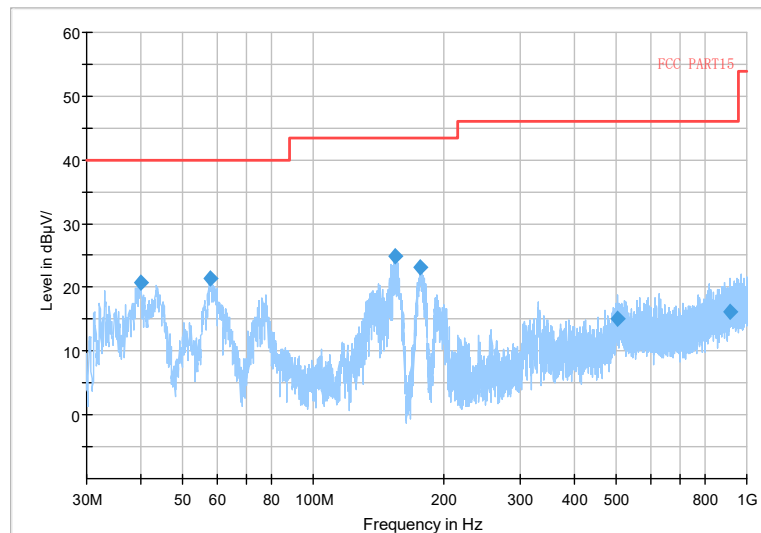


Frequency Range: 30MHz -1GHz  
Detector: QP mode  
Test Mode: 802.11ac(VHT40)

Full Spectrum

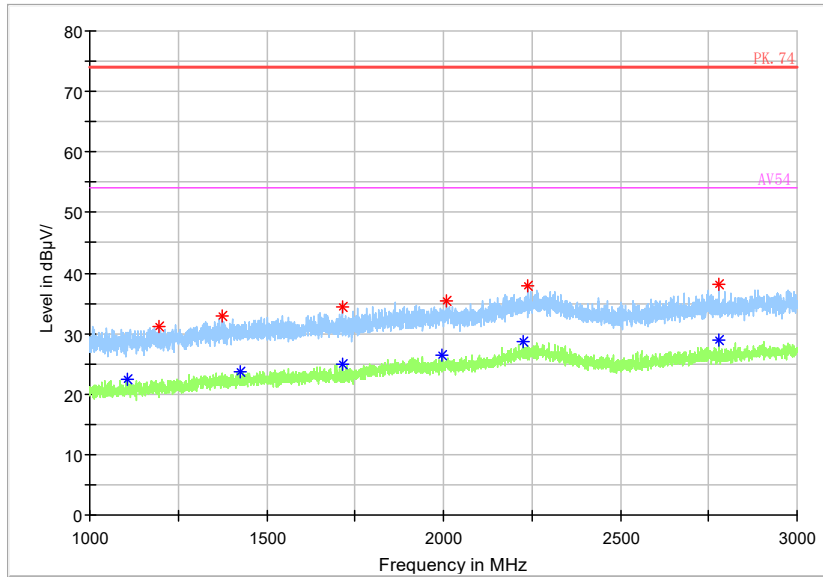

Frequency Range: 1GHz -3GHz  
 Detector: Av mode and PK mode  
 Test Mode: 802.11ac(VHT40)


Full Spectrum

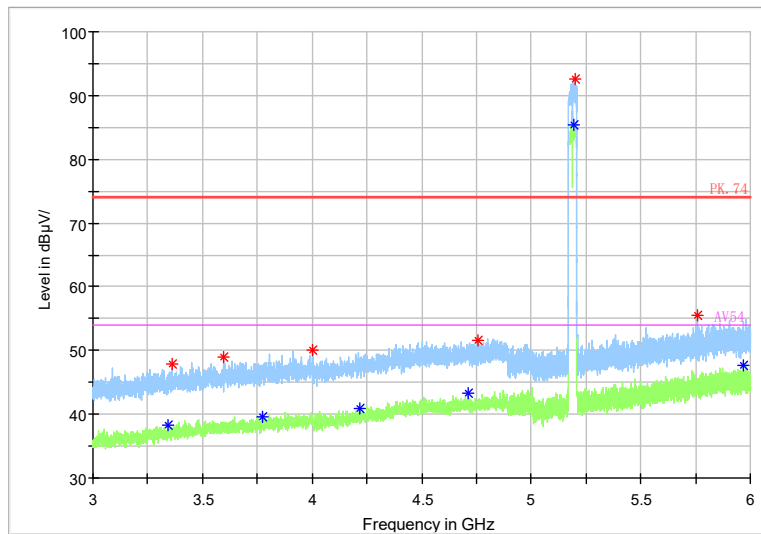

Frequency Range: 3GHz -6GHz  
 Detector: Av mode and PK mode  
 Test Mode: 802.11ac(VHT40)




Full Spectrum

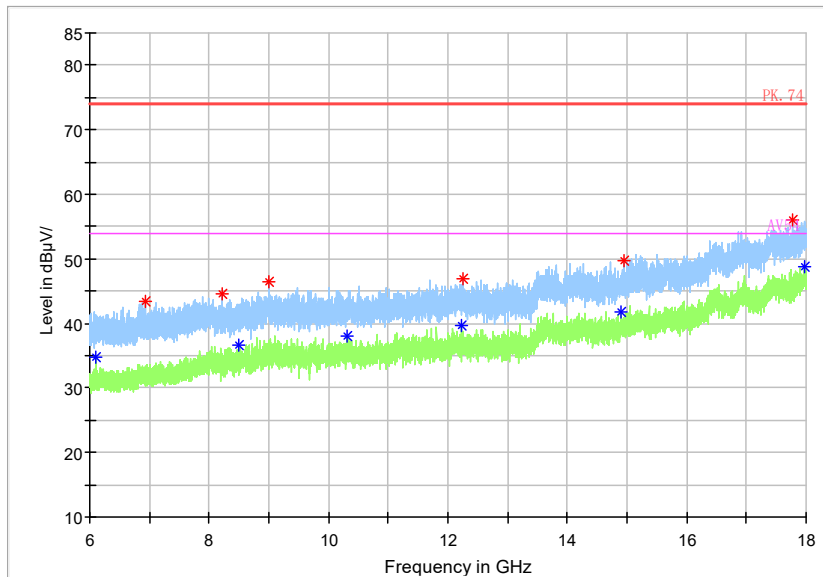

Frequency Range: 6GHz -18GHz  
Detector: Av mode and PK mode  
Test Mode: 802.11ac(VHT40)

Full Spectrum

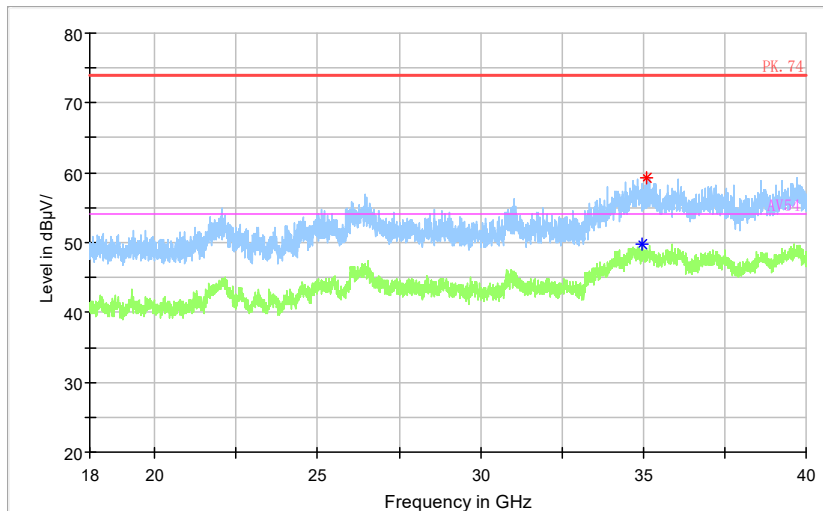

- \* Preview Result 2-AVG
- \* Preview Result 1-PK+
- \* Critical\_Freqs AVG
- \* Critical\_Freqs PK+
- PK.74
- AV54
- ◆ Final\_Result PK+
- ◆ Final\_Result AVG

Frequency Range: 18GHz -40GHz  
Detector: Av mode and PK mode  
Test Mode: 802.11ac(VHT40)