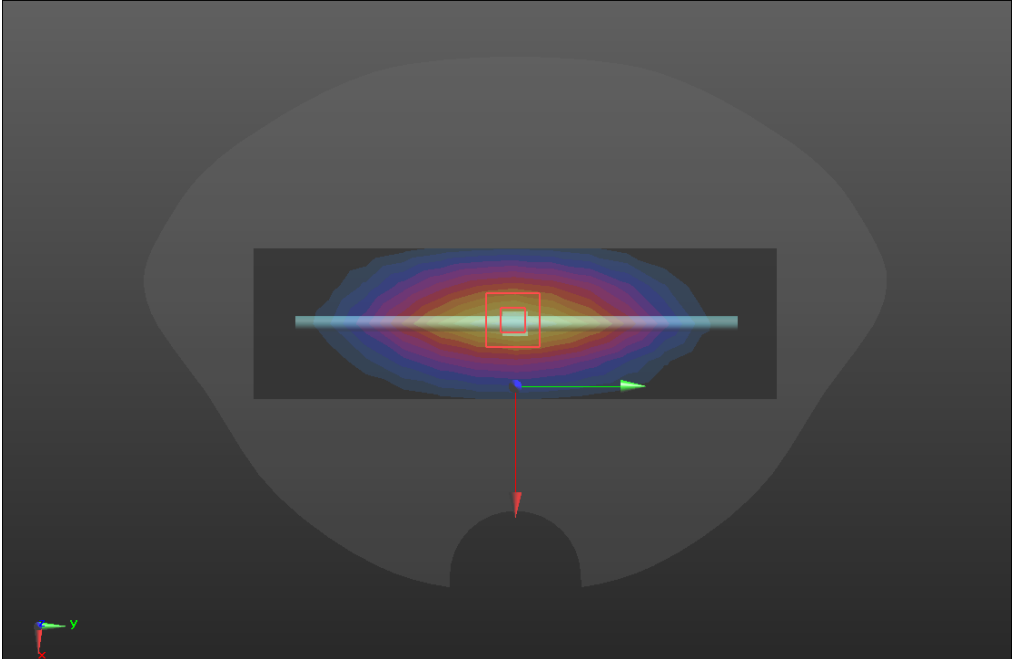
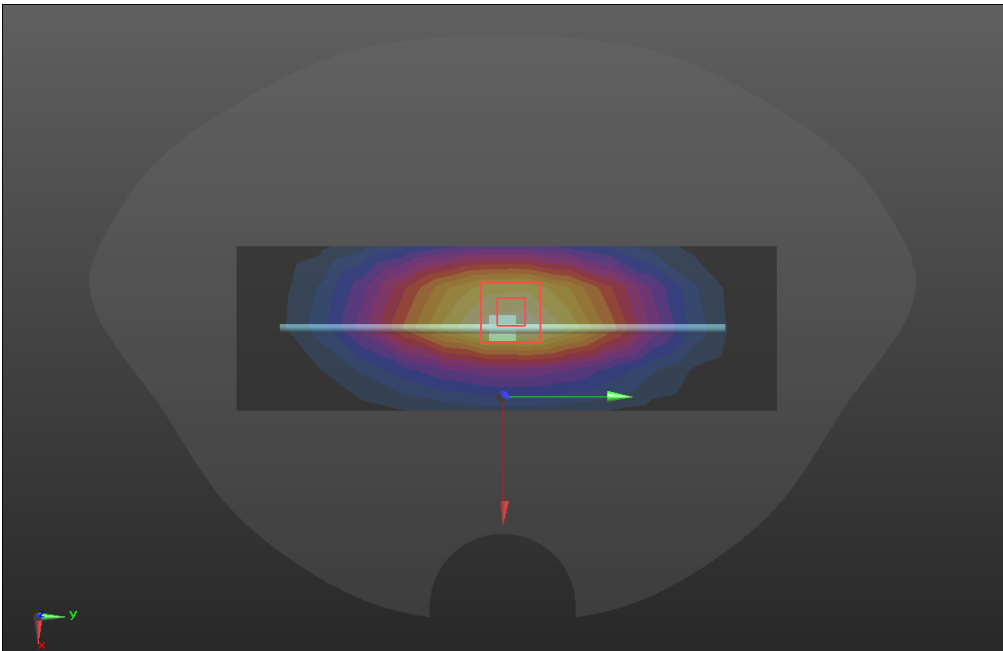
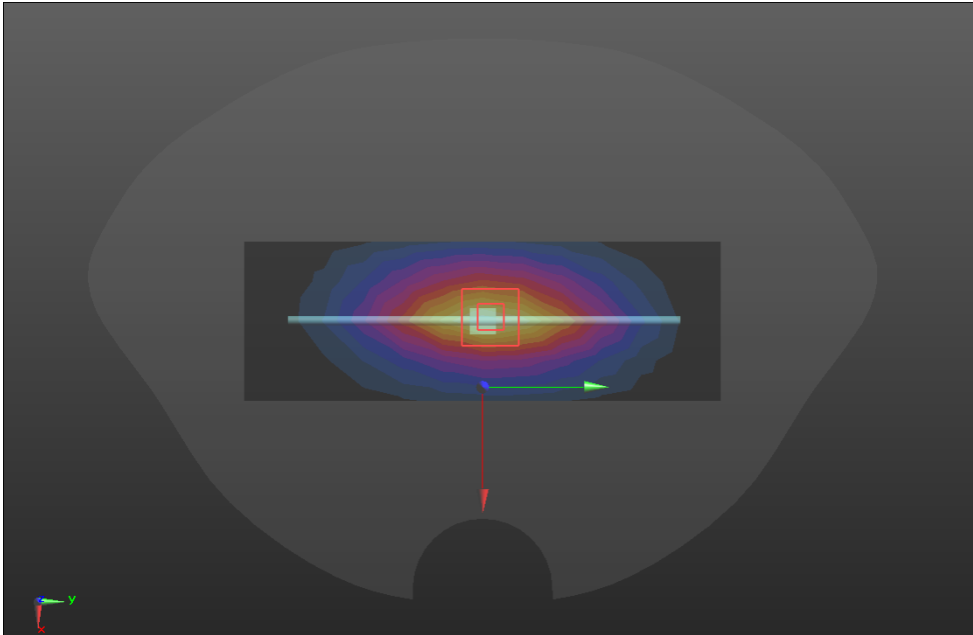


| System check  | 750MHz |
|---|--------|
| <p>Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1<br/>           Medium parameters used: <math>f = 750 \text{ MHz}</math>; <math>\sigma = 0.93 \text{ S/m}</math>; <math>\epsilon_r = 43.07</math>; <math>\rho = 1000 \text{ kg/m}^3</math></p> <p>Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(9.72, 9.72, 9.72) @ 750 MHz; Calibrated: 10/20/2021</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn720; Calibrated: 10/8/2021</li> <li>Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx</li> <li>Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)</li> </ul> <p><b>750/Dipole 750MHz/Area Scan (5x15x1):</b> Measurement grid: dx=15mm, dy=15mm<br/>           Maximum value of SAR (measured) = 2.83 W/kg</p> <p><b>750/Dipole 750MHz/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm<br/>           Reference Value = 58.50 V/m; Power Drift = 0.09 dB<br/>           Peak SAR (extrapolated) = 3.24 W/kg<br/> <b>SAR(1 g) = 2.14 W/kg; SAR(10 g) = 1.47 W/kg</b><br/>           Maximum value of SAR (measured) = 2.85 W/kg</p>  |        |

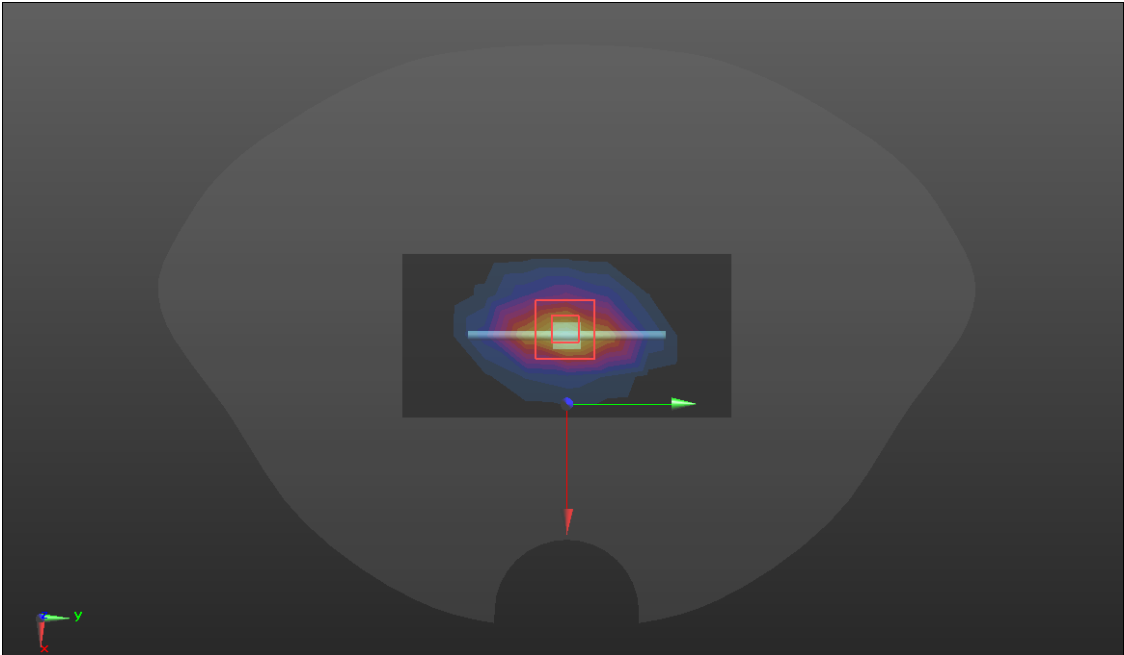
SRTC performed system check by using 250mw at antenna port

| System check   | 835MHz |
|--|--------|
| <p>Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1<br/>           Medium parameters used (interpolated): <math>f = 835 \text{ MHz}</math>; <math>\sigma = 0.93 \text{ S/m}</math>; <math>\epsilon_r = 42.99</math>; <math>\rho = 1000 \text{ kg/m}^3</math></p> <p>Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(9.41, 9.41, 9.41) @ 835 MHz; Calibrated: 10/20/2021</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn720; Calibrated: 10/8/2021</li> <li>Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx</li> <li>Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)</li> </ul> <p><b>D835/Dipole 835MHz/Area Scan (5x14x1):</b> Measurement grid: <math>dx=15\text{mm}</math>, <math>dy=15\text{mm}</math><br/>           Maximum value of SAR (measured) = 2.71 W/kg</p> <p><b>D835/Dipole 835MHz/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: <math>dx=8\text{mm}</math>, <math>dy=8\text{mm}</math>, <math>dz=5\text{mm}</math><br/>           Reference Value = 56.70 V/m; Power Drift = 0.05 dB<br/>           Peak SAR (extrapolated) = 3.50 W/kg<br/> <b>SAR(1 g) = 2.32 W/kg; SAR(10 g) = 1.52 W/kg</b><br/>           Maximum value of SAR (measured) = 3.04 W/kg</p>  |        |

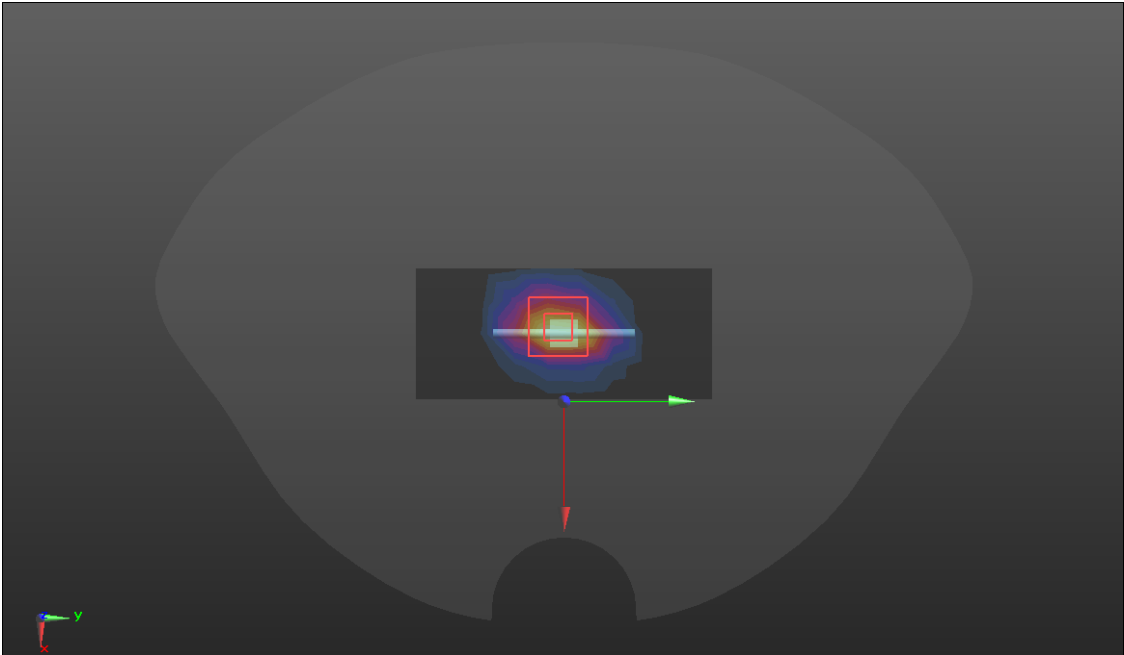
SRTC performed system check by using 250mw at antenna port

| System check   | 900MHz |
|--|--------|
| <p>Communication System: UID 0, CW (0); Frequency: 900 MHz; Duty Cycle: 1:1<br/>           Medium parameters used: <math>f = 900 \text{ MHz}</math>; <math>\sigma = 1.01 \text{ S/m}</math>; <math>\epsilon_r = 40.05</math>; <math>\rho = 1000 \text{ kg/m}^3</math></p> <p>Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(9.41, 9.41, 9.41) @ 900 MHz; Calibrated: 10/20/2021</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn720; Calibrated: 10/8/2021</li> <li>Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx</li> <li>Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)</li> </ul> <p><b>D900/Dipole 900MHz/Area Scan (5x13x1):</b> Measurement grid: dx=15mm, dy=15mm<br/>           Maximum value of SAR (measured) = 3.85 W/kg</p> <p><b>D900/Dipole 900MHz/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm<br/>           Reference Value = 66.17 V/m; Power Drift = 0.00 dB<br/>           Peak SAR (extrapolated) = 4.74 W/kg<br/> <b>SAR(1 g) = 2.68 W/kg; SAR(10 g) = 1.83 W/kg</b><br/>           Maximum value of SAR (measured) = 3.99 W/kg</p>  |        |

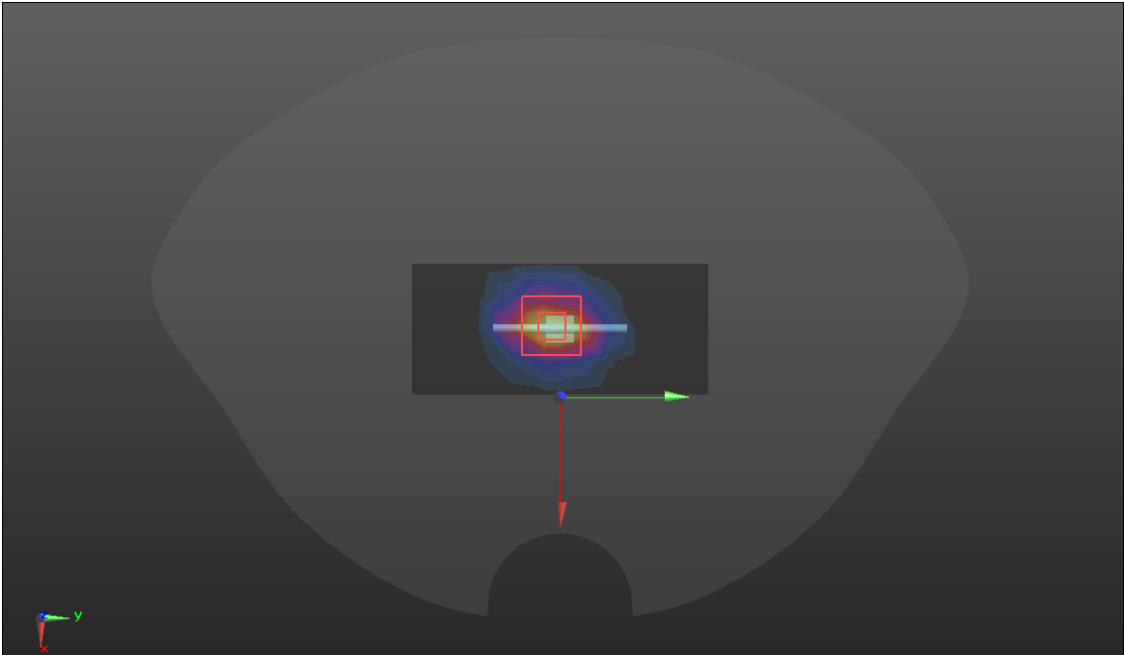
SRTC performed system check by using 250mw at antenna port

| System check   | 1800MHz |
|--|---------|
| <p>Communication System: UID 0, CW (0); Frequency: 1800 MHz; Duty Cycle: 1:1<br/>           Medium parameters used: <math>f = 1800 \text{ MHz}</math>; <math>\sigma = 1.40 \text{ S/m}</math>; <math>\epsilon_r = 39.31</math>; <math>\rho = 1000 \text{ kg/m}^3</math></p> <p>Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: EX3DV4 - SN3708; ConvF(8.17, 8.17, 8.17) @ 1800 MHz; Calibrated: 10/20/2021</li> <li>• Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>• Electronics: DAE4 Sn720; Calibrated: 10/8/2021</li> <li>• Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx</li> <li>• Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)</li> </ul> <p><b>D1800/Dipole 1800MHz/Area Scan (5x9x1):</b> Measurement grid: dx=15mm, dy=15mm<br/>           Maximum value of SAR (measured) = 15.3 W/kg</p> <p><b>D1800/Dipole 1800MHz/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm<br/>           Reference Value = 107.8 V/m; Power Drift = 0.05 dB<br/>           Peak SAR (extrapolated) = 18.7 W/kg<br/> <b>SAR(1 g) = 10.0 W/kg; SAR(10 g) = 5.22 W/kg</b><br/>           Maximum value of SAR (measured) = 15.6 W/kg</p>  |         |

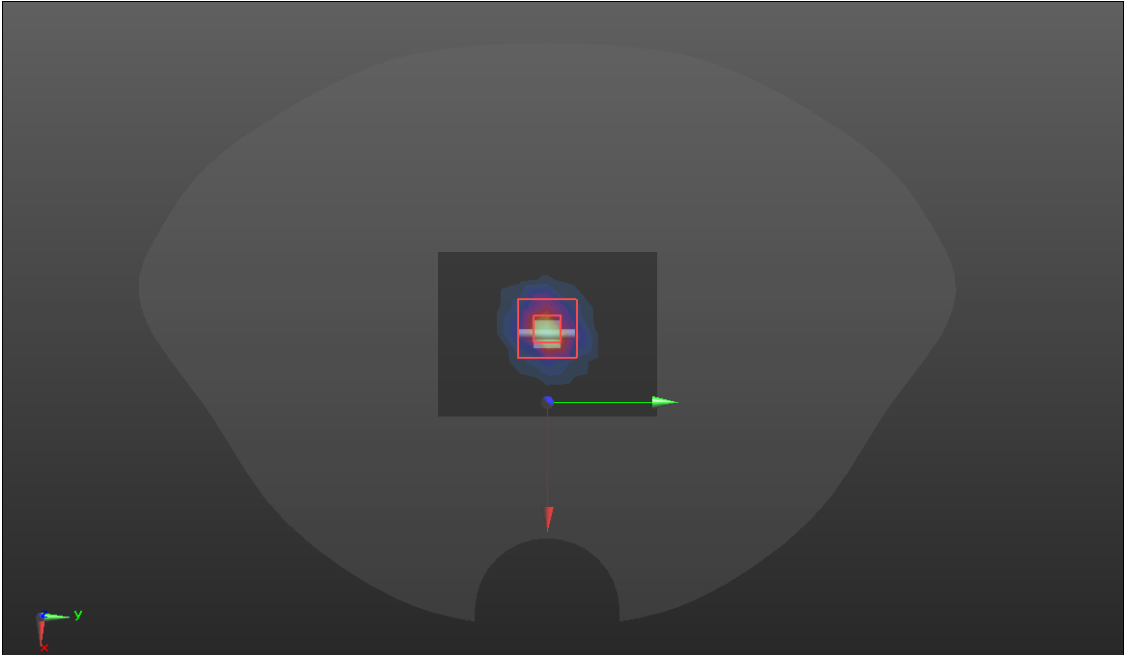
SRTC performed system check by using 250mw at antenna port

| System check   | 2450MHz |
|--|---------|
| <p>Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1<br/>           Medium parameters used: <math>f = 2450 \text{ MHz}</math>; <math>\sigma = 1.74 \text{ S/m}</math>; <math>\epsilon_r = 40.83</math>; <math>\rho = 1000 \text{ kg/m}^3</math></p> <p>Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(7.45, 7.45, 7.45) @ 2450 MHz; Calibrated: 10/20/2021</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn720; Calibrated: 10/8/2021</li> <li>Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx</li> <li>Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)</li> </ul> <p><b>D2450/Dipole 2450MHz/Area Scan (5x10x1):</b> Measurement grid: dx=12mm, dy=12mm<br/>           Maximum value of SAR (measured) = 18.1 W/kg</p> <p><b>D2450/Dipole 2450MHz/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm<br/>           Reference Value = 107.6 V/m; Power Drift = 0.06 dB<br/>           Peak SAR (extrapolated) = 25.1 W/kg<br/> <b>SAR(1 g) = 12.69 W/kg; SAR(10 g) = 6.36 W/kg</b><br/>           Maximum value of SAR (measured) = 20.3 W/kg</p>  |         |

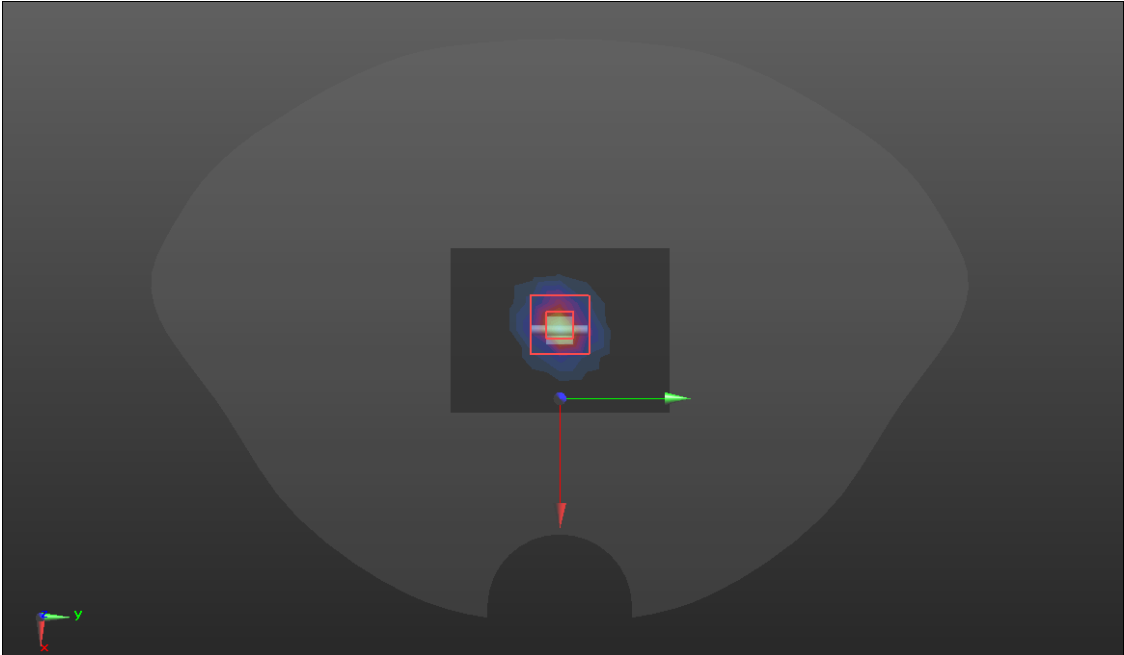
SRTC performed system check by using 250mw at antenna port

| System check   | 2600MHz |
|--|---------|
| <p>Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1<br/>           Medium parameters used: <math>f = 2600 \text{ MHz}</math>; <math>\sigma = 1.92 \text{ S/m}</math>; <math>\epsilon_r = 38.65</math>; <math>\rho = 1000 \text{ kg/m}^3</math></p> <p>Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(7.38, 7.38, 7.38) @ 2600 MHz; Calibrated: 10/20/2021</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn720; Calibrated: 10/8/2021</li> <li>Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx</li> <li>Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)</li> </ul> <p><b>D2600/Dipole 2600MHz/Area Scan (5x10x1):</b> Measurement grid: dx=12mm, dy=12mm<br/>           Maximum value of SAR (measured) = 21.0 W/kg</p> <p><b>D2600/Dipole 2600MHz/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm<br/>           Reference Value = 107.0 V/m; Power Drift = 0.00 dB<br/>           Peak SAR (extrapolated) = 27.8 W/kg<br/> <b>SAR(1 g) = 14.02 W/kg; SAR(10 g) = 6.53 W/kg</b><br/>           Maximum value of SAR (measured) = 21.7 W/kg</p>  |         |

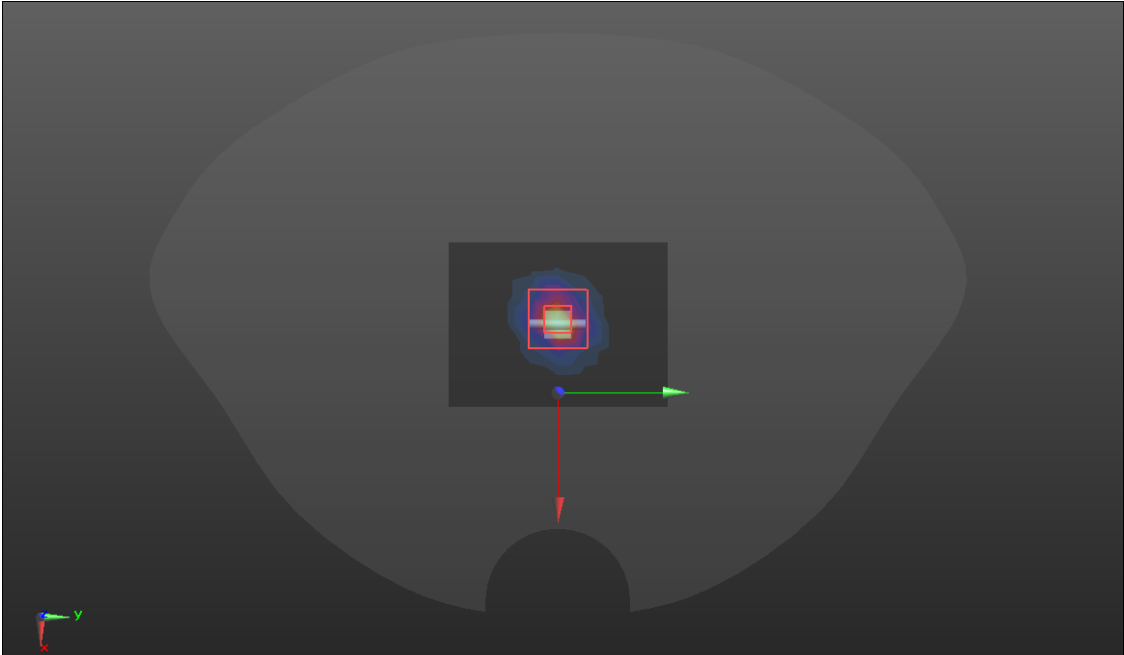
SRTC performed system check by using 250mw at antenna port

| System check   | 5200MHz |
|--|---------|
| <p>Communication System: UID 0, CW (0); Frequency: 5200 MHz; Duty Cycle: 1:1<br/>           Medium parameters used: <math>f = 5200 \text{ MHz}</math>; <math>\sigma = 4.67 \text{ S/m}</math>; <math>\epsilon_r = 36.68</math>; <math>\rho = 1000 \text{ kg/m}^3</math></p> <p>Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(5.58, 5.58, 5.58) @ 5200 MHz; Calibrated: 10/20/2021</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn720; Calibrated: 10/8/2021</li> <li>Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx</li> <li>Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)</li> </ul> <p><b>D5GV2 /D5200 SYSTEM CHECK 2 2/Area Scan (7x9x1):</b> Measurement grid: dx=10mm, dy=10mm<br/>           Maximum value of SAR (measured) = 18.2 W/kg</p> <p><b>D5GV2 /D5200 SYSTEM CHECK 2 2/Zoom Scan (7x7x12)/Cube 0:</b> Measurement grid: dx=4mm, dy=4mm, dz=2mm<br/>           Reference Value = 68.10 V/m; Power Drift = 0.09 dB<br/>           Peak SAR (extrapolated) = 30.7 W/kg<br/> <b>SAR(1 g) = 7.34 W/kg; SAR(10 g) = 2.15 W/kg</b><br/>           Maximum value of SAR (measured) = 18.9 W/kg</p>  |         |

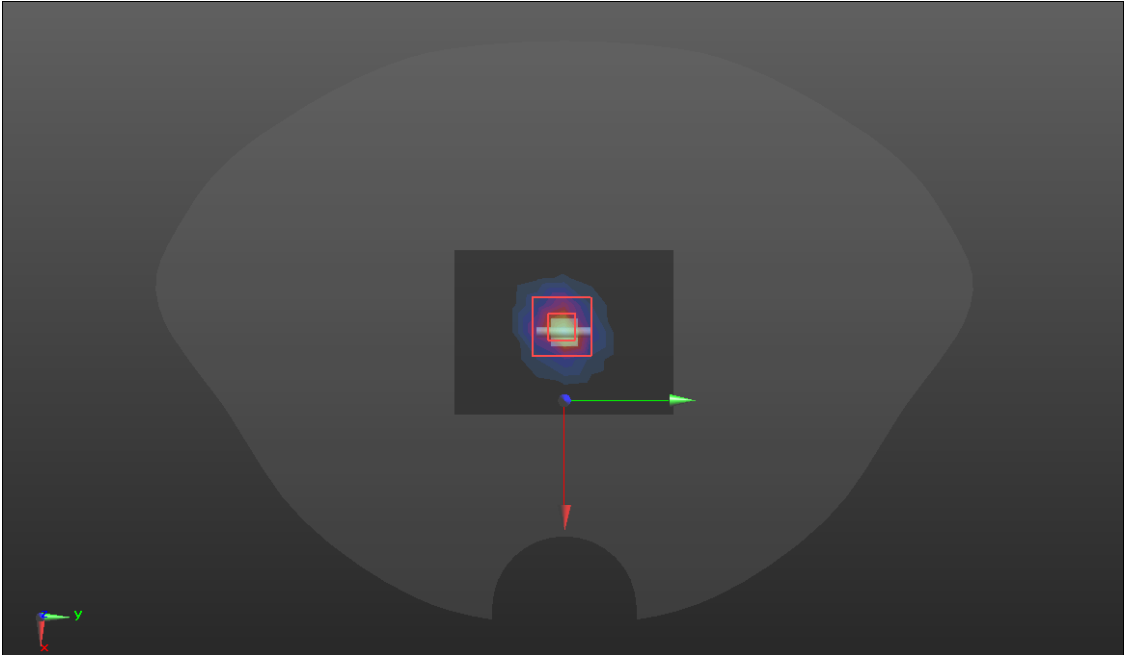
SRTC performed system check by using 100mw at antenna port

| System check   | 5300MHz |
|--|---------|
| <p>Communication System: UID 0, CW (0); Frequency: 5300 MHz; Duty Cycle: 1:1<br/>           Medium parameters used: <math>f = 5300 \text{ MHz}</math>; <math>\sigma = 4.85 \text{ S/m}</math>; <math>\epsilon_r = 35.55</math>; <math>\rho = 1000 \text{ kg/m}^3</math></p> <p>Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(5.52, 5.52, 5.52) @ 5300 MHz; Calibrated: 10/20/2021</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn720; Calibrated: 10/8/2021</li> <li>Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx</li> <li>Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)</li> </ul> <p><b>D5GV2 /D5300 SYSTEM CHECK/Area Scan (7x9x1):</b> Measurement grid: dx=10mm, dy=10mm<br/>           Maximum value of SAR (measured) = 17.8 W/kg</p> <p><b>D5GV2 /D5300 SYSTEM CHECK/Zoom Scan (7x7x12)/Cube 0:</b> Measurement grid: dx=4mm, dy=4mm, dz=2mm<br/>           Reference Value = 66.76 V/m; Power Drift = 0.08 dB<br/>           Peak SAR (extrapolated) = 30.5 W/kg<br/> <b>SAR(1 g) = 7.99 W/kg; SAR(10 g) = 2.28 W/kg</b><br/>           Maximum value of SAR (measured) = 18.4 W/kg</p>  |         |



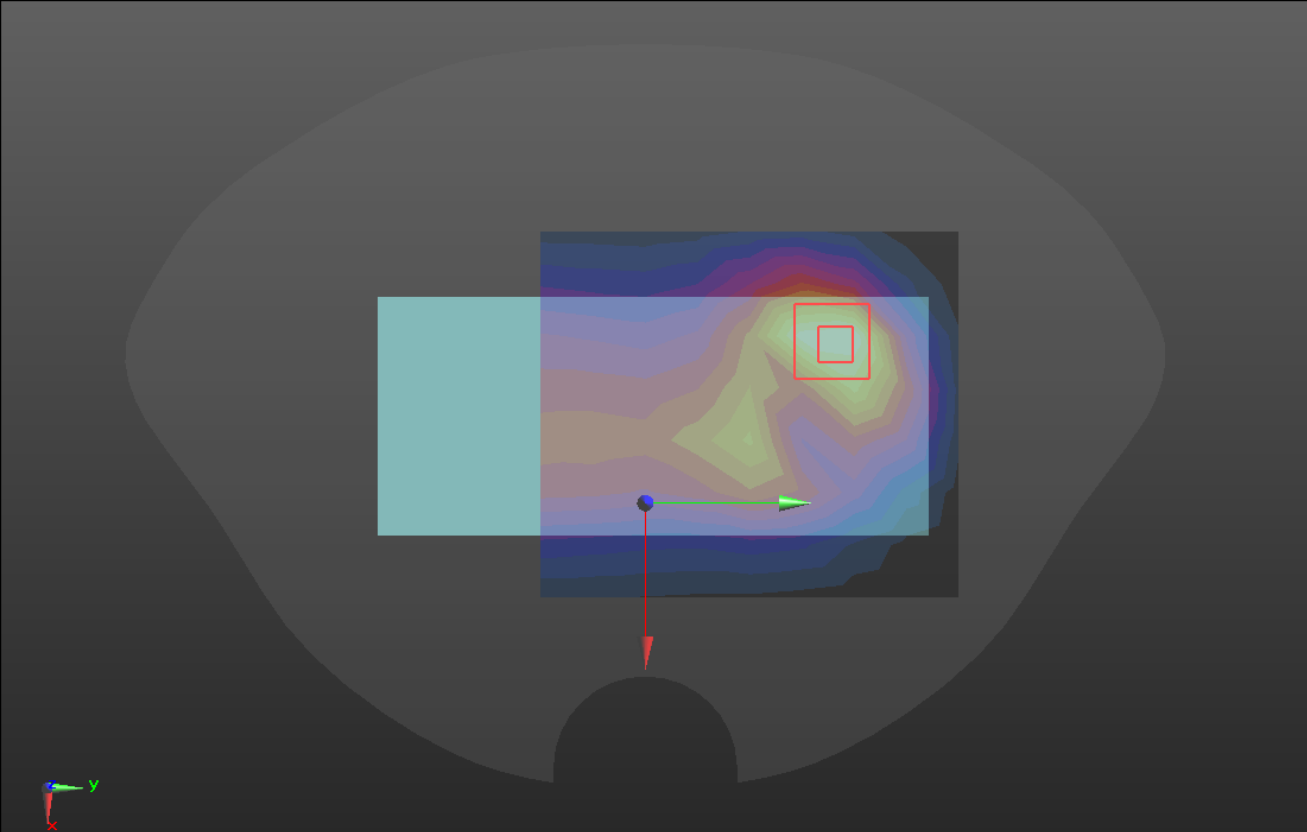
| System check   | 5600MHz |
|--|---------|
| <p>Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1<br/>           Medium parameters used: <math>f = 5600 \text{ MHz}</math>; <math>\sigma = 5.21 \text{ S/m}</math>; <math>\epsilon_r = 36.77</math>; <math>\rho = 1000 \text{ kg/m}^3</math></p> <p>Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(4.95, 4.95, 4.95) @ 5600 MHz; Calibrated: 10/20/2021</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn720; Calibrated: 10/8/2021</li> <li>Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx</li> <li>Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)</li> </ul> <p><b>D5GV2 /D5500 SYSTEM CHECK/Area Scan (7x9x1):</b> Measurement grid: dx=10mm, dy=10mm<br/>           Maximum value of SAR (measured) = 18.9 W/kg</p> <p><b>D5GV2 /D5500 SYSTEM CHECK/Zoom Scan (7x7x12)/Cube 0:</b> Measurement grid: dx=4mm, dy=4mm, dz=2mm<br/>           Reference Value = 67.70 V/m; Power Drift = 0.10 dB<br/>           Peak SAR (extrapolated) = 34.0 W/kg<br/> <b>SAR(1 g) = 8.27 W/kg; SAR(10 g) = 2.28 W/kg</b><br/>           Maximum value of SAR (measured) = 19.7 W/kg</p>  |         |

SRTC performed system check by using 100mw at antenna port

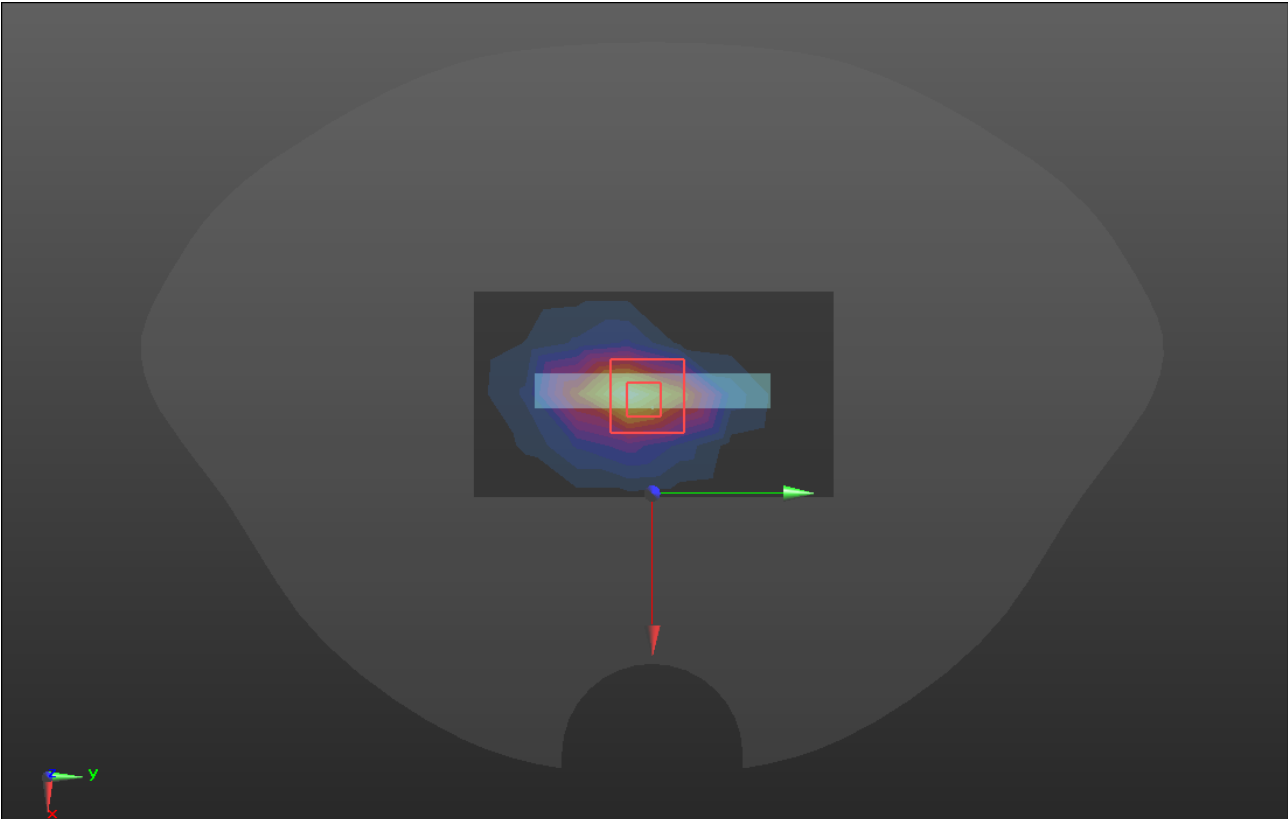
| System check   | 5800MHz |
|--|---------|
| <p>Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1<br/>           Medium parameters used: <math>f = 5800 \text{ MHz}</math>; <math>\sigma = 5.40 \text{ S/m}</math>; <math>\epsilon_r = 36.37</math>; <math>\rho = 1000 \text{ kg/m}^3</math></p> <p>Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(5.05, 5.05, 5.05) @ 5800 MHz; Calibrated: 10/20/2021</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn720; Calibrated: 10/8/2021</li> <li>Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx</li> <li>Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)</li> </ul> <p><b>D5GV2 /D5800 SYSTEM CHECK 2/Area Scan (7x9x1):</b> Measurement grid: dx=10mm, dy=10mm<br/>           Maximum value of SAR (measured) = 18.1 W/kg</p> <p><b>D5GV2 /D5800 SYSTEM CHECK 2/Zoom Scan (7x7x12)/Cube 0:</b> Measurement grid: dx=4mm, dy=4mm, dz=2mm<br/>           Reference Value = 64.34 V/m; Power Drift = 0.09 dB<br/>           Peak SAR (extrapolated) = 34.5 W/kg<br/> <b>SAR(1 g) = 7.96 W/kg; SAR(10 g) = 2.14 W/kg</b><br/>           Maximum value of SAR (measured) = 18.9 W/kg</p>  |         |

SRTC performed system check by using 100mw at antenna port

GSM850

| Hotspot   | Back |
|---|------|
| <p>Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 4:8<br/>           Medium parameters used (interpolated): <math>f = 836.6</math> MHz; <math>\sigma = 0.89</math> S/m; <math>\epsilon_r = 41.29</math>; <math>\rho = 1000</math> kg/m<sup>3</sup><br/>           Phantom section: Flat Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(9.41, 9.41, 9.41); Calibrated: 10/20/2021</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn720; Calibrated: 10/8/2021</li> <li>Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660</li> <li>Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)</li> </ul> <p><b>BACK/GSM850/Area Scan (8x9x1):</b> Measurement grid: dx=15mm, dy=15mm<br/>           Maximum value of SAR (measured) = 0.203 W/kg</p> <p><b>BACK/GSM850/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm<br/>           Reference Value = 11.31 V/m; Power Drift = -0.01 dB<br/>           Peak SAR (extrapolated) = 0.320 W/kg<br/> <b>SAR(1 g) = 0.255 W/kg; SAR(10 g) = 0.124 W/kg</b><br/>           Maximum value of SAR (measured) = 0.221 W/kg</p>  |      |

GSM1900

| Hotspot  | Bottom |
|--|--------|
| <p>Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 2:8<br/>           Medium parameters used (interpolated): <math>f = 1880</math> MHz; <math>\sigma = 1.34</math> S/m; <math>\epsilon_r = 40.05</math>; <math>\rho = 1000</math> kg/m<sup>3</sup><br/>           Phantom section: Flat Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(8.17, 8.17, 8.17) ; Calibrated: 10/20/2021</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn720; Calibrated: 10/8/2021</li> <li>Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660</li> <li>MEASUREMENT SW: DASY52, VERSION 52.10 (4); SEMCAD X VERSION 14.6.14 (7483)</li> </ul> <p><b>BOTTOM/GSM1900/Area Scan (5x8x1):</b> Measurement grid: dx=15mm, dy=15mm<br/>           Maximum value of SAR (measured) = 1.20 W/kg</p> <p><b>BOTTOM/GSM1900/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm<br/>           Reference Value = 28.35 V/m; Power Drift = 0.09 dB<br/>           Peak SAR (extrapolated) = 2.83 W/kg<br/> <b>SAR(1 g) = 0.907 W/kg; SAR(10 g) = 0.448 W/kg</b><br/>           Maximum value of SAR (measured) = 1.21 W/kg</p>  |        |

WCDMA B2

| Hotspot | Bottom |
|---------|--------|
|---------|--------|

Communication System: UID 0, WCDMA BAND2 (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 1880$  MHz;  $\sigma = 1.34$  S/m;  $\epsilon_r = 40.05$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3708; ConvF(8.17, 8.17, 8.17); Calibrated: 10/20/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn720; Calibrated: 10/8/2021
- Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660
- MEASUREMENT SW: DASY52, VERSION 52.10 (4); SEMCAD X VERSION 14.6.14 (7483)

**BOTTOM/W2/Area Scan (5x8x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (measured) = 1.69 W/kg

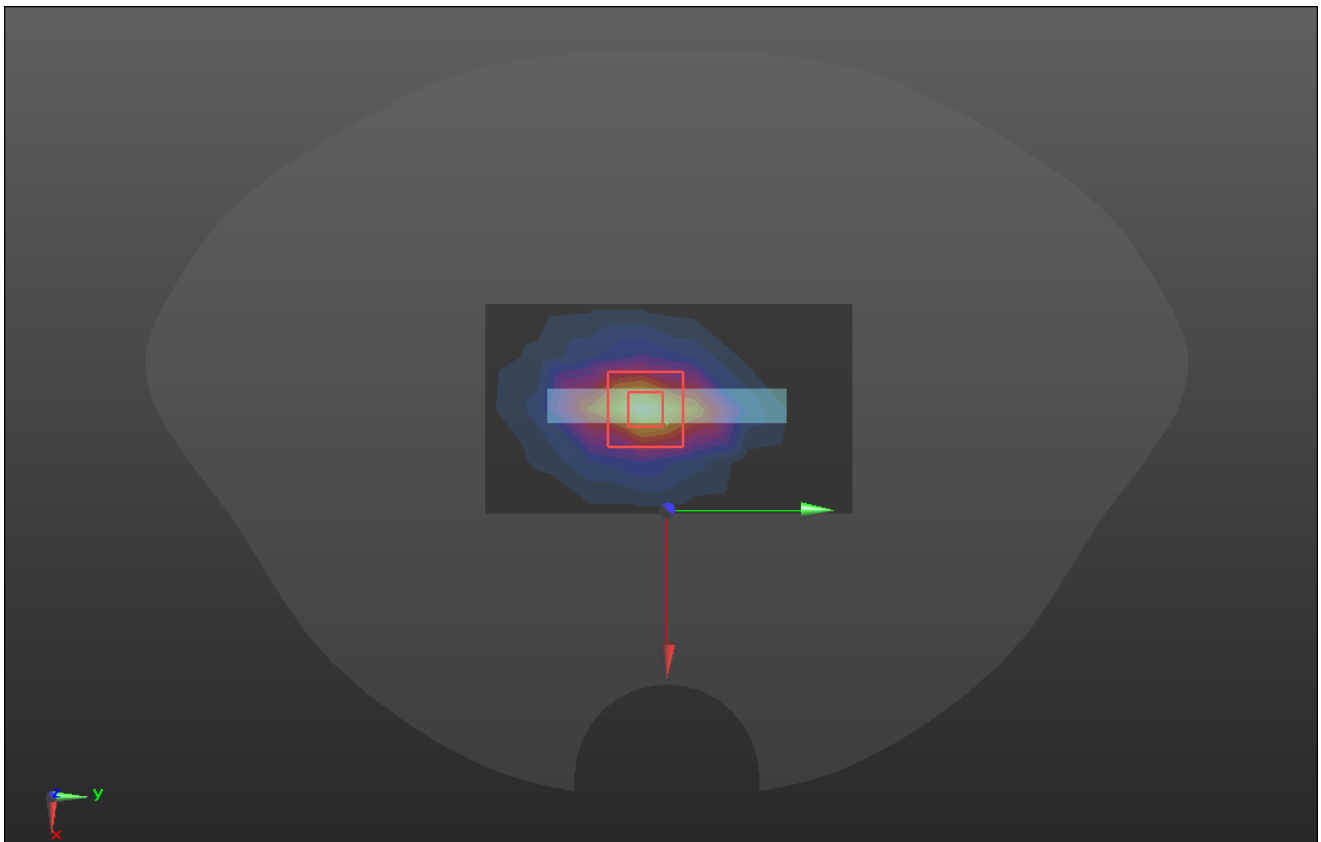
**BOTTOM/W2/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.57 V/m; Power Drift = 0.10 dB

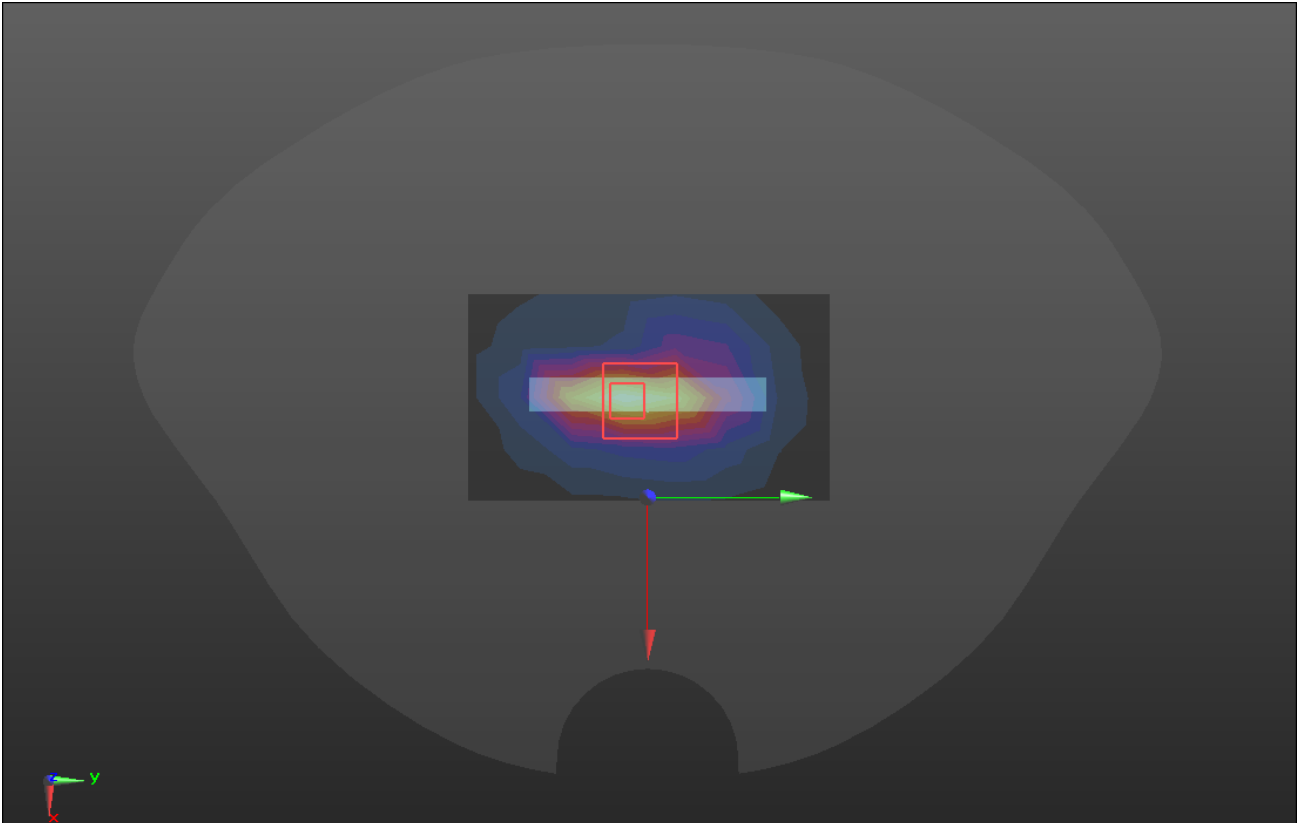
Peak SAR (extrapolated) = 2.34 W/kg

**SAR(1 g) = 0.708W/kg; SAR(10 g) = 0.309 W/kg**

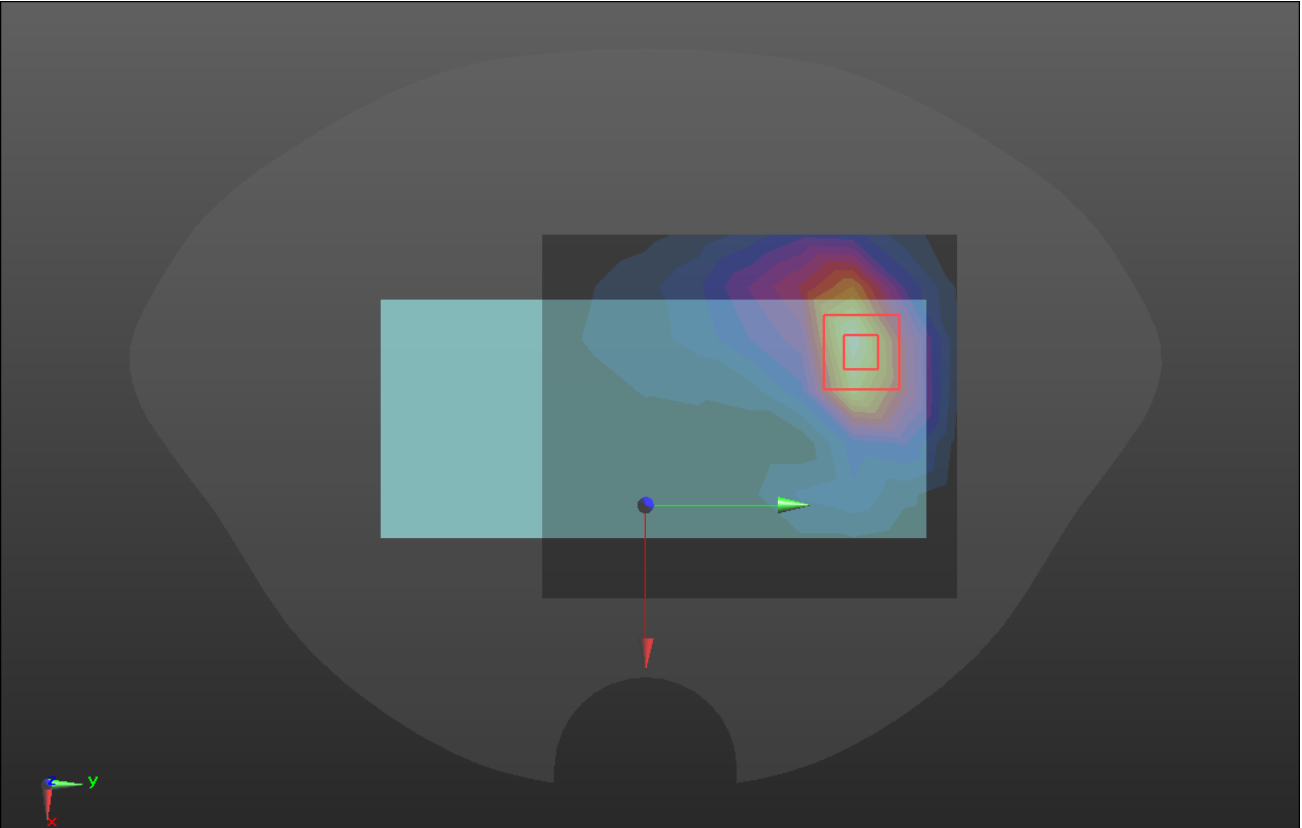
Maximum value of SAR (measured) = 1.65 W/kg



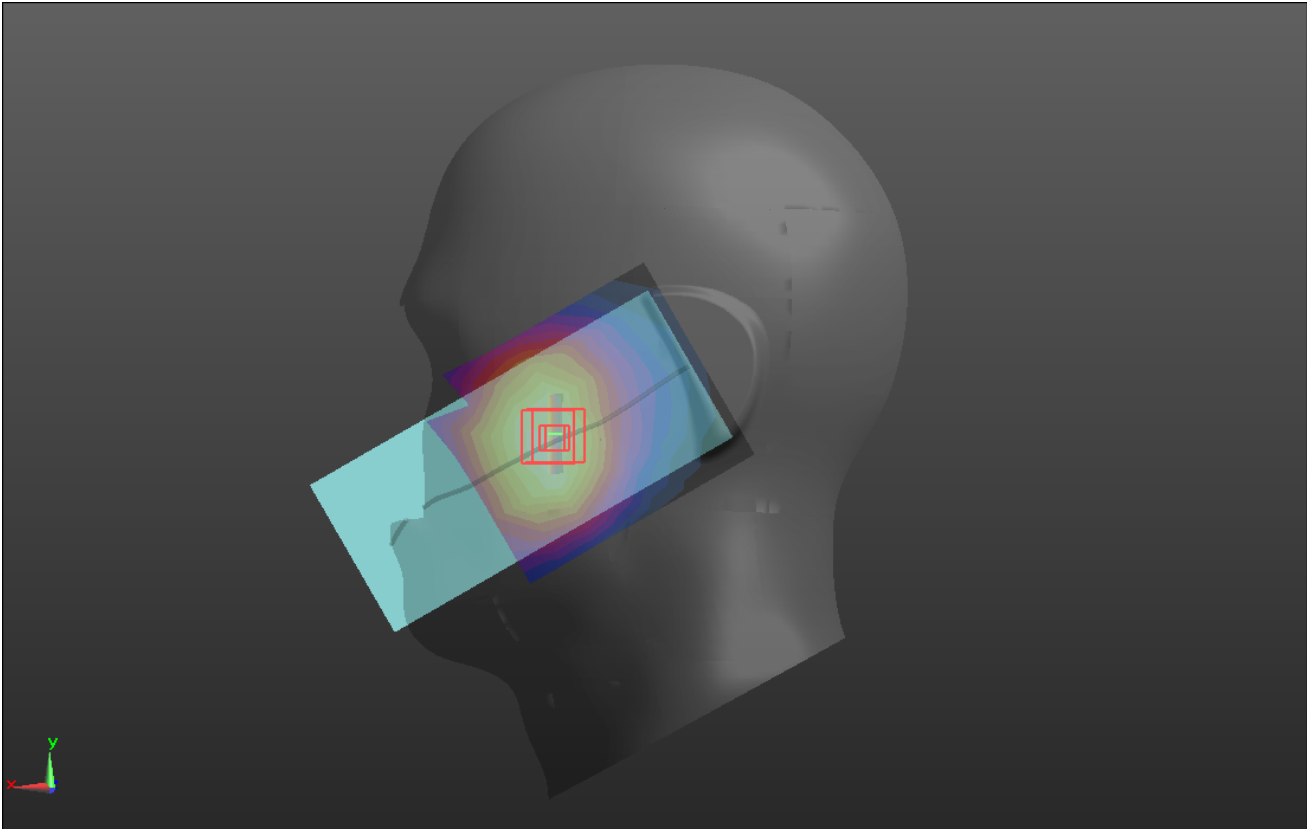
WCDMA B5

| Hotspot   | Bottom |
|---|--------|
| <p>Communication System: UID 0, WCDMA BAND 5 (0); Frequency: 836.6 MHz; Duty Cycle: 1:1<br/>           Medium parameters used (interpolated): <math>f = 836.6</math> MHz; <math>\sigma = 0.89</math> S/m; <math>\epsilon_r = 41.29</math>; <math>\rho = 1000</math> kg/m<sup>3</sup><br/>           Phantom section: Flat Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(9.41, 9.41, 9.41); Calibrated: 10/20/2021</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn720; Calibrated: 10/8/2021</li> <li>Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660</li> <li>MEASUREMENT SW: DASY52, VERSION 52.10 (4); SEMCAD X VERSION 14.6.14 (7483)</li> </ul> <p><b>BOTTOM/W5/Area Scan (5x8x1):</b> Measurement grid: dx=15mm, dy=15mm<br/>           Maximum value of SAR (measured) = 0.146 W/kg</p> <p><b>BOTTOM/W5/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm<br/>           Reference Value = 29.40 V/m; Power Drift = 0.11 dB<br/>           Peak SAR (extrapolated) = 2.23 W/kg<br/> <b>SAR(1 g) = 0.783 W/kg; SAR(10 g) = 0.359 W/kg</b><br/>           Maximum value of SAR (measured) = 1.45 W/kg</p>  |        |

LTE Band2

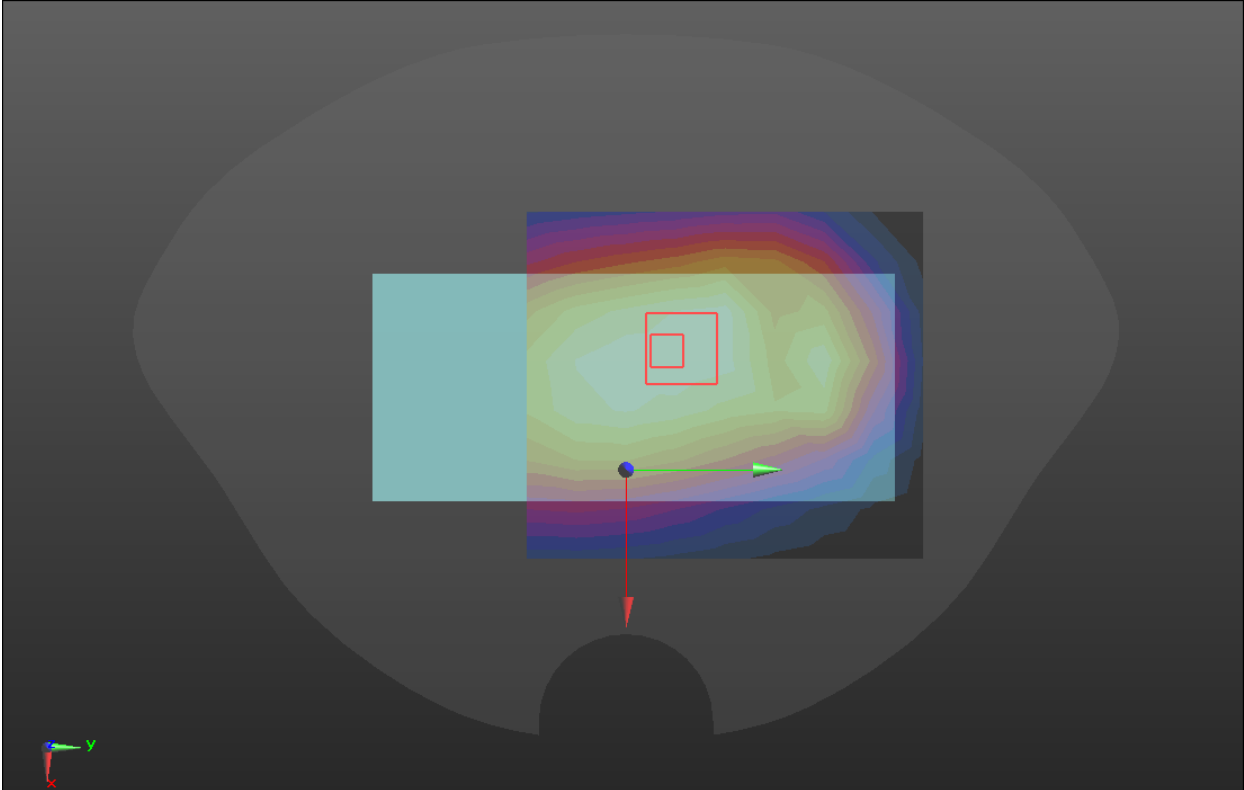
| Body-worn   | Front |
|---|-------|
| <p>Communication System: UID 0, LTE band 02 (0); Frequency: 1880 MHz; Duty Cycle: 1:1<br/>           Medium parameters used (interpolated): <math>f = 1880</math> MHz; <math>\sigma = 1.34</math> S/m; <math>\epsilon_r = 40.05</math>; <math>\rho = 1000</math> kg/m<sup>3</sup><br/>           Phantom section: Flat Section</p>  |       |
| <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(8.17, 8.17, 8.17) ; Calibrated: 10/20/2021</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn720; Calibrated: 10/8/2021</li> <li>Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660</li> <li>MEASUREMENT SW: DASY52, VERSION 52.10 (4); SEMCAD X VERSION 14.6.14 (7483)</li> </ul> <p><b>FRONT/LTE B2/Area Scan (8x9x1):</b> Measurement grid: dx=15mm, dy=15mm<br/>           Maximum value of SAR (measured) = 0.687 W/kg</p> <p><b>FRONT/LTE B2/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm<br/>           Reference Value = 5.659 V/m; Power Drift = 0.06 dB<br/>           Peak SAR (extrapolated) = 0.955 W/kg<br/> <b>SAR(1 g) = 0.635 W/kg; SAR(10 g) = 0.321 W/kg</b><br/>           Maximum value of SAR (measured) = 0.694 W/kg</p> |       |
|   |       |

LTE Band5

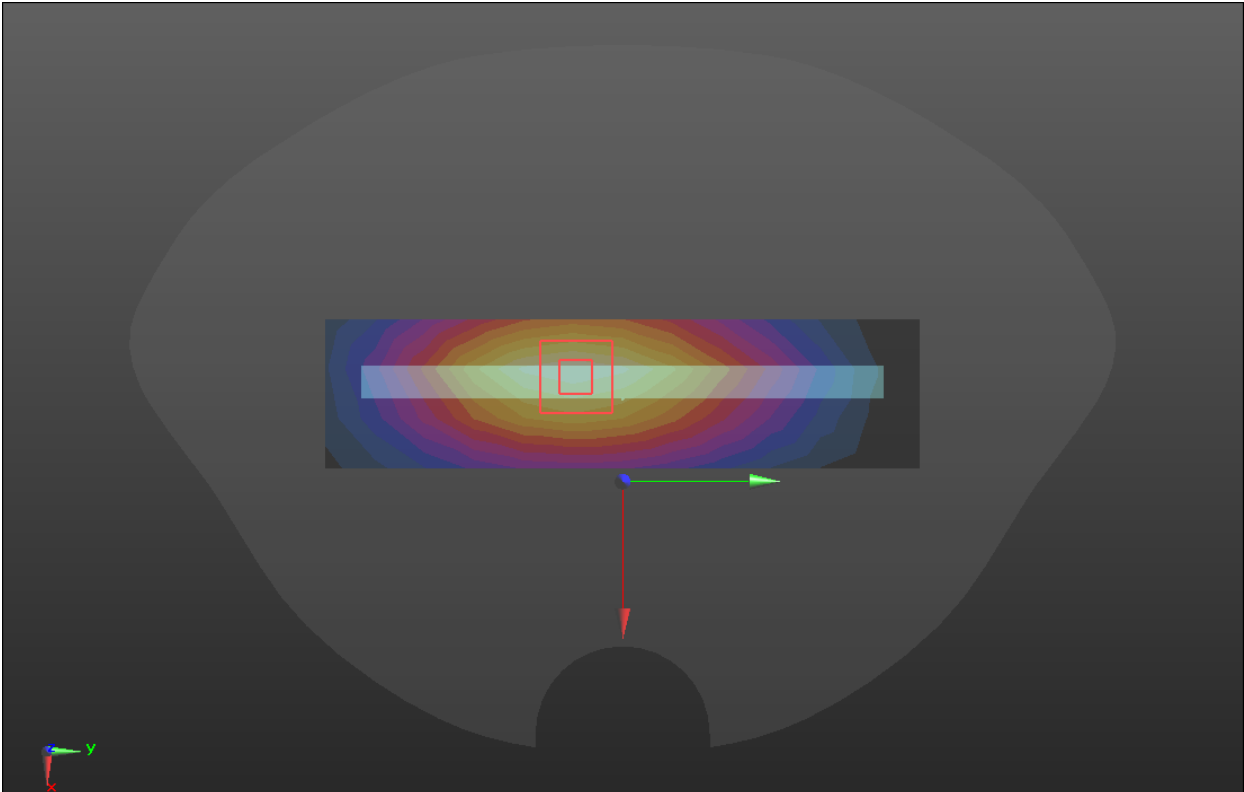
| Head  | Left cheek |
|---|------------|
| <p>Communication System: UID 0, LTE Band 5 (0); Frequency: 836.5 MHz; Duty Cycle: 1:1<br/>           Medium parameters used (interpolated): <math>f = 836.5</math> MHz; <math>\sigma = 0.89</math> S/m; <math>\epsilon_r = 41.29</math>; <math>\rho = 1000</math> kg/m<sup>3</sup><br/>           Phantom section: Left Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(9.41, 9.41, 9.41); Calibrated: 10/20/2021</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn720; Calibrated: 10/8/2021</li> <li>Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660</li> <li>MEASUREMENT SW: DASY52, VERSION 52.10 (4); SEMCAD X VERSION 14.6.14 (7483)</li> </ul> <p><b>LC/LTE B5/Area Scan (8x7x1):</b> Measurement grid: dx=15mm, dy=15mm<br/>           Maximum value of SAR (measured) = 0.123 W/kg</p> <p><b>LC/LTE B5/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm<br/>           Reference Value = 5.052 V/m; Power Drift = -0.10 dB<br/>           Peak SAR (extrapolated) = 0.148 W/kg<br/> <b>SAR(1 g) = 0.246 W/kg; SAR(10 g) = 0.119 W/kg</b><br/>           Maximum value of SAR (measured) = 0.127 W/kg</p>  |            |



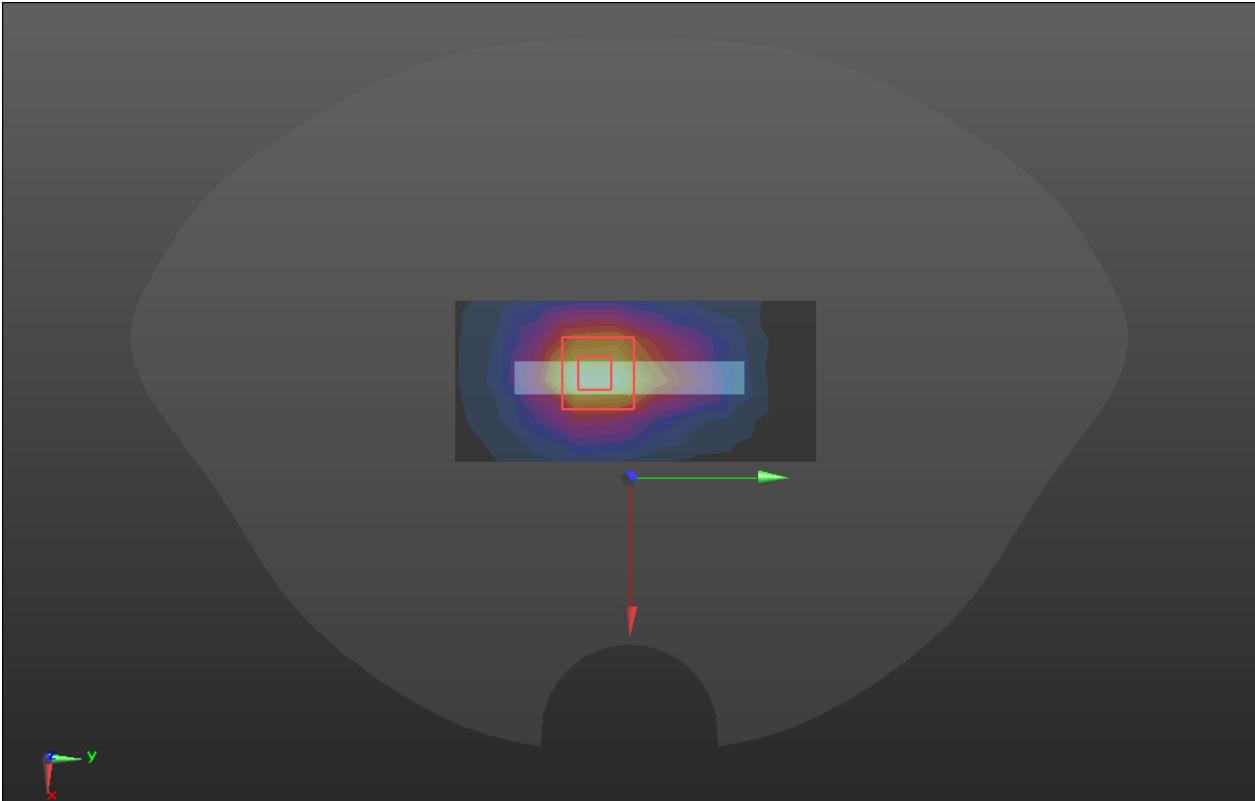
LTE Band12

| Hotspot   | Front |
|---|-------|
| <p>Communication System: UID 0, LTE Band 12 (0); Frequency: 707.5 MHz; Duty Cycle: 1:1<br/>           Medium parameters used (interpolated): <math>f = 707.5</math> MHz; <math>\sigma = 0.90</math> S/m; <math>\epsilon_r = 43.86</math>; <math>\rho = 1000</math> kg/m<sup>3</sup><br/>           Phantom section: Flat Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(9.72, 9.72, 9.72) ; Calibrated: 10/20/2021</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn720; Calibrated: 10/8/2021</li> <li>Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660</li> <li>MEASUREMENT SW: DASY52, VERSION 52.10 (4); SEMCAD X VERSION 14.6.14 (7483)</li> </ul> <p><b>FRONT/LTE B12/Area Scan (8x9x1):</b> Measurement grid: dx=15mm, dy=15mm<br/>           Maximum value of SAR (measured) = 0.190 W/kg</p> <p><b>FRONT/LTE B12/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm<br/>           Reference Value = 14.91 V/m; Power Drift = 0.03 dB<br/>           Peak SAR (extrapolated) = 0.230 W/kg<br/> <b>SAR(1 g) = 0.195 W/kg; SAR(10 g) = 0.131 W/kg</b><br/>           Maximum value of SAR (measured) = 0.192 W/kg</p>  |       |

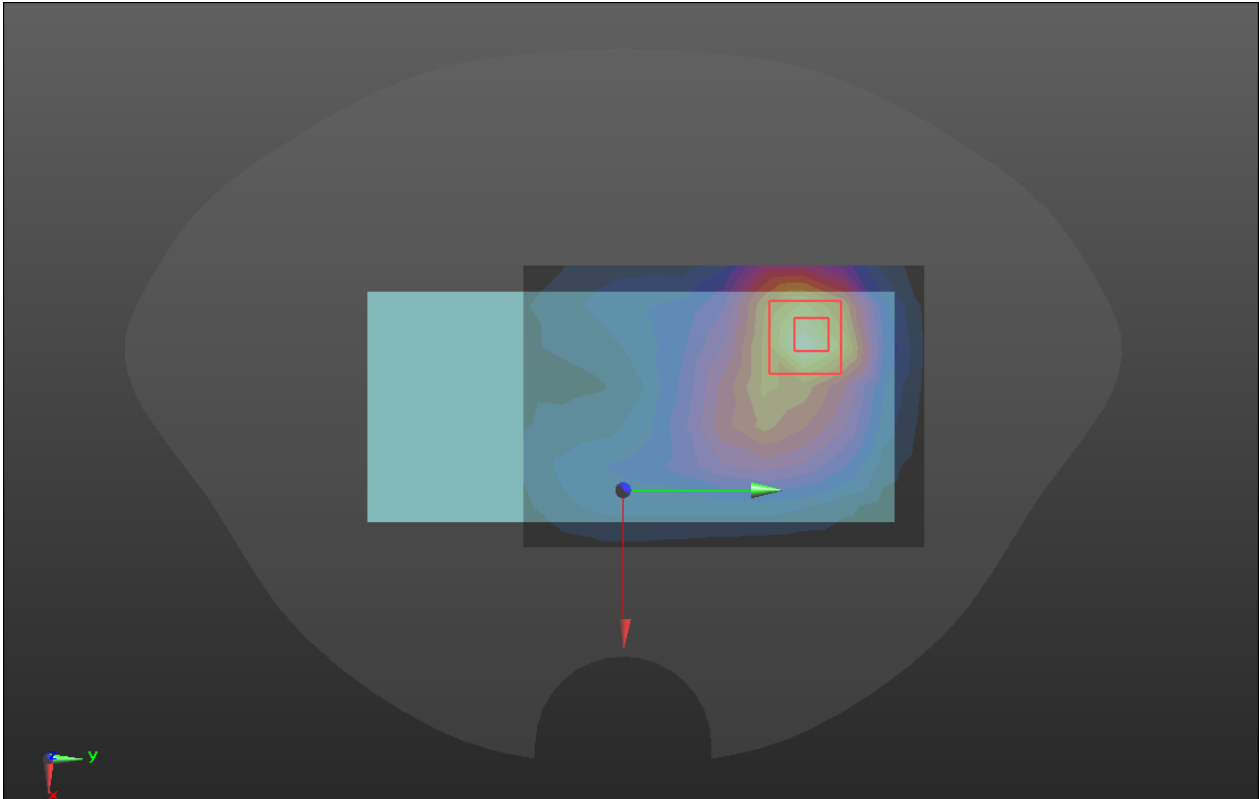
LTE Band17

| Hotspot   | Right |
|---|-------|
| <p>Communication System: UID 0, LTE Band 17 (0); Frequency: 710 MHz; Duty Cycle: 1:1<br/>           Medium parameters used (interpolated): <math>f = 710 \text{ MHz}</math>; <math>\sigma = 0.90 \text{ S/m}</math>; <math>\epsilon_r = 43.86</math> <math>\rho = 1000 \text{ kg/m}^3</math><br/>           Phantom section: Flat Section</p>   |       |
| <p>DASY Configuration:</p>  |       |
| <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(9.72, 9.72, 9.72); Calibrated: 10/20/2021</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn720; Calibrated: 10/8/2021</li> <li>Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660</li> <li>MEASUREMENT SW: DASY52, VERSION 52.10 (4); SEMCAD X VERSION 14.6.14 (7483)</li> </ul>  |       |
| <p><b>RIGHT/LTE B17/Area Scan (4x13x1):</b> Measurement grid: dx=15mm, dy=15mm<br/>           Maximum value of SAR (measured) = 0.225 W/kg</p>  |       |
| <p><b>RIGHT/LTE B17/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm</p>  |       |
| <p>Reference Value = 15.49 V/m; Power Drift = 0.04 dB</p>   |       |
| <p>Peak SAR (extrapolated) = 0.289 W/kg</p>   |       |
| <p><b>SAR(1 g) = 0.194 W/kg; SAR(10 g) = 0.136 W/kg</b></p>   |       |
| <p>Maximum value of SAR (measured) = 0.230 W/kg</p>   |       |
|  <p>The figure displays a 2D SAR field distribution plot. The main plot shows a large, dark grey area with a central region of high intensity, indicated by a color gradient from blue to red. A rectangular inset provides a zoomed-in view of the central high-intensity region, showing a more detailed color gradient. A red square highlights the area of the zoomed-in view. A red arrow points from the zoomed-in view to the main plot. A green arrow points from the zoomed-in view to the right. A coordinate system is shown in the bottom left corner, with x, y, and z axes.</p> |       |

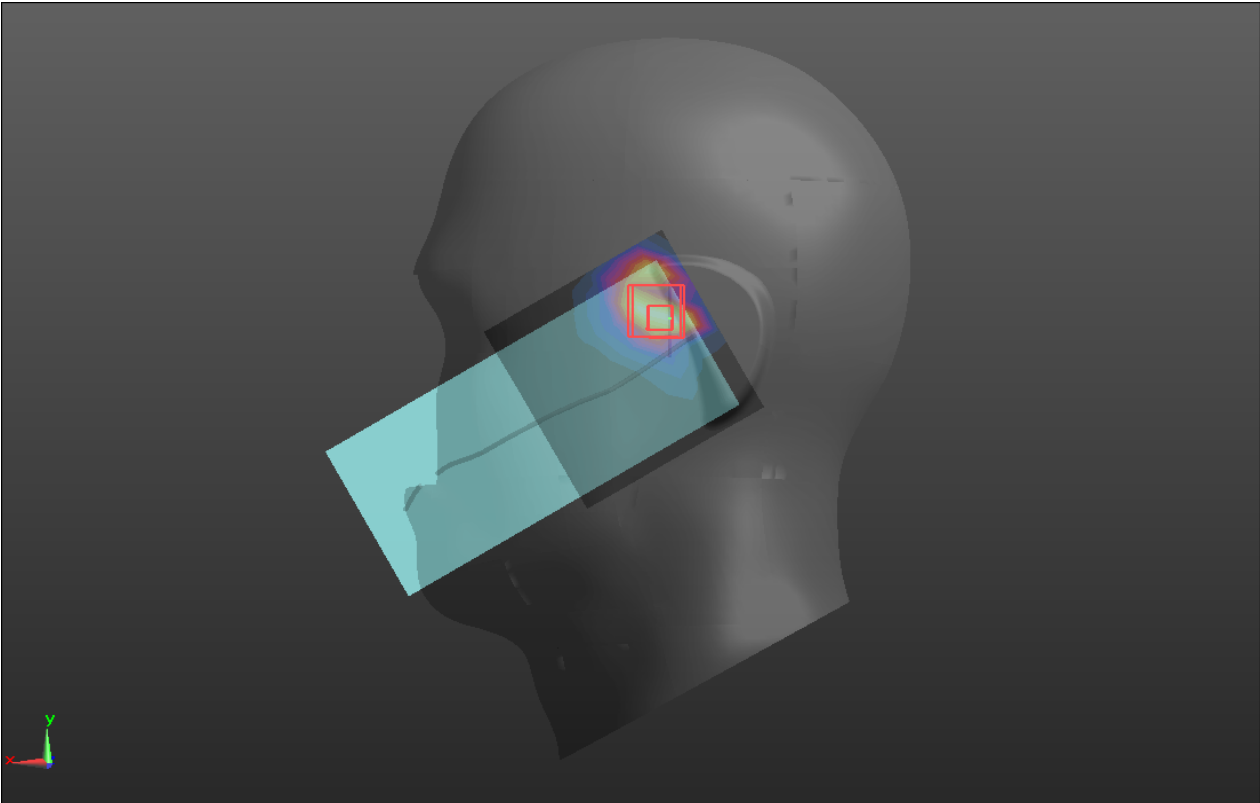
LTE Band38

| Hotspot   | Bottom |
|---|--------|
| <p>Communication System: UID 0, LTE Band 38 (0); Frequency: 2595 MHz; Duty Cycle: 0.633:1<br/>           Medium parameters used (interpolated): <math>f = 2595</math> MHz; <math>\sigma = 2.03</math> S/m; <math>\epsilon_r = 39.06</math>; <math>\rho = 1000</math> kg/m<sup>3</sup><br/>           Phantom section: Right Section</p>   |        |
| <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(7.38, 7.38, 7.38); Calibrated: 10/20/2021</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn720; Calibrated: 10/8/2021</li> <li>Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660</li> <li>MEASUREMENT SW: DASY52, VERSION 52.10 (4); SEMCAD X VERSION 14.6.14 (7483)</li> </ul> <p><b>BOTTOM/LTE B38/Area Scan (5x10x1):</b> Measurement grid: dx=12mm, dy=12mm<br/>           Maximum value of SAR (measured) = 0.532 W/kg</p> <p><b>BOTTOM/LTE B38/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm<br/>           Reference Value = 14.66 V/m; Power Drift = 0.11 dB<br/>           Peak SAR (extrapolated) = 0.900 W/kg<br/> <b>SAR(1 g) = 0.460 W/kg; SAR(10 g) = 0.235 W/kg</b><br/>           Maximum value of SAR (measured) = 0.586 W/kg</p> |        |
|   |        |

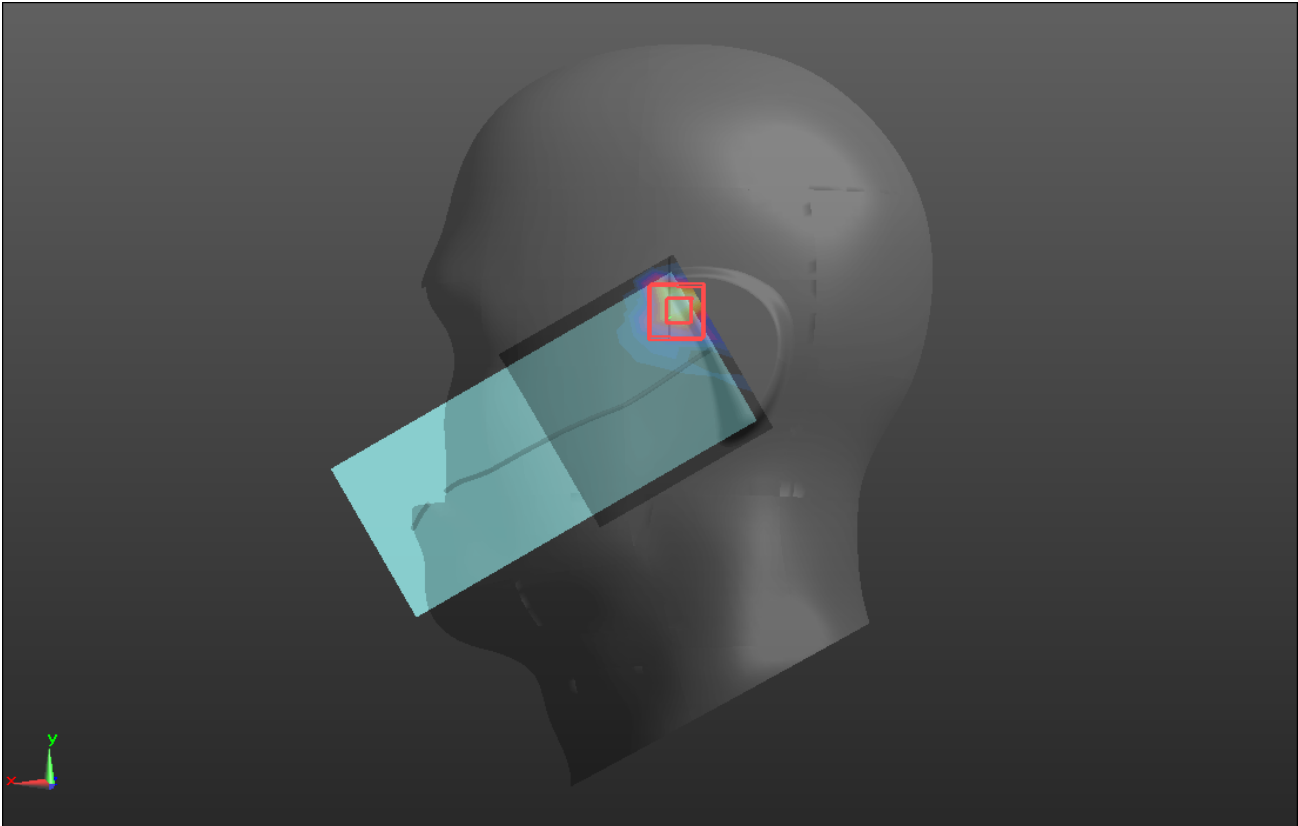
LTE Band41

| Body-worn  | Back |
|--|------|
| <p>Communication System: UID 0, LTE BAND41 (0); Frequency: 2593 MHz; Duty Cycle: 0.633:1<br/>           Medium parameters used (interpolated): <math>f = 2593</math> MHz; <math>\sigma = 1.952</math> S/m; <math>\epsilon_r = 39.009</math>; <math>\rho = 1000</math> kg/m<sup>3</sup><br/>           Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(7.38, 7.38, 7.38); Calibrated: 10/20/2021</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn720; Calibrated: 10/8/2021</li> <li>Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx</li> <li>Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)</li> </ul> <p><b>BACK/LTE B41/Area Scan (8x11x1):</b> Measurement grid: dx=12mm, dy=12mm<br/>           Maximum value of SAR (measured) = 0.562 W/kg</p> <p><b>BACK/LTE B41/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm<br/>           Reference Value = 5.824 V/m; Power Drift = -0.08 dB<br/>           Peak SAR (extrapolated) = 0.933 W/kg<br/> <b>SAR(1 g) = 0.550 W/kg; SAR(10 g) = 0.267 W/kg</b><br/>           Maximum value of SAR (measured) = 0.613 W/kg</p>  |      |

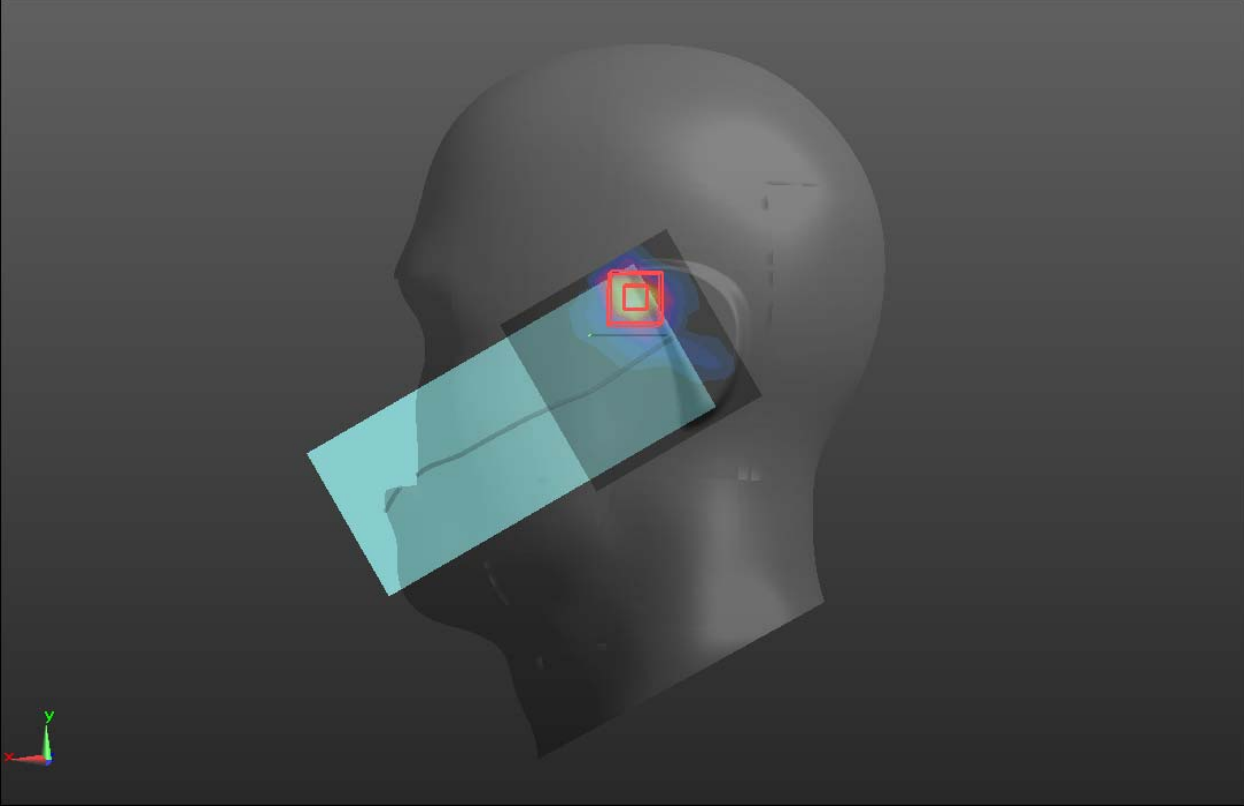
WIFI 2.4GHz

| Head  | Left cheek |
|---|------------|
| <p>Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2437 MHz; Duty Cycle: 0.996:1<br/>           Medium parameters used (interpolated): <math>f = 2437</math> MHz; <math>\sigma = 1.81</math> S/m; <math>\epsilon_r = 37.30</math>; <math>\rho = 1000</math> kg/m<sup>3</sup><br/>           Phantom section: Left Section</p>  |            |
| <p>DASY Configuration:</p>  |            |
| <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(7.45, 7.45, 7.45); Calibrated: 2021/10/20;</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn720; Calibrated: 10/8/2021</li> <li>Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660</li> <li>MEASUREMENT SW: DASY52, VERSION 52.10 (4); SEMCAD X VERSION 14.6.14 (7483)</li> </ul> |            |
| <p><b>LC/WIFI2.4G/Area Scan (9x9x1):</b> Measurement grid: dx=12mm, dy=12mm<br/>           Maximum value of SAR (measured) = 0.326 W/kg</p>   |            |
| <p><b>LC/WIFI2.4/Zoom Scan (5x5x5)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm</p>   |            |
| <p>Reference Value = 8.019 V/m; Power Drift = 0.15 dB</p>   |            |
| <p>Peak SAR (extrapolated) = 0.438 W/kg</p>   |            |
| <p><b>SAR(1 g) = 0.233 W/kg; SAR(10 g) = 0.114 W/kg</b></p>   |            |
| <p>Maximum value of SAR (measured) = 0.347 W/kg</p>   |            |
|   |            |

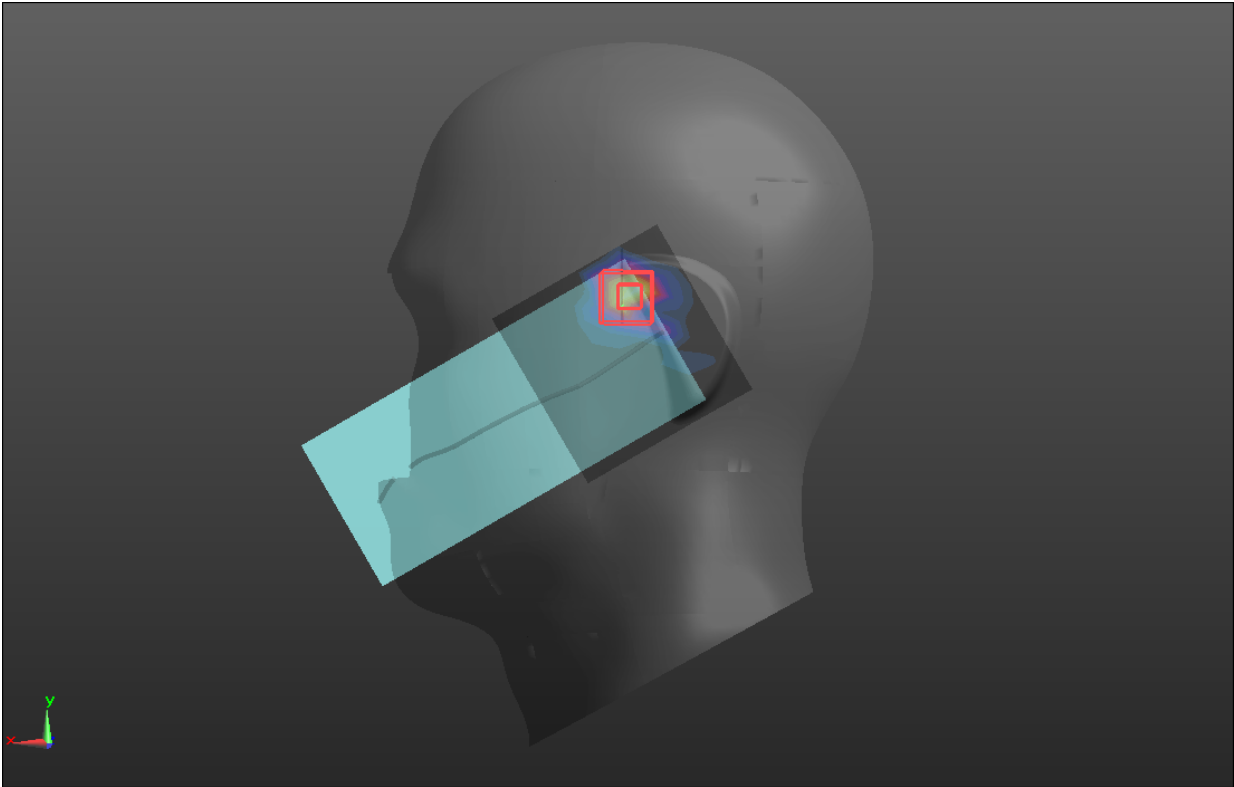
WIFI 5.2GHz

| Head  | Left cheek |
|---|------------|
| <p>Communication System: UID 0, WIFI 802.11 5GHz (0); Frequency: 5220 MHz; Duty Cycle: 0.992:1<br/>           Medium parameters used (interpolated): <math>f = 5220</math> MHz; <math>\sigma = 4.61</math> S/m; <math>\epsilon_r = 34.43</math>; <math>\rho = 1000</math> kg/m<sup>3</sup><br/>           Phantom section: Left Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: EX3DV4 - SN3708; ConvF(5.58, 5.58, 5.58); Calibrated: 2021/10/20;</li> <li>• Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>• Electronics: DAE4 Sn720; Calibrated: 10/8/2021</li> <li>• Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660</li> <li>• MEASUREMENT SW: DASY52, VERSION 52.10 (4); SEMCAD X VERSION 14.6.14 (7483)</li> </ul> <p><b>LC/WIFI5.2/Area Scan (9x9x1):</b> Measurement grid: dx=10mm, dy=10mm<br/>           Maximum value of SAR (measured) = 0.239 W/kg</p> <p><b>LC/WIFI5.2/Zoom Scan (5x5x5)/Cube 0:</b> Measurement grid: dx=5mm, dy=5mm, dz=2mm<br/>           Reference Value = 4.413 V/m; Power Drift = -0.12 dB<br/>           Peak SAR (extrapolated) = 0.400 W/kg<br/> <b>SAR(1 g) = 0.125 W/kg; SAR(10 g) = 0.062 W/kg</b><br/>           Maximum value of SAR (measured) = 0.218 W/kg</p>  |            |

WIFI 5.3GHz

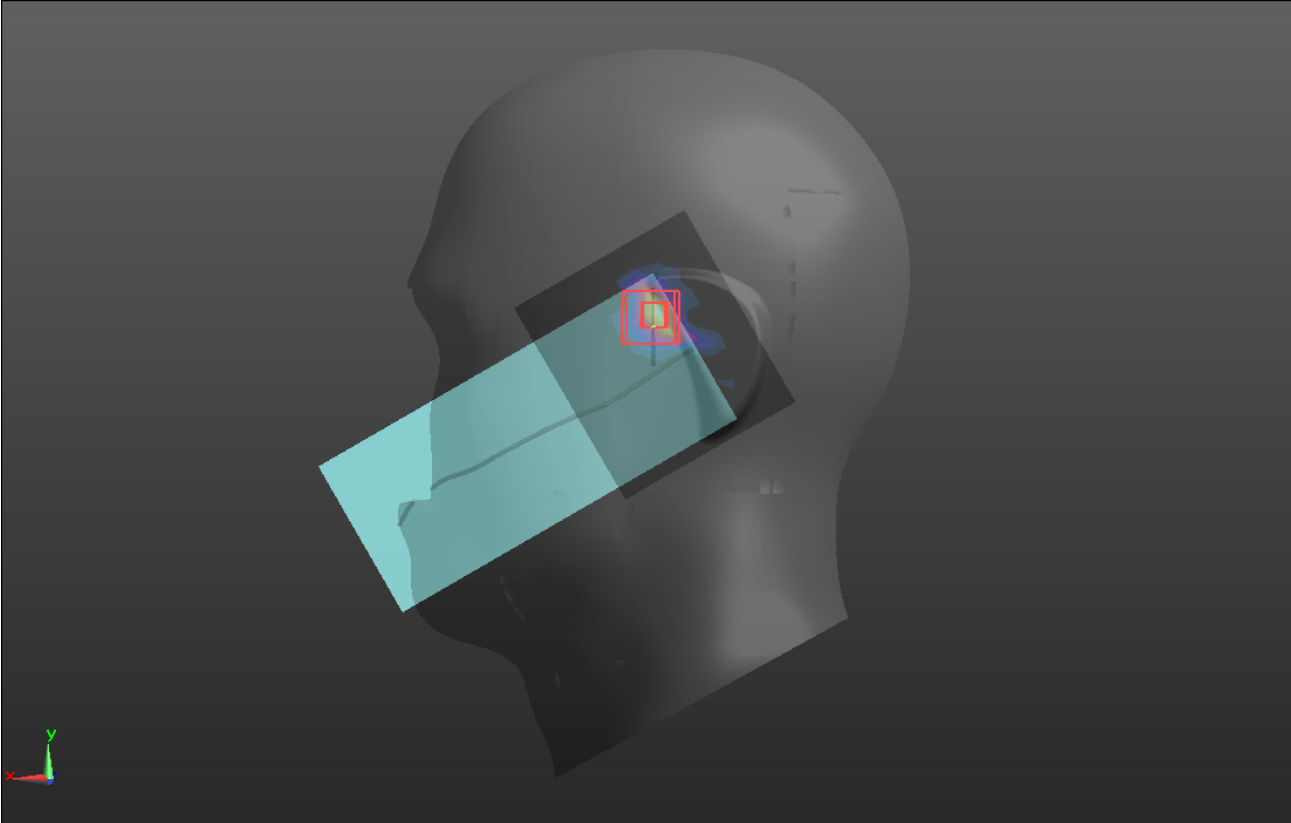
| Head   | Left cheek |
|--|------------|
| <p>Communication System: UID 0, WIFI 5.3G (0); Frequency: 5280 MHz;Duty Cycle: 0.9926:1<br/>           Medium parameters used (interpolated): <math>f = 5280</math> MHz; <math>\sigma = 4.74</math> S/m; <math>\epsilon_r = 35.92</math>; <math>\rho = 1000</math> kg/m<sup>3</sup><br/>           Phantom section: Left Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(5.52, 5.52, 5.52) @ 5280 MHz; Calibrated: 10/20/2021</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn720; Calibrated: 10/8/2021</li> <li>Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx</li> <li>Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)</li> </ul> <p><b>LC/WIFI5.3/Area Scan (9x9x1):</b> Measurement grid: dx=10mm, dy=10mm<br/>           Maximum value of SAR (measured) = 0.683 W/kg</p> <p><b>LC/WIFI5.3/Zoom Scan (5x5x5)/Cube 0:</b> Measurement grid: dx=5mm, dy=5mm, dz=2mm<br/>           Reference Value = 5.363 V/m; Power Drift = 0.12 dB<br/>           Peak SAR (extrapolated) = 0.989 W/kg<br/> <b>SAR(1 g) = 0.136 W/kg; SAR(10 g) = 0.061 W/kg</b><br/>           Maximum value of SAR (measured) = 0.638 W/kg</p>  |            |

WIFI 5.6GHz

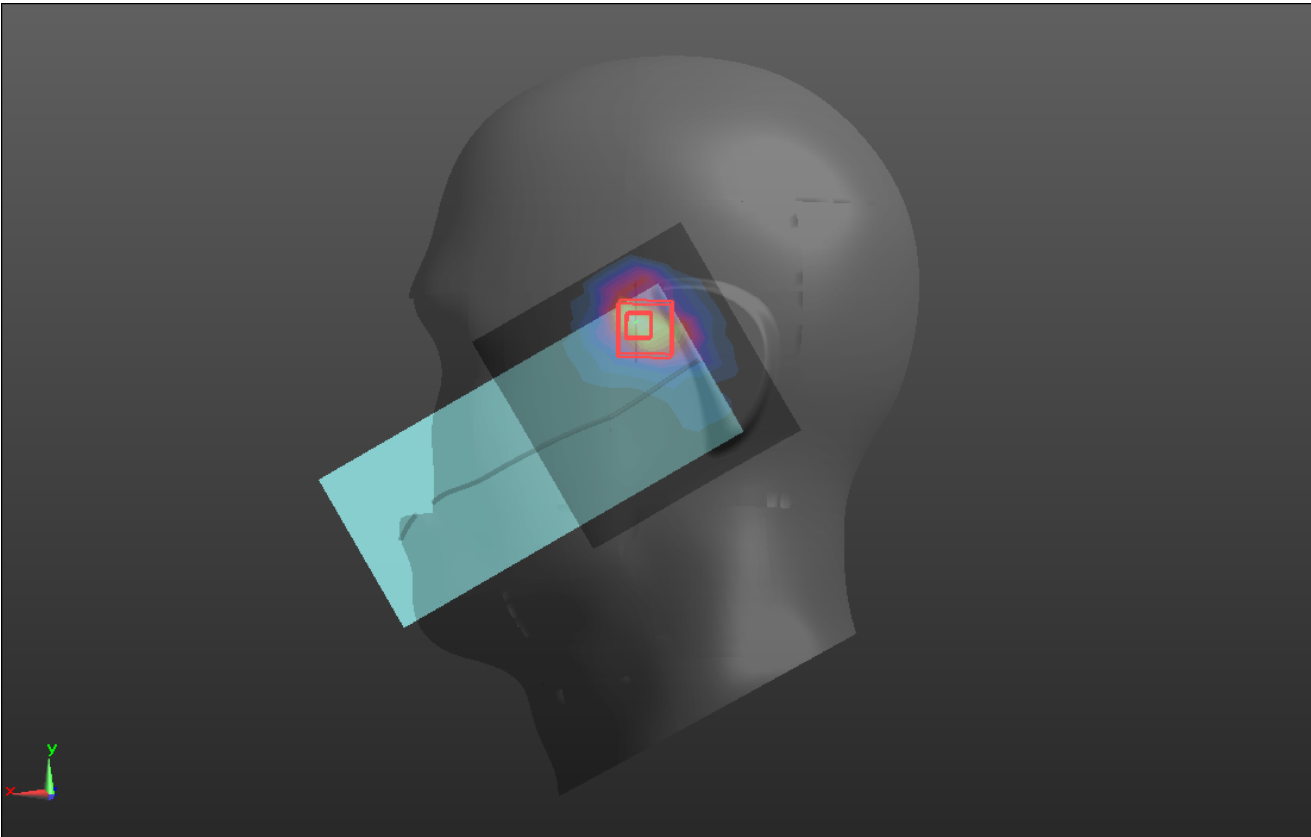
| Head   | Left cheek |
|--|------------|
| <p>Communication System: UID 0, WIFI 5.6G (0); Frequency: 5600 MHz;Duty Cycle: 0.9923:1<br/>           Medium parameters used: <math>f = 5600 \text{ MHz}</math>; <math>\sigma = 5.07 \text{ S/m}</math>; <math>\epsilon_r = 35.5</math>; <math>\rho = 1000 \text{ kg/m}^3</math><br/>           Phantom section: Left Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: EX3DV4 - SN3708; ConvF(4.95, 4.95, 4.95) @ 5600 MHz; Calibrated: 10/20/2021</li> <li>• Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>• Electronics: DAE4 Sn720; Calibrated: 10/8/2021</li> <li>• Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx</li> <li>• Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)</li> </ul> <p><b>LC/WIFI5.6/Area Scan (9x10x1):</b> Measurement grid: dx=10mm, dy=10mm<br/>           Maximum value of SAR (measured) = 0.106 W/kg</p> <p><b>LC/WIFI5.6/Zoom Scan (5x5x5)/Cube 0:</b> Measurement grid: dx=5mm, dy=5mm, dz=2mm<br/>           Reference Value = 3.100 V/m; Power Drift = 0.10 dB<br/>           Peak SAR (extrapolated) = 0.252 W/kg<br/> <b>SAR(1 g) = 0.124W/kg; SAR(10 g) = 0.061 W/kg</b><br/>           Maximum value of SAR (measured) = 0.142 W/kg</p>  |            |



WIFI 5.8GHz

| Head   | Left cheek |
|--|------------|
| <p>Communication System: UID 0, WIFI 802.11 5GHz (0); Frequency: 5785 MHz; Duty Cycle: 0.9924:1<br/>           Medium parameters used (interpolated): <math>f = 5785</math> MHz; <math>\sigma = 5.33</math> S/m; <math>\epsilon_r = 33.56</math>; <math>\rho = 1000</math> kg/m<sup>3</sup><br/>           Phantom section: Left Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(5.05, 5.05, 5.05); Calibrated: 2021/10/20;</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn720; Calibrated: 10/8/2021</li> <li>Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660</li> <li>MEASUREMENT SW: DASY52, VERSION 52.10 (4); SEMCAD X VERSION 14.6.14 (7483)</li> </ul> <p><b>LC/WIFI5.8/Area Scan (9x10x1):</b> Measurement grid: dx=10mm, dy=10mm<br/>           Maximum value of SAR (measured) = 0.234 W/kg</p> <p><b>LC/WIFI5.8/Zoom Scan (5x5x5)/Cube 0:</b> Measurement grid: dx=5mm, dy=5mm, dz=2mm<br/>           Reference Value = 4.204 V/m; Power Drift = 0.09 dB<br/>           Peak SAR (extrapolated) = 0.435 W/kg<br/> <b>SAR(1 g) = 0.136 W/kg; SAR(10 g) = 0.068 W/kg</b><br/>           Maximum value of SAR (measured) = 0.244 W/kg</p>  |            |

BT

| Head   | Left cheek |
|--|------------|
| <p>Communication System: UID 0, BT (0); Frequency: 2441 MHz; Duty Cycle: 0.791:1<br/>           Medium parameters used (interpolated): <math>f = 2441</math> MHz; <math>\sigma = 1.81</math> S/m; <math>\epsilon_r = 37.30</math>; <math>\rho = 1000</math> kg/m<sup>3</sup><br/>           Phantom section: Left Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(7.45, 7.45, 7.45); Calibrated: 10/20/2021</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn720; Calibrated: 10/8/2021</li> <li>Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660</li> <li>MEASUREMENT SW: DASY52, VERSION 52.10 (4); SEMCAD X VERSION 14.6.14 (7483)</li> </ul> <p><b>LC/BT/Area Scan (9x9x1):</b> Measurement grid: dx=12mm, dy=12mm<br/>           Maximum value of SAR (measured) = 0.0650 W/kg</p> <p><b>LC/BT/Zoom Scan (5x5x5)/Cube 0:</b> Measurement grid: dx=5mm, dy=5mm, dz=2mm<br/>           Reference Value = 4.451 V/m; Power Drift = 0.07 dB<br/>           Peak SAR (extrapolated) = 0.323 W/kg<br/> <b>SAR(1 g) = 0.146 W/kg; SAR(10 g) = 0.067 W/kg</b><br/>           Maximum value of SAR (measured) = 0.264 W/kg</p>  |            |

Note: All the modulated signal with different PAR (refers to RF WWAN report) already take into account, but not mentioned in this inherent log file template.