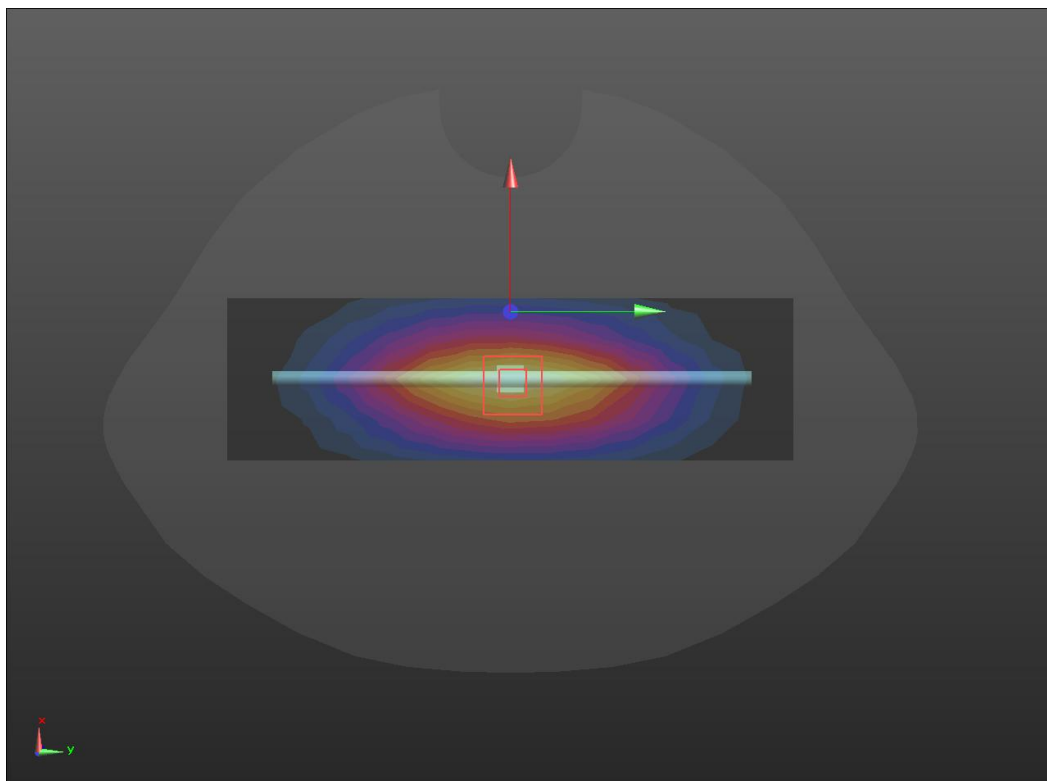
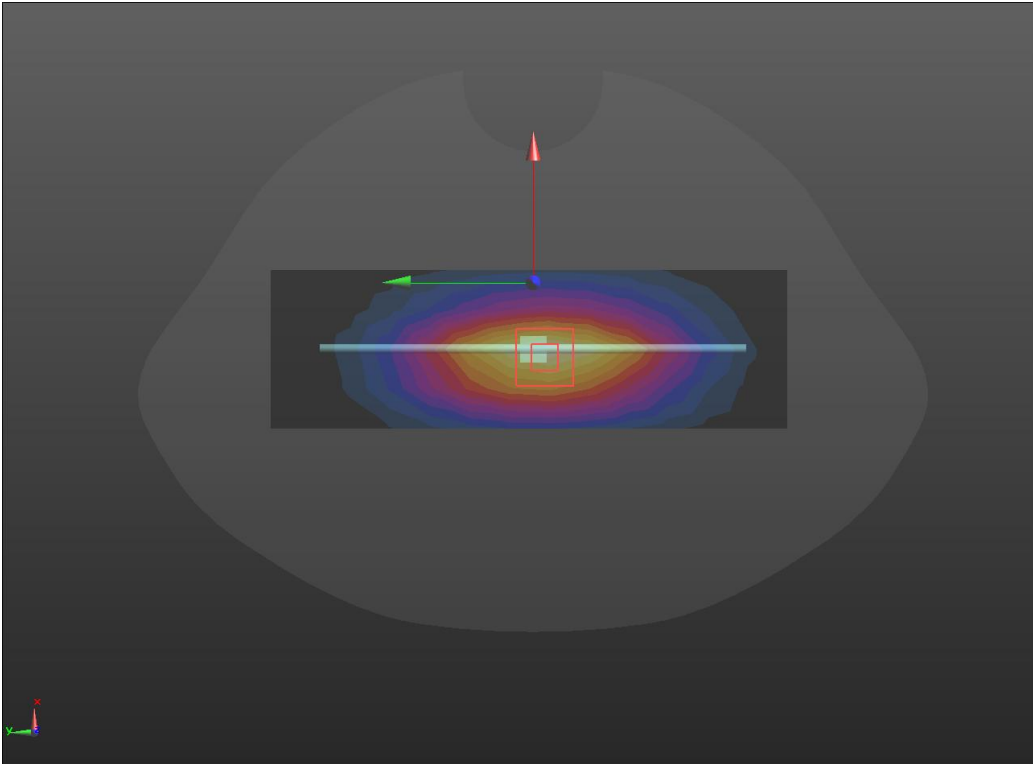


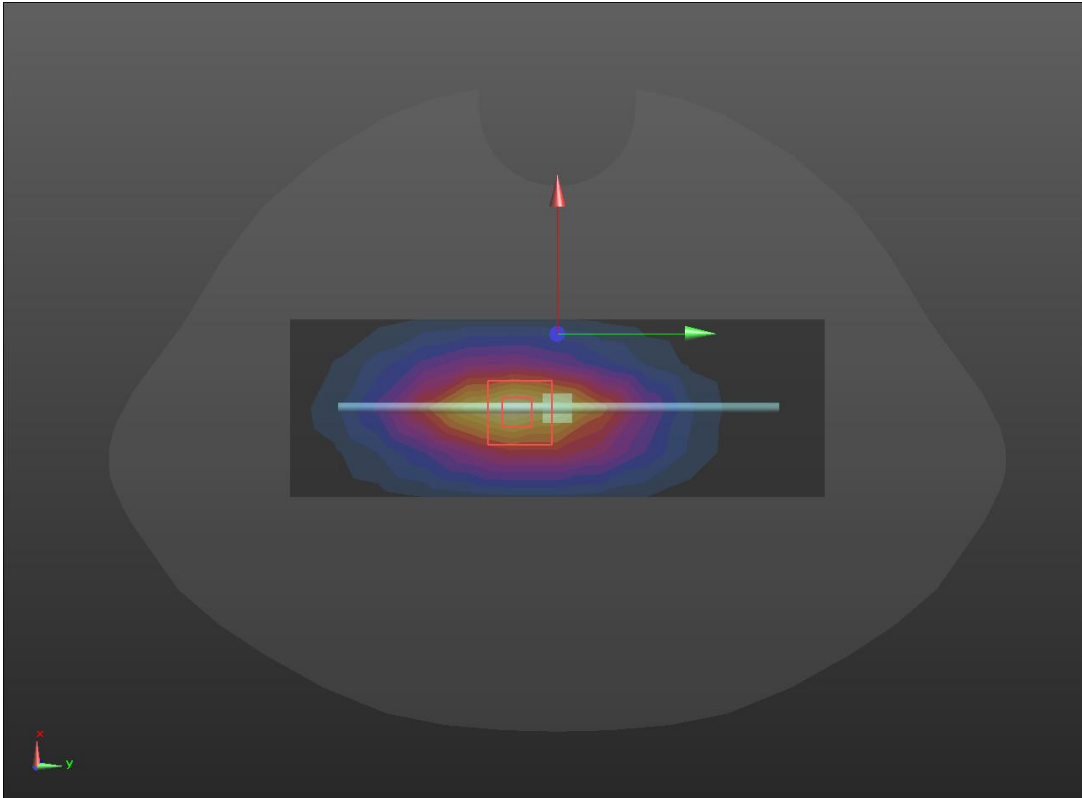
System check	750MHz(2023/8/11)
<p>Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.93 \text{ S/m}$; $\epsilon_r = 43.07$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> Probe: EX3DV4 - SN3708; ConvF(9.75, 9.75, 9.75); Calibrated: 2022/10/28; Sensor-Surface: 1.4mm (Mechanical Surface Detection) Electronics: DAE4 Sn546; Calibrated: 2022/9/15 Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>750/Dipole 750MHz/Area Scan (5x15x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 2.68 W/kg</p> <p>750/Dipole 750MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 58.93 V/m; Power Drift = -0.15 dB Peak SAR (extrapolated) = 3.04 W/kg SAR(1 g) = 2.14 W/kg; SAR(10 g) = 1.47 W/kg Maximum value of SAR (measured) = 2.69 W/kg</p>	



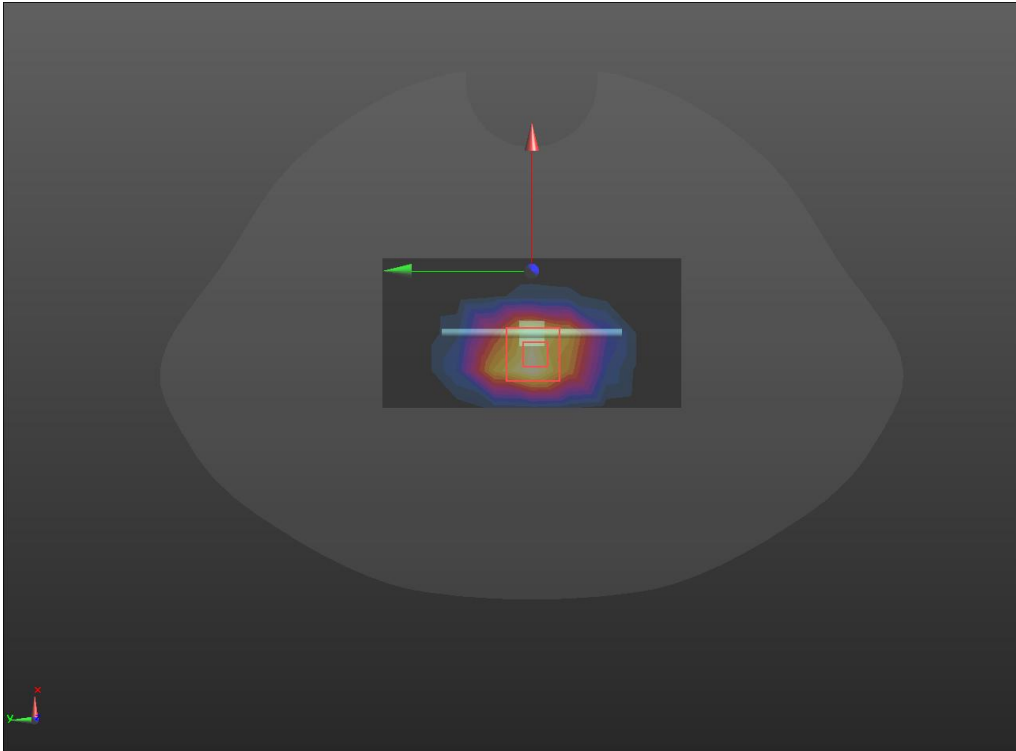
SRTC performed system check by using 250mw at antenna port

System check	835MHz(2023/8/15)
<p>Communication System: UID 0, CW (0); Frequency: 835 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 835 \text{ MHz}$; $\sigma = 0.93 \text{ S/m}$; $\epsilon_r = 42.99$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> • Probe: EX3DV4 - SN3708; ConvF(9.22, 9.22, 9.22); Calibrated: 2022/10/28; • Sensor-Surface: 1.4mm (Mechanical Surface Detection) • Electronics: DAE4 Sn546; Calibrated: 2022/9/15 • Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 • Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>D835/Dipole 835MHz/Area Scan (5x14x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 3.22 W/kg</p> <p>D835/Dipole 835MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 62.50 V/m; Power Drift = 0.05 dB Peak SAR (extrapolated) = 3.75 W/kg SAR(1 g) = 2.32 W/kg; SAR(10 g) = 1.52 W/kg Maximum value of SAR (measured) = 3.33 W/kg</p> 	

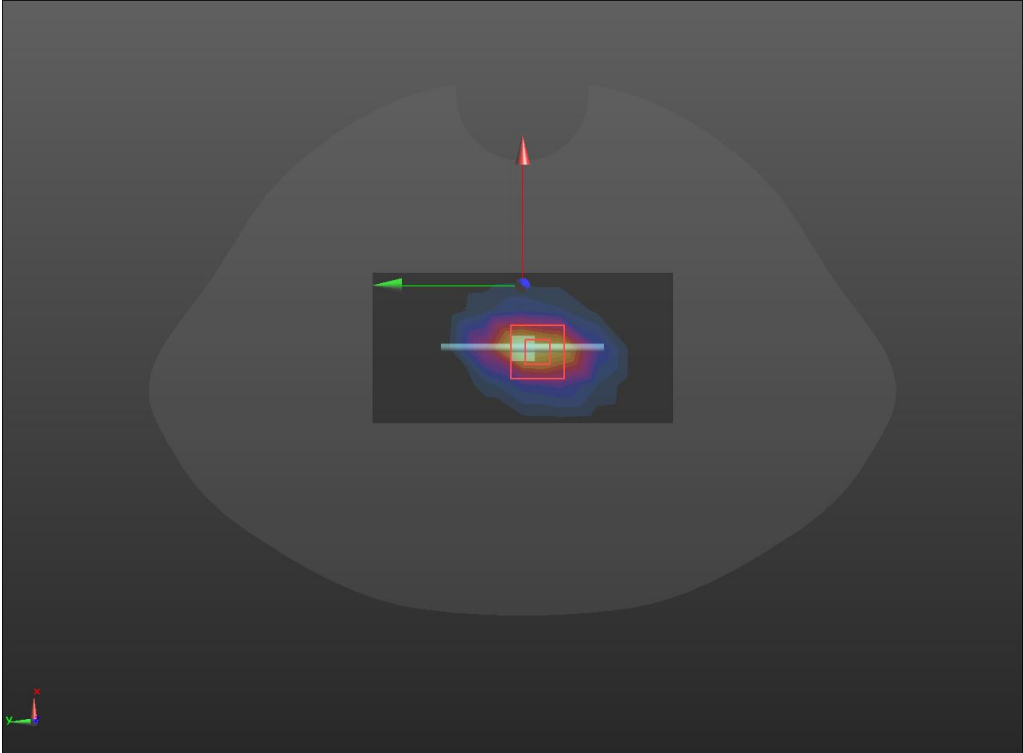
SRTC performed system check by using 250mw at antenna port

System check	900MHz(2023/8/166)
<p>Communication System: UID 0, CW (0); Frequency: 900 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 1.01 \text{ S/m}$; $\epsilon_r = 40.05$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> Probe: EX3DV4 - SN3708; ConvF(9.22, 9.22, 9.22); Calibrated: 2022/10/28; Sensor-Surface: 1.4mm (Mechanical Surface Detection) Electronics: DAE4 Sn546; Calibrated: 2022/9/15 Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>D900/Dipole 900MHz/Area Scan (5x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 5.80 W/kg</p> <p>D900/Dipole 900MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 76.48 V/m; Power Drift = 0.05 dB Peak SAR (extrapolated) = 7.06 W/kg SAR(1 g) = 2.68 W/kg; SAR(10 g) = 1.83 W/kg Maximum value of SAR (measured) = 5.87 W/kg</p> 	

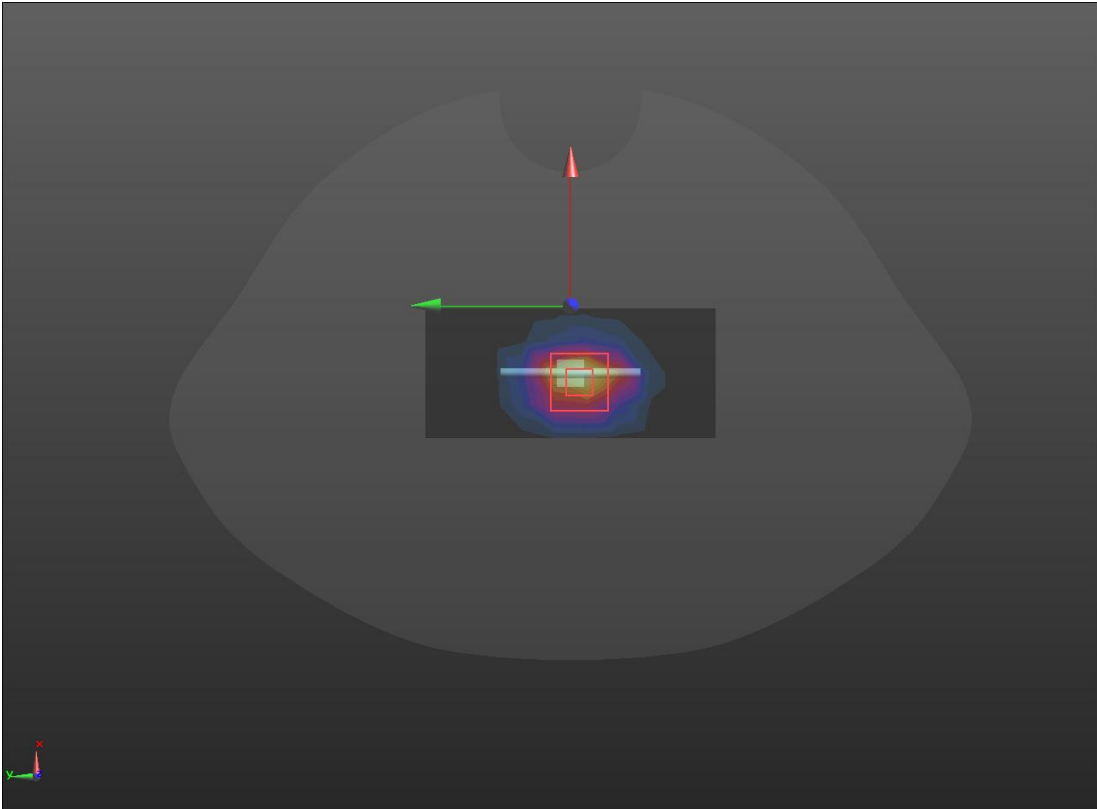
SRTC performed system check by using 250mw at antenna port

System check	1800MHz(2023/8/18)
<p>Communication System: UID 0, CW (0); Frequency: 1800 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 1800 \text{ MHz}$; $\sigma = 1.40 \text{ S/m}$; $\epsilon_r = 39.31$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> Probe: EX3DV4 - SN3708; ConvF(8.13, 8.13, 8.13); Calibrated: 2022/10/28; Sensor-Surface: 1.4mm (Mechanical Surface Detection) Electronics: DAE4 Sn546; Calibrated: 2022/9/15 Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>D1800/Dipole 1800MHz/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 9.81 W/kg</p> <p>D1800/Dipole 1800MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 83.70 V/m; Power Drift = 0.18 dB Peak SAR (extrapolated) = 16.0 W/kg SAR(1 g) = 10 W/kg; SAR(10 g) = 5.22 W/kg Maximum value of SAR (measured) = 13.4 W/kg</p> 	

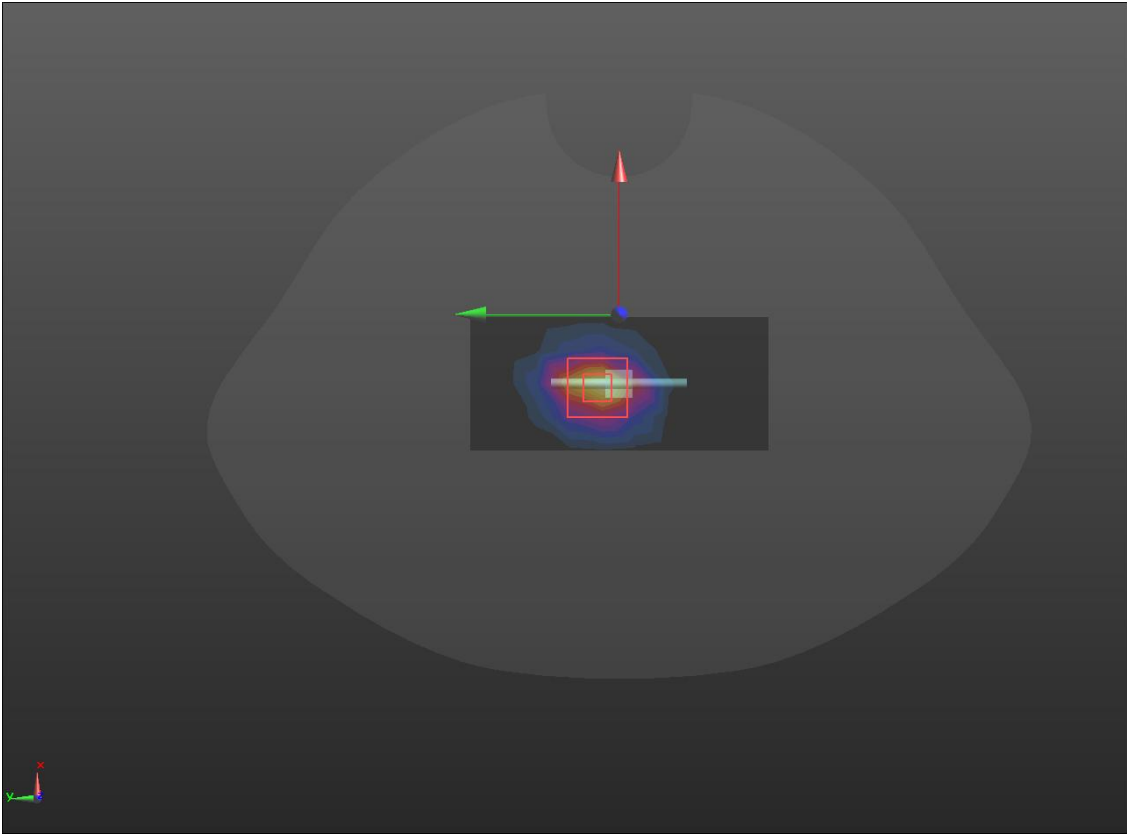
SRTC performed system check by using 250mw at antenna port

System check	2000MHz(2023/8/19)
<p>Communication System: UID 0, CW (0); Frequency: 2000 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 2000 \text{ MHz}$; $\sigma = 1.47 \text{ S/m}$; $\epsilon_r = 41.31$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> • Probe: EX3DV4 - SN3708; ConvF(8, 8, 8); Calibrated: 2022/10/28; • Sensor-Surface: 1.4mm (Mechanical Surface Detection) • Electronics: DAE4 Sn546; Calibrated: 2022/9/15 • Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 • Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>D2000/Dipole 2000MHz/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 14.4 W/kg</p> <p>D2000/Dipole 2000MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 105.4 V/m; Power Drift = 0.04 dB Peak SAR (extrapolated) = 18.3 W/kg SAR(1 g) = 10.64 W/kg; SAR(10 g) = 4.99 W/kg Maximum value of SAR (measured) = 15.4 W/kg</p> 	

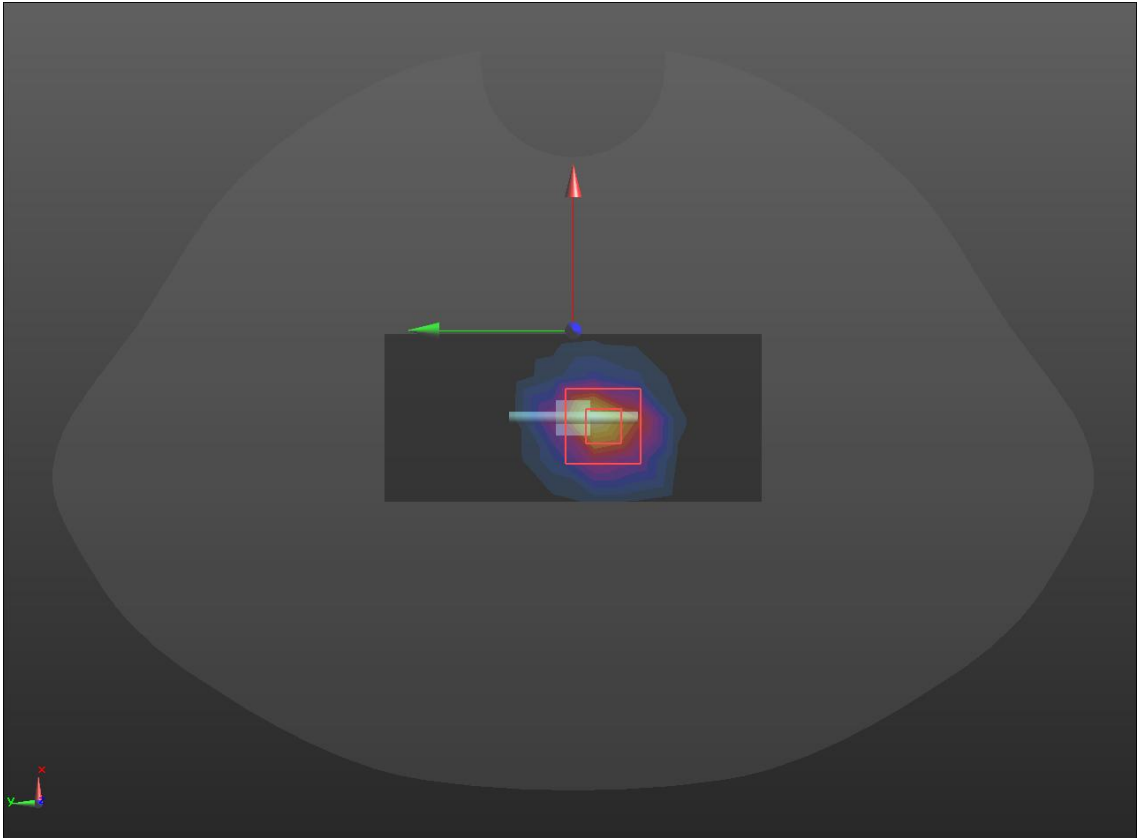
SRTC performed system check by using 250mw at antenna port

System check	2450MHz(2023/8/11)
<p>Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.74$ S/m; $\epsilon_r = 40.83$; $\rho = 1000$ kg/m³ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> • Probe: EX3DV4 - SN3708; ConvF(7.51, 7.51, 7.51); Calibrated: 2022/10/28; • Sensor-Surface: 1.4mm (Mechanical Surface Detection) • Electronics: DAE4 Sn546; Calibrated: 2022/9/15 • Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 • Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>D2450/Dipole 2450MHz/Area Scan (5x10x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 19.7 W/kg</p> <p>D2450/Dipole 2450MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 106.7 V/m; Power Drift = 0.20 dB Peak SAR (extrapolated) = 26.2 W/kg SAR(1 g) = 12.69 W/kg; SAR(10 g) = 6.36 W/kg Maximum value of SAR (measured) = 21.2 W/kg</p> 	

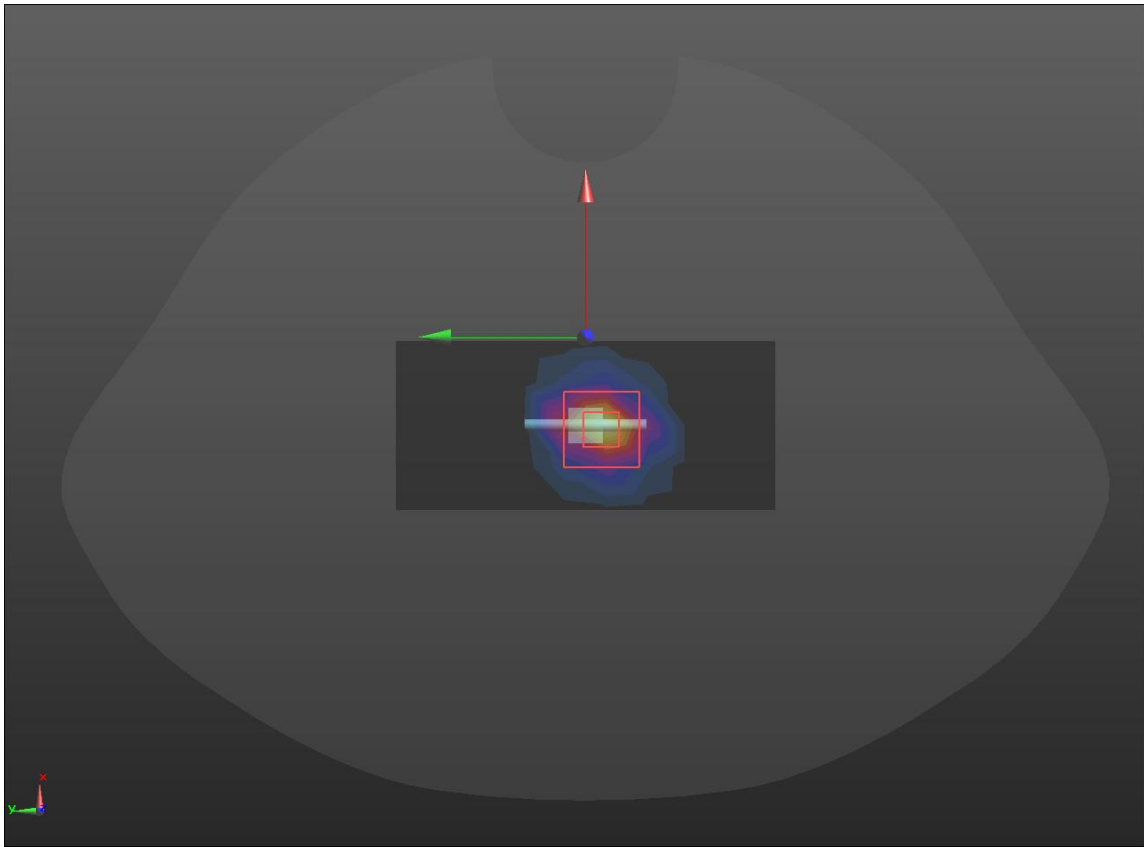
SRTC performed system check by using 250mw at antenna port

System check	2600MHz(2023/8/20)
<p>Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 2600$ MHz; $\sigma = 1.92$ S/m; $\epsilon_r = 38.65$; $\rho = 1000$ kg/m³ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> • Probe: EX3DV4 - SN3708; ConvF(7.46, 7.46, 7.46); Calibrated: 2022/10/28; • Sensor-Surface: 1.4mm (Mechanical Surface Detection) • Electronics: DAE4 Sn546; Calibrated: 2022/9/15 • Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 • Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>2600/Dipole 2600MHz/Area Scan (5x10x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 21.5 W/kg</p> <p>2600/Dipole 2600MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 102.2 V/m; Power Drift = 0.19 dB Peak SAR (extrapolated) = 29.5 W/kg SAR(1 g) = 14.02 W/kg; SAR(10 g) = 6.53 W/kg Maximum value of SAR (measured) = 23.2 W/kg</p> 	

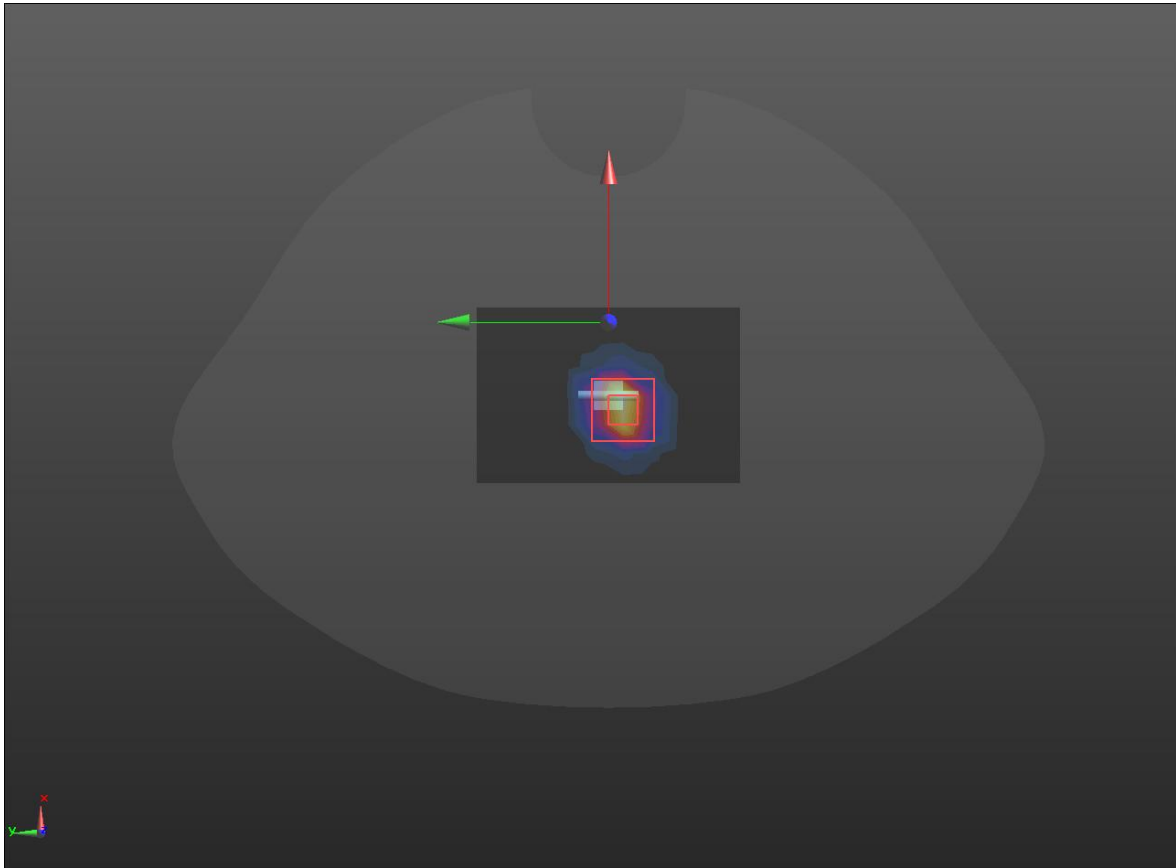
SRTC performed system check by using 250mw at antenna port

System check	3500MHz(2023/8/22)
<p>Communication System: UID 0, CW (0); Frequency: 3500 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 3500 \text{ MHz}$; $\sigma = 3.04 \text{ S/m}$; $\epsilon_r = 39.05$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> • Probe: EX3DV4 - SN3708; ConvF(6.8, 6.8, 6.8); Calibrated: 2022/10/28; • Sensor-Surface: 1.4mm (Mechanical Surface Detection) • Electronics: DAE4 Sn546; Calibrated: 2022/9/15 • Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 • Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>3500/Dipole 3500MHz/Area Scan (5x10x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 26.7 W/kg</p> <p>3500/Dipole 3500MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 90.28 V/m; Power Drift = 0.03 dB Peak SAR (extrapolated) = 37.9 W/kg SAR(1 g) = 16.425 W/kg; SAR(10 g) = 6.1 W/kg Maximum value of SAR (measured) = 28.5 W/kg</p> 	

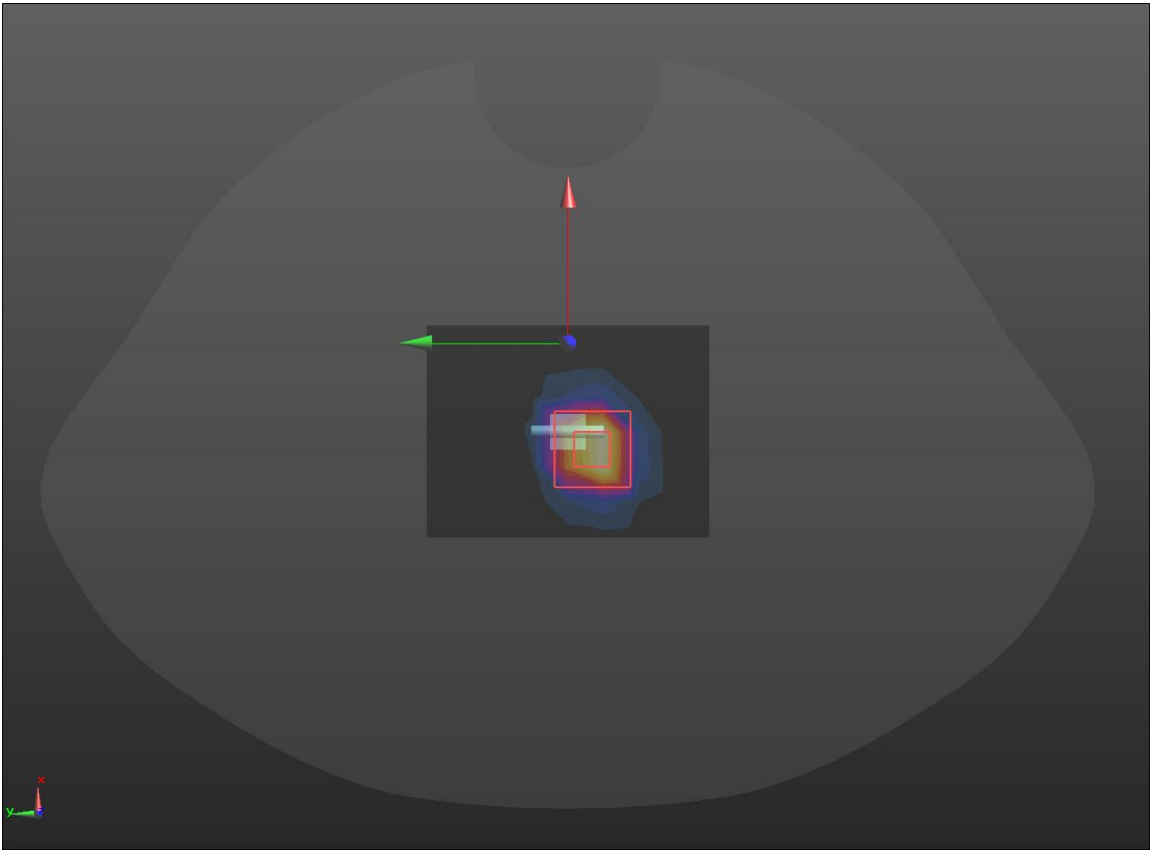
SRTC performed system check by using 250mw at antenna port

System check	3700MHz(2023/8/23)
<p>Communication System: UID 0, CW (0); Frequency: 3700 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 3700$ MHz; $\sigma = 3.1$ S/m; $\epsilon_r = 37.26$; $\rho = 1000$ kg/m³ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> • Probe: EX3DV4 - SN3708; ConvF(6.55, 6.55, 6.55); Calibrated: 2022/10/28; • Sensor-Surface: 1.4mm (Mechanical Surface Detection) • Electronics: DAE4 Sn546; Calibrated: 2022/9/15 • Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 • Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>3700/Dipole 3700MHz/Area Scan (5x10x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 34.6 W/kg</p> <p>3700/Dipole 3700MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 107.0 V/m; Power Drift = 0.04 dB Peak SAR (extrapolated) = 47.2 W/kg SAR(1 g) = 17.9 W/kg; SAR(10 g) = 6.72 W/kg Maximum value of SAR (measured) = 34.9 W/kg</p> 	

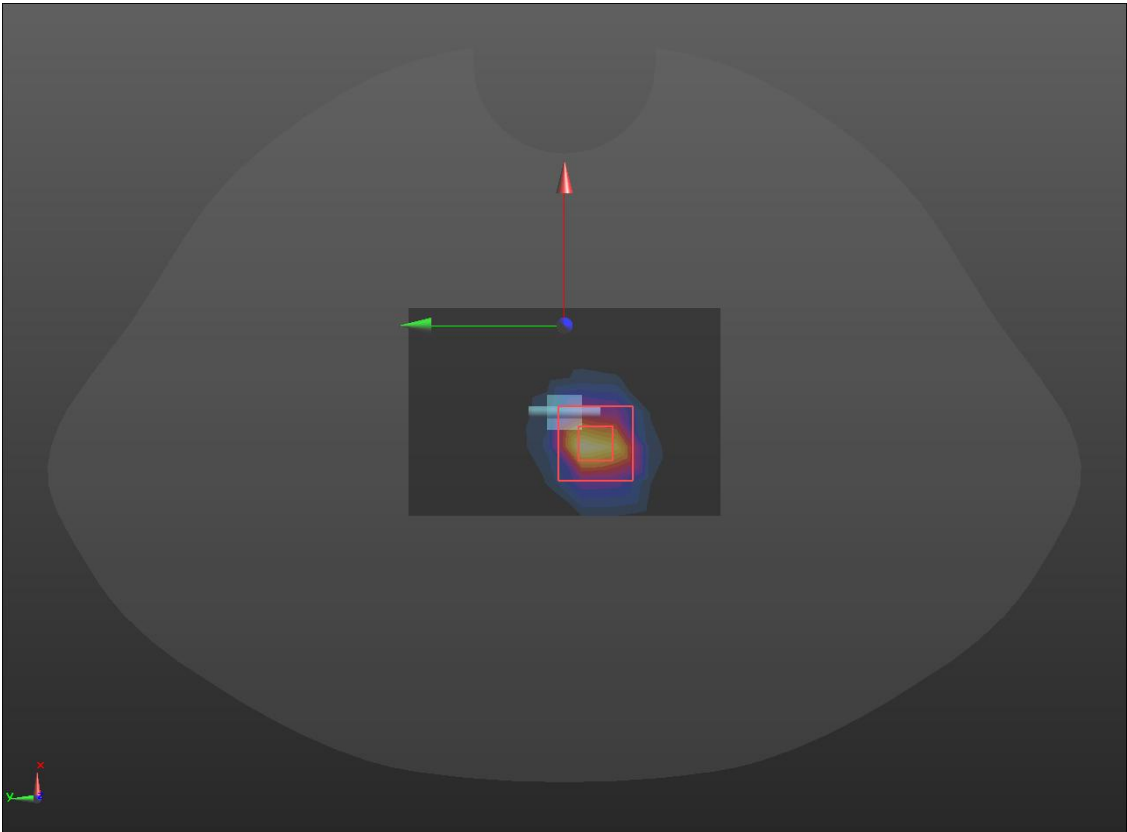
SRTC performed system check by using 250mw at antenna port

System check	5200MHz(2023/8/10)
<p>Communication System: UID 0, CW (0); Frequency: 5200 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 5200$ MHz; $\sigma = 4.67$ S/m; $\epsilon_r = 36.68$; $\rho = 1000$ kg/m³ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> Probe: EX3DV4 - SN3708; ConvF(5.6, 5.6, 5.6); Calibrated: 2022/10/28; Sensor-Surface: 1.4mm (Mechanical Surface Detection) Electronics: DAE4 Sn546; Calibrated: 2022/9/15 Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>D5G/D5200 SYSTEM CHECK1/Area Scan (7x10x1): Measurement grid: dx=10mm, dy=10mm Maximum value of SAR (measured) = 13.9 W/kg</p> <p>D5G/D5200 SYSTEM CHECK1/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 53.80 V/m; Power Drift = 0.14 dB Peak SAR (extrapolated) = 29.4 W/kg SAR(1 g) = 7.34 W/kg; SAR(10 g) = 2.15 W/kg Maximum value of SAR (measured) = 18.2 W/kg</p> 	

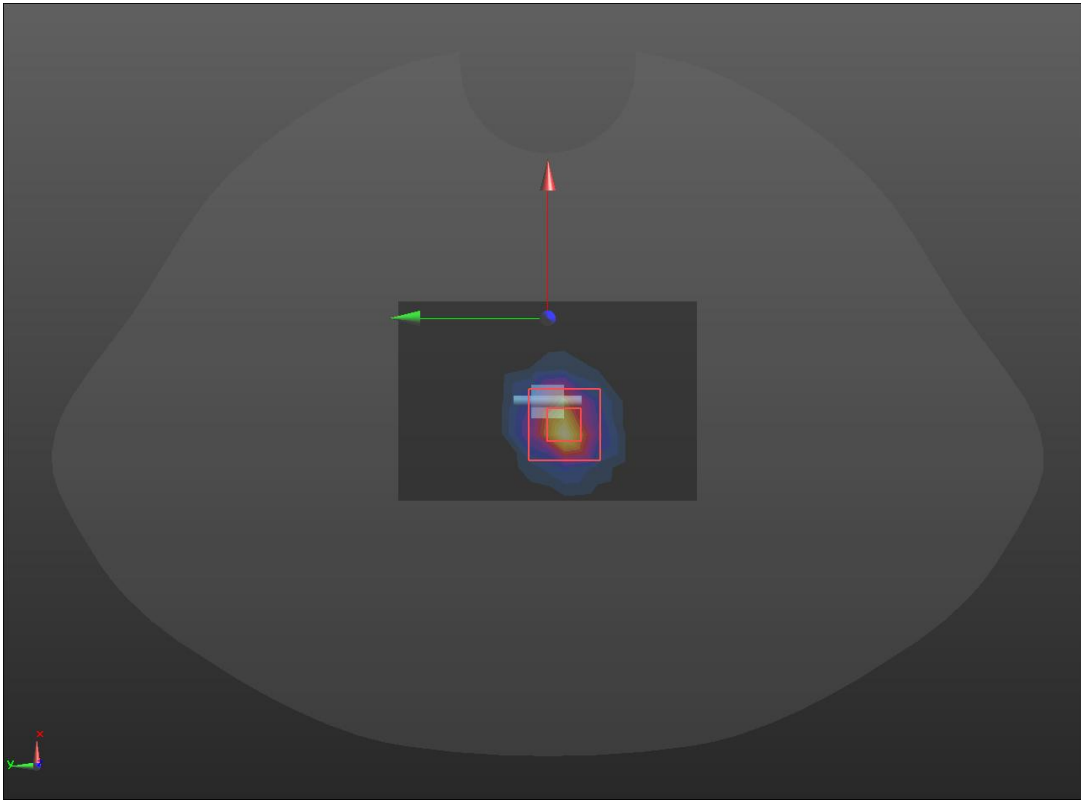
SRTC performed system check by using 100mw at antenna port

System check	5300MHz(2023/8/10)
<p>Communication System: UID 0, CW (0); Frequency: 5300 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 5300 \text{ MHz}$; $\sigma = 4.77 \text{ S/m}$; $\epsilon_r = 37.64$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> Probe: EX3DV4 - SN3708; ConvF(5.6, 5.6, 5.6); Calibrated: 2022/10/28; Sensor-Surface: 1.4mm (Mechanical Surface Detection) Electronics: DAE4 Sn546; Calibrated: 2022/9/15 Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>D5G/D5300 SYSTEM CHECK/Area Scan (7x9x1): Measurement grid: dx=10mm, dy=10mm Maximum value of SAR (measured) = 12.6 W/kg</p> <p>D5G/D5300 SYSTEM CHECK/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 47.01 V/m; Power Drift = 0.13 dB Peak SAR (extrapolated) = 31.0 W/kg SAR(1 g) = 7.71 W/kg; SAR(10 g) = 2.24 W/kg Maximum value of SAR (measured) = 19.0 W/kg</p> 	

SRTC performed system check by using 100mw at antenna port

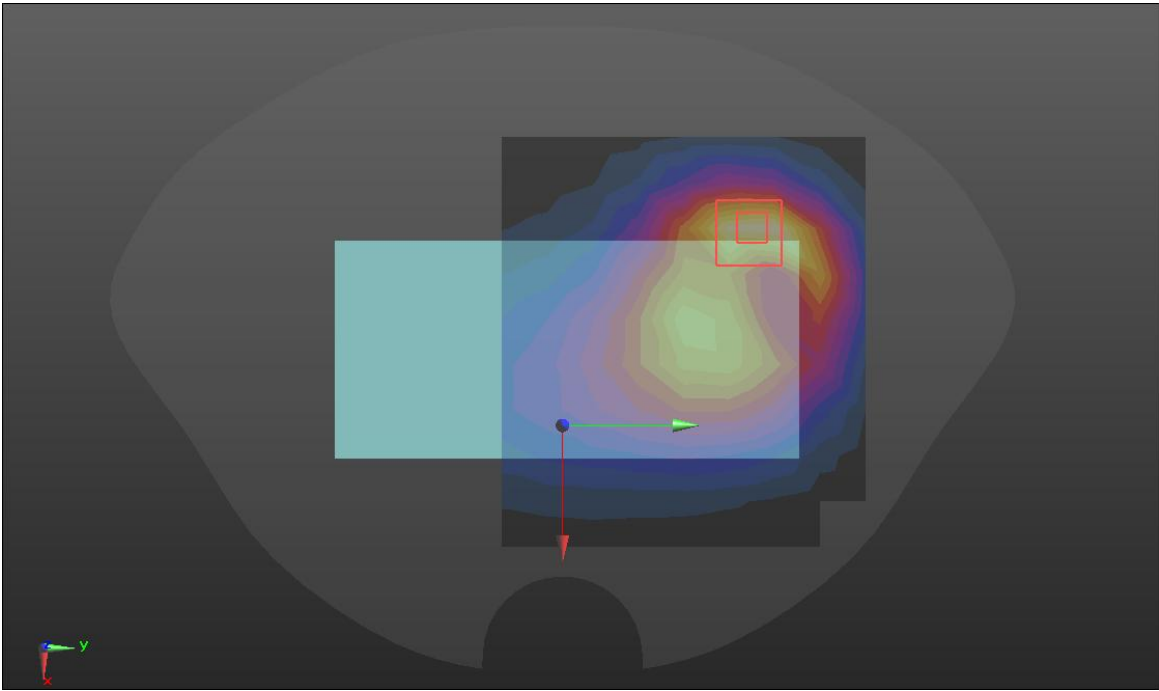
System check	5600MHz(2023/8/9)
<p>Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 5600$ MHz; $\sigma = 5.3$ S/m; $\epsilon_r = 33.92$; $\rho = 1000$ kg/m³ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> Probe: EX3DV4 - SN3708; ConvF(4.98, 4.98, 4.98); Calibrated: 2022/10/28; Sensor-Surface: 1.4mm (Mechanical Surface Detection) Electronics: DAE4 Sn546; Calibrated: 2022/9/15 Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>D5G/D5600 SYSTEM CHECK/Area Scan (7x10x1): Measurement grid: dx=10mm, dy=10mm Maximum value of SAR (measured) = 15.3 W/kg</p> <p>D5G/D5600 SYSTEM CHECK/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 36.06 V/m; Power Drift = -0.17 dB Peak SAR (extrapolated) = 31.9 W/kg SAR(1 g) = 7.37 W/kg; SAR(10 g) = 2.19 W/kg Maximum value of SAR (measured) = 18.5 W/kg</p> 	

SRTC performed system check by using 100mw at antenna port

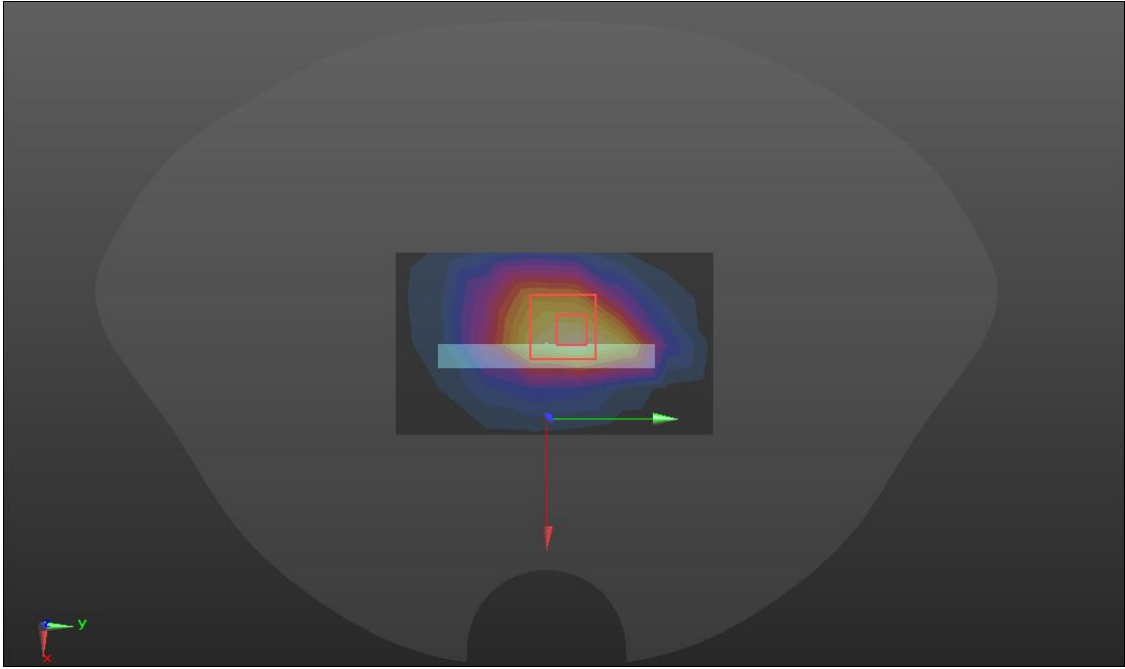
System check	5800MHz(2023/8/9)
<p>Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 5800$ MHz; $\sigma = 5.40$ S/m; $\epsilon_r = 36.37$; $\rho = 1000$ kg/m³ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> Probe: EX3DV4 - SN3708; ConvF(5.15, 5.15, 5.15); Calibrated: 2022/10/28; Sensor-Surface: 1.4mm (Mechanical Surface Detection) Electronics: DAE4 Sn546; Calibrated: 2022/9/15 Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>D5G/D5800 SYSTEM CHECK/Area Scan 2 (7x10x1): Measurement grid: dx=10mm, dy=10mm Maximum value of SAR (measured) = 18.3 W/kg</p> <p>D5G/D5800 SYSTEM CHECK/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 47.41 V/m; Power Drift = 0.17 dB Peak SAR (extrapolated) = 36.5 W/kg SAR(1 g) = 7.96 W/kg; SAR(10 g) = 2.14 W/kg Maximum value of SAR (measured) = 20.6 W/kg</p> 	

SRTC performed system check by using 100mw at antenna port

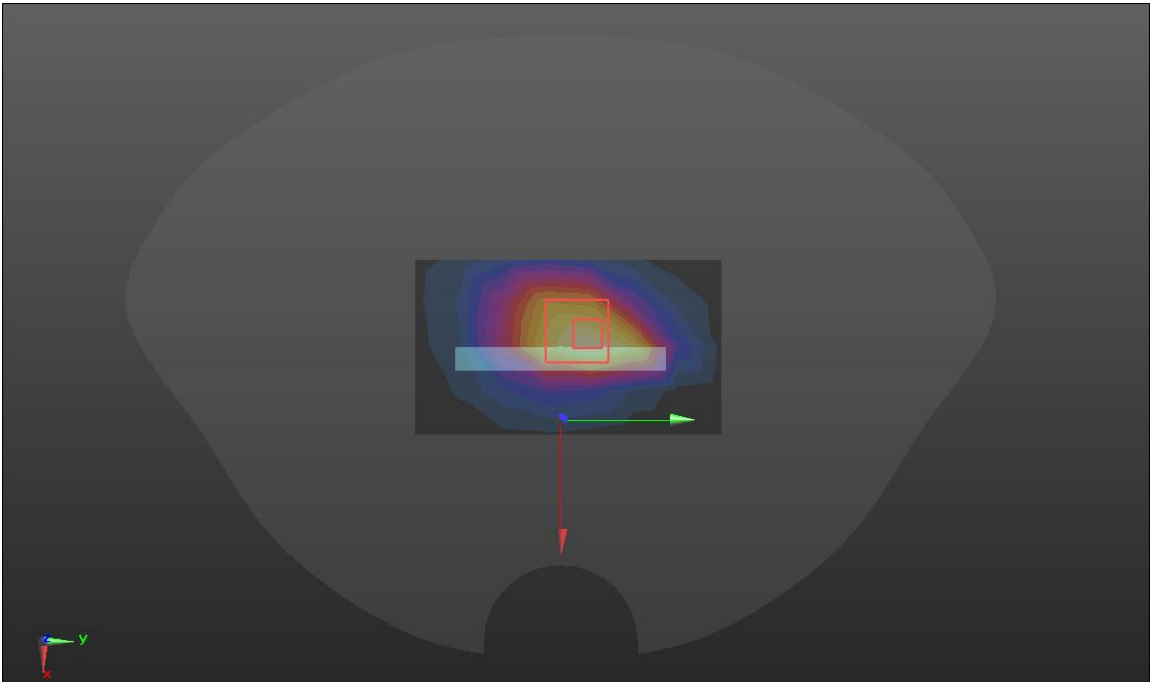
GSM 850

Body	Front(2023/8/15)
<p>Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 836.6 MHz; Duty Cycle: 1:3 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 41.528$; $\rho = 1000$ kg/m³ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> • Probe: EX3DV4 - SN3708; ConvF(9.22, 9.22, 9.22); Calibrated: 2022/10/28; • Sensor-Surface: 1.4mm (Mechanical Surface Detection) • Electronics: DAE4 Sn546; Calibrated: 2022/9/15 • Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 • Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>Front/GSM 850/Area Scan (10x9x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.534 W/kg</p> <p>Front/GSM 850/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 15.09 V/m; Power Drift = -0.06 dB Peak SAR (extrapolated) = 0.632 W/kg SAR(1 g) = 0.351 W/kg; SAR(10 g) = 0.203 W/kg Maximum value of SAR (measured) = 0.536 W/kg</p> 	

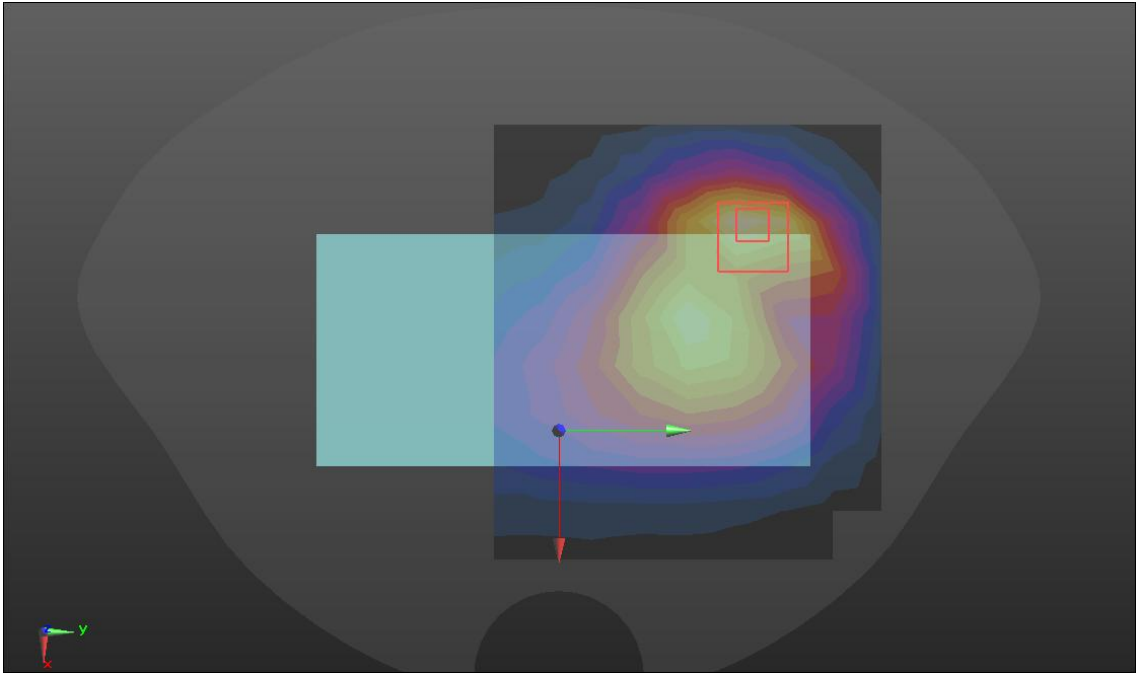
GSM 1900

Body	Bottom(2023/8/19)
<p>Communication System: UID 10021 - DAC, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz; Duty Cycle: 1:2 Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.4$ S/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> Probe: EX3DV4 - SN3708; ConvF(8.13, 8.13, 8.13); Calibrated: 2022/10/28; Sensor-Surface: 1.4mm (Mechanical Surface Detection) Electronics: DAE4 Sn546; Calibrated: 2022/9/15 Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>Bottom/GSM 1900/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.643 W/kg</p> <p>Bottom/GSM 1900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 21.89 V/m; Power Drift = 0.03 dB Peak SAR (extrapolated) = 0.866 W/kg SAR(1 g) = 0.426 W/kg; SAR(10 g) = 0.241 W/kg Maximum value of SAR (measured) = 0.714 W/kg</p> 	

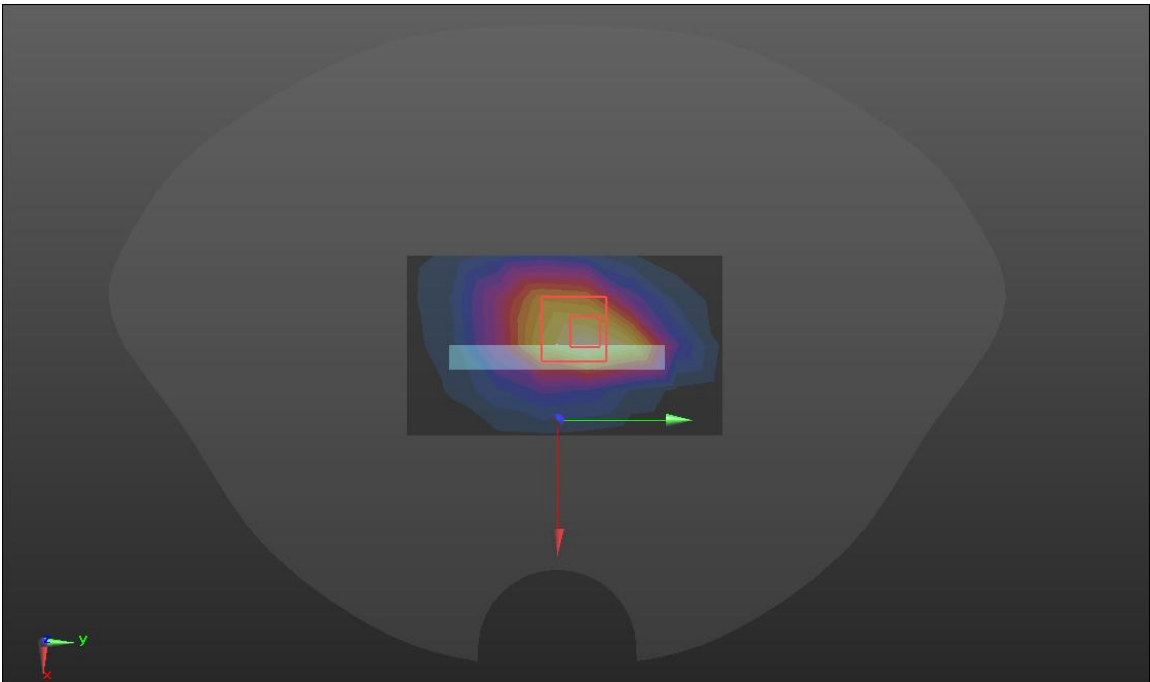
WCDMA II

Body	Bottom(2023/8/19)
<p>Communication System: UID 10011 - CAC, UMTS-FDD (WCDMA); Frequency: 1880 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.4$ S/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> Probe: EX3DV4 - SN3708; ConvF(8.13, 8.13, 8.13); Calibrated: 2022/10/28; Sensor-Surface: 1.4mm (Mechanical Surface Detection) Electronics: DAE4 Sn546; Calibrated: 2022/9/15 Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>Bottom/WCDMA 2/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.998 W/kg</p> <p>Bottom/WCDMA 2/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 26.78 V/m; Power Drift = 0.03 dB Peak SAR (extrapolated) = 1.35 W/kg SAR(1 g) = 0.527 W/kg; SAR(10 g) = 0.302 W/kg Maximum value of SAR (measured) = 1.11 W/kg</p> 	

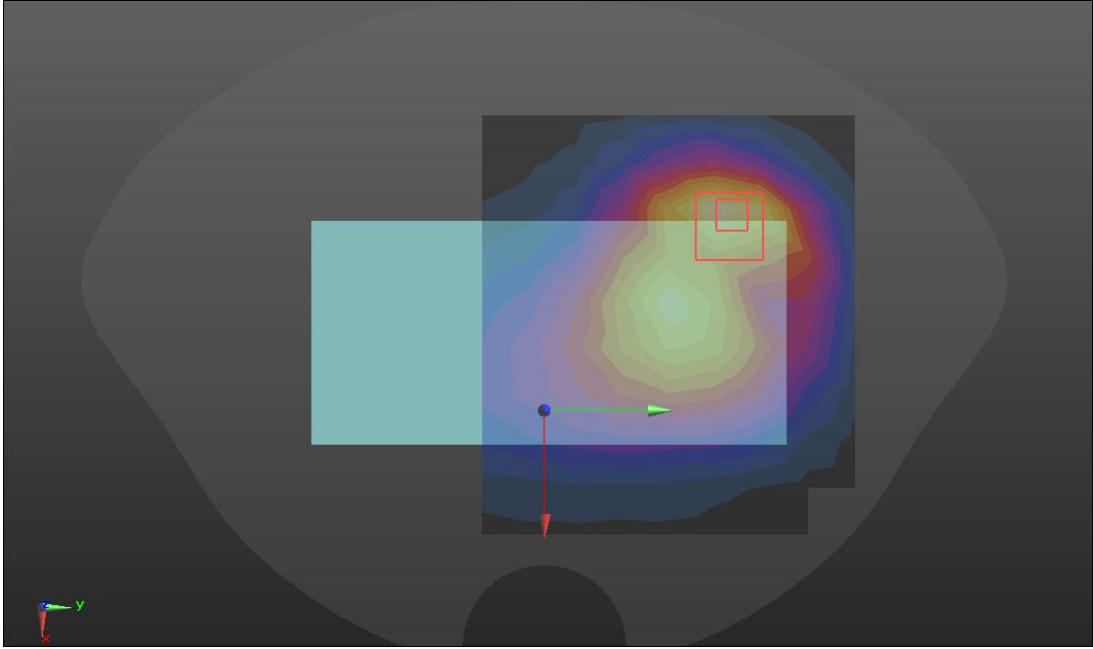
WCDMA V

Body	Front(2023/8/15)
<p>Communication System: UID 10011 - CAC, UMTS-FDD (WCDMA); Frequency: 836.6 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 41.528$; $\rho = 1000$ kg/m³ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> Probe: EX3DV4 - SN3708; ConvF(9.22, 9.22, 9.22); Calibrated: 2022/10/28; Sensor-Surface: 1.4mm (Mechanical Surface Detection) Electronics: DAE4 Sn546; Calibrated: 2022/9/15 Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>Front/WCDMA 5/Area Scan (10x9x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.136 W/kg</p> <p>Front/WCDMA 5/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 8.213 V/m; Power Drift = -0.08 dB Peak SAR (extrapolated) = 0.160 W/kg SAR(1 g) = 0.078 W/kg; SAR(10 g) = 0.049 W/kg Maximum value of SAR (measured) = 0.137 W/kg</p> 	

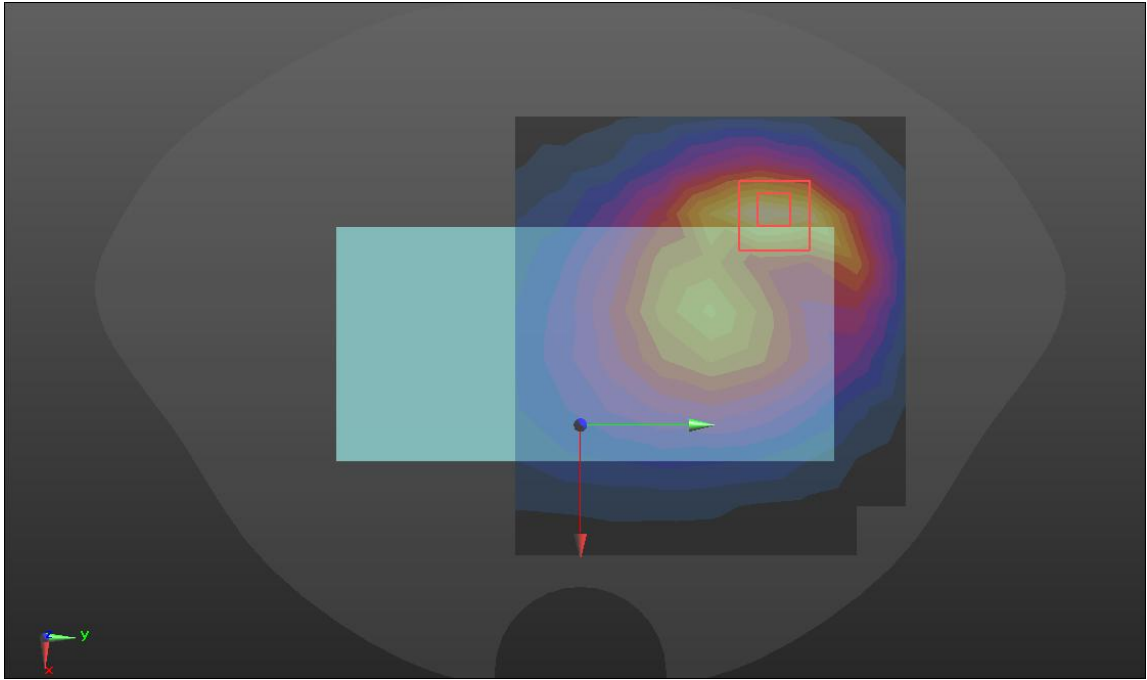
LTE Band 2

Body	Bottom(2023/8/19)
<p>Communication System: UID 10169 - CAF, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 1880 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.4$ S/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> Probe: EX3DV4 - SN3708; ConvF(8.13, 8.13, 8.13); Calibrated: 2022/10/28; Sensor-Surface: 1.4mm (Mechanical Surface Detection) Electronics: DAE4 Sn546; Calibrated: 2022/9/15 Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>Bottom/LTE 2/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.888 W/kg</p> <p>Bottom/LTE 2/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 25.00 V/m; Power Drift = 0.07 dB Peak SAR (extrapolated) = 1.18 W/kg SAR(1 g) = 0.392 W/kg; SAR(10 g) = 0.225 W/kg Maximum value of SAR (measured) = 0.969 W/kg</p> 	

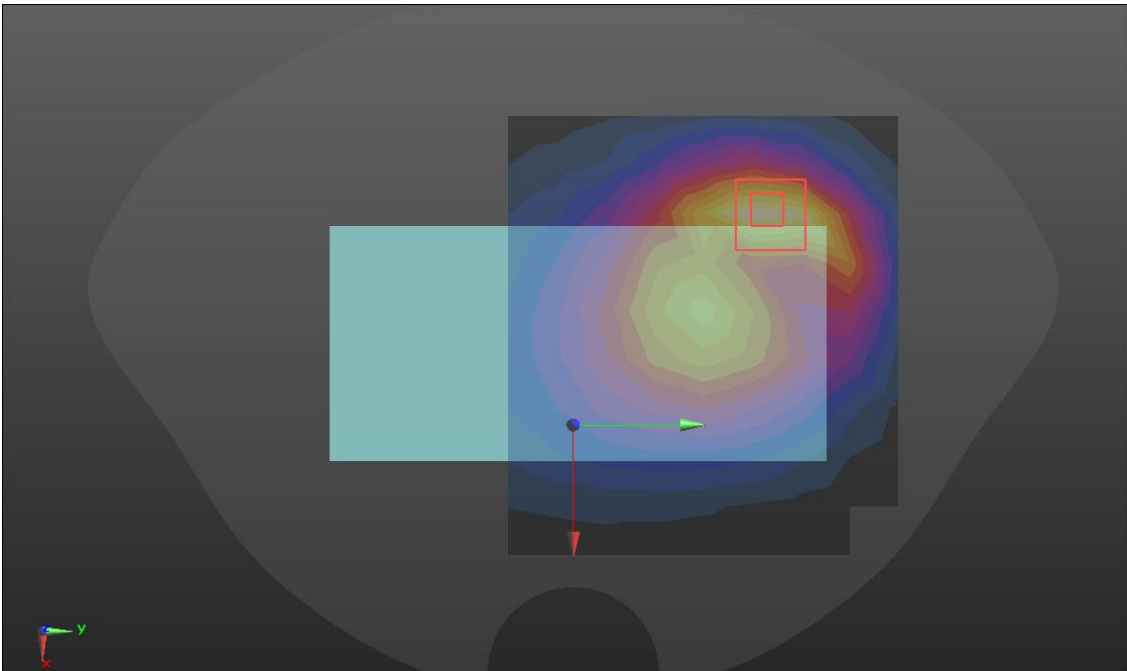
LTE Band 5

Body	Front(2023/8/15)
<p>Communication System: UID 10175 - CAH, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 836.5 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 41.528$; $\rho = 1000$ kg/m³ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> • Probe: EX3DV4 - SN3708; ConvF(9.22, 9.22, 9.22); Calibrated: 2022/10/28; • Sensor-Surface: 1.4mm (Mechanical Surface Detection) • Electronics: DAE4 Sn546; Calibrated: 2022/9/15 • Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 • Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>Front/LTE 5/Area Scan (10x9x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.117 W/kg</p> <p>Front/LTE 5/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 7.690 V/m; Power Drift = -0.14 dB Peak SAR (extrapolated) = 0.139 W/kg SAR(1 g) = 0.066 W/kg; SAR(10 g) = 0.042 W/kg Maximum value of SAR (measured) = 0.120 W/kg</p> 	

LTE Band 12

Body	Front(2023/8/11)
<p>Communication System: UID 10175 - CAH, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 707.5 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.887$ S/m; $\epsilon_r = 42.115$; $\rho = 1000$ kg/m³ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> Probe: EX3DV4 - SN3708; ConvF(9.75, 9.75, 9.75); Calibrated: 2022/10/28; Sensor-Surface: 1.4mm (Mechanical Surface Detection) Electronics: DAE4 Sn546; Calibrated: 2022/9/15 Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>Front/LTE 12/Area Scan (10x9x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.106 W/kg</p> <p>Front/LTE 12/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 6.942 V/m; Power Drift = -0.13 dB Peak SAR (extrapolated) = 0.127 W/kg SAR(1 g) = 0.072 W/kg; SAR(10 g) = 0.043 W/kg Maximum value of SAR (measured) = 0.107 W/kg</p> 	

LTE Band 17

Body	Front(2023/8/11)
<p>Communication System: UID 10175 - CAH, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 710 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 710 \text{ MHz}$; $\sigma = 0.887 \text{ S/m}$; $\epsilon_r = 42.102$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> • Probe: EX3DV4 - SN3708; ConvF(9.75, 9.75, 9.75); Calibrated: 2022/10/28; • Sensor-Surface: 1.4mm (Mechanical Surface Detection) • Electronics: DAE4 Sn546; Calibrated: 2022/9/15 • Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 • Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>Front/LTE 17/Area Scan (10x9x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.110 W/kg</p> <p>Front/LTE 17/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 7.220 V/m; Power Drift = -0.04 dB Peak SAR (extrapolated) = 0.131 W/kg SAR(1 g) = 0.075 W/kg; SAR(10 g) = 0.044 W/kg Maximum value of SAR (measured) = 0.111 W/kg</p> 	

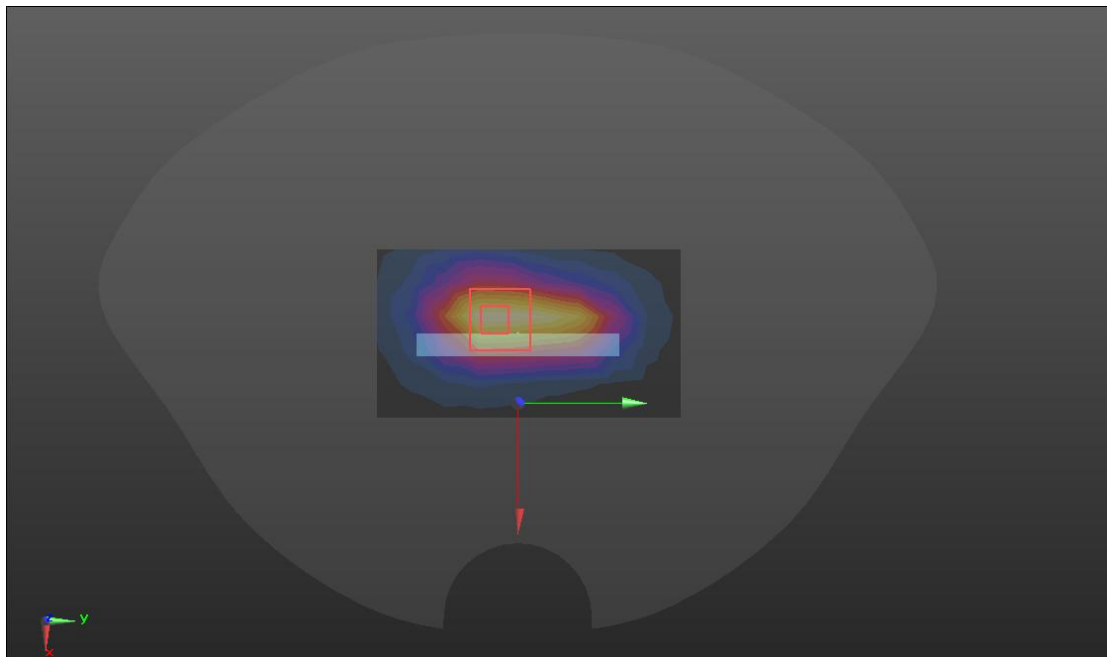
LTE Band 38

Body	Bottom(2023/8/20)
------	-------------------

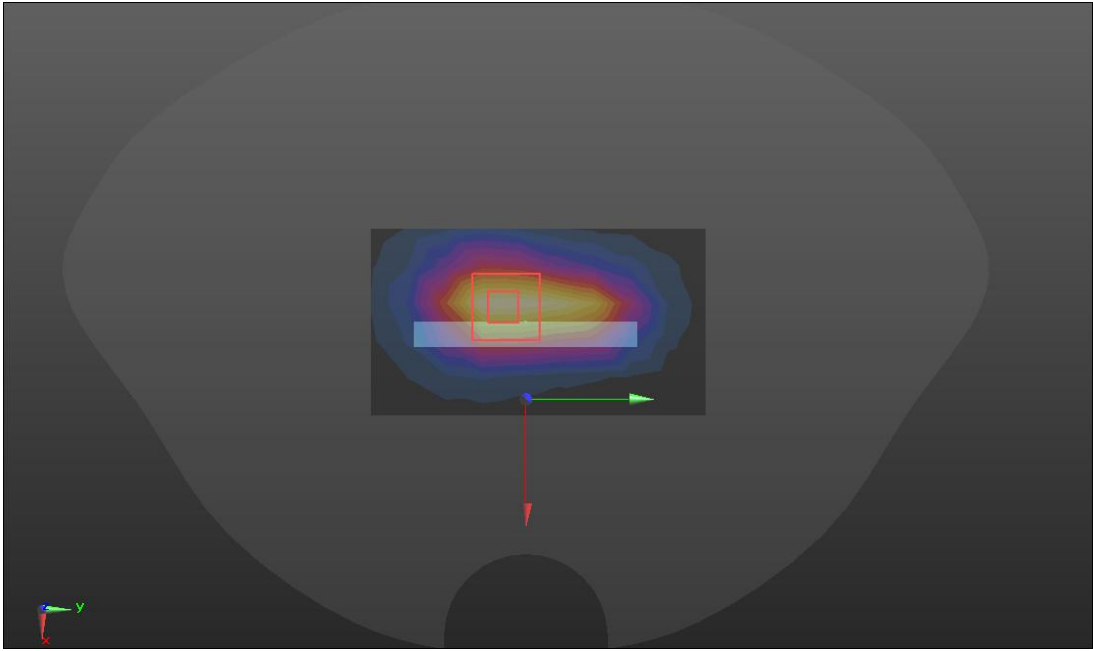
Communication System: UID 10172 - CAH, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK);
 Frequency: 2595 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 2595$ MHz; $\sigma = 1.954$ S/m; $\epsilon_r = 39.006$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

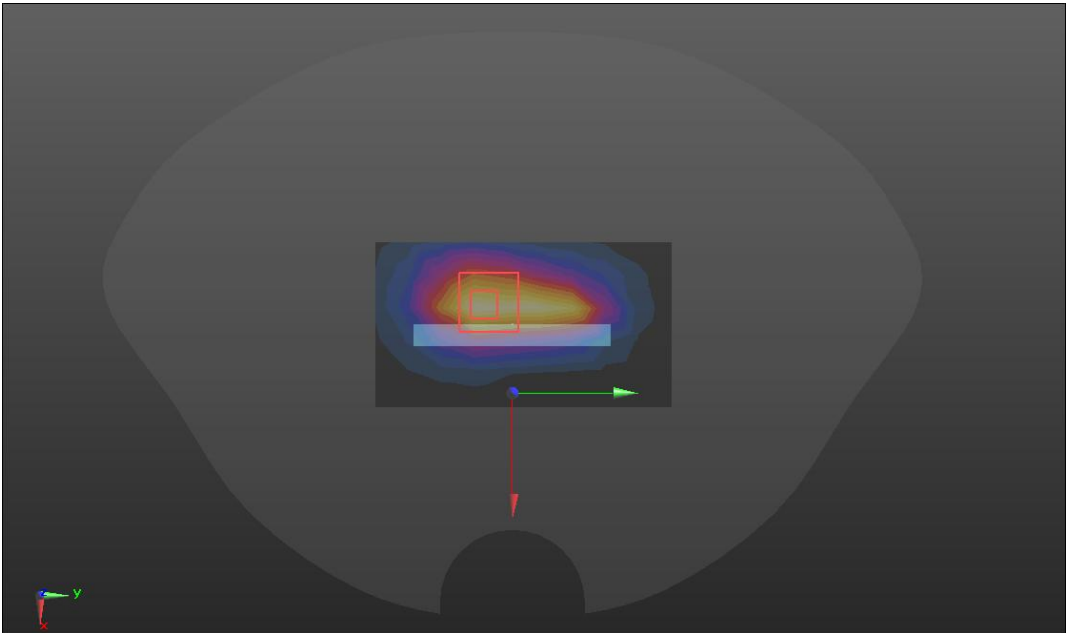
- Probe: EX3DV4 - SN3708; ConvF(7.46, 7.46, 7.46); Calibrated: 2022/10/28;
 - Sensor-Surface: 1.4mm (Mechanical Surface Detection)
 - Electronics: DAE4 Sn546; Calibrated: 2022/9/15
 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660
 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)
- Bottom/LTE 38/Area Scan (6x10x1):** Measurement grid: dx=12mm, dy=12mm
 Maximum value of SAR (measured) = 0.398 W/kg
- Bottom/LTE 38/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 13.89 V/m; Power Drift = 0.03 dB
 Peak SAR (extrapolated) = 0.507 W/kg
SAR(1 g) = 0.204 W/kg; SAR(10 g) = 0.109 W/kg
 Maximum value of SAR (measured) = 0.423 W/kg



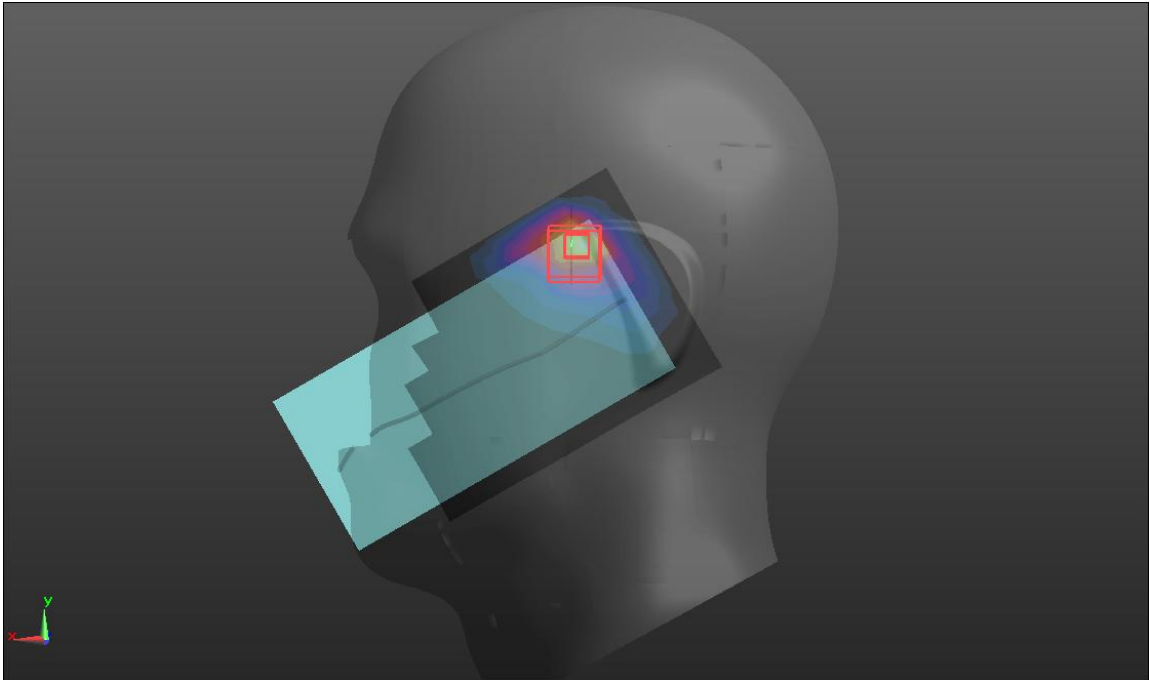
LTE Band 41

Body	Bottom(2023/8/20)
<p>Communication System: UID 10172 - CAH, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2593 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 1.952$ S/m; $\epsilon_r = 39.009$; $\rho = 1000$ kg/m³ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> • Probe: EX3DV4 - SN3708; ConvF(7.46, 7.46, 7.46); Calibrated: 2022/10/28; • Sensor-Surface: 1.4mm (Mechanical Surface Detection) • Electronics: DAE4 Sn546; Calibrated: 2022/9/15 • Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 • Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>Bottom/LTE 41/Area Scan (6x10x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 0.455 W/kg</p> <p>Bottom/LTE 41/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 15.08 V/m; Power Drift = 0.15 dB Peak SAR (extrapolated) = 0.570 W/kg SAR(1 g) = 0.211 W/kg; SAR(10 g) = 0.115 W/kg Maximum value of SAR (measured) = 0.477 W/kg</p> 	

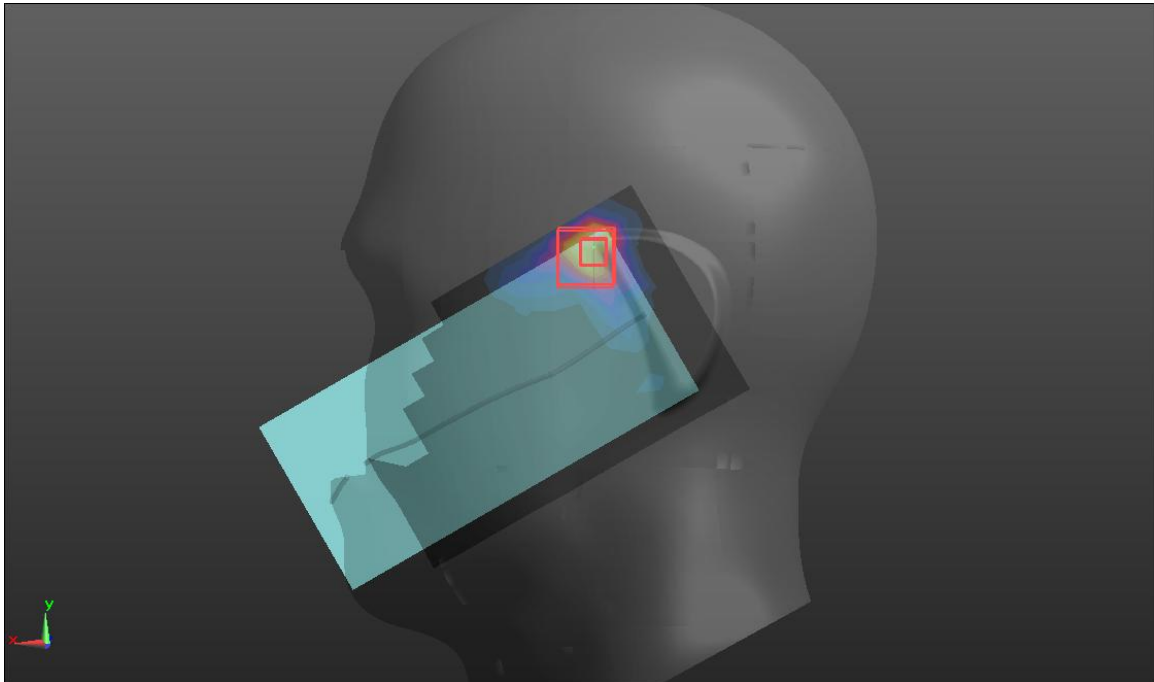
NR n41

Body	Bottom(2023/8/20)
<p>Communication System: UID 10973 - AAB, 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz); Frequency: 2593.01 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 2593.01$ MHz; $\sigma = 1.952$ S/m; $\epsilon_r = 39.009$; $\rho = 1000$ kg/m³ Phantom section: Flat Section</p>	
<p>DASY5 Configuration:</p> <ul style="list-style-type: none"> • Probe: EX3DV4 - SN3708; ConvF(7.46, 7.46, 7.46); Calibrated: 2022/10/28; • Sensor-Surface: 1.4mm (Mechanical Surface Detection) • Electronics: DAE4 Sn546; Calibrated: 2022/9/15 • Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 • Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>Bottom/NR41/Area Scan (6x10x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 0.630 W/kg</p> <p>Bottom/NR41/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 15.69 V/m; Power Drift = 0.12 dB Peak SAR (extrapolated) = 0.729 W/kg SAR(1 g) = 0.290 W/kg; SAR(10 g) = 0.160 W/kg Maximum value of SAR (measured) = 0.621 W/kg</p>	
 <p>The image displays a 3D visualization of SAR (Specific Absorption Rate) measurements. It shows a large, dark, semi-transparent volume representing the phantom. In the center, there is a smaller, more detailed view of the measurement area, which is color-coded from blue (low SAR) to red (high SAR). A red box highlights the specific measurement grid used for the zoomed-in scan. A red arrow points from the zoomed-in view back to the main phantom view. A small 3D coordinate system (x, y, z) is visible in the bottom left corner of the image.</p>	

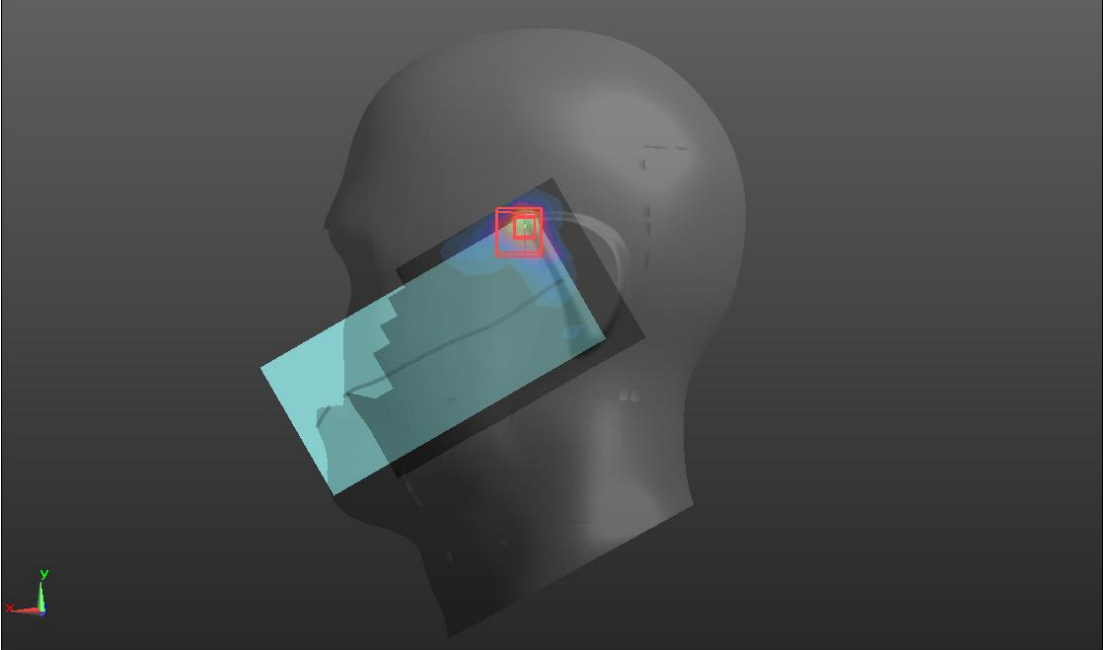
Wi-Fi2.4GHz

Head	Left Cheek(2023/8/11)
<p>Communication System: UID 10415 - AAA, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle); Frequency: 2437 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.788$ S/m; $\epsilon_r = 39.219$; $\rho = 1000$ kg/m³ Phantom section: Left Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> Probe: EX3DV4 - SN3708; ConvF(7.51, 7.51, 7.51); Calibrated: 2022/10/28; Sensor-Surface: 1.4mm (Mechanical Surface Detection) Electronics: DAE4 Sn546; Calibrated: 2022/9/15 Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>Left Cheek / Wi-Fi 2.4G/Area Scan (12x9x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 0.742 W/kg</p> <p>Left Cheek / Wi-Fi 2.4G/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 11.65 V/m; Power Drift = -0.15 dB Peak SAR (extrapolated) = 1.10 W/kg SAR(1 g) = 0.498 W/kg; SAR(10 g) = 0.233 W/kg Maximum value of SAR (measured) = 0.804 W/kg</p> 	

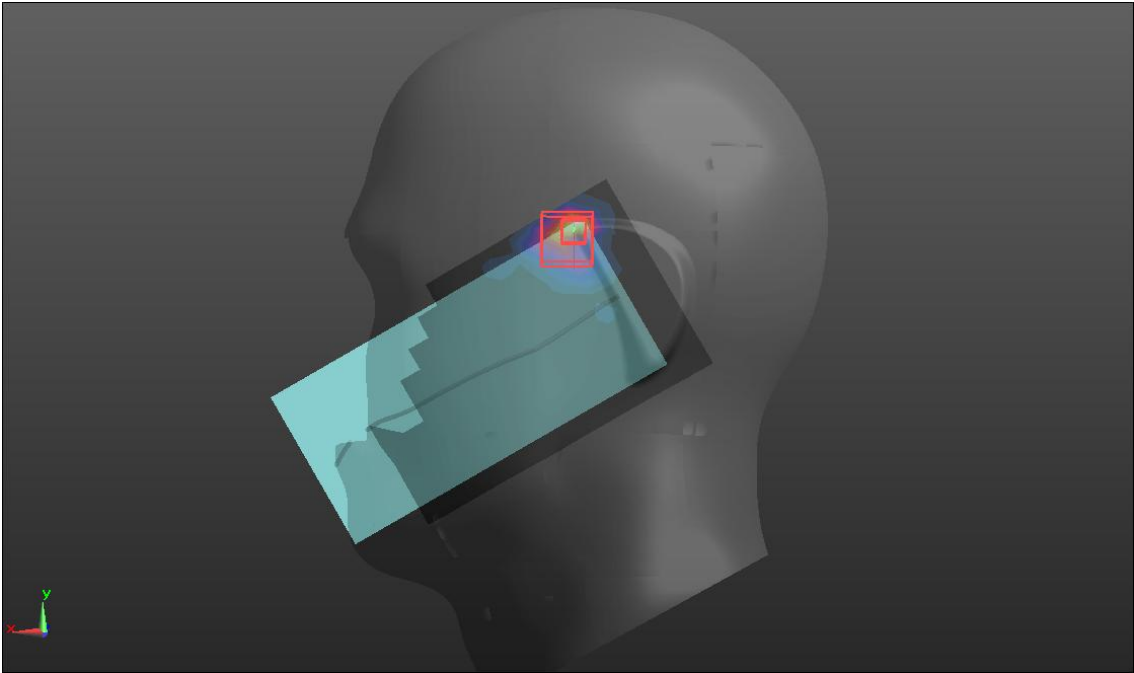
Wi-Fi5.2GHz

Head	Left Cheek(2023/8/10)
<p>Communication System: UID 10317 - AAD, IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle); Frequency: 5220 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 5220$ MHz; $\sigma = 4.68$ S/m; $\epsilon_r = 35.98$; $\rho = 1000$ kg/m³ Phantom section: Left Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> Probe: EX3DV4 - SN3708; ConvF(5.6, 5.6, 5.6); Calibrated: 2022/10/28; Sensor-Surface: 1.4mm (Mechanical Surface Detection) Electronics: DAE4 Sn546; Calibrated: 2022/9/15 Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>Left Cheek /Wi-Fi 5.2G/Area Scan (15x10x1): Measurement grid: dx=10mm, dy=10mm Maximum value of SAR (measured) = 1.22 W/kg</p> <p>Left Cheek /Wi-Fi 5.2G/Zoom Scan (7x7x11)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 4.273 V/m; Power Drift = -0.08 dB Peak SAR (extrapolated) = 2.28 W/kg SAR(1 g) = 0.431 W/kg; SAR(10 g) = 0.136 W/kg Maximum value of SAR (measured) = 1.60 W/kg</p> 	

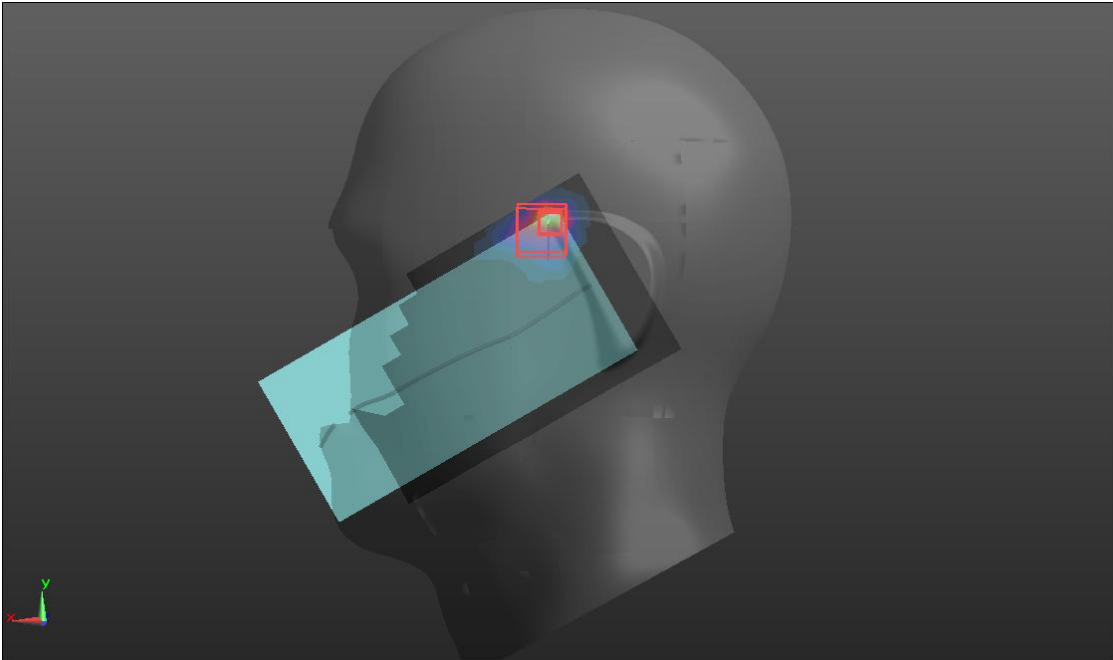
Wi-Fi5.3GHz

Head	Left Cheek(2023/8/10)
<p>Communication System: UID 10317 - AAD, IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle); Frequency: 5280 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 5280$ MHz; $\sigma = 4.74$ S/m; $\epsilon_r = 35.92$; $\rho = 1000$ kg/m³ Phantom section: Left Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> • Probe: EX3DV4 - SN3708; ConvF(5.6, 5.6, 5.6); Calibrated: 2022/10/28; • Sensor-Surface: 1.4mm (Mechanical Surface Detection) • Electronics: DAE4 Sn546; Calibrated: 2022/9/15 • Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 • Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>Left Cheek /Wi-Fi 5.3G/Area Scan (15x10x1): Measurement grid: dx=10mm, dy=10mm Maximum value of SAR (measured) = 1.57 W/kg</p> <p>Left Cheek /Wi-Fi 5.3G/Zoom Scan (7x7x11)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 5.799 V/m; Power Drift = -0.03 dB Peak SAR (extrapolated) = 2.67 W/kg SAR(1 g) = 0.533 W/kg; SAR(10 g) = 0.165 W/kg Maximum value of SAR (measured) = 1.89 W/kg</p> 	

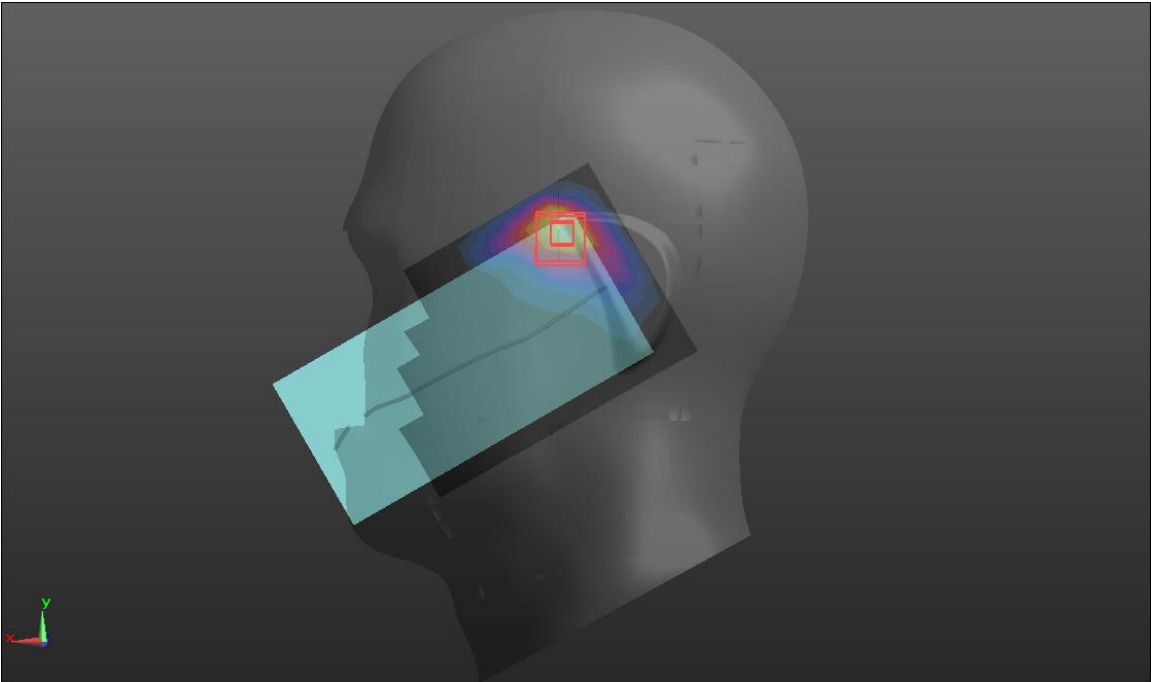
Wi-Fi5.6Hz

Head	Left Cheek(2023/8/9)
<p>Communication System: UID 10317 - AAD, IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle); Frequency: 5580 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 5580$ MHz; $\sigma = 5.049$ S/m; $\epsilon_r = 35.526$; $\rho = 1000$ kg/m³ Phantom section: Left Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> • Probe: EX3DV4 - SN3708; ConvF(4.98, 4.98, 4.98); Calibrated: 2022/10/28; • Sensor-Surface: 1.4mm (Mechanical Surface Detection) • Electronics: DAE4 Sn546; Calibrated: 2022/9/15 • Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 • Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>Left Cheek /Wi-Fi 5.6G/Area Scan (15x10x1): Measurement grid: dx=10mm, dy=10mm Maximum value of SAR (measured) = 1.35 W/kg</p> <p>Left Cheek /Wi-Fi 5.6G/Zoom Scan (7x7x11)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 3.583 V/m; Power Drift = -0.12 dB Peak SAR (extrapolated) = 2.25 W/kg SAR(1 g) = 0.394 W/kg; SAR(10 g) = 0.118 W/kg Maximum value of SAR (measured) = 1.48 W/kg</p> 	

Wi-Fi5.8Hz

Head	Left Cheek(2023/8/9)
<p>Communication System: UID 10317 - AAD, IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle); Frequency: 5785 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 5.255$ S/m; $\epsilon_r = 35.315$; $\rho = 1000$ kg/m³ Phantom section: Left Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> • Probe: EX3DV4 - SN3708; ConvF(5.15, 5.15, 5.15); Calibrated: 2022/10/28; • Sensor-Surface: 1.4mm (Mechanical Surface Detection) • Electronics: DAE4 Sn546; Calibrated: 2022/9/15 • Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 • Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>Left Cheek /Wi-Fi 5.8G/Area Scan (15x10x1): Measurement grid: dx=10mm, dy=10mm Maximum value of SAR (measured) = 1.73 W/kg</p> <p>Left Cheek /Wi-Fi 5.8G/Zoom Scan (7x7x11)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 0 V/m; Power Drift = 0.00 dB Peak SAR (extrapolated) = 2.99 W/kg SAR(1 g) = 0.505 W/kg; SAR(10 g) = 0.134 W/kg Maximum value of SAR (measured) = 1.93 W/kg</p> 	

BT

Head	Left Cheek(2023/8/11)
<p>Communication System: UID 10670 - AAA, Bluetooth Low Energy; Frequency: 2441 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.792$ S/m; $\epsilon_r = 39.213$; $\rho = 1000$ kg/m³ Phantom section: Left Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> • Probe: EX3DV4 - SN3708; ConvF(7.51, 7.51, 7.51); Calibrated: 2022/10/28; • Sensor-Surface: 1.4mm (Mechanical Surface Detection) • Electronics: DAE4 Sn546; Calibrated: 2022/9/15 • Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 • Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) <p>Left Cheek /BT/Area Scan (12x9x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 0.232 W/kg</p> <p>Left Cheek /BT/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 6.482 V/m; Power Drift = -0.15 dB Peak SAR (extrapolated) = 0.387 W/kg SAR(1 g) = 0.170 W/kg; SAR(10 g) = 0.080 W/kg Maximum value of SAR (measured) = 0.271 W/kg</p> 	

Note: All the modulated signal with different PAR (refers to RF WWAN report) already take into account, but not mentioned in this inherent log file template.