

FCC ID PER PART 15.227
EMI MEASUREMENT AND TEST REPORT



For

NMB TECHNOLOGIES INC.

9730 Independence Ave.,
Chatsworth, CA 91311

FCC ID: AQ6-PCVA-KB6

2003-08-11

This Report Concerns: <input checked="" type="checkbox"/> Original Report	Equipment Type: Wireless Keyboard, ITE
Test Engineer: Jerry Wang 	
Report No.: R0307285	
Test Date: 2003-08-05	
Reviewed By: Hans Mellberg 	
Prepared By: Bay Area Compliance Laboratory Corporation (BACL) 230 Commercial Street Sunnyvale, CA 94085 Tel: (408) 732-9162 Fax: (408) 732-9164	

Note: This test report is specially limited to the above client company and the product model only. It may not be duplicated without prior written consent of Bay Area Compliance Laboratory Corporation. This report **must not** be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

TABLE OF CONTENTS

1 - GENERAL INFORMATION.....	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 OBJECTIVE	3
1.3 RELATED SUBMITTAL(S)/GRANT(S).....	3
1.4 TEST METHODOLOGY	3
1.5 TEST FACILITY	3
1.6 TEST EQUIPMENT LIST	4
1.7 LOCAL SUPPORT EQUIPMENT LIST AND DETAILS.....	4
1.8 EXTERNAL I/O CABLES LIST AND DETAILS.....	4
2 - SYSTEM TEST CONFIGURATION.....	5
2.1 JUSTIFICATION	5
2.2 SPECIAL ACCESSORIES.....	5
2.3 SCHEMATICS AND BLOCK DIAGRAM.....	5
2.4 EQUIPMENT MODIFICATIONS.....	5
2.5 TEST SETUP CONFIGURATION.....	5
2.6 TEST SETUP BLOCK DIAGRAM	6
3 - SUMMARY OF TEST RESULTS	7
4 - RADIATED EMISSION TEST.....	8
4.1 MEASUREMENT UNCERTAINTY	8
4.2 EUT SETUP	8
4.3 SPECTRUM ANALYZER SETUP	8
4.4 TEST PROCEDURE	9
4.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	9
4.6 SUMMARY OF TEST RESULTS.....	10
4.7 RADIATED EMISSIONS TEST RESULT DATA	10

1 - GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

The *NMB TECHNOLOGIES INC.* 's product, model *PCVA-KB6/UB*, *PCVA-KB6/UW*, *PCVA-KB6/EB*, *PCVA-KB6/EW* or the "EUT" as referred to in this report is a wireless keyboard, which measures approximately 15.00" L x 5.75" W x 1.15" H.

The EUT operates at the frequency of 27.095MHz and 27.145MHz (2 channels) with the maximum output power of 35mW.

** The test data gathered are from typical production samples provided by the manufacturer.*

1.2 Objective

This Type approval report is prepared on behalf of *NMB TECHNOLOGIES INC.* in accordance with Part 2, Subpart J, and Part 15, Subparts A and C of the Federal Communication Commissions rules.

The objective of the manufacturer is to demonstrate compliance with FCC rules, Part 15, sec 15.209 and sec 15.227.

1.3 Related Submittal(s)/Grant(s)

No Related Submittals.

1.4 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-1992, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. All radiated and conducted emissions measurement was performed at BACL. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

1.5 Test Facility

The Open Area Test site used by BACL to collect radiated and conducted emission measurement data is located in the back parking lot of the building at 230 Commercial Street, Sunnyvale, California, USA.

Test site at BACL has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports has been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997 and Article 8 of the VCCI regulations on December 25, 1997. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-1992.

The Federal Communications Commission and Voluntary Control Council for Interference has the reports on file and is listed under FCC file 31040/SIT 1300F2 and VCCI Registration No.: C-1298 and R-1234. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, BACL is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200167-0). The scope of the accreditation covers the FCC Method - 47 CFR Part 15 - Digital Devices, CISPR 22: 1997: Electromagnetic Interference - Limits and Methods of Measurement of Information Technology Equipment test methods.

1.6 Test Equipment List

Manufacturer	Description	Model	Serial Number	Cal. Due Date
HP	Spectrum Analyzer	8568B	Panel 2408A00105 Display 2403A06544	2004-05-01
HP	Spectrum Analyzer	8593A	29190A00242	2004-05-01
HP	Amplifier	8447E	1937A01054	2004-05-01
HP	Quasi-Peak Adapter	85650A	2521A00718	2004-05-01
Com-Power	Biconical Antenna	AB-100	14012	2004-05-01
Com-Power	LISN	LI-200	12005	2004-03-28
Com-Power	LISN	LI-200	12008	2004-03-28
Com-Power	Log Periodic Antenna	AL-100	16091	2004-05-01
Com-Power	Log Periodic Antenna	AB-900	15049	2004-05-01
HP	Voltmeter	6236B	2003A05705	Not Required

* **Statement of Traceability:** BACL Corp. certifies that all calibration has been performed using suitable standards traceable to the NIST.

1.7 Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number	FCC ID
Logitech	Mouse	M-RP67	LZC24007881	JNZ211476
Logitech	Receiver	C-BG17-DUAL	LZB24158307	DOC
KDS	Monitor	KD-1731	0791212524	EVOKD-1731
HP	Printer	2225C	2821S14783	DS16XU2225
Everex	Modem	EV-945	None	E3E5UVEV-945

1.8 External I/O Cables List and Details

Description	Length (M)	From	To
Shielded Cable	1.6	Modem Port/Host	Modem
Shielded Cable	1.5	Mouse Port/Host	Receiver
Shielded Cable	1.5	KB Port/Host	Receiver
Shielded Video Cable	1.5	VGA Port/Host	Monitor
Shielded Cable	1.5	Printer Port/Host	Printer

2 - SYSTEM TEST CONFIGURATION

2.1 Justification

The EUT was configured for testing in a typical fashion (as normally used by a typical user).

2.2 Special Accessories

As shown in section 2.6, all interface cables used for compliance testing are shielded as normally supplied by INMAC, Monster Cable, Y.C. Cables and Qubbain Data Max. The peripherals featured shielded metal connectors.


2.3 Schematics and Block Diagram

Please refer to Appendix D.


2.4 Equipment Modifications

No modifications were necessary for the EUT to comply.

2.5 Test Setup Configuration

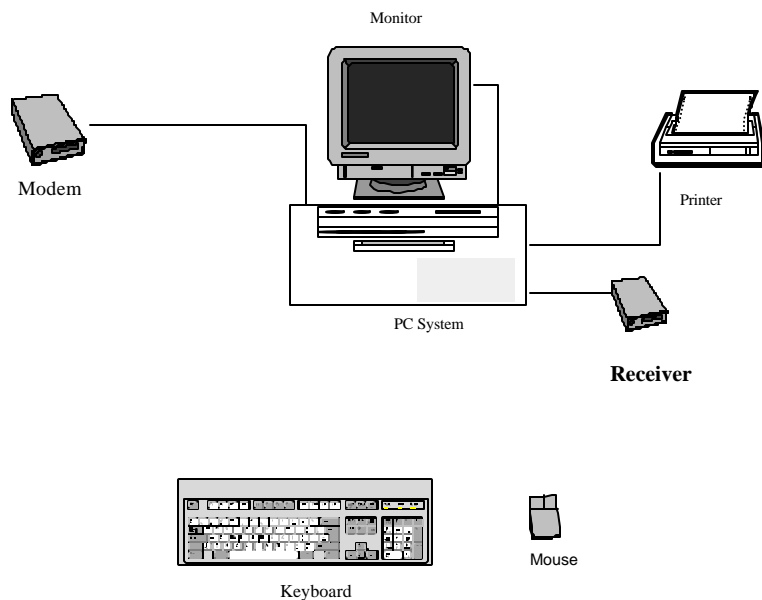

2.6 Test Setup Block Diagram

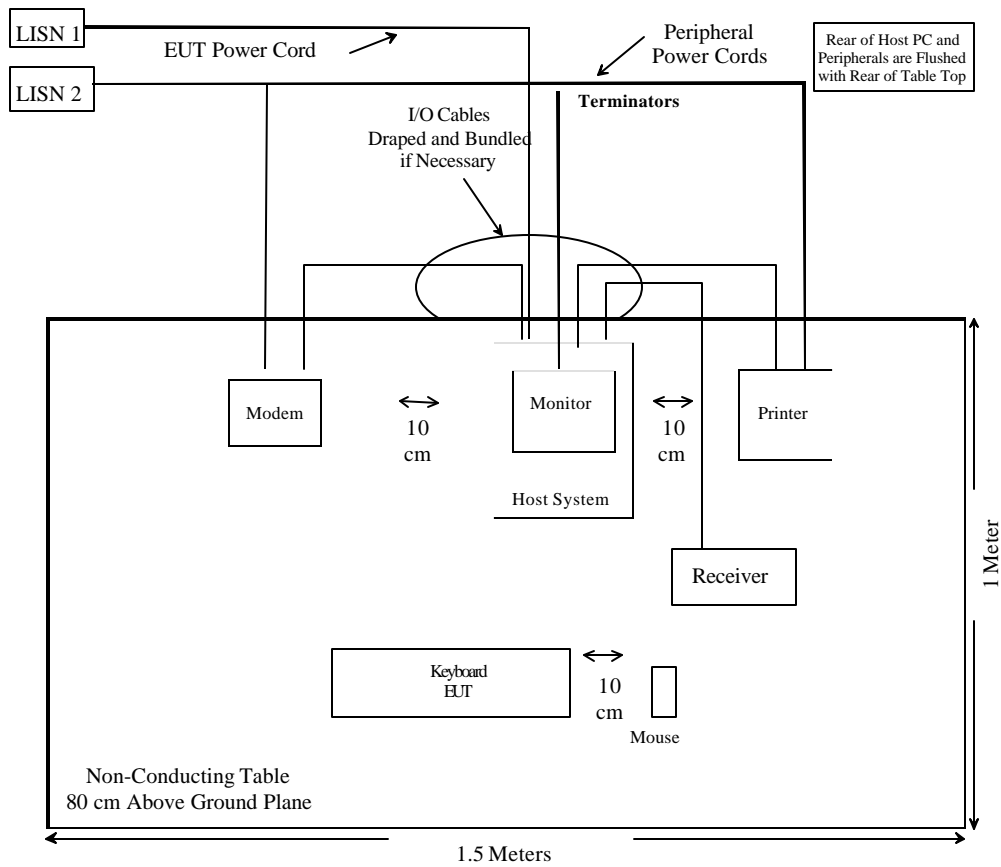

3 - SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§ 15.203	Antenna requirement	Compliant
§ 15.205	Restricted Band	Compliant
§ 15.209 § 15.227	Radiated emission limit	Compliant

4 - RADIATED EMISSION TEST

4.1 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at BACL is ± 4.0 dB.

4.2 EUT Setup

The radiated emission tests were performed in the open area 3-meter test site, using the setup accordance with the ANSI C63.4-1992. The specification used was the FCC Subpart C limits.

4.3 Spectrum Analyzer Setup

According to FCC Rules, §15.33 (a) (1), the system was tested to 1000 MHz.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

<i>Frequency Range</i>	<i>RBW</i>	<i>Video B/W</i>
Below 30MHz	10kHz	10kHz
30 – 1000MHz	100kHz	100kHz
Above 1000MHz	1MHz	1MHz

4.4 Test Procedure

Maximizing procedure was performed on the six (6) highest emissions to ensure EUT is compliant with all installation combination.

All data was recorded in the peak detection mode. Quasi-peak readings performed only when an emission was found to be marginal (within -4 dB μ V of specification limitation), and are distinguished with a "QP" in the data table.

The EUT was operating at normal to represent worst case during final qualification test. Therefore, this configuration was used for final test data recorded in the table(s) listed under section 4.7 of this report.

4.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "**Margin**" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB μ V means the emission is 7dB μ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

4.6 Summary of Test Results

According to the final data in section 4.7, the EUT complied with the FCC 15.227 and FCC 15.209 standards, and had the worst margin of:

Channel 1: -4.5 dBμV at 149.05 MHz in the Vertical polarization, 27-1000MHz

Channel 2: -4.7 dBμV at 150.04 MHz in the Horizontal polarization, 27-1000MHz

4.7 Radiated Emissions Test Result Data

INDICATED		TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC SUBPART C	
Frequency MHz	Ampl. dBμV/m	Angle Degree	Height Meter	Polar H/ V	Antenna dBμV/m	Cable dB	Amp. dB	Corr. Ampl. dBμV/m	Limit dBμV/m	Margin dB
Channel 1										
149.05	51.0	0	1.2	V	13.4	2.1	27.5	39.0	43.5	-4.5
149.05	50.5	270	1.2	H	13.4	2.1	27.5	38.5	43.5	-5.0
324.75	44.2	270	1.5	H	13.9	2.8	27.3	33.6	46	-12.4
324.75	43.5	180	1.2	V	13.9	2.8	27.3	32.9	46	-13.1
54.19	43.4	90	1.2	V	10.5	1.4	27.3	28.0	40	-12.0
54.19	38.9	30	1.2	H	10.5	1.4	27.3	23.5	40	-16.5
108.45	40.2	330	1.5	H	11.4	1.6	27.7	25.5	43.5	-18.0
108.45	39.2	270	1.2	V	11.4	1.6	27.7	24.5	43.5	-19.0
27.095	63.0	30	1.2	V	15.8	0.3	27.3	51.8	80	-28.2
27.095	61.6	30	1.2	H	15.8	0.3	27.3	50.4	80	-29.6
Channel 2										
150.04	51.2	200	1.2	H	13.0	2.1	27.5	38.8	43.5	-4.7
150.04	50.8	30	1.2	V	13.0	2.1	27.5	38.4	43.5	-5.1
325.76	44.7	200	1.2	V	13.9	2.8	27.3	34.1	46	-11.9
54.29	43.5	90	1.2	V	10.5	1.4	27.3	28.1	40	-11.9
325.75	42.3	270	1.5	H	13.9	2.8	27.3	31.7	46	-14.3
54.29	42.1	270	1.2	H	10.5	1.4	27.3	26.7	40	-13.3
76.27	39.6	0	1.2	V	9.5	1.4	27.5	23.0	40	-17.0
76.27	39.3	270	1.2	H	9.5	1.4	27.5	22.7	40	-17.3
81.42	34.2	0	1.5	H	9.6	1.5	27.5	17.8	40	-22.2
81.43	33.8	300	1.2	V	9.6	1.5	27.5	17.4	40	-22.6
27.145	59.4	0	1.2	V	15.8	0.3	27.3	48.2	80	-31.8
27.145	58.6	30	1.5	H	15.8	0.3	27.3	47.4	80	-32.6