



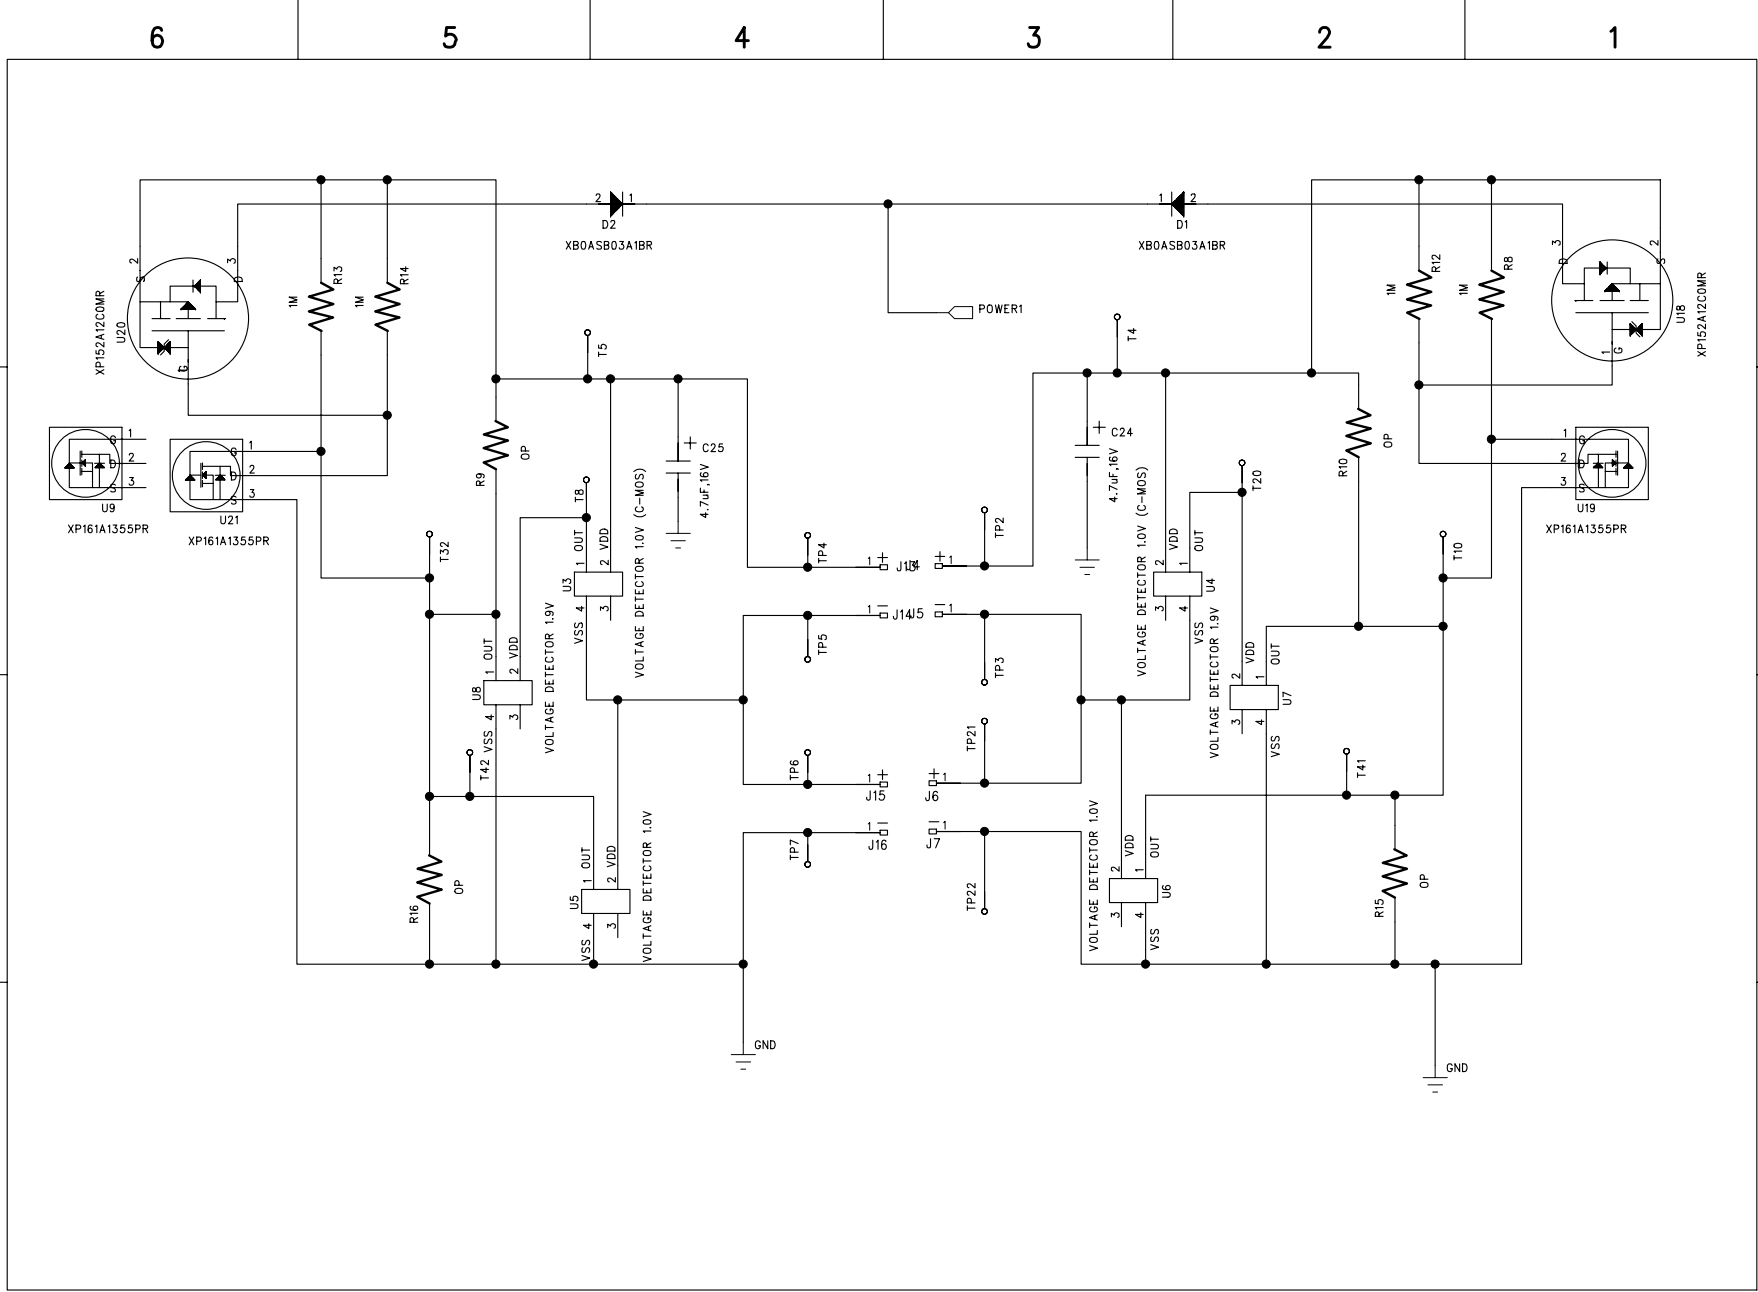

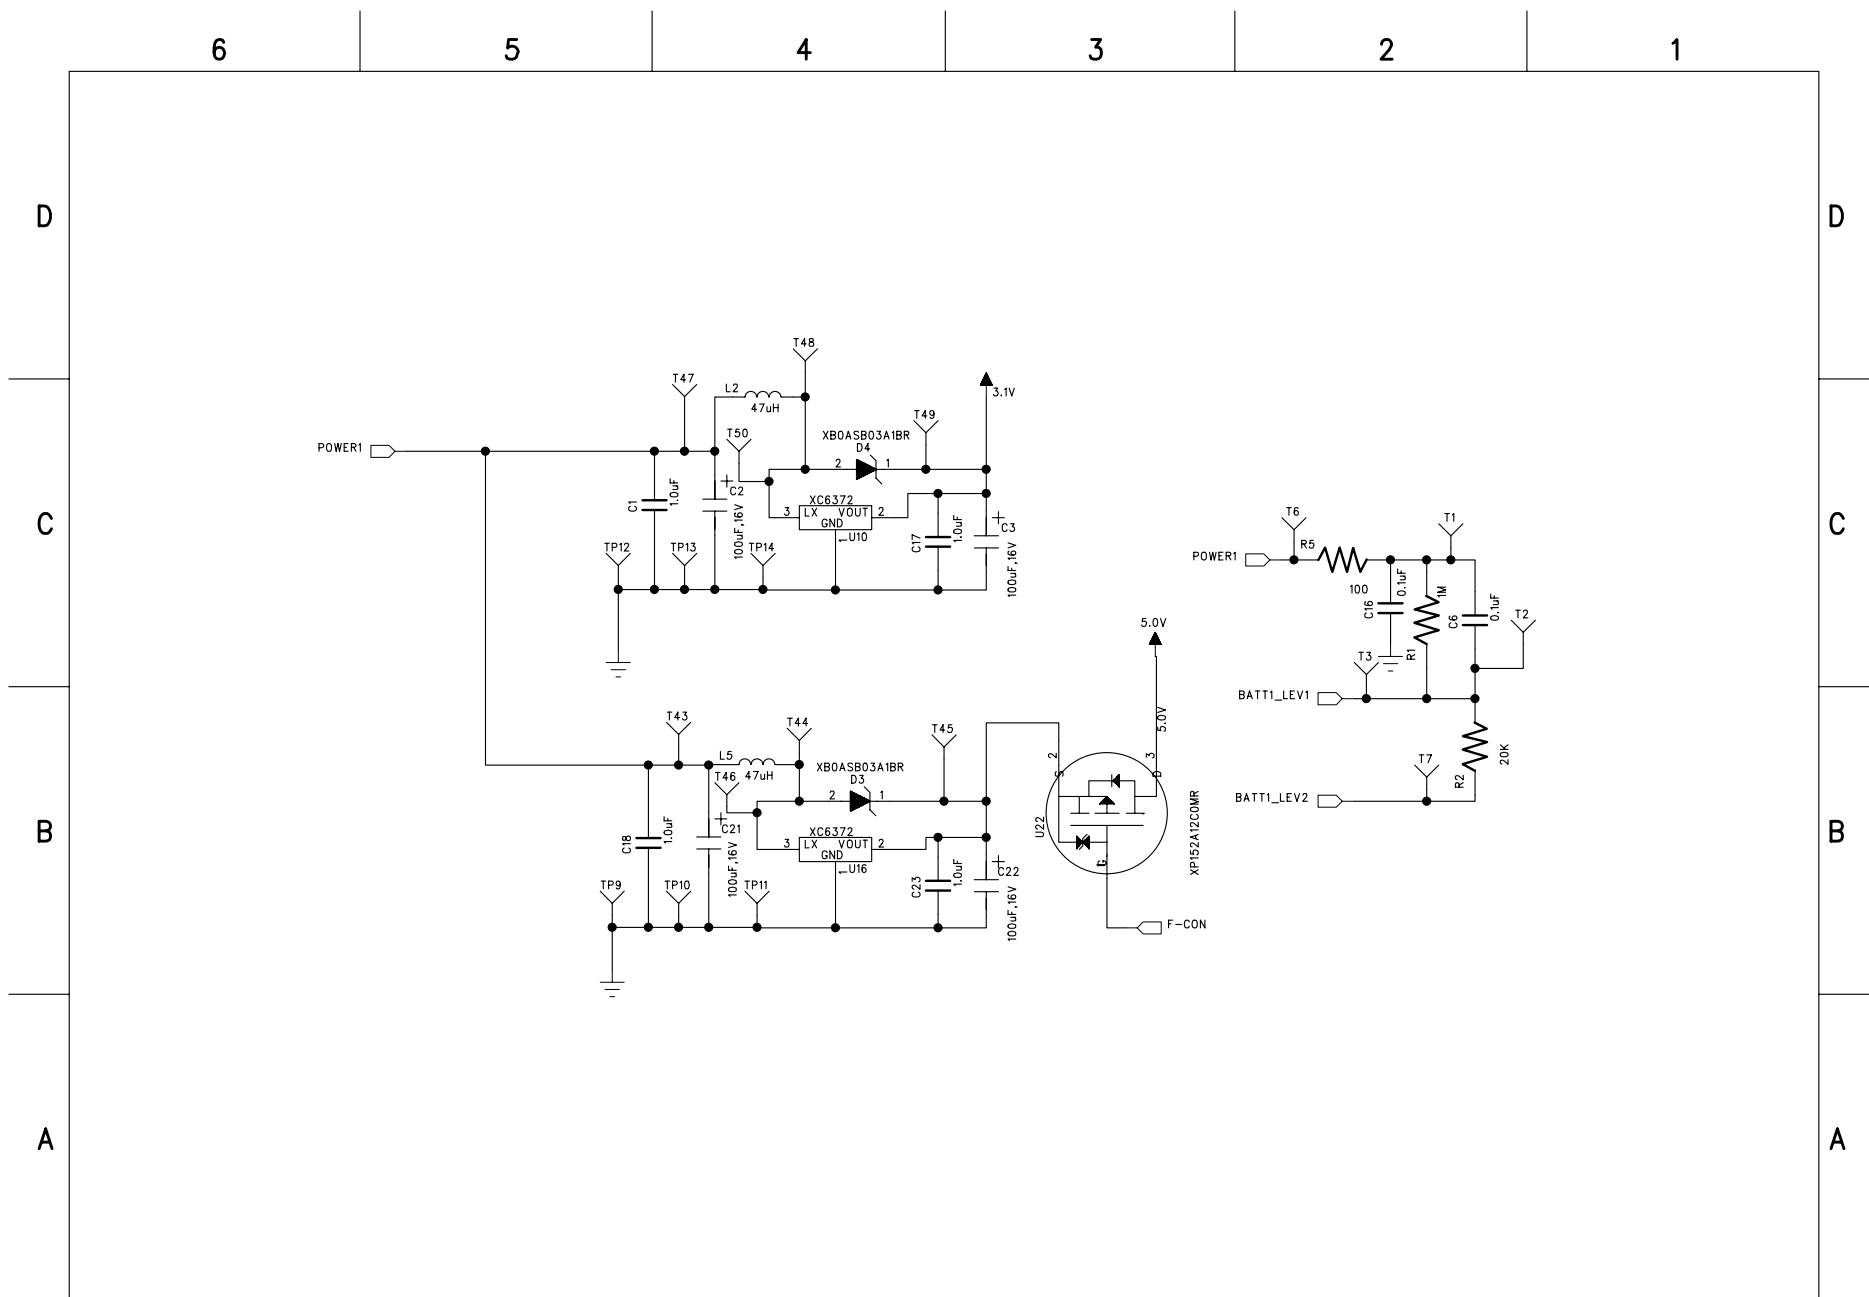

6

5

4

3

2

1

D

D

C


C

B

B

A

A

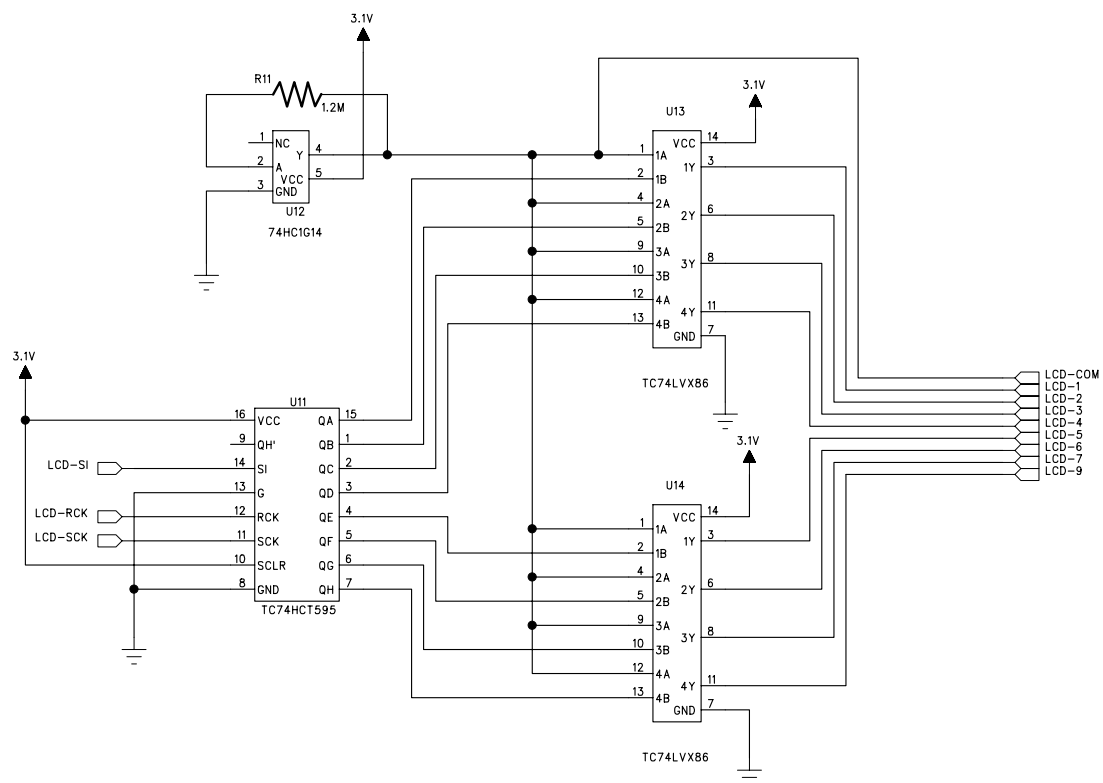

6 5 4 3 2 1

D

C

B



A

D

C

B

A

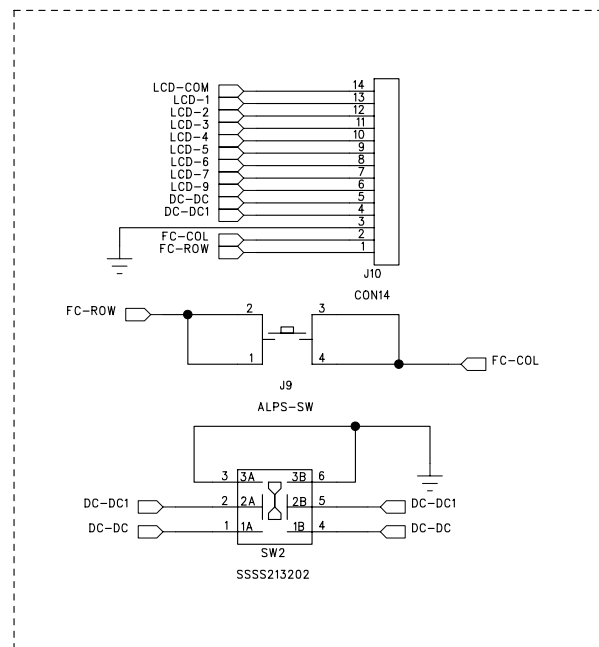


3.ALL CAPACITOR VALUES ARE IN MICROFARADS.

2.ALL RESISITOR VALUES ARE IN OHMS.

1.REFERENCE PRINTED BOARD EM-K1927 LATEST REV.

NOTE;UNLESS OHTERWISE SPECIFIED

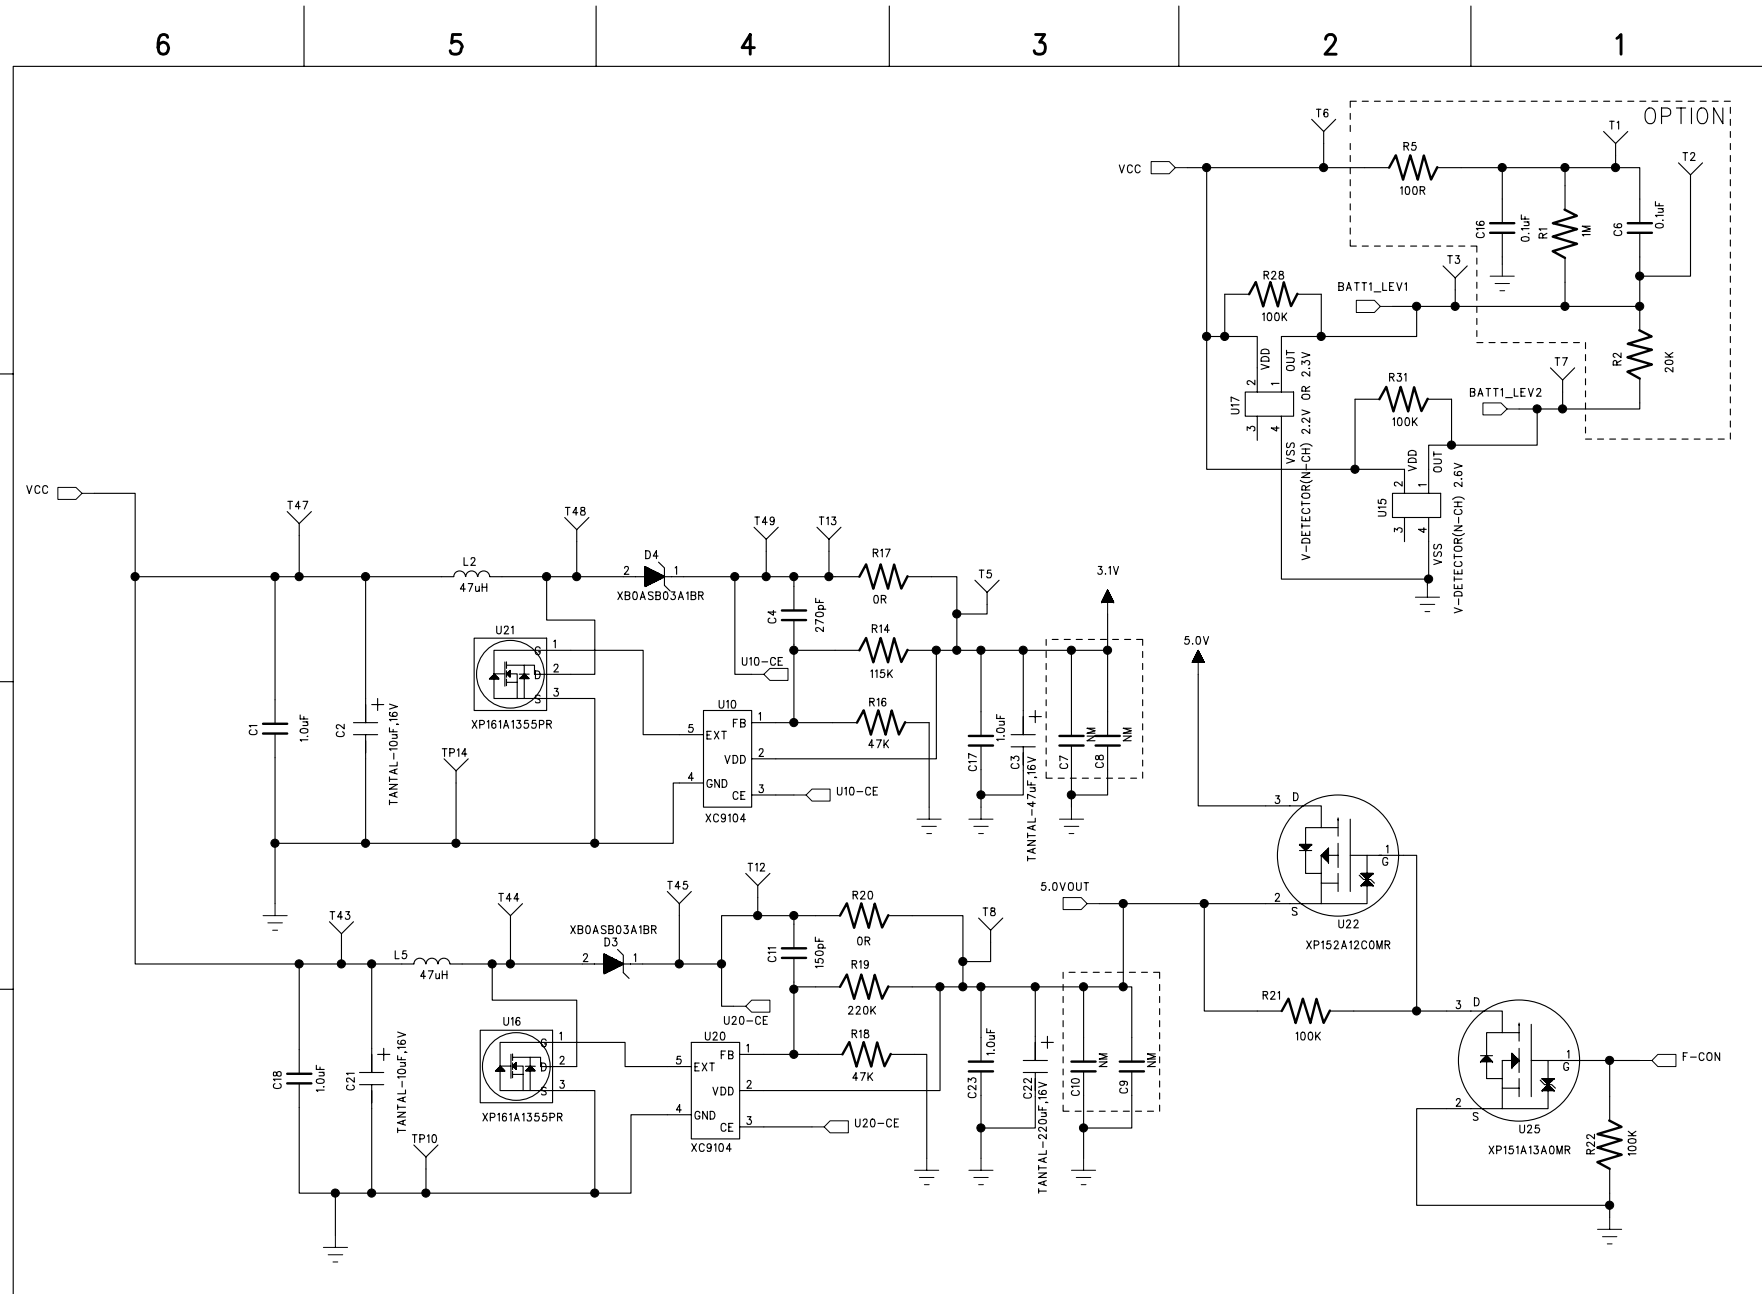

6

5

4

3

2

1

D

D

C


C


B

B

A

A

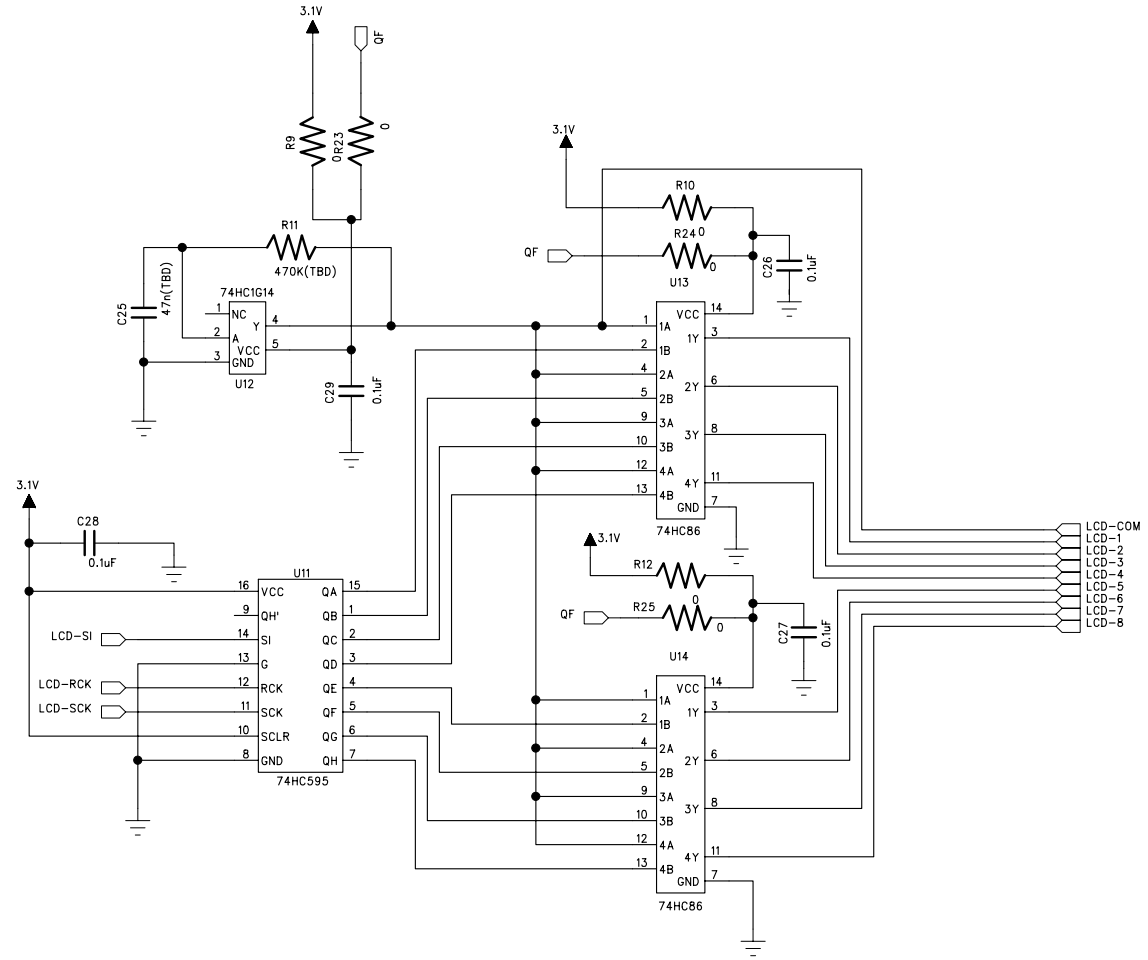

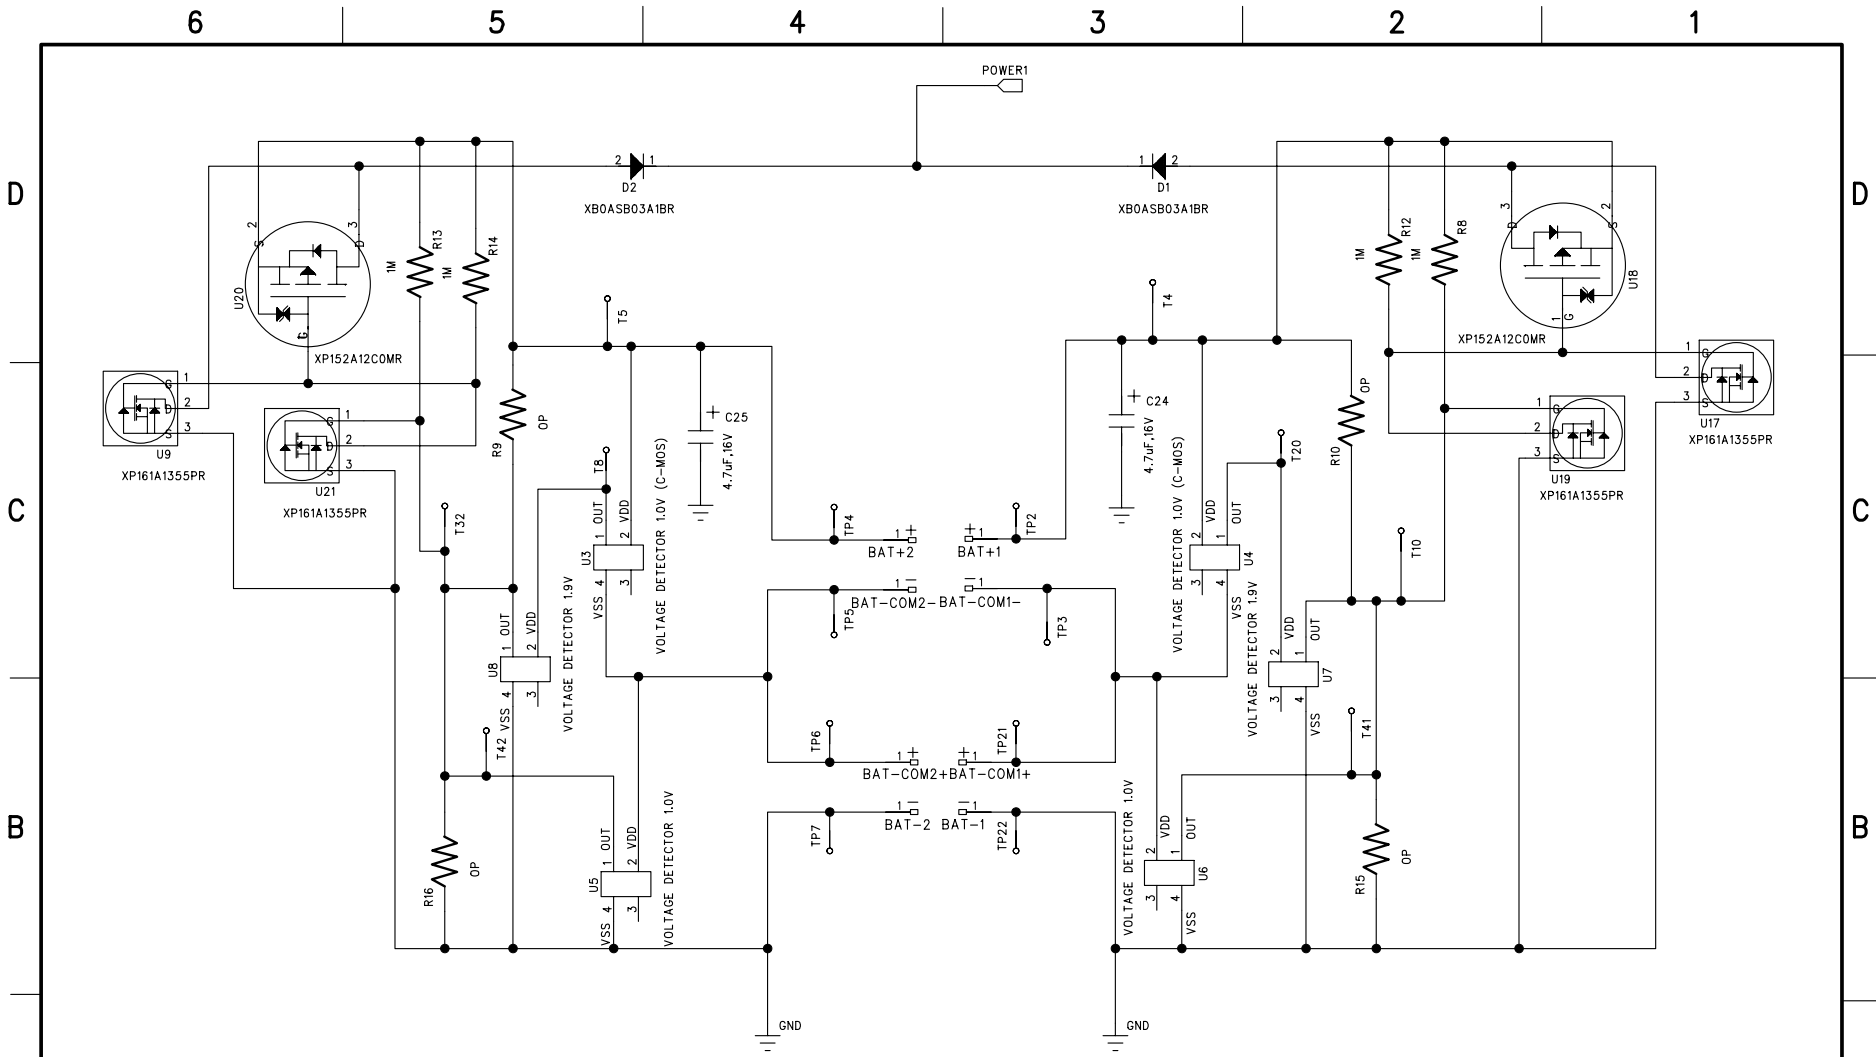

1.ALL RESISITOR VALUES ARE IN OHMS.
NOTE;UNLESS OHTERWISE SPECIFIED

REV	DESCRIPTION	ECN NO.	DATE	ENGINEER	DATE: MAR/14/'05	DRAWN: Y.OBATA	CHECKED: Y.OBT	APPROVED M.SATO
			14/MAR/'05	Y.OBATA				

MINEBEA CO.,LTD. MECHATRONICS DIV.		
TITLE: SCHEMATIC DIAGRAM SNCY-24RF-power		
SIZE: A3	DRAWING NO: EM-K2529-PWR	REV: 10
SCALE:		SHEET:1 OF 7

