



element[®]

Pektron Group Limited

Smart Key Fob

FCC 15.231:2017

Periodic Transmitter

Report # ELEM0034 Rev. 1



NVLAP Lab Code: 200676-0



This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government of the United States of America. This Report shall not be reproduced, except in full without written approval of the laboratory.



CERTIFICATE OF TEST

Last Date of Test: September 1, 2017
Pektron Group Limited
Model: Smart Key Fob

Radio Equipment Testing

Standards

Specification	Method
FCC 15.231:2017	ANSI C63.10:2013

Results

Method Clause	Test Description	Applied	Results	Comments
6.2	Powerline Conducted Emissions	No	N/A	Not required for battery operated device.
6.5, 6.6	Field Strength of Fundamental	Yes	Pass	
6.5, 6.6	Spurious Radiated Emissions	Yes	Pass	
6.9.2	Occupied Bandwidth	Yes	Pass	
7.5	Duty Cycle	Yes	Pass	

Deviations From Test Standards

None

Approved By:

Kyle Holgate, Operations Manager

Product compliance is the responsibility of the client; therefore, the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test. This report reflects only those tests from the referenced standards shown in the certificate of test. It does not include inspection or verification of labels, identification, marking or user information.

REVISION HISTORY



Revision Number	Description	Date	Page Number
01	Added client provided information	12-21-17	16
01	Updated the duty cycle correction factor of -16.9 dB to -17.42 dB	12-21-17	16

ACCREDITATIONS AND AUTHORIZATIONS



United States

FCC - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

A2LA - Accredited by A2LA to ISO / IEC 17065 as a product certifier. This allows Element to certify transmitters to FCC and IC specifications.

NVLAP - Each laboratory is accredited by NVLAP to ISO 17025

Canada

ISED - Recognized by Innovation, Science and Economic Development Canada as a Certification Body (CB). Certification chambers and Open Area Test Sites are filed with ISED.

European Union

European Commission – Within Element, we have a EU Notified Body validated for the EMCD and RED Directives.

Australia/New Zealand

ACMA - Recognized by ACMA as a CAB for the acceptance of test data.

Korea

MSIP / RRA - Recognized by KCC's RRA as a CAB for the acceptance of test data.

Japan

VCCI - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

Taiwan

BSMI – Recognized by BSMI as a CAB for the acceptance of test data.

NCC - Recognized by NCC as a CAB for the acceptance of test data.

Singapore

IDA – Recognized by IDA as a CAB for the acceptance of test data.

Israel

MOC – Recognized by MOC as a CAB for the acceptance of test data.

Hong Kong

OFCA – Recognized by OFCA as a CAB for the acceptance of test data.

Vietnam

MIC – Recognized by MIC as a CAB for the acceptance of test data.

SCOPE

For details on the Scopes of our Accreditations, please visit:

<http://portlandcustomer.element.com/ts/scope/scope.htm>

<http://gsi.nist.gov/global/docs/cabs/designations.html>

MEASUREMENT UNCERTAINTY



Measurement Uncertainty

When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. Measurement uncertainty is a statistical expression of measurement error qualified by a probability distribution.

A measurement uncertainty estimation has been performed for each test per our internal quality document QM205.4.6. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty (K=2) can be found included as part of the applicable test description page. Our measurement data meets or exceeds the measurement uncertainty requirements of the applicable specification; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for estimating measurement uncertainty are based upon ETSI TR 100 028 (or CISPR 16-4-2 as applicable), and are available upon request.

The following table represents the Measurement Uncertainty (MU) budgets for each of the tests that may be contained in this report.

Test	+ MU	- MU
Frequency Accuracy (Hz)	0.0007%	-0.0007%
Amplitude Accuracy (dB)	1.2 dB	-1.2 dB
Conducted Power (dB)	0.3 dB	-0.3 dB
Radiated Power via Substitution (dB)	0.7 dB	-0.7 dB
Temperature (degrees C)	0.7°C	-0.7°C
Humidity (% RH)	2.5% RH	-2.5% RH
Voltage (AC)	1.0%	-1.0%
Voltage (DC)	0.7%	-0.7%
Field Strength (dB)	5.2 dB	-5.2 dB
AC Powerline Conducted Emissions (dB)	2.4 dB	-2.4 dB


FACILITIES



2017.7.25



California	Minnesota	New York	Oregon	Texas	Washington
Labs OC01-13 41 Tesla Irvine, CA 92618 (949) 861-8918	Labs MN01-08, MN10 9349 W Broadway Ave. Brooklyn Park, MN 55445 (612)-638-5136	Labs NY01-04 4939 Jordan Rd. Elbridge, NY 13060 (315) 554-8214	Labs EV01-12 22975 NW Evergreen Pkwy Hillsboro, OR 97124 (503) 844-4066	Labs TX01-09 3801 E Plano Pkwy Plano, TX 75074 (469) 304-5255	Labs NC01-05 19201 120 th Ave NE Bothell, WA 98011 (425)984-6600
NVLAP					
NVLAP Lab Code: 200676-0	NVLAP Lab Code: 200881-0	NVLAP Lab Code: 200761-0	NVLAP Lab Code: 200630-0	NVLAP Lab Code:201049-0	NVLAP Lab Code: 200629-0
Innovation, Science and Economic Development Canada					
2834B-1, 2834B-3	2834E-1, 2834E-3	N/A	2834D-1, 2834D-2	2834G-1	2834F-1
BSMI					
SL2-IN-E-1154R	SL2-IN-E-1152R	N/A	SL2-IN-E-1017	SL2-IN-E-1158R	SL2-IN-E-1153R
VCCI					
A-0029	A-0109	N/A	A-0108	A-0201	A-0110
Recognized Phase I CAB for ACMA, BSMI, IDA, KCC/RRA, MIC, MOC, NCC, OFCA					
US0158	US0175	N/A	US0017	US0191	US0157

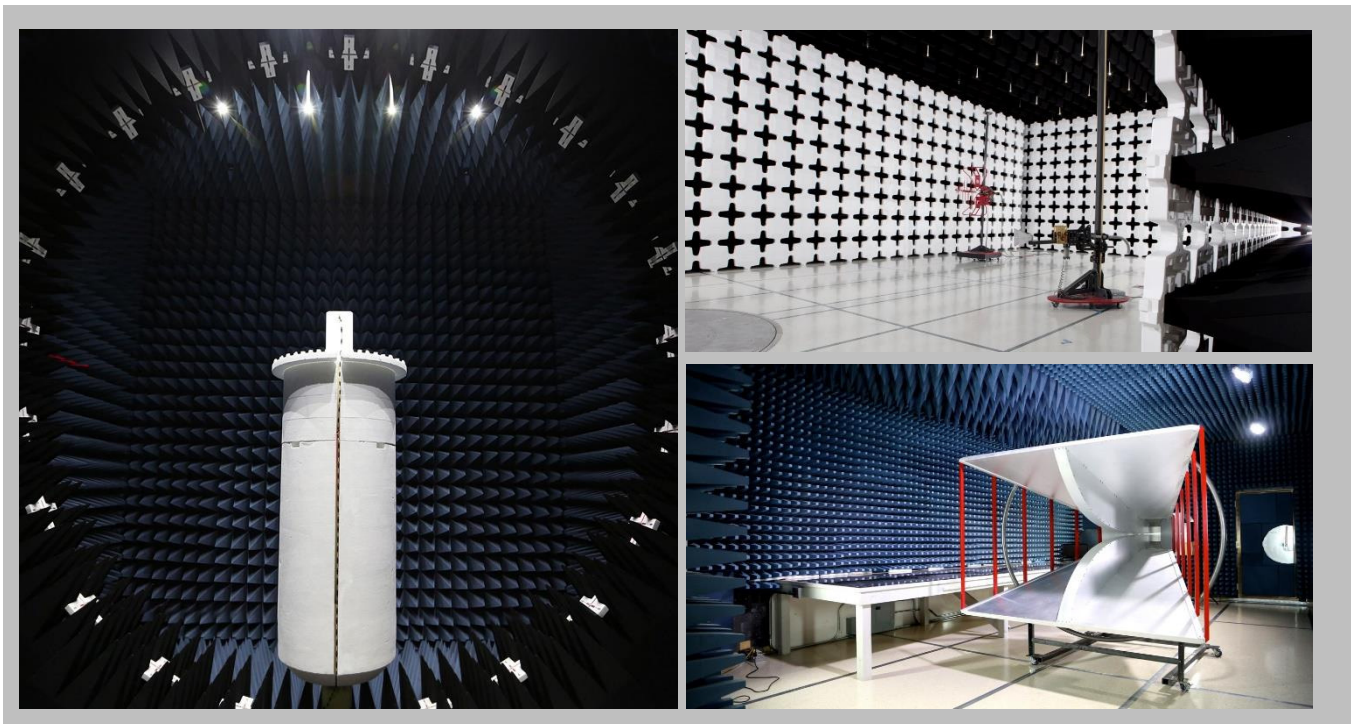


Test Setup Block Diagrams




2017.1.25


Antenna Port Conducted Measurements

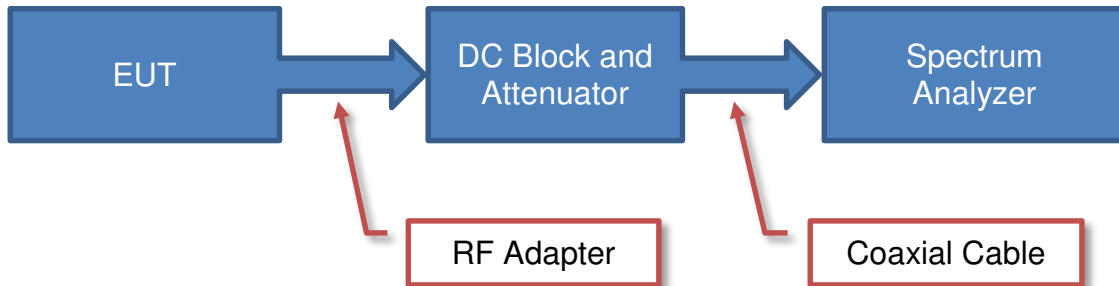

Near Field Test Fixture Measurements

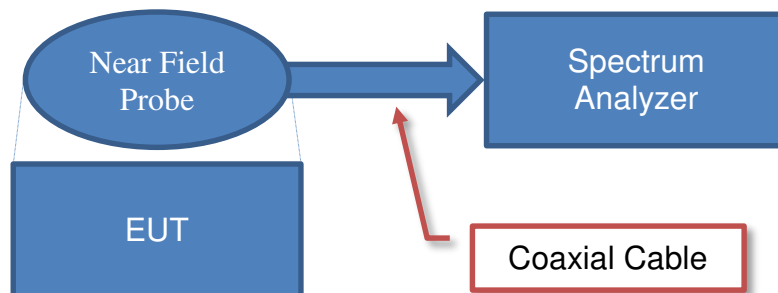

Spurious Radiated Emissions

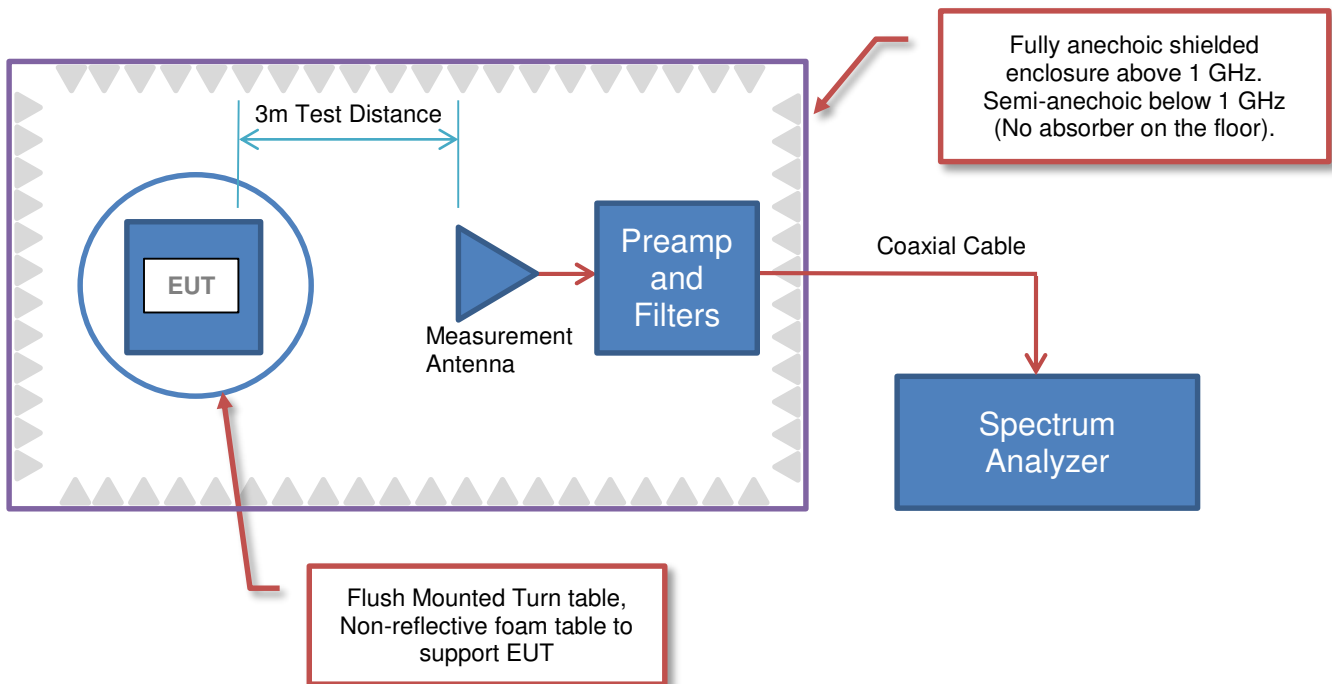



PRODUCT DESCRIPTION

Client and Equipment Under Test (EUT) Information

Company Name:	Pektron Group Limited
Address:	Alfreton Road
City, State, Zip:	Derby DE21 4AP, United Kingdom
Test Requested By:	John Charters of Element Materials Technology
Model:	Smart Key Fob
First Date of Test:	August 31, 2017
Last Date of Test:	September 1, 2017
Receipt Date of Samples:	August 31, 2017
Equipment Design Stage:	Production
Equipment Condition:	No Damage
Purchase Authorization:	Verified

Information Provided by the Party Requesting the Test

Functional Description of the EUT:

433MHz Radio Key Fob

Client provided information:

A new full charged battery, provided by the client was used for testing.

Testing Objective:

To demonstrate compliance to FCC 15.231 specifications.

CONFIGURATIONS



Configuration ELEM0034- 1

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
433MHz Radio Key Fob	Pektron Group Limited	Smart Key Fob	0794G01

Configuration ELEM0034- 2

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
433MHz Radio Key Fob	Pektron Group Limited	Smart Key Fob	0794G01

Configuration ELEM0034- 3

Software/Firmware Running during test	
Description	Version
Vector CANalyzer Pro	None

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
433MHz Radio Key Fob	Pektron Group Limited	Smart Key Fob	0794G01

Peripherals in test setup boundary			
Description	Manufacturer	Model/Part Number	Serial Number
0787 KCU Manual Test Set	Pektron Group Limited	None	None
Keyless Control Unit	Pektron Group Limited	2502196	10000046
Host Laptop	Fujitsu	A530	YL9P194760
Host Laptop Power Supply	Fujitsu	ADP-80NB A	11211689N
DC Power Supply	Tekpower	TP6005E	187890

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
KCU Cable	No	2.0m	No	Keyless Control Unit	0787 KCU Manual Test Set
Serial-USB Cable	Yes	1.6m	No	Host Laptop	0787 KCU Manual Test Set
DC Cables	No	0.90m	No	DC Power Supply	0787 KCU Manual Test Set

MODIFICATIONS



Equipment Modifications

Item	Date	Test	Modification	Note	Disposition of EUT
1	8/31/2017	Field Strength of Fundamental	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
2	8/31/2017	Spurious Radiated Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
3	9/1/2017	Occupied Bandwidth	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
4	9/1/2017	Duty Cycle	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	Scheduled testing was completed.

FIELD STRENGTH OF FUNDAMENTAL



PSA-ESCI 2017.06.01

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

MODES OF OPERATION

Transmitting at 433.92 MHz

POWER SETTINGS INVESTIGATED

Battery

CONFIGURATIONS INVESTIGATED

ELEM0034 - 1

FREQUENCY RANGE INVESTIGATED

Start Frequency | 30 MHz | Stop Frequency | 1000 MHz

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Antenna - Biconilog	EMCO	3142	AXB	11/6/2015	24 mo
Cable	Element	10kHz-1GHz RE Cables	OCH	8/1/2017	12 mo
Analyzer - Spectrum Analyzer	Agilent	N9010A	AFJ	1/28/2017	12 mo

MEASUREMENT BANDWIDTHS

Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 - 0.15	1.0	0.2	0.2
0.15 - 30.0	10.0	9.0	9.0
30.0 - 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0

TEST DESCRIPTION

The antennas to be used with the EUT were tested. The EUT was configured for continuous un-modulated CW operation at its single transmit frequency. The field strength of the transmit frequency was maximized by rotating the EUT, adjusting the measurement antenna height and polarization, and manipulating the EUT in 3 orthogonal planes (per ANSI C63.10:2013).

To derive average emission measurements, a duty cycle correction factor was utilized:

Duty Cycle = On time/100 milliseconds (or the period, whichever is less)

Where "On time" = $N1L1 + N2L2 + \dots$

Where N1 is the number of type 1 pulses, L1 is length of type 1 pulses, N2 is the number of type 2 pulses, L2 is the length of type 2 pulses, etc.

Therefore, Duty Cycle = $(N1L1 + N2L2 + \dots)/100\text{mS}$ or T, whichever is less. (Where T is the period of the pulse train.)

The measured values for the EUT's pulse train are as follows:

Period = 100 mSec

Pulsewidth of Type 1 Pulse = 0.3376 mSec

Pulsewidth of Type 2 Pulse = 0.7174 mSec

Number of Type 1 Pulses = 25

Number of Type 2 Pulses = 7


Duty Cycle = $20 \log [(25)(0.3376) + (7)(0.7174)]/100 = -17.42 \text{ dB}$

The duty cycle correction factor of -17.42 dB was added to the peak readings to mathematically derive the average levels. Peak measurements were made with a resolution bandwidth of 100kHz and a video bandwidth of 300kHz

FIELD STRENGTH OF FUNDAMENTAL




EmiRS 2017.07.11 PSA-ESCI 2017.06.01

Work Order:	ELEM0034	Date:	08/31/17	
Project:	None	Temperature:	22.9 °C	
Job Site:	OC10	Humidity:	44% RH	
Serial Number:	0794G01	Barometric Pres.:	1010 mbar	Tested by: Johnny Candelas
EUT:	Smart Key Fob			
Configuration:	1			
Customer:	Pektron Group Limited			
Attendees:	None			
EUT Power:	Battery			
Operating Mode:	Transmitting at 433.92 MHz			
Deviations:	None			
Comments:	None			

Test Specifications	Test Method
FCC 15.231:2017	ANSI C63.10:2013

Run #	1	Test Distance (m)	3	Antenna Height(s)	1 to 4(m)	Results	Pass
--------------	---	--------------------------	---	--------------------------	-----------	----------------	------

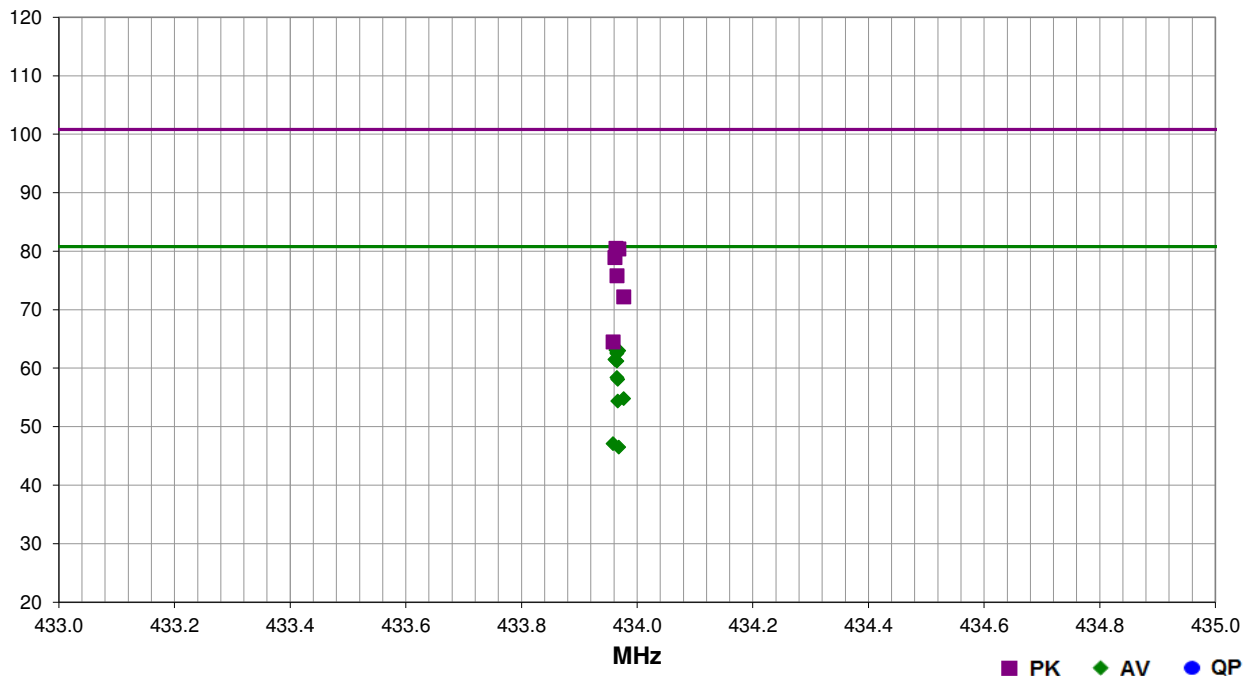

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
433.963	57.1	23.4	1.2	109.0	-17.4	0.0	Vert	AV	0.0	63.1	80.8	-17.7	EUT Vert
433.968	57.0	23.4	1.0	276.0	-17.4	0.0	Horz	AV	0.0	63.0	80.8	-17.8	EUT Horiz
433.965	56.7	23.4	1.2	109.0	-17.4	0.0	Vert	AV	0.0	62.7	80.8	-18.1	EUT Vert
433.965	56.5	23.4	1.0	276.0	-17.4	0.0	Horz	AV	0.0	62.5	80.8	-18.3	EUT Horiz
433.962	55.5	23.4	1.2	293.0	-17.4	0.0	Vert	AV	0.0	61.5	80.8	-19.3	EUT on Side
433.965	55.2	23.4	1.2	293.0	-17.4	0.0	Vert	AV	0.0	61.2	80.8	-19.6	EUT on Side
433.963	57.1	23.4	1.2	109.0	0.0	0.0	Vert	PK	0.0	80.5	100.8	-20.3	EUT Vert
433.968	57.0	23.4	1.0	276.0	0.0	0.0	Horz	PK	0.0	80.4	100.8	-20.4	EUT Horiz
433.962	55.5	23.4	1.2	293.0	0.0	0.0	Vert	PK	0.0	78.9	100.8	-21.9	EUT on Side
433.965	52.4	23.4	1.0	192.0	-17.4	0.0	Horz	AV	0.0	58.4	80.8	-22.4	EUT on Side
433.967	52.1	23.4	1.0	192.0	-17.4	0.0	Horz	AV	0.0	58.1	80.8	-22.7	EUT on Side
433.965	52.4	23.4	1.0	192.0	0.0	0.0	Horz	PK	0.0	75.8	100.8	-25.0	EUT on Side
433.977	48.8	23.4	3.6	29.0	-17.4	0.0	Horz	AV	0.0	54.8	80.8	-26.0	EUT Vert

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
433.967	48.4	23.4	3.6	29.0	-17.4	0.0	Horz	AV	0.0	54.4	80.8	-26.4	EUT Vert
433.977	48.8	23.4	3.6	29.0		0.0	Horz	PK	0.0	72.2	100.8	-28.6	EUT Vert
433.958	41.1	23.4	1.0	358.0	-17.4	0.0	Vert	AV	0.0	47.1	80.8	-33.7	EUT Horiz
433.968	40.5	23.4	1.0	358.0	-17.4	0.0	Vert	AV	0.0	46.5	80.8	-34.3	EUT Horiz
433.958	41.1	23.4	1.0	358.0		0.0	Vert	PK	0.0	64.5	100.8	-36.3	EUT Horiz

SPURIOUS RADIATED EMISSIONS



PSA-ESCI 2017.06.01

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

MODES OF OPERATION

Transmitting at 433.92 MHz

POWER SETTINGS INVESTIGATED

Battery

CONFIGURATIONS INVESTIGATED

ELEM0034 - 1

FREQUENCY RANGE INVESTIGATED

Start Frequency	30 MHz	Stop Frequency	5000 MHz
-----------------	--------	----------------	----------

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Cable	Element	1-8GHz RE Cables	OCJ	7/13/2017	12 mo
Amplifier - Pre-Amplifier	Miteq	AMF-4D-010120-30-10P-1	AOP	7/13/2017	12 mo
Antenna - Double Ridge	EMCO	3115	AHB	3/21/2016	24 mo
Antenna - Biconilog	EMCO	3142	AXB	11/6/2015	24 mo
Amplifier - Pre-Amplifier	Miteq	AM-1402	AOZ	8/1/2017	12 mo
Cable	Element	10kHz-1GHz RE Cables	OCH	8/1/2017	12 mo
Analyzer - Spectrum Analyzer	Agilent	N9010A	AFJ	1/28/2017	12 mo

MEASUREMENT BANDWIDTHS

Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 - 0.15	1.0	0.2	0.2
0.15 - 30.0	10.0	9.0	9.0
30.0 - 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0

TEST DESCRIPTION

The highest gain antenna of each type to be used with the EUT was tested. The EUT was configured for the required transmit frequency in each operational band and the modes as showed in the data sheets.

For each configuration, the spectrum was scanned throughout the specified range as part of the exploratory investigation of the emissions. These "pre-scans" are not included in the report. Final measurements on individual emissions were then made and included in this test report.

The individual emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antenna in three orthogonal axis, and adjusting the measurement antenna height and polarization (per ANSI C63.10). A preamp and high pass filter (and notch filter) were used for this test in order to provide sufficient measurement sensitivity.

Measurements were made with the required detectors and annotated on the data for each individual point using the following annotation:

QP = Quasi-Peak Detector

PK = Peak Detector

AV = RMS Detector

To derive average emission measurements, a duty cycle correction factor was utilized:

To derive average emission measurements, a duty cycle correction factor was utilized:

Duty Cycle = On time/100 milliseconds (or the period, whichever is less)

Where "On time" = $N1L1 + N2L2 + \dots$

Where N1 is the number of type 1 pulses, L1 is length of type 1 pulses, N2 is the number of type 2 pulses, L2 is the length of type 2 pulses, etc.

Therefore, Duty Cycle = $(N1L1 + N2L2 + \dots)/100\text{mS}$ or T, whichever is less. (Where T is the period of the pulse train.)

The measured values for the EUT's pulse train are as follows:

Period = 100 mSec

Pulsewidth of Type 1 Pulse = 0.3376 mSec

Pulsewidth of Type 2 Pulse = 0.7174 mSec

Number of Type 1 Pulses = 25

Number of Type 2 Pulses = 7


Duty Cycle = $20 \log [((25)(0.3376) + (7)(0.7174))/100] = -17.42 \text{ dB}$

The duty cycle correction factor of -17.42 dB was added to the peak readings to mathematically derive the average levels. Peak measurements were made with a resolution bandwidth of 100kHz and a video bandwidth of 300kHz

SPURIOUS RADIATED EMISSIONS




EmiRS 2017.07.11 PSA-ESCI 2017.06.01

Work Order:	ELEM0034	Date:	08/31/17	
Project:	None	Temperature:	22.9 °C	
Job Site:	OC10	Humidity:	44% RH	
Serial Number:	0794G01	Barometric Pres.:	1010 mbar	
EUT:	Smart Key Fob			
Configuration:	1			
Customer:	Pektron Group Limited			
Attendees:	None			
EUT Power:	Battery			
Operating Mode:	Transmitting at 433.92 MHz			
Deviations:	None			
Comments:	None			

Test Specifications	Test Method
FCC 15.231:2017	ANSI C63.10:2013

Run #	2	Test Distance (m)	3	Antenna Height(s)	1 to 4(m)	Results	Pass
--------------	---	--------------------------	---	--------------------------	-----------	----------------	------

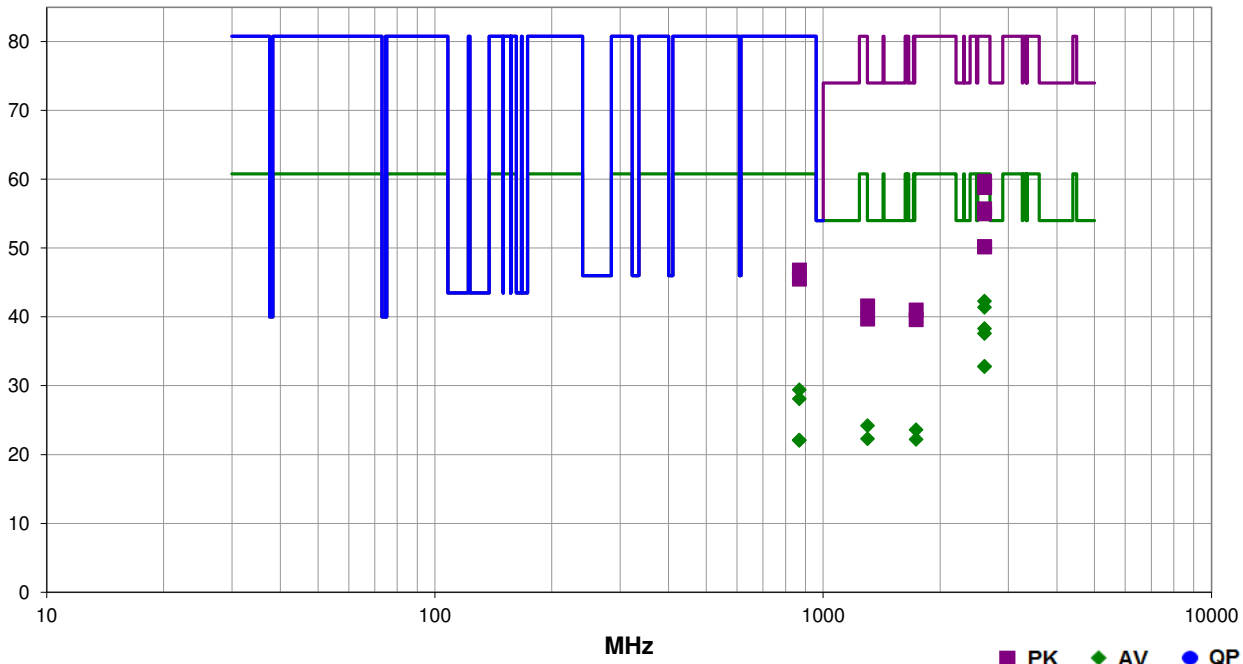

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
2603.658	56.4	3.3	2.4	349.0	-17.4	0.0	Horz	AV	0.0	42.3	60.8	-18.5	EUT Vert
2603.600	55.5	3.3	2.7	347.0	-17.4	0.0	Vert	AV	0.0	41.4	60.8	-19.4	EUT on Side
2603.658	56.4	3.3	2.4	349.0	0.0	0.0	Horz	PK	0.0	59.7	80.8	-21.1	EUT Vert
2603.600	55.5	3.3	2.7	347.0	0.0	0.0	Vert	PK	0.0	58.8	80.8	-22.0	EUT on Side
2603.633	52.4	3.3	2.7	51.0	-17.4	0.0	Vert	AV	0.0	38.3	60.8	-22.5	EUT Horiz
2603.758	51.7	3.3	3.9	327.0	-17.4	0.0	Horz	AV	0.0	37.6	60.8	-23.2	EUT Horiz
2603.633	52.4	3.3	2.7	51.0	0.0	0.0	Vert	PK	0.0	55.7	80.8	-25.1	EUT Horiz
2603.758	51.7	3.3	3.9	327.0	0.0	0.0	Horz	PK	0.0	55.0	80.8	-25.8	EUT Horiz
2604.075	46.9	3.3	1.2	256.0	-17.4	0.0	Vert	AV	0.0	32.8	60.8	-28.0	EUT Vert
2603.608	46.9	3.3	2.4	114.0	-17.4	0.0	Horz	AV	0.0	32.8	60.8	-28.0	EUT on Side
1301.933	43.3	-1.7	1.0	277.0	-17.4	0.0	Vert	AV	0.0	24.2	54.0	-29.8	EUT on Side
2604.075	46.9	3.3	1.2	256.0	0.0	0.0	Vert	PK	0.0	50.2	80.8	-30.6	EUT Vert
2603.608	46.9	3.3	2.4	114.0	0.0	0.0	Horz	PK	0.0	50.2	80.8	-30.6	EUT on Side

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
868.497	21.6	15.2	3.8	319.0	-17.4	10.0	Horz	AV	0.0	29.4	60.8	-31.4	EUT Vert
1301.892	41.4	-1.7	1.4	353.0	-17.4	0.0	Horz	AV	0.0	22.3	54.0	-31.7	EUT Vert
1301.933	43.3	-1.7	1.0	277.0		0.0	Vert	PK	0.0	41.6	74.0	-32.4	EUT on Side
868.147	20.3	15.2	1.0	343.0	-17.4	10.0	Vert	AV	0.0	28.1	60.8	-32.7	EUT on Side
868.497	21.6	15.2	3.8	319.0		10.0	Horz	PK	0.0	46.8	80.8	-34.0	EUT Vert
1301.892	41.4	-1.7	1.4	353.0		0.0	Horz	PK	0.0	39.7	74.0	-34.3	EUT Vert
868.147	20.3	15.2	1.0	343.0		10.0	Vert	PK	0.0	45.5	80.8	-35.3	EUT on Side
1735.392	40.3	0.7	1.7	299.0	-17.4	0.0	Vert	AV	0.0	23.6	60.8	-37.2	EUT on Side
1735.758	38.9	0.7	1.0	113.0	-17.4	0.0	Horz	AV	0.0	22.2	60.8	-38.6	EUT Vert
868.170	14.3	15.2	3.8	319.0	-17.4	10.0	Horz	AV	0.0	22.1	60.8	-38.7	EUT Vert
867.973	14.3	15.2	1.0	343.0	-17.4	10.0	Vert	AV	0.0	22.1	60.8	-38.7	EUT on Side
1735.392	40.3	0.7	1.7	299.0		0.0	Vert	PK	0.0	41.0	80.8	-39.8	EUT on Side
1735.758	38.9	0.7	1.0	113.0		0.0	Horz	PK	0.0	39.6	80.8	-41.2	EUT Vert

OCCUPIED BANDWIDTH



XMI 2017.02.08

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Antenna - Biconilog	EMCO	3142	AXB	11/6/2015	11/6/2017
Cable	Element	10kHz-1GHz RE Cables	OCH	8/1/2017	8/1/2018
Analyzer - Spectrum Analyzer	Agilent	N9010A	AFJ	1/28/2017	1/28/2018

TEST DESCRIPTION

The measurement was made in a radiated configuration of the fundamental with the carrier fully maximized for its highest radiated power. The EUT was transmitting at its maximum data rate.


The 20 dB occupied bandwidth is required to be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz.

OCCUPIED BANDWIDTH



XMI:2017.02.08

433.96 MHz			
	Value	Limit	Result
	13.49 kHz	1084.9 kHz	Pass

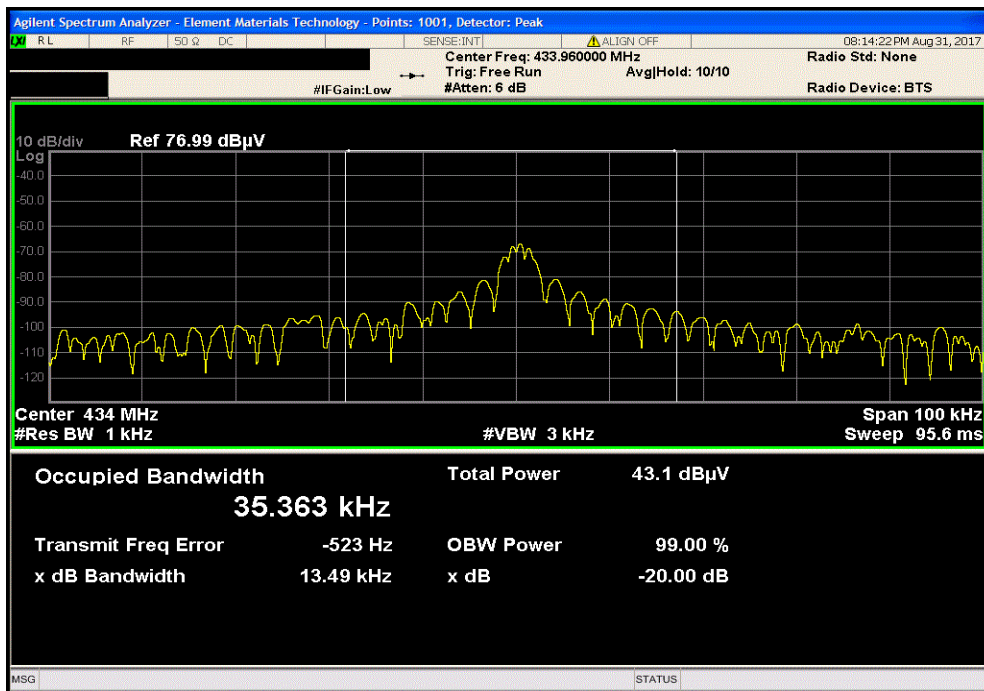

DUTY CYCLE



XMit 2017.02.08

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Probe - Near Field Set	EMCO	7405	IPI	NCR	NCR
Cable	Fairview Microwave	SCA1814-0101-120	OCZ	NCR	NCR
Block - DC	Fairview Microwave	SD3379	AMV	1/11/2017	1/11/2018
Analyzer - Spectrum Analyzer	Agilent	E4440A	AFA	11/2/2016	11/2/2017

TEST DESCRIPTION

A near-field probe was placed near the transmitter. A low-loss coaxial cable was used to connect the near-field probe to the spectrum analyzer. For software controlled or pre-programmed devices, the manufacturer shall declare the duty cycle class or classes for the equipment under test. For manually operated or event dependant devices, with or without software controlled functions, the manufacturer shall declare whether the device once triggered, follows a pre-programmed cycle, or whether the transmission is constant until the trigger is released or manually reset. The manufacturer shall also give a description of the application for the device and include a typical usage pattern. The typical usage pattern as declared by the manufacturer shall be used to determine the duty cycle and hence the duty class.

Where an acknowledgement is required, the additional transmitter on-time shall be included and declared by the manufacturer.

To derive average emission measurements, a duty cycle correction factor was utilized:

Duty Cycle = On time/100 milliseconds (or the period, whichever is less)

Where "On time" = $N1L1 + N2L2 + \dots$

Where N1 is the number of type 1 pulses, L1 is length of type 1 pulses, N2 is the number of type 2 pulses, L2 is the length of type 2 pulses, etc.

Therefore, Duty Cycle = $(N1L1 + N2L2 + \dots)/100\text{mS}$ or T, whichever is less. (Where T is the period of the pulse train.)

The measured values for the EUT's pulse train are as follows:

Period = 100 mSec
Pulsewidth of Type 1 Pulse = 0.3376 mSec
Pulsewidth of Type 2 Pulse = 0.7174 mSec
Number of Type 1 Pulses = 25
Number of Type 2 Pulses = 7


Duty Cycle = $20 \log [(25)(0.3376) + (7)(0.7174)]/100 = -17.42 \text{ dB}$

The duty cycle correction factor of -17.42 dB was added to the peak readings to mathematically derive the average levels. Peak measurements were made with a resolution bandwidth of 100kHz and a video bandwidth of 300kHz.

DUTY CYCLE



XMI 2017.02.08


EUT: Smart Key Fob		Work Order: ELEM0034	
Serial Number: 0794G01		Date: 09/01/17	
Customer: Pektron Group Limited		Temperature: 25.2 °C	
Attendees: None		Humidity: 46.9% RH	
Project: None		Barometric Pres.: 1009 mbar	
Tested by: Mark Baytan	Power: Battery	Job Site: OC13	
TEST SPECIFICATIONS			
FCC 15.231:2017		Test Method	
		ANSI C63.10:2013	
COMMENTS			
None			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	3	Signature 	
		Pulse Width Type 1 (ms)	Pulse Width Type 2 (ms)
10s Interval		N/A	N/A
1s Interval		N/A	N/A
35ms Interval		0.3376	0.7174
			Limit
			N/A
			Result
			N/A
			N/A
			N/A

DUTY CYCLE




XMI 2017.02.08

10s Interval			
	Pulse Width Type 1 (ms)	Pulse Width Type 2 (ms)	Limit
	N/A	N/A	N/A
			Result
			N/A

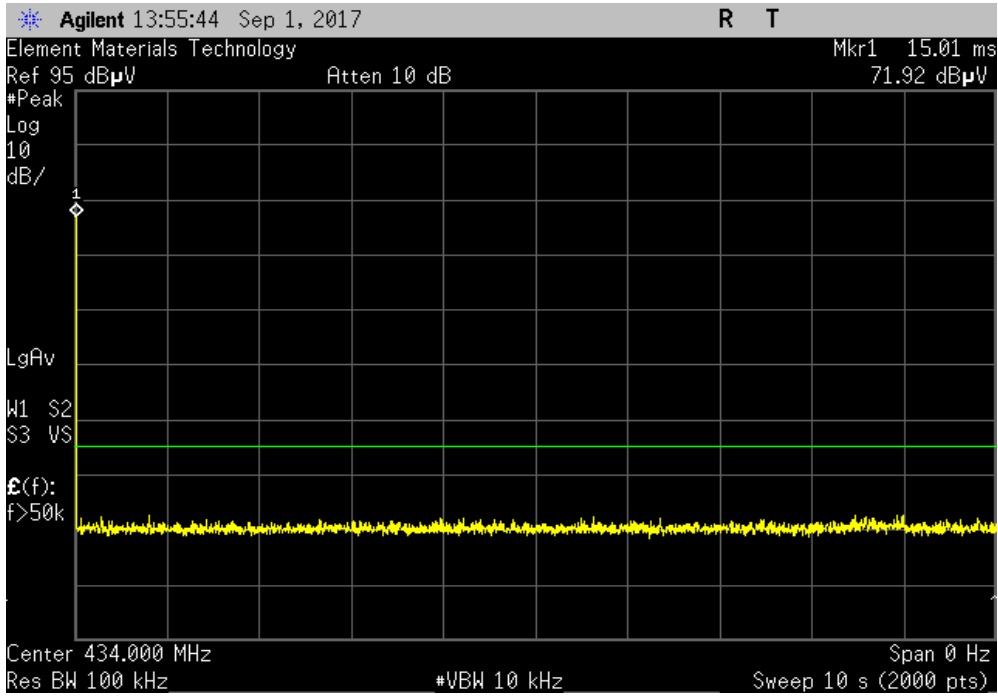

1s Interval			
	Pulse Width Type 1 (ms)	Pulse Width Type 2 (ms)	Limit
	N/A	N/A	N/A
			Result
			N/A

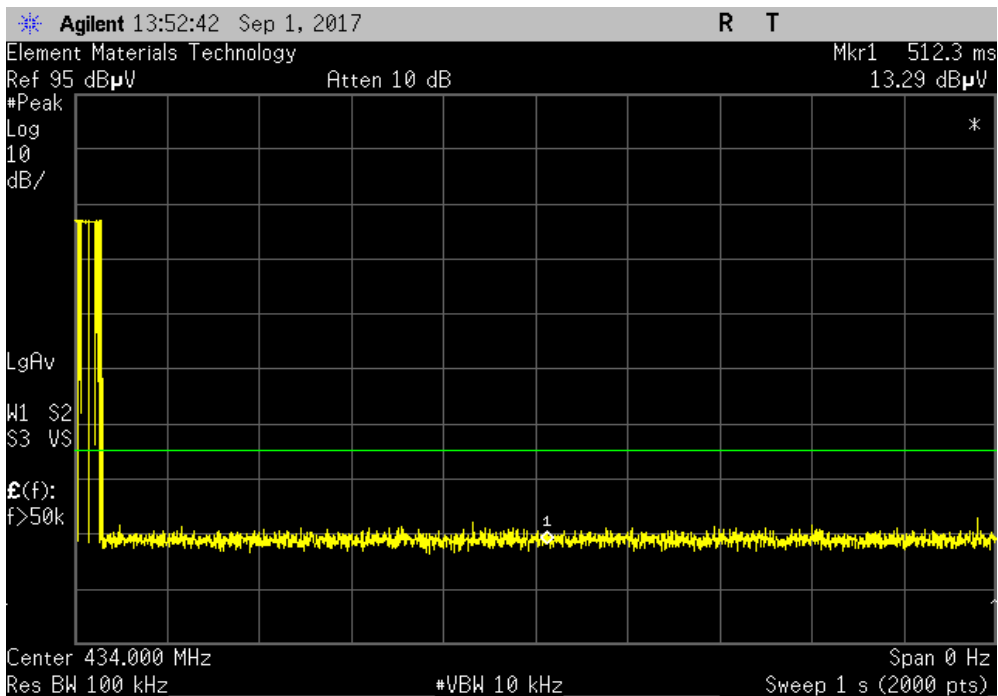

DUTY CYCLE



XMI 2017.02.08

		35ms Interval		Limit	Result
		Pulse Width Type 1 (ms)	Pulse Width Type 2 (ms)		
		0.3376	0.7174	N/A	N/A

