

	<u>Date(s) of Evaluation</u> 09/14-19, 11/18, 2011	<u>Test Report Serial No.</u> 060111AQZ-T1102-S90V	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 02, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

DECLARATION OF COMPLIANCE		SAR RF EXPOSURE EVALUATION		FCC & IC C2PC				
Test Lab Information	Name	CELLTECH LABS INC.						
	Address	21-364 Lougheed Road, Kelowna, B.C. V1X 7R8 Canada						
Test Lab Accreditation(s)	ISO/IEC 17025	A2LA Test Lab Certificate No. 2470.01						
Applicant Information	Name	HARRIS CORPORATION						
	Address	221 Jefferson Ridge Parkway, Lynchburg, VA 24501 U.S.A.						
Standard(s) Applied	FCC	47 CFR §2.1093	IC	Health Canada Safety Code 6				
Procedure(s) Applied	FCC	OET Bulletin 65, Supplement C	IC	RSS-102 Issue 4				
	FCC	KDB 447498 D01v04	FCC	KDB 643646 D01v01r01				
	IEEE	1528-2003	IEC	62209-2:2010				
Device Classification(s)	FCC	Licensed Non-Broadcast Transmitter Held to Face (TNF) - FCC Part 90						
	IC	Land Mobile Radio Transmitter/Receiver (27.41-960 MHz) - RSS-119						
Device Identifier(s)	FCC ID:	AQZ-XG-100P00						
	IC:	122D-XG100P00						
Date of DUT Receipt	June 01, 2011							
Dates of Evaluation	Sept. 14-19, Nov. 18, 2011							
DUT Serial No.	A40200001652							
DUT Part No.	12082-1000-01							
DUT Model(s)	Unity XG-100P							
Application Type(s)	Class II Permissive Change (Add New Antenna - Multi-band Helical 136-870 MHz - P/N: 12082-0295-01)							
Device-Under-Test (DUT) Description / Transmitter(s)	Portable Push-To-Talk (PTT) Multi-Band Radio Transceiver (Analog FM / Digital P25 FDMA) Class 1 Bluetooth - Pwr = > 60/f _(GHz) mW - Manuf. maximum conducted output power spec = 20 dBm (Average) Supports simultaneous transmission - antenna-to-antenna distance (Multi-band PTT to Bluetooth) = ~ 130 mm							
DUT Sample Revision No.s	Software: 12082-8900 1.0.2	RF Hardware: 12082-2010-07	Digital Hardware: 12082-4100-06					
Frequency Ranges Tested	150.8 - 173.4 MHz (FCC)	138.0 - 144.0 MHz (IC)	150.0 - 174 MHz (IC)					
Manufacturer's Rated Output Power	38.0 dBm	6.3 Watts	+0.5 / -0.2 dB	Conducted	VHF Band			
Antenna Type(s) Tested	Multi-band Helical (136-870 MHz)		Length: 165 mm	P/N: 12082-0295-01				
Battery Type(s) Tested	See manufacturer's accessory listing (Section 7.0)							
Body-worn Accessories Tested	See manufacturer's accessory listing (Section 7.0)							
Audio Accessories Tested	See manufacturer's accessory listing (Section 7.0)							
Max. SAR Level(s) Evaluated	FCC	Face-held	0.128 W/kg	1g	Body-worn	0.945 W/kg	1g	50% PTT duty factor
	IC	Face-held	0.287 W/kg	1g	Body-worn	1.77 W/kg	1g	50% PTT duty factor
Spatial Peak SAR Limit	FCC/IC	Head/Body	8.0 W/kg	1g	Occupational / Controlled Exposure			
Celltech Labs Inc. declares under its sole responsibility that this wireless portable device has demonstrated compliance with the Specific Absorption Rate (SAR) RF exposure requirements specified in FCC 47 CFR §2.1093 and Health Canada Safety Code 6 for the Occupational / Controlled Exposure environment. The device was tested in accordance with the measurement procedures specified in FCC OET Bulletin 65, Supplement C (Edition 01-01), Industry Canada RSS-102 Issue 4, IEEE Standard 1528-2003 and International Standard IEC 62209-2:2010. All measurements were performed in accordance with the SAR system manufacturer recommendations.								
I attest to the accuracy of data. All measurements were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.								
This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc.								
The results and statements contained in this report pertain only to the device(s) evaluated.								
Test Report Approved By			Sean Johnston	Lab Manager	Celltech Labs Inc.			





Applicant:	HARRIS Corporation	FCC ID:	AQZ-XG-100P00	IC:	122D-XG100P00	
DUT Type:	Portable Multi-band PTT Radio Transceiver	Model:	Unity XG-100P	VHF Band 138-174 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 1 of 136




TABLE OF CONTENTS	
1.0 INTRODUCTION	4
2.0 SAR MEASUREMENT SYSTEM	4
3.0 RF CONDUCTED OUTPUT POWER MEASUREMENTS	5
4.0 FCC POWER THRESHOLDS FOR PTT DEVICES ($F < 0.5$ GHZ)	5
5.0 NO. OF TEST CHANNELS (N_c)	6
6.0 SAR PROBE CALIBRATION & MEASUREMENT FREQUENCIES	6
7.0 MANUFACTURER'S DISCLOSED ACCESSORY LISTING	7
8.0 FLUID DIELECTRIC PARAMETERS	8
9.0 SAR TEST REDUCTION PROCEDURES (FCC KDB PUB. 643646 D01V01R01)	17
10.0 SAR MEASUREMENT SUMMARY	18
11.0 SAR SCALING (TUNE-UP TOLERANCE)	23
12.0 SIMULTANEOUS TRANSMISSION ASSESSMENT	23
13.0 DETAILS OF SAR EVALUATION	24
14.0 SAR EVALUATION PROCEDURES	24
15.0 SYSTEM PERFORMANCE CHECK	25
16.0 SIMULATED EQUIVALENT TISSUES	26
17.0 SAR LIMITS	26
18.0 ROBOT SYSTEM SPECIFICATIONS	27
19.0 PROBE SPECIFICATION	28
20.0 PHANTOM(S)	28
21.0 DEVICE HOLDER	28
22.0 TEST EQUIPMENT LIST	29
23.0 JUSTIFICATION FOR EXTENDED DIPOLE CALIBRATION	29
24.0 MEASUREMENT UNCERTAINTIES	30
25.0 REFERENCES	31
APPENDIX A - SAR MEASUREMENT PLOTS	32
APPENDIX B - SYSTEM PERFORMANCE CHECK PLOTS	83
APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS	90
APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS	100
APPENDIX E - DIPOLE CALIBRATION	133
APPENDIX F - PROBE CALIBRATION	134
APPENDIX G - BARSKI PLANAR PHANTOM CERTIFICATE OF CONFORMITY	135
APPENDIX H - AUDIO ACCESSORY COMBINATIONS (FCC KDB 643646 D01V01R01)	136

	<u>Date(s) of Evaluation</u> 09/14-19, 11/18, 2011	<u>Test Report Serial No.</u> 060111AQZ-T1102-S90V	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 02, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

REVISION HISTORY			
REVISION NO.	DESCRIPTION	IMPLEMENTED BY	RELEASE DATE
1.0	1st Release	Jon Hughes	October 27, 2011
1.1	2nd Release	Jon Hughes	November 21, 2011
	Re-evaluated 138.0 MHz Body SAR level with Belt-Clip acc. (Pg. 19, Table 2, SAR Plot #B1)		
1.2	Added IEEE 1528-2003 Dipole Reference Target SAR Values (Pg. 25, Table 8)	Jon Hughes	December 02, 2011
	3rd Release		
	Corrected body-worn SAR level (Plot #B1) listed in Section 11.0		
	Corrected body-worn SAR level (Plot #B1) listed in Section 12.0		

TEST REPORT SIGN-OFF			
DEVICE TESTED BY	REPORT PREPARED BY	QA REVIEW BY	REPORT APPROVED BY
Mike Meaker	Cheri Frangiadakis	Jon Hughes	Sean Johnston

Applicant:	HARRIS Corporation	FCC ID:	AQZ-XG-100P00	IC:	122D-XG100P00	
DUT Type:	Portable Multi-band PTT Radio Transceiver	Model:	Unity XG-100P	VHF Band 138-174 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 3 of 136

	<u>Date(s) of Evaluation</u> 09/14-19, 11/18, 2011	<u>Test Report Serial No.</u> 060111AQZ-T1102-S90V	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	  Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 02, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

1.0 INTRODUCTION

This measurement report demonstrates that the HARRIS Corporation Model: Unity XG-100P Portable Analog/Digital PTT Multi-Band Radio Transceiver (VHF Band), with the Class II Permissive Change(s) described in this report, complies with the SAR (Specific Absorption Rate) RF exposure requirements specified in FCC 47 CFR §2.1093 (see reference [1]) and Health Canada's Safety Code 6 (see reference [2]) for the Occupational / Controlled Exposure environment. The measurement procedures described in FCC OET Bulletin 65, Supplement C 01-01 (see reference [3]), IC RSS-102 Issue 4 (see reference [4]), IEEE Standard 1528-2003 (see reference [5]) and International Standard IEC 62209-2:2010 (see reference [6]) were employed. A description of the device, operating configuration, detailed summary of the test results, methodology and procedures used in the evaluation, equipment used and the various provisions of the rules are included within this test report.

2.0 SAR MEASUREMENT SYSTEM


Celltech Labs Inc. SAR measurement facility utilizes the Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY4 measurement system is comprised of the measurement server, robot controller, computer, near-field probe, probe alignment sensor, specific anthropomorphic mannequin (SAM) phantom, and various planar phantoms for head and/or body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the DASY4 measurement server. The DAE4 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the DASY4 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot uses a controller with a built in VME-bus computer.





DASY4 SAR System with Plexiglas side planar phantom



DASY4 SAR System with Baski Fiberglass Planar Phantom

Applicant:	HARRIS Corporation	FCC ID:	AQZ-XG-100P00	IC:	122D-XG100P00	
DUT Type:	Portable Multi-band PTT Radio Transceiver	Model:	Unity XG-100P	VHF Band 138-174 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 4 of 136

	<u>Date(s) of Evaluation</u> 09/14-19, 11/18, 2011	<u>Test Report Serial No.</u> 060111AQZ-T1102-S90V	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 02, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

3.0 RF CONDUCTED OUTPUT POWER MEASUREMENTS

MEASURED RF CONDUCTED OUTPUT POWER LEVELS					
Test Freq. (MHz)	Band	Mode	dBm	Watts	Method
138.0	IC	CW	38.30	6.76	Average Conducted
144.0	IC	CW	38.29	6.75	Average Conducted
150.8	FCC/IC	CW	38.27	6.71	Average Conducted
156.5	FCC/IC	CW	38.25	6.68	Average Conducted
162.1	FCC/IC	CW	38.28	6.73	Average Conducted
168.0	FCC/IC	CW	38.26	6.70	Average Conducted
173.4	FCC/IC	CW	38.30	6.76	Average Conducted

Notes


- The test channels were selected in accordance with the procedures specified in FCC KDB 447498 Section 6) c) (see reference [7]).
- The RF conducted output power levels of the DUT were measured by Celltech prior to the SAR evaluations using a Gigatronics 8652A Universal Power Meter at the external antenna connector of the radio in accordance with FCC 47 CFR §2.1046 (see reference [12]) and IC RSS-Gen (see reference [13]).



4.0 FCC POWER THRESHOLDS FOR PTT DEVICES ($f \leq 0.5$ GHz)

FCC SAR Evaluation Power Thresholds for PTT Devices, $f \leq 0.5$ GHz*		
Exposure Conditions	P mW (General Population)	P mW (Occupational)
Held to face, $d \geq 2.5$ cm	250	1250
Body-worn, $d \geq 1.5$ cm	200	1000
Body-worn, $d \geq 1.0$ cm	150	750

- The time-averaged output power, corresponding to the required PTT duty factor, is compared with these thresholds.
- The closest distance between the user and the device or its antenna is used to determine the power thresholds.

* Per FCC KDB 447498 D01v04 Section 5)b)i) (see reference [7]).

Applicant:	HARRIS Corporation	FCC ID:	AQZ-XG-100P00	IC:	122D-XG100P00	
DUT Type:	Portable Multi-band PTT Radio Transceiver	Model:	Unity XG-100P	VHF Band 138-174 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 5 of 136

	<u>Date(s) of Evaluation</u> 09/14-19, 11/18, 2011	<u>Test Report Serial No.</u> 060111AQZ-T1102-S90V	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 02, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

5.0 NO. OF TEST CHANNELS (N_c)

Antenna Part No.	Antenna Type	Band	Test Freq. Range	N_c	Test Frequencies (MHz)
12082-0295-01	Multi-Band Helical (136-870 MHz)	FCC	150.8 - 173.4 MHz	5	150.8, 156.5, 162.1, 168.0, 173.4
		IC	138.0 - 144.0 MHz	2	138.0, 144.0
		IC	150.0 - 174.0 MHz	5	150.8, 156.5, 162.1, 168.0, 173.4


Note: The number of test channels (N_c) were calculated in accordance with the procedures specified in FCC KDB 447498 Section 6) c) (see reference [7]).

6.0 SAR PROBE CALIBRATION & MEASUREMENT FREQUENCIES

The following procedures are recommended for measurements at 150 MHz - 3 GHz to minimize probe calibration and tissue dielectric parameter discrepancies. In general, SAR measurements below 300 MHz should be within ± 50 MHz of the probe calibration frequency. At 300 MHz to 3 GHz, measurements should be within ± 100 MHz of the probe calibration frequency. Measurements exceeding 50% of these intervals, ± 25 MHz < 300 MHz and ± 50 MHz ≥ 300 MHz, require additional steps (per FCC KDB 450824 D01 v01r01, SAR Probe Calibration and System Verification Considerations for Measurements at 150 MHz - 3 GHz - see reference [9]).

Probe Calibration Freq.	Device Measurement Freq.	Frequency Interval	± 25 MHz ≤ 300 MHz
150 MHz	138.0 MHz	12.0 MHz	< 25 MHz
	144.0 MHz	6.0 MHz	< 25 MHz
	150.8 MHz	0.8 MHz	< 25 MHz
	156.5 MHz	6.5 MHz	< 25 MHz
	162.1 MHz	12.1 MHz	< 25 MHz
	168.0 MHz	18.0 MHz	< 25 MHz
	173.4 MHz	23.4 MHz	< 25 MHz

Note: The probe calibration and measurement frequency interval is < 25 MHz; therefore the additional steps were not required.

Applicant:	HARRIS Corporation	FCC ID:	AQZ-XG-100P00	IC:	122D-XG100P00	
DUT Type:	Portable Multi-band PTT Radio Transceiver	Model:	Unity XG-100P	VHF Band 138-174 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 6 of 136

7.0 MANUFACTURER'S DISCLOSED ACCESSORY LISTING

Accessory ID # for Test Report	ACCESSORY CATEGORY: ANTENNA		
	Part Number	Description	SAR Evaluation
1	12082-0295-01	Multi-band Helical (136-870 MHz)	Yes
2	12082-0250-01 ¹	Multi-band Helical (136-870 MHz)	No
Accessory ID # for Test Report	ACCESSORY CATEGORY: BATTERY		
	Part Number	Description	SAR Evaluation
a	BT-010942-001 ²	Li-ion, 7.4V, 3200mAh - Non-intrinsically Safe	Yes
a	BT-010942-002 ²	Li-ion, 7.4V, 3200mAh - Intrinsically Safe	Yes
b	BKB191210/34 ³	Ni-MH, 7.5V, 2400mAh - Non-intrinsically Safe / Immersible	Yes
b	BKB191210/36 ³	Ni-MH, 7.5V, 2400mAh - Intrinsically Safe / Immersible	Yes
b	BKB191210/44 ³	Ni-MH, 7.5V, 2400mAh - Non-intrinsically Safe / Wind Driven Rain	Yes
c	12082-0304-01	Li-ion, 7.4V, 3650mAh	Yes
d	12082-0300-01	Li-poly, 7.4V, 3500mAh	Yes
e	12082-0309-01	Alkaline battery case - 6 x AA	Yes
Accessory ID # for Test Report	ACCESSORY CATEGORY: BODY-WORN		
	Part Number	Description	SAR Evaluation
B1	12082-1291-01	Metal Belt-Clip	Yes
B2	12082-0504-01	Nylon Strap (Used with Nylon Case)	Yes
B3	12082-0505-01	Leather Strap (Used with Leather Case)	Yes
B4	12082-0512-01	Nylon Case - Window - T-Strap	Yes
B5	12082-0510-01 ⁴	Nylon Case - Full - T-Strap	No
B6	12082-0501-01 ⁵	Leather Case - Half - T-Strap	No
B7	12082-0500-01	Leather Case - Full - T-Strap	Yes
B8	12082-0507-02 ⁶	Leather Case - Half - 3" Belt-Loop	No
B9	12082-0507-01 ⁶	Leather Case - Half - 2.5" Belt-Loop	No
B10	12082-0502-02	Leather Case - Full - 3" Belt-Loop	Yes
B11	12082-0502-01 ⁶	Leather Case - Full - 2.5" Belt-Loop	No
Accessory ID # for Test Report	ACCESSORY CATEGORY: AUDIO		
	Part Number	Description	SAR Evaluation
A1	12082-0600-01 ⁷	Standard Speaker-Microphone	Yes
A2	12082-0600-02 ^{7,8}	Standard Speaker-Microphone w/ Emergency Button	No
A3	12082-0601-01 ^{7,8}	Standard Speaker-Microphone w/ Emergency Button	No

Manufacturer's disclosed accessory listing information provided by HARRIS Corporation

Notes

- Antenna not evaluated for SAR (originally evaluated for new FCC ID Certification application submittal).
- Batteries are similar in construction and were grouped together for the SAR evaluations (see Appendix D).
- Batteries are similar in construction and were grouped together for the SAR evaluations (see Appendix D).
- Case is similar in construction to Body-worn Accessory #B4 and was not evaluated for SAR (see Appendix D).
- Case is similar in construction to Body-worn Accessory #B7 and was not evaluated for SAR (see Appendix D).
- Case is similar in construction to Body-worn Accessory #B10 and was not evaluated for SAR (see Appendix D).
- Preliminary evaluations were performed with #A1, #A2, & #A3 audio accessories to establish the default audio acc. (A1).
- Speaker-microphone audio accessories #A2 & #A3 were not evaluated for SAR based on KDB 643646 Pg. 10 Sect. 1)D)).

8.0 FLUID DIELECTRIC PARAMETERS

FLUID DIELECTRIC PARAMETERS						
Date: 09/14/2011		Frequency: 300 MHz			Tissue: Head	
Freq	Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity
0.200	51.71	0.84	45.3	0.87	14.15%	-3.45%
0.210	52.81	0.84	45.3	0.87	16.58%	-3.45%
0.220	50.15	0.84	45.3	0.87	10.71%	-3.45%
0.230	47.57	0.85	45.3	0.87	5.01%	-2.30%
0.240	48.74	0.86	45.3	0.87	7.59%	-1.15%
0.250	47.6	0.87	45.3	0.87	5.08%	0.00%
0.260	48.29	0.88	45.3	0.87	6.60%	1.15%
0.270	46.98	0.88	45.3	0.87	3.71%	1.15%
0.280	47.65	0.88	45.3	0.87	5.19%	1.15%
0.290	46.8	0.89	45.3	0.87	3.31%	2.30%
0.300	46.64	0.9	45.3	0.87	2.96%	3.45%
0.310	46.48	0.91	45.3	0.87	2.60%	4.60%
0.320	46.16	0.93	45.3	0.87	1.90%	6.90%
0.330	45.71	0.94	45.3	0.87	0.91%	8.05%
0.340	45.05	0.95	45.3	0.87	-0.55%	9.20%
0.350	44.35	0.94	45.3	0.87	-2.10%	8.05%
0.360	44.18	0.95	45.3	0.87	-2.47%	9.20%
0.370	44.2	0.96	45.3	0.87	-2.43%	10.34%
0.380	43.86	0.97	45.3	0.87	-3.18%	11.49%
0.390	42.78	0.98	45.3	0.87	-5.56%	12.64%
0.400	43.19	0.98	45.3	0.87	-4.66%	12.64%

Test Date	Fluid Type	Ambient Temperature	Fluid Temperature	Fluid Depth	Atmospheric Pressure	Relative Humidity	ρ (Kg/m ³)
Sep 14	300 Head	23.0°C	22.9°C	≥ 15 cm	101.1 kPa	33%	1000

FLUID DIELECTRIC PARAMETERS						
Date: 09/14/2011		Frequency: 150 MHz			Tissue: Body	
Freq	Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity
0.050	72.38	0.71	61.9	0.8	16.93%	-11.25%
0.060	83.16	0.74	61.9	0.8	34.35%	-7.50%
0.070	77.75	0.72	61.9	0.8	25.61%	-10.00%
0.080	66.59	0.74	61.9	0.8	7.58%	-7.50%
0.090	66.48	0.72	61.9	0.8	7.40%	-10.00%
0.100	67.37	0.76	61.9	0.8	8.84%	-5.00%
0.110	64.63	0.76	61.9	0.8	4.41%	-5.00%
0.120	63.39	0.74	61.9	0.8	2.41%	-7.50%
0.130	61.61	0.77	61.9	0.8	-0.47%	-3.75%
0.138*	61.8	0.77	61.9	0.8	-0.16%	-3.75%
0.140	61.84	0.77	61.9	0.8	-0.10%	-3.75%
0.150	62.35	0.77	61.9	0.8	0.73%	-3.75%
0.160	63.61	0.8	61.9	0.8	2.76%	0.00%
0.170	60.92	0.81	61.9	0.8	-1.58%	1.25%
0.1734*	61.4	0.803	61.9	0.8	-0.81%	0.38%
0.180	62.33	0.79	61.9	0.8	0.69%	-1.25%
0.190	63.12	0.81	61.9	0.8	1.97%	1.25%
0.200	60.71	0.8	61.9	0.8	-1.92%	0.00%
0.210	59.69	0.82	61.9	0.8	-3.57%	2.50%
0.220	61.2	0.81	61.9	0.8	-1.13%	1.25%
0.230	59.78	0.82	61.9	0.8	-3.42%	2.50%
0.240	59.6	0.82	61.9	0.8	-3.72%	2.50%
0.250	59.08	0.84	61.9	0.8	-4.56%	5.00%

*interpolated using DASY4 software

Test Date	Fluid Type	Ambient Temperature	Fluid Temperature	Fluid Depth	Atmospheric Pressure	Relative Humidity	ρ (Kg/m ³)
Sep 14	150 Body	23.0°C	22.8°C	≥ 15 cm	101.1 kPa	34%	1000

FLUID DIELECTRIC PARAMETERS						
Date: 09/15/2011		Frequency: 150 MHz			Tissue: Body	
Freq	Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity
0.050	65.61	0.74	61.9	0.8	5.99%	-7.50%
0.060	81.99	0.72	61.9	0.8	32.46%	-10.00%
0.070	69.99	0.76	61.9	0.8	13.07%	-5.00%
0.080	68.18	0.75	61.9	0.8	10.15%	-6.25%
0.090	69.96	0.73	61.9	0.8	13.02%	-8.75%
0.100	64.3	0.76	61.9	0.8	3.88%	-5.00%
0.110	65.16	0.78	61.9	0.8	5.27%	-2.50%
0.120	66.98	0.76	61.9	0.8	8.21%	-5.00%
0.130	64.13	0.76	61.9	0.8	3.60%	-5.00%
0.138*	64.4	0.768	61.9	0.8	4.04%	-4.00%
0.140	64.51	0.77	61.9	0.8	4.22%	-3.75%
0.150	64.41	0.8	61.9	0.8	4.05%	0.00%
0.160	60	0.8	61.9	0.8	-3.07%	0.00%
0.170	60.92	0.8	61.9	0.8	-1.58%	0.00%
0.1734*	61.4	0.807	61.9	0.8	-0.81%	0.88%
0.180	62.4	0.82	61.9	0.8	0.81%	2.50%
0.190	63.23	0.81	61.9	0.8	2.15%	1.25%
0.200	62.23	0.82	61.9	0.8	0.53%	2.50%
0.210	61.12	0.83	61.9	0.8	-1.26%	3.75%
0.220	61.33	0.82	61.9	0.8	-0.92%	2.50%
0.230	59.81	0.84	61.9	0.8	-3.38%	5.00%
0.240	61.24	0.84	61.9	0.8	-1.07%	5.00%
0.250	59.57	0.85	61.9	0.8	-3.76%	6.25%

*interpolated using DASY4 software

Test Date	Fluid Type	Ambient Temperature	Fluid Temperature	Fluid Depth	Atmospheric Pressure	Relative Humidity	ρ (Kg/m ³)
Sep 15	150 Body	23.0°C	22.5°C	≥ 15 cm	101.1 kPa	33%	1000

FLUID DIELECTRIC PARAMETERS						
Date: 09/16/2011		Frequency: 150 MHz			Tissue: Body	
Freq	Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity
0.050	103.33	0.71	61.9	0.8	66.93%	-11.25%
0.060	92.54	0.71	61.9	0.8	49.50%	-11.25%
0.070	65.55	0.73	61.9	0.8	5.90%	-8.75%
0.080	70.81	0.73	61.9	0.8	14.39%	-8.75%
0.090	71.72	0.76	61.9	0.8	15.86%	-5.00%
0.100	69.62	0.77	61.9	0.8	12.47%	-3.75%
0.110	66.47	0.77	61.9	0.8	7.38%	-3.75%
0.120	65.57	0.76	61.9	0.8	5.93%	-5.00%
0.130	63.89	0.76	61.9	0.8	3.21%	-5.00%
0.138*	63.5	0.768	61.9	0.8	2.58%	-4.00%
0.140	63.43	0.77	61.9	0.8	2.47%	-3.75%
0.150	63.41	0.78	61.9	0.8	2.44%	-2.50%
0.160	63.33	0.79	61.9	0.8	2.31%	-1.25%
0.170	63.92	0.79	61.9	0.8	3.26%	-1.25%
0.1734*	63.8	0.793	61.9	0.8	3.07%	-0.88%
0.180	63.64	0.8	61.9	0.8	2.81%	0.00%
0.190	63.2	0.82	61.9	0.8	2.10%	2.50%
0.200	62.21	0.8	61.9	0.8	0.50%	0.00%
0.210	61.37	0.81	61.9	0.8	-0.86%	1.25%
0.220	60.35	0.82	61.9	0.8	-2.50%	2.50%
0.230	60.85	0.8	61.9	0.8	-1.70%	0.00%
0.240	59.94	0.82	61.9	0.8	-3.17%	2.50%
0.250	59.36	0.83	61.9	0.8	-4.10%	3.75%

*interpolated using DASY4 software

Test Date	Fluid Type	Ambient Temperature	Fluid Temperature	Fluid Depth	Atmospheric Pressure	Relative Humidity	ρ (Kg/m ³)
Sep 16	150 Body	23.0°C	22.2°C	≥ 15 cm	101.1 kPa	33%	1000

FLUID DIELECTRIC PARAMETERS						
Date: 09/16/2011		Frequency: 150 MHz			Tissue: Head	
Freq	Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity
0.050	89.46	0.62	52.3	0.76	71.05%	-18.42%
0.060	82.01	0.63	52.3	0.76	56.81%	-17.11%
0.070	60.62	0.64	52.3	0.76	15.91%	-15.79%
0.080	62.02	0.64	52.3	0.76	18.59%	-15.79%
0.090	64.53	0.69	52.3	0.76	23.38%	-9.21%
0.100	61.64	0.69	52.3	0.76	17.86%	-9.21%
0.110	56.02	0.71	52.3	0.76	7.11%	-6.58%
0.120	55.7	0.71	52.3	0.76	6.50%	-6.58%
0.130	54.82	0.71	52.3	0.76	4.82%	-6.58%
0.140	53.37	0.71	52.3	0.76	2.05%	-6.58%
0.150	54.75	0.74	52.3	0.76	4.68%	-2.63%
0.160	52.91	0.74	52.3	0.76	1.17%	-2.63%
0.170	53.16	0.74	52.3	0.76	1.64%	-2.63%
0.1734*	53	0.743	52.3	0.76	1.34%	-2.24%
0.180	52.55	0.75	52.3	0.76	0.48%	-1.32%
0.190	51.7	0.76	52.3	0.76	-1.15%	0.00%
0.200	51.24	0.75	52.3	0.76	-2.03%	-1.32%
0.210	50.84	0.77	52.3	0.76	-2.79%	1.32%
0.220	49.41	0.77	52.3	0.76	-5.53%	1.32%
0.230	48.9	0.79	52.3	0.76	-6.50%	3.95%
0.240	49.28	0.8	52.3	0.76	-5.77%	5.26%
0.250	47.91	0.81	52.3	0.76	-8.39%	6.58%

*interpolated using DASY4 software

Test Date	Fluid Type	Ambient Temperature	Fluid Temperature	Fluid Depth	Atmospheric Pressure	Relative Humidity	ρ (Kg/m ³)
Sep 16	150 Head	23.0°C	22.6°C	≥ 15 cm	101.1 kPa	33%	1000

FLUID DIELECTRIC PARAMETERS						
Date: 09/19/2011		Frequency: 300 MHz			Tissue: Head	
Freq	Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity
0.200	48.95	0.79	45.3	0.87	8.06%	-9.20%
0.210	48.31	0.78	45.3	0.87	6.64%	-10.34%
0.220	48.93	0.78	45.3	0.87	8.01%	-10.34%
0.230	48.79	0.8	45.3	0.87	7.70%	-8.05%
0.240	47.85	0.79	45.3	0.87	5.63%	-9.20%
0.250	47.4	0.81	45.3	0.87	4.64%	-6.90%
0.260	47.02	0.83	45.3	0.87	3.80%	-4.60%
0.270	47.23	0.83	45.3	0.87	4.26%	-4.60%
0.280	46.36	0.82	45.3	0.87	2.34%	-5.75%
0.290	45.95	0.85	45.3	0.87	1.43%	-2.30%
0.300	46.02	0.84	45.3	0.87	1.59%	-3.45%
0.310	45.47	0.86	45.3	0.87	0.38%	-1.15%
0.320	44.57	0.87	45.3	0.87	-1.61%	0.00%
0.330	44.58	0.87	45.3	0.87	-1.59%	0.00%
0.340	44.53	0.89	45.3	0.87	-1.70%	2.30%
0.350	43.98	0.89	45.3	0.87	-2.91%	2.30%
0.360	43.17	0.91	45.3	0.87	-4.70%	4.60%
0.370	43.68	0.91	45.3	0.87	-3.58%	4.60%
0.380	43.35	0.92	45.3	0.87	-4.30%	5.75%
0.390	42.88	0.91	45.3	0.87	-5.34%	4.60%
0.400	42.54	0.95	45.3	0.87	-6.09%	9.20%

Test Date	Fluid Type	Ambient Temperature	Fluid Temperature	Fluid Depth	Atmospheric Pressure	Relative Humidity	ρ (Kg/m ³)
Sep 19	300 Head	23.0°C	22.8°C	≥ 15 cm	101.1 kPa	30%	1000

FLUID DIELECTRIC PARAMETERS						
Date: 09/19/2011		Frequency: 150 MHz			Tissue: Head	
Freq	Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity
0.050	102.06	0.71	52.3	0.76	95.14%	-6.58%
0.060	84.75	0.69	52.3	0.76	62.05%	-9.21%
0.070	72.04	0.69	52.3	0.76	37.74%	-9.21%
0.080	70.97	0.73	52.3	0.76	35.70%	-3.95%
0.090	63.55	0.72	52.3	0.76	21.51%	-5.26%
0.100	62.21	0.73	52.3	0.76	18.95%	-3.95%
0.110	61.67	0.75	52.3	0.76	17.92%	-1.32%
0.120	57.19	0.73	52.3	0.76	9.35%	-3.95%
0.130	55.69	0.74	52.3	0.76	6.48%	-2.63%
0.138*	54.5	0.756	52.3	0.76	4.21%	-0.53%
0.140	54.15	0.76	52.3	0.76	3.54%	0.00%
0.150	56.53	0.77	52.3	0.76	8.09%	1.32%
0.160	56.87	0.75	52.3	0.76	8.74%	-1.32%
0.170	54.68	0.78	52.3	0.76	4.55%	2.63%
0.1734*	53.7	0.783	52.3	0.76	2.68%	3.03%
0.180	51.77	0.79	52.3	0.76	-1.01%	3.95%
0.190	51.86	0.79	52.3	0.76	-0.84%	3.95%
0.200	51.77	0.78	52.3	0.76	-1.01%	2.63%
0.210	51.21	0.81	52.3	0.76	-2.08%	6.58%
0.220	49.83	0.82	52.3	0.76	-4.72%	7.89%
0.230	48.97	0.84	52.3	0.76	-6.37%	10.53%
0.240	49.62	0.83	52.3	0.76	-5.12%	9.21%
0.250	48.84	0.85	52.3	0.76	-6.62%	11.84%

*interpolated using DASY4 software

Test Date	Fluid Type	Ambient Temperature	Fluid Temperature	Fluid Depth	Atmospheric Pressure	Relative Humidity	ρ (Kg/m ³)
Sep 19	150 Head	23.0°C	22.6°C	≥ 15 cm	101.1 kPa	30%	1000



FLUID DIELECTRIC PARAMETERS						
Date: 11/18/2011		Frequency: 300 MHz			Tissue: Head	
Freq	Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity
0.200	51.12	0.76	45.3	0.87	12.85%	-12.64%
0.210	50.05	0.78	45.3	0.87	10.49%	-10.34%
0.220	49.28	0.8	45.3	0.87	8.79%	-8.05%
0.230	48.53	0.79	45.3	0.87	7.13%	-9.20%
0.240	48.62	0.79	45.3	0.87	7.33%	-9.20%
0.250	47.59	0.81	45.3	0.87	5.06%	-6.90%
0.260	47.25	0.82	45.3	0.87	4.30%	-5.75%
0.270	47.79	0.82	45.3	0.87	5.50%	-5.75%
0.280	47.06	0.84	45.3	0.87	3.89%	-3.45%
0.290	46.74	0.84	45.3	0.87	3.18%	-3.45%
0.300	45.68	0.84	45.3	0.87	0.84%	-3.45%
0.310	46.24	0.86	45.3	0.87	2.08%	-1.15%
0.320	46.44	0.87	45.3	0.87	2.52%	0.00%
0.330	45.7	0.88	45.3	0.87	0.88%	1.15%
0.340	45.06	0.88	45.3	0.87	-0.53%	1.15%
0.350	45.15	0.89	45.3	0.87	-0.33%	2.30%
0.360	44.94	0.89	45.3	0.87	-0.79%	2.30%
0.370	44.78	0.91	45.3	0.87	-1.15%	4.60%
0.380	43.78	0.91	45.3	0.87	-3.36%	4.60%
0.390	43.97	0.93	45.3	0.87	-2.94%	6.90%
0.400	43.34	0.92	45.3	0.87	-4.33%	5.75%

Test Date	Fluid Type	Ambient Temperature	Fluid Temperature	Fluid Depth	Atmospheric Pressure	Relative Humidity	ρ (Kg/m ³)
Nov 18	300 Head	21.0 °C	20.8 °C	≥ 15 cm	101.1 kPa	32%	1000

FLUID DIELECTRIC PARAMETERS						
Date: 11/18/2011		Frequency: 150 MHz			Tissue: Body	
Freq	Test_e	Test_s	Target_e	Target_s	Deviation Permittivity	Deviation Conductivity
0.050	81.08	0.75	61.9	0.8	30.99%	-6.25%
0.060	80.87	0.71	61.9	0.8	30.65%	-11.25%
0.070	78.97	0.74	61.9	0.8	27.58%	-7.50%
0.080	68.54	0.72	61.9	0.8	10.73%	-10.00%
0.090	68.19	0.78	61.9	0.8	10.16%	-2.50%
0.100	66.06	0.77	61.9	0.8	6.72%	-3.75%
0.110	68.1	0.78	61.9	0.8	10.02%	-2.50%
0.120	67.08	0.77	61.9	0.8	8.37%	-3.75%
0.130	62.94	0.79	61.9	0.8	1.68%	-1.25%
0.138*	62.5	0.774	61.9	0.8	0.97%	-3.25%
0.140	62.35	0.77	61.9	0.8	0.73%	-3.75%
0.150	63.85	0.77	61.9	0.8	3.15%	-3.75%
0.160	61.43	0.78	61.9	0.8	-0.76%	-2.50%
0.170	62.49	0.78	61.9	0.8	0.95%	-2.50%
0.180	61.81	0.81	61.9	0.8	-0.15%	1.25%
0.190	61.95	0.79	61.9	0.8	0.08%	-1.25%
0.200	61.9	0.81	61.9	0.8	0.00%	1.25%
0.210	60.97	0.81	61.9	0.8	-1.50%	1.25%
0.220	60.47	0.81	61.9	0.8	-2.31%	1.25%
0.230	60.23	0.82	61.9	0.8	-2.70%	2.50%
0.240	61.06	0.83	61.9	0.8	-1.36%	3.75%
0.250	60.7	0.84	61.9	0.8	-1.94%	5.00%


*interpolated using DASY4 software

Test Date	Fluid Type	Ambient Temperature	Fluid Temperature	Fluid Depth	Atmospheric Pressure	Relative Humidity	ρ (Kg/m ³)
Nov 18	150 Body	22.0 °C	20.7 °C	≥ 15 cm	101.1 kPa	30%	1000

	<u>Date(s) of Evaluation</u> 09/14-19, 11/18, 2011	<u>Test Report Serial No.</u> 060111AQZ-T1102-S90V	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 02, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

9.0 SAR TEST REDUCTION PROCEDURES (FCC KDB PUB. 643646 D01v01r01)

- a. Face-held Configuration - Default Battery Selection - per FCC KDB 643646, Page 2, Section 1) A): *"When multiple standard batteries are supplied with a radio, the battery with the highest capacity is considered the default battery for making head SAR measurements."*
- b. Body-worn Configuration - Default Battery Selection - per FCC KDB 643646, Page 5, Section 1) A): *"Start by testing a PTT radio with the thinnest battery and a standard (default) body-worn accessory that are both supplied with the radio and, if applicable, a default audio accessory....."*
- c. Body-worn Configuration - Default Body-worn Accessory Selection - Per FCC KDB 643646, Page 5, Section 1) A): *"When multiple default body-worn accessories are supplied with a radio, the standard body-worn accessory expected to result in the highest SAR based on its construction and exposure conditions is considered the default body-worn accessory for making body-worn measurements."*
- d. Body-worn Configuration - Additional Body-worn Accessories - Per FCC KDB 643646, Page 7, Section 4): *"Repeat the above test sequence for additional body-worn accessories by replacing "default body-worn" accessory with each "additional body-worn" accessory. For body-worn accessories with similar construction and operating configurations, test only the body-worn accessory within the group that is expected to result in the highest SAR."*
- e. Body-worn Configuration - Default Audio Accessory Selection - Per FCC KDB 643646, Page 10, Section 1): *"For audio accessories with similar construction and operating requirements, test only the audio accessory within the group that is expected to result in the highest SAR, with respect to changes in RF characteristics and exposure conditions for the combination. If it is unclear which audio accessory within a group of similar accessories is expected to result in the highest SAR, good engineering judgment and preliminary testing should be applied to select the accessory that is expected to result in the highest SAR.*
- 1) *For the audio accessories that have not been tested in the body-worn accessories test sequences in the previous section, , the highest SAR for an antenna, body-worn accessory and battery combination tested in the body-worn accessories sequences applicable to an audio accessory is used to determine SAR test requirements according to the following:*
- A) ≤ 4.0 W/kg, SAR tests for that audio accessory is not necessary
- B) > 4.0 W/kg and ≤ 6.0 W/kg test that audio accessory using the highest body-worn SAR combination (antenna, battery and body-worn accessory) and channel configuration identified in 1) that is applicable to the audio accessory. Due to the complexity of body-worn and audio accessory combinations, the applicable test combinations must be clearly described and identified in the SAR report
- C) > 6.0 W/kg, test on all required channels for that audio accessory
- D) When the SAR measured in B) is > 6.0 W/kg, test that audio accessory on the required immediately adjacent channels; testing of the other required channels still needs consideration
- I) if the SAR measured in D) is > 7.0 W/kg and it is one of the accessories within a group of similar audio accessories, test all other audio accessories within that group of similar audio accessories using the highest body-worn SAR combination (antenna, battery and body-worn accessory) and channel configuration identified in 1) that is applicable to the audio accessory
- a) when the SAR for a similar audio accessory in I) is > 7.0 W/kg, test that audio accessory on all required channels using the combination in I)."

Applicant:	HARRIS Corporation	FCC ID:	AQZ-XG-100P00	IC:	122D-XG100P00	
DUT Type:	Portable Multi-band PTT Radio Transceiver	Model:	Unity XG-100P	VHF Band	138-174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 17 of 136

10.0 SAR MEASUREMENT SUMMARY

TABLE 1		FACE-HELD SAR EVALUATION RESULTS																	
Device-Under-Test		Unity XG-100P Multi-band PTT Radio Transceiver (VHF Band)																	
Antenna Acc. ID #		1																	
Test Date(s)		September 16 & 19, 2011																	
C		1	2	3	4	5	6	7	8	9	10								
R	Test Freq. (MHz)	Cond. Power Before Test (W)	SAR W/kg 1g		SAR W/kg 1g		SAR W/kg 1g		SAR W/kg 1g		SAR W/kg 1g								
			Battery a - Additional		Battery b - Additional		Battery c - Default		Battery d - Additional		Battery e - Additional								
			100% ptt d/f	50% ptt d/f	100% ptt d/f	50% ptt d/f	100% ptt d/f	50% ptt d/f	100% ptt d/f	50% ptt d/f	100% ptt d/f	50% ptt d/f	100% ptt d/f	50% ptt d/f					
			Drift (dB)	50%+droop	Drift (dB)	50%+droop	Drift (dB)	50%+droop	Drift (dB)	50%+droop	Drift (dB)	50%+droop	Drift (dB)	50%+droop	Drift (dB)	50%+droop			
1	138.0 (IC only)	6.76	F1	0.504	0.252	F2	0.495	0.248	F3	0.573	0.287	F4	0.553	0.277	F5	0.528	0.264		
2				-0.356	0.274		-0.325	0.267		-0.691	0.336		-0.372	0.301		-0.795	0.317		
3	144.0	6.75	N/A		N/A		N/A		N/A		N/A		N/A		N/A				
4	150.8	6.71	N/A		N/A		N/A		N/A		N/A		N/A		N/A				
5	156.5	6.68	N/A		N/A		N/A		N/A		N/A		N/A		N/A				
6	162.1	6.73	N/A		N/A		N/A		N/A		N/A		N/A		N/A				
7	168.0	6.70	N/A		N/A		N/A		N/A		N/A		N/A		N/A				
8	173.4	6.76	F6	0.244	0.122	F7	0.223	0.112	F8	0.255	0.128	F9	0.240	0.120	F10	0.219	0.110		
9				-0.902	0.150		-0.878	0.136		-0.924	0.158		-0.946	0.149		-1.04	0.139		
SAR LIMITS				HEAD				SPATIAL PEAK				RF EXPOSURE CATEGORY							
FCC 47 CFR 2.1093				Health Canada Safety Code 6				8.0 W/kg				1 gram average				Occupational / Controlled			
Notes																			
C = Column; R = Row						Fx (F = Face) denotes the corresponding Face SAR Plot # as shown in Appendix A													
Test Mode = CW (Unmodulated Continuous Wave)						Phantom = Side Planar Phantom													
Front of DUT Distance to Planar Phantom (see Appendix D)						Shortest Antenna Distance to Planar Phantom (see Appendix D)													
2.5 cm						5.0 cm													
Test Procedures in accordance with FCC KDB 643646 (see reference [8])																			
1. For face-held configuration, battery "c" was selected as the default battery based on the highest capacity battery.																			
2. When the head SAR of an antenna tested on the highest output power channel with the default battery is ≤ 3.5 W/kg (F3, F8), testing of all other required channels is not necessary for that antenna.																			
3. When the SAR for all antennas tested using the default battery are ≤ 4.0 W/kg (F3, F8), test additional batteries using the antenna and channel configuration that resulted in the highest SAR among all antennas (F1, F2, F4, F5, F6, F7, F9, F10).																			
4. When test reduction applies, the data table entries for such configurations are denoted with N/A (Not Applicable).																			
5. For the SAR evaluations with battery (e), the alkaline cells were replaced midway through the zoom scan.																			

TABLE 2	BODY-WORN SAR EVALUATION RESULTS
----------------	---

Device-Under-Test	Unity XG-100P Multi-band PTT Radio Transceiver (VHF Band)
Antenna Acc. ID #	1
Body-worn Acc. ID #	B1 (Default)
Audio Acc. ID #	A1 (Default)
Test Date(s)	September 14 & 16, November 18*, 2011

C			1	2	3	4	5	6	7	8	9	10					
R	Test Freq. (MHz)	Cond. Power Before Test (W)	SAR W/kg 1g		SAR W/kg 1g		SAR W/kg 1g		SAR W/kg 1g		SAR W/kg 1g						
			Battery a - Additional		Battery b - Default		Battery c - Additional		Battery d - Additional		Battery e - Additional						
			100% ptt d/f	50% ptt d/f	100% ptt d/f	50% ptt d/f	100% ptt d/f	50% ptt d/f	100% ptt d/f	50% ptt d/f	100% ptt d/f	50% ptt d/f	100% ptt d/f	50% ptt d/f			
			Drift (dB)	50%+droop	Drift (dB)	50%+droop	Drift (dB)	50%+droop	Drift (dB)	50%+droop	Drift (dB)	50%+droop	Drift (dB)	50%+droop			
1	138.0 (IC only)	6.76	B1*	3.54	1.77	B2	1.91	0.955	B3	2.71	1.36	B4	1.66	0.830	B5	3.41	1.71
2				-0.181	1.85		-0.487	1.07		-0.720	1.60		-0.394	0.909		-0.020	1.71
3	144.0	6.75	N/A		N/A		N/A		N/A		N/A						
4	150.8	6.71	N/A		N/A		N/A		N/A		N/A						
5	156.5	6.68	N/A		N/A		N/A		N/A		N/A						
6	162.1	6.73	N/A		N/A		N/A		N/A		N/A						
7	168.0	6.70	N/A		N/A		N/A		N/A		N/A						
8	173.4	6.76	B6	1.35	0.675	B7	1.19	0.595	B8	1.66	0.830	B9	1.22	0.610	B10	1.89	0.945
9				-0.994	0.849		-0.634	0.689		-0.552	0.942		-0.735	0.722		-0.254	1.00

SAR LIMITS	BODY	SPATIAL PEAK	RF EXPOSURE CATEGORY
FCC 47 CFR 2.1093	Health Canada Safety Code 6	8.0 W/kg	1 gram average
			Occupational / Controlled

Notes	
C = Column; R = Row	Bx (B = Body) denotes the corresponding Body SAR Plot # as shown in Appendix A
Test Mode = CW (Unmodulated Continuous Wave)	Phantom = Side Planar Phantom
Back of DUT Distance to Planar Phantom (see Appendix D)	Shortest Antenna Distance to Planar Phantom (see Appendix D)
1.0 cm	1.7 cm

- Test Procedures in accordance with FCC KDB 643646 (see reference [8])**
- For body-worn configuration, battery "b" was selected as the default battery based on the thinnest battery.
 - When the body SAR of an antenna tested on the highest output power channel with the thinnest battery is ≤ 3.5 W/kg (B2, B7), testing of all other required channels is not necessary for that antenna.
 - When the SAR for all antennas tested on the highest output power channel with the thinnest battery is ≤ 4.0 W/kg (B2, B7), test additional batteries with the default body-worn accessory and default audio accessory using the antenna and channel configuration that resulted in the highest SAR among all antennas (B1, B3, B4, B5, B6, B8, B9, B10).
 - When test reduction applies, the data table entries for such configurations are denoted with N/A (Not Applicable).
 - For the SAR evaluations with battery "e", the alkaline cells were replaced midway through the zoom scan.



<u>Date(s) of Evaluation</u> 09/14-19, 11/18, 2011	<u>Test Report Serial No.</u> 060111AQZ-T1102-S90V	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)
<u>Test Report Issue Date</u> December 02, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)



TABLE 3		BODY-WORN SAR EVALUATION RESULTS																				
Device-Under-Test		Unity XG-100P Multi-band PTT Radio Transceiver (VHF Band)																				
Antenna Acc. ID #		1																				
Body-worn Acc. ID #		B4 (Additional)																				
Audio Acc. ID #		A1 (Default)																				
Test Date(s)		September 14 & 15, 2011																				
C		1		2		3		4		5		6		7		8		9		10		
R	Test Freq. (MHz)	Cond. Power Before Test (W)	SAR W/kg 1g				SAR W/kg 1g				SAR W/kg 1g				SAR W/kg 1g				SAR W/kg 1g			
			Battery a - Additional				Battery b - Default				Battery c - Additional				Battery d - Additional				Battery e - Additional			
			100% ptt d/f		50% ptt d/f		100% ptt d/f		50% ptt d/f		100% ptt d/f		50% ptt d/f		100% ptt d/f		50% ptt d/f		100% ptt d/f		50% ptt d/f	
			Drift (dB)		50%+droop		Drift (dB)		50%+droop		Drift (dB)		50%+droop		Drift (dB)		50%+droop		Drift (dB)		50%+droop	
1	138.0 (IC only)	6.76	B11	1.80	0.900	B12	1.97	0.985	B13	1.96	0.980	B14	1.87	0.935	see note 5							
2				-0.327	0.970		-0.381	1.08		-0.316	1.05		-0.463	1.04								
3	144.0	6.75	N/A				N/A				N/A				N/A							
4	150.8	6.71	N/A				N/A				N/A				N/A							
5	156.5	6.68	N/A				N/A				N/A				N/A							
6	162.1	6.73	N/A				N/A				N/A				N/A							
7	168.0	6.70	N/A				N/A				N/A				N/A							
8	173.4	6.76	B15	0.849	0.425	B16	0.819	0.410	B17	0.867	0.434	B18	0.822	0.411	see note 5							
9				-0.686	0.497		-0.624	0.473		-0.717	0.511		-0.654	0.478								
SAR LIMITS			BODY				SPATIAL PEAK				RF EXPOSURE CATEGORY											
FCC 47 CFR 2.1093			Health Canada Safety Code 6				8.0 W/kg				1 gram average				Occupational / Controlled							
Notes																						
C = Column; R = Row												Bx (B = Body) denotes the corresponding Body SAR Plot # as shown in Appendix A										
Test Mode = CW (Unmodulated Continuous Wave)												Phantom = Side Planar Phantom										
Back of DUT Distance to Planar Phantom (see Appendix D)												Shortest Antenna Distance to Planar Phantom (see Appendix D)										
1.5 cm												2.2 cm										
Test Procedures in accordance with FCC KDB 643646 (see reference [8])																						
1. For body-worn configuration, battery "b" was selected as the default battery based on the thinnest battery.																						
2. When the body SAR of an antenna tested on the highest output power channel with the thinnest battery is ≤ 3.5 W/kg (B12, B16), testing of all other required channels is not necessary for that antenna.																						
3. When the SAR for all antennas tested on the highest output power channel with the thinnest battery is ≤ 4.0 W/kg (B12, B16), test additional batteries with the additional body-worn accessory and default audio accessory using the antenna and channel configuration that resulted in the highest SAR among all antennas (B11, B13, B14, B15, B17, B18).																						
4. When test reduction applies, the data table entries for such configurations are denoted with N/A (Not Applicable).																						
5. Battery "e" was not evaluated for body-worn SAR with body-worn accessory #B4, due to the radio could not transmit continuously through the area scan and the zoom scan without having to replace the alkaline batteries several times. Battery "e" was evaluated with the maximum body-worn SAR accessory configuration only.																						

TABLE 4		BODY-WORN SAR EVALUATION RESULTS									
---------	--	----------------------------------	--	--	--	--	--	--	--	--	--

Device-Under-Test	Unity XG-100P Multi-band PTT Radio Transceiver (VHF Band)									
Antenna Acc. ID #	1									
Body-worn Acc. ID #	B7 (Additional)									
Audio Acc. ID #	A1 (Default)									
Test Date(s)	September 15, 2011									

C			1	2	3	4	5	6	7	8	9	10			
R	Test Freq. (MHz)	Cond. Power Before Test (W)	SAR W/kg 1g		SAR W/kg 1g		SAR W/kg 1g		SAR W/kg 1g		SAR W/kg 1g				
			Battery a - Additional		Battery b - Default		Battery c - Additional		Battery d - Additional		Battery e - Additional				
			100% ptt d/f	50% ptt d/f	100% ptt d/f	50% ptt d/f	100% ptt d/f	50% ptt d/f	100% ptt d/f	50% ptt d/f	100% ptt d/f	50% ptt d/f	100% ptt d/f	50% ptt d/f	
			Drift (dB)	50%+droop	Drift (dB)	50%+droop	Drift (dB)	50%+droop	Drift (dB)	50%+droop	Drift (dB)	50%+droop	Drift (dB)	50%+droop	
1	138.0 (IC only)	6.76	B19	1.22	0.610	B20	2.05	1.03	B21	1.33	0.665	B22	1.42	0.710	see note 5
2				-0.511	0.686		-0.694	1.20		-0.412	0.731		-0.605	0.816	
3	144.0	6.75	N/A		N/A		N/A		N/A		N/A		N/A		
4	150.8	6.71	N/A		N/A		N/A		N/A		N/A		N/A		
5	156.5	6.68	N/A		N/A		N/A		N/A		N/A		N/A		
6	162.1	6.73	N/A		N/A		N/A		N/A		N/A		N/A		
7	168.0	6.70	N/A		N/A		N/A		N/A		N/A		N/A		
8	173.4	6.76	B23	0.590	0.295	B24	0.609	0.305	B25	0.619	0.310	B26	0.601	0.301	see note 5
9				-0.748	0.350		-0.699	0.358		-0.809	0.373		-0.701	0.353	

SAR LIMITS				BODY		SPATIAL PEAK		RF EXPOSURE CATEGORY			
FCC 47 CFR 2.1093				Health Canada Safety Code 6		8.0 W/kg		1 gram average		Occupational / Controlled	

Notes									
C = Column; R = Row					Bx (B = Body) denotes the corresponding Body SAR Plot # as shown in Appendix A				
Test Mode = CW (Unmodulated Continuous Wave)					Phantom = Side Planar Phantom				
Back of DUT Distance to Planar Phantom (see Appendix D)					Shortest Antenna Distance to Planar Phantom (see Appendix D)				
1.5 cm					2.2 cm				

- Test Procedures in accordance with FCC KDB 643646 (see reference [8])**
- For body-worn configuration, battery "b" was selected as the default battery based on the thinnest battery.
 - When the body SAR of an antenna tested on the highest output power channel with the thinnest battery is ≤ 3.5 W/kg (B20, B24), testing of all other required channels is not necessary for that antenna.
 - When the SAR for all antennas tested on the highest output power channel with the thinnest battery is ≤ 4.0 W/kg (B20, B24), test additional batteries with the additional body-worn accessory and default audio accessory using the antenna and channel configuration that resulted in the highest SAR among all antennas (B19, B21, B22, B23, B25, B26).
 - When test reduction applies, the data table entries for such configurations are denoted with N/A (Not Applicable).
 - Battery "e" was not evaluated for body-worn SAR with body-worn accessory #B4, due to the radio could not transmit continuously through the area scan and the zoom scan without having to replace the alkaline batteries several times. Battery "e" was evaluated with the maximum body-worn SAR accessory configuration only.

TABLE 5	BODY-WORN SAR EVALUATION RESULTS
----------------	---

Device-Under-Test	Unity XG-100P Multi-band PTT Radio Transceiver (VHF Band)									
Antenna Acc. ID #	1									
Body-worn Acc. ID #	B10 (Additional)									
Audio Acc. ID #	A1 (Default)									
Test Date(s)	September 15 & 16, 2011									

C			1	2	3	4	5	6	7	8	9	10			
R	Test Freq. (MHz)	Cond. Power Before Test (W)	SAR W/kg 1g		SAR W/kg 1g		SAR W/kg 1g		SAR W/kg 1g		SAR W/kg 1g				
			Battery a - Additional		Battery b - Default		Battery c - Additional		Battery d - Additional		Battery e - Additional				
			100% ptt d/f	50% ptt d/f	100% ptt d/f	50% ptt d/f	100% ptt d/f	50% ptt d/f	100% ptt d/f	50% ptt d/f	100% ptt d/f	50% ptt d/f	100% ptt d/f	50% ptt d/f	
			Drift (dB)	50%+droop	Drift (dB)	50%+droop	Drift (dB)	50%+droop	Drift (dB)	50%+droop	Drift (dB)	50%+droop	Drift (dB)	50%+droop	
1	138.0 (IC only)	6.76	B27	0.294	0.147	B28	0.333	0.167	B29	0.487	0.244	B30	0.370	0.185	see note 5
2				-0.644	0.170		-0.384	0.182		-0.192	0.255		-0.843	0.225	
3	144.0	6.75	N/A		N/A		N/A		N/A		N/A		N/A		
4	150.8	6.71	N/A		N/A		N/A		N/A		N/A		N/A		
5	156.5	6.68	N/A		N/A		N/A		N/A		N/A		N/A		
6	162.1	6.73	N/A		N/A		N/A		N/A		N/A		N/A		
7	168.0	6.70	N/A		N/A		N/A		N/A		N/A		N/A		
8	173.4	6.76	B31	0.232	0.116	B32	0.233	0.117	B33	0.225	0.113	B34	0.241	0.121	see note 5
9				-0.914	0.143		-1.16	0.152		-0.894	0.138		-0.964	0.150	

SAR LIMITS	BODY	SPATIAL PEAK	RF EXPOSURE CATEGORY
FCC 47 CFR 2.1093	Health Canada Safety Code 6	8.0 W/kg	1 gram average
			Occupational / Controlled

Notes	
C = Column; R = Row	Bx (B = Body) denotes the corresponding Body SAR Plot # as shown in Appendix A
Test Mode = CW (Unmodulated Continuous Wave)	Phantom = Side Planar Phantom
Back of DUT Distance to Planar Phantom (see Appendix D)	Shortest Antenna Distance to Planar Phantom (see Appendix D)
4.5 cm	5.5 cm

- Test Procedures in accordance with FCC KDB 643646 (see reference [8])**
- For body-worn configuration, battery "b" was selected as the default battery based on the thinnest battery.
 - When the body SAR of an antenna tested on the highest output power channel with the thinnest battery is ≤ 3.5 W/kg (B28, B32), testing of all other required channels is not necessary for that antenna.
 - When the SAR for all antennas tested on the highest output power channel with the thinnest battery is ≤ 4.0 W/kg (B28, B32), test additional batteries with the additional body-worn accessory and default audio accessory using the antenna and channel configuration that resulted in the highest SAR among all antennas (B27, B29, B30, B31, B33, B34).
 - When test reduction applies, the data table entries for such configurations are denoted with N/A (Not Applicable).
 - Battery "e" was not evaluated for body-worn SAR with body-worn accessory #B4, due to the radio could not transmit continuously through the area scan and the zoom scan without having to replace the alkaline batteries several times. Battery "e" was evaluated with the maximum body-worn SAR accessory configuration only.

11.0 SAR SCALING (TUNE-UP TOLERANCE)

TABLE 6 MAX. SAR LEVELS SCALED TO MANUF. UPPER TOLERANCE SPECIFICATION							
Test Config.	Test Plot #	Test Freq.	Measured Conducted Power	Max. Rated Conducted Power inc. Upper Tolerance	Measured SAR Level (50% PTT d/f)	Power Scaling to Upper Tolerance Spec.	Scaled SAR (50% PTT d/f)
		MHz	Watts	Watts	W/kg (1g)	dB	W/kg (1g)
Face-held	F3	138.0	6.76	7.07	0.287	0.2	0.301
Face-held	F8	173.4	6.76	7.07	0.128	0.2	0.134
Body-worn	B1	138.0	6.76	7.07	1.77	0.2	1.85
Body-worn	B10	173.4	6.76	7.07	0.945	0.2	0.990

Note(s):

- The maximum SAR levels, per frequency split and Head/Body configuration are reported in the above table.
- The manufacturer's upper power tolerance level specification reported was provided by Harris Corporation.



12.0 SIMULTANEOUS TRANSMISSION ASSESSMENT

Co-transmitting Antennas: External Multi-Band Helical (136-870 MHz) and Internal Bluetooth (2402-2480 MHz)
 Manuf. Rated Output Power: 20 dBm (Class 1 Bluetooth)
 Antenna-to-Antenna Distance: ~ 130 mm

TABLE 7 SIMULTANEOUS TRANSMISSION SAR SUMMATION				
MAX. SAR - VHF-BAND PTT (50% PTT duty factor)		MAX. SAR (BLUETOOTH)	SUM OF SAR LEVELS (50% PTT duty factor)	FCC/IC SAR LIMIT (Occupational)
Face-held IC Low Band	0.287 W/kg (1g) (Test Plot #F3)	0.114 W/kg (1g)	0.401 W/kg (1g)	8.0 W/kg (1g)
Face-held FCC Band	0.128 W/kg (1g) (Test Plot #F8)	0.114 W/kg (1g)	0.242 W/kg (1g)	8.0 W/kg (1g)
Body-worn IC Low Band	1.77 W/kg (1g) (Test Plot #B1)	0.033 W/kg (Peak SAR from Area Scan)	1.77 W/kg (1g)	8.0 W/kg (1g)
Body-worn FCC Band	0.945 W/kg (1g) (Test Plot #B10)	0.033 W/kg (Peak SAR from Area Scan)	0.945 W/kg (1g)	8.0 W/kg (1g)

Summary

SAR evaluation for simultaneous transmission of the VHF-band PTT and Bluetooth was not required in accordance with the provision of FCC KDB 648474 (see reference [15]) - when simultaneous transmission applies and the sum of the 1-g SAR measured for all simultaneous transmitting antennas is less than the SAR limit, SAR evaluation for simultaneous transmission is not required for all transmitters and antennas.


	<u>Date(s) of Evaluation</u> 09/14-19, 11/18, 2011	<u>Test Report Serial No.</u> 060111AQZ-T1102-S90V	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 02, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

13.0 DETAILS OF SAR EVALUATION

1. The number of test frequencies and the test channels evaluated for SAR were selected in accordance with the procedures described in FCC KDB 447498 Section 6) c) (see reference [7]).
2. The DUT was evaluated for SAR in accordance with the procedures described in FCC KDB 643646 (see reference [8]).
3. The area scan evaluation was performed with a fully charged battery. After the area scan was completed the battery was replaced with a fully charged battery prior to the zoom scan evaluation.
4. For the SAR evaluations with battery “e” (alkaline battery case), the zoom scan evaluation was paused midway and the batteries were replaced with new batteries. This procedure was implemented because the alkaline batteries were unable to last for the duration of the zoom scan. Additionally, z-axis scans were not completed for the alkaline battery evaluations and only the default body-worn accessory configuration was evaluated for SAR.
5. The SAR drift of the DUT was measured by the DASY4 system for the duration of the zoom scan evaluations. The measured SAR droop was added to the measured SAR levels to report scaled SAR levels as shown in the SAR test data tables. A SAR-versus-Time droop evaluation was also performed and is shown in Appendix A.
6. The fluid temperature remained within +/-2°C from the dielectric parameter measurement to the completion of the SAR test.
7. The dielectric parameters of the simulated tissue mixtures were measured prior to the SAR evaluations using a Dielectric Probe Kit and a Network Analyzer (see Appendix C).
8. The DUT was tested at the maximum conducted output power level preset by the manufacturer in unmodulated continuous transmit operation (Continuous Wave mode at 100% duty cycle) with the transmit key constantly depressed. For a push-to-talk device the 50% duty cycle compensation reported assumes a transmit/receive cycle of equal time base.

14.0 SAR EVALUATION PROCEDURES

- a. (i) The evaluation was performed in the applicable area of the phantom depending on the type of device being tested. For devices held to the ear during normal operation, both the left and right ear positions were evaluated using the SAM phantom.
(ii) For body-worn and face-held devices a planar phantom was used.
- b. The SAR was determined by a pre-defined procedure within the DASY4 software. Upon completion of a reference and optical surface check, the exposed region of the phantom was scanned near the inner surface with a grid spacing of 15mm x 15mm.
An area scan was determined as follows:
- c. Based on the defined area scan grid, a more detailed grid is created to increase the points by a factor of 10. The interpolation function then evaluates all field values between corresponding measurement points.
- d. A linear search is applied to find all the candidate maxima. Subsequently, all maxima are removed that are >2 dB from the global maximum. The remaining maxima are then used to position the cube scans.
A 1g and 10g spatial peak SAR was determined as follows:
- e. Extrapolation is used to find the points between the dipole center of the probe and the surface of the phantom. This data cannot be measured, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.4 mm (see probe calibration document in Appendix F). The extrapolation was based on trivariate quadratics computed from the previously calculated 3D interpolated points nearest the phantom surface.
- f. Interpolated data is used to calculate the average SAR over 1g and 10g cubes by spatially discretizing the entire measured cube. The volume used to determine the averaged SAR is a 1mm grid (42875 interpolated points).
- g. A zoom scan volume of 30 mm x 30 mm x 30 mm (5 x 5 x 7 points) centered at the peak SAR location determined from the area scan is used for all zoom scans for devices with a transmit frequency < 800 MHz. Zoom scans for frequencies ≥ 800 MHz are determined with a scan volume of 30 mm x 30 mm x 30 mm (7 x 7 x 7) to ensure complete capture of the peak spatial-average SAR.



Applicant:	HARRIS Corporation	FCC ID:	AQZ-XG-100P00	IC:	122D-XG100P00	
DUT Type:	Portable Multi-band PTT Radio Transceiver	Model:	Unity XG-100P	VHF Band 138-174 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 24 of 136

15.0 SYSTEM PERFORMANCE CHECK

Prior to the SAR evaluations, system checks were performed with a planar phantom and 300 MHz SPEAG dipole (see Appendix B for system performance check test plots) in accordance with the procedures described in IEEE Standard 1528-2003 (see reference [5]). The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer (see Appendix C for measured fluid dielectric parameters). A forward power of 398 mW was applied to the dipole and the system was verified to a tolerance of $\pm 10\%$ from the system manufacturer's dipole calibration target SAR value (see Appendix E for system manufacturer's dipole calibration procedures).

TABLE 8		SYSTEM PERFORMANCE CHECK EVALUATIONS														
Test Date	300 MHz	SAR 1g (W/kg)			Dielectric Constant ϵ_r			Conductivity σ (mho/m)			ρ (Kg/m ³)	Amb. Temp. (°C)	Fluid Temp. (°C)	Fluid Depth (cm)	Humid. (%)	Barom. Press. (kPa)
		HEAD	Target	Meas.	Dev.	Target	Meas.	Dev.	Target	Meas.						
Sep 14	SPEAG Target ¹	1.14 $\pm 10\%$	1.20	+5.3%	45.3 $\pm 5\%$	46.6	+2.9%	0.87 $\pm 5\%$	0.90	+3.4%	1000	23.0	22.9	≥ 15	33	101.1
	IEEE Target ²	3.0 $\pm 10\%$	3.02	+0.6%												
Sep 19	SPEAG Target ¹	1.14 $\pm 10\%$	1.11	-2.6%	45.3 $\pm 5\%$	46.0	+1.5%	0.87 $\pm 5\%$	0.84	-3.4%	1000	23.0	22.8	≥ 15	30	101.1
	IEEE Target ²	3.0 $\pm 10\%$	2.79	-7.0%												
Nov 18	SPEAG Target ¹	1.14 $\pm 10\%$	1.17	+2.6%	45.3 $\pm 5\%$	45.7	+0.8%	0.87 $\pm 5\%$	0.84	-3.4%	1000	21.0	20.8	≥ 15	32	101.1
	IEEE Target ²	3.0 $\pm 10\%$	2.94	-2.0%												

- Notes**
- The SPEAG target SAR value is the measured value from the system manufacturer's dipole calibration (see Appendix E).
 - Numerical reference SAR value specified in IEEE Standard 1528-2003 (see reference [5]), normalized to 1 W forward power.
 - The fluid temperature remained within $\pm 2^\circ\text{C}$ from the dielectric parameter measurement to the completion of the system performance check.
 - The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer (see Appendix C).
 - System Performance Checks were not performed for every SAR evaluation test date based on compliance with the following provision in accordance with TCBC Workshop Presentation April 5-7, 2011 (Kwok Chan Presentation File 04-06-2011-FCC 4 RFx Guidance 040611- KC):
SAR System Verification
 when head and body tissue dielectric parameters are required to test a device, separate SAR system verifications are required
 - daily verification of each liquid is usually not necessary when liquid parameter tolerances are maintained in a controlled environment
 - typically every few days is sufficient or when liquid is changed

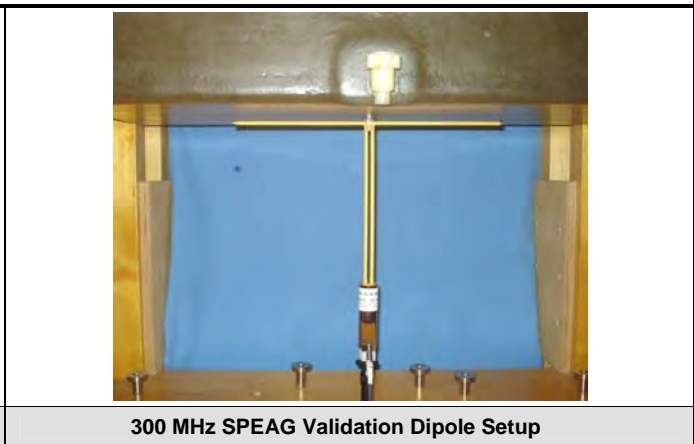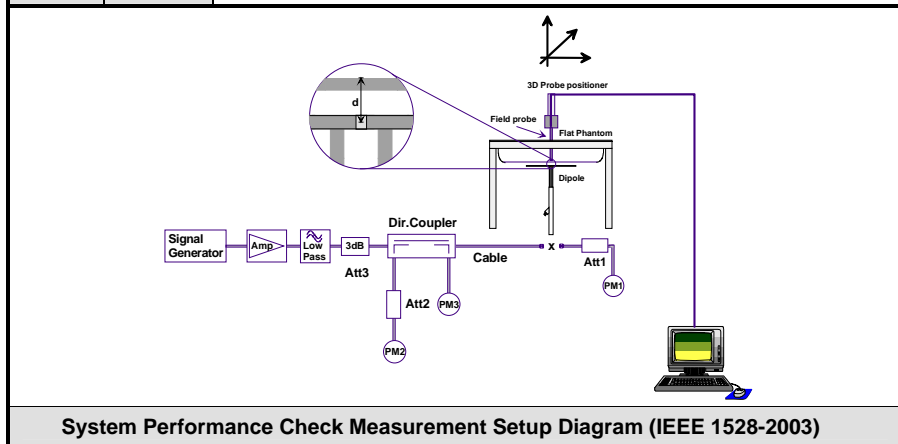



16.0 SIMULATED EQUIVALENT TISSUES

The simulated equivalent tissue recipes in the table below are derived from the SAR system manufacturer's suggested recipes in the DASY4 manual (see references [10] and [11]) in accordance with the procedures and requirements specified in IEEE Standard 1528-2003 (see reference [5]). The ingredient percentage may have been adjusted minimally in order to achieve the appropriate target dielectric parameters within the specified tolerance.

SIMULATED TISSUE MIXTURES							
INGREDIENT	Water	300 MHz HEAD Tissue Mixture	37.56 %	150 MHz HEAD Tissue Mixture	38.35 %	150 MHz BODY Tissue Mixture	46.6 %
	Sugar		55.32 %		55.5%		49.7 %
	Salt		5.95 %		5.15%		2.6 %
	HEC		0.98 %		0.9%		1.0 %
	Bactericide		0.19 %		0.1%		0.1 %


17.0 SAR LIMITS



SAR RF EXPOSURE LIMITS			
FCC 47 CFR 2.1093	Health Canada Safety Code 6	(General Population / Uncontrolled Exposure)	(Occupational / Controlled Exposure)
Spatial Average (averaged over the whole body)		0.08 W/kg	0.4 W/kg
Spatial Peak (averaged over any 1 g of tissue)		1.6 W/kg	8.0 W/kg
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)		4.0 W/kg	20.0 W/kg
The Spatial Average value of the SAR averaged over the whole body.			
The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.			
The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.			
Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.			
Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.			

	Date(s) of Evaluation 09/14-19, 11/18, 2011	Test Report Serial No. 060111AQZ-T1102-S90V	Test Report Revision No. Rev. 1.2 (3rd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date December 02, 2011	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	


18.0 ROBOT SYSTEM SPECIFICATIONS

Specifications	
Positioner	Stäubli Unimation Corp. Robot Model: RX60L
Repeatability	0.02 mm
No. of axis	6
Data Acquisition Electronic (DAE) System	
Cell Controller	
Processor	AMD Athlon XP 2400+
Clock Speed	2.0 GHz
Operating System	Windows XP Professional
Data Converter	
Features	Signal Amplifier, multiplexer, A/D converter, and control logic
Software	Measurement Software: DASY4, V4.7 Build 44
	Postprocessing Software: SEMCAD, V1.8 Build 171
Connecting Lines	Optical downlink for data and status info., Optical uplink for commands and clock
DASY4 Measurement Server	
Function	Real-time data evaluation for field measurements and surface detection
Hardware	PC/104 166MHz Pentium CPU; 32 MB chipdisk; 64 MB RAM
Connections	COM1, COM2, DAE, Robot, Ethernet, Service Interface
E-Field Probe	
Model	ET3DV6
Serial No.	1590
Construction	Triangular core fiber optic detection system
Frequency	10 MHz to 6 GHz
Linearity	±0.2 dB (30 MHz to 3 GHz)
Phantom	
Type	Side Planar Phantom
Shell Material	Plexiglass
Bottom Thickness	2.0 mm ± 0.1 mm
Inner Dimensions	72.6 cm (L) x 20.3 cm (W) x 20.3 cm (H)
Phantom	
Type	Barski Planar Phantom
Shell Material	Fiberglass
Thickness	2.0 ±0.1 mm
Volume	Approx. 70 liters


Applicant:	HARRIS Corporation	FCC ID:	AQZ-XG-100P00	IC:	122D-XG100P00	
DUT Type:	Portable Multi-band PTT Radio Transceiver	Model:	Unity XG-100P	VHF Band 138-174 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 27 of 136


	<u>Date(s) of Evaluation</u> 09/14-19, 11/18, 2011	<u>Test Report Serial No.</u> 060111AQZ-T1102-S90V	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 02, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

19.0 PROBE SPECIFICATION


<p>Construction: Symmetrical design with triangular core; Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, glycol)</p> <p>Calibration: In air from 10 MHz to 2.5 GHz In head simulating tissue at frequencies of 900 MHz and 1.8 GHz (accuracy $\pm 8\%$)</p> <p>Frequency: 10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)</p> <p>Directivity: ± 0.2 dB in head tissue (rotation around probe axis) ± 0.4 dB in head tissue (rotation normal to probe axis)</p> <p>Dynamic Range: 5 μW/g to > 100 mW/g; Linearity: ± 0.2 dB</p> <p>Surface Detect: ± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces</p> <p>Dimensions: Overall length: 330 mm; Tip length: 16 mm; Body diameter: 12 mm; Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm</p> <p>Application: General dosimetry up to 3 GHz; Compliance tests of mobile phone</p>	
	ET3DV6 E-Field Probe


20.0 PHANTOM(S)

<p>The Barski Planar Phantom is a fiberglass shell phantom with a 2.0 mm (+/-0.2mm) thick device measurement area at the center of the phantom for SAR evaluations of devices with a larger surface area than the planar section of the SAM phantom. The planar phantom is integrated in a wooden table. The planar phantom was used for the DUT SAR evaluations and the system performance check evaluations. See Appendix G for dimensions and specifications of the Barski planar phantom.</p>	
	Barski Planar Phantom
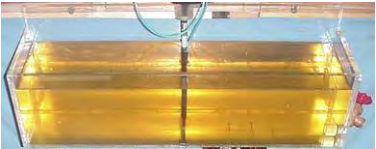
<p>The side planar phantom is constructed of Plexiglas material with a 2.0 mm shell thickness for face-held and body-worn SAR evaluations of portable radio transceivers. The side planar phantom is mounted on the side of the DASY4 compact system table.</p>	
	Plexiglas Side Planar Phantom

21.0 DEVICE HOLDER

<p>The DASY4 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections.</p>	
	Device Holder

Applicant:	HARRIS Corporation	FCC ID:	AQZ-XG-100P00	IC:	122D-XG100P00	
DUT Type:	Portable Multi-band PTT Radio Transceiver	Model:	Unity XG-100P	VHF Band	138-174 MHz	
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 28 of 136

22.0 TEST EQUIPMENT LIST

TEST EQUIPMENT		ASSET NO.	SERIAL NO.	DATE CALIBRATED	CALIBRATION INTERVAL
USED	DESCRIPTION				
x	Schmid & Partner DASY4 System	-	-	-	-
x	-DASY4 Measurement Server	00158	1078	CNR	CNR
x	-Robot	00046	599396-01	CNR	CNR
x	-DAE4	00019	353	27Apr10	Biennial
x	-ET3DV6 E-Field Probe	00017	1590	22Jun11	Annual
x	-SPEAG D300V3 Validation Dipole	00216	1009	18Jan10	Triennial
x	Side Planar Phantom	00156	161	CNR	CNR
x	Barski Planar Phantom	00155	03-01	CNR	CNR
x	HP 85070C Dielectric Probe Kit	00033	none	CNR	CNR
x	Gigatronics 8652A Power Meter	00007	1835272	04May10	Biennial
x	Gigatronics 80701A Power Sensor	00014	1833699	04May10	Biennial
x	HP 8753ET Network Analyzer	00134	US39170292	04May10	Biennial
x	Rohde & Schwarz SMR20 Signal Generator	00006	100104	CNR	CNR
x	Amplifier Research 5S1G4 Power Amplifier	00106	26235	CNR	CNR
Abbr.	CNR = Calibration Not Required				

23.0 JUSTIFICATION FOR EXTENDED DIPOLE CALIBRATION

SAR dipoles calibrated less than two years ago but more than one year ago were confirmed by maintaining return loss (< -20dB, within 20% of prior calibration) and impedance (within 5Ω from prior calibration) requirements per extended calibrations in FCC KDB 450824 (see reference [9]).

SPEAG D300V3 SN: 1009						
Date of Measurement	Frequency	Fluid Type	Return Loss (dB)	Δ %	Impedance (Ω)	Δ Ω
January 18, 2010	300 MHz	Head	-20.1	-	56.3	-
June 6, 2011			-21.2	-5.5%	50.3	5



Date(s) of Evaluation
09/14-19, 11/18, 2011

Test Report Serial No.
060111AQZ-T1102-S90V

Test Report Revision No.
Rev. 1.2 (3rd Release)

Test Report Issue Date
December 02, 2011

Description of Test(s)
Specific Absorption Rate



RF Exposure Category
Occupational (Controlled)



24.0 MEASUREMENT UNCERTAINTIES


UNCERTAINTY BUDGET FOR DEVICE EVALUATION



Uncertainty Component	IEEE 1528 Section	Uncertainty Value ±%	Probability Distribution	Divisor	ci 1g	ci 10g	Uncertainty Value ±% (1g)	Uncertainty Value ±% (10g)	V _i or V _{eff}
Measurement System									
Probe Calibration (150 MHz)	E.2.1	5.0	Normal	1	1	1	5.0	5.0	∞
Axial Isotropy	E.2.2	4.7	Rectangular	1.732050808	0.7	0.7	1.9	1.9	∞
Hemispherical Isotropy	E.2.2	9.6	Rectangular	1.732050808	0.7	0.7	3.9	3.9	∞
Boundary Effect	E.2.3	2.5	Rectangular	1.732050808	1	1	1.4	1.4	∞
Linearity	E.2.4	4.7	Rectangular	1.732050808	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1	Rectangular	1.732050808	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	0.3	Normal	1	1	1	0.3	0.3	∞
Response Time	E.2.7	0.8	Rectangular	1.732050808	1	1	0.5	0.5	∞
Integration Time	E.2.8	2.6	Rectangular	1.732050808	1	1	1.5	1.5	∞
RF Ambient Conditions	E.6.1	3	Rectangular	1.732050808	1	1	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	Rectangular	1.732050808	1	1	0.2	0.2	∞
Probe Positioning wrt Phantom Shell	E.6.3	2.9	Rectangular	1.732050808	1	1	1.7	1.7	∞
Extrapolation, interpolation & integration algorithms for max. SAR evaluation	E.5	1	Rectangular	1.732050808	1	1	0.6	0.6	∞
Test Sample Related									
Test Sample Positioning	E.4.2	2.9	Normal	1	1	1	2.9	2.9	12
Device Holder Uncertainty	E.4.1	3.6	Normal	1	1	1	3.6	3.6	8
SAR Drift Measurement	6.6.2	5	Rectangular	1.732050808	1	1	2.9	2.9	∞
Phantom and Tissue Parameters									
Phantom Uncertainty	E.3.1	4	Rectangular	1.732050808	1	1	2.3	2.3	∞
Liquid Conductivity (target)	E.3.2	5	Rectangular	1.732050808	0.64	0.43	1.8	1.2	∞
Liquid Conductivity (measured)	E.3.3	4	Normal	1	0.64	0.43	2.6	1.7	∞
Liquid Permittivity (target)	E.3.2	5	Rectangular	1.732050808	0.6	0.49	1.7	1.4	∞
Liquid Permittivity (measured)	E.3.3	4.21	Normal	1	0.6	0.49	2.5	2.1	∞
Combined Standard Uncertainty			RSS				10.80	10.39	
Expanded Uncertainty (95% Confidence Interval)			k=2				21.59	20.78	
Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003									
This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2									

	<u>Date(s) of Evaluation</u> 09/14-19, 11/18, 2011	<u>Test Report Serial No.</u> 060111AQZ-T1102-S90V	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 02, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	


25.0 REFERENCES



- [1] Federal Communications Commission - "Radiofrequency radiation exposure evaluation: portable devices", Rule Part 47 CFR §2.1093.
- [2] Health Canada - "Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz", Safety Code 6: 1999.
- [3] Federal Communications Commission - "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields", OET Bulletin 65, Supplement C (Edition 01-01), FCC, Washington, D.C.: June 2001.
- [4] Industry Canada - "Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)", Radio Standards Specification RSS-102 Issue 4: March 2010.
- [5] IEEE Standard 1528-2003 - "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques": December 2003.
- [6] International Standard IEC 62209-2 Edition 1.0 2010-03 - "Human exposure to radio frequency fields from hand-held & body-mounted wireless communication devices - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)".
- [7] Federal Communications Commission, Office of Engineering and Technology - "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies"; KDB 447498 D01v04: November 2009.
- [8] Federal Communications Commission, Office of Engineering and Technology - "SAR Test Reduction Considerations for Occupational PTT Radios", KDB 643646 D01v01r01: April 2011.
- [9] Federal Communications Commission, Office of Engineering and Technology - "Application Note: SAR Probe Calibration and System Verification Considerations for Measurements at 150 MHz - 3 GHz"; KDB 450824 D01 v01r01: January 2007.
- [10] Schmid & Partner Engineering AG - DASY4 Manual V4.6, Chapter 16 Application Note, Head Tissue Recipe: Sept. 2005.
- [11] Schmid & Partner Engineering AG - DASY4 Manual V4.6, Chapter 17 Application Note, Body Tissue Recipe: Sept. 2005.
- [12] Federal Communications Commission - "Measurements Required: RF Power Output"; Rule Part 47 CFR §2.1046.
- [13] Industry Canada - "General Requirements and Information for the Certification of Radiocommunication Equipment", Radio Standards Specification RSS-Gen Issue 2: June 2007.
- [14] ISO/IEC 17025 - "General requirements for the competence of testing and calibration laboratories (ISO/IEC 17025:2005)."
- [15] Federal Communications Commission, Office of Engineering and Technology - "SAR Evaluation Considerations for Handsets with Multiple Transmitters and Antennas"; KDB 648474 D01v01r05: September 2008.

Applicant:	HARRIS Corporation	FCC ID:	AQZ-XG-100P00	IC:	122D-XG100P00	
DUT Type:	Portable Multi-band PTT Radio Transceiver	Model:	Unity XG-100P	VHF Band 138-174 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 31 of 136

	<u>Date(s) of Evaluation</u> 09/14-19, 11/18, 2011	<u>Test Report Serial No.</u> 060111AQZ-T1102-S90V	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 02, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

APPENDIX B - SYSTEM PERFORMANCE CHECK PLOTS

Applicant:	HARRIS Corporation	FCC ID:	AQZ-XG-100P00	IC:	122D-XG100P00	
DUT Type:	Portable Multi-band PTT Radio Transceiver	Model:	Unity XG-100P	VHF Band 138-174 MHz		
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 83 of 136

	<u>Date(s) of Evaluation</u> 09/14-19, 11/18, 2011	<u>Test Report Serial No.</u> 060111AQZ-T1102-S90V	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 02, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 09/14/2011

System Performance Check - 300 MHz Dipole - Head

DUT: Dipole 300 MHz; Type: D300V3; Serial: 1009; Calibrated: 18/01/2010

Ambient Temp: 23C; Fluid Temp: 22.9C; Barometric Pressure: 101.1 kPa; Humidity: 33%

Communication System: CW


Frequency: 300 MHz; Duty Cycle: 1:1


Medium: 300 HSL Medium parameters used: $f = 300 \text{ MHz}$; $\sigma = 0.9 \text{ mho/m}$; $\epsilon_r = 46.6$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8, 8, 8); Calibrated: 22/06/2011
- Sensor-Surface: 5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171


Head/d=15mm, Pin = 398mW/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 1.14 mW/g

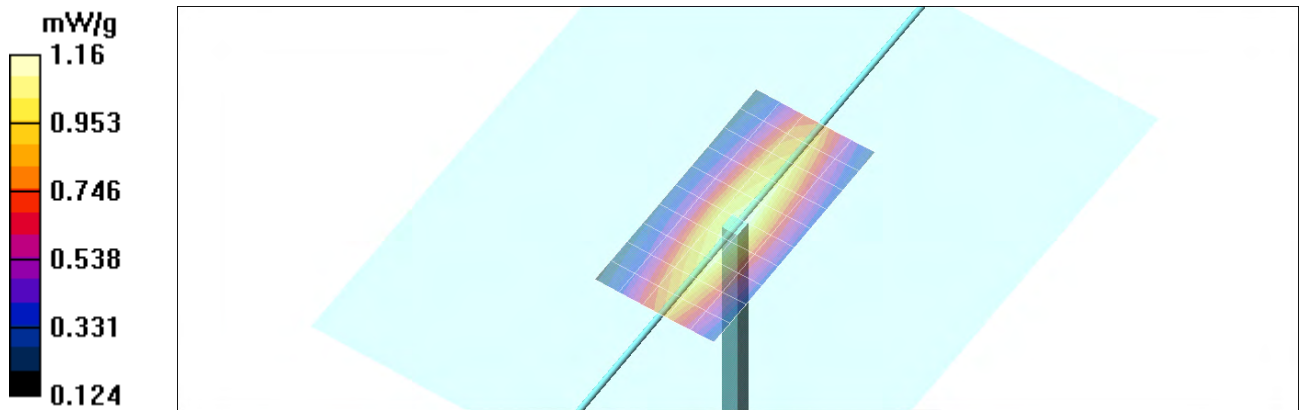

Head/d=15mm, Pin = 398mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 35.6 V/m; Power Drift = -0.040 dB
 Peak SAR (extrapolated) = 1.93 W/kg
SAR(1 g) = 1.2 mW/g; SAR(10 g) = 0.797 mW/g
 Maximum value of SAR (measured) = 1.16 mW/g



Applicant:	HARRIS Corporation	FCC ID:	AQZ-XG-100P00	IC:	122D-XG100P00	
DUT Type:	Portable Multi-band PTT Radio Transceiver	Model:	Unity XG-100P	VHF Band 138-174 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 84 of 136

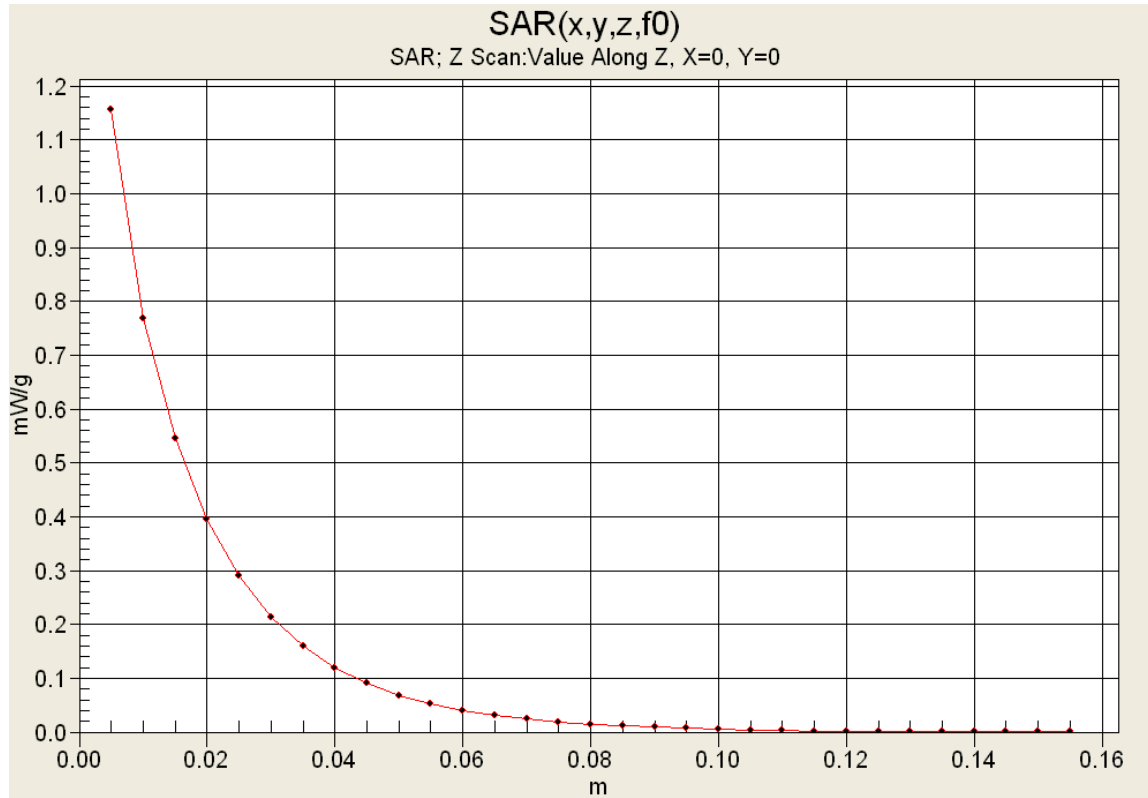Z-Axis Scan



	<u>Date(s) of Evaluation</u> 09/14-19, 11/18, 2011	<u>Test Report Serial No.</u> 060111AQZ-T1102-S90V	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 02, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 09/19/2011

System Performance Check - 300 MHz Dipole - Head

DUT: Dipole 300 MHz; Type: D300V3; Serial: 1009; Calibrated: 18/01/2010

Ambient Temp: 23C; Fluid Temp: 22.8C; Barometric Pressure: 101.1 kPa; Humidity: 30%

Communication System: CW


Frequency: 300 MHz; Duty Cycle: 1:1


Medium: 300 HSL Medium parameters used: $f = 300 \text{ MHz}$; $\sigma = 0.84 \text{ mho/m}$; $\epsilon_r = 46$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8, 8, 8); Calibrated: 22/06/2011
- Sensor-Surface: 5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171


Head/d=15mm, Pin = 398mW/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.05 mW/g

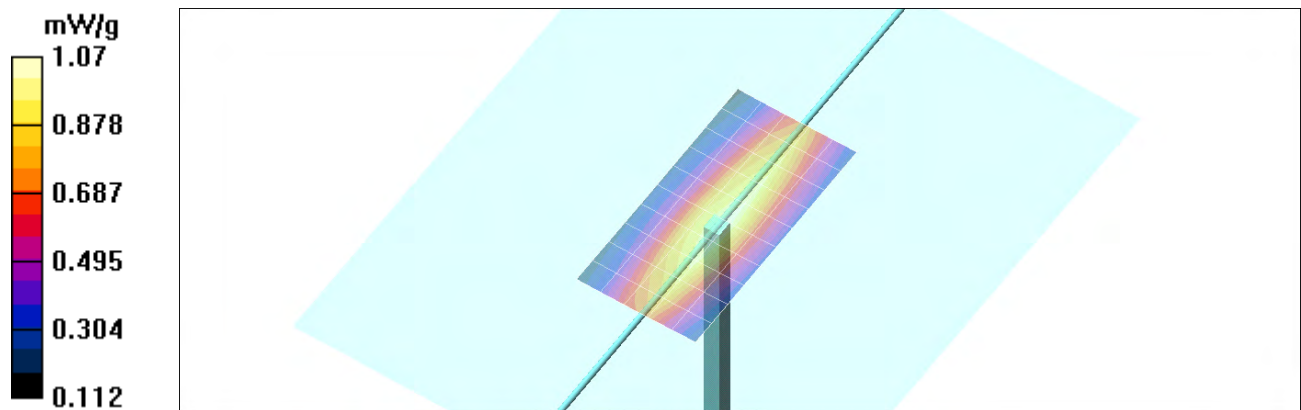

Head/d=15mm, Pin = 398mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 35.2 V/m; Power Drift = -0.078 dB
Peak SAR (extrapolated) = 1.78 W/kg
SAR(1 g) = 1.11 mW/g; SAR(10 g) = 0.734 mW/g
Maximum value of SAR (measured) = 1.07 mW/g



Applicant:	HARRIS Corporation	FCC ID:	AQZ-XG-100P00	IC:	122D-XG100P00	
DUT Type:	Portable Multi-band PTT Radio Transceiver	Model:	Unity XG-100P	VHF Band 138-174 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 86 of 136

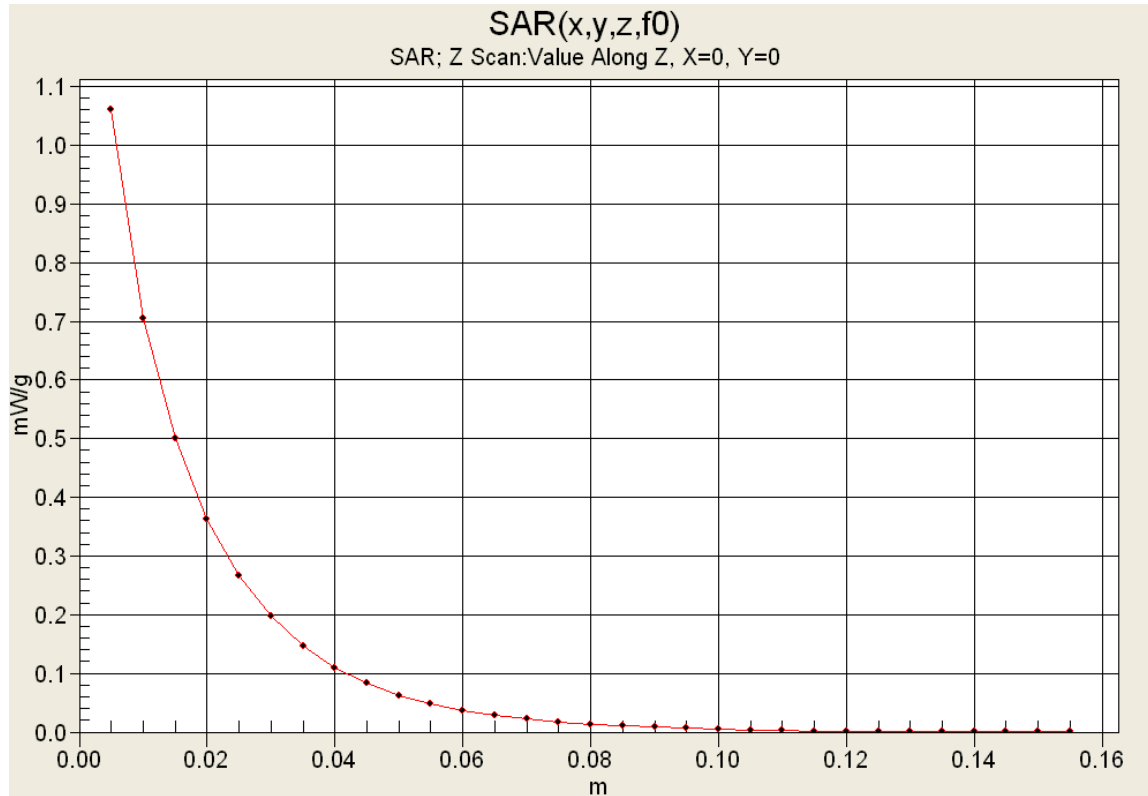Z-Axis Scan



	<u>Date(s) of Evaluation</u> 09/14-19, 11/18, 2011	<u>Test Report Serial No.</u> 060111AQZ-T1102-S90V	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 02, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 11/18/2011

System Performance Check - 300 MHz Dipole - Head

DUT: Dipole 300 MHz; Type: D300V3; Serial: 1009; Calibrated: 18/01/2010

Ambient Temp: 21C; Fluid Temp: 20.8C; Barometric Pressure: 101.1 kPa; Humidity: 32%

Communication System: CW

Frequency: 300 MHz; Duty Cycle: 1:1

Medium: 300 HSL Medium parameters used: $f = 300 \text{ MHz}$; $\sigma = 0.84 \text{ mho/m}$; $\epsilon_r = 45.7$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8, 8, 8); Calibrated: 22/06/2011
- Sensor-Surface: 5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Head d=15mm, Pin = 398mW/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.12 mW/g


Head d=15mm, Pin = 398mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 36.3 V/m; Power Drift = -0.040 dB

Peak SAR (extrapolated) = 1.87 W/kg


SAR(1 g) = 1.17 mW/g; SAR(10 g) = 0.777 mW/g

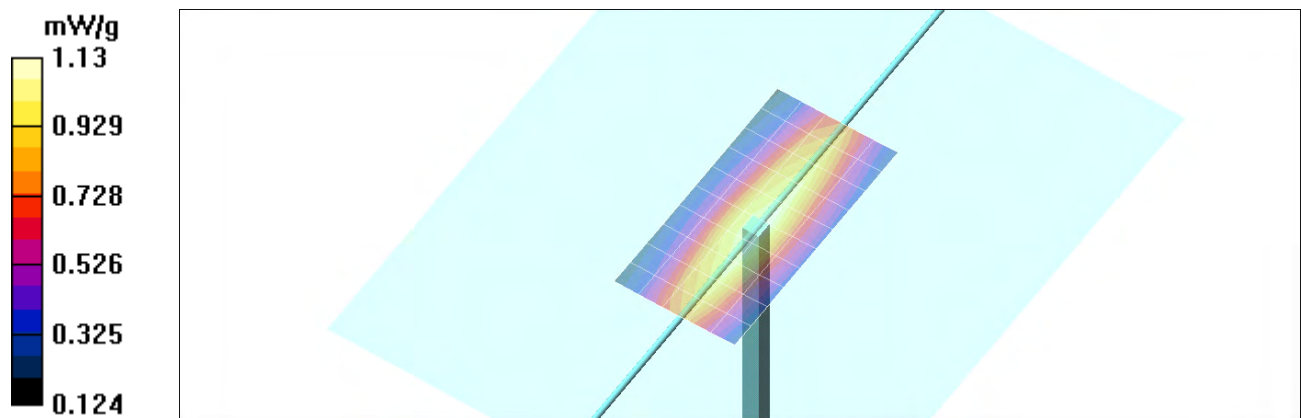

Maximum value of SAR (measured) = 1.13 mW/g




Applicant:	HARRIS Corporation	FCC ID:	AQZ-XG-100P00	IC:	122D-XG100P00	
DUT Type:	Portable Multi-band PTT Radio Transceiver	Model:	Unity XG-100P	VHF Band 138-174 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 88 of 136

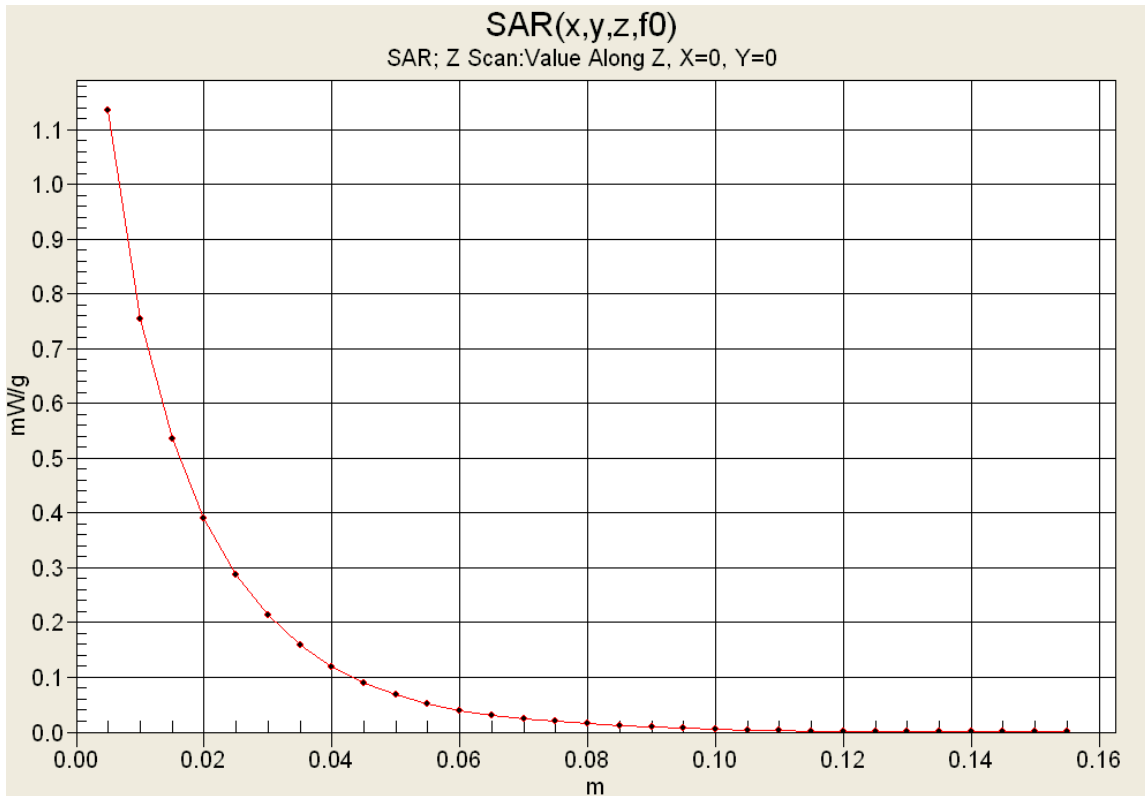

Z-Axis Scan



	<u>Date(s) of Evaluation</u> 09/14-19, 11/18, 2011	<u>Test Report Serial No.</u> 060111AQZ-T1102-S90V	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	
	<u>Test Report Issue Date</u> December 02, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS

Applicant:	HARRIS Corporation	FCC ID:	AQZ-XG-100P00	IC:	122D-XG100P00	
DUT Type:	Portable Multi-band PTT Radio Transceiver	Model:	Unity XG-100P	VHF Band 138-174 MHz		
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 90 of 136

	<u>Date(s) of Evaluation</u> 09/14-19, 11/18, 2011	<u>Test Report Serial No.</u> 060111AQZ-T1102-S90V	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 02, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

300 MHz Head

Celltech Labs
Test Result for UIM Dielectric Parameter
14/Sep/2011

Frequency (GHz)


FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon



FCC_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eHFCC_sH	Test_e	Test_s	
0.2000	49.97	0.80	51.71	0.84
0.2100	49.50	0.80	52.81	0.84
0.2200	49.03	0.81	50.15	0.84
0.2300	48.57	0.82	47.57	0.85
0.2400	48.10	0.83	48.74	0.86
0.2500	47.63	0.83	47.60	0.87
0.2600	47.17	0.84	48.29	0.88
0.2700	46.70	0.85	46.98	0.88
0.2800	46.23	0.86	47.65	0.88
0.2900	45.77	0.86	46.80	0.89
0.3000	45.30	0.87	46.64	0.90
0.3100	45.18	0.87	46.48	0.91
0.3200	45.06	0.87	46.16	0.93
0.3300	44.94	0.87	45.71	0.94
0.3400	44.82	0.87	45.05	0.95
0.3500	44.70	0.87	44.35	0.94
0.3600	44.58	0.87	44.18	0.95
0.3700	44.46	0.87	44.20	0.96
0.3800	44.34	0.87	43.86	0.97
0.3900	44.22	0.87	42.78	0.98
0.4000	44.10	0.87	43.19	0.98


Applicant:	HARRIS Corporation	FCC ID:	AQZ-XG-100P00	IC:	122D-XG100P00	
DUT Type:	Portable Multi-band PTT Radio Transceiver	Model:	Unity XG-100P	VHF Band 138-174 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 91 of 136



	<u>Date(s) of Evaluation</u> 09/14-19, 11/18, 2011	<u>Test Report Serial No.</u> 060111AQZ-T1102-S90V	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	
	<u>Test Report Issue Date</u> December 02, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

150 MHz Body

Celltech Labs
 Test Result for UIM Dielectric Parameter
 14/Sep/2011
 Frequency (GHz)
 FCC_eB FCC Limits for Body Epsilon
 FCC_sB FCC Limits for Body Sigma
 Test_e Epsilon of UIM
 Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.0500	64.37	0.72	72.38	0.71
0.0600	64.12	0.73	83.16	0.74
0.0700	63.87	0.74	77.75	0.72
0.0800	63.63	0.74	66.59	0.74
0.0900	63.38	0.75	66.48	0.72
0.1000	63.13	0.76	67.37	0.76
0.1100	62.89	0.77	64.63	0.76
0.1200	62.64	0.78	63.39	0.74
0.1300	62.39	0.78	61.61	0.77
0.1400	62.15	0.79	61.84	0.77
0.1500	61.90	0.80	62.35	0.77
0.1600	61.65	0.81	63.61	0.80
0.1700	61.41	0.82	60.92	0.81
0.1800	61.16	0.82	62.33	0.79
0.1900	60.91	0.83	63.12	0.81
0.2000	60.67	0.84	60.71	0.80
0.2100	60.42	0.85	59.69	0.82
0.2200	60.17	0.86	61.20	0.81
0.2300	59.93	0.86	59.78	0.82
0.2400	59.68	0.87	59.60	0.82
0.2500	59.43	0.88	59.08	0.84


Applicant:	HARRIS Corporation	FCC ID:	AQZ-XG-100P00	IC:	122D-XG100P00	
DUT Type:	Portable Multi-band PTT Radio Transceiver	Model:	Unity XG-100P	VHF Band 138-174 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 92 of 136



	<u>Date(s) of Evaluation</u> 09/14-19, 11/18, 2011	<u>Test Report Serial No.</u> 060111AQZ-T1102-S90V	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	
	<u>Test Report Issue Date</u> December 02, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

150 MHz Body

Celltech Labs
 Test Result for UIM Dielectric Parameter
 15/Sep/2011
 Frequency (GHz)
 FCC_eB FCC Limits for Body Epsilon
 FCC_sB FCC Limits for Body Sigma
 Test_e Epsilon of UIM
 Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.0500	64.37	0.72	65.61	0.74
0.0600	64.12	0.73	81.99	0.72
0.0700	63.87	0.74	69.99	0.76
0.0800	63.63	0.74	68.18	0.75
0.0900	63.38	0.75	69.96	0.73
0.1000	63.13	0.76	64.30	0.76
0.1100	62.89	0.77	65.16	0.78
0.1200	62.64	0.78	66.98	0.76
0.1300	62.39	0.78	64.13	0.76
0.1400	62.15	0.79	64.51	0.77
0.1500	61.90	0.80	64.41	0.80
0.1600	61.65	0.81	60.00	0.80
0.1700	61.41	0.82	60.92	0.80
0.1800	61.16	0.82	62.40	0.82
0.1900	60.91	0.83	63.23	0.81
0.2000	60.67	0.84	62.23	0.82
0.2100	60.42	0.85	61.12	0.83
0.2200	60.17	0.86	61.33	0.82
0.2300	59.93	0.86	59.81	0.84
0.2400	59.68	0.87	61.24	0.84
0.2500	59.43	0.88	59.57	0.85


Applicant:	HARRIS Corporation	FCC ID:	AQZ-XG-100P00	IC:	122D-XG100P00	
DUT Type:	Portable Multi-band PTT Radio Transceiver	Model:	Unity XG-100P	VHF Band 138-174 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 93 of 136



	<u>Date(s) of Evaluation</u> 09/14-19, 11/18, 2011	<u>Test Report Serial No.</u> 060111AQZ-T1102-S90V	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	
	<u>Test Report Issue Date</u> December 02, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

150 MHz Body

Celltech Labs
 Test Result for UIM Dielectric Parameter
 16/Sep/2011
 Frequency (GHz)
 FCC_eB FCC Limits for Body Epsilon
 FCC_sB FCC Limits for Body Sigma
 Test_e Epsilon of UIM
 Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.0500	64.37	0.72	103.33	0.71
0.0600	64.12	0.73	92.54	0.71
0.0700	63.87	0.74	65.55	0.73
0.0800	63.63	0.74	70.81	0.73
0.0900	63.38	0.75	71.72	0.76
0.1000	63.13	0.76	69.62	0.77
0.1100	62.89	0.77	66.47	0.77
0.1200	62.64	0.78	65.57	0.76
0.1300	62.39	0.78	63.89	0.76
0.1400	62.15	0.79	63.43	0.77
0.1500	61.90	0.80	63.41	0.78
0.1600	61.65	0.81	63.33	0.79
0.1700	61.41	0.82	63.92	0.79
0.1800	61.16	0.82	63.64	0.80
0.1900	60.91	0.83	63.20	0.82
0.2000	60.67	0.84	62.21	0.80
0.2100	60.42	0.85	61.37	0.81
0.2200	60.17	0.86	60.35	0.82
0.2300	59.93	0.86	60.85	0.80
0.2400	59.68	0.87	59.94	0.82
0.2500	59.43	0.88	59.36	0.83

Applicant:	HARRIS Corporation	FCC ID:	AQZ-XG-100P00	IC:	122D-XG100P00	
DUT Type:	Portable Multi-band PTT Radio Transceiver	Model:	Unity XG-100P	VHF Band 138-174 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 94 of 136

	<u>Date(s) of Evaluation</u> 09/14-19, 11/18, 2011	<u>Test Report Serial No.</u> 060111AQZ-T1102-S90V	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	
	<u>Test Report Issue Date</u> December 02, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

150 MHz Head

Celltech Labs
 Test Result for UIM Dielectric Parameter
 16/Sep/2011

Frequency (GHz)


FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon



FCC_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eHFCC_sH	Test_e	Test_s
0.0500	56.97	0.69	89.46
0.0600	56.50	0.69	82.01
0.0700	56.03	0.70	60.62
0.0800	55.57	0.71	62.02
0.0900	55.10	0.72	64.53
0.1000	54.63	0.72	61.64
0.1100	54.17	0.73	56.02
0.1200	53.70	0.74	55.70
0.1300	53.23	0.75	54.82
0.1400	52.77	0.75	53.37
0.1500	52.30	0.76	54.75
0.1600	51.83	0.77	52.91
0.1700	51.37	0.77	53.16
0.1800	50.90	0.78	52.55
0.1900	50.43	0.79	51.70
0.2000	49.97	0.80	51.24
0.2100	49.50	0.80	50.84
0.2200	49.03	0.81	49.41
0.2300	48.57	0.82	48.90
0.2400	48.10	0.83	49.28
0.2500	47.63	0.83	47.91

Applicant:	HARRIS Corporation	FCC ID:	AQZ-XG-100P00	IC:	122D-XG100P00	
DUT Type:	Portable Multi-band PTT Radio Transceiver	Model:	Unity XG-100P	VHF Band 138-174 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 95 of 136

	<u>Date(s) of Evaluation</u> 09/14-19, 11/18, 2011	<u>Test Report Serial No.</u> 060111AQZ-T1102-S90V	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 02, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

300 MHz Head

Celltech Labs
Test Result for UIM Dielectric Parameter
19/Sep/2011

Frequency (GHz)


FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon



FCC_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eHFCC_sH	Test_e	Test_s
0.2000	49.97	0.80	48.95
0.2100	49.50	0.80	48.31
0.2200	49.03	0.81	48.93
0.2300	48.57	0.82	48.79
0.2400	48.10	0.83	47.85
0.2500	47.63	0.83	47.40
0.2600	47.17	0.84	47.02
0.2700	46.70	0.85	47.23
0.2800	46.23	0.86	46.36
0.2900	45.77	0.86	45.95
0.3000	45.30	0.87	46.02
0.3100	45.18	0.87	45.47
0.3200	45.06	0.87	44.57
0.3300	44.94	0.87	44.58
0.3400	44.82	0.87	44.53
0.3500	44.70	0.87	43.98
0.3600	44.58	0.87	43.17
0.3700	44.46	0.87	43.68
0.3800	44.34	0.87	43.35
0.3900	44.22	0.87	42.88
0.4000	44.10	0.87	42.54

Applicant:	HARRIS Corporation	FCC ID:	AQZ-XG-100P00	IC:	122D-XG100P00	
DUT Type:	Portable Multi-band PTT Radio Transceiver	Model:	Unity XG-100P	VHF Band 138-174 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 96 of 136

	<u>Date(s) of Evaluation</u> 09/14-19, 11/18, 2011	<u>Test Report Serial No.</u> 060111AQZ-T1102-S90V	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	
	<u>Test Report Issue Date</u> December 02, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

150 MHz Head

Celltech Labs
 Test Result for UIM Dielectric Parameter
 19/Sep/2011

Frequency (GHz)


FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon



FCC_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eHFCC_sH	Test_e	Test_s
0.0500	56.97	0.69	102.06
0.0600	56.50	0.69	84.75
0.0700	56.03	0.70	72.04
0.0800	55.57	0.71	70.97
0.0900	55.10	0.72	63.55
0.1000	54.63	0.72	62.21
0.1100	54.17	0.73	61.67
0.1200	53.70	0.74	57.19
0.1300	53.23	0.75	55.69
0.1400	52.77	0.75	54.15
0.1500	52.30	0.76	56.53
0.1600	51.83	0.77	56.87
0.1700	51.37	0.77	54.68
0.1800	50.90	0.78	51.77
0.1900	50.43	0.79	51.86
0.2000	49.97	0.80	51.77
0.2100	49.50	0.80	51.21
0.2200	49.03	0.81	49.83
0.2300	48.57	0.82	48.97
0.2400	48.10	0.83	49.62
0.2500	47.63	0.83	48.84

Applicant:	HARRIS Corporation	FCC ID:	AQZ-XG-100P00	IC:	122D-XG100P00	
DUT Type:	Portable Multi-band PTT Radio Transceiver	Model:	Unity XG-100P	VHF Band 138-174 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 97 of 136

	<u>Date(s) of Evaluation</u> 09/14-19, 11/18, 2011	<u>Test Report Serial No.</u> 060111AQZ-T1102-S90V	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 02, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

300 MHz Head

Celltech Labs
Test Result for UIM Dielectric Parameter
18/Nov/2011

Frequency (GHz)


FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon



FCC_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eHFCC_sH	Test_e	Test_s	
0.2000	49.97	0.80	51.12	0.76
0.2100	49.50	0.80	50.05	0.78
0.2200	49.03	0.81	49.28	0.80
0.2300	48.57	0.82	48.53	0.79
0.2400	48.10	0.83	48.62	0.79
0.2500	47.63	0.83	47.59	0.81
0.2600	47.17	0.84	47.25	0.82
0.2700	46.70	0.85	47.79	0.82
0.2800	46.23	0.86	47.06	0.84
0.2900	45.77	0.86	46.74	0.84
0.3000	45.30	0.87	45.68	0.84
0.3100	45.18	0.87	46.24	0.86
0.3200	45.06	0.87	46.44	0.87
0.3300	44.94	0.87	45.70	0.88
0.3400	44.82	0.87	45.06	0.88
0.3500	44.70	0.87	45.15	0.89
0.3600	44.58	0.87	44.94	0.89
0.3700	44.46	0.87	44.78	0.91
0.3800	44.34	0.87	43.78	0.91
0.3900	44.22	0.87	43.97	0.93
0.4000	44.10	0.87	43.34	0.92


Applicant:	HARRIS Corporation	FCC ID:	AQZ-XG-100P00	IC:	122D-XG100P00	
DUT Type:	Portable Multi-band PTT Radio Transceiver	Model:	Unity XG-100P	VHF Band 138-174 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 98 of 136



	<u>Date(s) of Evaluation</u> 09/14-19, 11/18, 2011	<u>Test Report Serial No.</u> 060111AQZ-T1102-S90V	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	
	<u>Test Report Issue Date</u> December 02, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

150 MHz Body


Celltech Labs
 Test Result for UIM Dielectric Parameter
 18/Nov/2011
 Frequency (GHz)
 FCC_eB FCC Limits for Body Epsilon
 FCC_sB FCC Limits for Body Sigma
 Test_e Epsilon of UIM
 Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.0500	64.37	0.72	81.08	0.75
0.0600	64.12	0.73	80.87	0.71
0.0700	63.87	0.74	78.97	0.74
0.0800	63.63	0.74	68.54	0.72
0.0900	63.38	0.75	68.19	0.78
0.1000	63.13	0.76	66.06	0.77
0.1100	62.89	0.77	68.10	0.78
0.1200	62.64	0.78	67.08	0.77
0.1300	62.39	0.78	62.94	0.79
0.1400	62.15	0.79	62.35	0.77
0.1500	61.90	0.80	63.85	0.77
0.1600	61.65	0.81	61.43	0.78
0.1700	61.41	0.82	62.49	0.78
0.1800	61.16	0.82	61.81	0.81
0.1900	60.91	0.83	61.95	0.79
0.2000	60.67	0.84	61.90	0.81
0.2100	60.42	0.85	60.97	0.81
0.2200	60.17	0.86	60.47	0.81
0.2300	59.93	0.86	60.23	0.82
0.2400	59.68	0.87	61.06	0.83
0.2500	59.43	0.88	60.70	0.84

Applicant:	HARRIS Corporation	FCC ID:	AQZ-XG-100P00	IC:	122D-XG100P00	
DUT Type:	Portable Multi-band PTT Radio Transceiver	Model:	Unity XG-100P	VHF Band 138-174 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 99 of 136

	<u>Date(s) of Evaluation</u> 09/14-19, 11/18, 2011	<u>Test Report Serial No.</u> 060111AQZ-T1102-S90V	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 02, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

APPENDIX E - DIPOLE CALIBRATION

Applicant:	HARRIS Corporation	FCC ID:	AQZ-XG-100P00	IC:	122D-XG100P00	
DUT Type:	Portable Multi-band PTT Radio Transceiver	Model:	Unity XG-100P	VHF Band 138-174 MHz		
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 133 of 136



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Celitech**

Certificate No: **D300V3-1009_Jan10**

CALIBRATION CERTIFICATE

Object **D300V3 - SN: 1009**

Calibration procedure(s) **QA CAL-15.v5
Calibration Procedure for dipole validation kits below 800 MHz**

Calibration date: **January 18, 2010**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	1-Apr-09 (No. 217-01030)	Apr-10
Power sensor E4412A	MY41495277	1-Apr-09 (No. 217-01030)	Apr-10
Power sensor E4412A	MY41498087	1-Apr-09 (No. 217-01030)	Apr-10
Reference 3 dB Attenuator	SN: S5054 (3c)	31-Mar-09 (No. 217-01026)	Mar-10
Reference 20 dB Attenuator	SN: S5086 (20b)	31-Mar-09 (No. 217-01028)	Mar-10
Type-N mismatch combination	SN: 5047.2 / 06327	31-Mar-09 (No. 217-01029)	Mar-10
Reference Probe ET3DV6 (LF)	SN: 1507	03-Jul-09 (No. ET3-1507_Jul09)	Jul-10
DAE4	SN: 654	04-May-09 (No. DAE4-654_May09)	May-10
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	04-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-09)	In house check: Oct-10

Calibrated by: **Jeton Kastrati** Name: **Jeton Kastrati** Function: **Laboratory Technician**

Approved by: **Katja Pokovic** Name: **Katja Pokovic** Function: **Technical Manager**

Signature

i.v. Kol

[Signature]

Issued: January 20, 2010

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- d) DASY4 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V5.2
Extrapolation	Advanced Extrapolation	
Phantom	ELI4 Flat Phantom	Shell thickness: 2 ± 0.2 mm
Distance Dipole Center - TSL	15 mm	with Spacer
Area Scan Resolution	dx, dy = 15 mm	
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	300 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	45.3	0.87 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	45.8 \pm 6 %	0.84 mho/m \pm 6 %
Head TSL temperature during test	(22.0 \pm 0.2) °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	condition	
SAR measured	398 mW input power	1.14 mW / g
SAR normalized	normalized to 1W	2.86 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	2.95 mW / g \pm 18.1 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	398 mW input power	0.76 mW / g
SAR normalized	normalized to 1W	1.92 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	1.97 mW / g \pm 17.6 % (k=2)

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	56.3 Ω - 8.5 j Ω
Return Loss	- 20.1 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.747 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	February 26, 2009

DASY5 Validation Report for Head TSL

Date/Time: 1/18/2010 2:57:54 PM

DUT: Dipole 300 MHz; Type: D300V3; Serial: D300V3 - SN:1009

Communication System: CW; Frequency: 300 MHz; Duty Cycle: 1:1

Medium: HSL300

Medium parameters used: $f = 300 \text{ MHz}$; $\sigma = 0.84 \text{ mho/m}$; $\epsilon_r = 45.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ET3DV6 - SN1507 (LF); ConvF(7.5, 7.5, 7.5); Calibrated: 7/3/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn654; Calibrated: 5/4/2009
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1003
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 57

Head/d=15mm, Pin=398mW/Area Scan (41x121x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 1.2 mW/g


Head/d=15mm, Pin=398mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 38.7 V/m; Power Drift = 0.00736 dB

Peak SAR (extrapolated) = 1.85 W/kg

SAR(1 g) = 1.14 mW/g; SAR(10 g) = 0.763 mW/g

Maximum value of SAR (measured) = 1.21 mW/g

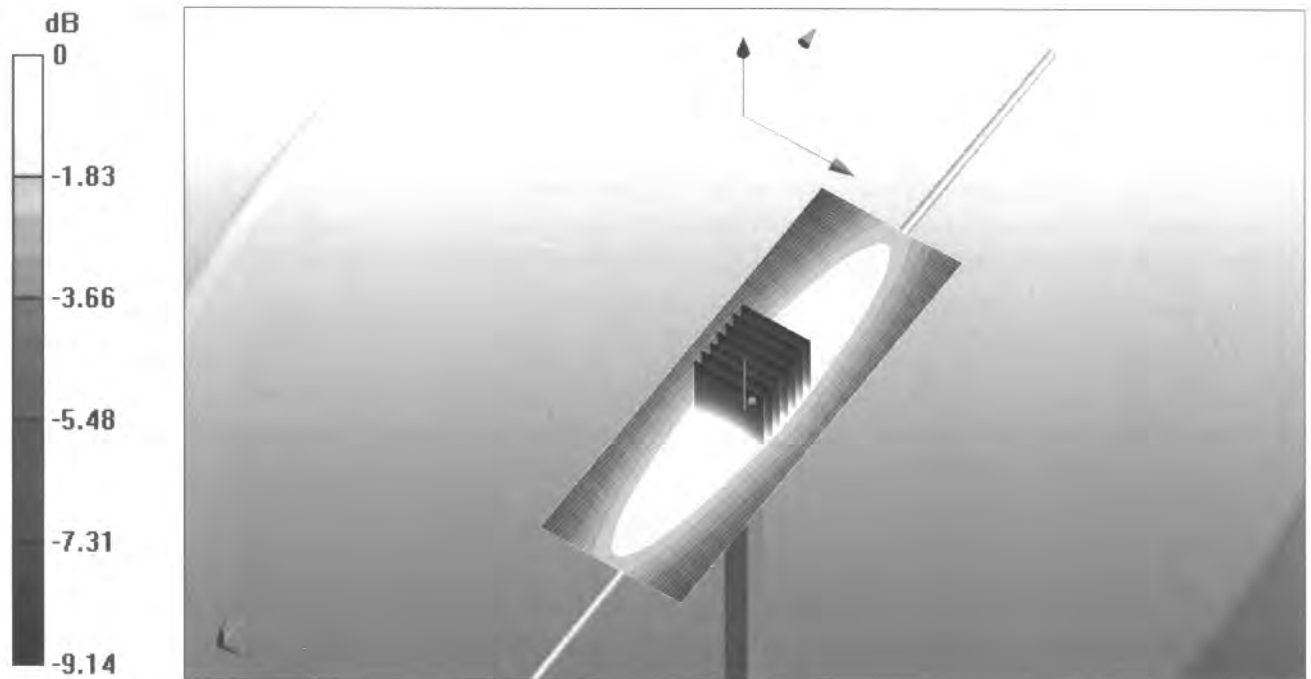


0 dB = 1.21mW/g

Impedance Measurement Plot for Head TSL

18 Jan 2010 14:44:07

CH1 S11 1 U FS 1: 56.348 Ω -8.4707 Ω 62.630 pF 300.000 000 MHz

*
Del
Cor

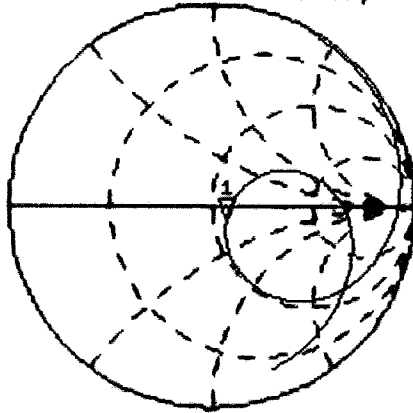


Avg
16
↑

CH2 S11 LOG 5 dB/REF -20 dB 1:-20.055 dB 300.000 000 MHz



Cor

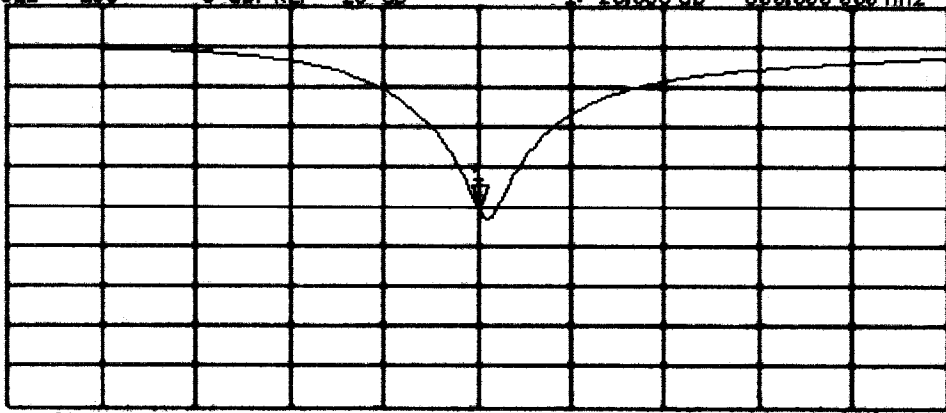Avg
16
↑




START 100.000 000 MHz

STOP 500.000 000 MHz

	<u>Date(s) of Evaluation</u> 09/14-19, 11/18, 2011	<u>Test Report Serial No.</u> 060111AQZ-T1102-S90V	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 02, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

APPENDIX F - PROBE CALIBRATION

Applicant:	HARRIS Corporation	FCC ID:	AQZ-XG-100P00	IC:	122D-XG100P00	
DUT Type:	Portable Multi-band PTT Radio Transceiver	Model:	Unity XG-100P	VHF Band 138-174 MHz		
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 134 of 136



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Celltech**

Certificate No: **ET3-1590_Jun11**

CALIBRATION CERTIFICATE

Object **ET3DV6 - SN:1590**

Calibration procedure(s) **QA CAL-01.v8, QA CAL-12.v7, QA CAL-23.v4, QA CAL-25.v4
 Calibration procedure for dosimetric E-field probes**

Calibration date: **June 22, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	31-Mar-11 (No. 217-01372)	Apr-12
Power sensor E4412A	MY41498087	31-Mar-11 (No. 217-01372)	Apr-12
Reference 3 dB Attenuator	SN: S5054 (3c)	29-Mar-11 (No. 217-01369)	Apr-12
Reference 20 dB Attenuator	SN: S5086 (20b)	29-Mar-11 (No. 217-01367)	Apr-12
Reference 30 dB Attenuator	SN: S5129 (30b)	29-Mar-11 (No. 217-01370)	Apr-12
Reference Probe ES3DV2	SN: 3013	29-Dec-10 (No. ES3-3013_Dec10)	Dec-11
DAE4	SN: 654	3-May-11 (No. DAE4-654_May11)	May-12
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

Calibrated by:	Name Jeton Kastrati	Function Laboratory Technician	Signature
Approved by:	Name Katja Pokovic	Function Technical Manager	

Issued: June 23, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; VR_{x,y,z}**: A, B, C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Probe ET3DV6

SN:1590

Manufactured: March 19, 2001
Calibrated: June 22, 2011

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: ET3DV6 - SN:1590

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	1.93	2.00	1.66	$\pm 10.1 \%$
DCP (mV) ^B	96.0	98.7	88.6	

Modulation Calibration Parameters

UID	Communication System Name	PAR		A dB	B dB	C dB	VR mV	Unc ^E (k=2)
10000	CW	0.00	X	0.00	0.00	1.00	104.2	$\pm 2.7 \%$
			Y	0.00	0.00	1.00	117.7	
			Z	0.00	0.00	1.00	129.9	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E^2 -field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: ET3DV6 - SN:1590

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
450	43.5	0.87	7.30	7.30	7.30	0.18	2.10	± 13.4 %
835	41.5	0.90	6.50	6.50	6.50	0.38	2.55	± 12.0 %
900	41.5	0.97	6.39	6.39	6.39	0.39	2.47	± 12.0 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

DASY/EASY - Parameters of Probe: ET3DV6- SN:1590


Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
450	56.7	0.94	7.82	7.82	7.82	0.12	2.04	± 13.4 %
835	55.2	0.97	6.37	6.37	6.37	0.42	2.33	± 12.0 %
900	55.0	1.05	6.27	6.27	6.27	0.40	2.45	± 12.0 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.


Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

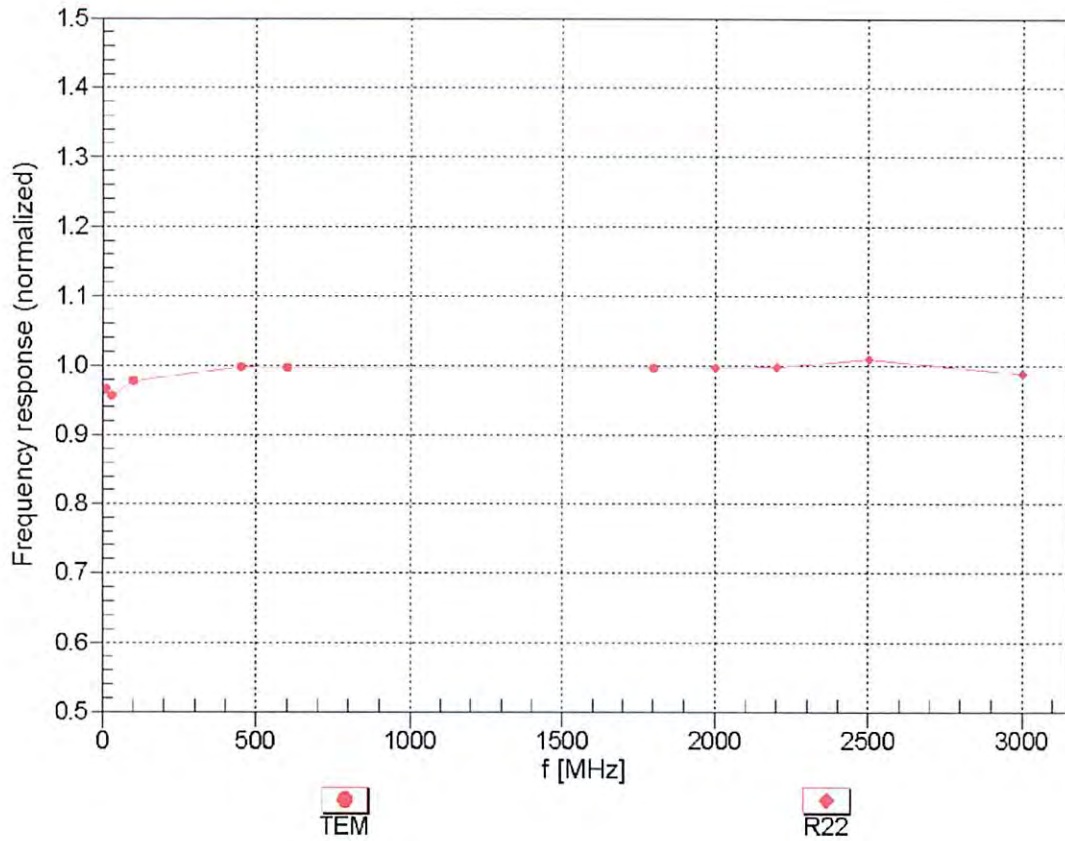



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

f=600 MHz,TEM


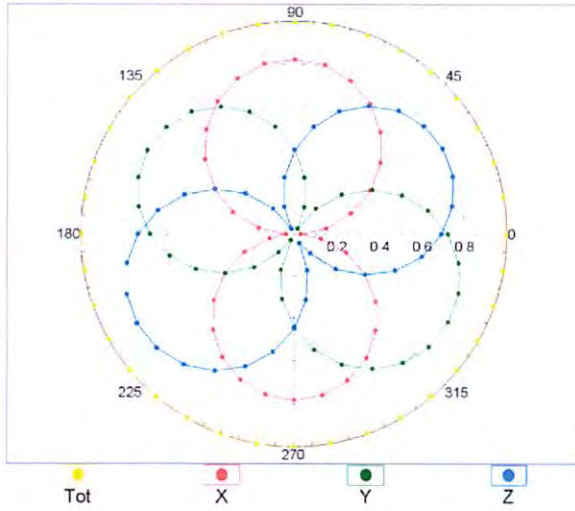


f=1800 MHz,R22

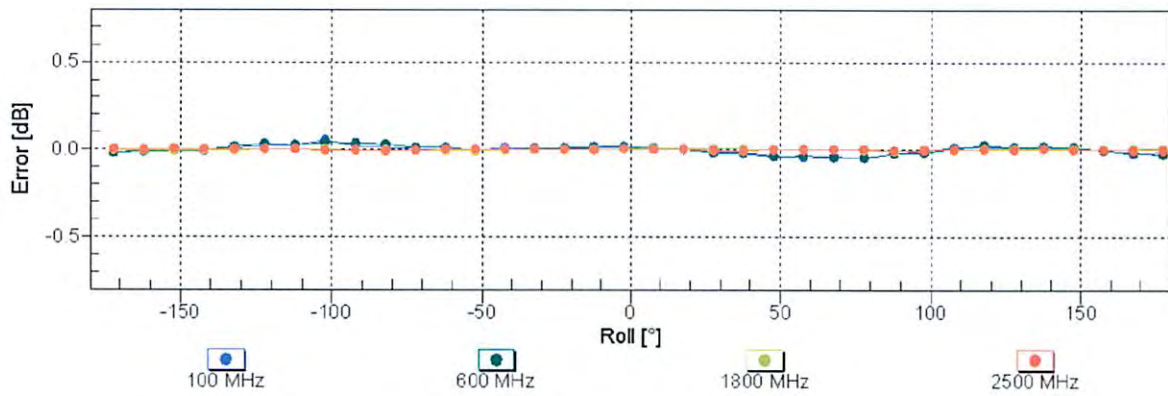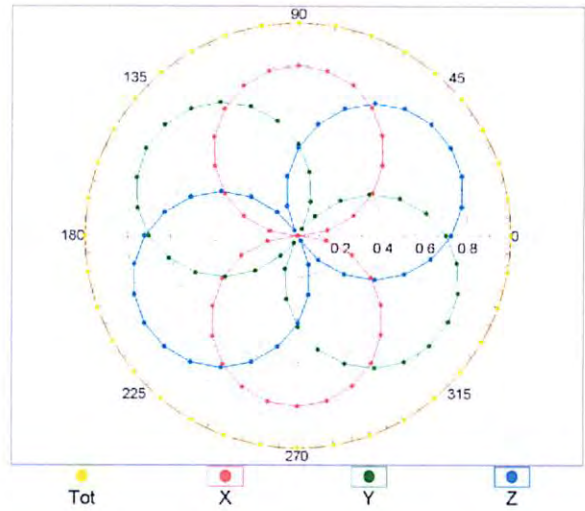


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell , $f = 900 \text{ MHz}$)

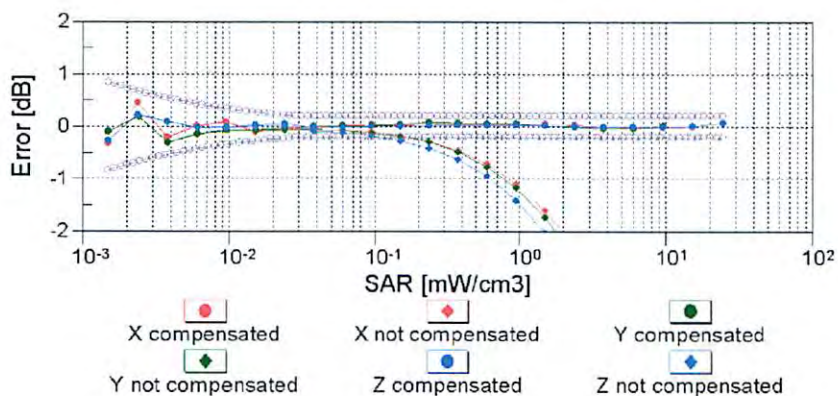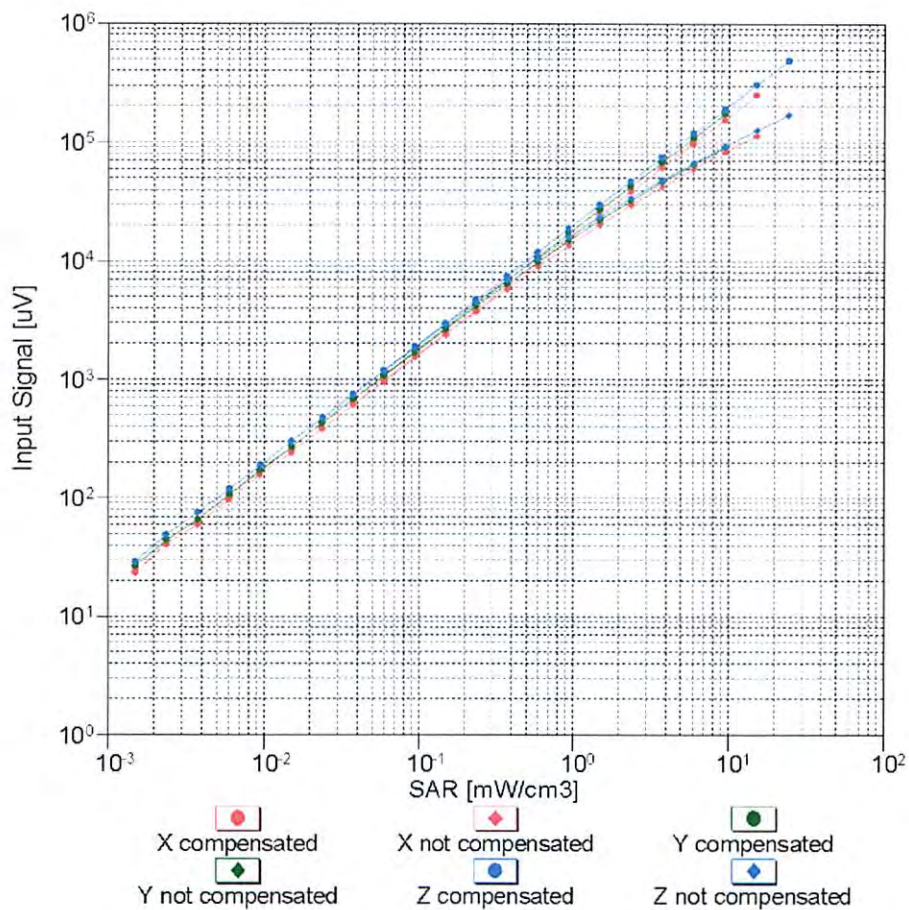



Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

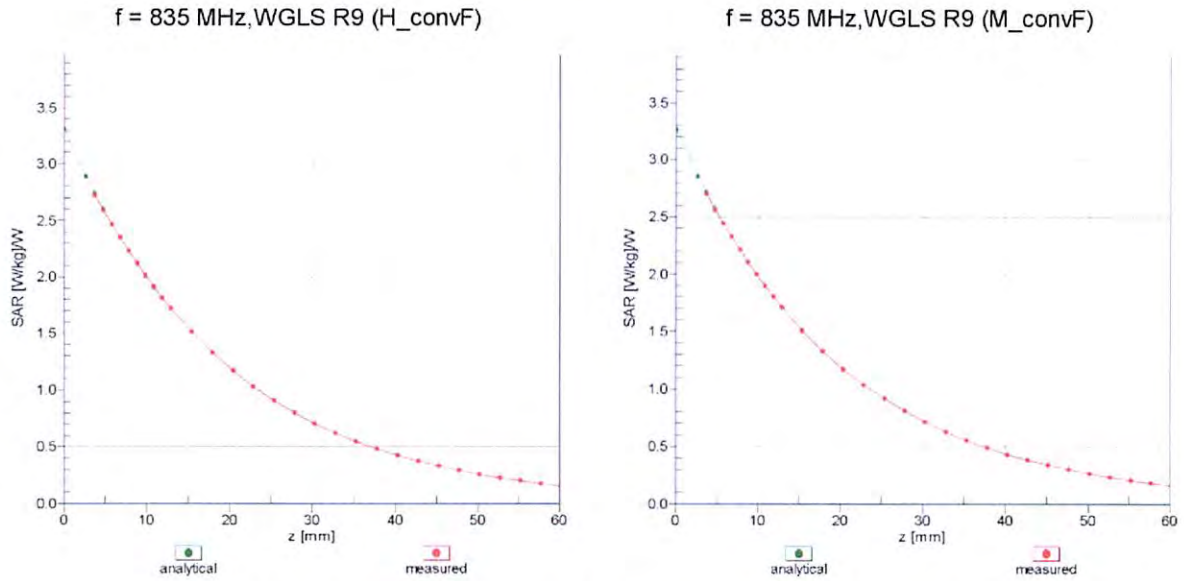

Deviation from Isotropy in Liquid

Error (ϕ, ϑ), f = 900 MHz

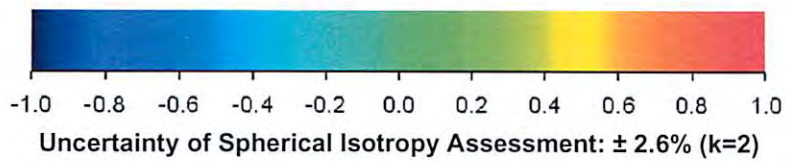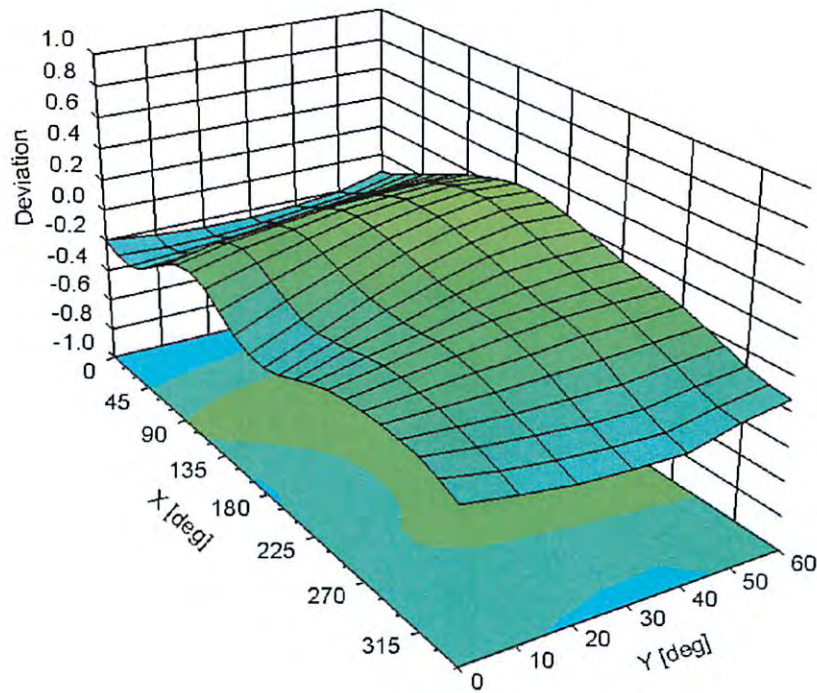

DASY/EASY - Parameters of Probe: ET3DV6 - SN:1590

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	Not applicable
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	enabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	6.8 mm
Probe Tip to Sensor X Calibration Point	2.7 mm
Probe Tip to Sensor Y Calibration Point	2.7 mm
Probe Tip to Sensor Z Calibration Point	2.7 mm
Recommended Measurement Distance from Surface	4 mm

Additional Conversion Factors

for Dosimetric E-Field Probe

Type:	ET3DV6
Serial Number:	1590
Place of Assessment:	Zurich
Date of Assessment:	June 24, 2011
Probe Calibration Date:	June 22, 2011

Schmid & Partner Engineering AG hereby certifies that conversion factor(s) of this probe have been evaluated on the date indicated above. The assessment was performed using the FDTD numerical code SEMCAD of Schmid & Partner Engineering AG. Since the evaluation is coupled with measured conversion factors, it has to be recalculated yearly, i.e., following the re-calibration schedule of the probe. The uncertainty of the numerical assessment is based on the extrapolation from measured value at 450, 835 and 900 MHz.



Assessed by:




Dosimetric E-Field Probe ET3DV6 SN:1590Conversion factor (\pm standard deviation)**150 \pm 50 MHz** *ConvF* **8.9 \pm 10%** $\epsilon_r = 52.3$
 $\sigma = 0.76$ mho/m
(head tissue)**300 \pm 50 MHz** *ConvF* **8.0 \pm 9%** $\epsilon_r = 45.3$
 $\sigma = 0.87$ mho/m
(head tissue)**150 \pm 50 MHz** *ConvF* **8.3 \pm 10%** $\epsilon_r = 61.9$
 $\sigma = 0.80$ mho/m
(body tissue)**Important Note:**

For numerically assessed probe conversion factors, parameters Alpha and Delta in the DASYS software must have the following entries: Alpha = 0 and Delta = 1.

Please see also DASYS Manual.

	<u>Date(s) of Evaluation</u> 09/14-19, 11/18, 2011	<u>Test Report Serial No.</u> 060111AQZ-T1102-S90V	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 02, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

APPENDIX G - BARSKI PLANAR PHANTOM CERTIFICATE OF CONFORMITY

Applicant:	HARRIS Corporation	FCC ID:	AQZ-XG-100P00	IC:	122D-XG100P00	
DUT Type:	Portable Multi-band PTT Radio Transceiver	Model:	Unity XG-100P	VHF Band 138-174 MHz		
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 135 of 136

2378 Westlake Road
Kelowna, B.C. Canada
V1Z-2V2



Ph. # 250-769-6848
Fax # 250-769-6334
E-mail: barskiind@shaw.ca
Web: www.bcfiberglass.com

FIBERGLASS FABRICATORS

Certificate of Conformity

Item : Flat Planar Phantom Unit # 03-01
Date: June 16, 2003
Manufacturer: Barski Industries (1985 Ltd)

Test	Requirement	Details
Shape	Compliance to geometry according to drawing	Supplied CAD drawing
Material Thickness	Compliant with the requirements	2mm +/- 0.2mm in measurement area
Material Parameters	Dielectric parameters for required frequencies Based on Dow Chemical technical data	100 MHz-5 GHz Relative permittivity<5 Loss Tangent<0.05

Conformity

Based on the above information, we certify this product to be compliant to the requirements specified.

Signature: _____

A handwritten signature in black ink, appearing to read 'Daniel Chailier', is written over a horizontal line.

Daniel Chailier



Fiberglass Planar Phantom - Top View



Fiberglass Planar Phantom - Front View




Fiberglass Planar Phantom - Back View





Fiberglass Planar Phantom - Bottom View

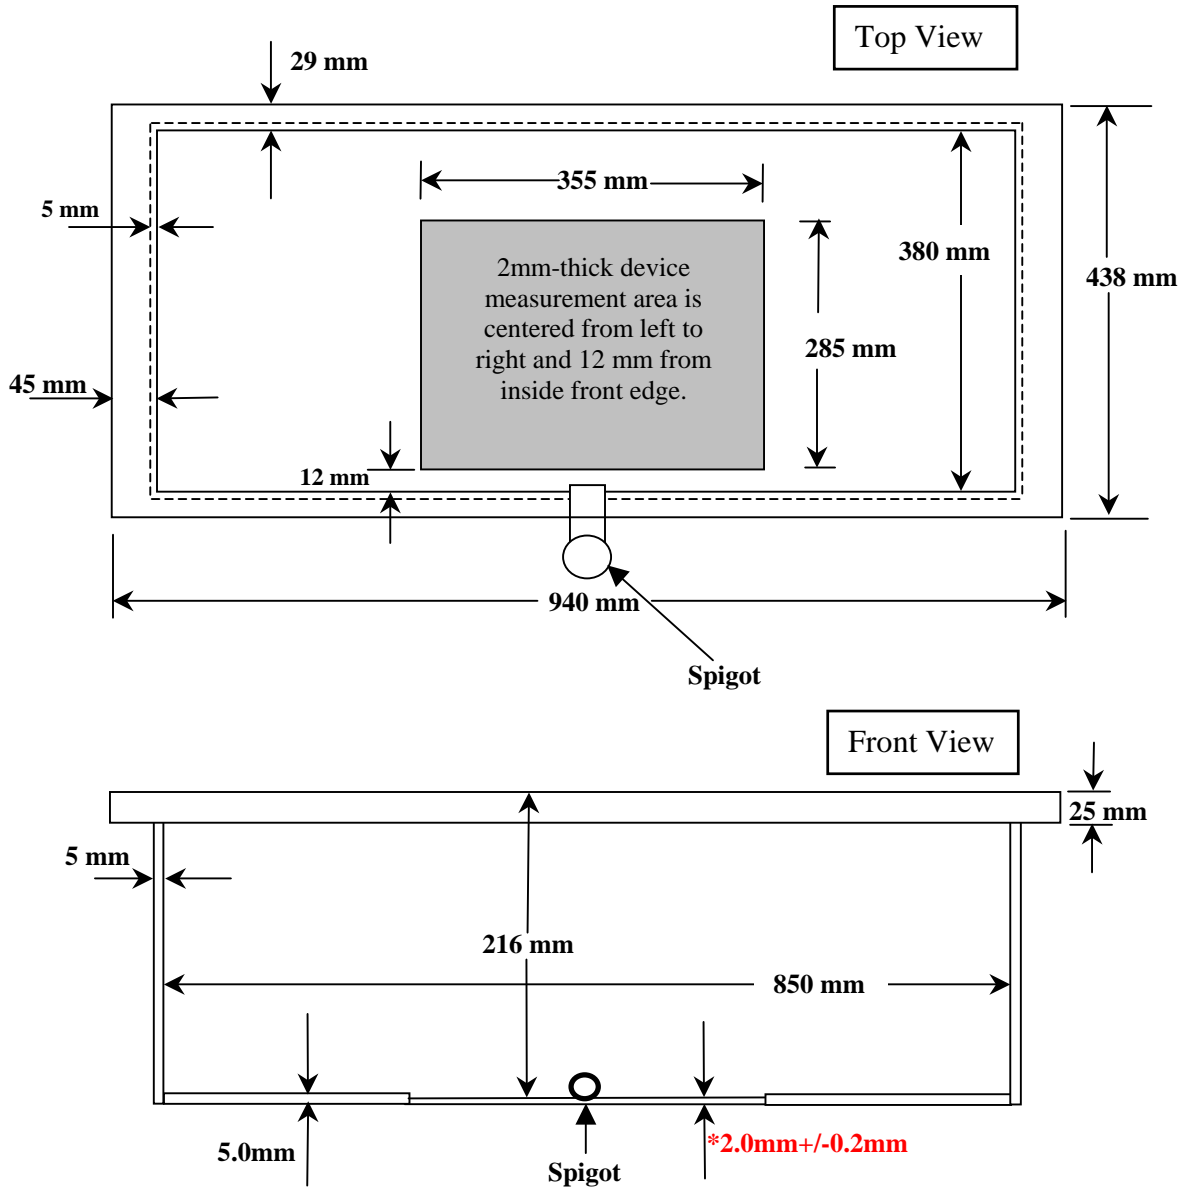
Dimensions of Fiberglass Planar Phantom (Manufactured by Barski Industries Ltd. - Unit# 03-01)



**Note: Measurements that aren't repeated for the opposite sides are the same as the side measured.
This drawing is not to scale.**

	<u>Date(s) of Evaluation</u> 09/14-19, 11/18, 2011	<u>Test Report Serial No.</u> 060111AQZ-T1102-S90V	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> December 02, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

APPENDIX H - AUDIO ACCESSORY COMBINATIONS (FCC KDB 643646 D01v01r01)

Applicant:	HARRIS Corporation	FCC ID:	AQZ-XG-100P00	IC:	122D-XG100P00	
DUT Type:	Portable Multi-band PTT Radio Transceiver	Model:	Unity XG-100P	VHF Band 138-174 MHz		
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 136 of 136



**HARRIS CORPORATION FCC ID: AQZ-XG-100P00
Unity XG-100P PTT Radio Transceiver (VHF Band)**

Body SAR Test Considerations for Audio Accessories without Built-in Antenna - Audio Accessory Combinations (FCC KDB 643646 D01v01r01 Page 9)

Audio Acc. ID #	Battery a				Battery b				Battery c				Battery d				Battery e			
	Antenna 1				Antenna 1				Antenna 1				Antenna 1				Antenna 1			
	Bw#B1	Bw#B4	Bw#B7	Bw#B10	Bw#B1	Bw#B4	Bw#B7	Bw#B10	Bw#B1	Bw#B4	Bw#B7	Bw#B10	Bw#B1	Bw#B4	Bw#B7	Bw#B10	Bw#B1	Bw#B4	Bw#B7	Bw#B10
A1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
A2	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
A3	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1

Notes:

1. All audio accessory options can be utilized with an antenna, battery and body-worn combination.
2. The accessory combinations evaluated for SAR are highlighted in yellow.
3. Please refer to Section 7.0 of the SAR report for description of accessory ID #.
4. Bw = Body-worn accessory