




**DATE: 6 March 2017**

**I.T.L. (PRODUCT TESTING) LTD.  
FCC/IC Radio Test Report  
for  
Telrad Networks Ltd.**

**Equipment under test:**

**CPE**

**CPE8100-PRO-1D-3.X**

Tested by:   
M. Zohar

Approved by:   
D. Shidlow

This report must not be reproduced, except in full, without the written permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.



# Measurement/Technical Report for Telrad Networks Ltd.

## CPE

### CPE8100-PRO-1D-3.X

### FCC ID: ARA-CPE81PRO3XA

### IC: 899A-CPE81PRO3XA

This report concerns:

Original Certification: X

Class II change:

Class I change:

Equipment type:

FCC: TNB Licensed Non-Broadcast Station  
Transmitter

IC: Wireless Broadband Access (3650-3700 MHz)  
Unrestricted Contention Protocols

Standards used:

FCC, Part 90, Subpart Z  
FCC, Part 2

RSS-197, Issue 1, February, 2010

RSS-GEN, Issue 4, November, 2014

SRSP-303.65, Issue 2, June 2010

Measurement procedure used is ANSI C63.10- 2013

Substitution Method used as in ANSI/TIA-603-D: 2010

Application for Certification  
prepared by:

Ronit Pinchuck  
ITL (Product Testing) Ltd.  
1 Bat Sheva Street  
Lod 711600  
Israel  
e-mail rpinchuck@itl.co.il

Applicant for this device:

(different from "prepared by")

Klara Milman  
Telrad Networks Ltd.  
1 Batsheva St., P.O.B 6118  
Lod 711600  
Israel  
Tel: +972-73-246-7651  
Fax: +972-73-246-7504  
e-mail: Klara.Milman@telrad.com



# TABLE OF CONTENTS

<b>1.</b>	<b>GENERAL INFORMATION</b>	<b>5</b>
1.1	Administrative Information	5
1.2	Abbreviations and Symbols	6
1.3	List of Accreditations	7
1.4	Product Description	8
1.5	Test Methodology	8
1.6	Test Facility	8
1.7	Measurement Uncertainty	8
<b>2.</b>	<b>SYSTEM TEST CONFIGURATION</b>	<b>9</b>
2.1	Justification	9
2.2	Product Data	9
2.3	EUT Exercise Software	9
2.4	Special Accessories	9
2.5	Equipment Modifications	9
2.6	Configuration of Tested System	10
<b>3.</b>	<b>TEST SET-UP PHOTOS</b>	<b>11</b>
<b>4.</b>	<b>OCCUPIED BANDWIDTH (CHANNEL BANDWIDTH)</b>	<b>15</b>
4.1	Test Specification	15
4.2	Test Procedure	15
4.3	Test Limit	15
4.4	Test Results	15
4.5	Test Equipment Used; Occupied Bandwidth	35
<b>5.</b>	<b>TRANSMITTER FREQUENCY STABILITY</b>	<b>36</b>
5.1	Test Specification	36
5.2	Test Procedure	36
5.3	Test Limit	36
5.4	Test Results	37
5.5	Test Instruments Used; Frequency Stability	45
<b>6.</b>	<b>TRANSMITTER OUTPUT POWER AND EQUIVALENT ISOTROPICALLY RADIATED POWER (E.I.R.P.)</b>	<b>46</b>
6.1	Test Specification	46
6.2	Test Procedure	46
6.3	FCC Limit	46
6.4	IC Limit	46
6.5	Test Results	47
6.6	Test Equipment Used; Transmitter Output Power and EIRP	90
<b>7.</b>	<b>EMISSION MASKS</b>	<b>91</b>
7.1	Test Specification	91
7.2	Test Procedure	91
7.3	Test Limit	91
7.4	Test Results	91
7.5	Test Equipment Used; Emission Masks	110
<b>8.</b>	<b>CONDUCTED TRANSMITTER UNWANTED EMISSIONS</b>	<b>111</b>
8.1	Test Specification	111
8.2	Test Procedure	111
8.3	Test Limit	111
8.4	Test Results	111
8.5	Test Equipment Used; Conducted Unwanted Emissions	172
<b>9.</b>	<b>RADIATED UNWANTED EMISSIONS</b>	<b>173</b>
9.1	Test Specification	173
9.2	Test Procedure	173
9.3	Test Limit	174
9.4	Test Results	174
9.5	Test Instrumentation Used; Spurious Radiated Emission	176



<b>10. RECEIVER SPURIOUS EMISSIONS</b> .....	<b>177</b>
10.1 Test Specification .....	177
10.2 Test Procedure .....	177
10.3 Test Limit .....	177
10.4 Test Results.....	177
10.5 Test Instrumentation Used; Receiver Spurious Emissions .....	180
<b>11. ANTENNA GAIN/INFORMATION</b> .....	<b>181</b>
<b>12. APPENDIX A - CORRECTION FACTORS</b> .....	<b>182</b>
12.1 Correction factors for RF OATS Cable 35m.....	182
12.2 Correction factors for RF OATS Cable 10m.....	183
12.3 Correction factors for biconical antenna – ITL # 1356 .....	184
12.4 Correction factors for log periodic antenna .....	185
12.5 Correction factors for Active Loop Antenna .....	186
12.6 Correction factors for Horn ANTENNA.....	187
12.7 Correction factors for Horn Antenna .....	188
12.8 Correction factors for Horn Antenna Ka Band.....	189
12.9 Correction factor for RF CABLE for Semi Anechoic Chamber.....	191



# 1. General Information

## 1.1 Administrative Information

Manufacturer: Telrad Networks Ltd.

Manufacturer's Address: 1 Batsheva St.  
P.O.B. 6118  
Lod 711600  
Israel  
Tel: +972-73-246-7651  
Fax: +972-73-246-7504

Manufacturer's Representative: Klara Milman

Equipment Under Test (E.U.T): CPE

Product Marketing Name (PMN): CPE8100-PRO-1D-3.X

Serial Number No.: Not designated

HVIN: CPE8100PRO3XA

Date of Receipt of E.U.T: December 28, 2016

Start of Test: December 28, 2016

End of Test: January 16, 2017

Test Laboratory Location: I.T.L (Product Testing) Ltd.  
1 Batsheva St,  
Lod, Israel 7116002

Test Specifications: FCC Part 90, Subpart Z  
FCC Part 2  
RSS-197, Issue 1: 2010  
RSS-GEN, Issue 4: 2014  
SRSP-303.65, Issue 2: 2010



## 1.2 **Abbreviations and Symbols**

The following abbreviations and symbols are applicable to this test report:

A/m	ampere per meter
AC	alternating current
AM	amplitude modulation
AMN	Artificial Mains Network
ARA	Antenna Research Associates
Aux	auxiliary
Avg	average
CBW	channel bandwidth
CDN	coupling-decoupling network
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
db $\mu$ V	decibel referred to one microvolt
db $\mu$ V/m	decibel referred to one microvolt per meter
DC	direct current
EFT/B	electrical fast transient/burst
EMC	electromagnetic compatibility
ESD	electrostatic discharge
E.U.T.	equipment under test
GHz	gigahertz
HP	Hewlett Packard
Hz	Hertz
kHz	kilohertz
kV	kilovolt
LED	light emitting diode
LISN	line impedance stabilization network
m	meter
mHn	millihenry
MHz	megahertz
msec	millisecond
N/A	not applicable
per	period
QP	quasi-peak
PC	personal computer
RF	radio frequency
RE	radiated emission
sec	second
V	volt
V/m	volt per meter
VRMS	volts root mean square



### **1.3 List of Accreditations**

The EMC laboratory of I.T.L. is accredited by the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), FCC Designation Number IL1005.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-3006, R-2729, T-1877, G-245.
5. Industry Canada (Canada), IC File No.: 46405-4025; Site No. IC 4025A-1, IC 4025A-2.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.



#### **1.4 Product Description**

CPE8100 is a high performance LTE CPE (Customer Premises Equipment) product designed to enable quick LTE service deployment to the remote customers. It provides high data throughput and networking features to end users who need both bandwidth and roaming capabilities in the certain area.

#### **1.5 Test Methodology**

Conducted and radiated testing were performed according to the procedures in ANSI C63.10: 2013, FCC Part 90, Subpart Z, RSS-197, Issue 1: 2010, RSS-Gen, Issue 4: 2014 and SRSP-303.65, Issue 2: 2010. Radiated testing was performed at an antenna to EUT distance of 3 meters.

#### **1.6 Test Facility**

Radiated emissions tests were performed at I.T.L.'s testing facility in Lod, Israel. I.T.L.'s EMC Laboratory is accredited by A2LA, certificate No. 1152.01 and its FCC Designation Number is IL1005.

#### **1.7 Measurement Uncertainty**

Conducted Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4)

0.15 – 30 MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 3.44 dB

Radiated Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4) for open site 30-1000MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 4.96 dB





## 2. System Test Configuration

### 2.1 Justification

All measurements was performed conducted except for radiated spurious emissions which was performed with the E.U.T in the installation position.

### 2.2 Product Data

EUT	CPE 8100
Working voltage	100 – 240V AC via POE Manufacturer: Gospell Digital Technology Model: G0720-480-050 S/N: 1552-0000003
Mode of operation	Transceiver CPE
Modulations	QPSK, 16QAM, 64QAM
Assigned Frequency Range	3650.0-3700.0 MHz
Operation frequency range	3652.5-3697.5MHz
Antenna Gain	15.0dBi
Modulation BW	5MHz, 10MHz, 15MHz, 20MHz

### 2.3 EUT Exercise Software

CPE8000 V2.1 PACK7 (ver318) software was used.

### 2.4 Special Accessories

No special accessories were needed in order to achieve compliance.

### 2.5 Equipment Modifications

No modifications were necessary in order to achieve compliance.

## 2.6 Configuration of Tested System

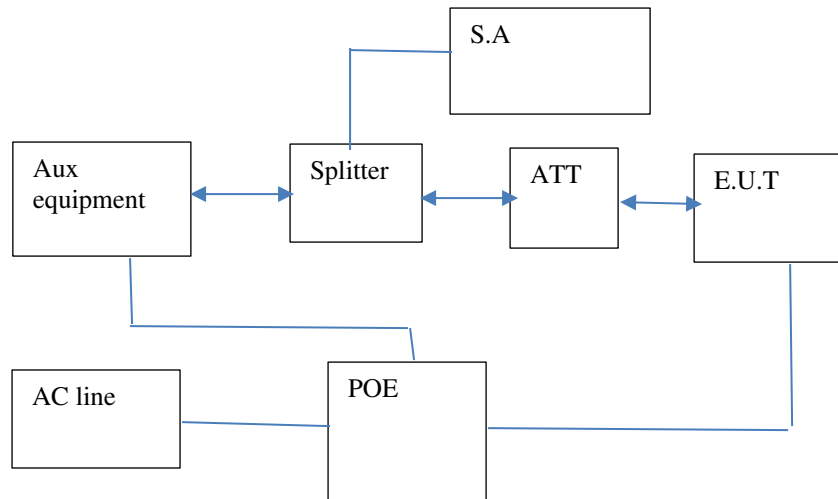


Figure 1. Conducted Emission From Antenna Ports Test Set-up

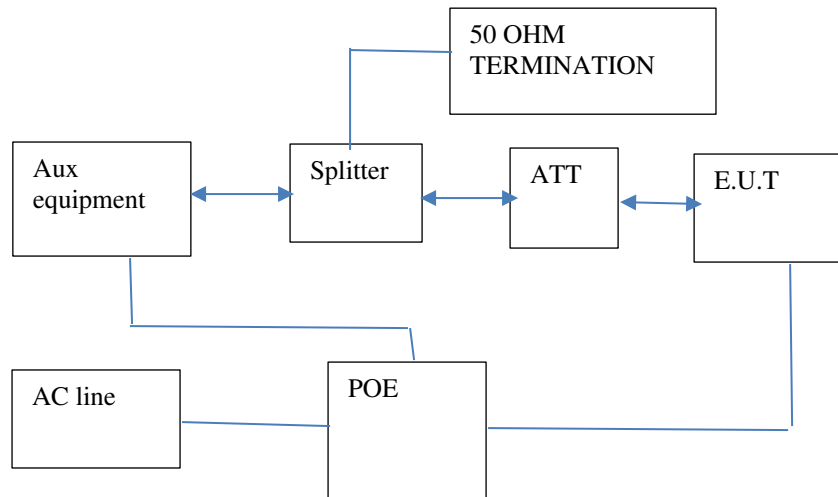


Figure 2. Radiated Emission Test Set-Up

### 3. Test Set-up Photos



Figure 3. Conducted Emission From Antenna Port Tests


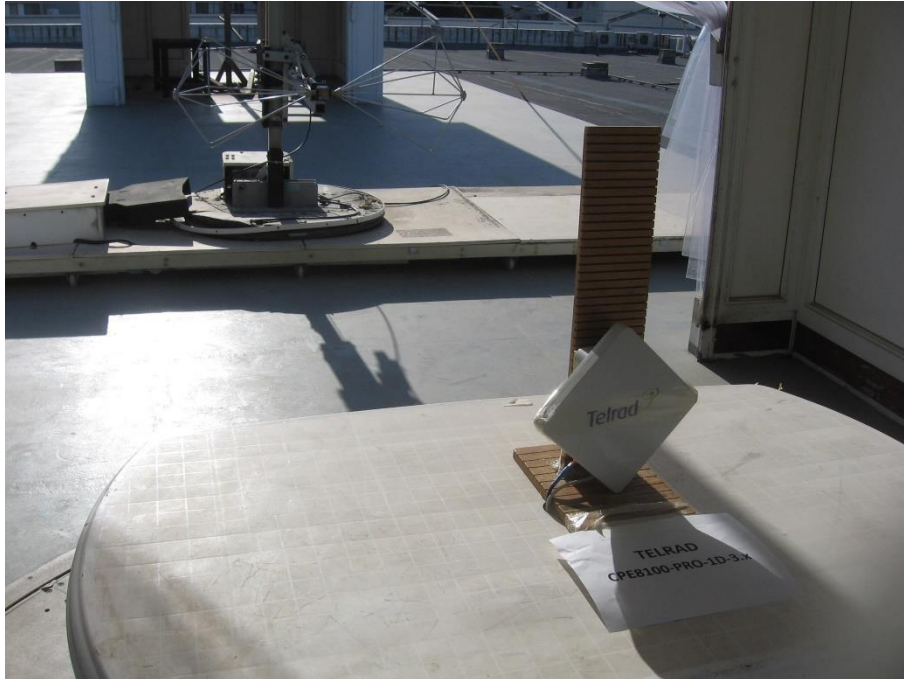



Figure 4. Radiated Emission Test




**Figure 5. Radiated Emission Test**

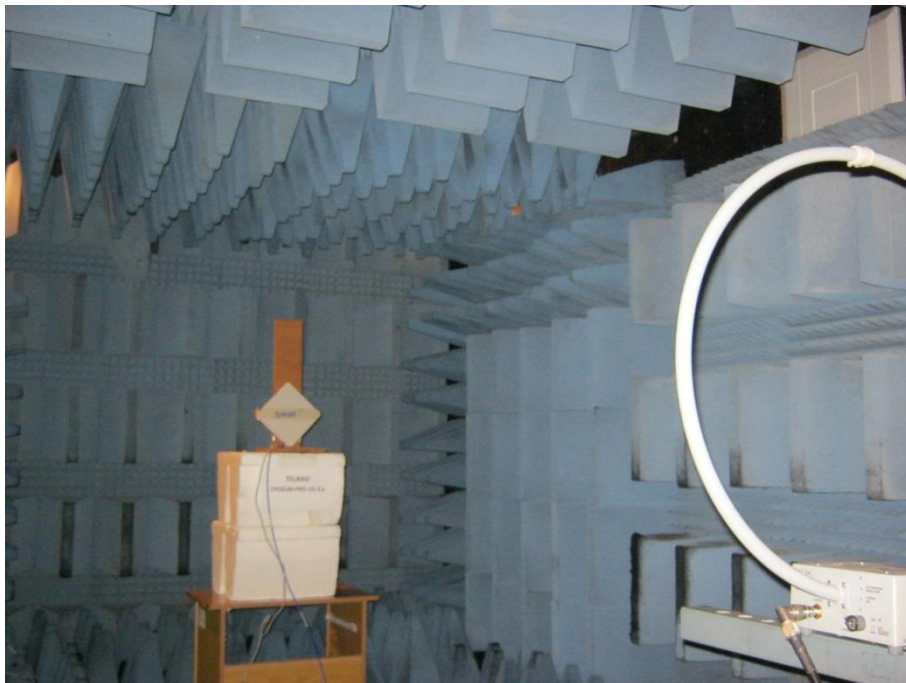

**Figure 6. Radiated Emission Test**

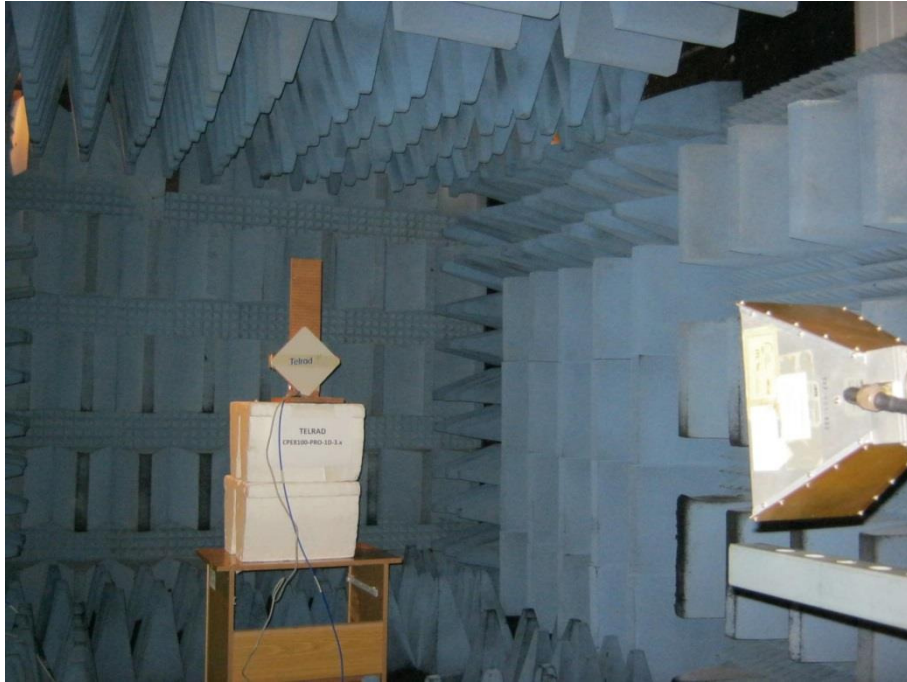

**Figure 7. Radiated Emission Test**

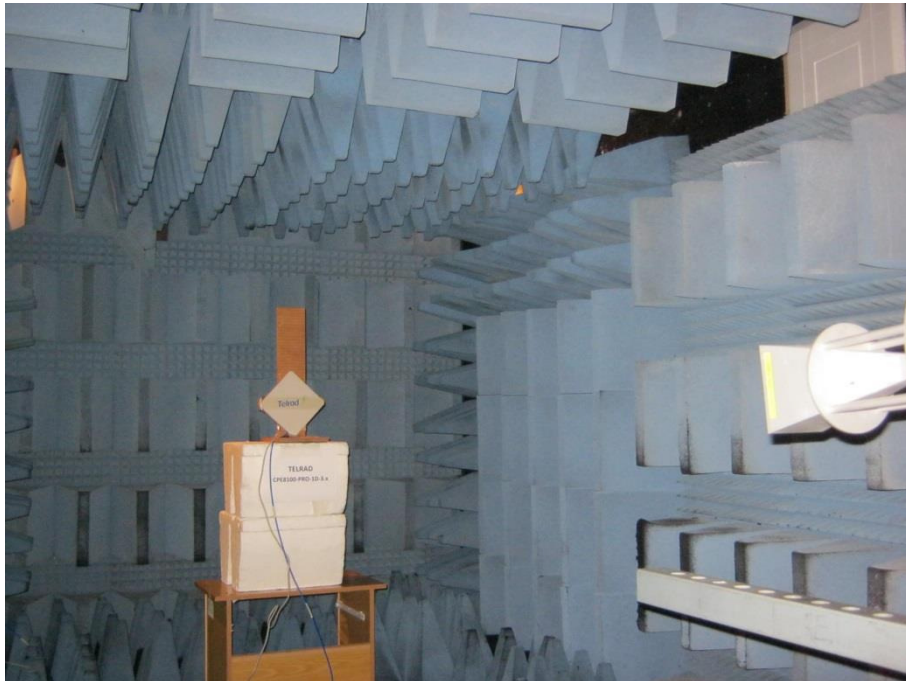

**Figure 8. Radiated Emission Test**



**Figure 9. Radiated Emission Test**

## 4. Occupied Bandwidth (Channel Bandwidth)

### 4.1 Test Specification

RSS 197, Issue 1: 2010, Section 5.2  
FCC, Part 2, Section 2.1049

### 4.2 Test Procedure

(Temperature (20°C)/ Humidity (59%RH))

The E.U.T. was set to the applicable test frequency with OFDMA modulations and 5MHz, 10MHz, 15MHz and 20MHz CBW.

The E.U.T. antenna terminal was connected to the Spectrum Analyzer through an external attenuator, an appropriate coaxial cable, coupler, and DC block, (total loss=-31.0 dB). The spectrum analyzer was set to proper resolution B.W. The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limit, the mean powers radiated are each equal to 0.5% of the total mean power radiated by a given emission.

### 4.3 Test Limit

The channel bandwidth shall be equal or greater than 1 MHz.

### 4.4 Test Results

JUDGEMENT: Passed

See additional information in *Figure 14* to *Figure 49*.

Operating Frequency (MHz)	Modulation	Reading (MHz)	Limit (MHz)
3652.5	64QAM	3.6	≥1.0
	16QAM	3.6	≥1.0
	QPSK	3.6	≥1.0
3675.0	64QAM	3.6	≥1.0
	16QAM	3.6	≥1.0
	QPSK	3.6	≥1.0
3697.5	64QAM	3.6	≥1.0
	16QAM	3.6	≥1.0
	QPSK	3.6	≥1.0

Figure 10. Occupied Bandwidth Test Results 5 MHz, CBW

Operating Frequency	Modulation	Reading	Limit
(MHz)		(MHz)	(MHz)
3655.0	64QAM	8.6	$\geq 1.0$
	16QAM	8.6	$\geq 1.0$
	QPSK	8.6	$\geq 1.0$
3675.0	64QAM	8.6	$\geq 1.0$
	16QAM	8.6	$\geq 1.0$
	QPSK	8.6	$\geq 1.0$
3695.0	64QAM	8.6	$\geq 1.0$
	16QAM	8.6	$\geq 1.0$
	QPSK	8.6	$\geq 1.0$

**Figure 11. Occupied Bandwidth Test Results 10 MHz, CBW**

Operating Frequency	Modulation	Reading	Limit
(MHz)		(MHz)	(MHz)
3657.5	64QAM	12.9	$\geq 1.0$
	16QAM	12.9	$\geq 1.0$
	QPSK	12.8	$\geq 1.0$
3675.0	64QAM	12.9	$\geq 1.0$
	16QAM	12.9	$\geq 1.0$
	QPSK	12.9	$\geq 1.0$
3692.5	64QAM	12.9	$\geq 1.0$
	16QAM	12.9	$\geq 1.0$
	QPSK	12.9	$\geq 1.0$

**Figure 12. Occupied Bandwidth Test Results 15 MHz, CBW**

Operating Frequency	Modulation	Reading	Limit
(MHz)		(MHz)	(MHz)
3660.0	64QAM	17.2	$\geq 1.0$
	16QAM	17.2	$\geq 1.0$
	QPSK	17.2	$\geq 1.0$
3675.0	64QAM	17.2	$\geq 1.0$
	16QAM	17.2	$\geq 1.0$
	QPSK	17.2	$\geq 1.0$
3690.0	64QAM	17.2	$\geq 1.0$
	16QAM	17.2	$\geq 1.0$
	QPSK	17.2	$\geq 1.0$

**Figure 13. Occupied Bandwidth Test Results 20 MHz, CBW**



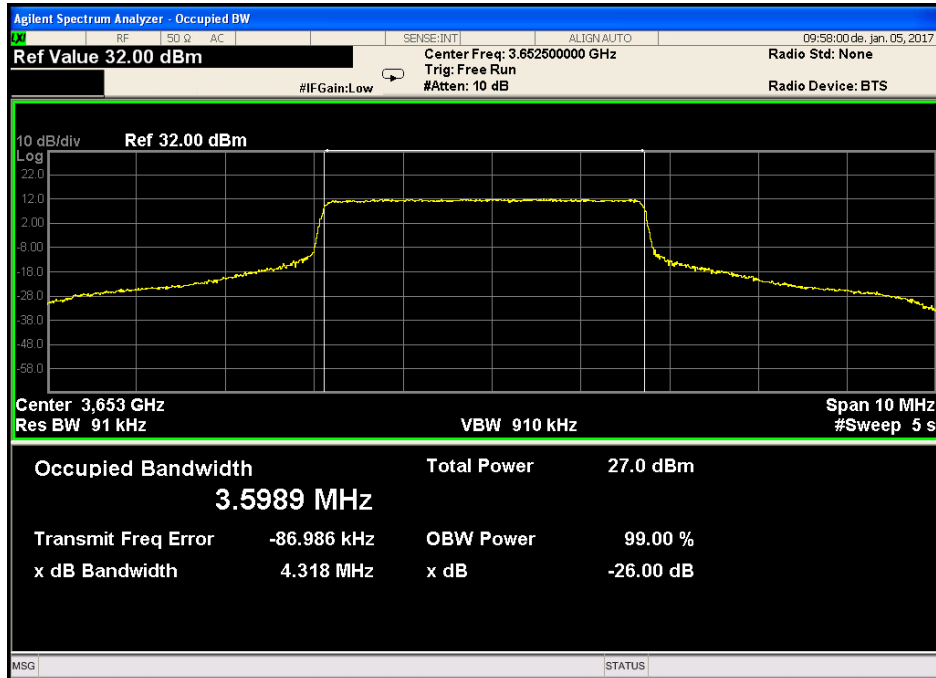


Figure 14. 5MHz CBW – Operating Frequency 3652.5MHz, 64QAM

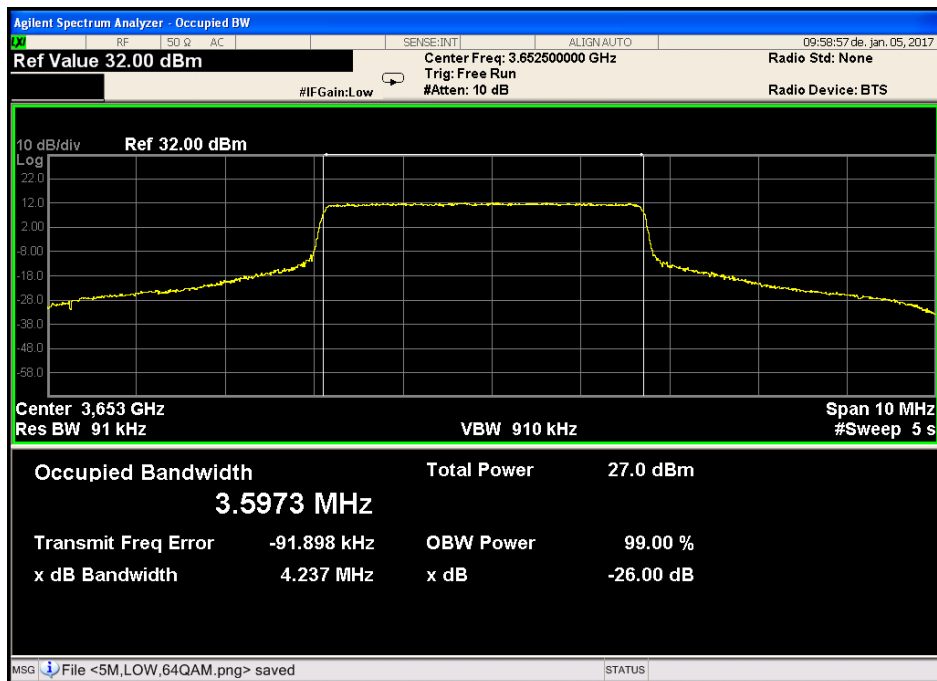


Figure 15. 5MHz CBW – Operating Frequency 3652.5MHz, 16QAM

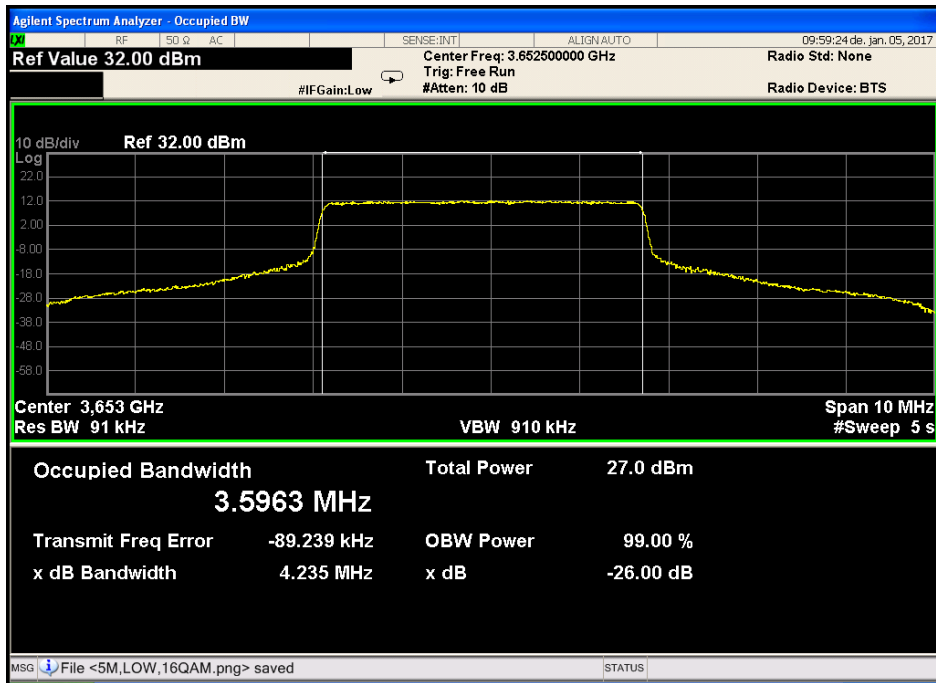


Figure 16. 5MHz CBW – Operating Frequency 3652.5MHz, QPSK

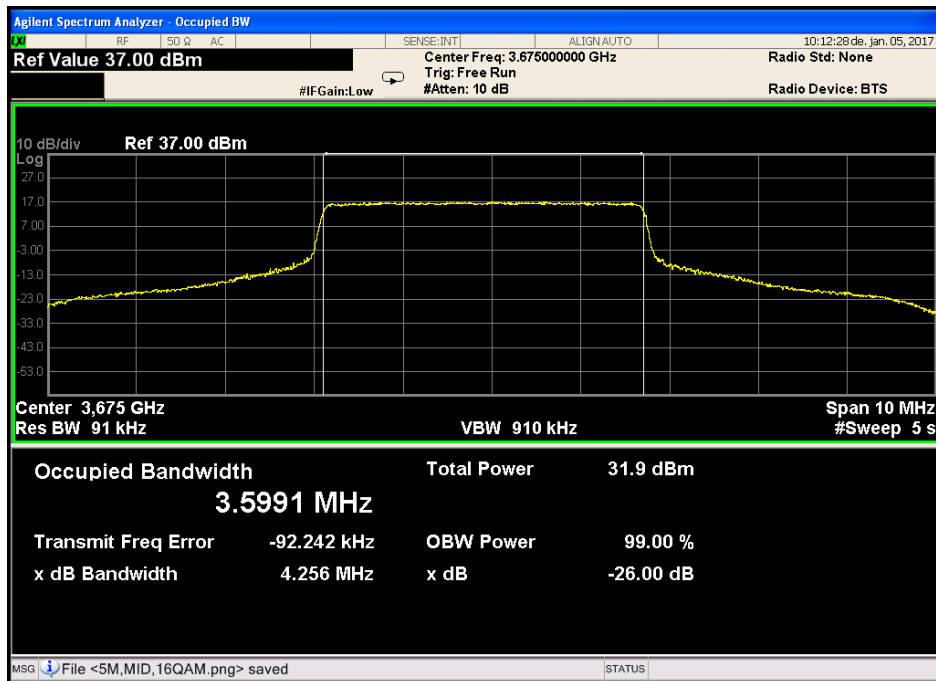


Figure 17. 5MHz CBW – Operating Frequency 3675.0MHz, 64QAM

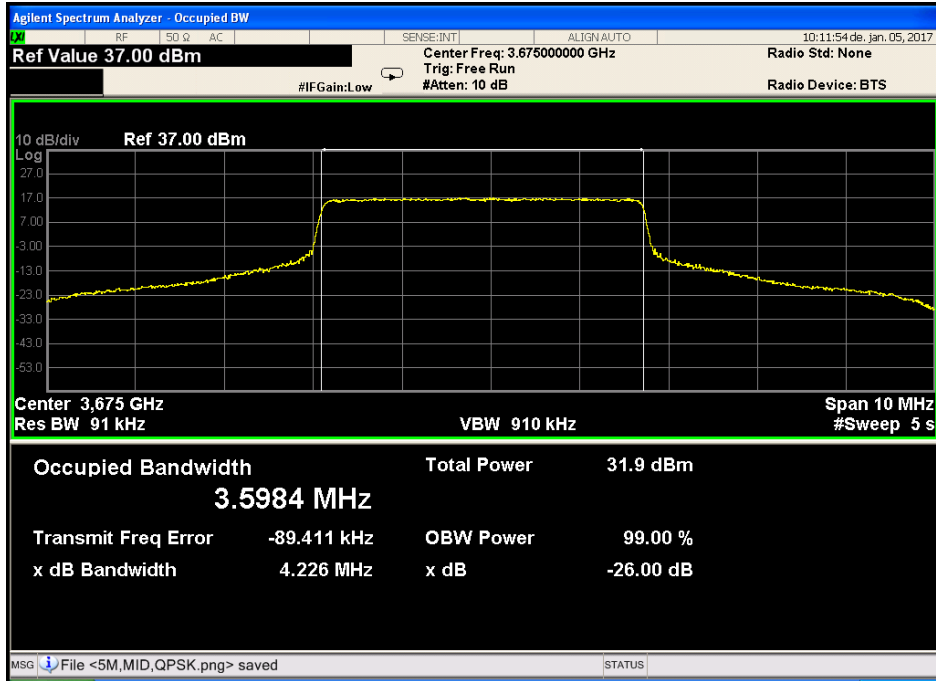


Figure 18. 5MHz CBW – Operating Frequency 3675.0MHz, 16QAM

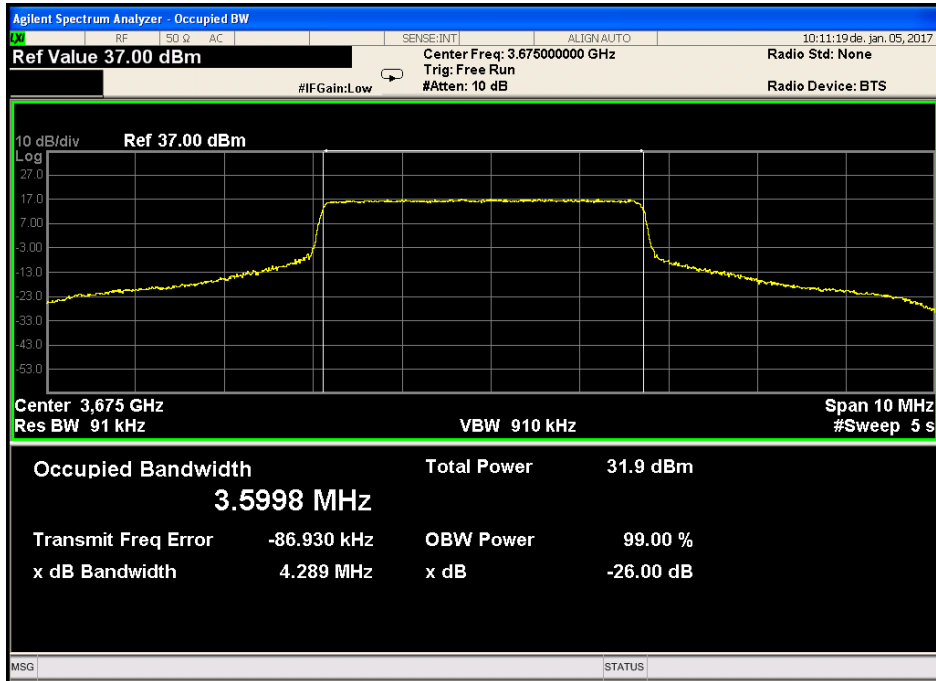


Figure 19. 5MHz CBW – Operating Frequency 3675.0MHz, QPSK

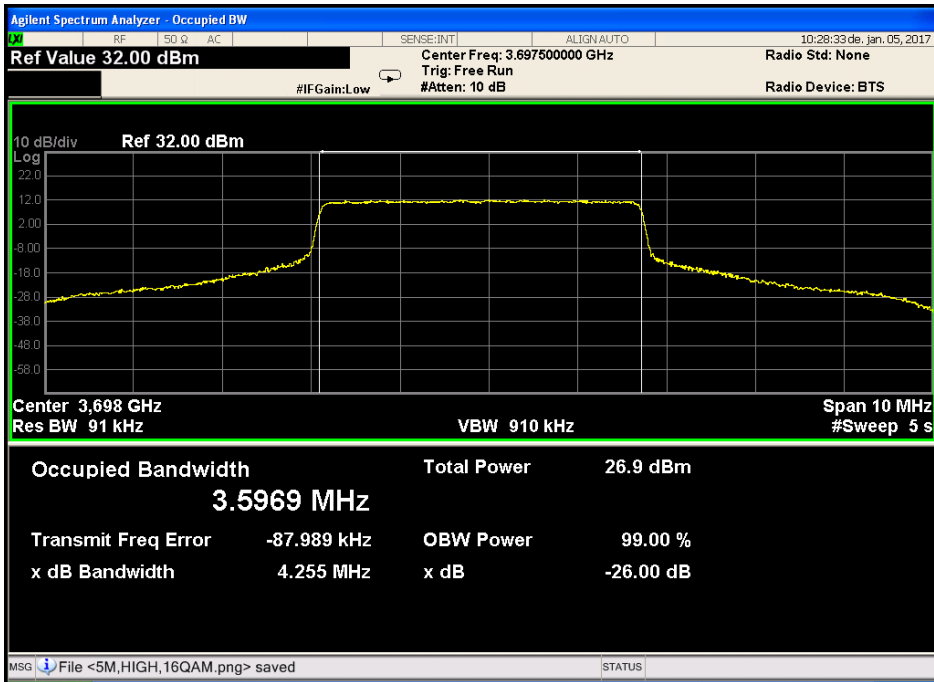


Figure 20. 5MHz CBW – Operating Frequency 3697.5MHz, 64QAM

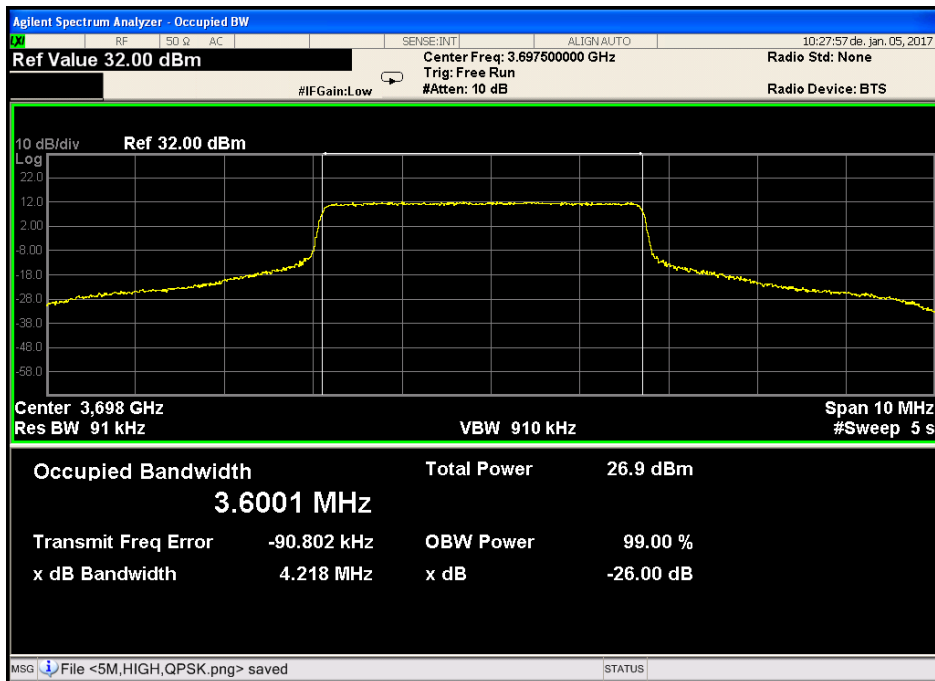


Figure 21. 5MHz CBW – Operating Frequency 3697.5MHz, 16QAM

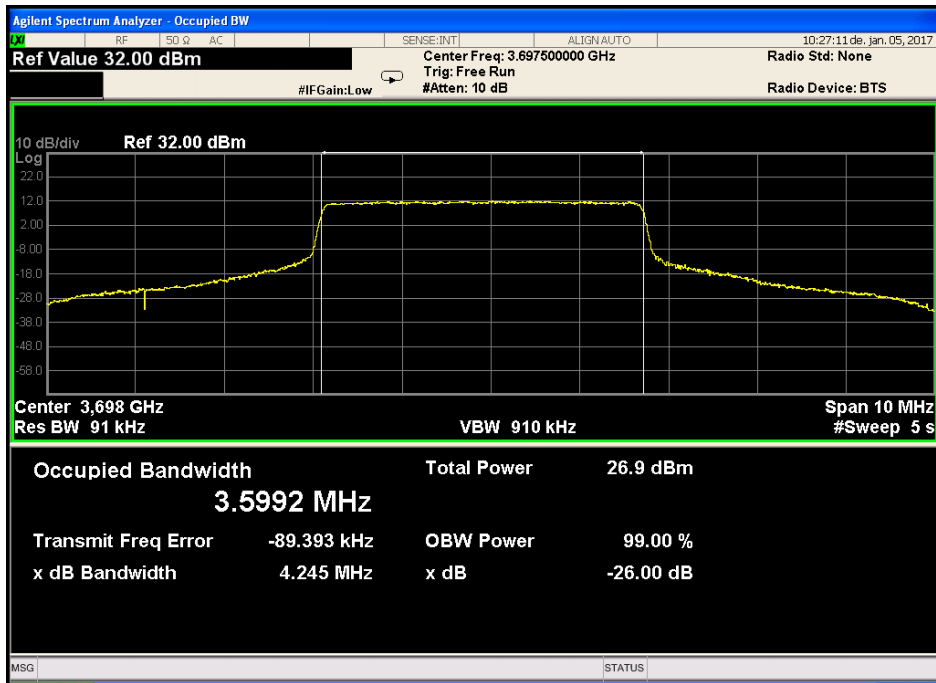


Figure 22. 5MHz CBW – Operating Frequency 3697.5MHz, QPSK

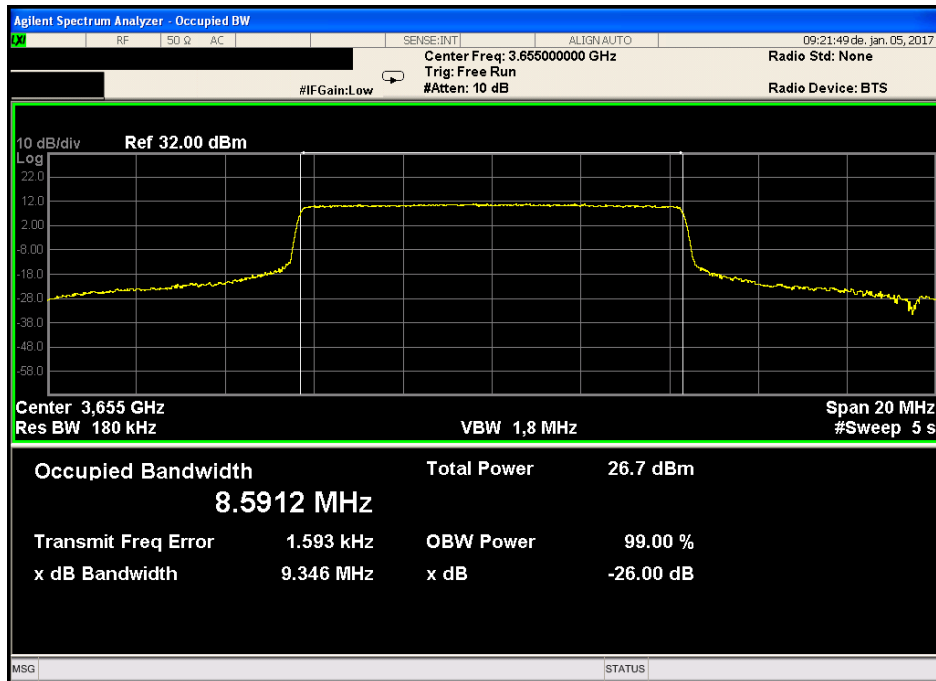


Figure 23. 10MHz CBW – Operating Frequency 3655.0MHz, 64QAM

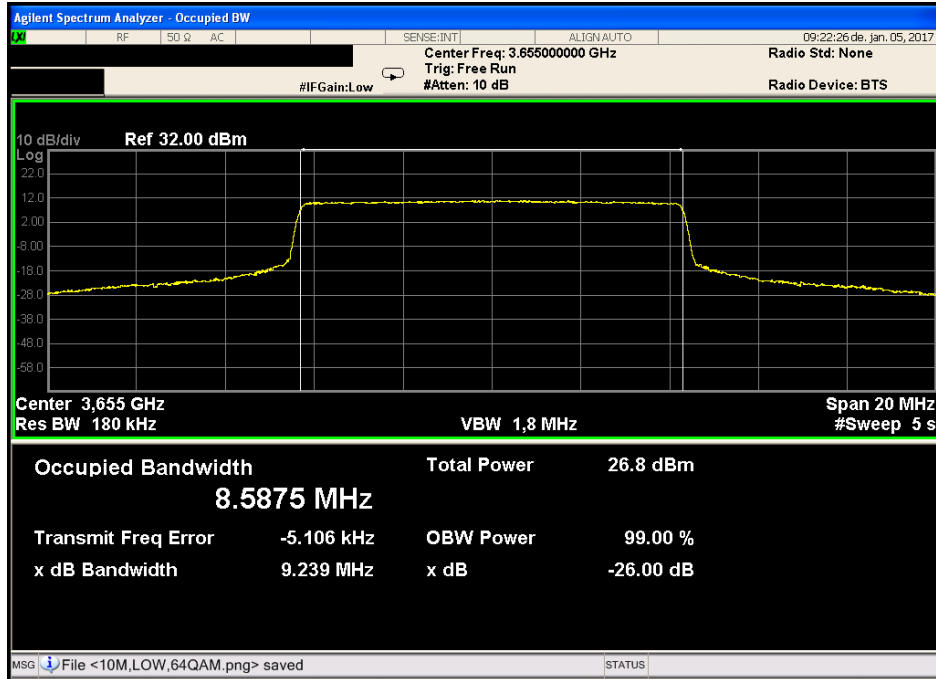


Figure 24. 10MHz CBW – Operating Frequency 3655.0MHz, 16QAM

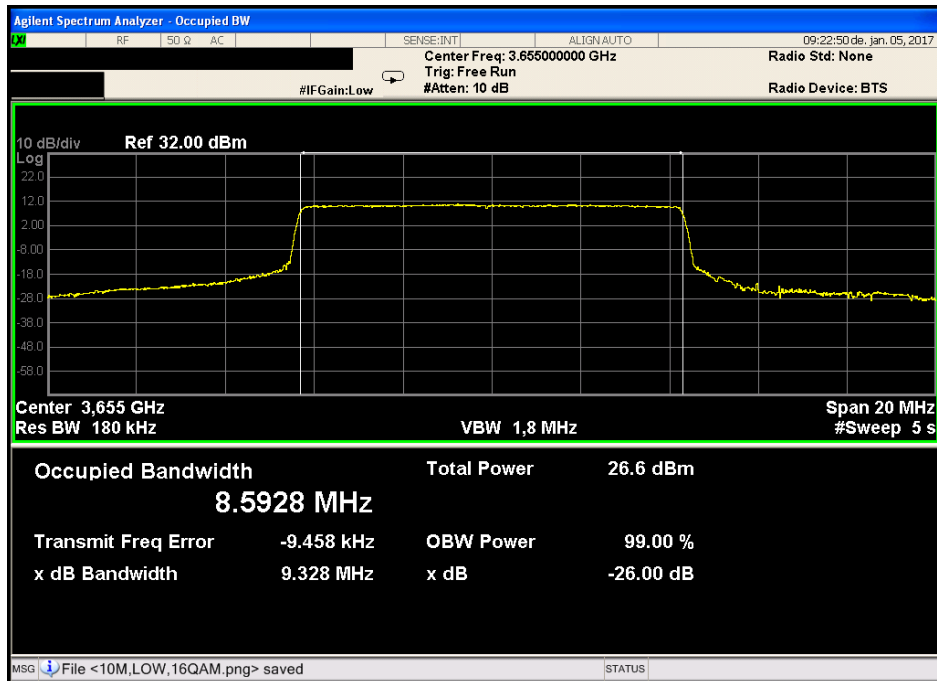


Figure 25. 10MHz CBW – Operating Frequency 3655.0MHz, QPSK

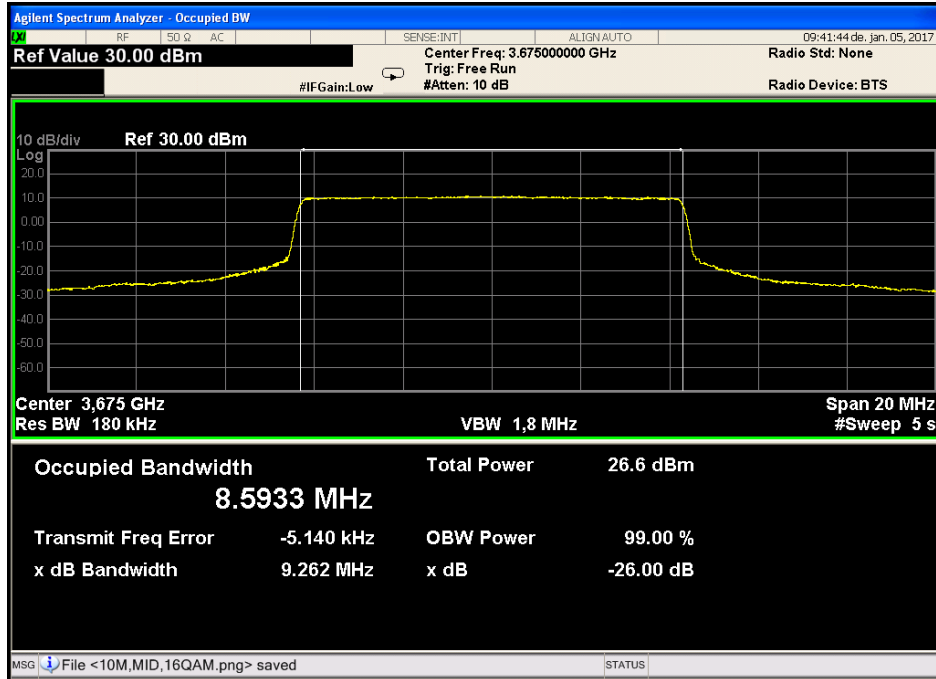


Figure 26. 10MHz CBW – Operating Frequency 3675.0MHz, 64QAM

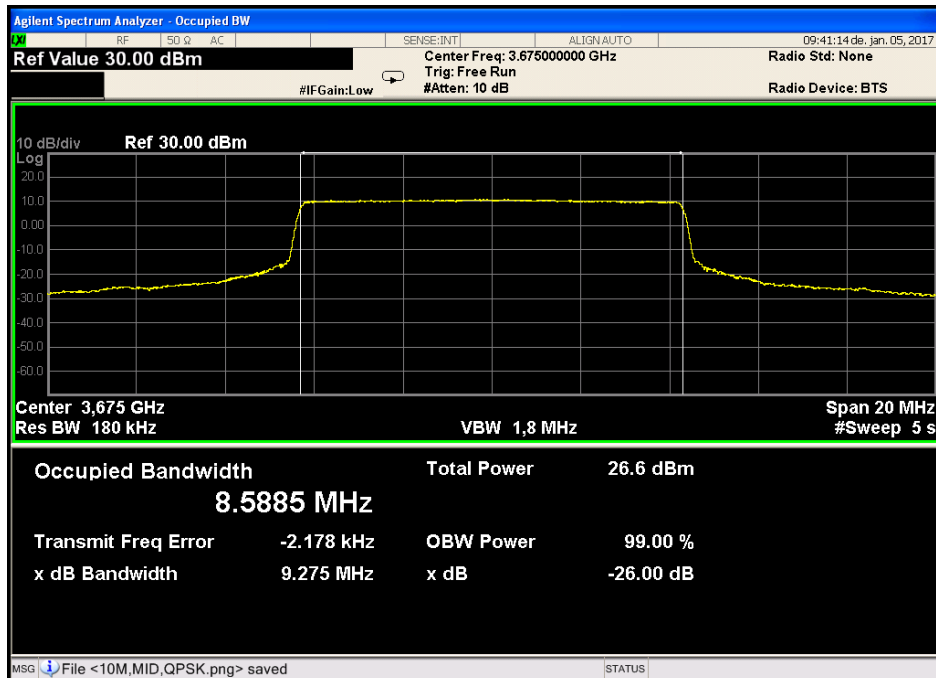


Figure 27. 10MHz CBW – Operating Frequency 3675.0MHz, 16QAM

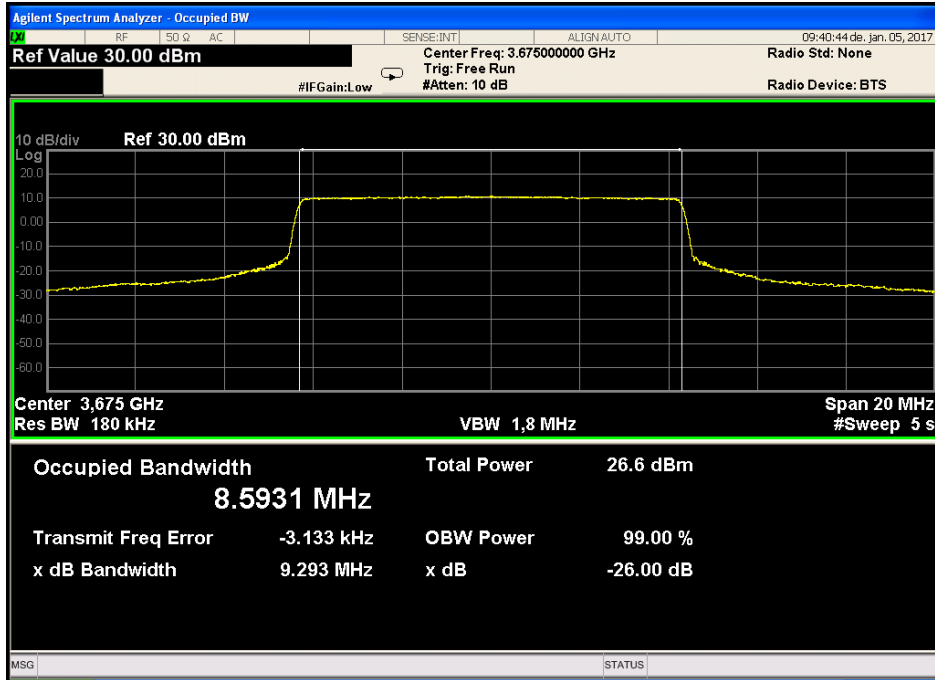


Figure 28. 10MHz CBW – Operating Frequency 3675.0MHz, QPSK

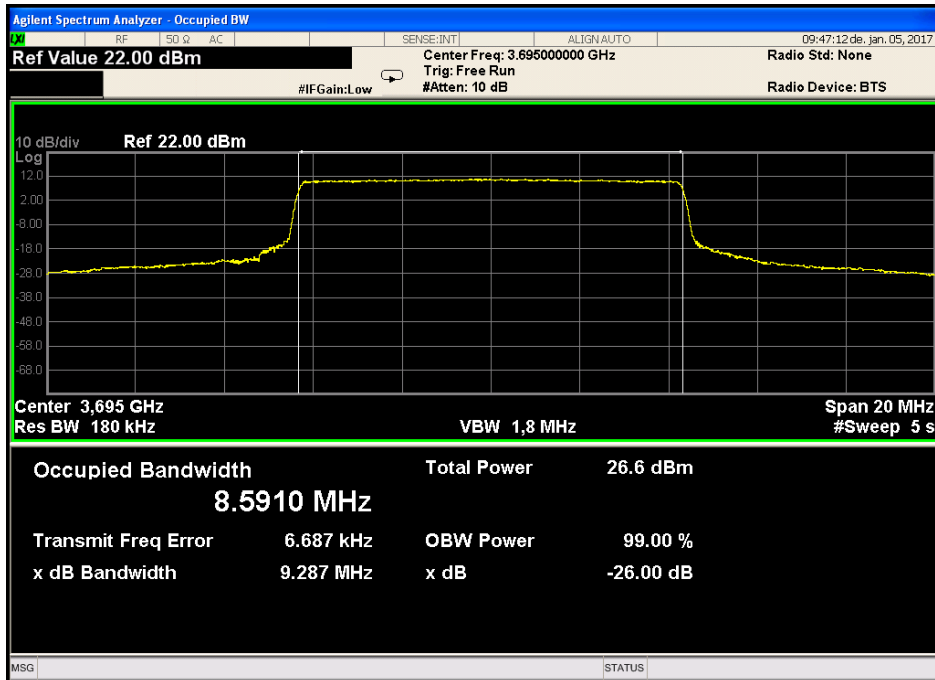


Figure 29. 10MHz CBW – Operating Frequency 3695.0MHz, 64QAM



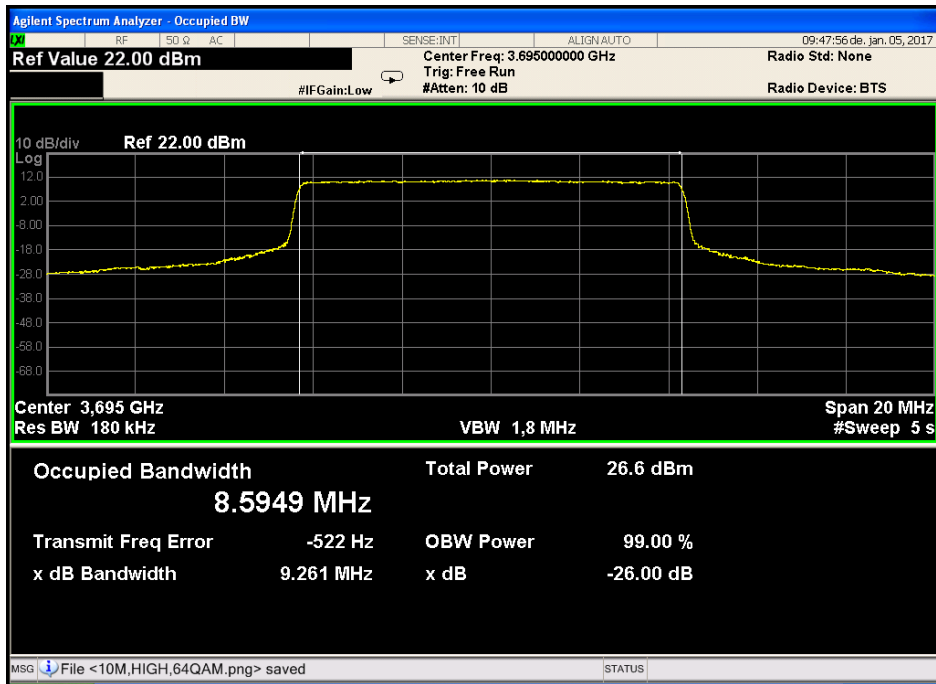


Figure 30. 10MHz CBW – Operating Frequency 3695.0MHz, 16QAM

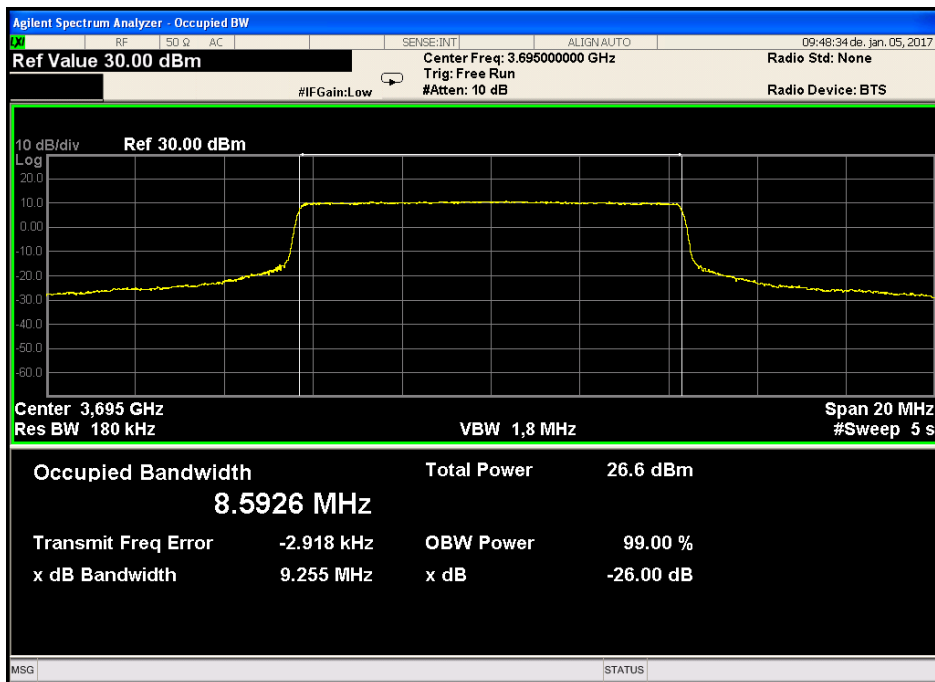


Figure 31. 10MHz CBW – Operating Frequency 3695.0MHz, QPSK

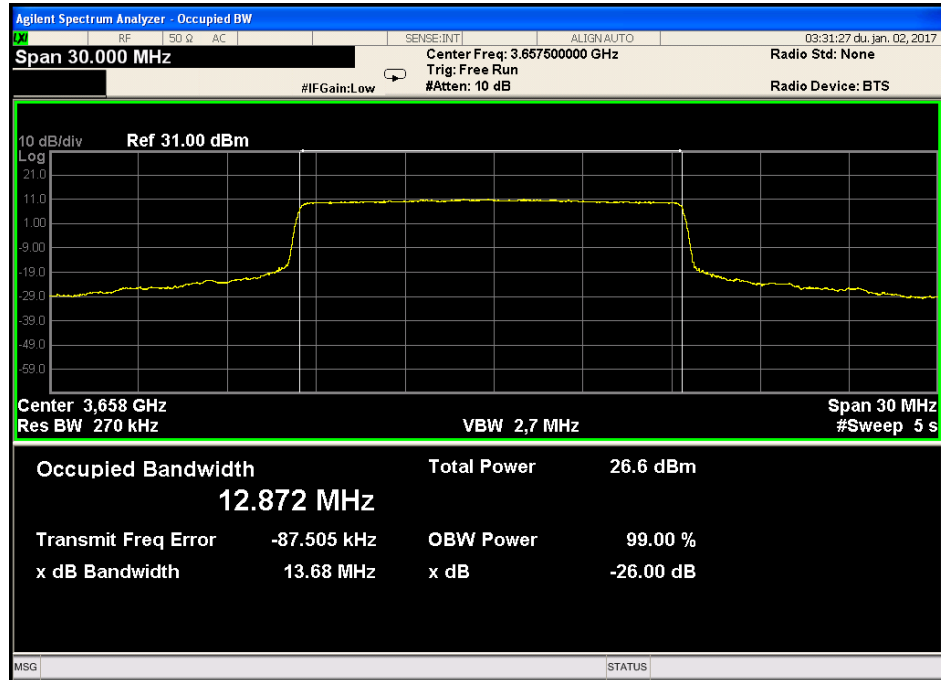


Figure 32. 15MHz CBW – Operating Frequency 3657.5MHz, 64QAM

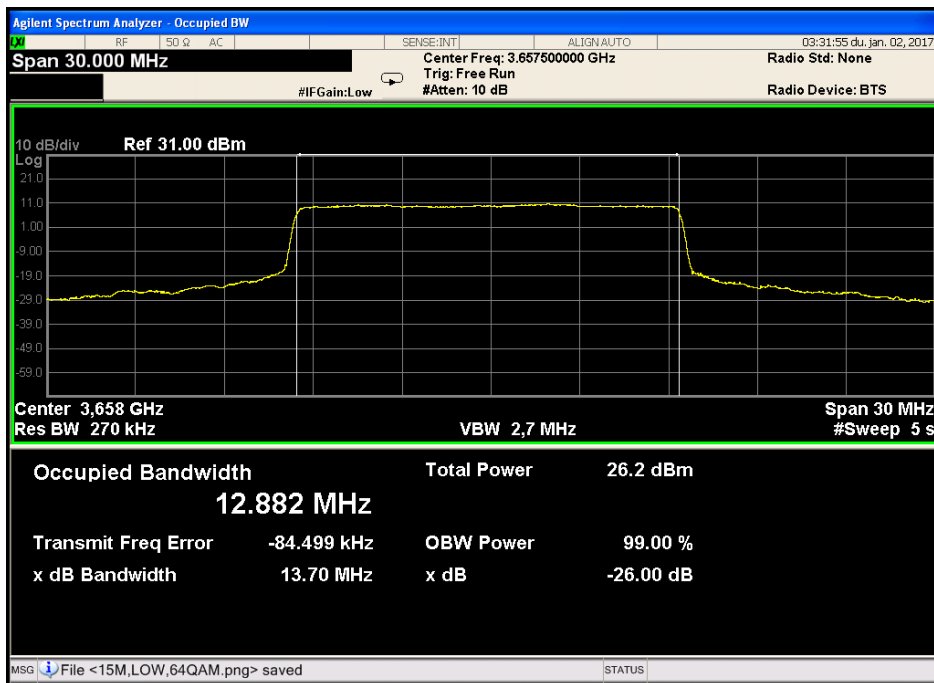


Figure 33. 15MHz CBW – Operating Frequency 3657.5MHz, 16QAM

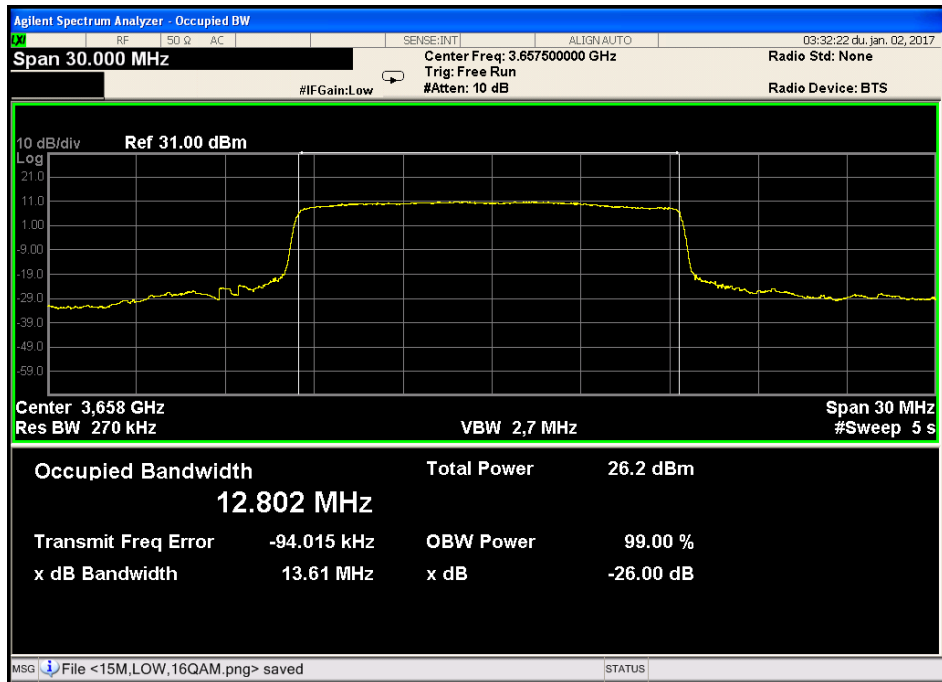


Figure 34. 15MHz CBW – Operating Frequency 3657.5MHz, QPSK

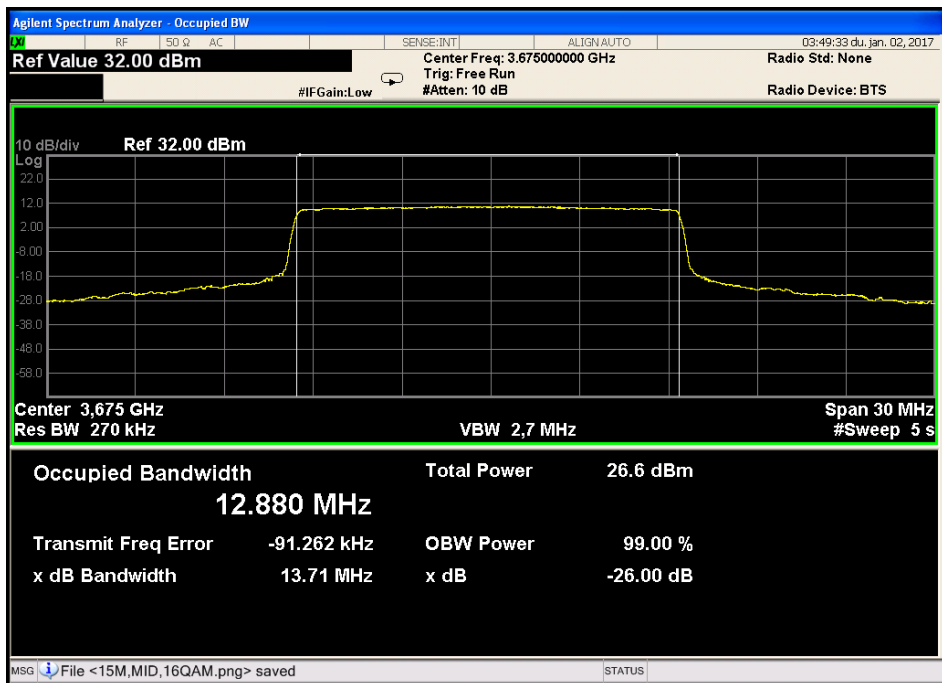


Figure 35. 15MHz CBW – Operating Frequency 3675.0MHz, 64QAM

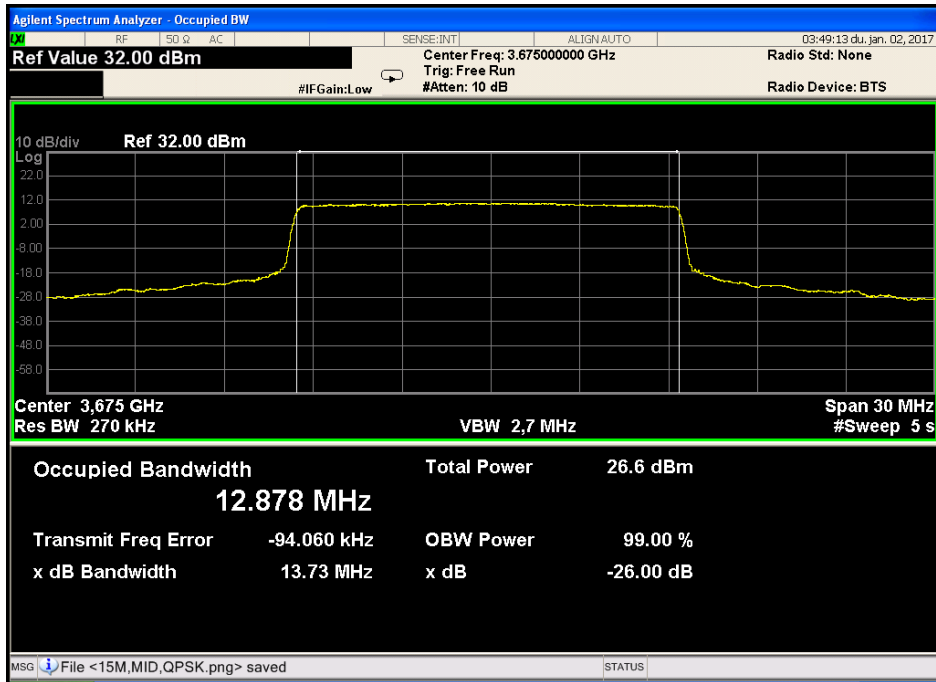


Figure 36. 15MHz CBW – Operating Frequency 3675.0MHz, 16QAM

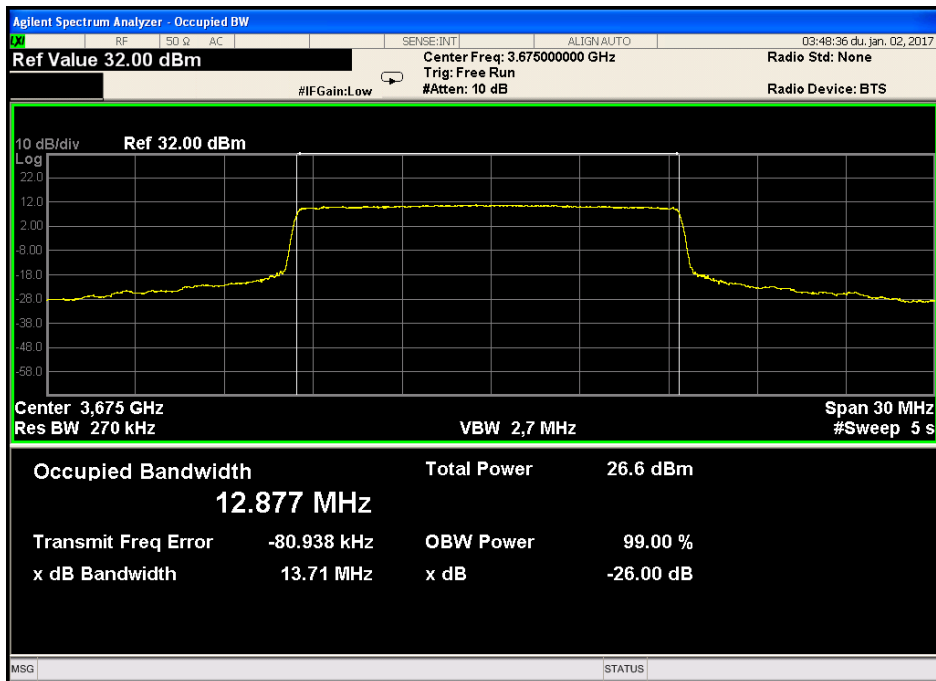


Figure 37. 15MHz CBW – Operating Frequency 3675.0MHz, QPSK

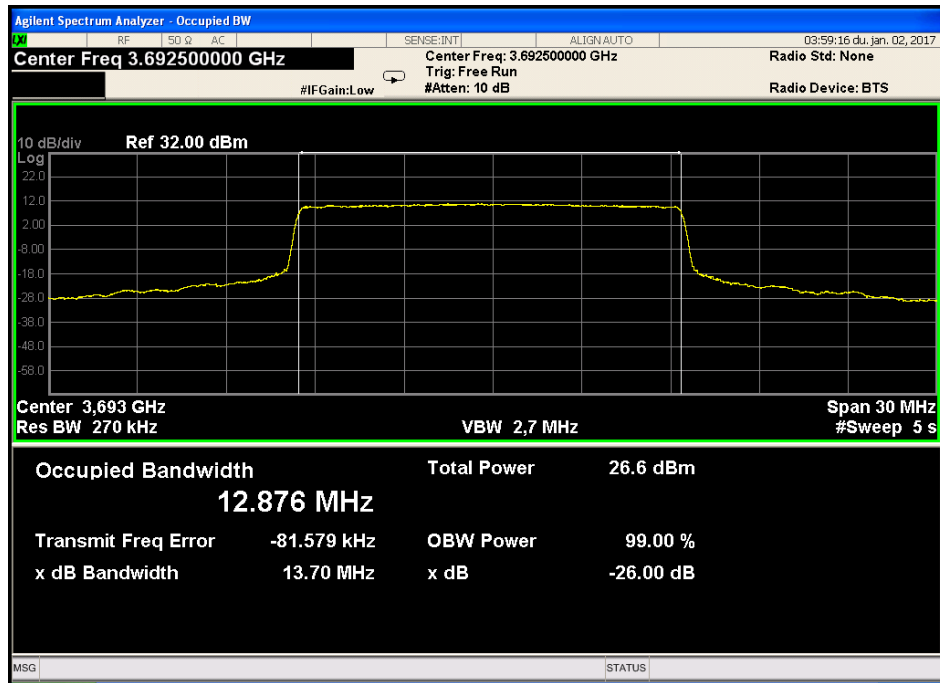


Figure 38. 15MHz CBW – Operating Frequency 3692.5MHz, 64QAM

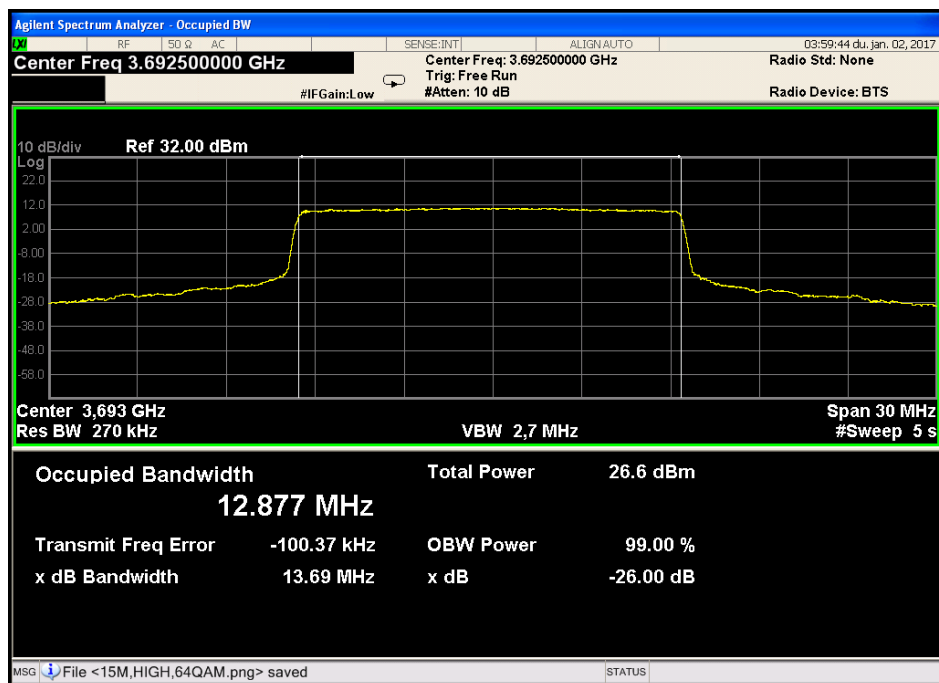


Figure 39. 15MHz CBW – Operating Frequency 3692.5MHz, 16QAM

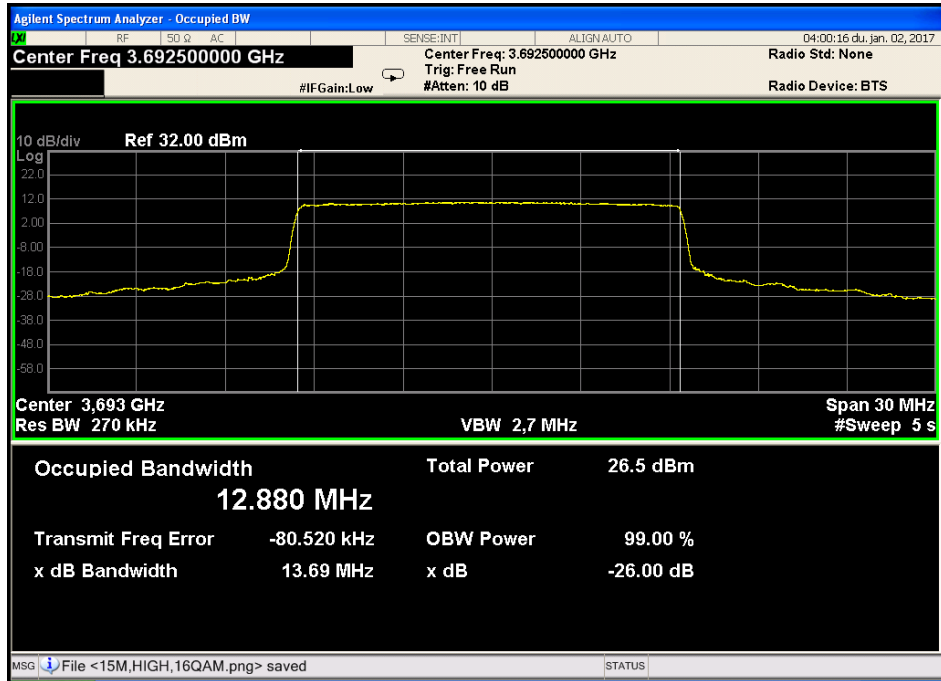


Figure 40. 15MHz CBW – Operating Frequency 3692.5MHz, QPSK

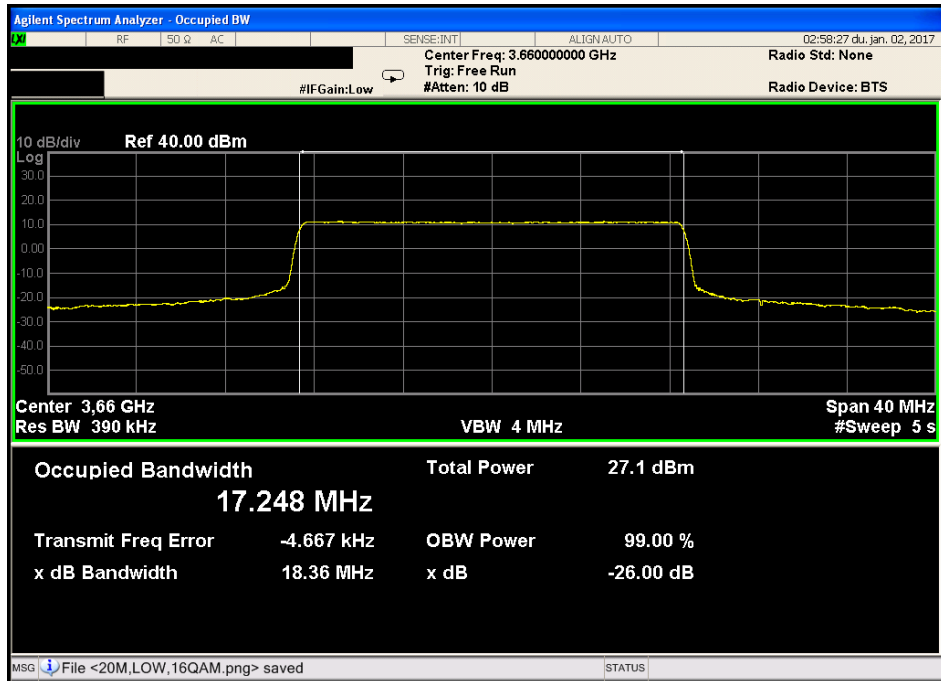


Figure 41. 20MHz CBW – Operating Frequency 3660.0MHz, 64QAM

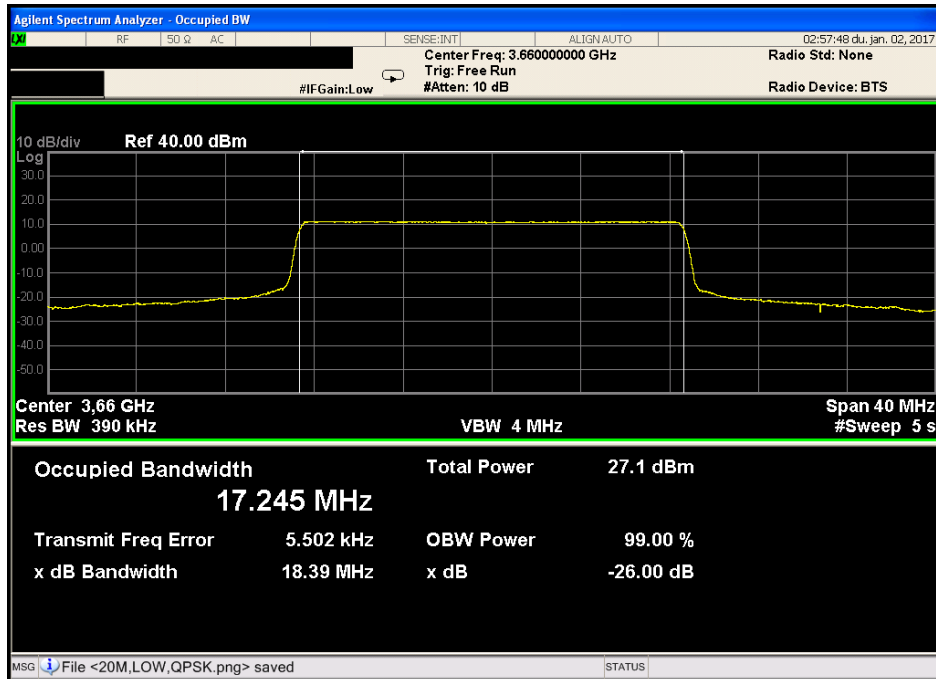


Figure 42. 20MHz CBW – Operating Frequency 3660.0MHz, 16QAM

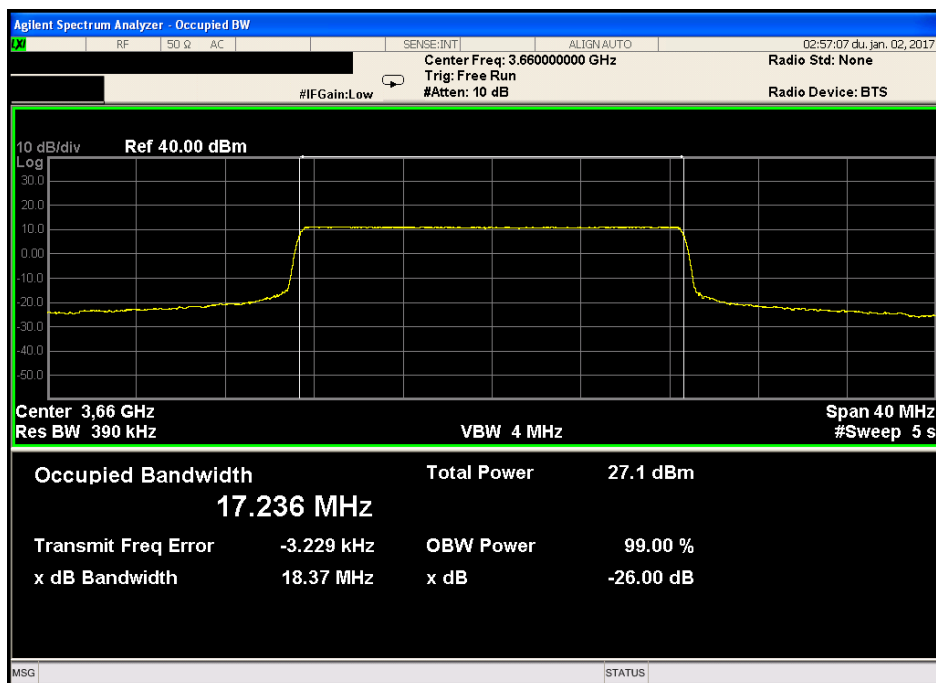


Figure 43. 20MHz CBW – Operating Frequency 3660.0MHz, QPSK

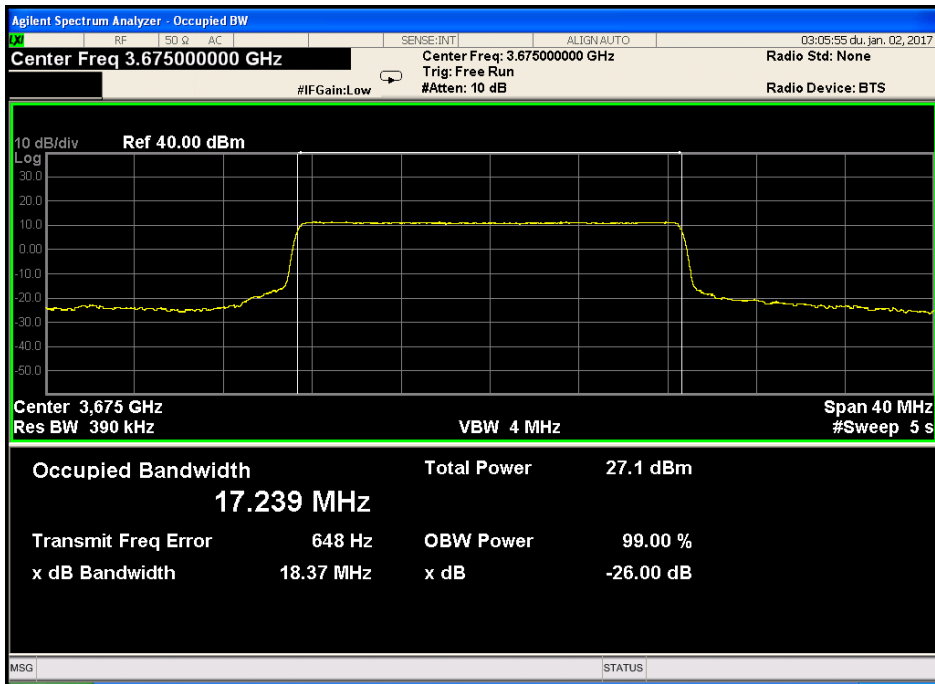


Figure 44. 20MHz CBW – Operating Frequency 3675.0MHz, 64QAM

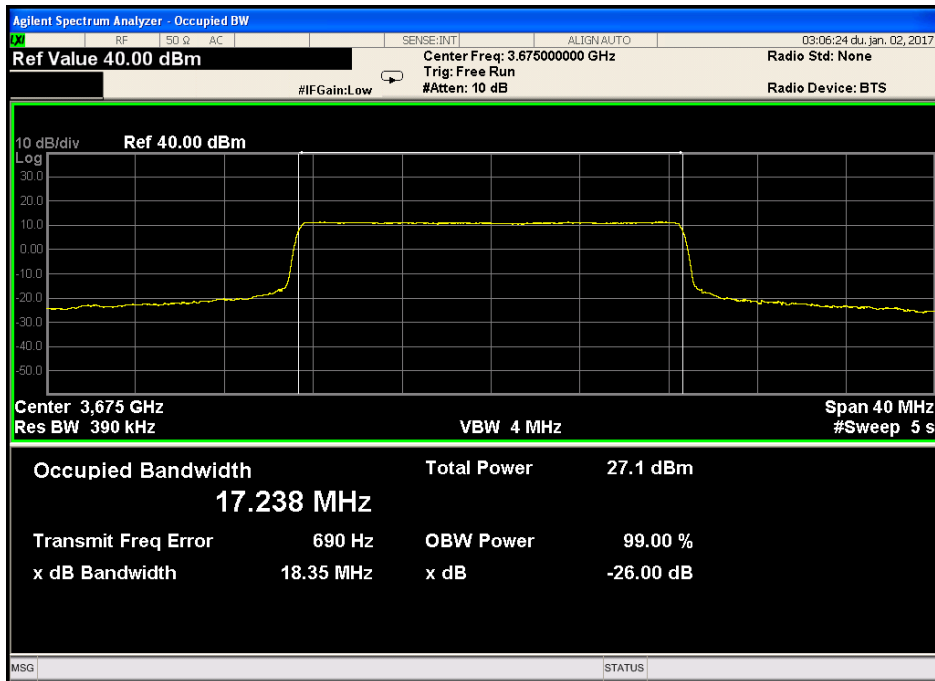


Figure 45. 20MHz CBW – Operating Frequency 3675.0MHz, 16QAM



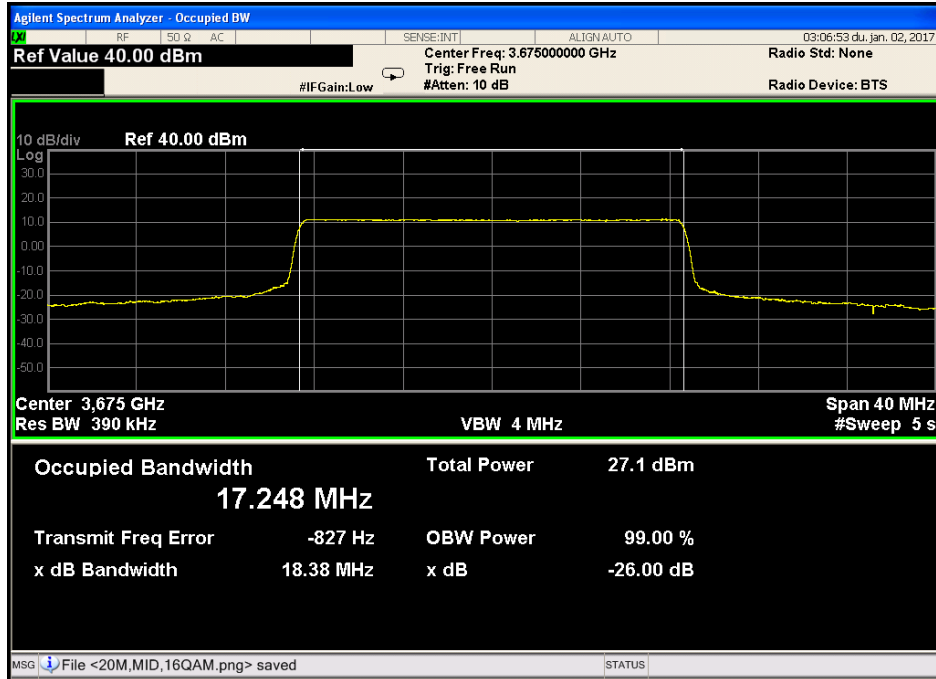


Figure 46. 20MHz CBW – Operating Frequency 3675.0MHz, QPSK

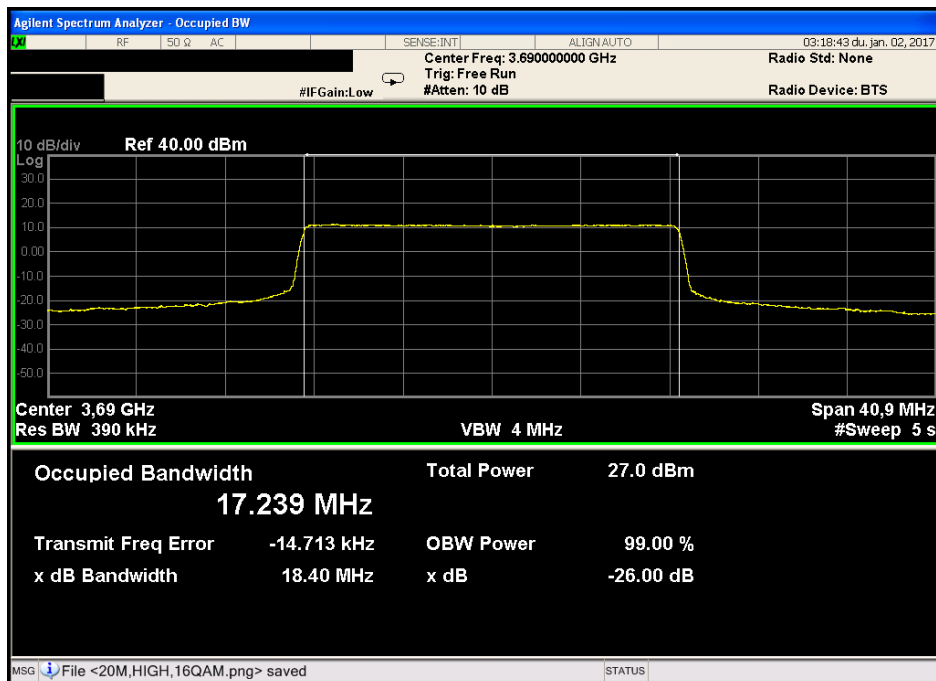


Figure 47. 20MHz CBW – Operating Frequency 3690.0MHz, 64QAM

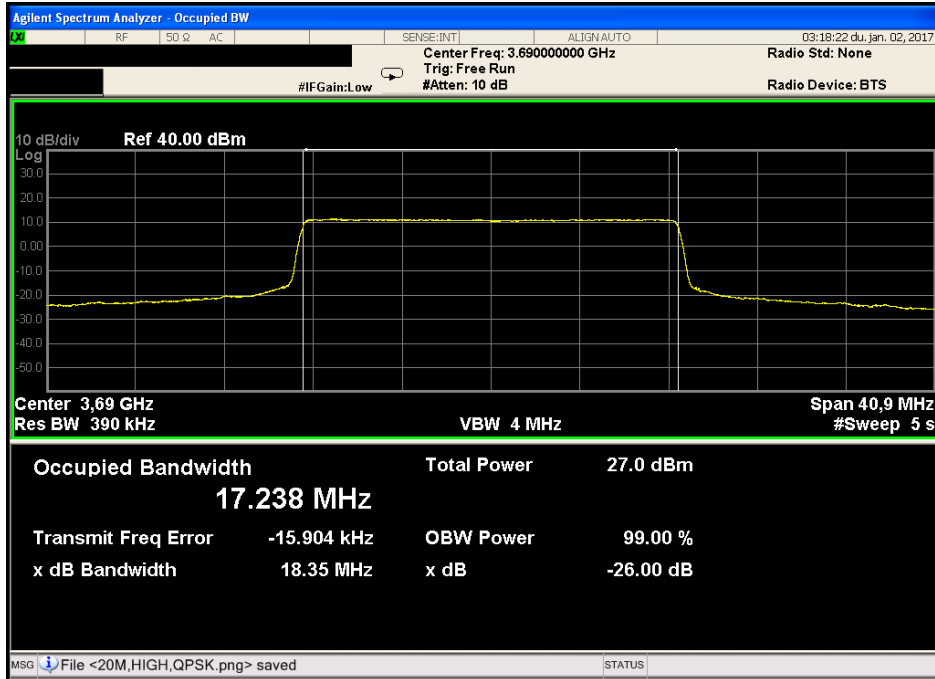


Figure 48. 20MHz CBW – Operating Frequency 3690.0MHz, 16QAM

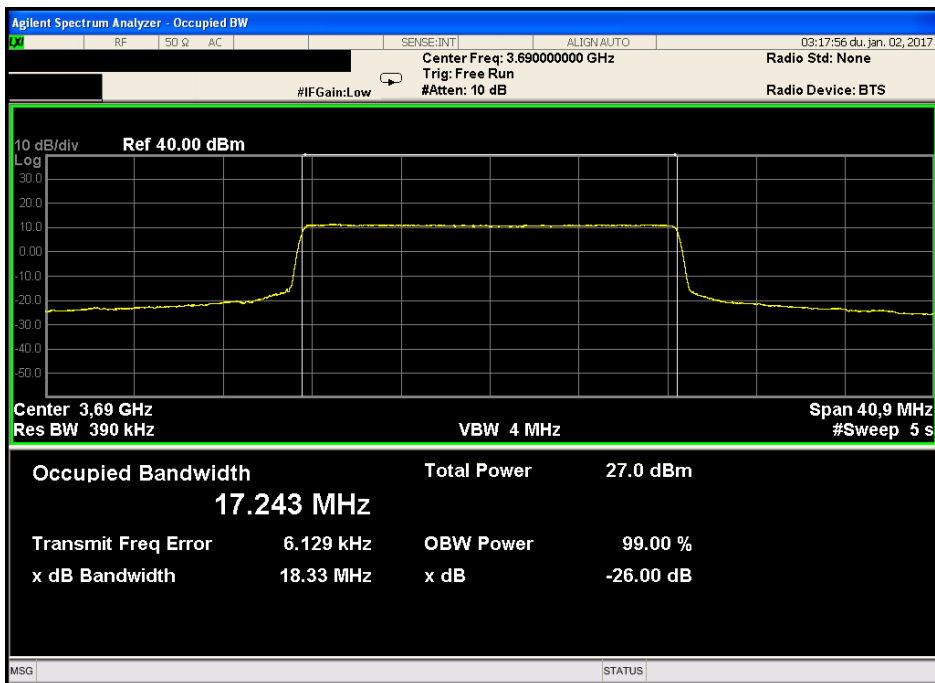


Figure 49. 20MHz CBW – Operating Frequency 3690.0MHz, QPSK



#### 4.5 Test Equipment Used; Occupied Bandwidth

Instrument	Manufacturer	Model	Serial Number	Calibration	
				Last Calibration Date	Next Calibration Due
MXA Signal Analyzer	Agilent	N9020A	MY48011785	July 26 2015	July 26 2017
DC block	JFW	50DB-007	1-23	N/A	N/A
Splitter	Weinschel 93459	1515	MY007	N/A	N/A
Attenuator	MINI- CIRCUITS	MCL BW S20W2+	0919	N/A	N/A

Figure 50. Test Equipment Used

## 5. Transmitter Frequency Stability

### 5.1 Test Specification

RSS-197, Issue 1, February 2010, Section 5.3  
RSS Gen, Issue 4, November 2014, Section 6.11  
FCC Part 2, Section 2.1055

### 5.2 Test Procedure

(Temperature (20°C)/ Humidity (62%RH))

The E.U.T operation mode and test setup are as described in Section 2 of this report.

Using a resolution bandwidth of 1% of the occupied bandwidth, a reference point at the unwanted emission level specified in Section 5.7 on the emission mask of the lowest and highest channel shall be selected, and the frequency at these points shall be recorded as  $f_L$  and  $f_H$  respectively.

Exploratory testing was performed at 25.0°C and 115.0VAC, to find the “worst case”  $F_L$ ,  $F_H$  for all modulation type each CBW at 2 edge frequencies.

The E.U.T. was operated with a CW signal in the downlink path.

The E.U.T. was placed inside a temperature chamber.

The spectrum analyzer was set to 10.0 kHz span and 1.0 kHz RBW and 1.0 kHz VBW. Counter function was set for this evaluation.

The E.U.T. was operated from 115.0 VAC at nominal temperature (+25.0°C).

The carrier frequency was measured and recorded (reference frequency reading).

Carrier frequency measurement was repeated for:

- (a) +20.0°C and 97.7 VAC
- (b) +20.0°C and 132.2 VAC
- (c). -30.0°C and 115.0 VAC
- (d). -20.0°C and 115.0 VAC
- (e). -10.0°C and 115.0 VAC
- (f). +0.0°C and 115.0 VAC
- (g). +10.0°C and 115.0 VAC
- (h). +20.0°C and 115.0 VAC
- (i). +30.0°C and 115.0 VAC
- (j). +40.0°C and 115.0 VAC
- (k). +50.0°C and 115.0 VAC

The carrier frequency was measured and recorded after at least 20 minutes of exposing the E.U.T. to the temperature.

### 5.3 Test Limit

The applicant shall ensure frequency stability by showing that  $f_L$  minus the frequency offset and  $f_H$  plus the frequency offset shall be within the 3650-3700 MHz band.



### 5.4 Test Results

JUDGEMENT: Passed

The E.U.T met the requirements of RSS 197, Issue 1:2010, Section 5.3, RSS Gen Issue 4: 2014, Section 6.11 and FCC Part 2, Section 2.1055.

The details of the results are given in *Figure 55* to *Figure 66*.

Temperature	Voltage	F <sub>L</sub> "worst case"	F <sub>H</sub> "worst case"	Drift Low	Drift High	Within the 3650-3700 MHz band
(°C)	(VAC)	(MHz)	(MHz)	(kHz)	(kHz)	
<b>+20.0</b>	97.7	3,650.570	3,699.260	+0.4	+0.4	YES
	<b>115.0</b>	<b>3,650.570</b>	<b>3,699.260</b>	-	-	YES
	132.2	3,650.570	3,699.260	0.0	0.0	YES
-30.0	115.0	3,650.572	3,699.262	+1.5	+1.5	YES
-20.0	115.0	3,650.571	3,699.261	+1.3	+1.3	YES
-10.0	115.0	3,650.571	3,699.261	+1.0	+1.0	YES
0.0	115.0	3,650.571	3,699.261	+1.0	+1.0	YES
+10.0	115.0	3,650.569	3,699.259	-0.5	-0.5	YES
+30.0	115.0	3,650.569	3,699.259	-1.0	-1.0	YES
+40.0	115.0	3,650.569	3,699.259	-1.3	-1.3	YES
+50.0	115.0	3,650.569	3,699.259	-1.3	-1.3	YES

**Figure 51. Frequency Stability Test Results - 5MHz CBW**



Temperature	Voltage	FL "worst case"	FH "worst case"	Drift Low	Drift High	Within the 3650-3700 MHz band
(°C)	(VAC)	(MHz)	(MHz)	(kHz)	(kHz)	
<b>+20.0</b>	97.7	3,650.591	3,699.421	+1.0	+1.0	YES
	<b>115.0</b>	<b>3,650.590</b>	<b>3,699.420</b>	-	-	YES
	132.2	3,650.590	3,699.420	0.0	0.0	YES
-30.0	115.0	3,650.592	3,699.422	+1.5	+1.5	YES
-20.0	115.0	3,650.591	3,699.421	+1.3	+1.3	YES
-10.0	115.0	3,650.591	3,699.421	+1.0	+1.0	YES
0.0	115.0	3,650.591	3,699.421	+1.0	+1.0	YES
+10.0	115.0	3,650.589	3,699.419	-0.5	-0.5	YES
+30.0	115.0	3,650.589	3,699.419	-1.0	-1.0	YES
+40.0	115.0	3,650.589	3,699.419	-1.3	-1.3	YES
+50.0	115.0	3,650.589	3,699.419	-1.3	-1.3	YES

**Figure 52. Frequency Stability Test Results - 10MHz CBW**



Temperature	Voltage	F <sub>L</sub> "worst case"	F <sub>H</sub> "worst case"	Drift Low	Drift High	Within the 3650-3700 MHz band
(°C)	(VAC)	(MHz)	(MHz)	(kHz)	(kHz)	
<b>+20.0</b>	97.7	3,650.800	3,699.030	+0.2	+0.2	YES
	<b>115.0</b>	<b>3,650.800</b>	<b>3,699.030</b>	-	-	YES
	132.2	3,650.800	3,699.030	+0.1	+0.1	YES
-30.0	115.0	3,650.802	3,699.032	+1.5	+1.5	YES
-20.0	115.0	3,650.802	3,699.032	+1.3	+1.3	YES
-10.0	115.0	3,650.802	3,699.032	+1.0	+1.0	YES
0.0	115.0	3,650.802	3,699.032	+1.0	+1.0	YES
+10.0	115.0	3,650.800	3,699.030	-0.5	-0.5	YES
+30.0	115.0	3,650.799	3,699.029	-1.0	-1.0	YES
+40.0	115.0	3,650.799	3,699.029	-1.3	-1.3	YES
+50.0	115.0	3,650.799	3,699.029	-1.3	-1.3	YES

**Figure 53. Frequency Stability Test Results - 15MHz CBW**



Temperature	Voltage	FL "worst case"	FH "worst case"	Drift Low	Drift High	Within the 3650-3700 MHz band
(°C)	(VAC)	(MHz)	(MHz)	(kHz)	(kHz)	
<b>+20.0</b>	97.7	3,651.150	3,698.830	+0.2	+0.2	YES
	<b>115.0</b>	<b>3,651.150</b>	<b>3,698.830</b>	-	-	YES
	132.2	3,651.150	3,698.830	+0.1	+0.1	YES
-30.0	115.0	3,651.152	3,698.832	+1.5	+1.5	YES
-20.0	115.0	3,651.151	3,698.831	+1.3	+1.3	YES
-10.0	115.0	3,651.151	3,698.831	+1.0	+1.0	YES
0.0	115.0	3,651.151	3,698.831	+1.0	+1.0	YES
+10.0	115.0	3,651.150	3,698.830	-0.5	-0.5	YES
+30.0	115.0	3,651.149	3,698.829	-1.0	-1.0	YES
+40.0	115.0	3,651.149	3,698.829	-1.3	-1.3	YES
+50.0	115.0	3,651.149	3,698.829	-1.3	-1.3	YES

**Figure 54. Frequency Stability Test Results - 20MHz CBW**



# Frequency Stability

E.U.T Description	CPE
Type	CPE8100-PRO-1D-3.X
Part Number:	Not designated

Specification: RSS 197 Issue 1: 2010, Section 5.4; RSS Gen Issue 4: 2014, Section 6.11; FCC Part 2, Section 2.1055

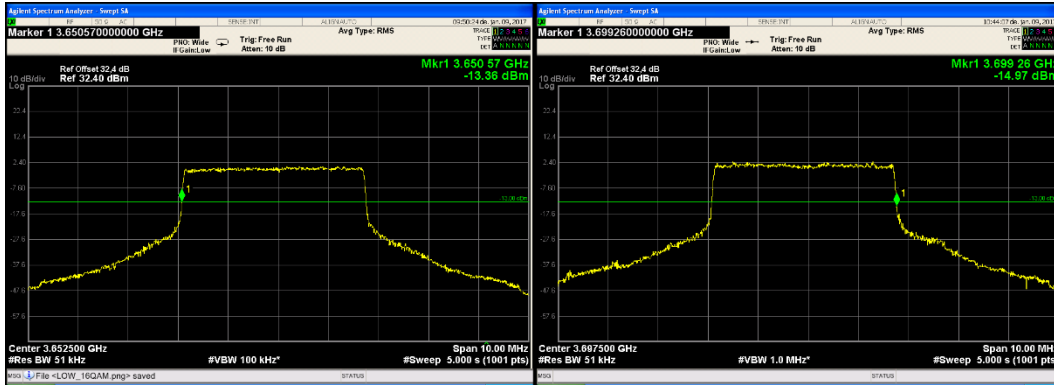


Figure 55. FL, FH for QPSK modulation, 20.0°C/115.0V – 5MHz CBW

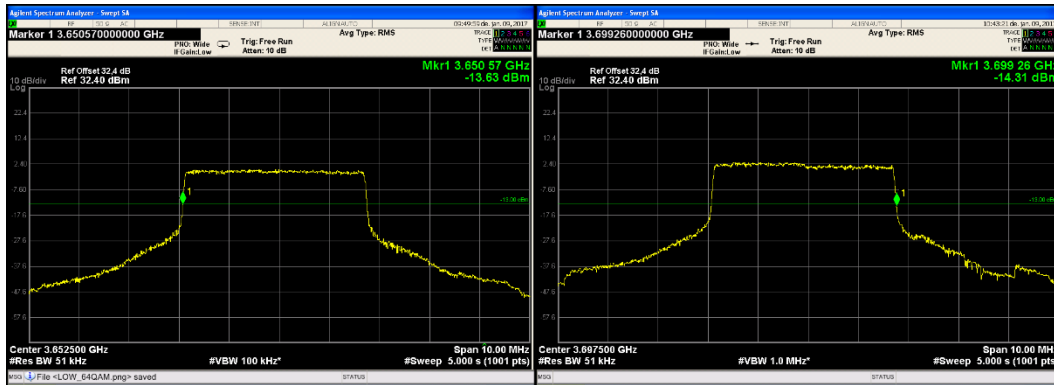


Figure 56. FL, FH for 16QAM modulation, 20.0°C/115.0V – 5MHz CBW

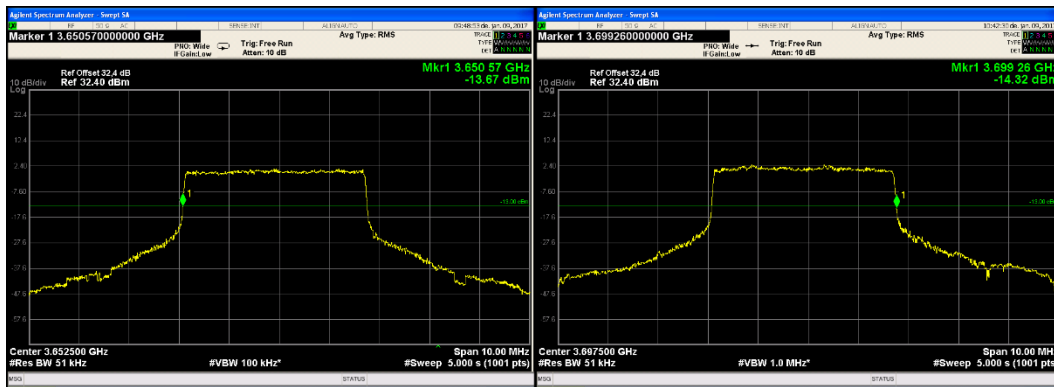


Figure 57. FL, FH for 64QAM modulation, 20.0°C/115.0V – 5MHz CBW

# Frequency Stability

E.U.T Description CPE  
 Type CPE8100-PRO-1D-3.X  
 Part Number: Not designated

Specification: RSS 197 Issue 1: 2010, Section 5.4; RSS Gen Issue 4: 2014, Section 6.11;  
 FCC Part 2, Section 2.1055

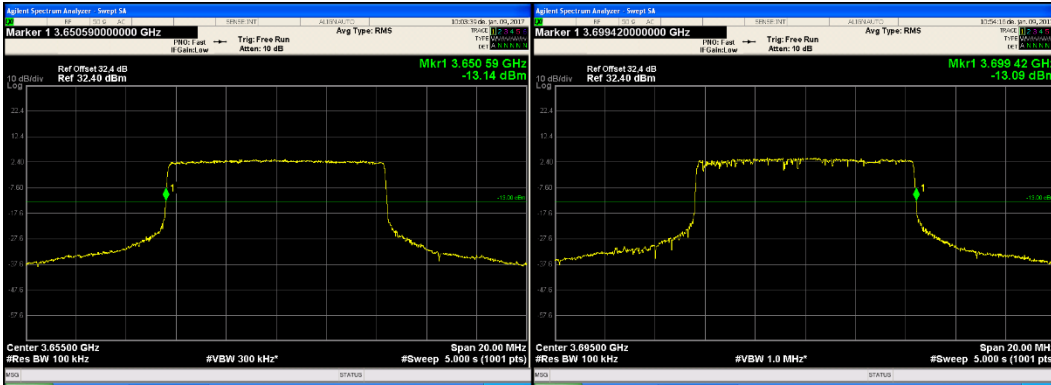


Figure 58. FL, FH for QPSK modulation, 20.0°C/115.0V- 10MHz CBW

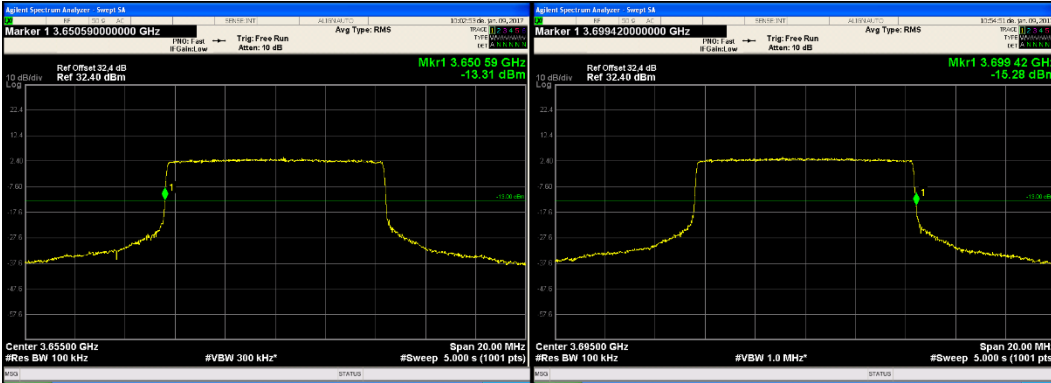


Figure 59. FL, FH for 16QAM modulation, 20.0°C/115.0V- 10MHz CBW

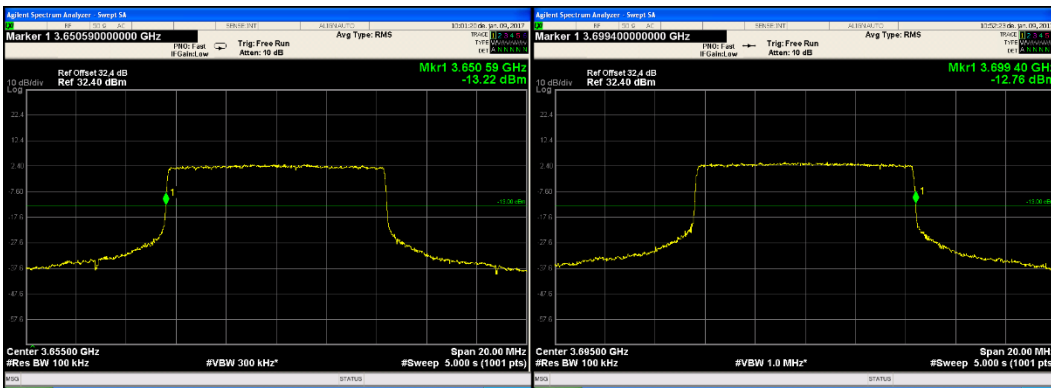


Figure 60. FL, FH for 64QAM modulation, 20.0°C/115.0V- 10MHz CBW

# Frequency Stability

E.U.T Description CPE  
Type CPE8100-PRO-1D-3.X  
Part Number: Not designated

Specification: RSS 197 Issue 1: 2010, Section 5.4; RSS Gen Issue 4: 2014, Section 6.11;  
FCC Part 2, Section 2.1055

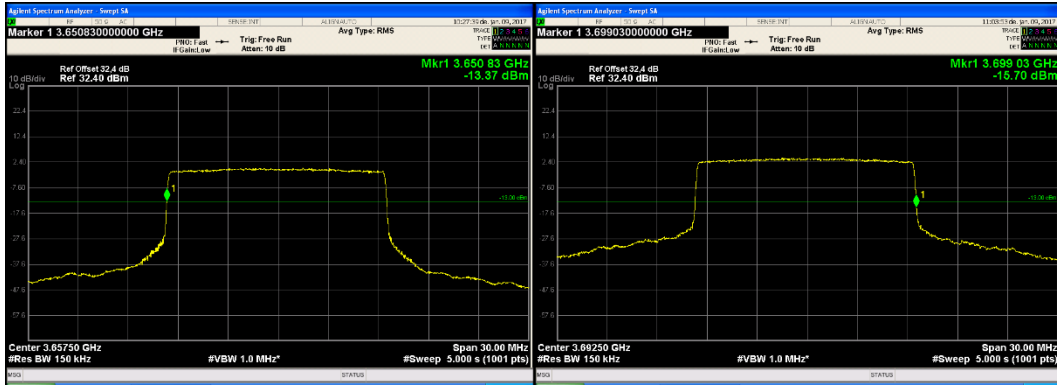


Figure 61. FL, FH for QPSK modulation, 20.0°C/115.0V - 15MHz CBW

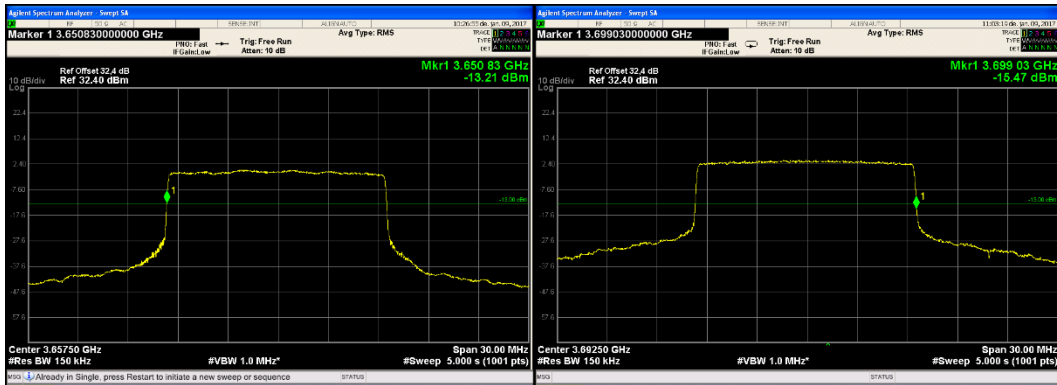


Figure 62. FL, FH for 16QAM modulation, 20.0°C/115.0V - 15MHz CBW


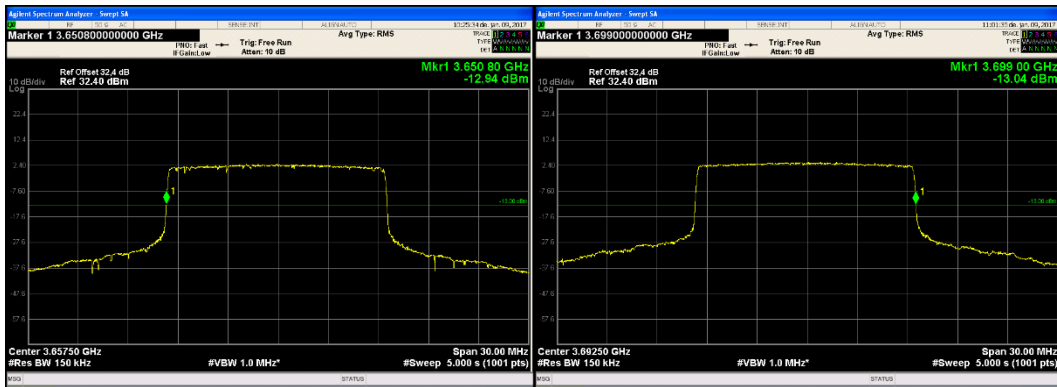


Figure 63. FL, FH for 64QAM modulation, 20.0°C/115.0V - 15MHz CBW


# Frequency Stability

E.U.T Description	CPE
Type	CPE8100-PRO-1D-3.X
Part Number:	Not designated


Specification: RSS 197 Issue 1: 2010, Section 5.4; RSS Gen Issue 4: 2014, Section 6.11; FCC Part 2, Section 2.1055

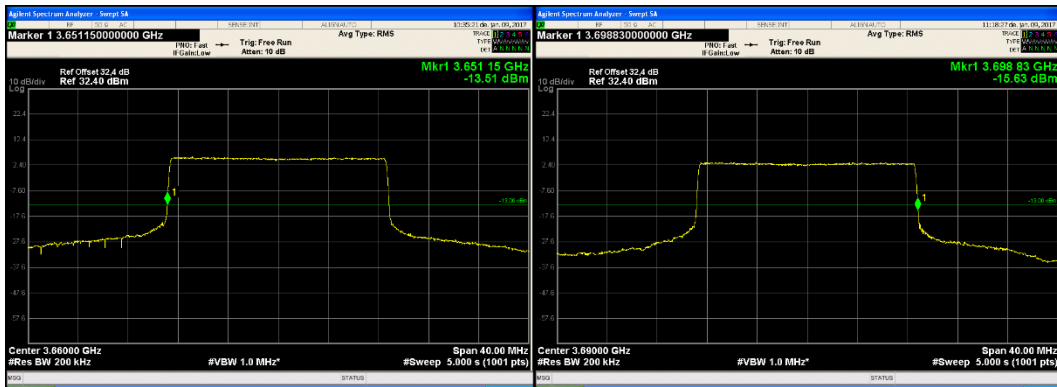

**Figure 64. FL, FH for QPSK modulation, 20.0°C/115.0V - 20MHz CBW**

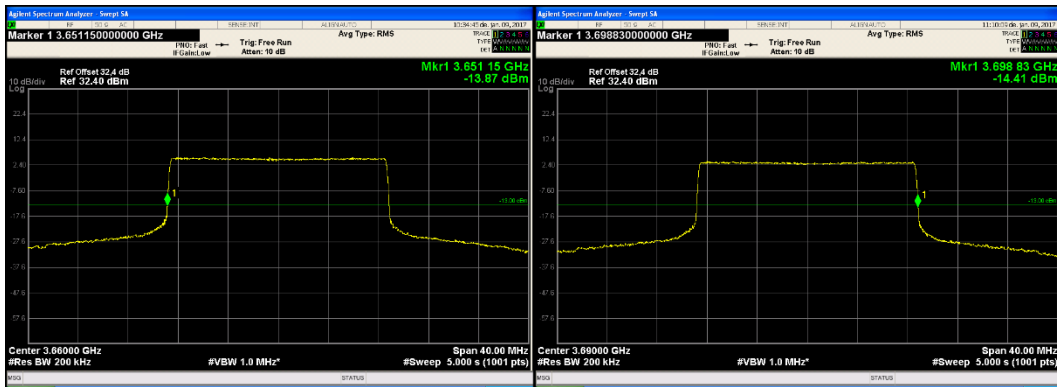

**Figure 65. FL, FH for 16QAM modulation, 20.0°C/115.0V - 20MHz CBW**

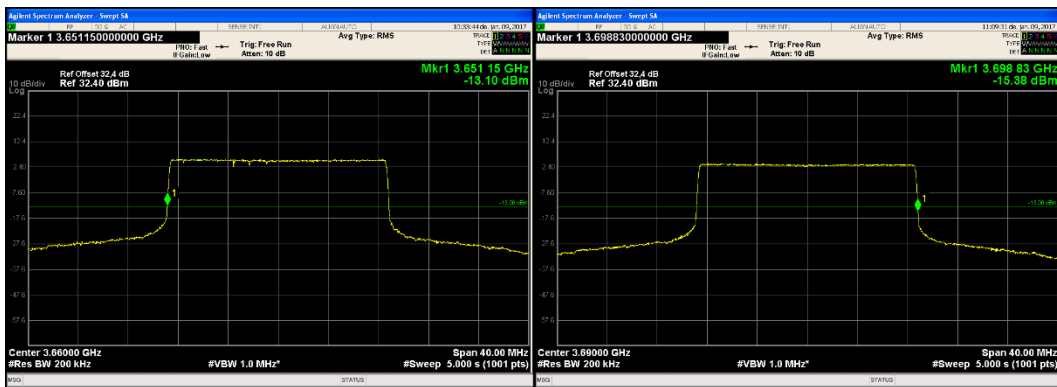

**Figure 66. FL, FH for 64QAM modulation, 20.0°C/115.0V - 20MHz CBW**



**5.5 Test Instruments Used; Frequency Stability**

Instrument	Manufacturer	Model	Serial Number	Calibration	
				Last Calibration Date	Next Calibration Due
MXA Signal Analyzer	Agilent	N9020A	MY48011785	July 26 2015	July 26 2017
Climatic Chamber	Thermotron	SM-32C	251030	April 7, 2016	April 7, 2017

**Figure 67. Test Instruments Used Frequency Stability**

## 6. Transmitter Output Power and Equivalent Isotropically Radiated Power (e.i.r.p.)

### 6.1 Test Specification

RSS-197, Issue 1: 2010, Section 5.6  
SRSP-303.65, Issue 2: 2010, Section 5.1  
FCC Part 90, Subpart Z, section 90.1321

### 6.2 Test Procedure

(Temperature (20°C)/ Humidity (59%RH))

The E.U.T. antenna terminal was connected to the Spectrum Analyzer through an external attenuator, an appropriate coaxial cable, coupler, and DC block.

(total loss=31.0/32.4dB Including duty cycle factor) The E.U.T. RF output was OFDMA modulated with QPSK, 16QAM and 64QAM, each at 5, 10,15 and 20 MHz CBW and in 2 power modes: low and high population and in 3 operational frequencies.

Special attention was taken to prevent Spectrum Analyzer RF input overload. RBW was set to 1MHz.

### 6.3 FCC Limit

Base and fixed stations are limited to 25 watts/25 MHz (44.0dBm) equivalent isotropically radiated power (EIRP). In any event, the peak EIRP power density shall not exceed 1 Watt in any one-megahertz.

The limits were adjusted for each tested channel bandwidth accordingly as reflected in the test results tables.

### 6.4 IC Limit

The maximum transmitter output power density of equipment, other than mobile and portable equipment, shall not exceed 1W (30dBm) in any 1 MHz bandwidth. However, in low population areas, a maximum e.i.r.p. density of 60 W/MHz (47.78dBm/MHz) is permitted.

### 6.5 Test Results

Judgment: PASSED

For additional information see *Figure 68* to *Figure 153*.

Operation Frequency	Modulation	PSD Reading	Antenna Gain	Total PSD	PSD Limit	Margin
(MHz)		(dBm)	(dBi)	(dBm)	(dBm)	(dB)
3652.5	QPSK	14.6	15.0	29.6	30.0	-0.4
	16QAM	14.8	15.0	29.8	30.0	-0.2
	64QAM	14.3	15.0	29.3	30.0	-0.7
3675.0	QPSK	14.8	15.0	29.8	30.0	-0.2
	16QAM	14.5	15.0	29.5	30.0	-0.5
	64QAM	14.5	15.0	29.5	30.0	-0.5
3697.5	QPSK	14.6	15.0	29.6	30.0	-0.4
	16QAM	14.6	15.0	29.6	30.0	-0.4
	64QAM	14.7	15.0	29.7	30.0	-0.3

**Figure 68. PSD, 5MHz CBW (3.6MHz OBW) - High Population**

Operation Frequency	Modulation	Reading@1MHz	Reading@3.6MHz	Antenna Gain	Total EIRP	EIRP Limit	Margin
(MHz)		(dBm)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
3652.5	QPSK	14.6	20.1	15.0	35.1	35.6	-0.5
	16QAM	14.8	20.3	15.0	35.3	35.6	-0.3
	64QAM	14.3	19.8	15.0	34.8	35.6	-0.8
3675.0	QPSK	14.8	20.3	15.0	35.3	35.6	-0.3
	16QAM	14.5	20.0	15.0	35.0	35.6	-0.6
	64QAM	14.5	20.0	15.0	35.0	35.6	-0.6
3697.5	QPSK	14.6	20.1	15.0	35.1	35.6	-0.5
	16QAM	14.6	20.1	15.0	35.1	35.6	-0.5
	64QAM	14.7	20.2	15.0	35.2	35.6	-0.4

Reading@3.6MHz= Reading@1MHz+ 10 log (3.6M/1M) = 5.56dBm

**Figure 69. EIRP, 5MHz CBW (3.6MHz OBW), FCC Specification**

Operation Frequency	Modulation	PSD Reading	Antenna Gain	Total PSD	Limit	Margin
(MHz)		(dBm)	(dBi)	(dBm)	(dBm)	(dB)
3655.0	QPSK	14.7	15.0	29.7	30.0	-0.3
	16QAM	14.4	15.0	29.4	30.0	-0.6
	64QAM	14.8	15.0	29.8	30.0	-0.2
3675.0	QPSK	14.6	15.0	29.6	30.0	-0.4
	16QAM	14.6	15.0	29.6	30.0	-0.4
	64QAM	14.5	15.0	29.5	30.0	-0.5
3695.0	QPSK	14.8	15.0	29.8	30.0	-0.2
	16QAM	14.8	15.0	29.8	30.0	-0.2
	64QAM	14.6	15.0	29.6	30.0	-0.4

Figure 70. PSD, 10 MHz CBW (8.6MHz OBW) - High Population

Operation Frequency	Modulation	Reading@1MHz	Reading@8.6MHz	Antenna Gain	Total EIRP	EIRP Limit	Margin
(MHz)		(dBm)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
3655.0	QPSK	14.7	24.0	15.0	39.0	39.3	-0.3
	16QAM	14.4	23.7	15.0	38.7	39.3	-0.6
	64QAM	14.8	24.1	15.0	39.1	39.3	-0.2
3675.0	QPSK	14.6	23.9	15.0	38.9	39.3	-0.4
	16QAM	14.6	23.9	15.0	38.9	39.3	-0.4
	64QAM	14.5	23.8	15.0	38.8	39.3	-0.5
3695.0	QPSK	14.8	24.1	15.0	39.1	39.3	-0.2
	16QAM	14.8	24.1	15.0	39.1	39.3	-0.2
	64QAM	14.6	23.9	15.0	38.9	39.3	-0.4

Reading@10MHz= Reading@1MHz+ 10 log (8.6M/1M)=9.34dBm

Figure 71. EIRP, 10 MHz CBW, (8.6MHz OBW) FCC Specification



Operation Frequency	Modulation	PSD Reading	Antenna Gain	Total PSD	Limit	Margin
(MHz)		(dBm)	(dBi)	(dBm)	(dBm)	(dB)
3657.5	QPSK	14.5	15.0	29.5	30.0	-0.5
	16QAM	14.3	15.0	29.3	30.0	-0.7
	64QAM	14.6	15.0	29.6	30.0	-0.4
3675.0	QPSK	14.5	15.0	29.5	30.0	-0.5
	16QAM	14.8	15.0	29.8	30.0	-0.2
	64QAM	14.5	15.0	29.5	30.0	-0.5
3692.5	QPSK	14.7	15.0	29.7	30.0	-0.3
	16QAM	14.6	15.0	29.6	30.0	-0.4
	64QAM	14.8	15.0	29.8	30.0	-0.2

Figure 72. PSD, 15 MHz CBW (12.9MHz OBW) - High Population

Operation Frequency	Modulation	Reading@1MHz	Reading@12.9MHz	Antenna Gain	Total EIRP	EIRP Limit	Margin
(MHz)		(dBm)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
3657.5	QPSK	14.5	25.6	15.0	40.6	41.1	-0.5
	16QAM	14.3	25.4	15.0	40.4	41.1	-0.7
	64QAM	14.6	25.7	15.0	40.7	41.1	-0.4
3675.0	QPSK	14.5	25.6	15.0	40.6	41.1	-0.5
	16QAM	14.8	25.9	15.0	40.9	41.1	-0.2
	64QAM	14.5	25.6	15.0	40.6	41.1	-0.5
3692.5	QPSK	14.7	25.8	15.0	40.8	41.1	-0.3
	16QAM	14.6	25.7	15.0	40.7	41.1	-0.4
	64QAM	14.8	25.9	15.0	40.9	41.1	-0.2

Reading@15MHz= Reading@1MHz+ 10 log (12.9M/1M) = 11.1dBm

Figure 73. EIRP, 15 MHz CBW (12.9MHz OBW) - FCC Specification

Operation Frequency	Modulation	PSD Reading	Antenna Gain	Total PSD	Limit	Margin
(MHz)		(dBm)	(dBi)	(dBm)	(dBm)	(dB)
3660.0	QPSK	14.8	15.0	29.8	30.0	-0.2
	16QAM	14.6	15.0	29.6	30.0	-0.4
	64QAM	14.8	15.0	29.8	30.0	-0.2
3675.0	QPSK	14.7	15.0	29.7	30.0	-0.3
	16QAM	14.6	15.0	29.6	30.0	-0.4
	64QAM	14.7	15.0	29.7	30.0	-0.3
3690.0	QPSK	14.5	15.0	29.5	30.0	-0.5
	16QAM	14.5	15.0	29.5	30.0	-0.5
	64QAM	14.6	15.0	29.6	30.0	-0.4

Figure 74. PSD, 20 MHz CBW (17.2MHz OBW) - High Population

Operation Frequency	Modulation	Reading@1MHz	Reading@17.2MHz	Antenna Gain	Total EIRP	EIRP Limit	Margin
(MHz)		(dBm)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
3660.0	QPSK	14.8	27.1	15.0	42.1	42.4	-0.3
	16QAM	14.6	26.9	15.0	41.9	42.4	-0.5
	64QAM	14.8	27.1	15.0	42.1	42.4	-0.3
3675.0	QPSK	14.7	27.0	15.0	42.0	42.4	-0.4
	16QAM	14.6	26.9	15.0	41.9	42.4	-0.5
	64QAM	14.7	27.0	15.0	42.0	42.4	-0.4
3690.0	QPSK	14.5	26.8	15.0	41.8	42.4	-0.6
	16QAM	14.5	26.8	15.0	41.8	42.4	-0.6
	64QAM	14.6	26.9	15.0	41.9	42.4	-0.5

Reading@20MHz= Reading@1MHz+ 10 log (17.2M/1M) = 12.3dBm

Figure 75. EIRP, 20 MHz CBW (17.2MHz OBW), FCC Specification

Operation Frequency	Modulation	PSD Reading	Antenna Gain	Total PSD	Limit	Margin
(MHz)		(dBm)	(dbi)	(dbm)	(dBm)	(dB)
3652.5	QPSK	20.1	15.0	35.1	47.78	-12.68
	16QAM	19.5	15.0	34.5	47.78	-13.28
	64QAM	19.5	15.0	34.5	47.78	-13.28
3675.0	QPSK	20.0	15.0	35.0	47.78	-12.78
	16QAM	19.1	15.0	34.1	47.78	-13.68
	64QAM	19.1	15.0	34.1	47.78	-13.68
3697.5	QPSK	19.9	15.0	34.9	47.78	-12.88
	16QAM	18.9	15.0	33.9	47.78	-13.88
	64QAM	19.4	15.0	34.4	47.78	-13.38

**Figure 76. PSD, 5 MHz CBW - Low Population**

Operation Frequency	Modulation	PSD Reading	Antenna Gain	Total PSD	Limit	Margin
(MHz)		(dBm)	(dbi)	(dbm)	(dBm)	(dB)
3655.0	QPSK	18.7	15.0	33.7	47.78	-14.08
	16QAM	18.1	15.0	33.1	47.78	-14.68
	64QAM	18.2	15.0	33.2	47.78	-14.58
3675.0	QPSK	17.7	15.0	32.7	47.78	-15.08
	16QAM	17.2	15.0	32.2	47.78	-15.58
	64QAM	17.9	15.0	32.9	47.78	-14.88
3695.0	QPSK	18.3	15.0	33.3	47.78	-14.48
	16QAM	17.8	15.0	32.8	47.78	-14.98
	64QAM	18.4	15.0	33.4	47.78	-14.38

**Figure 77. PSD, 10 MHz CBW - Low Population**

Operation Frequency	Modulation	PSD Reading	Antenna Gain	Total PSD	Limit	Margin
(MHz)		(dBm)	(dbi)	(dbm)	(dBm)	(dB)
3657.5	QPSK	16.6	15.0	31.6	47.78	-16.18
	16QAM	16.1	15.0	31.1	47.78	-16.68
	64QAM	16.1	15.0	31.1	47.78	-16.68
3675.0	QPSK	16.4	15.0	31.4	47.78	-16.38
	16QAM	15.7	15.0	30.7	47.78	-17.08
	64QAM	16.7	15.0	31.7	47.78	-16.08
3692.5	QPSK	16.6	15.0	31.6	47.78	-16.18
	16QAM	16.0	15.0	31.0	47.78	-16.78
	64QAM	17.1	15.0	32.1	47.78	-15.68

**Figure 78. PSD, 15 MHz CBW - Low Population**

Operation Frequency	Modulation	PSD Reading	Antenna Gain	Total PSD	Limit	Margin
(MHz)		(dBm)	(dbi)	(dbm)	(dBm)	(dB)
3660.0	QPSK	15.7	15.0	30.7	47.78	-17.08
	16QAM	15.5	15.0	30.5	47.78	-17.28
	64QAM	15.6	15.0	30.6	47.78	-17.18
3675.0	QPSK	15.5	15.0	30.5	47.78	-17.28
	16QAM	16.2	15.0	31.2	47.78	-16.58
	64QAM	15.3	15.0	30.3	47.78	-17.48
3690.0	QPSK	15.9	15.0	30.9	47.78	-16.88
	16QAM	15.6	15.0	30.6	47.78	-17.18
	64QAM	15.3	15.0	30.3	47.78	-17.48

**Figure 79. PSD, 20 MHz CBW - Low Population**

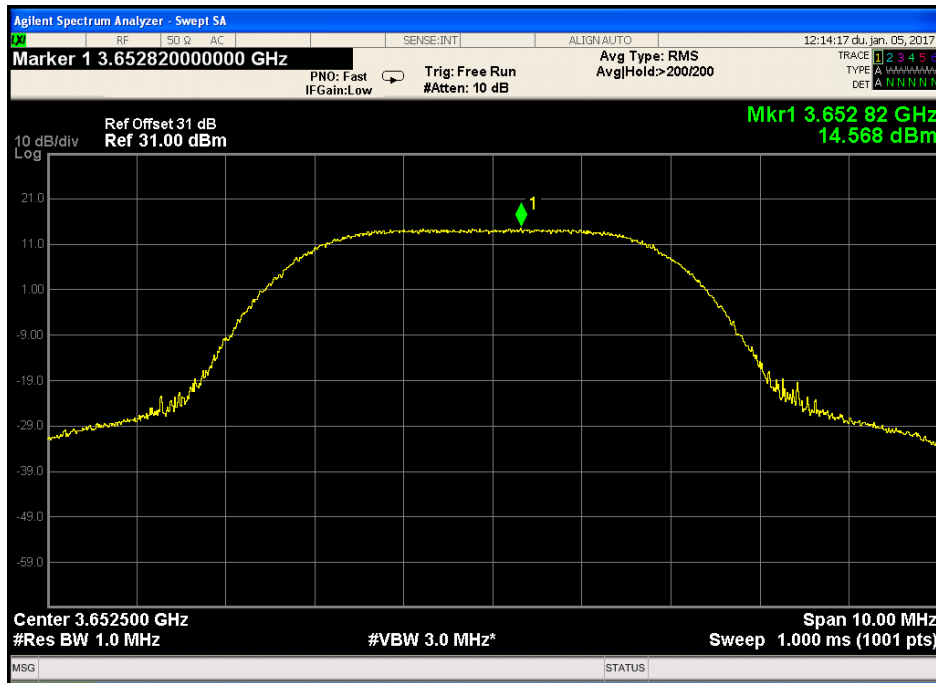


Figure 80. — 3652.5 MHz QPSK - 5MHz CBW, High Population

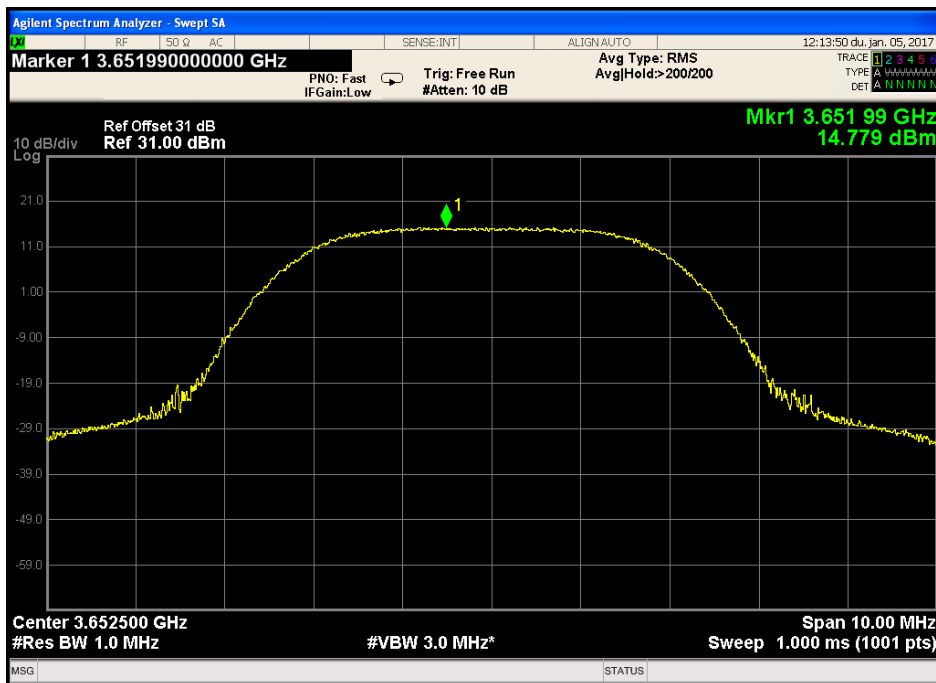


Figure 81. — 3652.5 MHz 16QAM - 5MHz CBW, High Population

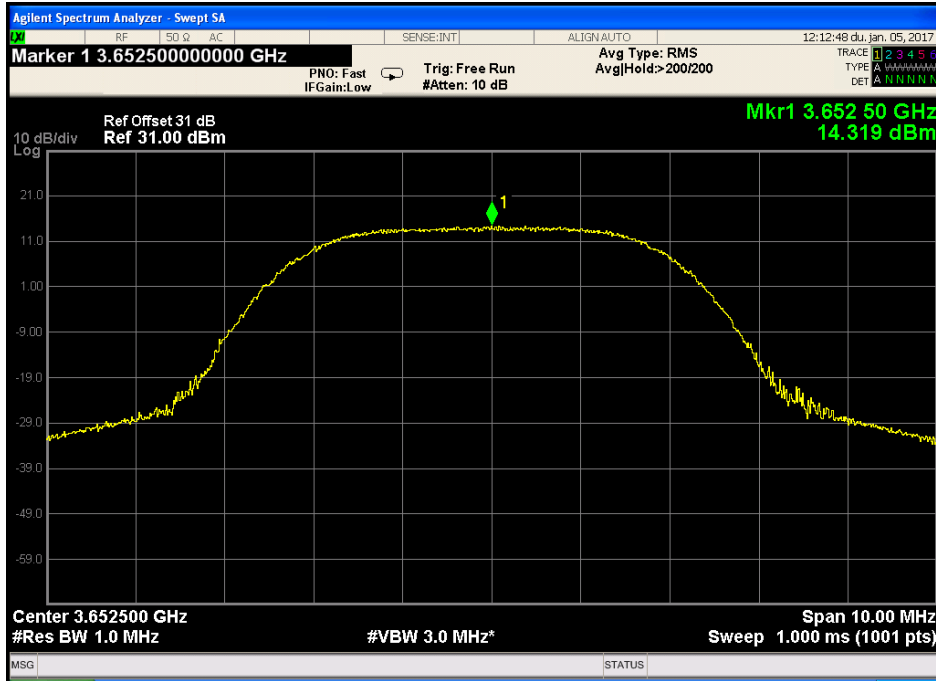


Figure 82. — 3652.5 MHz 64QAM - 5MHz CBW, High Population

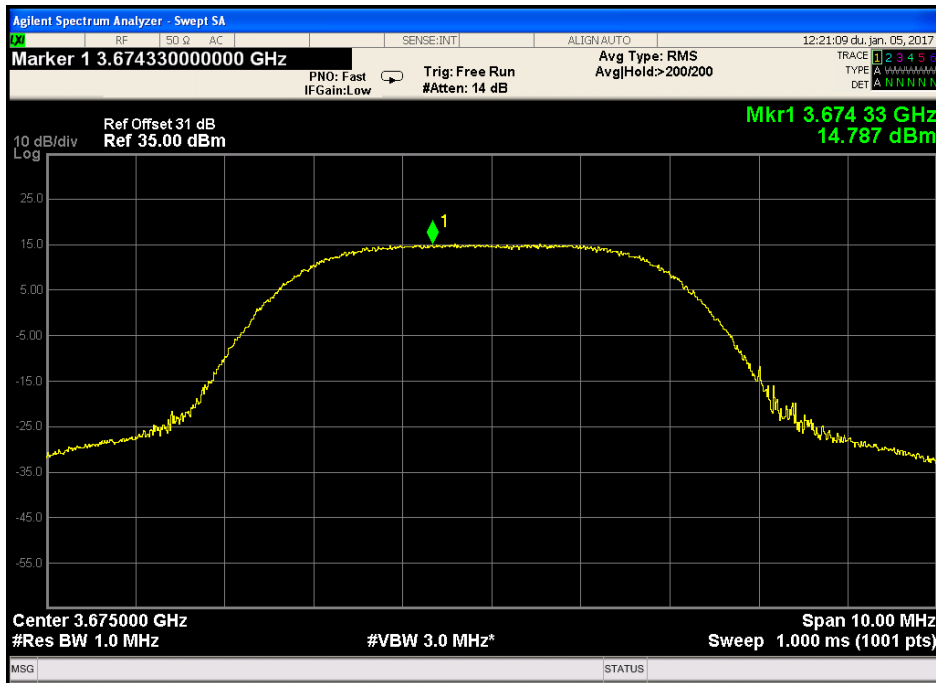


Figure 83. — 3675.0 MHz QPSK- 5MHz CBW, High Population

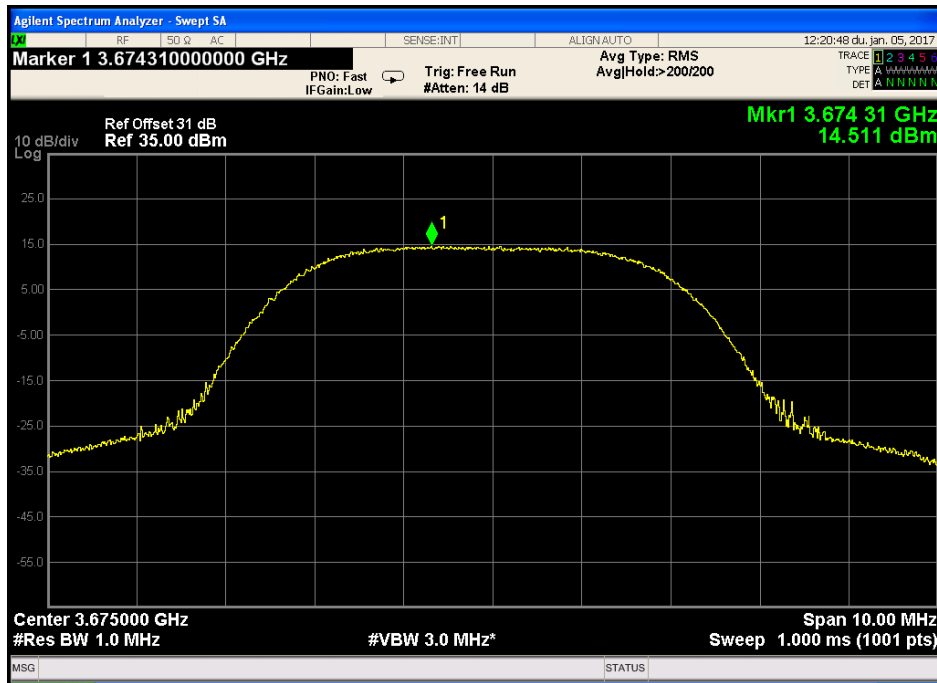


Figure 84. — 3675.0 MHz 16QAM- 5MHz CBW, High Population

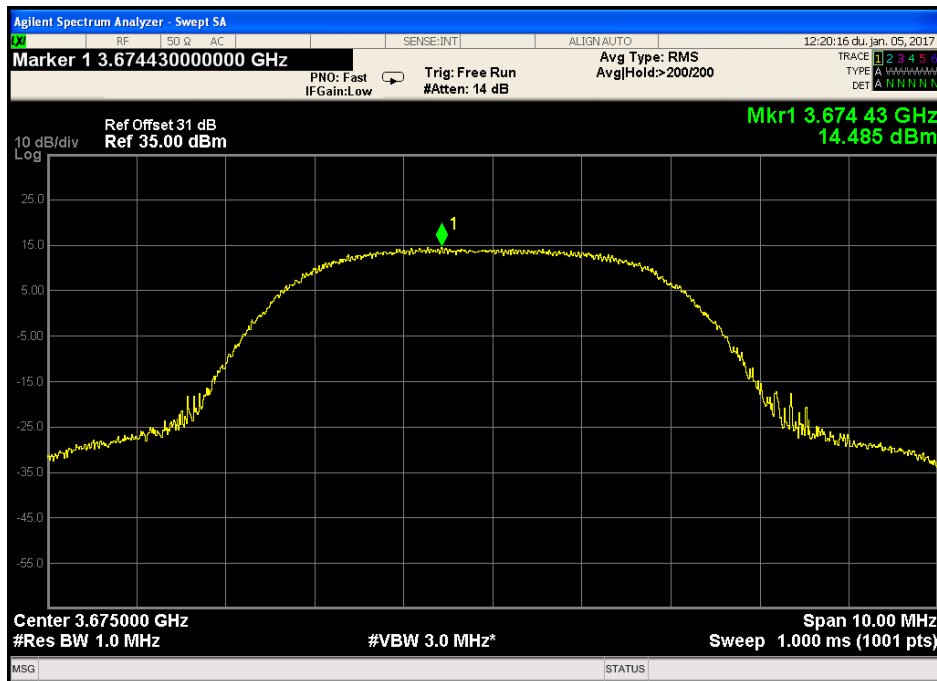


Figure 85. — 3675.0 MHz 64QAM- 5MHz CBW, High Population

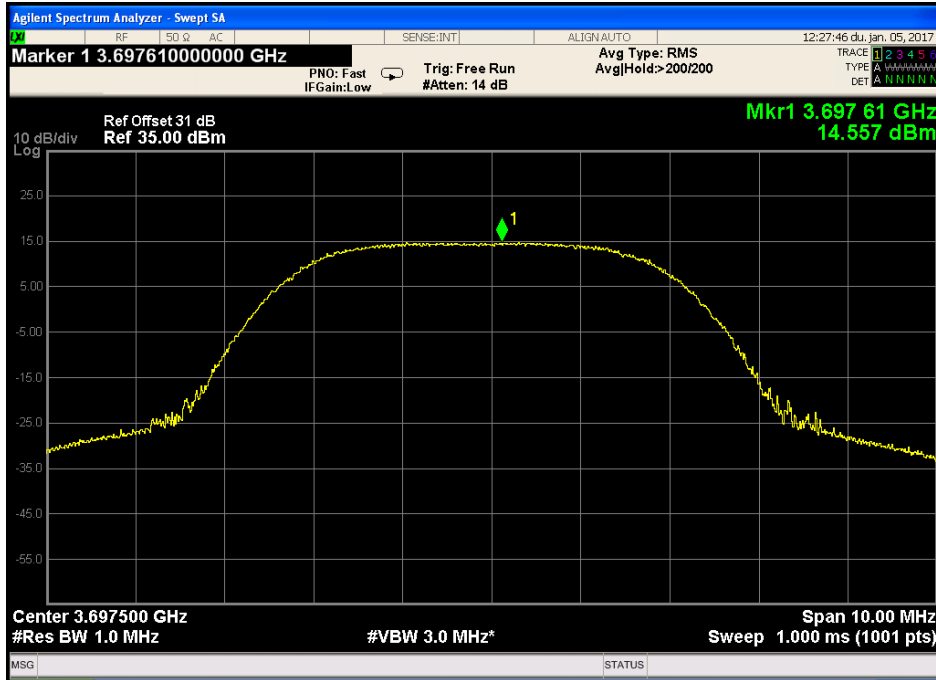


Figure 86. — 3697.5 MHz QPSK- 5MHz CBW, High Population

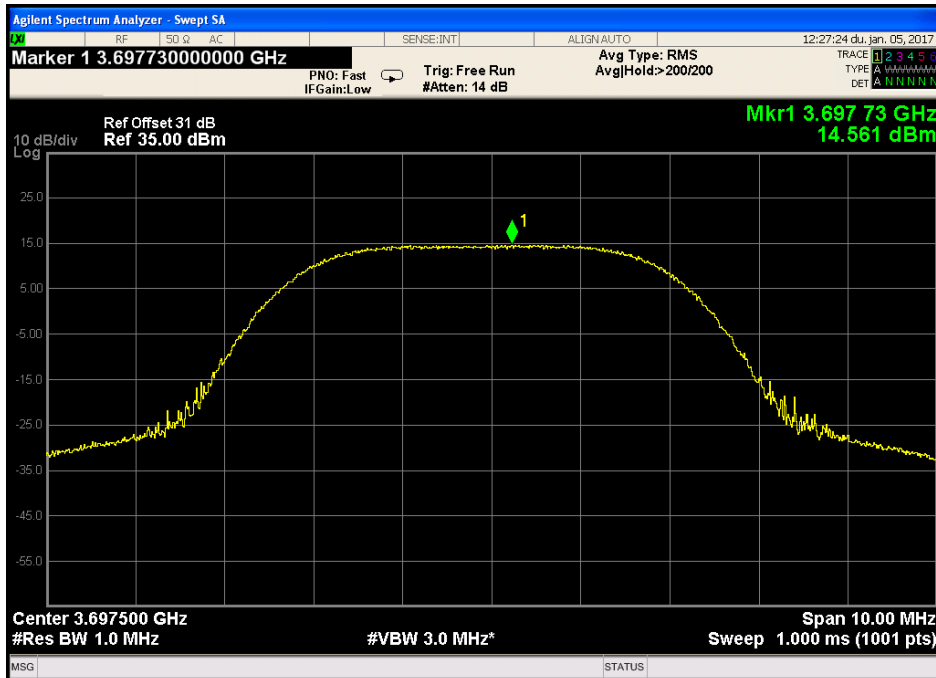


Figure 87. — 3697.5 MHz 16QAM- 5MHz CBW, High Population



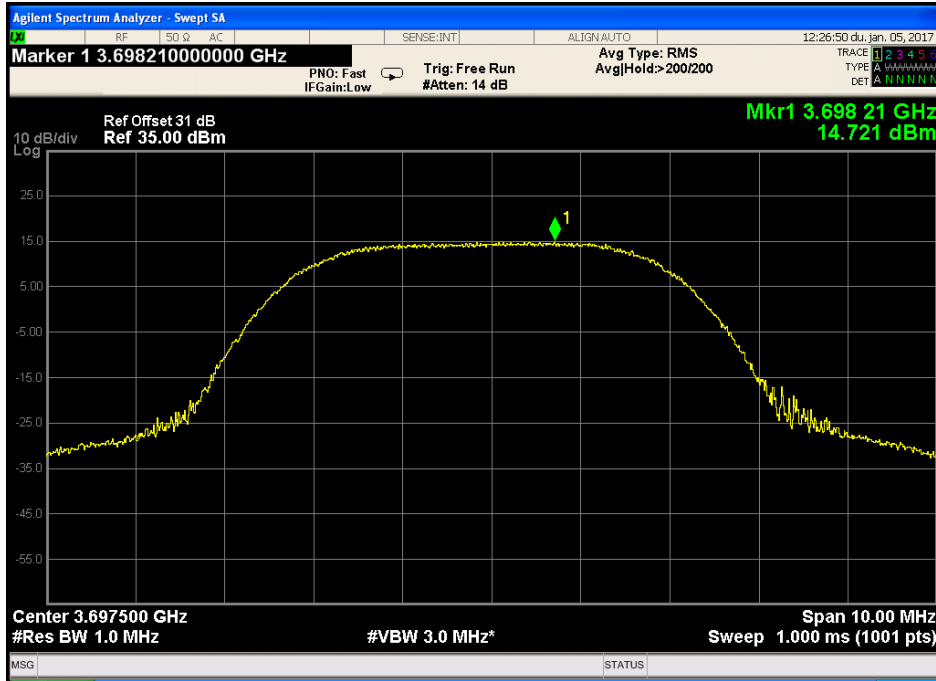


Figure 88. — 3697.5 MHz 64QAM- 5MHz CBW, High Population

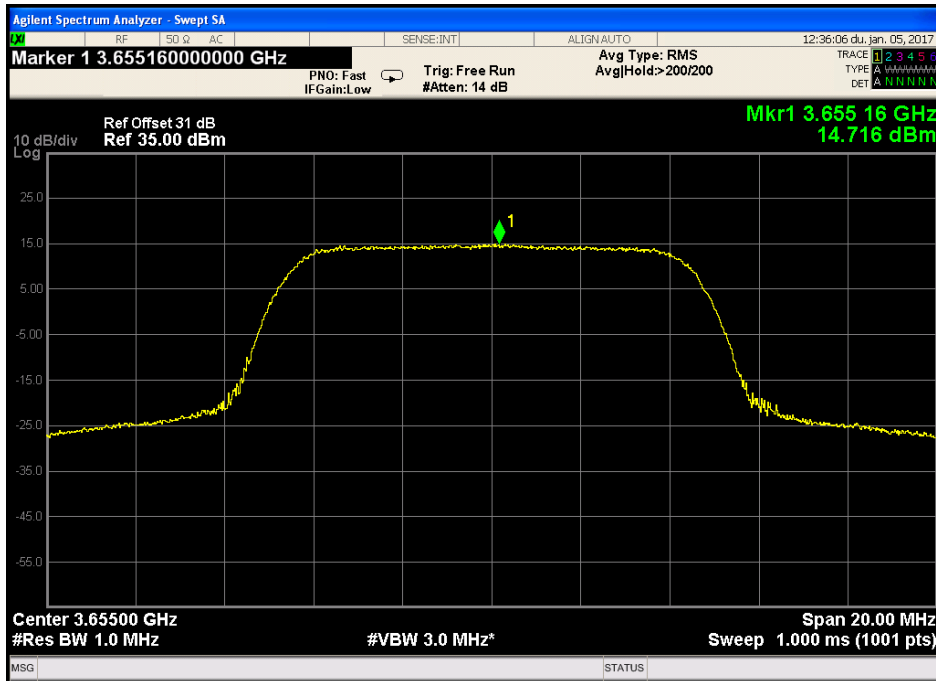


Figure 89. — 3655.0 MHz QPSK - 10MHz CBW, High Population

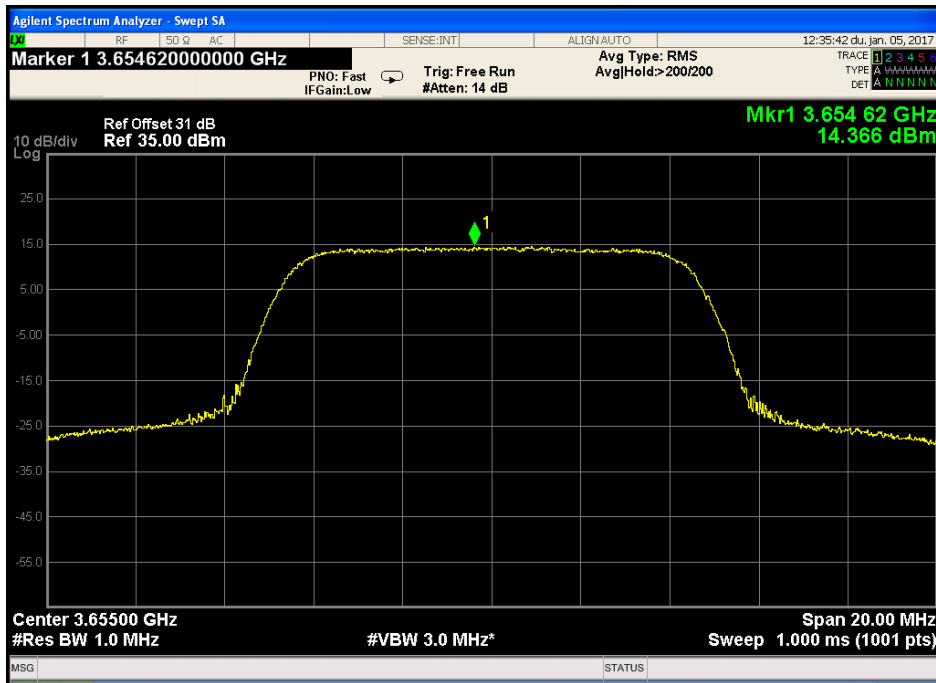


Figure 90. — 3655.0 MHz 16QAM - 10MHz CBW, High Population

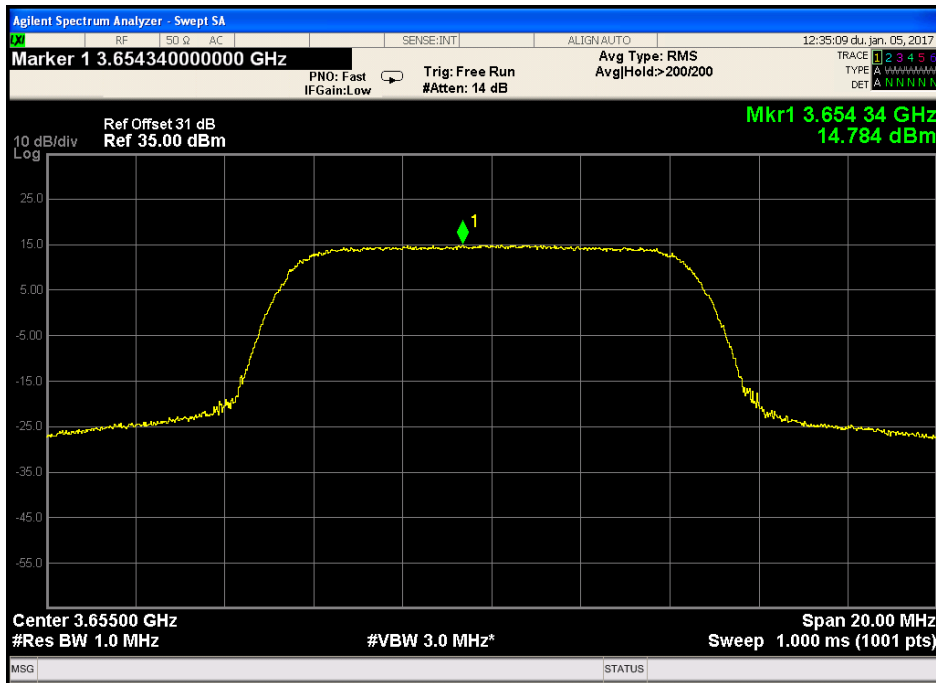


Figure 91. — 3655.0 MHz 64QAM - 10MHz CBW, High Population

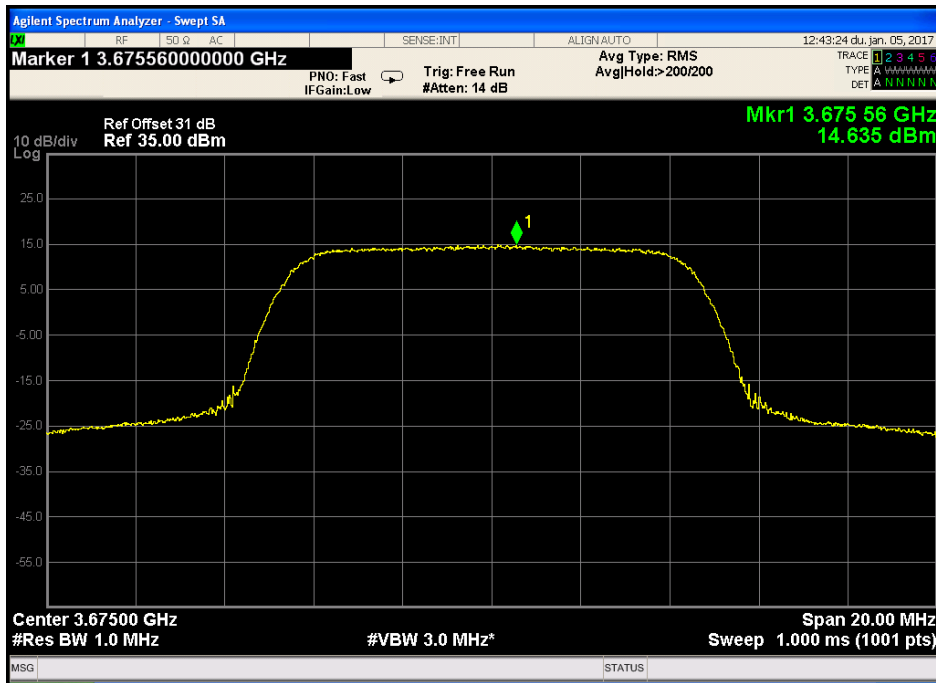


Figure 92. — 3675.0 MHz QPSK - 10MHz CBW, High Population

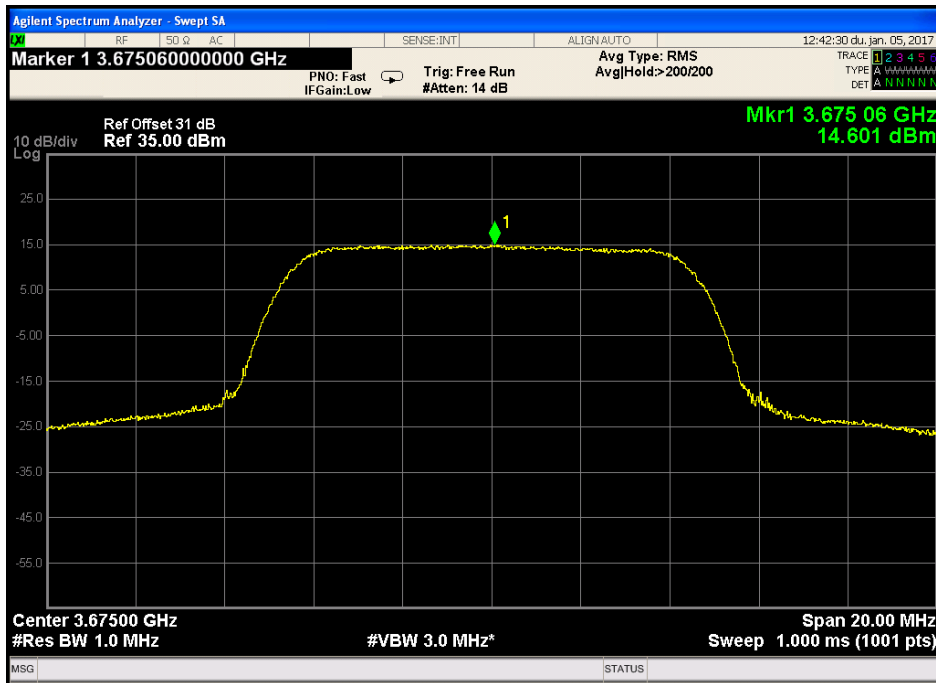


Figure 93. — 3675.0 MHz 16QAM - 10MHz CBW, High Population

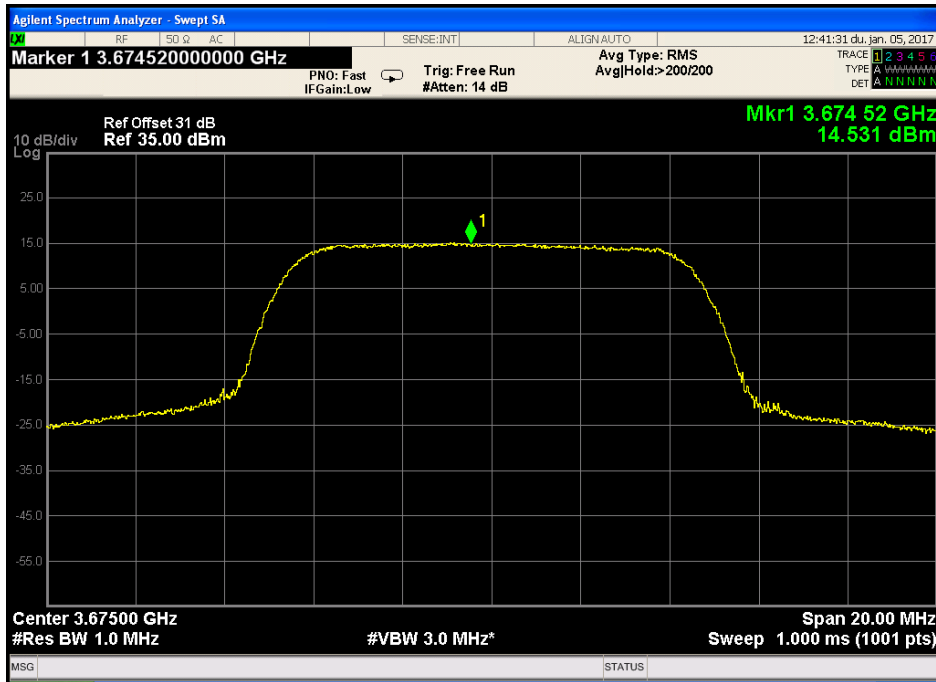


Figure 94. — 3675.0 MHz 64QAM - 10MHz CBW, High Population

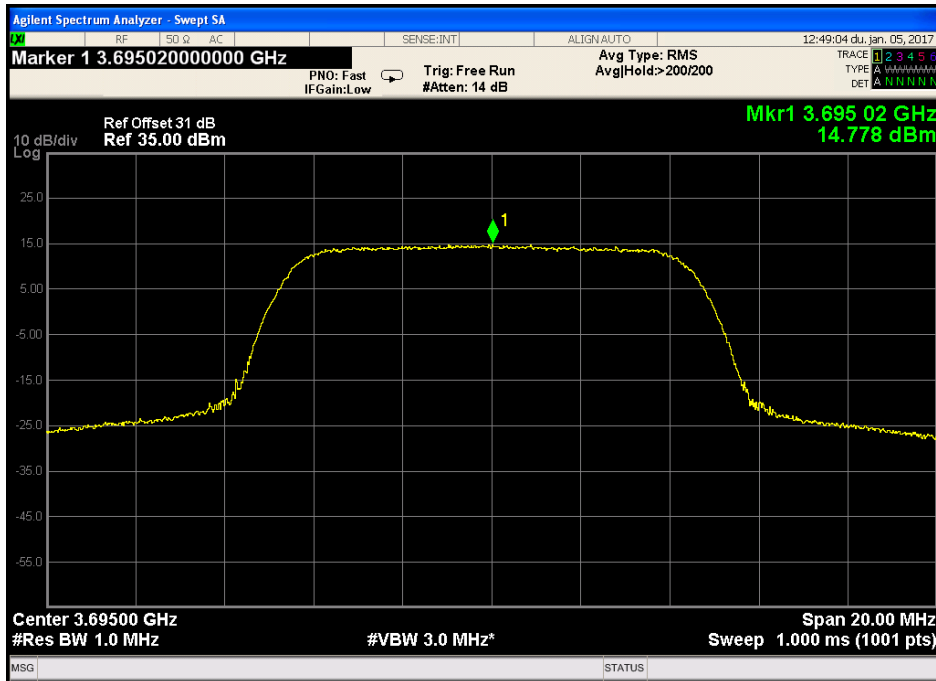


Figure 95. — 3695.0 MHz QPSK - 10MHz CBW, High Population

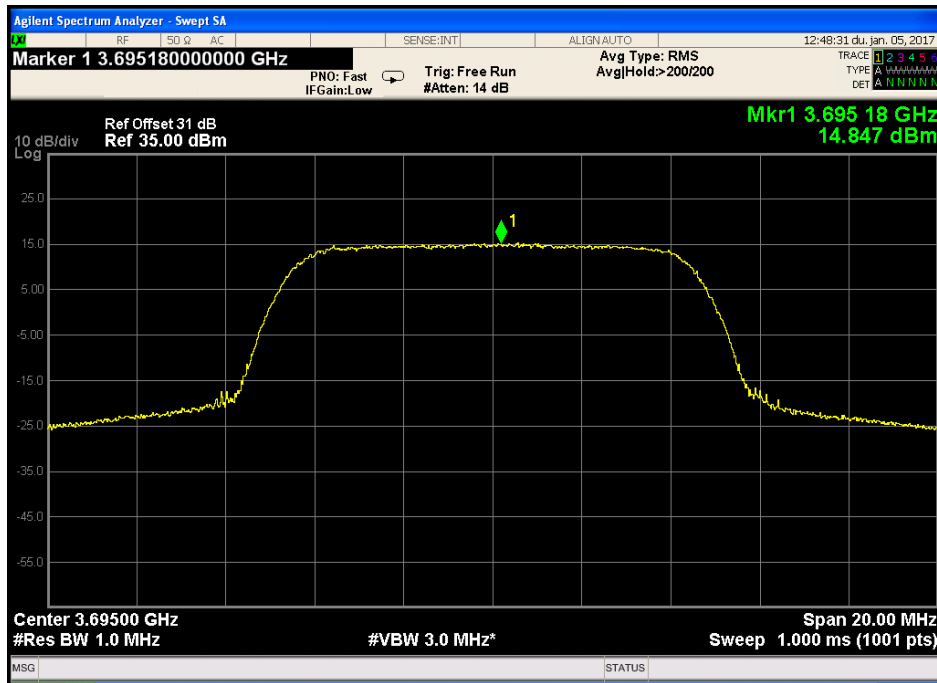


Figure 96. — 3695.0 MHz 16QAM - 10MHz CBW, High Population

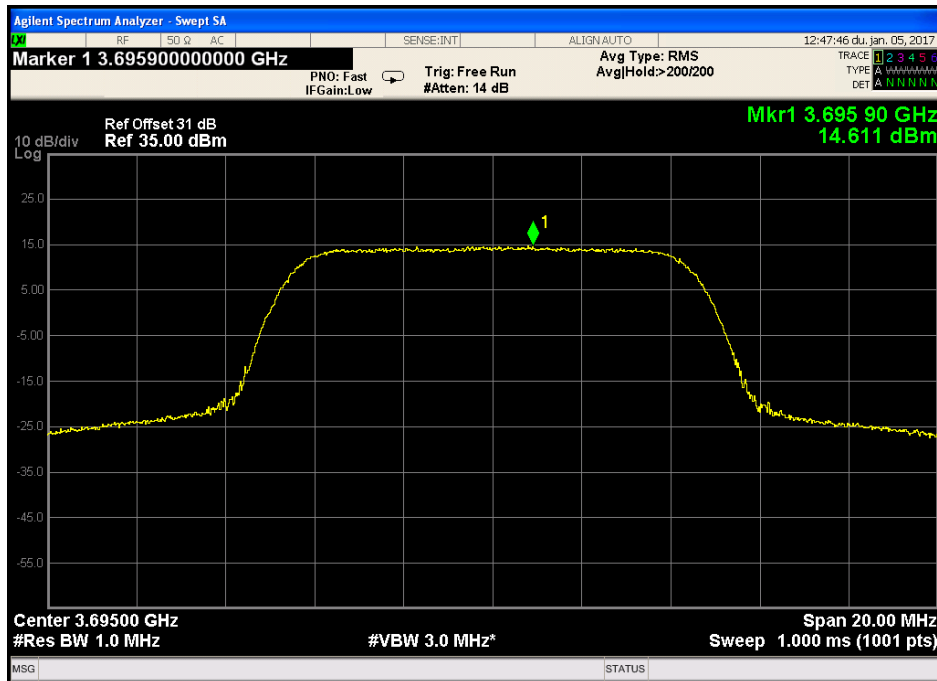


Figure 97. — 3695.0 MHz 64QAM - 10MHz CBW, High Population

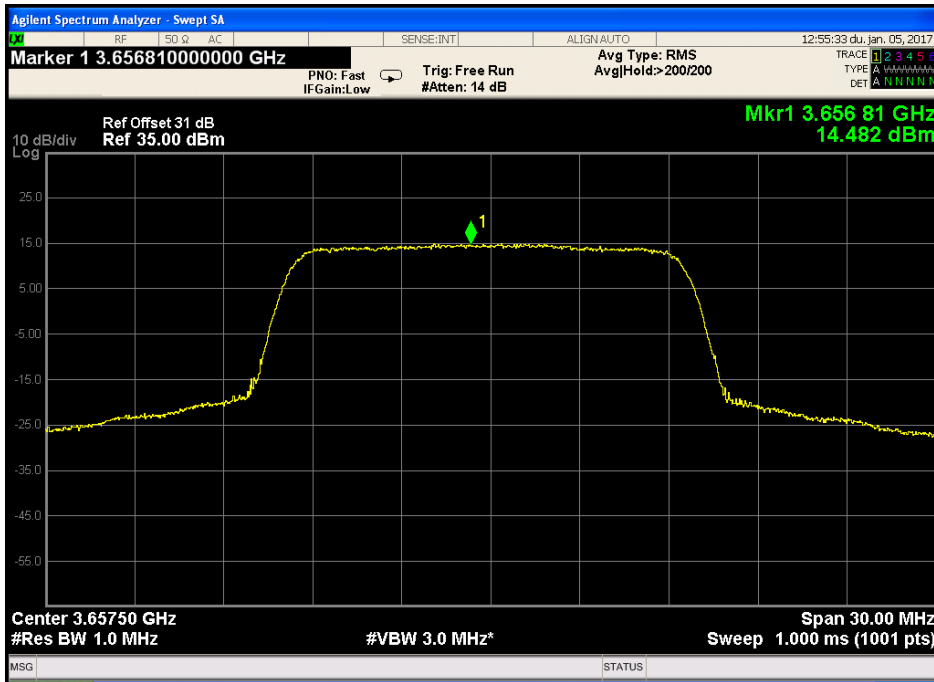


Figure 98. — 3657.5MHz QPSK - 15MHz CBW, High Population

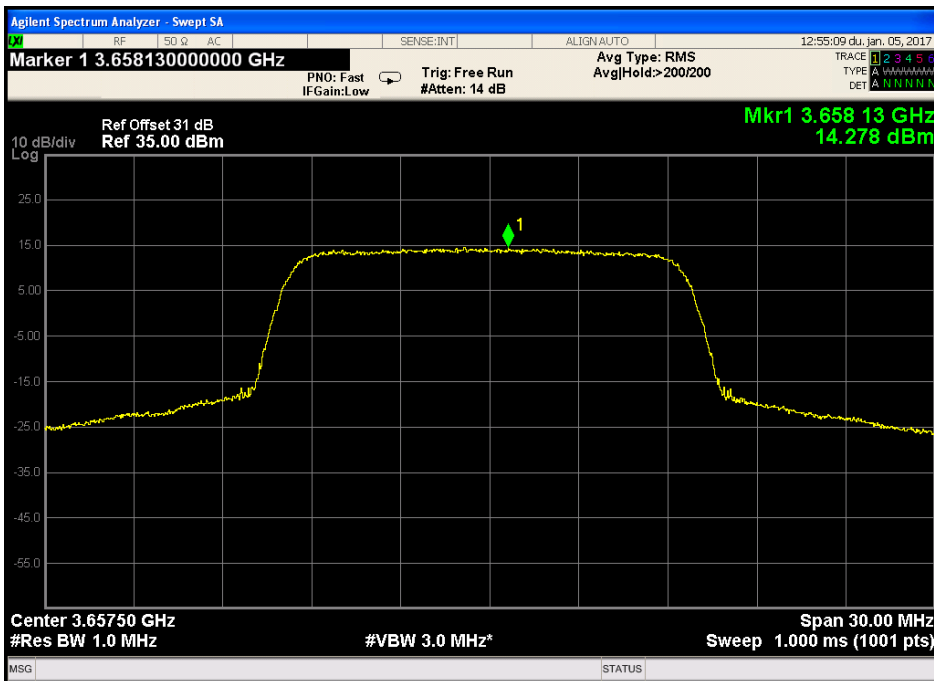


Figure 99. — 3657.5MHz 16QAM - 15MHz CBW, High Population

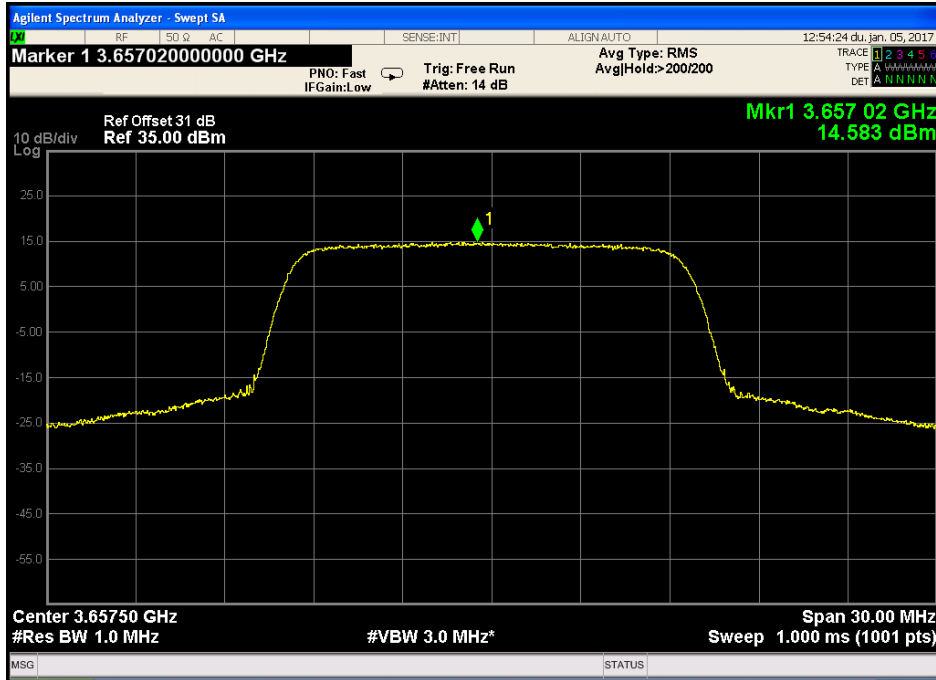


Figure 100. — 3657.5MHz 64QAM - 15MHz CBW, High Population

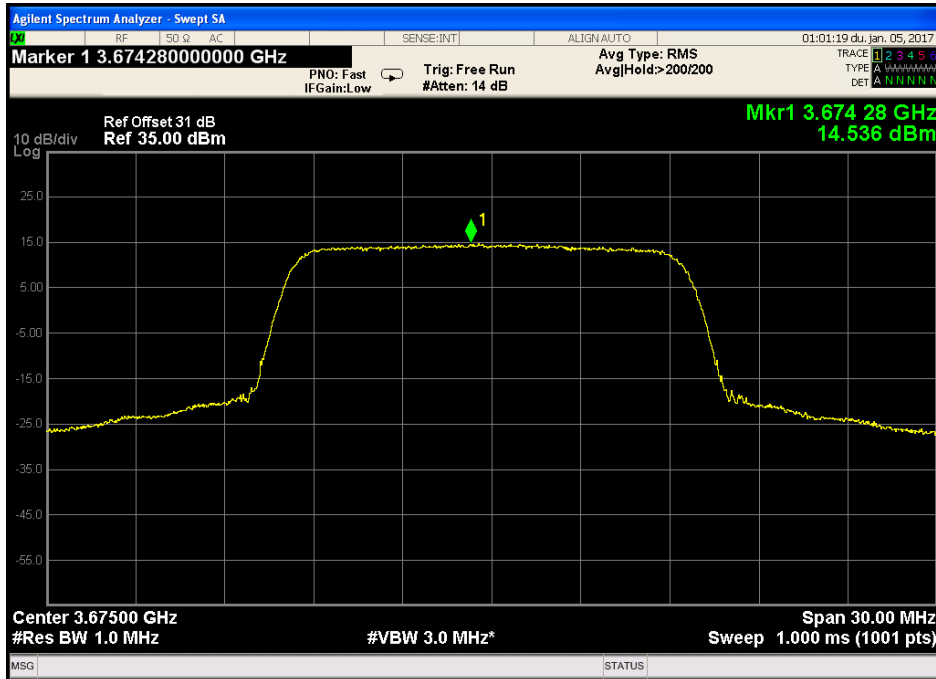


Figure 101. — 3675.0MHz QPSK - 15MHz CBW, High Population

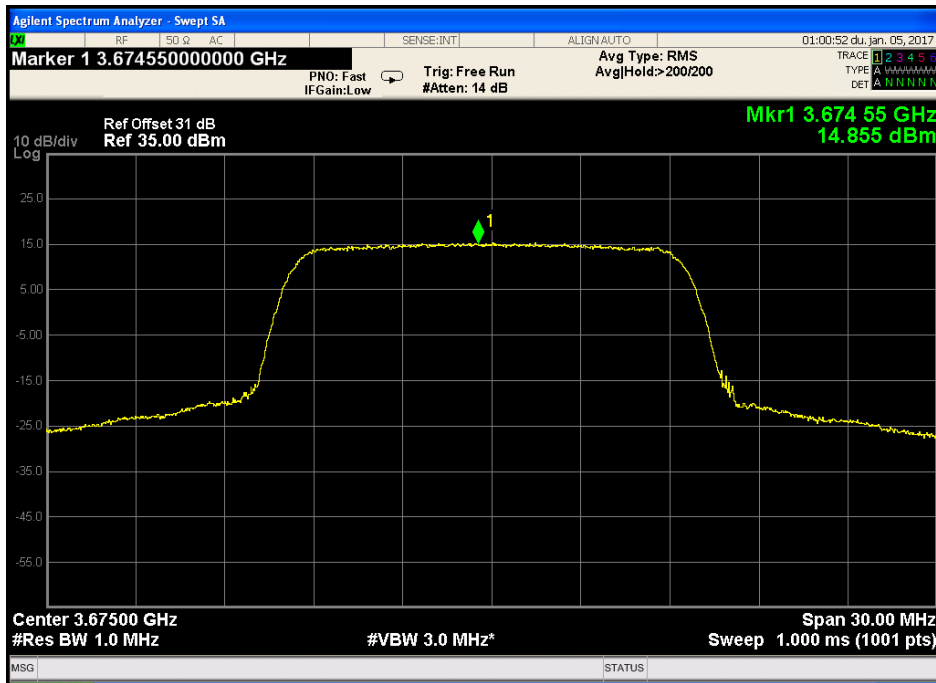


Figure 102. — 3675.0MHz 16QAM - 15MHz CBW, High Population

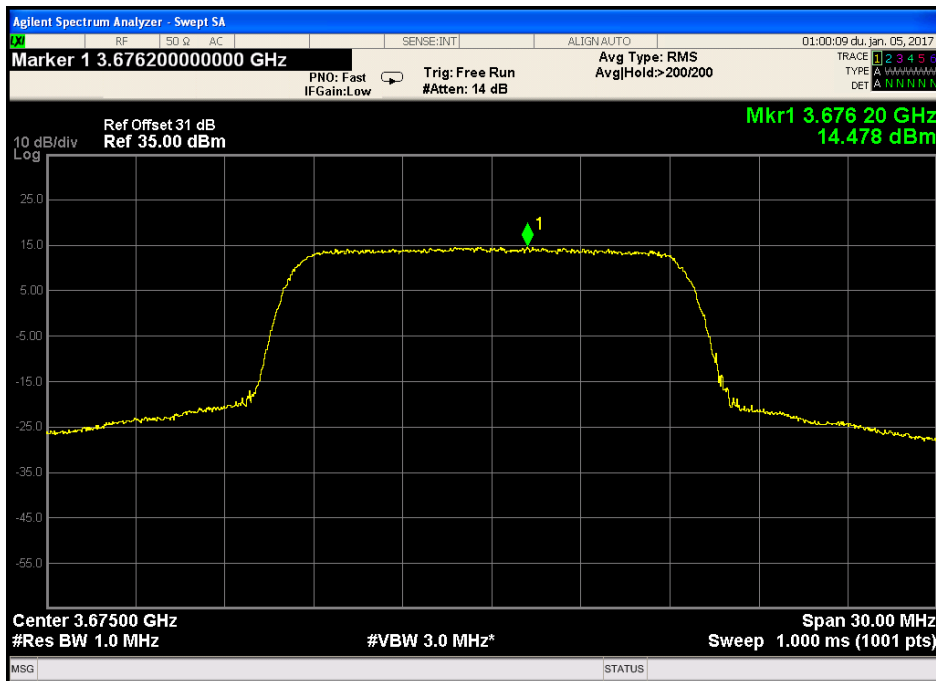


Figure 103. — 3675.0MHz 64QAM - 15MHz CBW, High Population



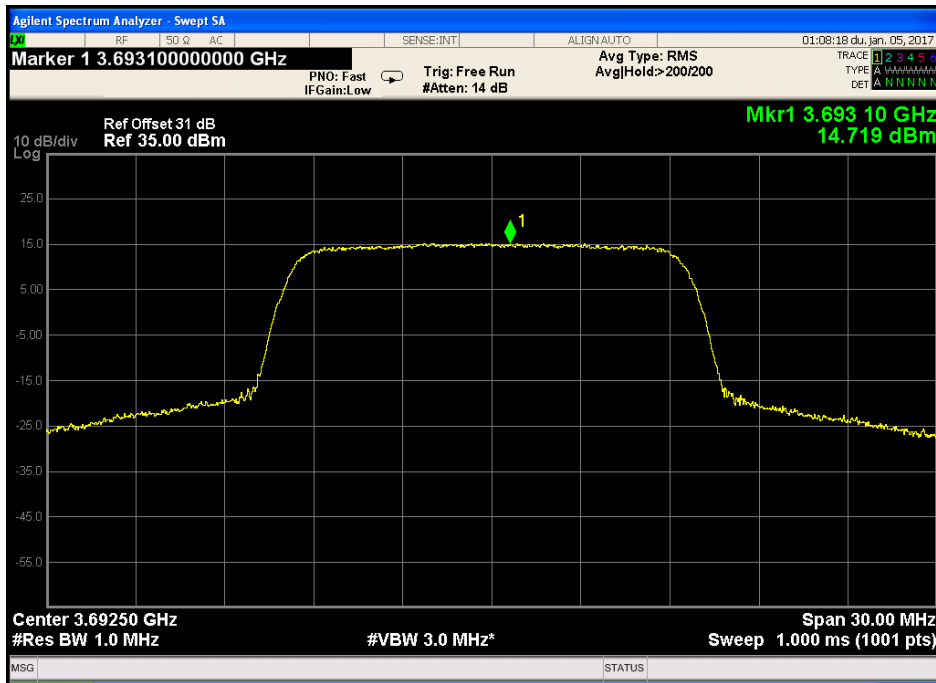


Figure 104. — 3692.5MHz QPSK - 15MHz CBW, High Population

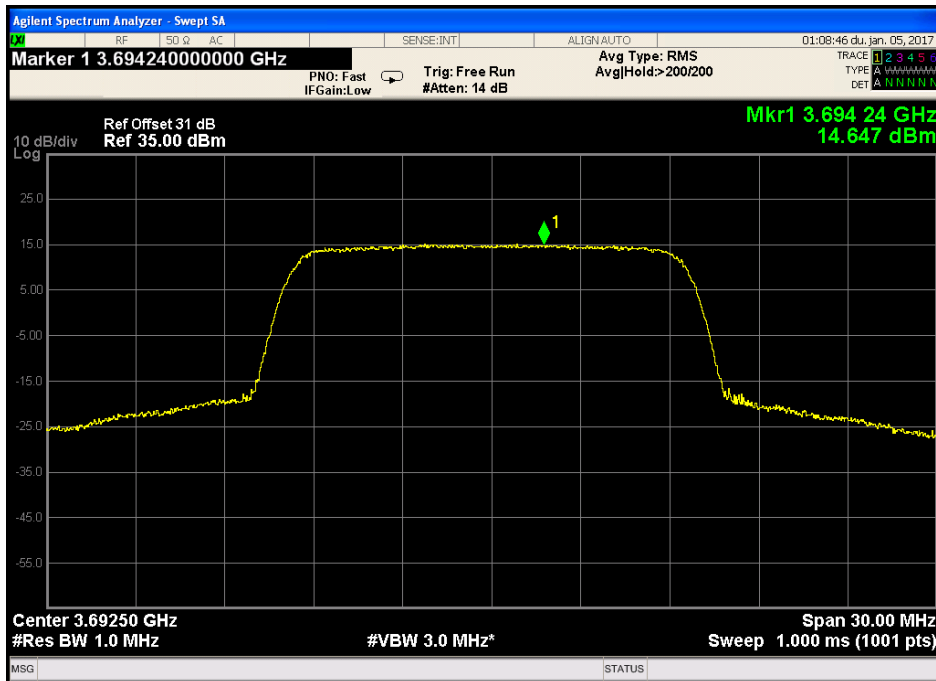


Figure 105. — 3692.5MHz 16QAM - 15MHz CBW, High Population

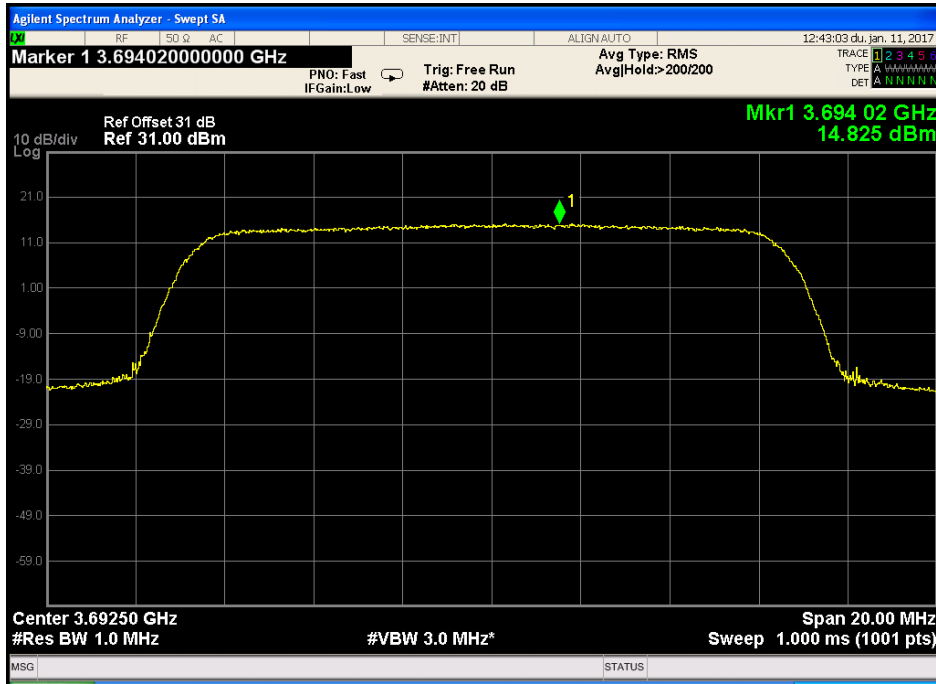


Figure 106. — 3692.5MHz 64QAM - 15MHz CBW, High Population

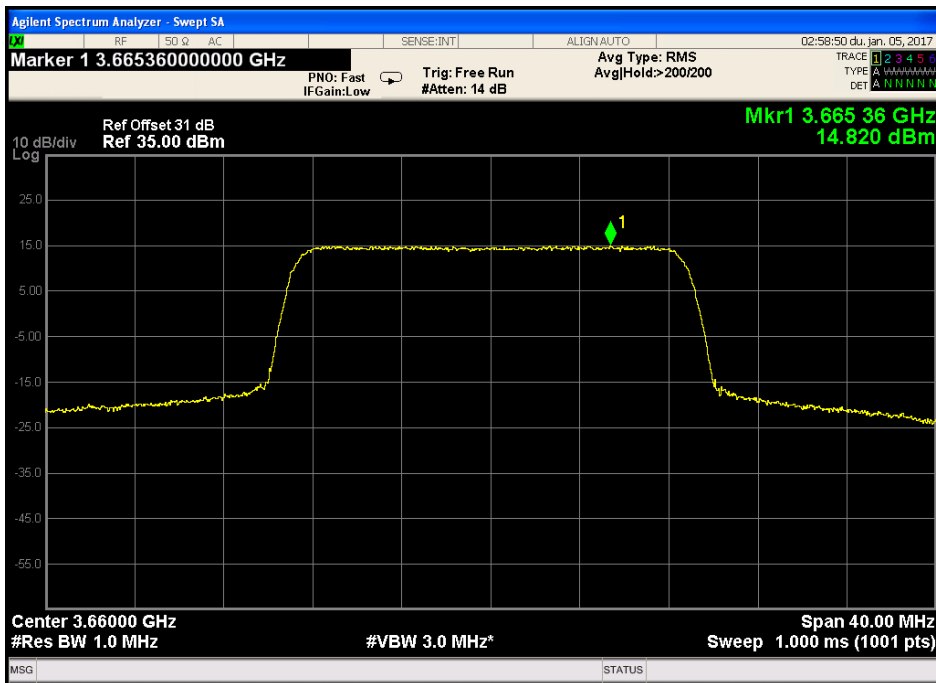


Figure 107. — 3660.0MHz QPSK - 20MHz CBW, High Population

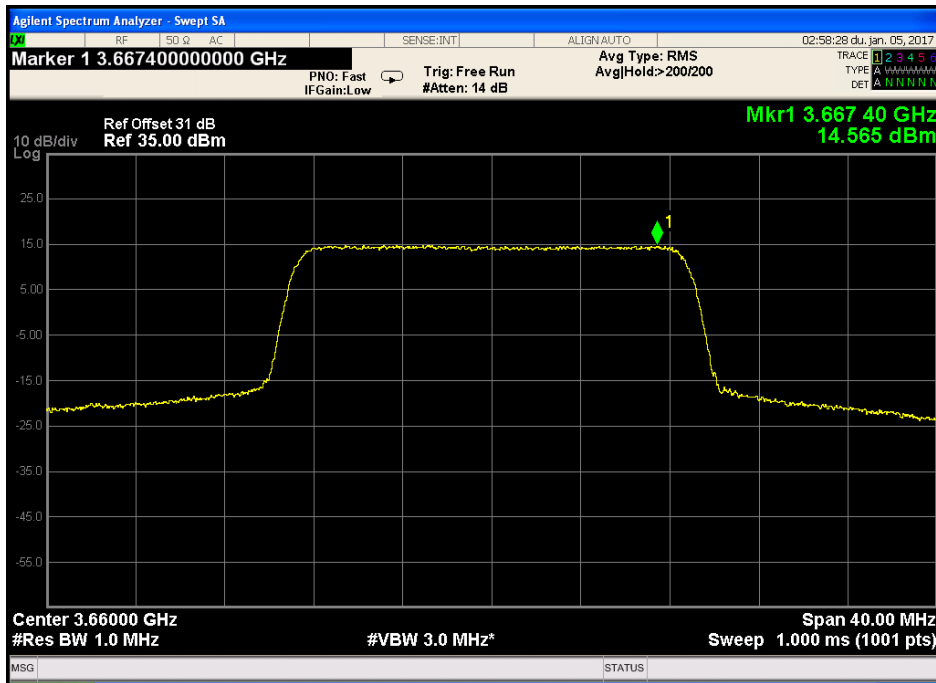


Figure 108. — 3660.0MHz 16QAM - 20MHz CBW, High Population

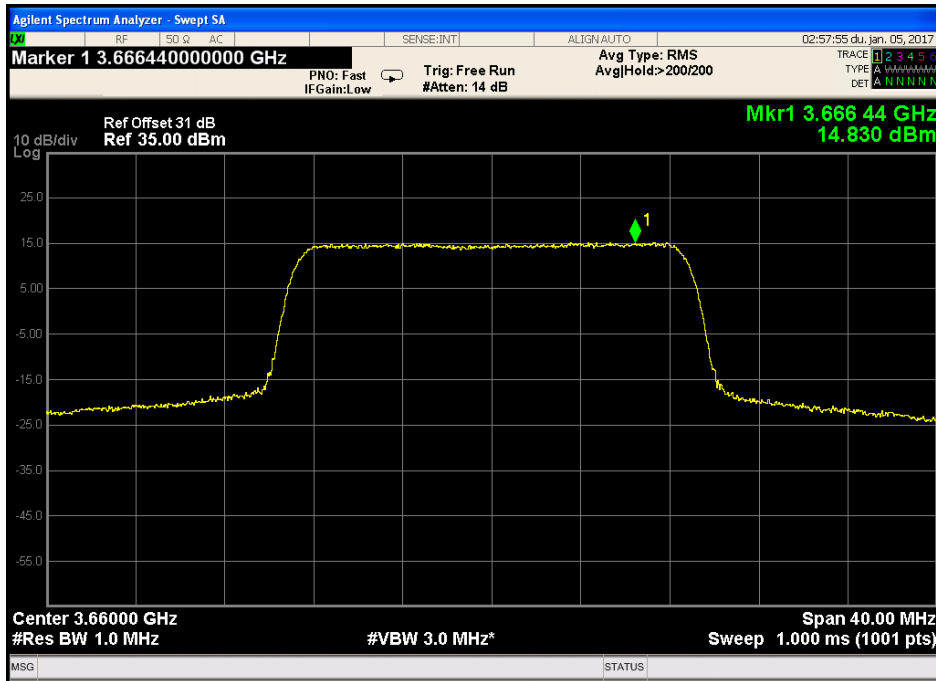


Figure 109. — 3660.0MHz 64QAM - 20MHz CBW, High Population

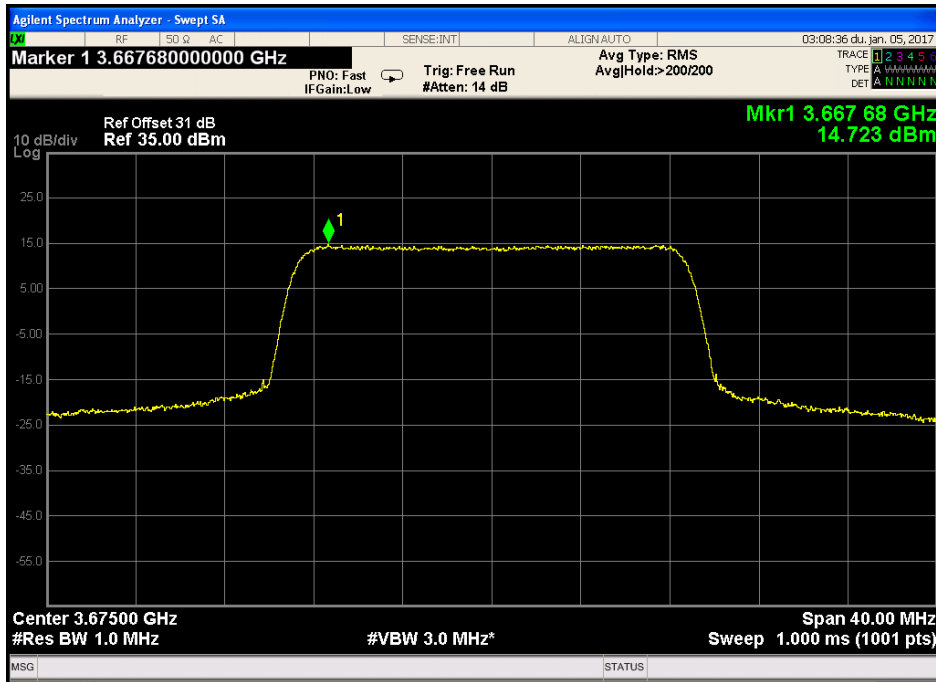


Figure 110. — 3675.0MHz QPSK - 20MHz CBW, High Population

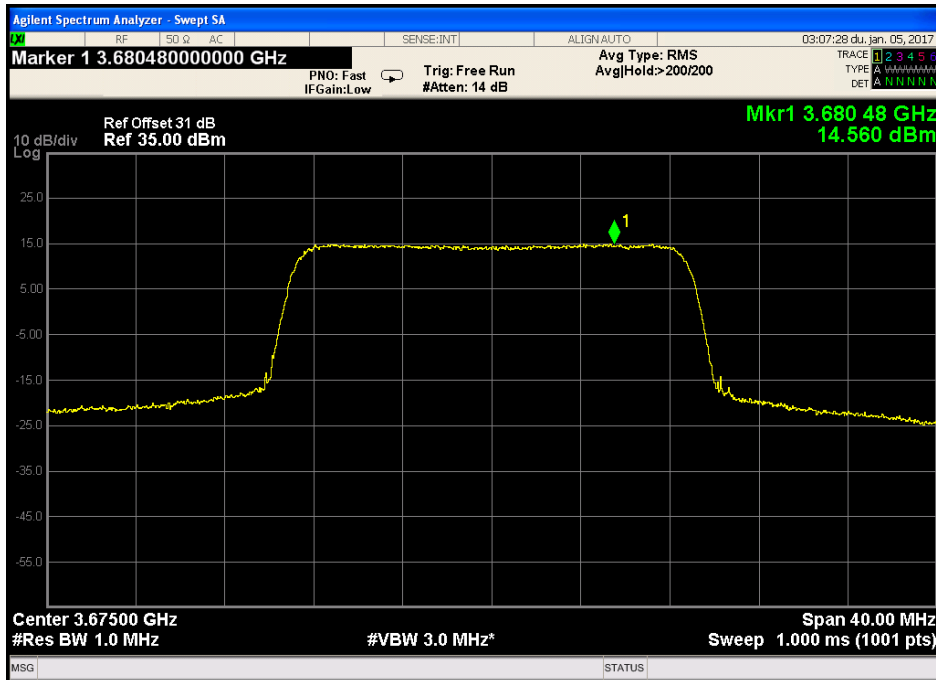


Figure 111. — 3675.0MHz 16QAM - 20MHz CBW, High Population

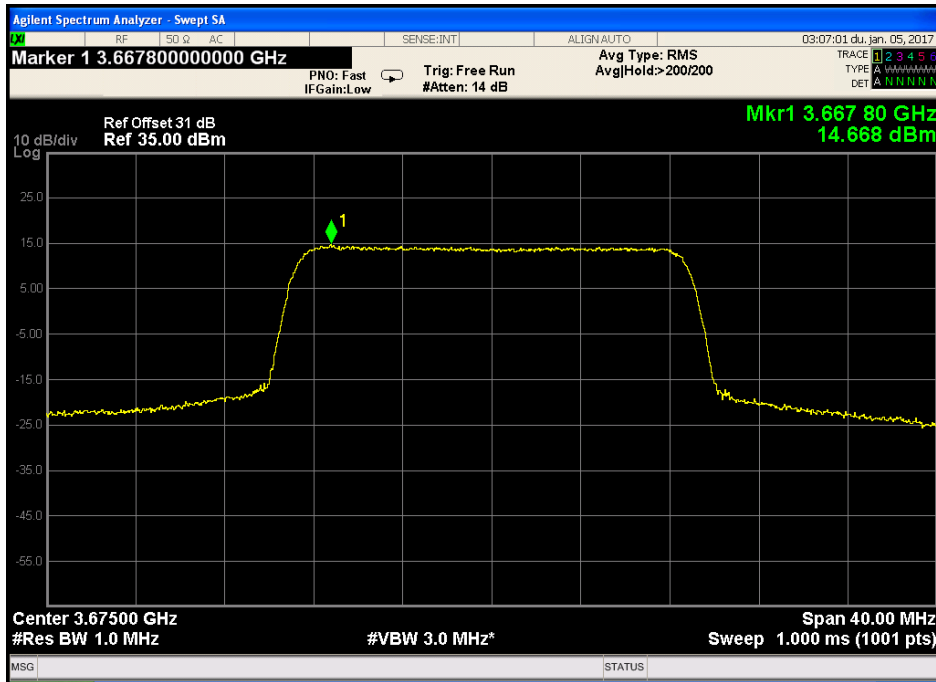


Figure 112. — 3675.0MHz 64QAM - 20MHz CBW, High Population

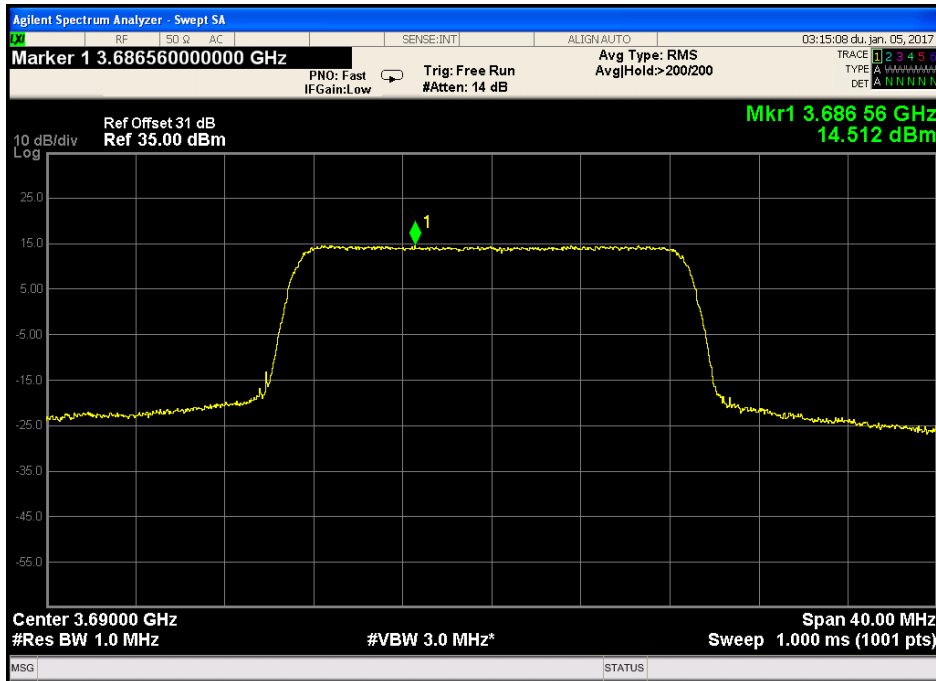


Figure 113. — 3690.0MHz QPSK - 20MHz CBW, High Population

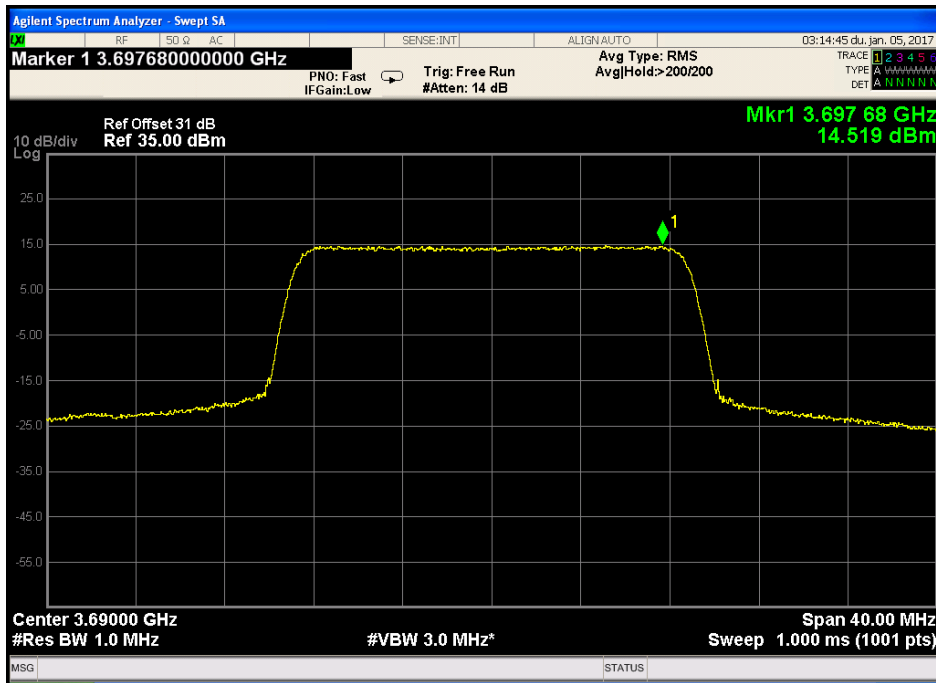


Figure 114. — 3690.0MHz 16QAM - 20MHz CBW, High Population

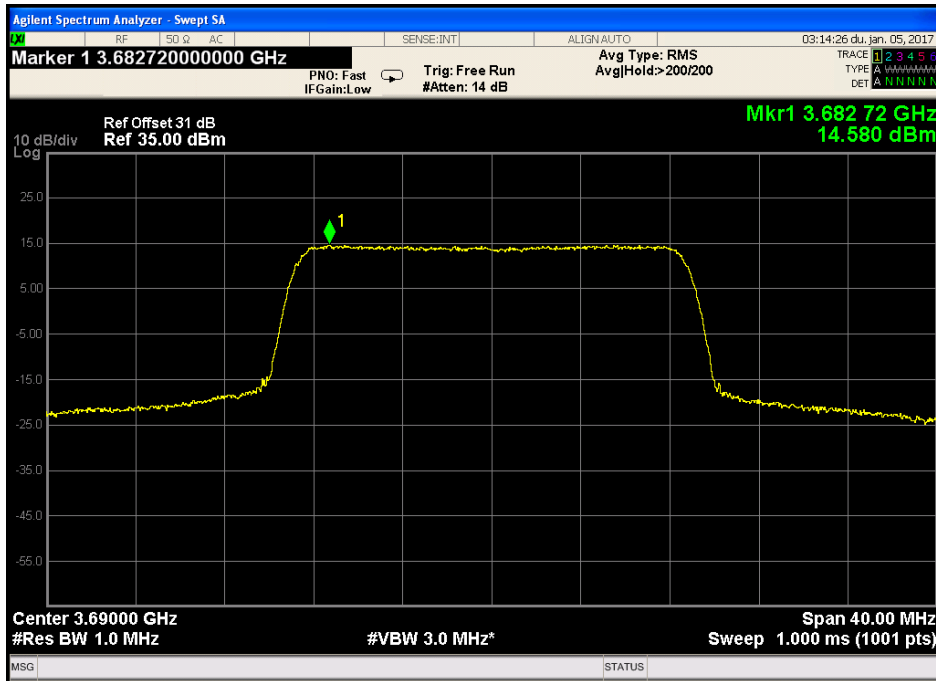


Figure 115. — 3690.0MHz 64QAM - 20MHz CBW, High Population

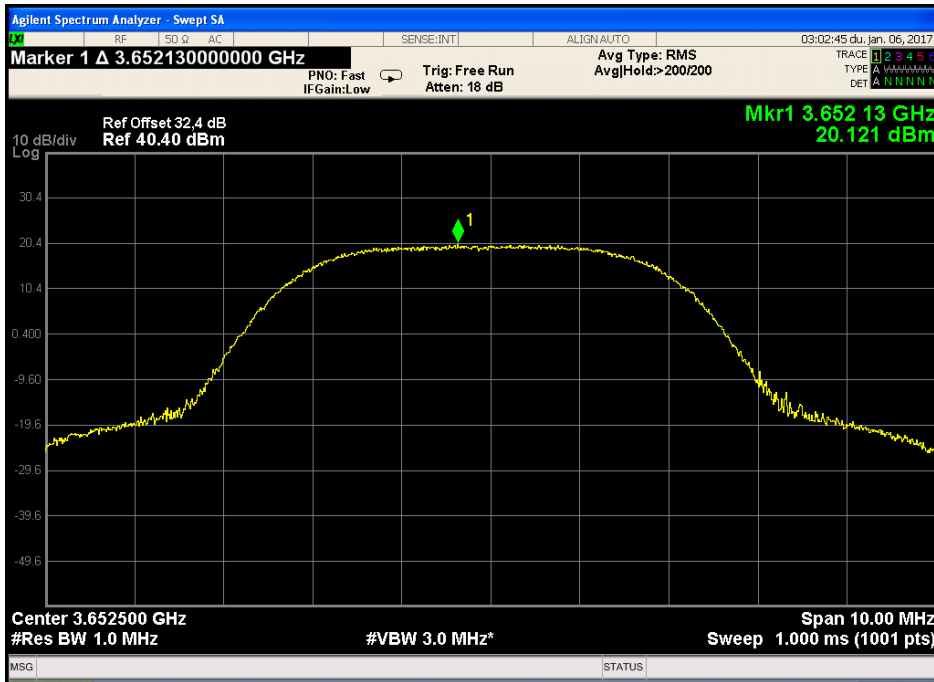


Figure 116. — 3652.5 MHz QPSK - 5MHz CBW, Low Population

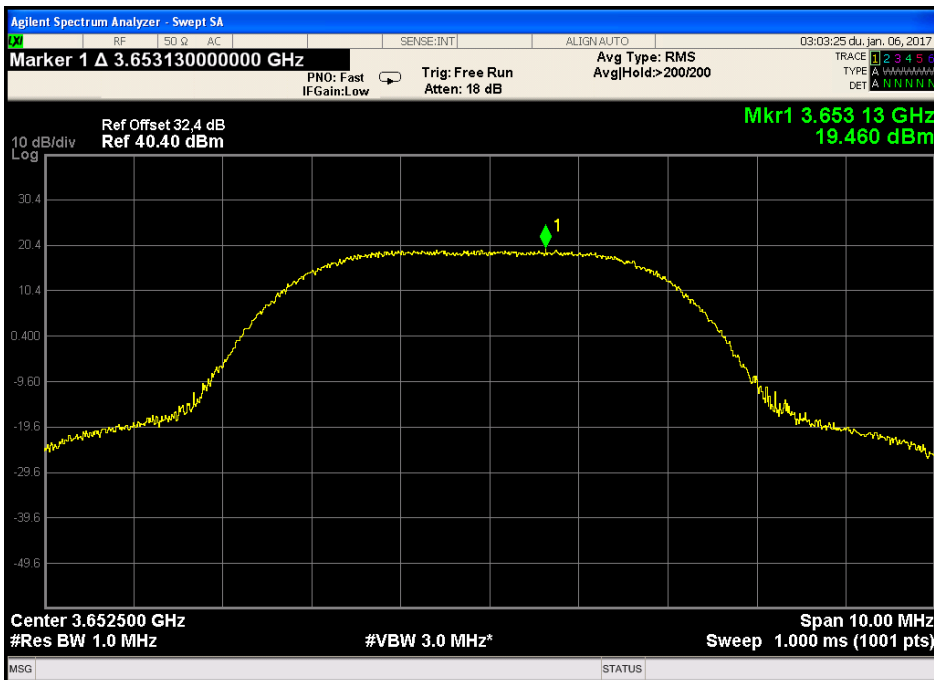


Figure 117. — 3652.5 MHz 16QAM - 5MHz CBW, Low Population

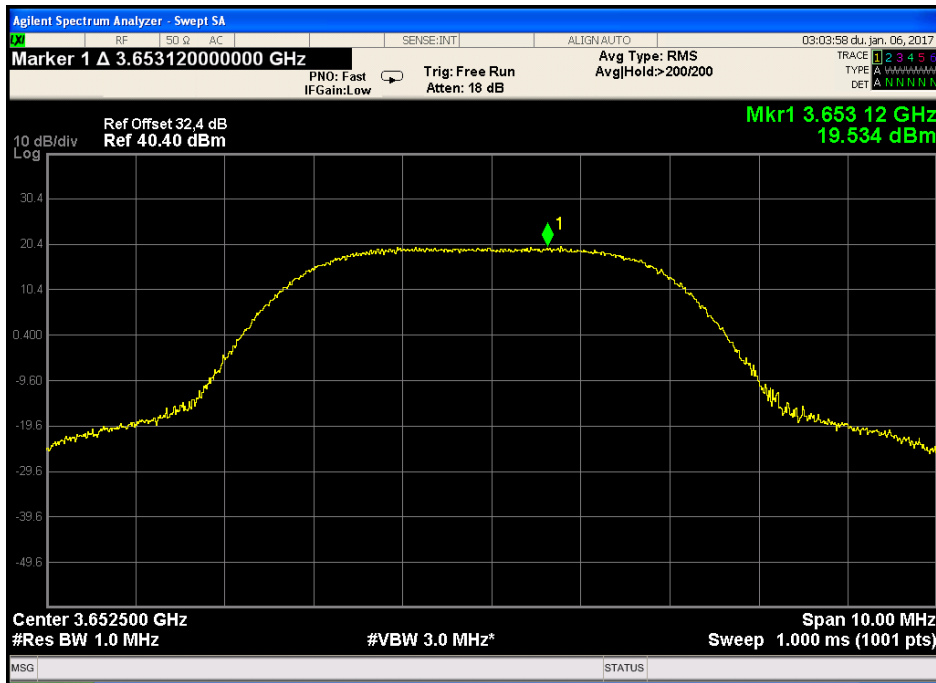


Figure 118. — 3652.5 MHz 64QAM - 5MHz CBW, Low Population

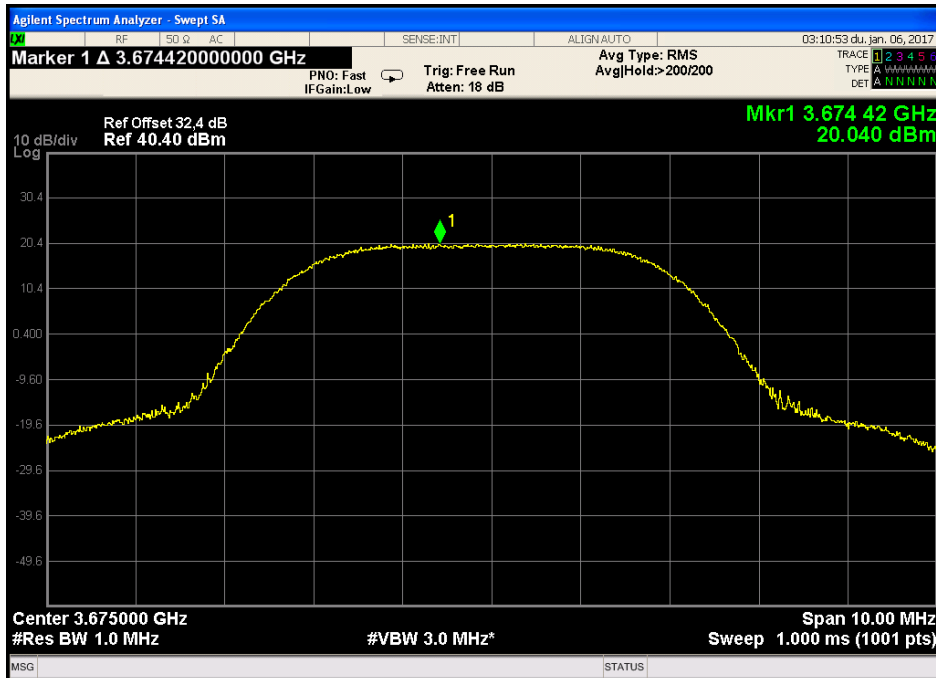


Figure 119. — 3675.0 MHz QPSK - 5MHz CBW, Low Population



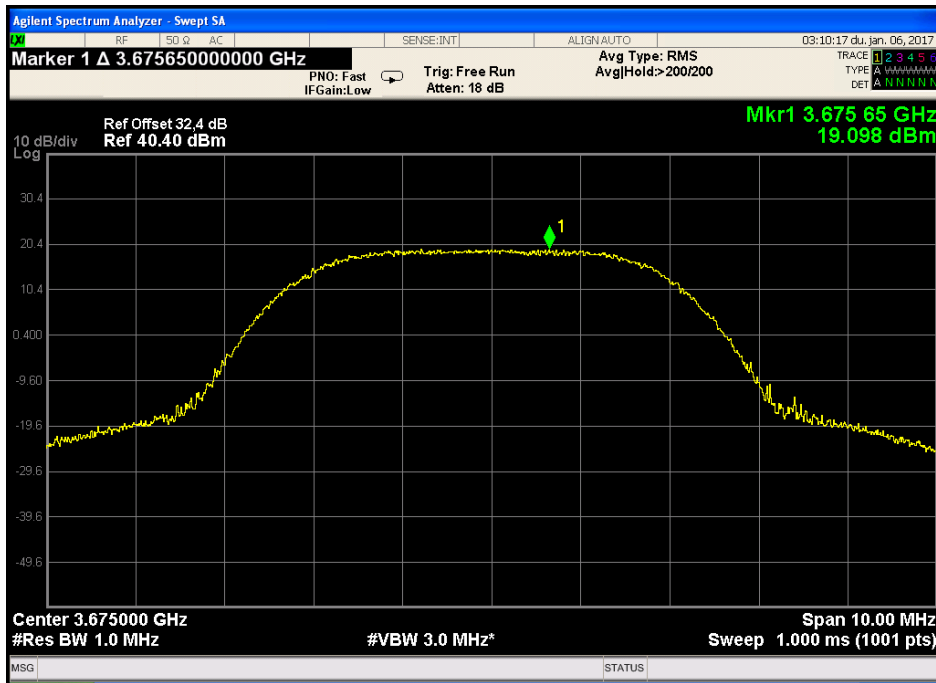


Figure 120. — 3675.0 MHz 16QAM - 5MHz CBW, Low Population

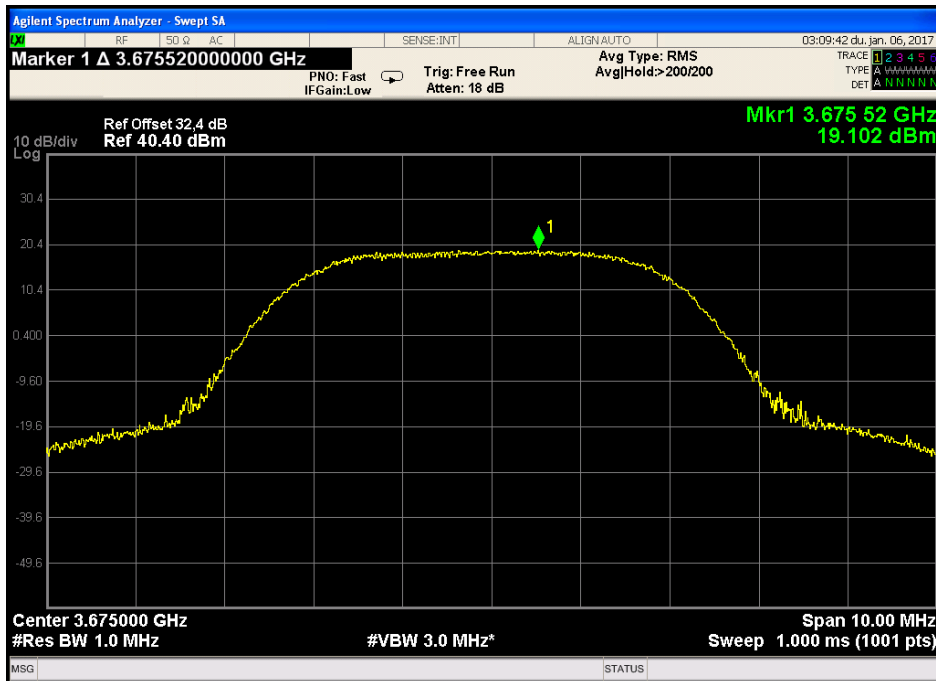


Figure 121. — 3675.0 MHz 64QAM - 5MHz CBW, Low Population

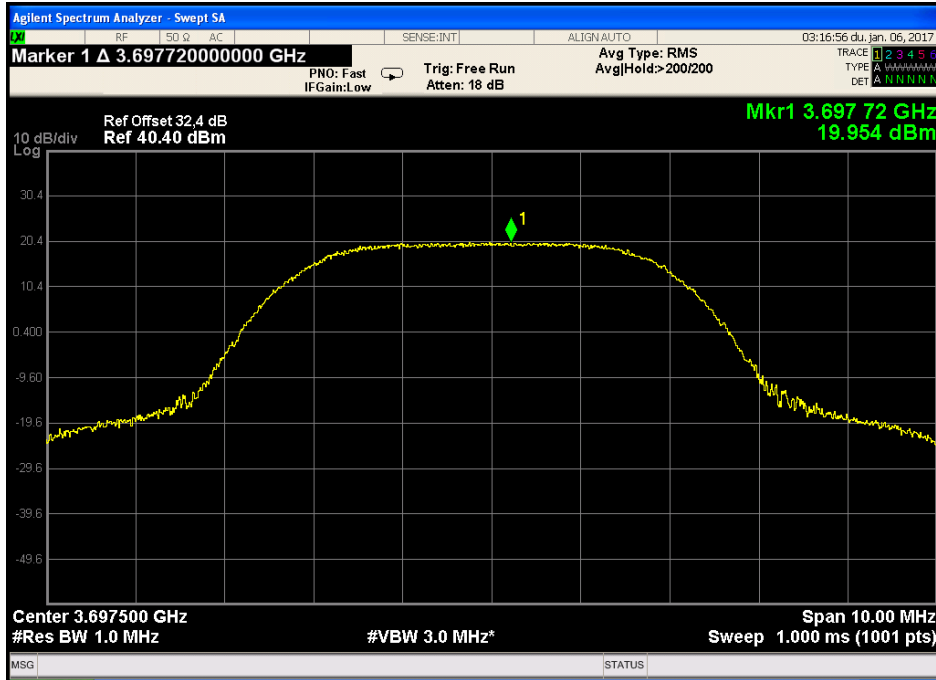


Figure 122. — 3697.5 MHz QPSK - 5MHz CBW, Low Population

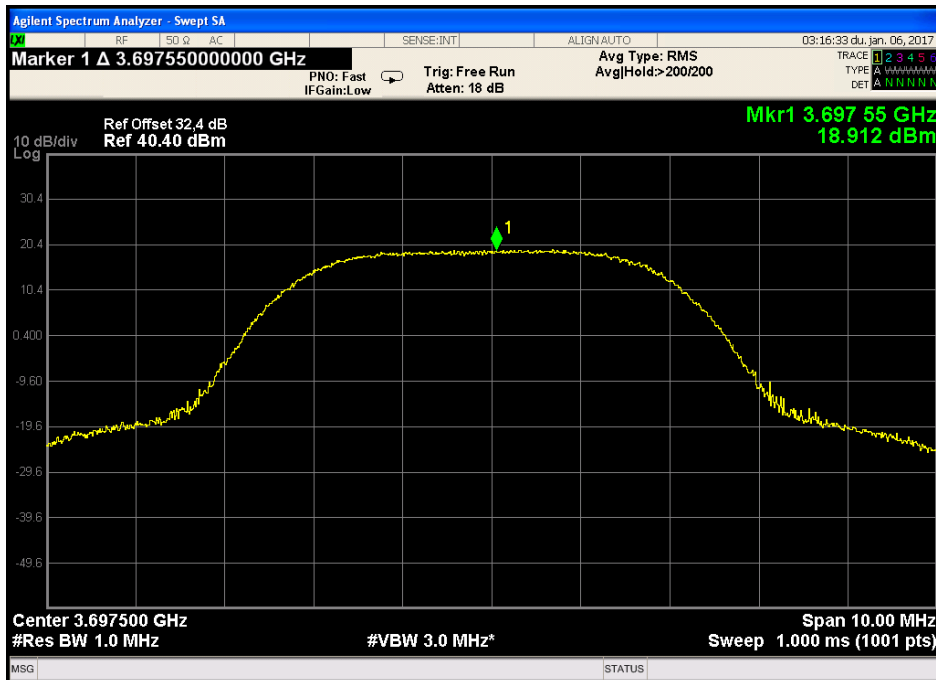


Figure 123. — 3697.5 MHz 16QAM - 5MHz CBW, Low Population

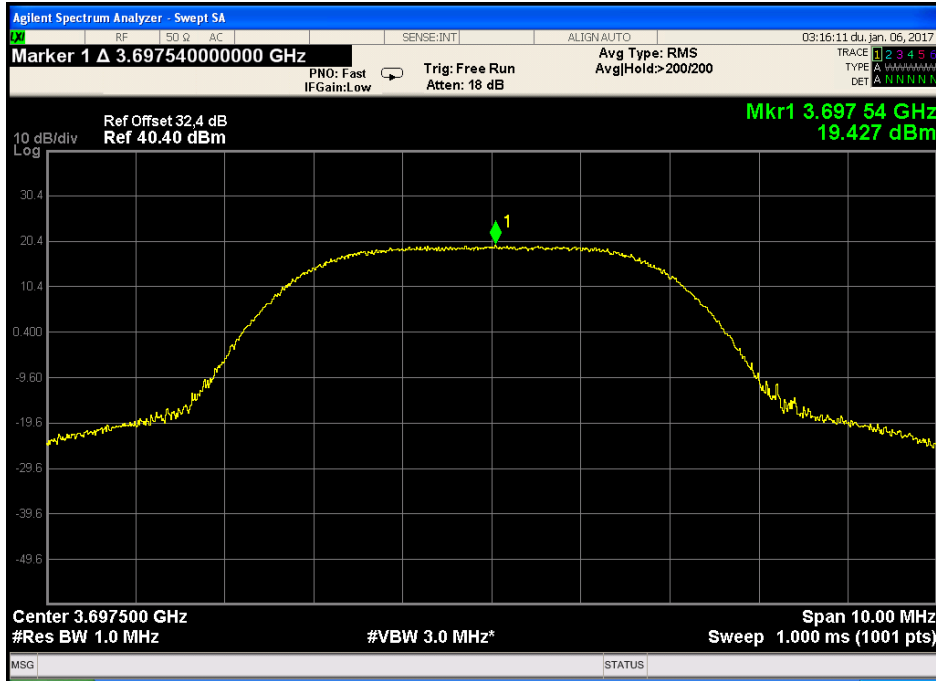


Figure 124. — 3697.5 MHz 64QAM - 5MHz CBW, Low Population

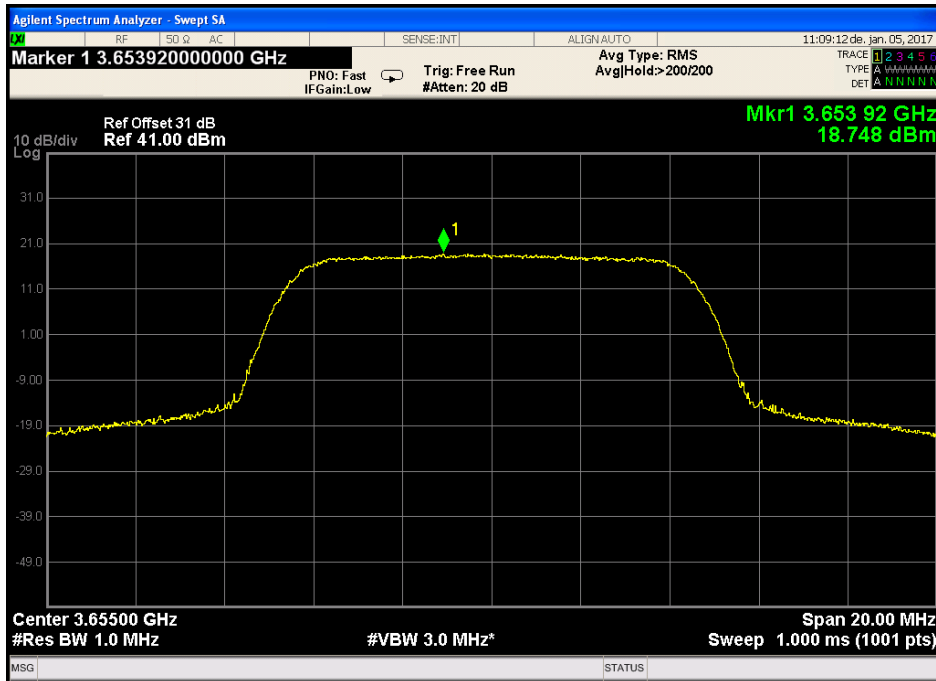


Figure 125. — 3655.0 MHz QPSK - 10MHz CBW, Low Population

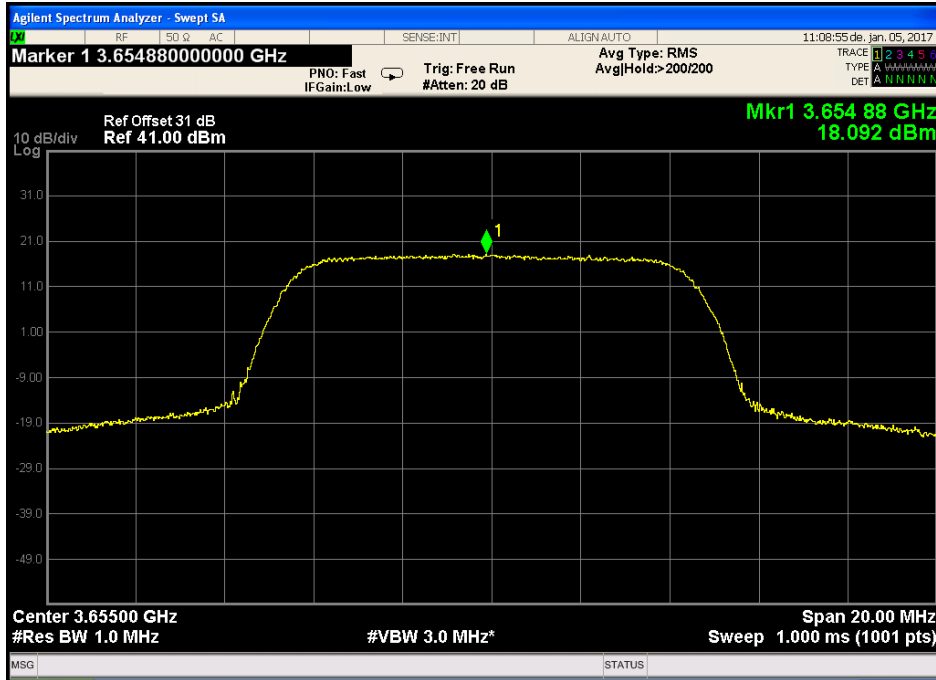


Figure 126. — 3655.0 MHz 16QAM - 10MHz CBW, Low Population

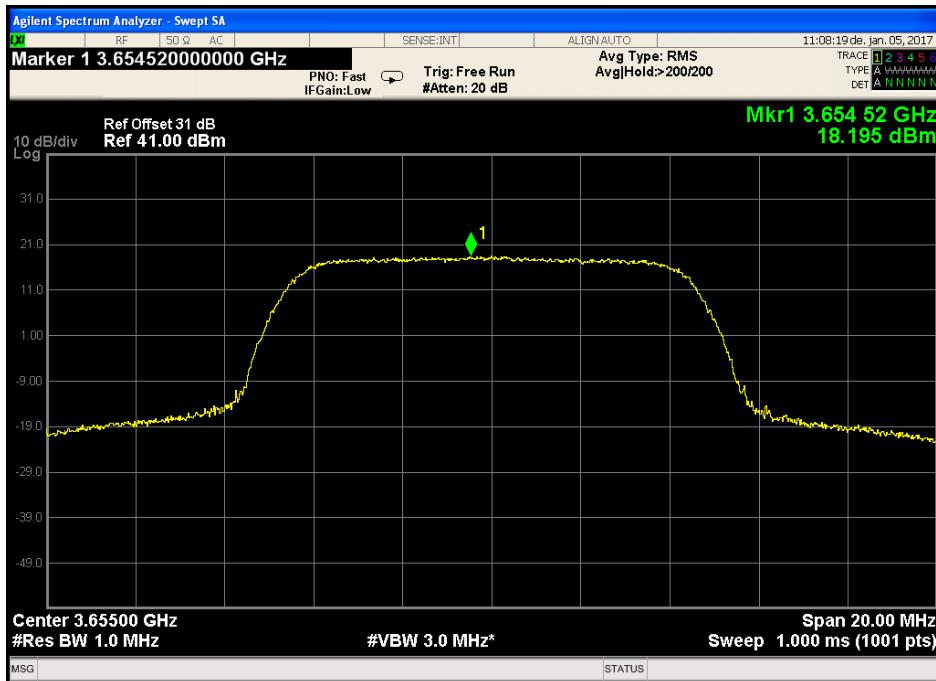


Figure 127. — 3655.0 MHz 64QAM - 10MHz CBW, Low Population

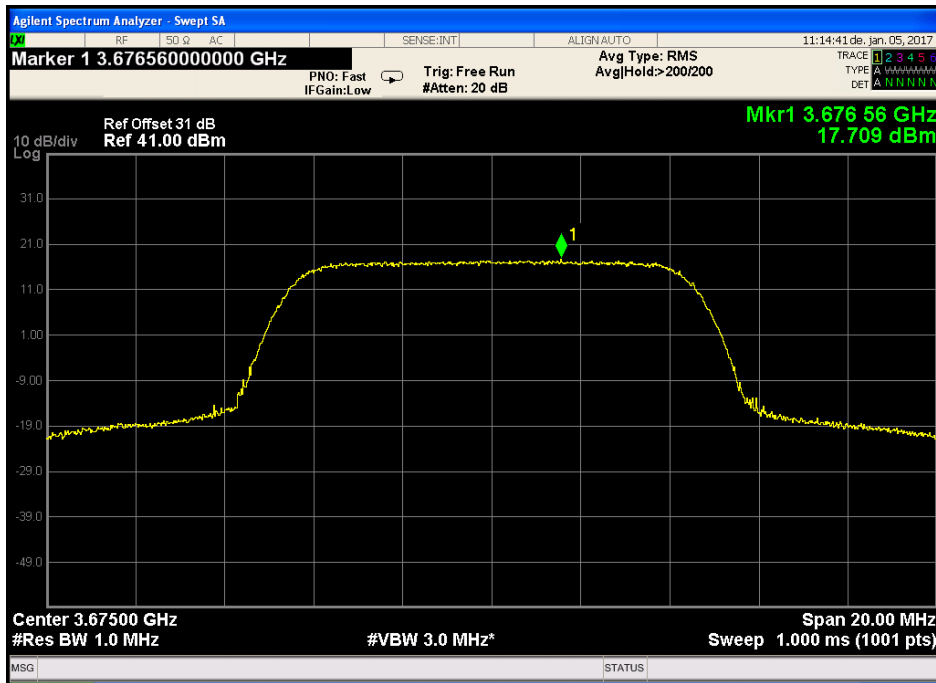


Figure 128. — 3675.0 MHz QPSK - 10MHz CBW, Low Population

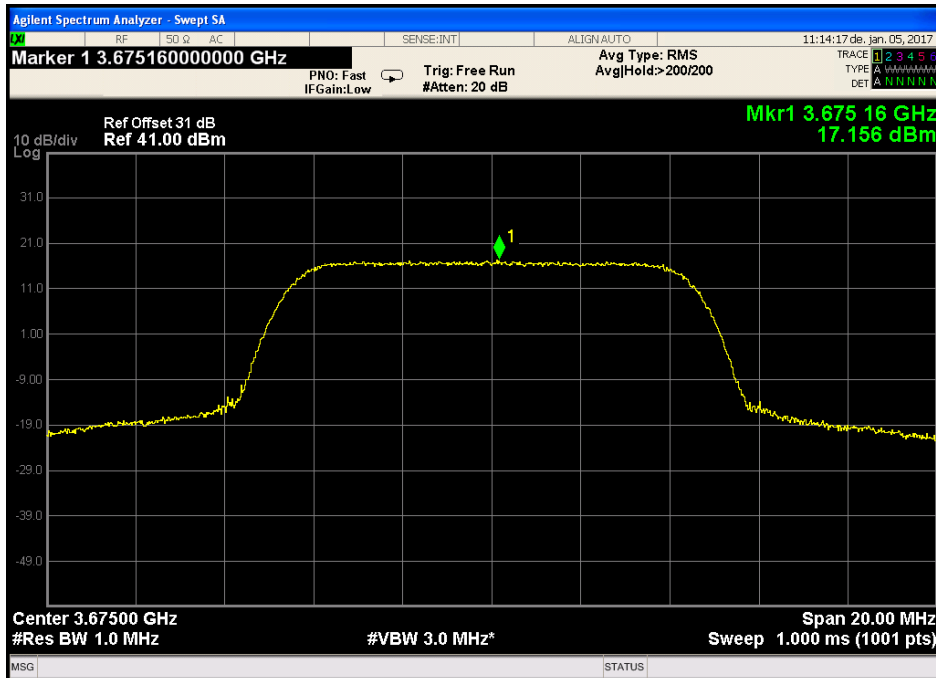


Figure 129. — 3675.0 MHz 16QAM - 10MHz CBW, Low Population

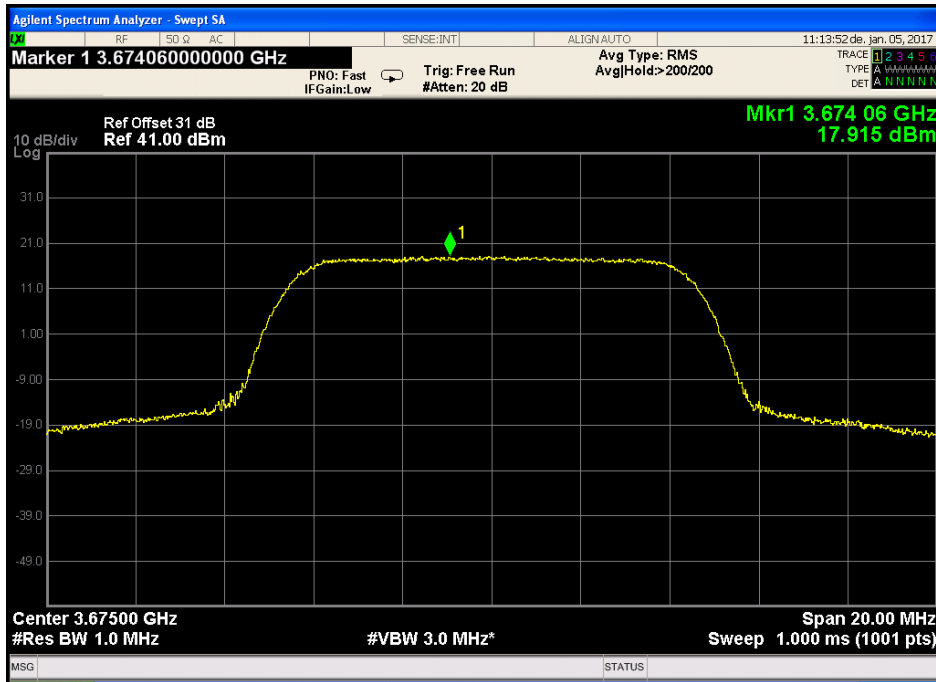


Figure 130. — 3675.0 MHz 64QAM - 10MHz CBW, Low Population

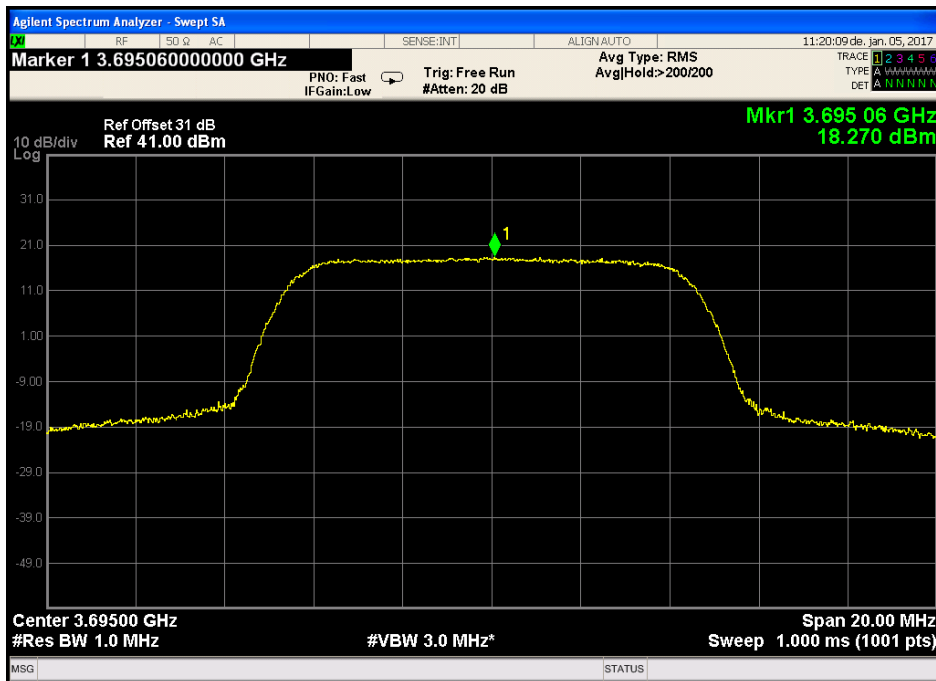


Figure 131. — 3695.0 MHz QPSK - 10MHz CBW, Low Population

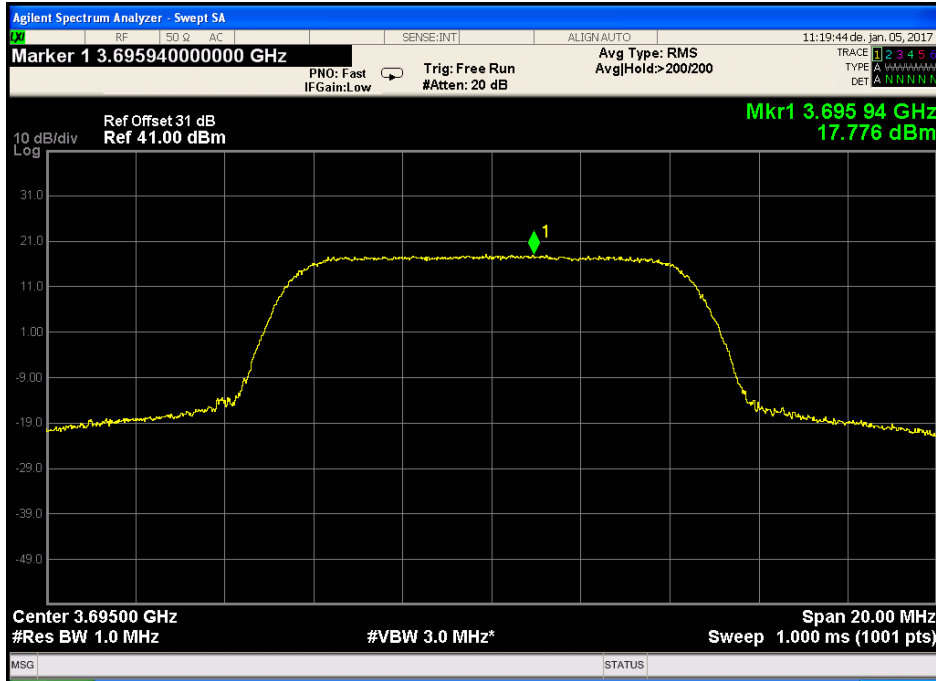


Figure 132. — 3695.0 MHz 16QAM - 10MHz CBW, Low Population

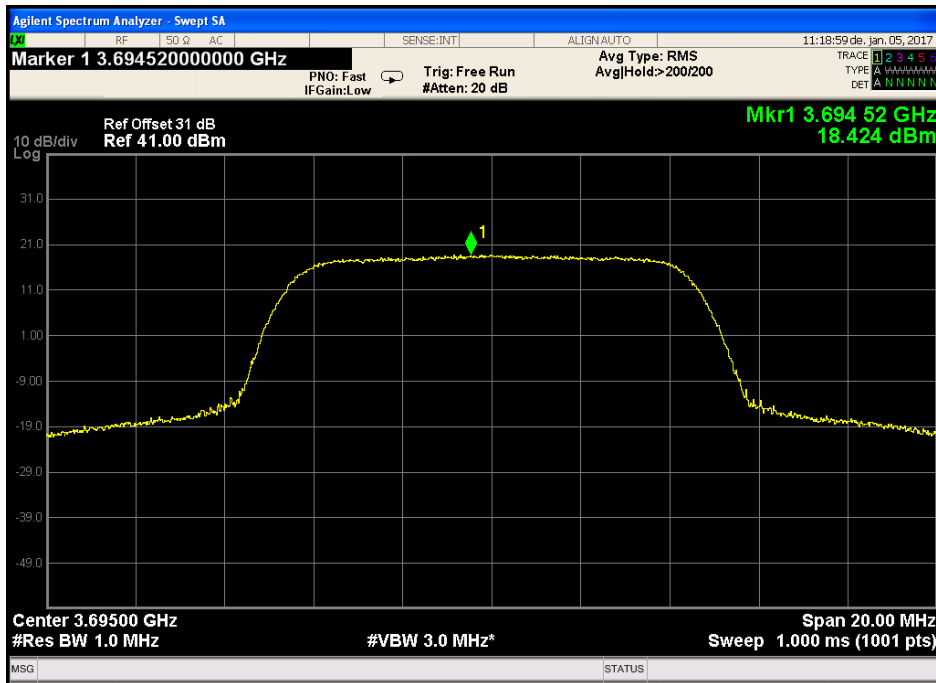


Figure 133. — 3695.0 MHz 64QAM - 10MHz CBW, Low Population

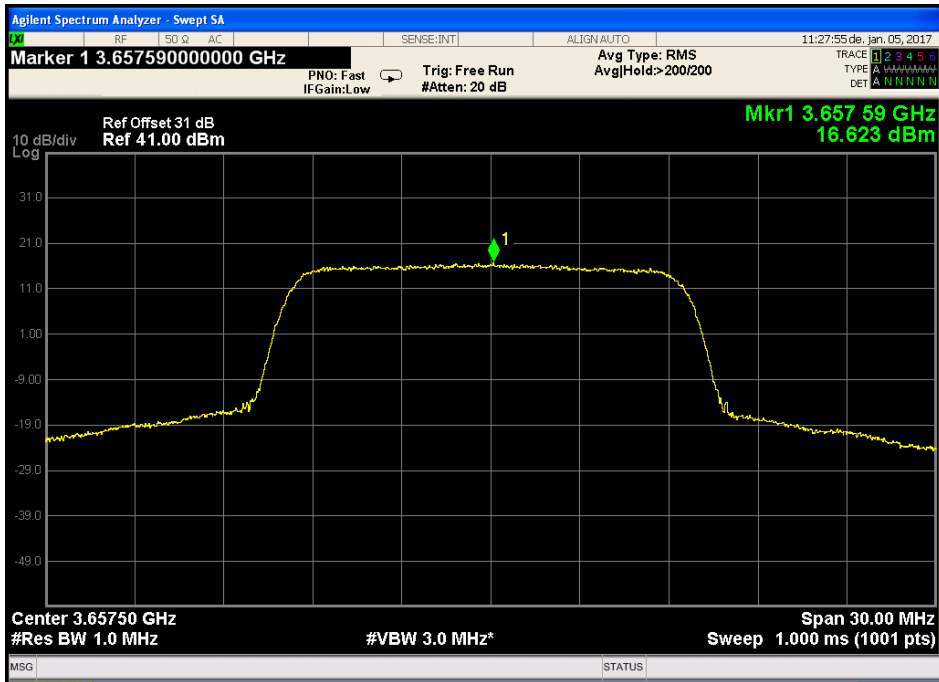


Figure 134. — 3657.5MHz QPSK - 15MHz CBW, Low Population

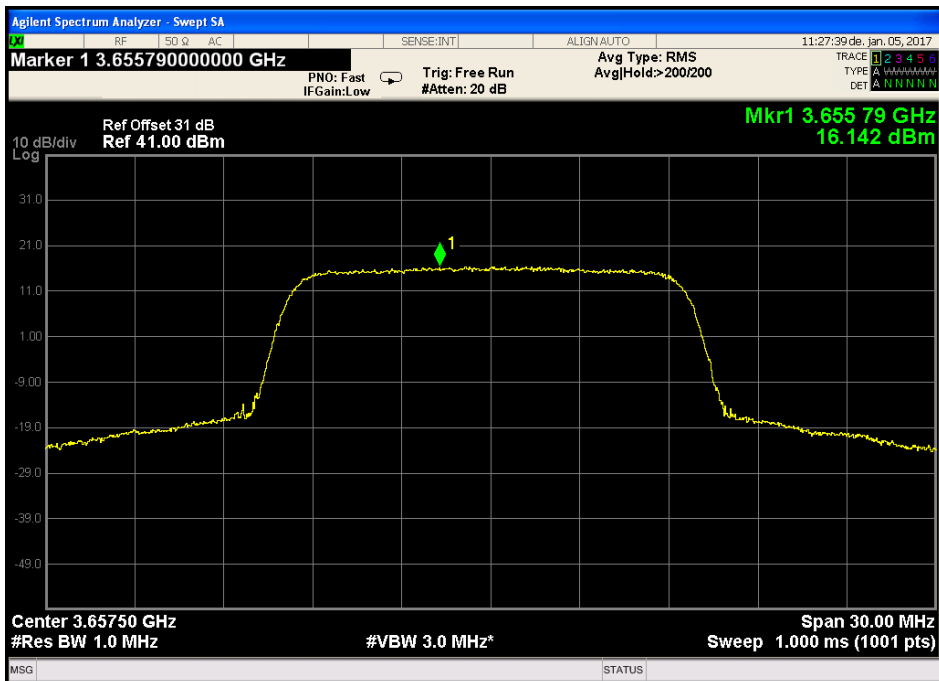


Figure 135. — 3657.5MHz 16QAM - 15MHz CBW, Low Population



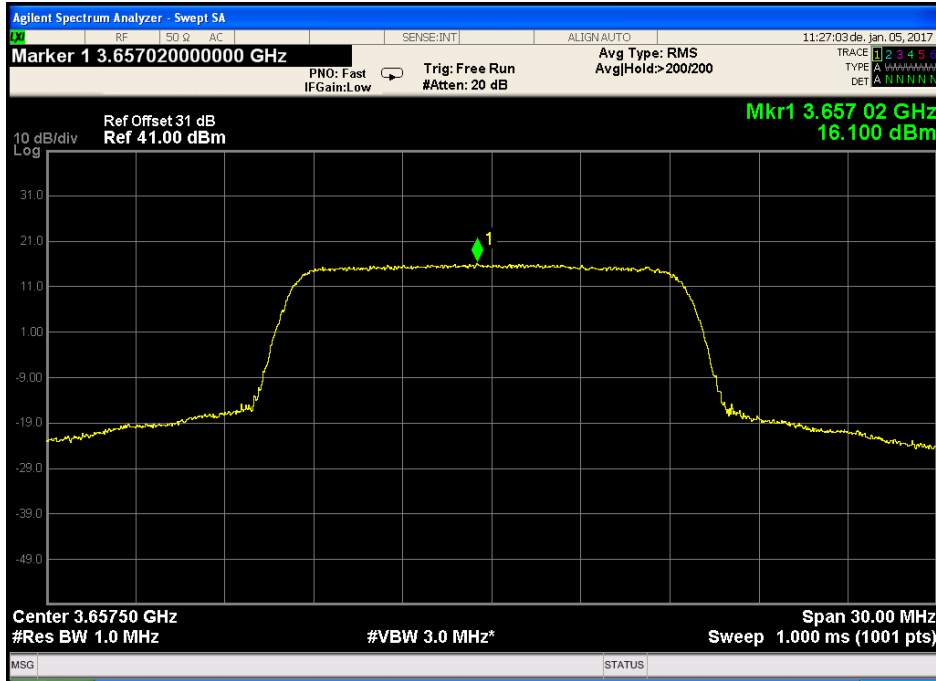


Figure 136. — 3657.5MHz 64QAM - 15MHz CBW, Low Population

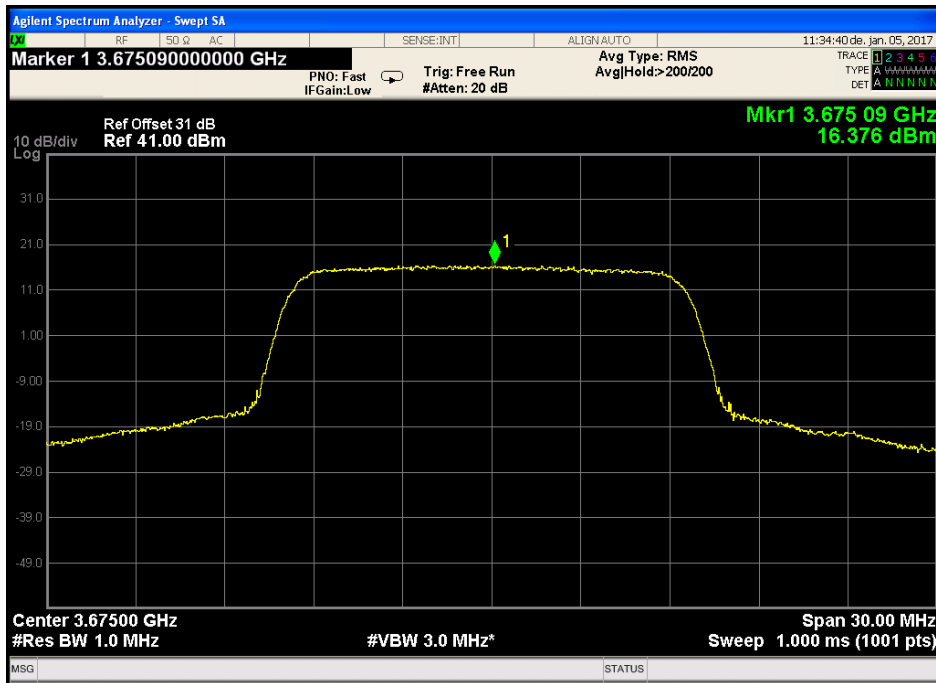


Figure 137. — 3675.0MHz QPSK - 15MHz CBW, Low Population

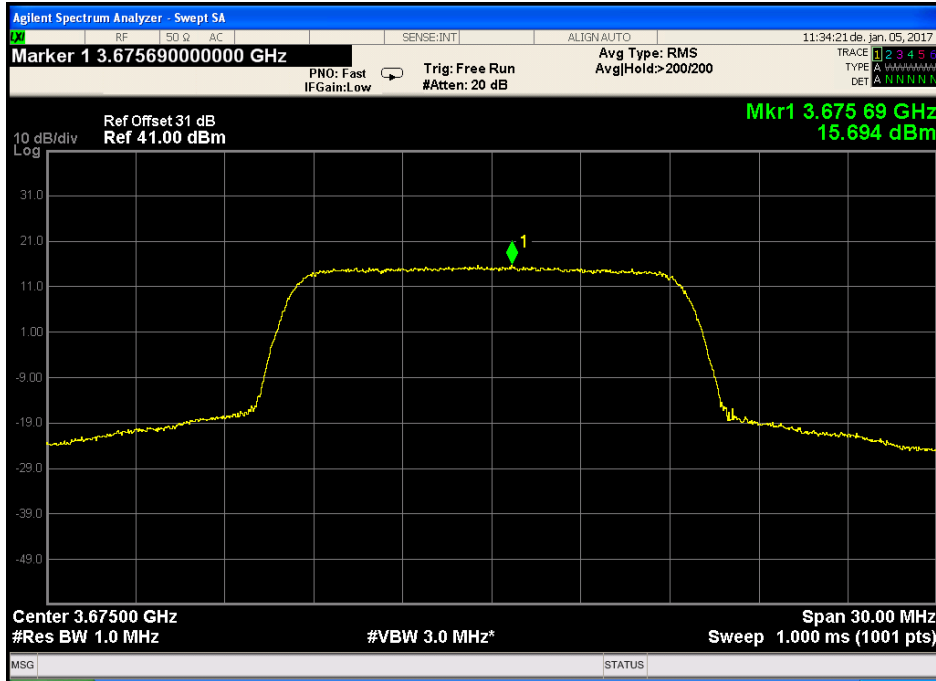


Figure 138. — 3675.0MHz 16QAM - 15MHz CBW, Low Population

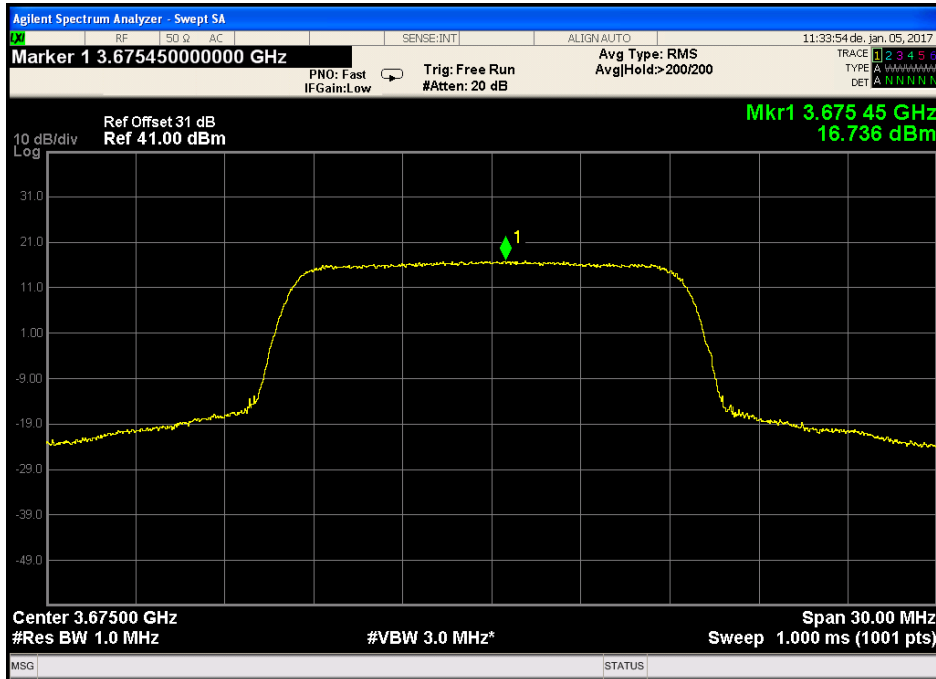


Figure 139. — 3675.0MHz 64QAM - 15MHz CBW, Low Population



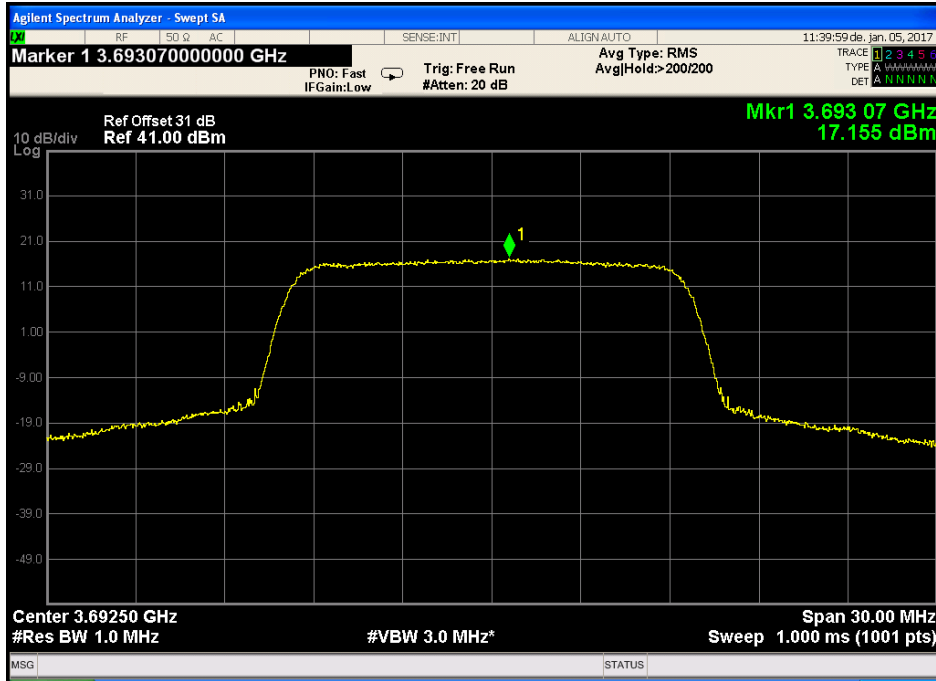


Figure 142. — 3692.5MHz 64QAM - 15MHz CBW, Low Population

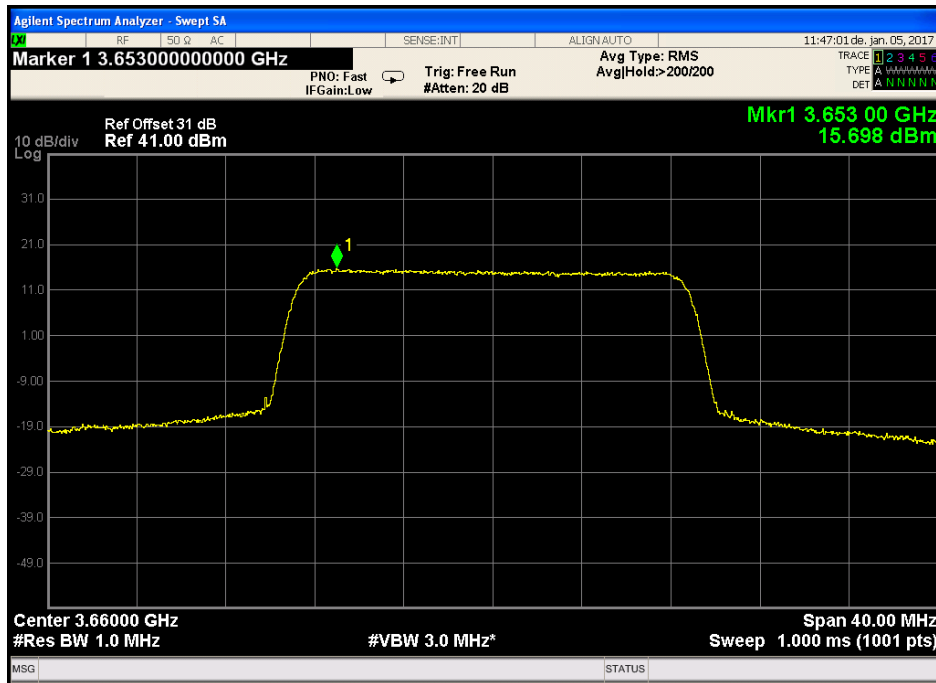


Figure 143. — 3660.0MHz QPSK - 20MHz CBW, Low Population

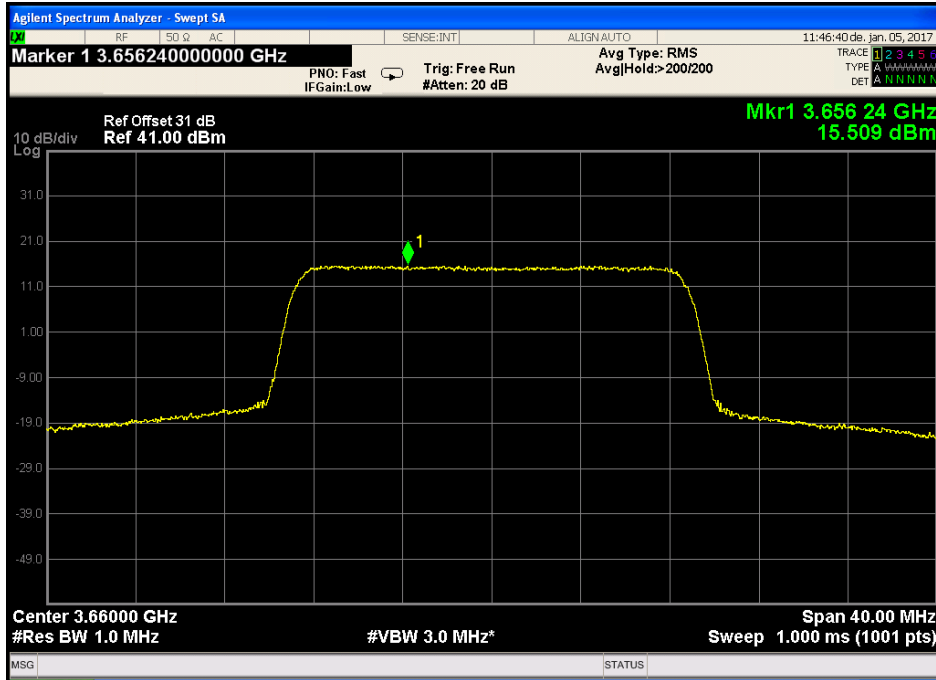


Figure 144. — 3660.0MHz 16QAM - 20MHz CBW, Low Population

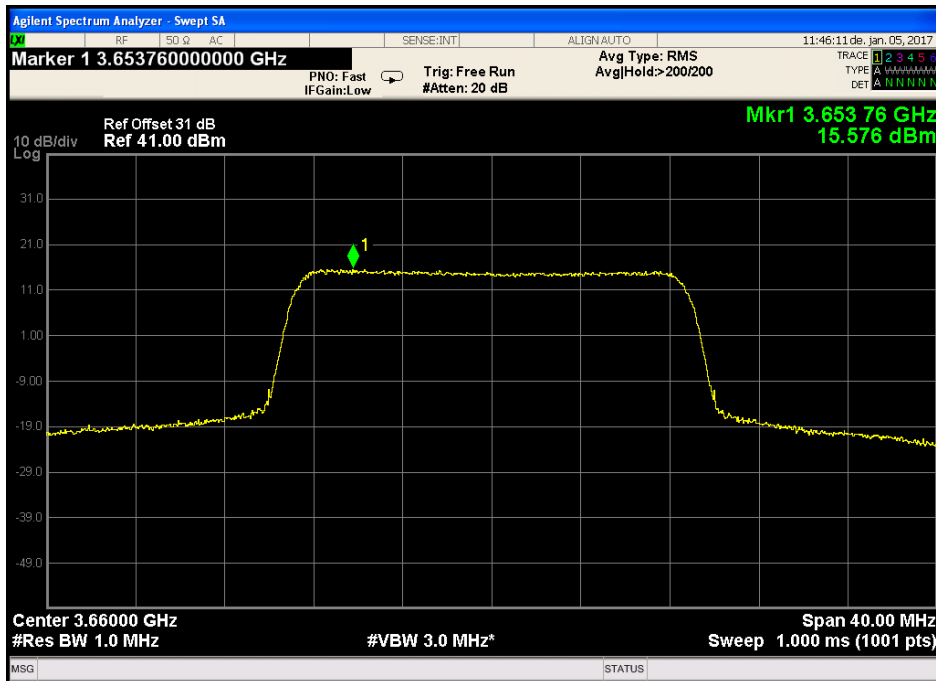


Figure 145. — 3660.0MHz 64QAM - 20MHz CBW, Low Population

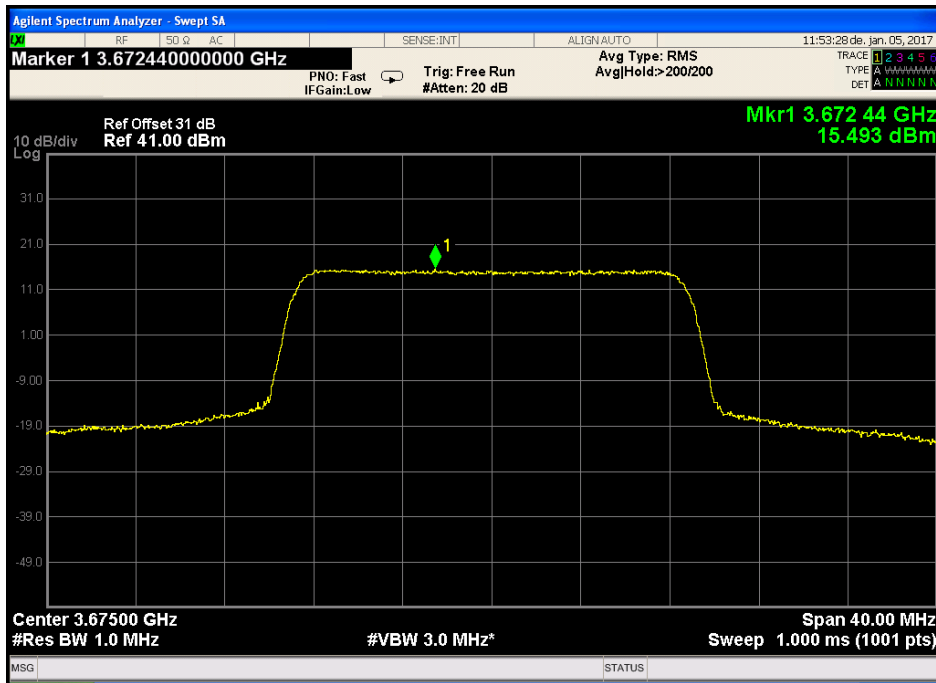


Figure 146. — 3675.0MHz QPSK - 20MHz CBW, Low Population

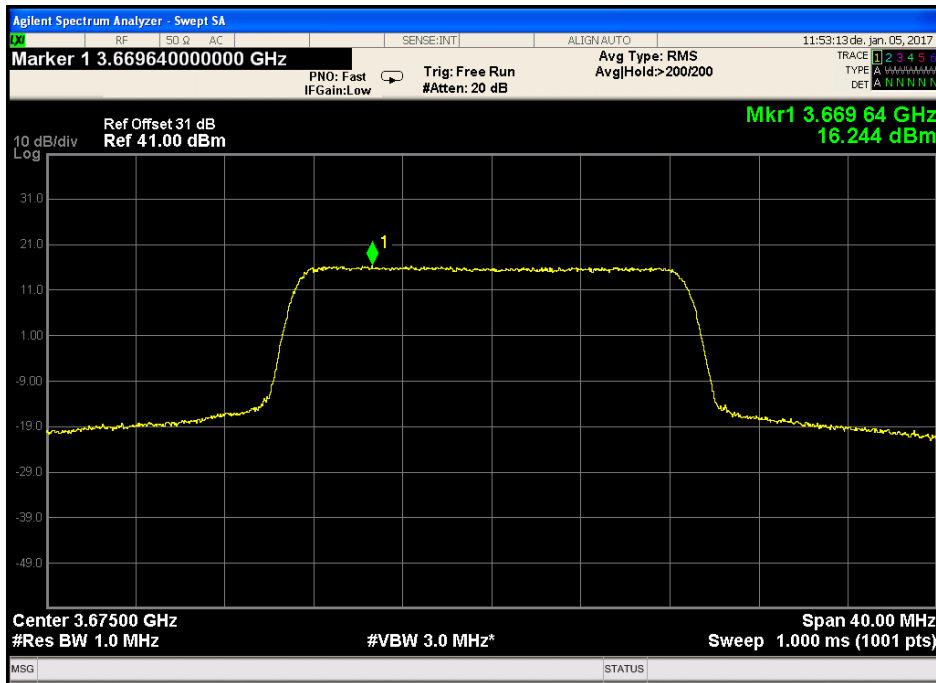


Figure 147. — 3675.0MHz 16QAM - 20MHz CBW, Low Population

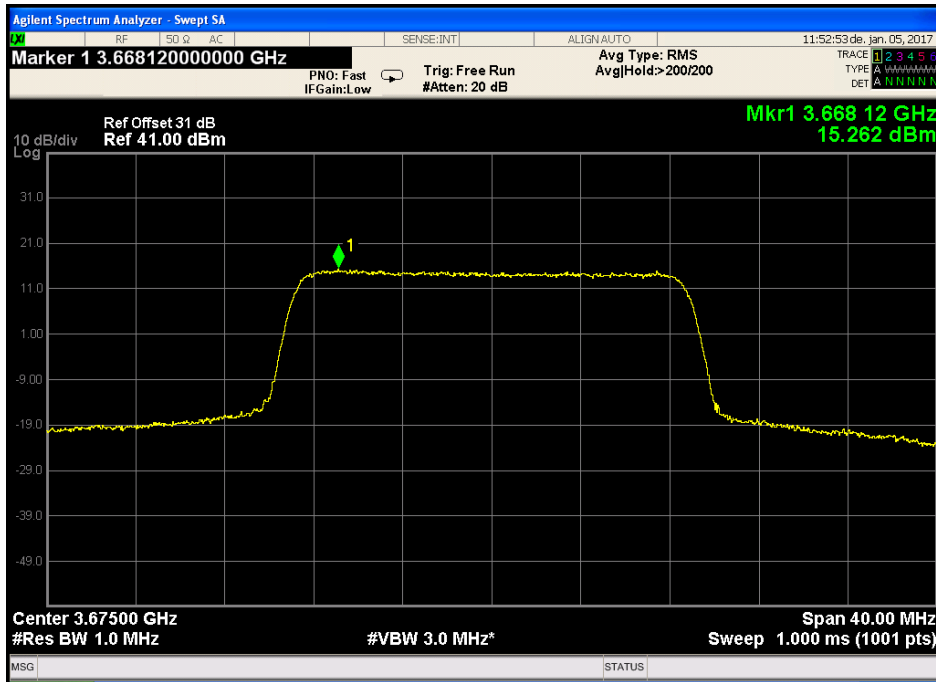


Figure 148. — 3675.0MHz 64QAM - 20MHz CBW, Low Population

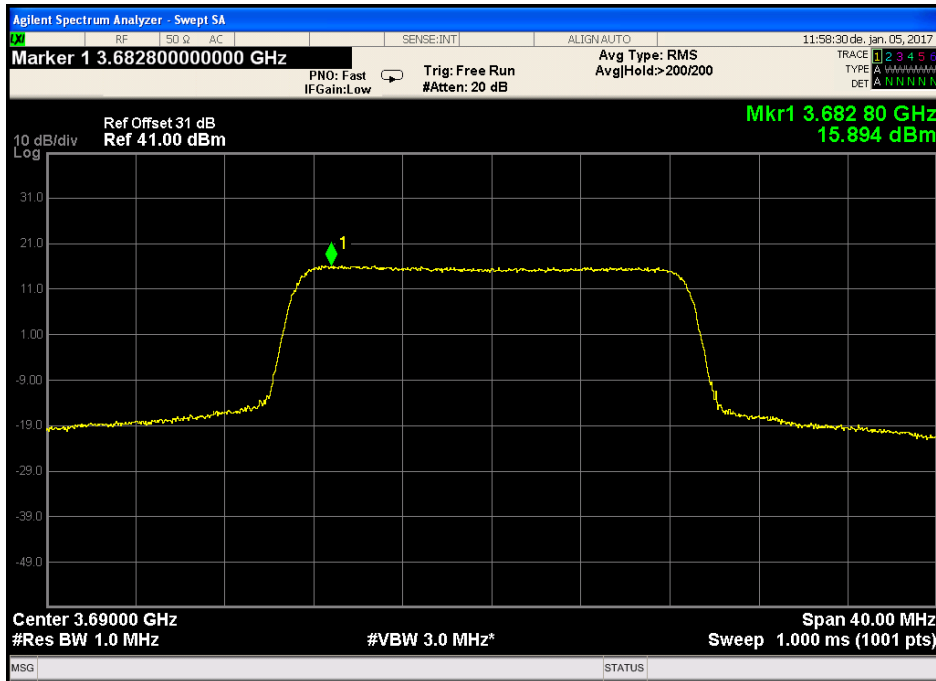


Figure 149. — 3690.0MHz QPSK - 20MHz CBW, Low Population

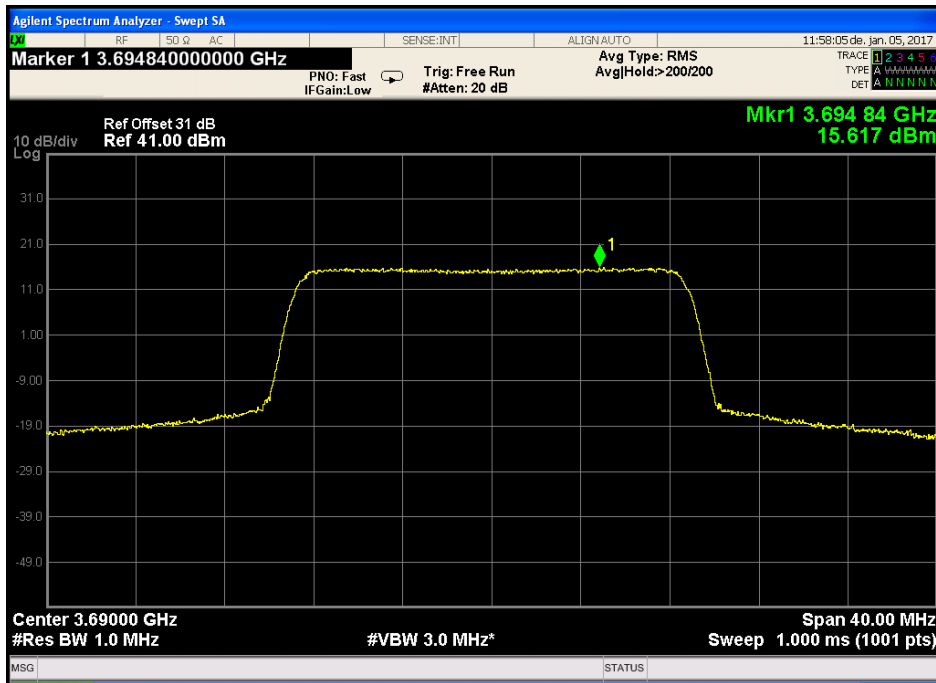


Figure 150. — 3690.0MHz 16QAM - 20MHz CBW, Low Population

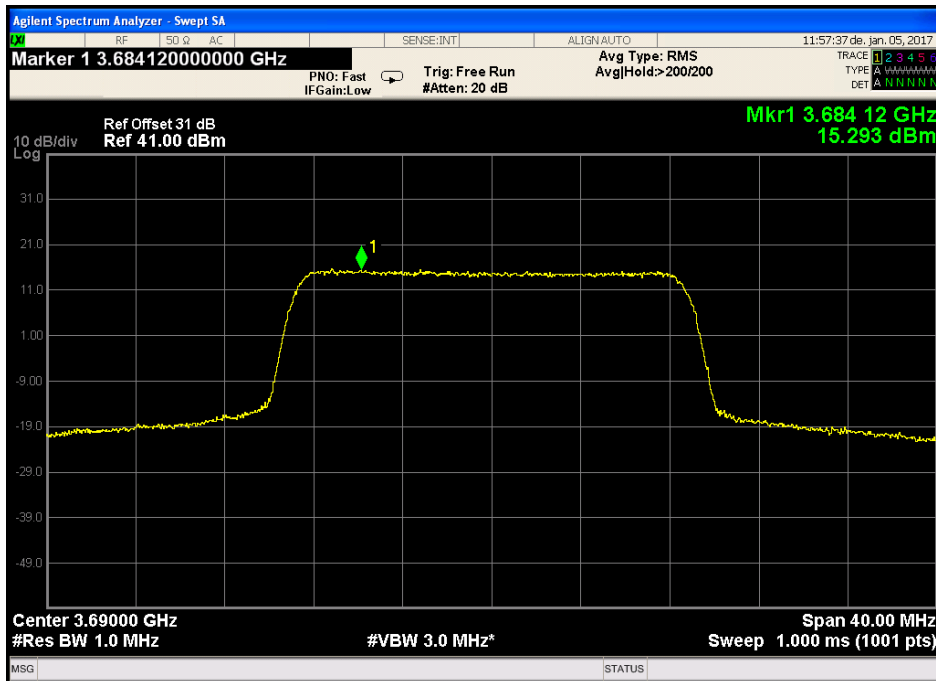


Figure 151. — 3690.0MHz 64QAM - 20MHz CBW, Low Population



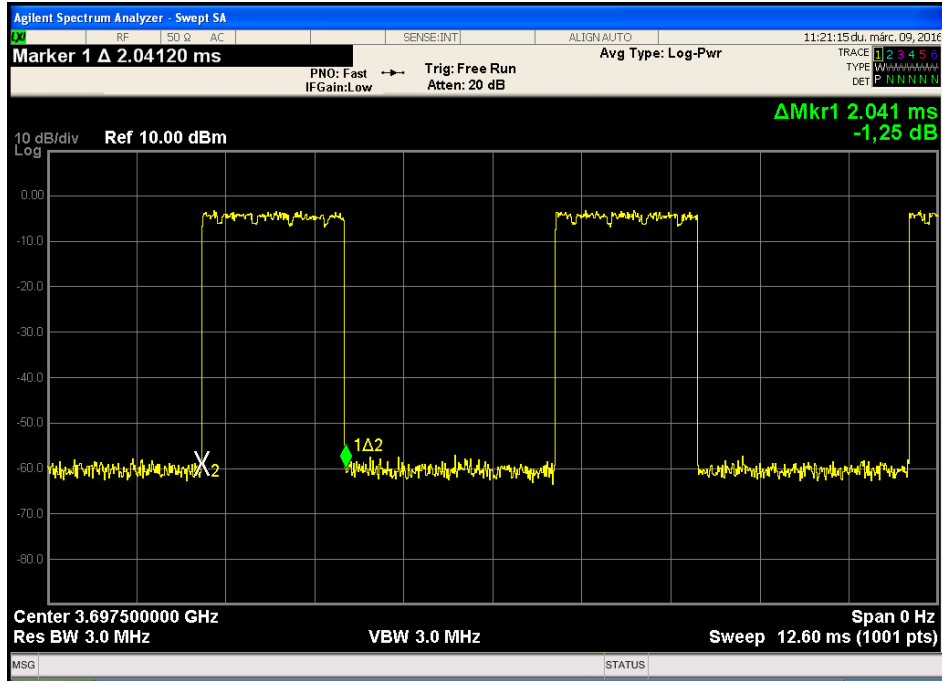


Figure 152. — Time “ON” of Burst

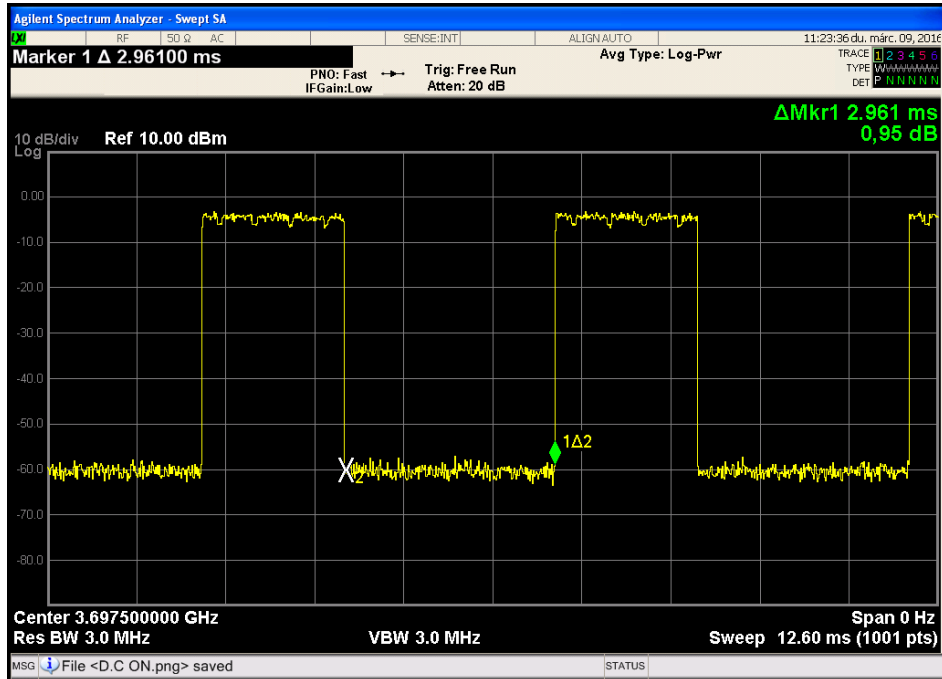


Figure 153. — Time “OFF” of Burst



**6.6 Test Equipment Used; Transmitter Output Power and EIRP**

Instrument	Manufacturer	Model	Serial Number	Calibration	
				Last Calibration	Next Calibration Due
MXA Signal Analyzer	Agilent	N9020A	MY48011785	July 26, 2015	July 26, 2017
DC block	JFW	50DB-007	1-23	N/A	N/A
Splitter	Weinschel 93459	1515	MY007	N/A	N/A
Attenuator	MINI- CIRCUITS	MCL BW S20W2+	0919	N/A	N/A

**Figure 154. Test Equipment Used**