



EMC TEST REPORT for Intentional Radiator

No. 130301610SHA-001

Applicant : OSIM INTERNATIONAL LTD
65 Ubi Avenue 1 OSIM Headquarters, Singapore, 408939,
Singapore

Manufacturer : MAG Digital Limited
Room 918, East Baihou Plaza, 3020 Shennan East Road,
Luohu District, Shenzhen City, China.

Product Name : BT Module for data transfer

Type/Model : iBT-05

SUMMARY

The equipment complies with the requirements according to the following standard(s):

47CFR Part 15 (2010): Radio Frequency Devices

ANSI C63.4 (2003): American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

RSS-210 Issue 8 (December 2010): Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment

RSS-Gen Issue 3 (December 2010): General Requirements and Information for the Certification of Radiocommunication Equipment

Date of issue: April 18, 2013

Prepared by:

Endman Zhao (*Project Engineer*)

Reviewed by:

Daniel Zhao (*Reviewer*)



FCC ID: ARG-OS-838
IC: 10142A-OS838

Description of Test Facility

Name: Intertek Testing Services Ltd. Shanghai ETL Semko
Address: Building No.86, 1198 Qinzhou Road(North), Shanghai 200233, P.R. China

FCC Registration Number: 236597
IC Assigned Code: 2042B-1

Name of contact: Steve Li
Tel: +86 21 64956565 ext. 214
Fax: +86 21 54262335 ext. 214

Content

SUMMARY.....	1
DESCRIPTION OF TEST FACILITY.....	2
1. GENERAL INFORMATION	5
1.1 Applicant Information.....	5
1.2 Identification of the EUT	5
1.3 Technical specification	6
1.4 Mode of operation during the test / Test peripherals used.....	6
2. TEST SPECIFICATION	7
2.1 Instrument list	7
2.2 Test Standard	7
3. 20 dB BANDWIDTH.....	9
3.1 Limit.....	9
3.2 Test Configuration	9
3.3 Test Procedure and test setup.....	9
3.4 Test Protocol	10
4. CARRIER FREQUENCY SEPARATION	12
4.1 Limit.....	12
4.2 Test Configuration	12
4.3 Test Procedure and test setup.....	12
4.4 Test Protocol	13
5. MAXIMUM PEAK OUTPUT POWER	15
5.1 Test limit	15
5.2 Test Configuration	15
5.3 Test procedure and test setup.....	15
5.4 Test protocol	16
6. RADIATED SPURIOUS EMISSIONS.....	18
6.1 Test limit	18
6.2 Test Configuration	18
6.3 Test procedure and test setup.....	19
6.4 Test protocol	20
7. CONDUCTED SPURIOUS EMISSIONS & BAND EDGE	25
7.1 Limit.....	25
7.2 Test Configuration	25
7.3 Test procedure and test setup.....	25
7.4 Test protocol	26
8. POWER LINE CONDUCTED EMISSION	29
8.1 Limit.....	29
8.2 Test configuration	29
8.3 Test procedure and test set up.....	30
8.4 Test protocol	30
9. NUMBER OF HOPPING FREQUENCIES.....	31
9.1 Limit.....	31
9.2 Test Configuration	31
9.3 Test procedure and test setup.....	31
9.4 Test protocol	32



10. DWELL TIME 33

10.1 Limit..... 33

10.2 Test Configuration 33

10.3 Test procedure and test setup 33

10.4 Test protocol 34

11. OCCUPIED BANDWIDTH 41

11.1 Test limit 41

11.2 Test Configuration 41

11.3 Test procedure and test setup 41

11.4 Test protocol 42

12. SPURIOUS EMISSION FOR RECEIVER 44

12.1 Test limit 44

12.2 Test Configuration 44

12.3 Test procedure and test setup 44

12.4 Test protocol 45



FCC ID: ARG-OS-838
IC: 10142A-OS838

1. General Information

1.1 Applicant Information

Applicant:	OSIM INTERNATIONAL LTD 65 Ubi Avenue 1 OSIM Headquarters, Singapore, 408939, Singapore	
Name of contact:	Kenneth Lin	
Tel:	+65 63182786	
Fax:	+65 67415183	
Manufacturer:	MAG Digital Limited Room 918, East Baihou Plaza, 3020 Shennan East Road, Luohu District, Shenzhen City, China.	
Sample received date	:	Dec 4, 2012
Sample Identification No	:	*0121204-31-001*
Date of test	:	Dec 4, 2012 ~ March 23, 2013

1.2 Identification of the EUT

Equipment:	BT Module for data transfer
Type/model:	iBT-05
FCC ID:	ARG-OS-838
IC:	10142A-OS838



1.3 Technical specification

Operation Frequency Band:	2402 – 2480 MHz
Modulation:	GFSK (Frequency Hopping Spread Spectrum)
Antenna Designation:	PCB antenna, un-detachable
Gain of Antenna:	0dBi max used.
Rating:	DC 8V powered by uInfinity App main board
Description of EUT:	Here is one model only. The EUT is a BT Module using Bluetooth technology.
Channel Description:	There are 79 channels in all. The designed channel spacing is 1MHz.

Channel Identifier	Frequency (MHz)
low	2402
middle	2441
high	2480

1.4 Mode of operation during the test / Test peripherals used

This BT module is inside of the particular host for tests. The host is the foundation of massage chair (OS-838 uInfinity) including the main board.

While testing the transmitter mode of the EUT, the internal modulation is applied. Three axes (X, Y, Z) were observed while the test receiver worked as “max hold” continuously and the highest reading among the whole test procedure was recorded.

Test Peripherals:

PC: HP Compaq 6280 Pro Microtower



2. Test Specification

2.1 Instrument list

Equipment	Type	Manu.	Internal no.	Cal. Date	Due date
Test Receiver	ESIB 26	R&S	EC 3045	2012-10-21	2013-10-20
Semi-anechoic chamber	-	Albatross project	EC 3048	2012-5-12	2013-5-11
Bilog Antenna	CBL 6112D	TESEQ	EC 4206	2011-5-16	2013-5-15
Horn antenna	HF 906	R&S	EC 3049	2011-5-13	2013-5-12
Pre-amplifier	Pre-amp 18	R&S	EC 3222	2012-4-10	2014-4-9
Test Receiver	ESCS 30	R&S	EC 2107	2012-10-21	2013-10-20
A.M.N.	ESH2-Z5	R&S	EC 3119	2012-1-9	2013-1-8
A.M.N.	ESH3-Z5	R&S	EC 2109	2012-1-10	2013-1-9
High Pass Filter	WHKX 1.0/15G-10SS	Wainwright	EC4297-1	2013-1-9	2014-1-8
High Pass Filter	WHKX 2.8/18G-12SS	Wainwright	EC4297-2	2013-1-9	2014-1-8
High Pass Filter	WHKX 7.0/1.8G-8SS	Wainwright	EC4297-3	2013-1-9	2014-1-8
Band Reject Filter	WRCGV 2400/2483- 2390/2493- 35/10SS	Wainwright	EC4297-4	2013-1-9	2014-1-8
Test Receiver	FSV40	R&S	/	2012-10-21	2013-10-20
Preamplifier	AP-025C	Quietek	QT-AP003	2012-11-25	2013-11-24
Preamplifier	AP-180C	Quietek	CHM- 0602013	2012-11-25	2013-11-24
Broad-Band Horn Antenna	BBHA9120D	Schwarzbeck	496	2012-11-25	2013-11-24
Broad-Band Horn Antenna	BBHA9170	Schwarzbeck	294	2012-11-25	2013-11-24

2.2 Test Standard

47CFR Part 15 (2010)
ANSI C63.4: 2003
RSS-210 Issue 8 (December 2010)
RSS-Gen Issue 3 (December 2010)

2.3 Test Summary

This report applies to tested sample only. This report shall not be reproduced in part without written approval of Intertek Testing Service Shanghai Limited.

TEST ITEM	FCC REFERENCE	IC REFERENCE	RESULT
20 dB Bandwidth	15.247(a)(1)	RSS-210 Issue 8 Annex 8	Tested
Carrier Frequency Separation	15.247(a)(1)	RSS-210 Issue 8 Annex 8	Pass
Output power	15.247(b)(1)	RSS-210 Issue 8 Annex 8	Pass
Radiated Spurious Emissions	15.205 & 15.209	RSS-210 Issue 8 Clause 2	Pass
Conducted Spurious Emissions & Band Edge	15.247(d)	RSS-210 Issue 8 Annex 8	Pass
Power line conducted emission	15.207	RSS-Gen Issue 3 Clause 7.2.4	Pass
Number of Hopping Frequencies	15.247(a)(1)(iii)	RSS-210 Issue 8 Annex 8	Pass
Dwell time	15.247(a)(1)(iii)	RSS-210 Issue 8 Annex 8	Pass
Occupied bandwidth	-	RSS-Gen Issue 3 Clause 4.6.1	Tested
Spurious emission for receiver	15B	RSS-310 Issue 3 Clause 3.1	NA

Note: "NA" means "not applied".

3. 20 dB Bandwidth


Test result: **Tested**

3.1 Limit

☒ Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

☐ Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

3.2 Test Configuration

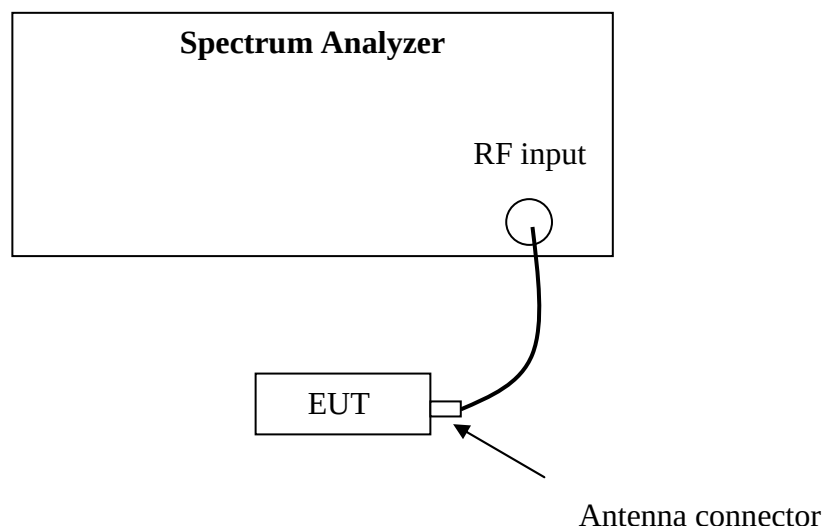

3.3 Test Procedure and test setup

The 20 bandwidth per FCC § 15.247(a)(1) is measured using the Spectrum Analyzer with Span = 2 to 3 times the 20 dB bandwidth, $RBW \geq 1\%$ of the 20 dB bandwidth, $VBW \geq RBW$, Sweep = auto, Detector = peak, Trace = max hold.

The test was performed at 3 channels (lowest, middle and highest channel).

The EUT was tested according to DA 00-705 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems)

Temperature : 22°C
Relative Humidity : 55 %

CH	Bandwidth (kHz)
L	892.79
M	876.55
H	854.91



Channel M



Channel H



4. Carrier Frequency Separation


Test result: Pass

4.1 Limit

☒ Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

☐ Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

4.2 Test Configuration

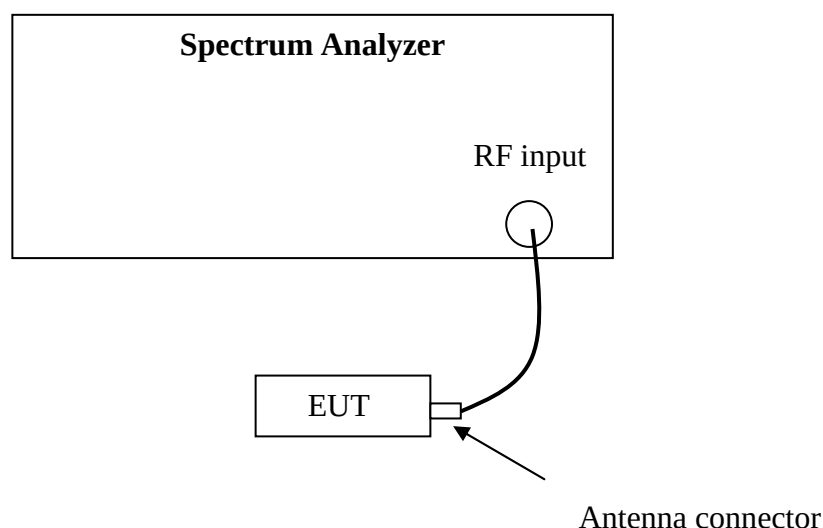

4.3 Test Procedure and test setup

The Carrier Frequency Separation per FCC § 15.247(a)(1) is measured using the Spectrum Analyzer with Span can capture two adjacent channels, $RBW \geq 1\%$ of the span, $VBW \geq RBW$, Sweep = auto, Detector = peak, Trace = max hold.

The test was performed at 3 channels (lowest, middle and highest channel).

The EUT was tested according to DA 00-705 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems)

4.4 Test Protocol


Temperature : 22°C
Relative Humidity : 55 %

CH	Frequency Separation (kHz)	Limit (kHz)
L	1016.03	≥ 892.79
M	1004.01	≥ 892.79
H	1022.04	≥ 892.79

Channel L



Channel M

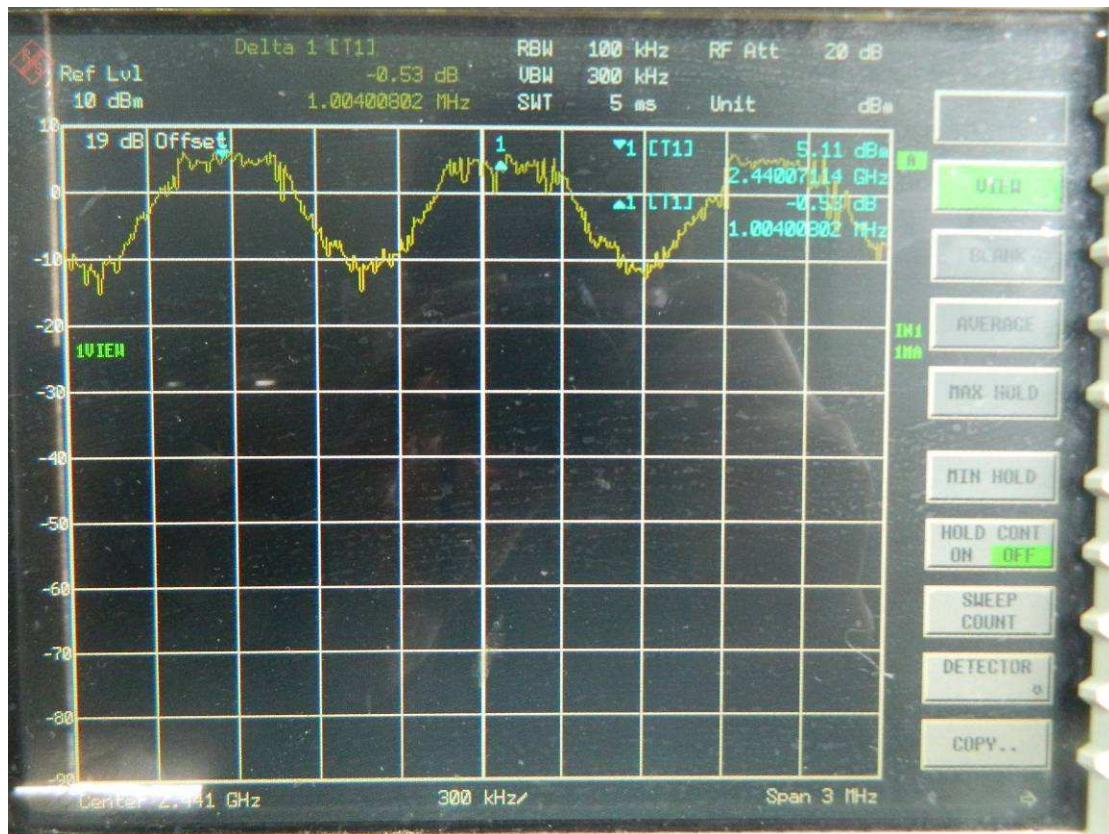

Channel H



5. Maximum peak output power

Test result: Pass


5.1 Test limit

☒ For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt

☐ For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts
If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

☐ For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.

5.2 Test Configuration

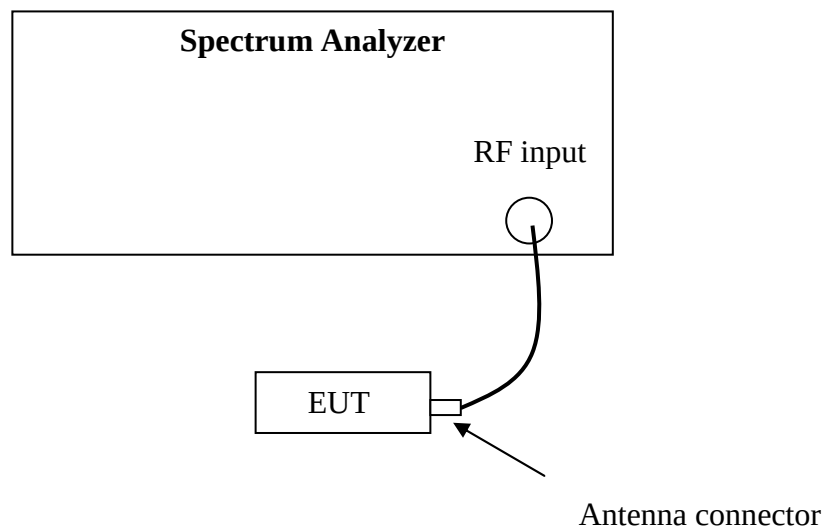

5.3 Test procedure and test setup

The power output per FCC § 15.247(b) is measured using the Spectrum Analyzer with Span = 5 times the 20 dB bandwidth, RBW $\geq$ the 20 dB bandwidth, VBW $\geq$ RBW, Sweep = auto, Detector = peak, Trace = max hold.

The test was performed at 3 channels (lowest, middle and highest channel).

The EUT was tested according to DA 00-705 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems)


5.4 Test protocol

Temperature : 22 °C
Relative Humidity : 55 %


CH	Cable loss (dB)	Corrected reading (dBm)	Limit (dBm)
L	1.50	5.47	≤30
M	1.50	6.16	≤30
H	1.50	6.41	≤30

Conclusion: The maximum EIRP = 6.41 + 0.00 = 6.41dBm = 4.38mW which is lower than the limit of 4W listed in RSS-210.


Channel L

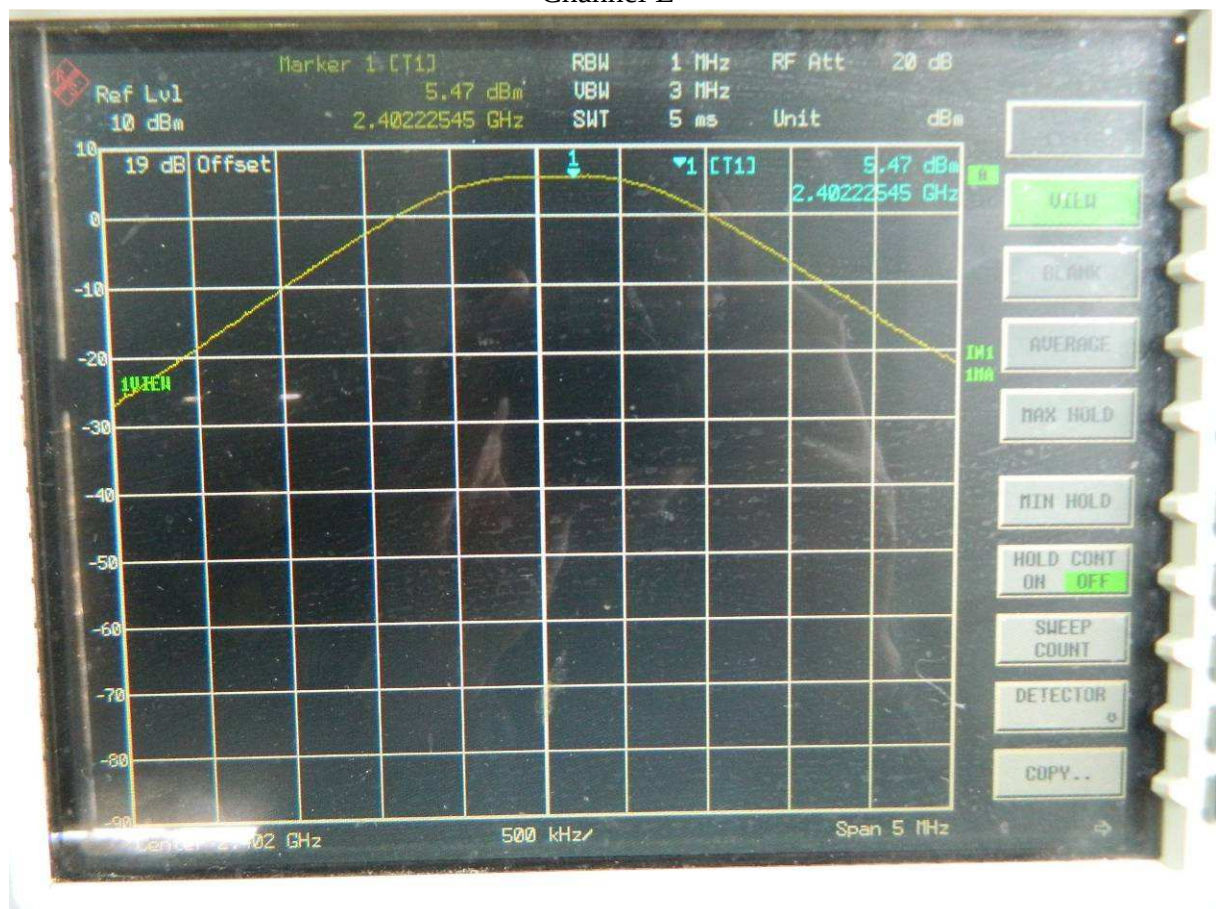

Channel M

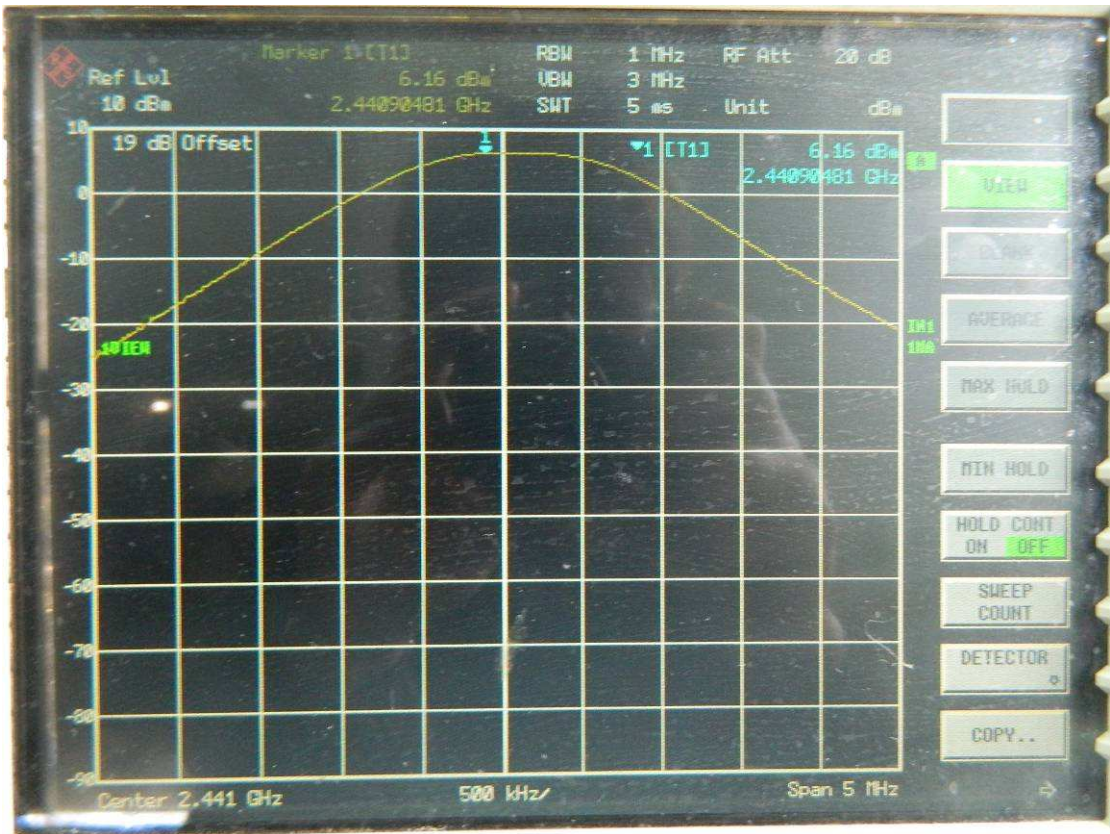

Channel H

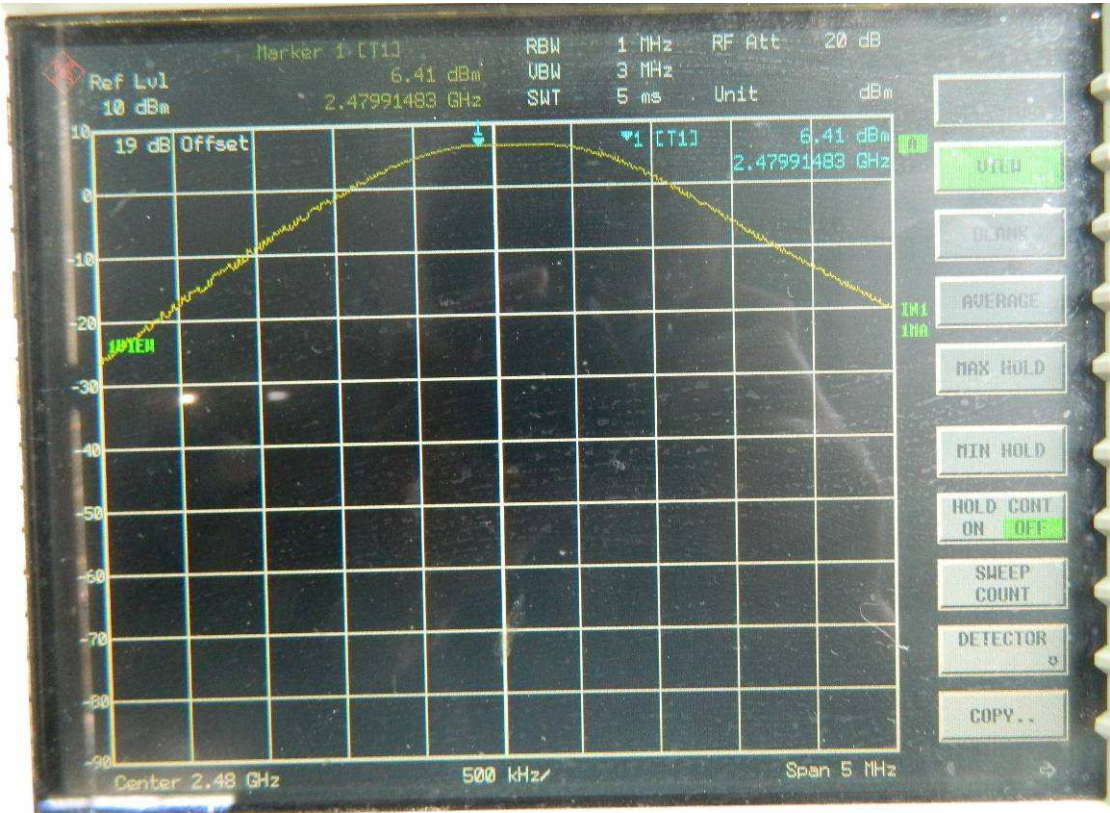

6. Radiated Spurious Emissions


Test result: **PASS**

6.1 Test limit

The radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) showed as below:

Frequency (MHz)	Field Strength (dBuV/m)	Measurement Distance (m)
30 - 88	40.0	3
88 - 216	43.5	3
216 - 960	46.0	3
Above 960	54.0	3

6.2 Test Configuration

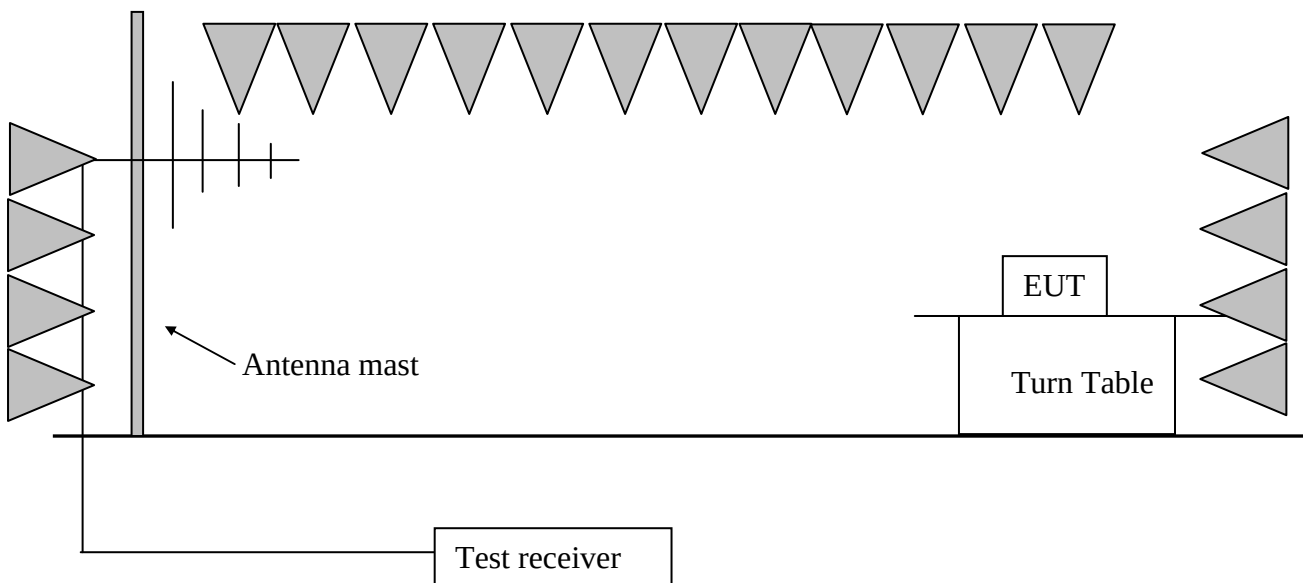

6.3 Test procedure and test setup

The measurement was applied in a semi-anechoic chamber. While testing for spurious emission higher than 1GHz, if applied, the pre-amplifier would be equipped just at the output terminal of the antenna.

The EUT and simulators were placed on a 0.8m high wooden turntable above the horizontal metal ground plane. The turn table rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on an antenna mast. The antenna moved up and down between from 1meter to 4 meters to find out the maximum emission level.

The radiated emission was measured using the Spectrum Analyzer with the resolutions bandwidth set as:

RBW = 100kHz, VBW = 300kHz (30MHz~1GHz)

RBW = 1MHz, VBW = 3MHz (>1GHz for PK);

RBW = 1MHz, VBW = 10Hz (>1GHz for AV);

If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a “duty cycle correction factor”.

6.4 Test protocol

CH	Antenna	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	V	2401.80	34.10	102.40	Fundamental	/	PK
	H	171.90	12.80	37.70	43.50	5.80	PK
	H	271.04	14.10	39.90	46.00	6.10	PK
	H	696.75	22.20	39.90	46.00	6.10	PK
	V	2385.35	-8.00	50.70	54.00	3.30	PK
	V	4804.32	-0.80	58.60	74.00	15.40	PK
	V	4804.16	-0.80	34.10	54.00	19.90	AV
	H	9609.95	11.60	53.30	74.00	20.70	PK
	H	9609.42	11.60	30.50	54.00	23.50	AV
	V	12010.39	11.70	48.10	54.00	5.90	PK
M	V	2440.29	34.30	102.10	Fundamental	/	PK
	H	171.90	12.80	37.70	43.50	5.80	PK
	H	271.04	14.10	39.90	46.00	6.10	PK
	H	696.75	22.20	39.90	46.00	6.10	PK
	V	4881.55	-0.50	55.30	74.00	18.70	PK
	V	4881.55	-0.50	33.40	54.00	20.60	AV
	H	9765.82	11.60	50.10	54.00	3.90	PK
	V	12205.93	11.70	48.20	54.00	5.80	PK
H	H	2479.92	34.50	101.60	Fundamental	/	PK
	H	171.90	12.80	37.70	43.50	5.80	PK
	H	271.04	14.10	39.90	46.00	6.10	PK
	H	696.75	22.20	39.90	46.00	6.10	PK
	V	2483.50	-8.00	51.90	54.00	2.10	PK
	V	4959.41	-0.20	53.10	74.00	20.90	PK
	V	4959.77	-0.20	33.20	54.00	20.80	AV
	H	9920.30	11.90	45.80	54.00	8.20	PK
	V	12401.07	11.70	48.10	54.00	5.90	PK

Remark: 1. For fundamental emission, no amplifier is employed.

2. Correct Factor = Antenna Factor + Cable Loss (-Amplifier, is employed)

3. Corrected Reading = Original Receiver Reading + Correct Factor

4. Margin = limit – Corrected Reading

5. If the PK reading is lower than AV limit, the AV test can be elided.

6. The emission was conducted from 30MHz to 25GHz.



Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,


Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10dBuV.

Then Correct Factor = $30.20 + 2.00 - 32.00 = 0.20\text{dB/m}$; Corrected Reading = $10\text{dBuV} + 0.20\text{dB/m} = 10.20\text{dBuV/m}$


Assuming limit = 54dBuV/m, Corrected Reading = 10.20dBuV/m, then Margin = $54 - 10.20 = 43.80\text{dBuV/m}$



Horizontal

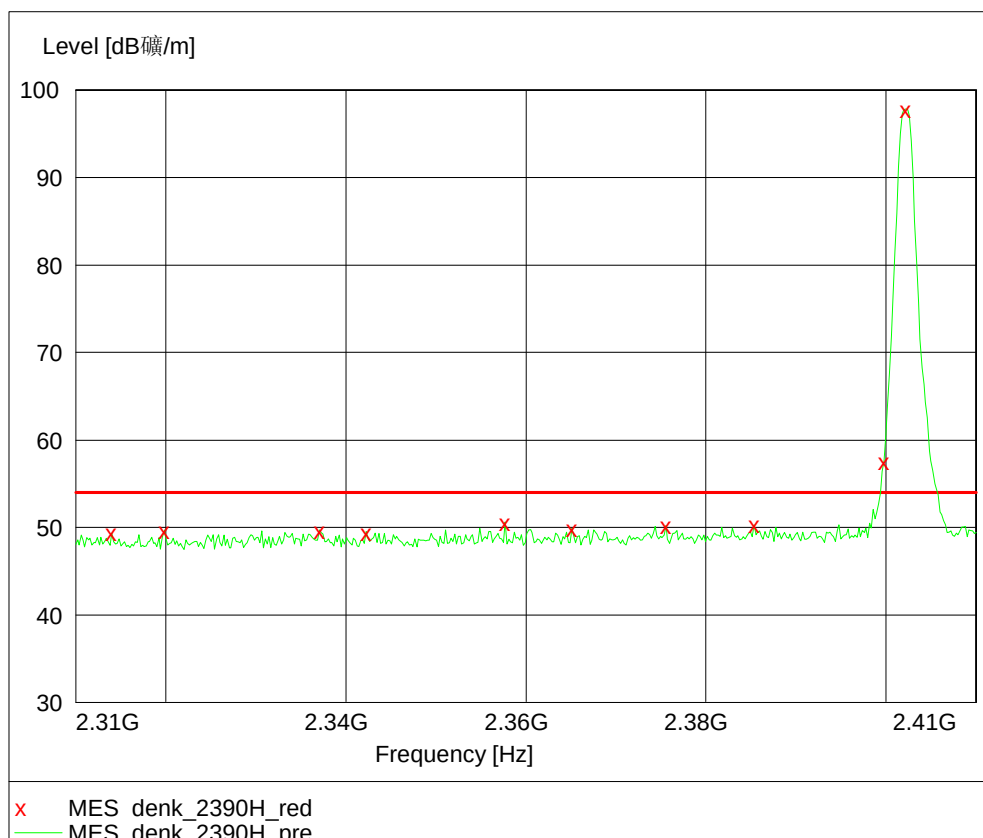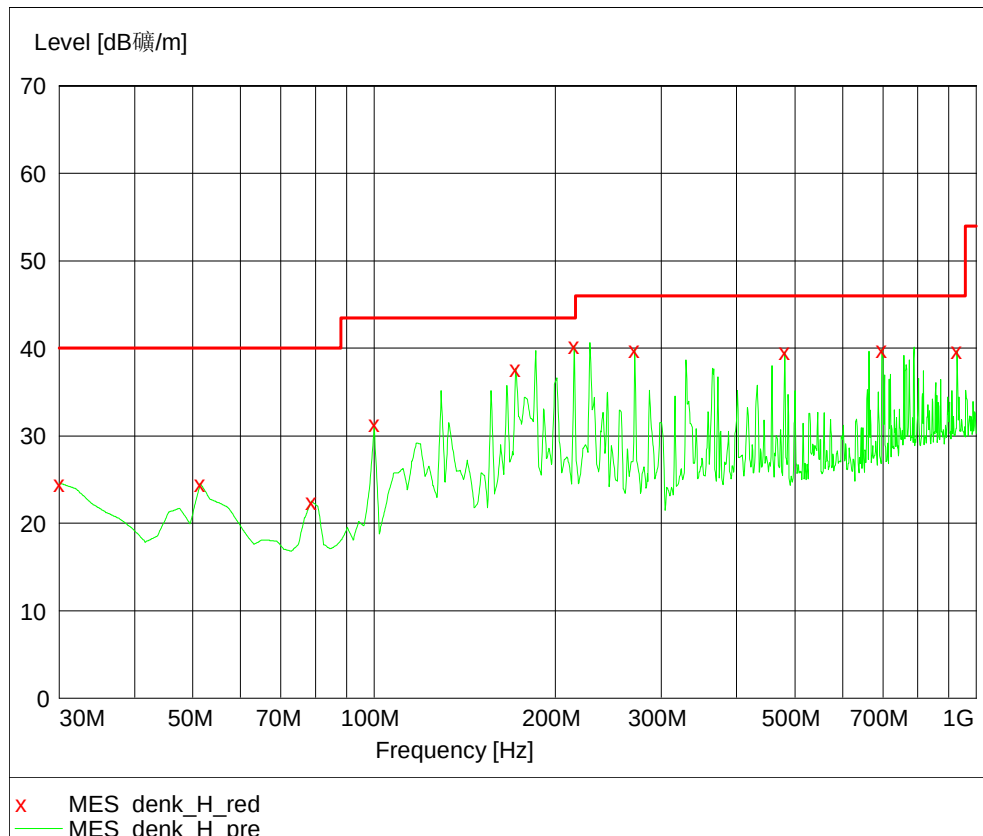

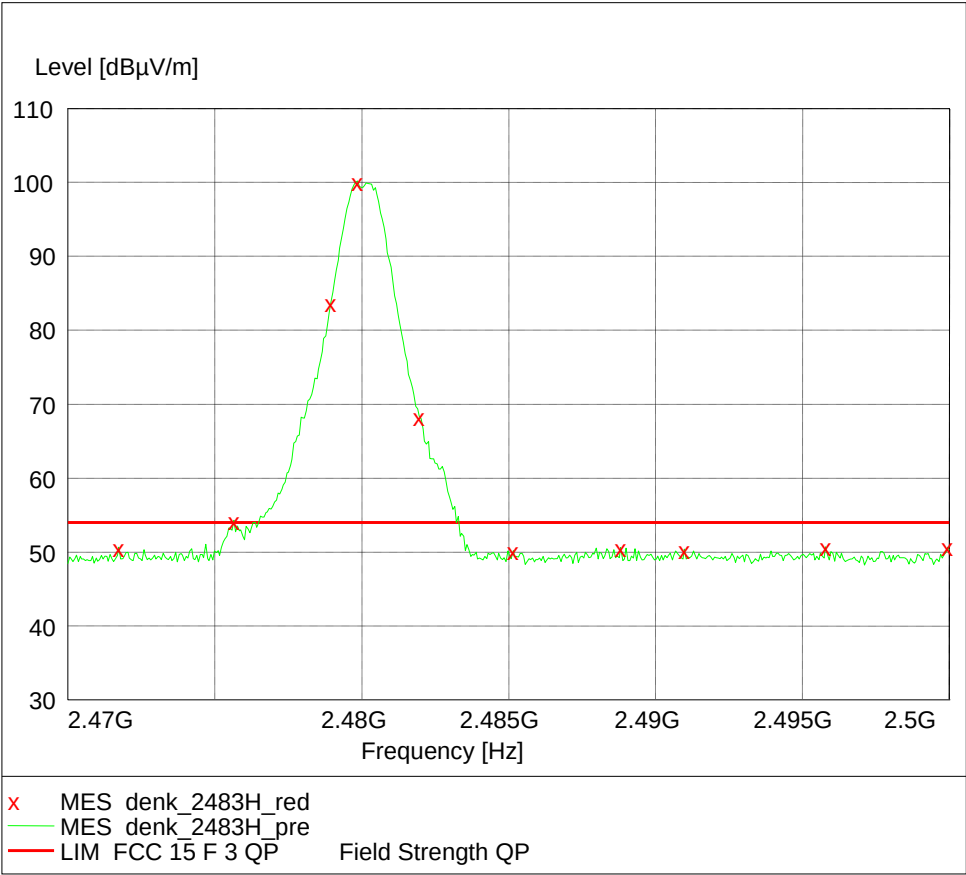

Vertical

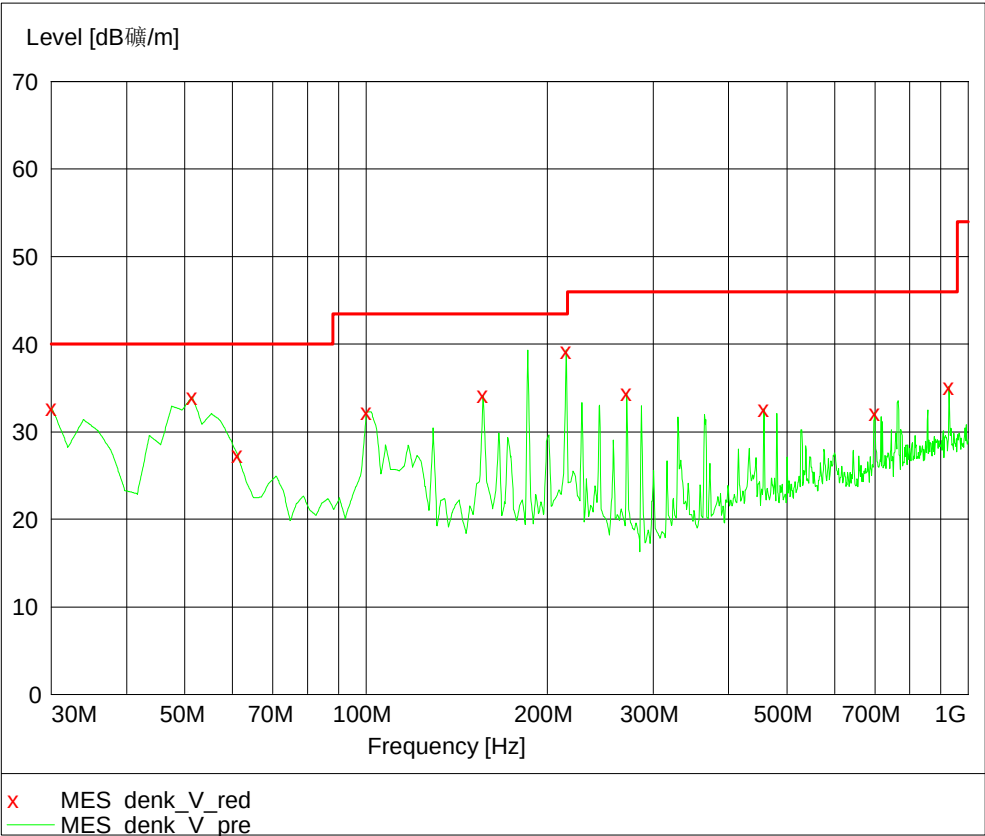

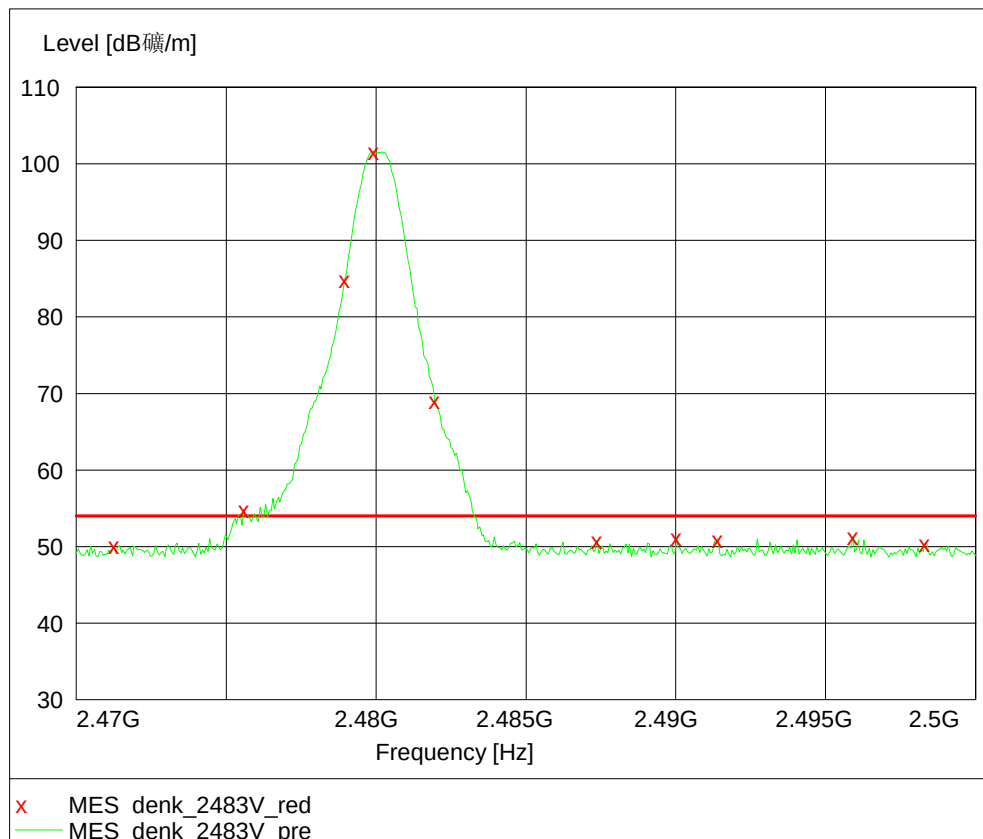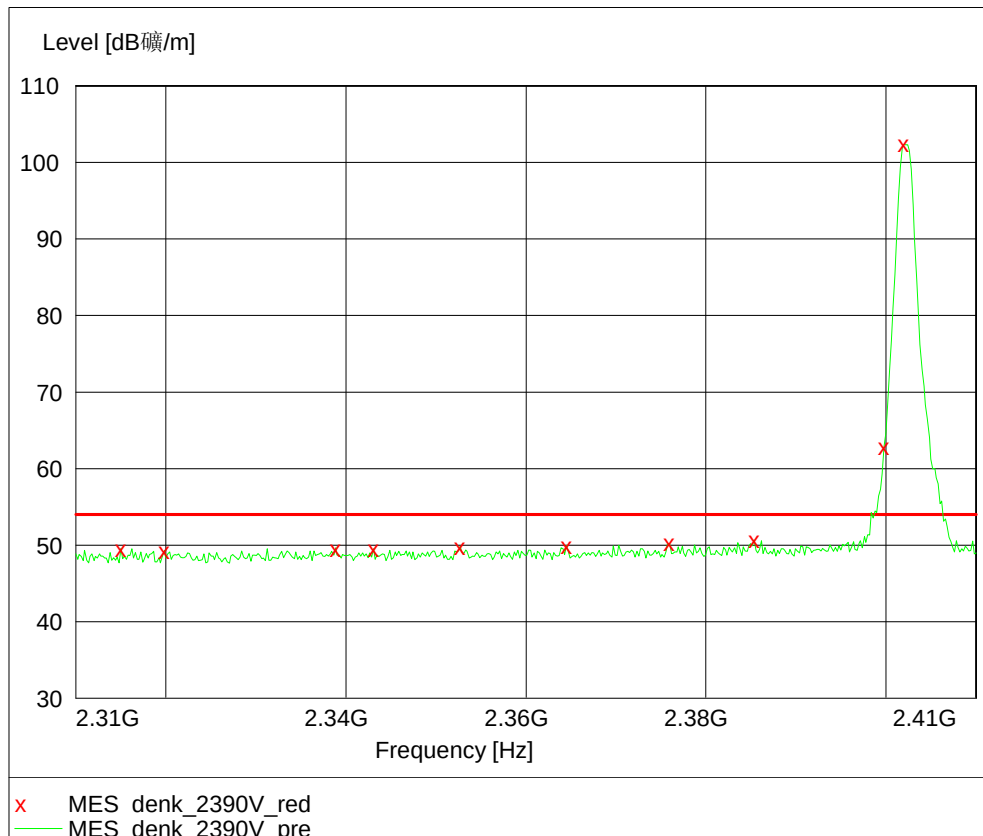


7. Conducted Spurious Emissions & Band Edge

Test result: PASS

7.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

7.2 Test Configuration

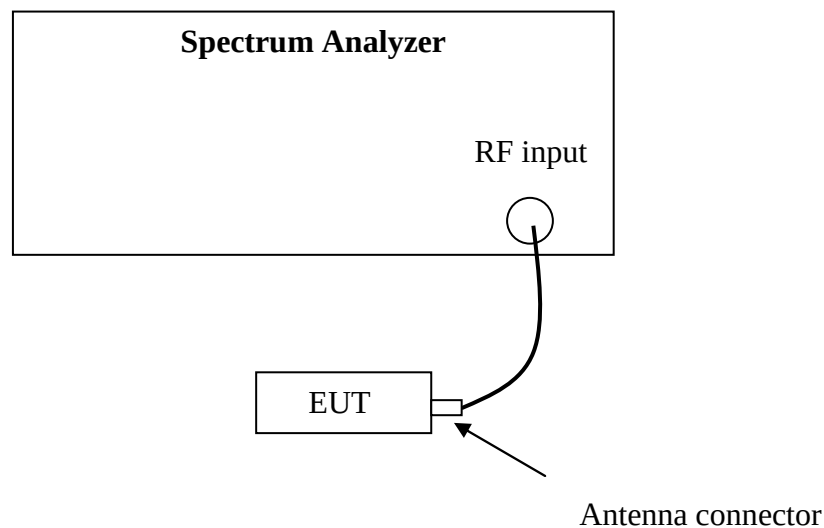

7.3 Test procedure and test setup

The Conducted Spurious Emissions per FCC § 15.247(d) is measured using the Spectrum Analyzer with Span wide enough capturing all spurious from the lowest emission frequency of the EUT up to 10th harmonics, RBW = 100kHz, VBW $\geq$ RBW, Sweep = auto, Detector = peak, Trace = max hold.

The test was performed at 3 channels (lowest, middle and highest channel).


The EUT was tested according to DA 00-705 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems)


7.4 Test protocol

CH	Max reading among band (dBm)	The most restrict Attenuation outside band (dB)	Limit (dB)
L	5.19	38.58	≥20
M	5.14	33.04	
H	6.15	31.95	


Please refer to the “test data” for band edge emission.

Channel L


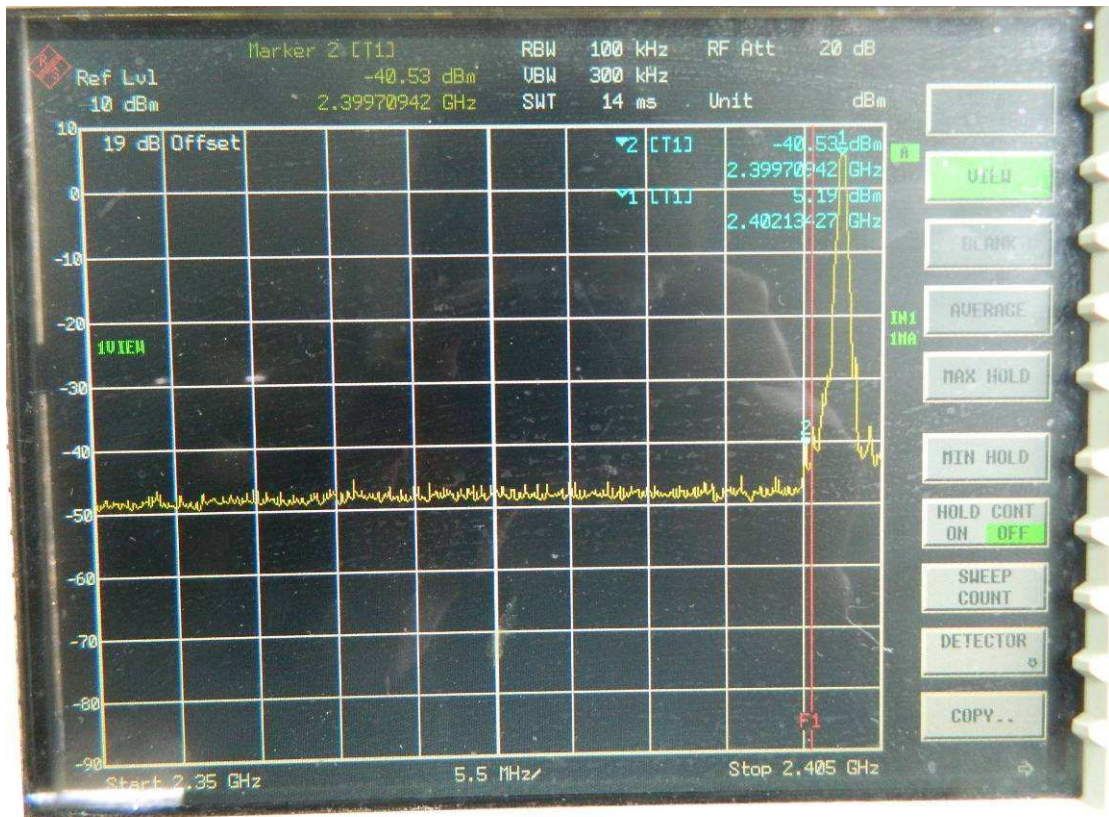


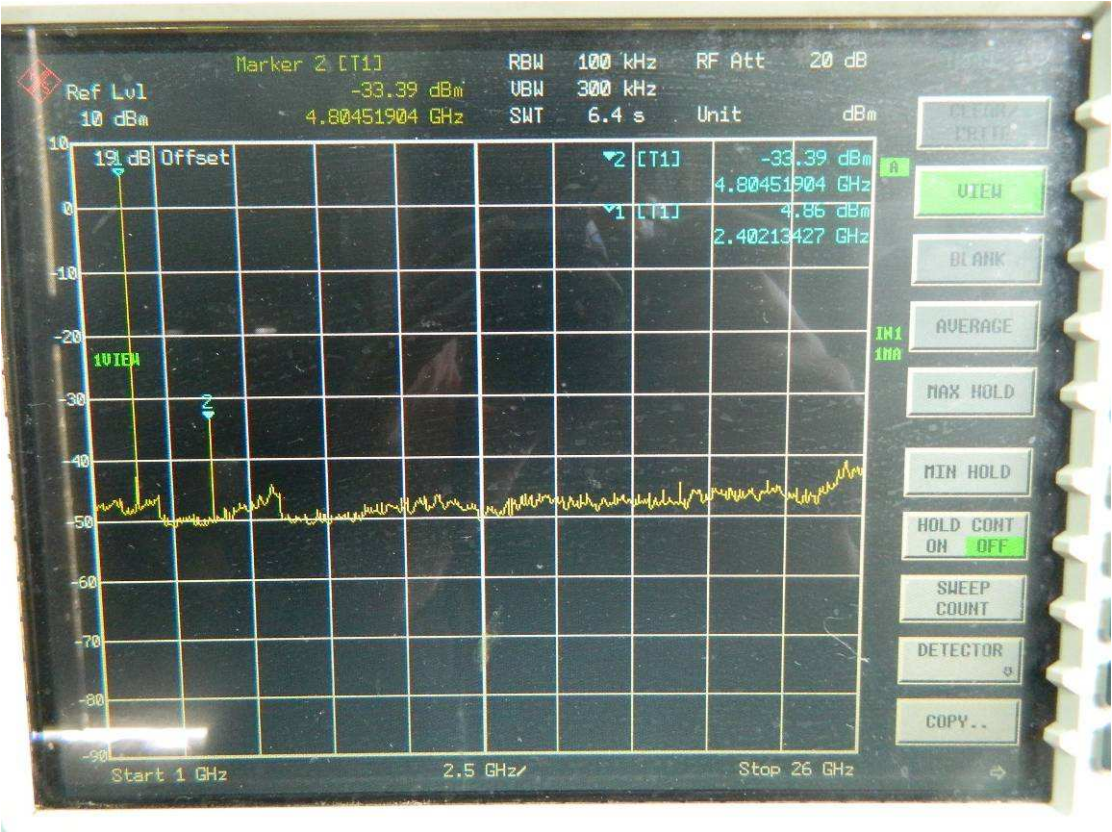

Channel M

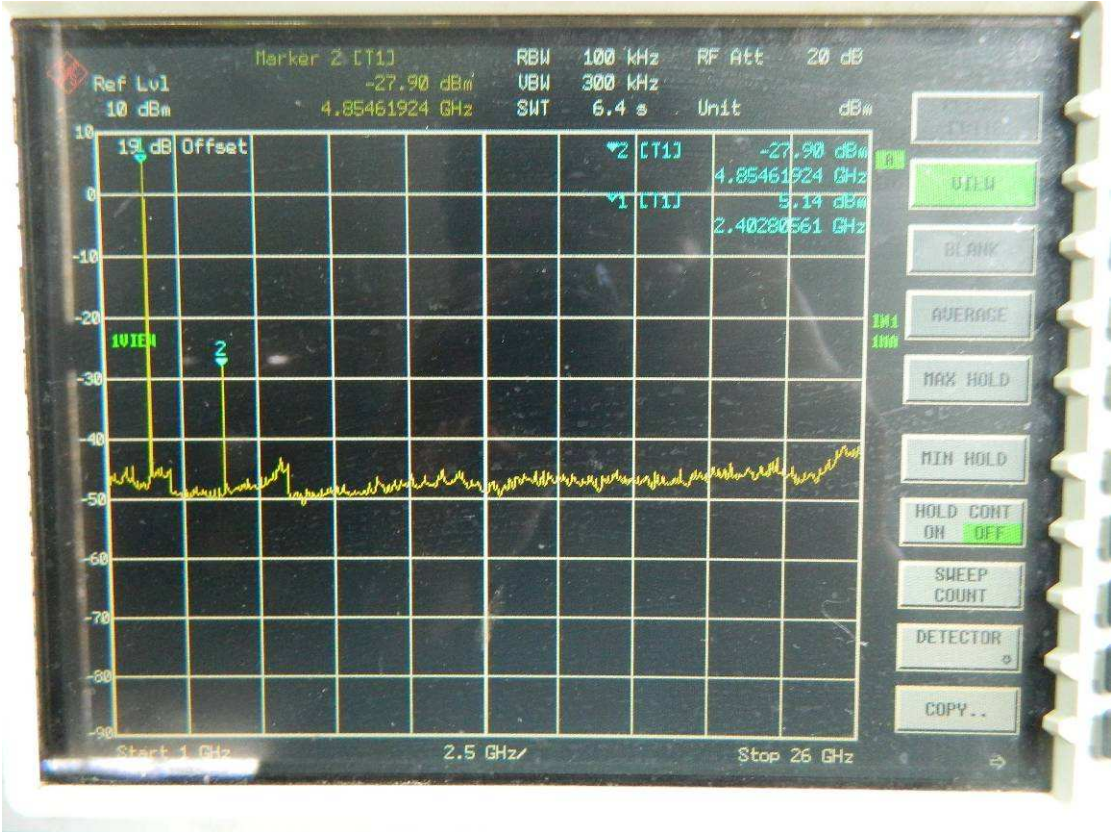

Channel H

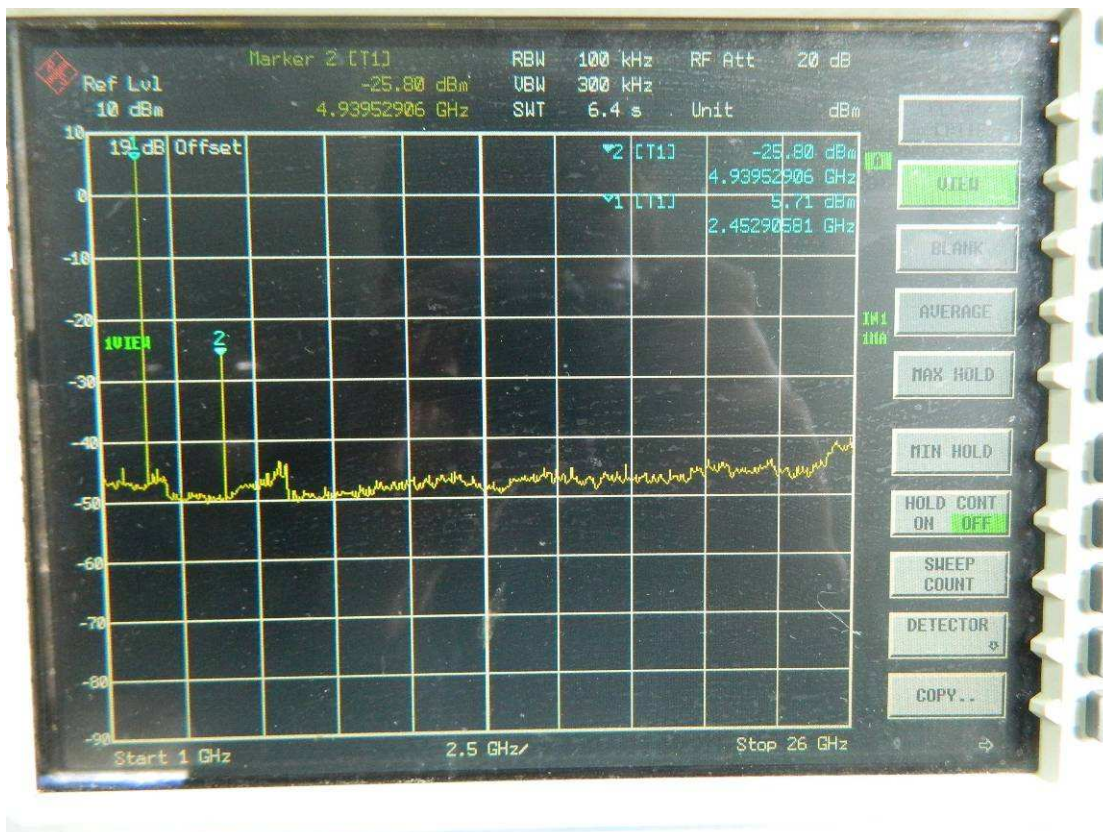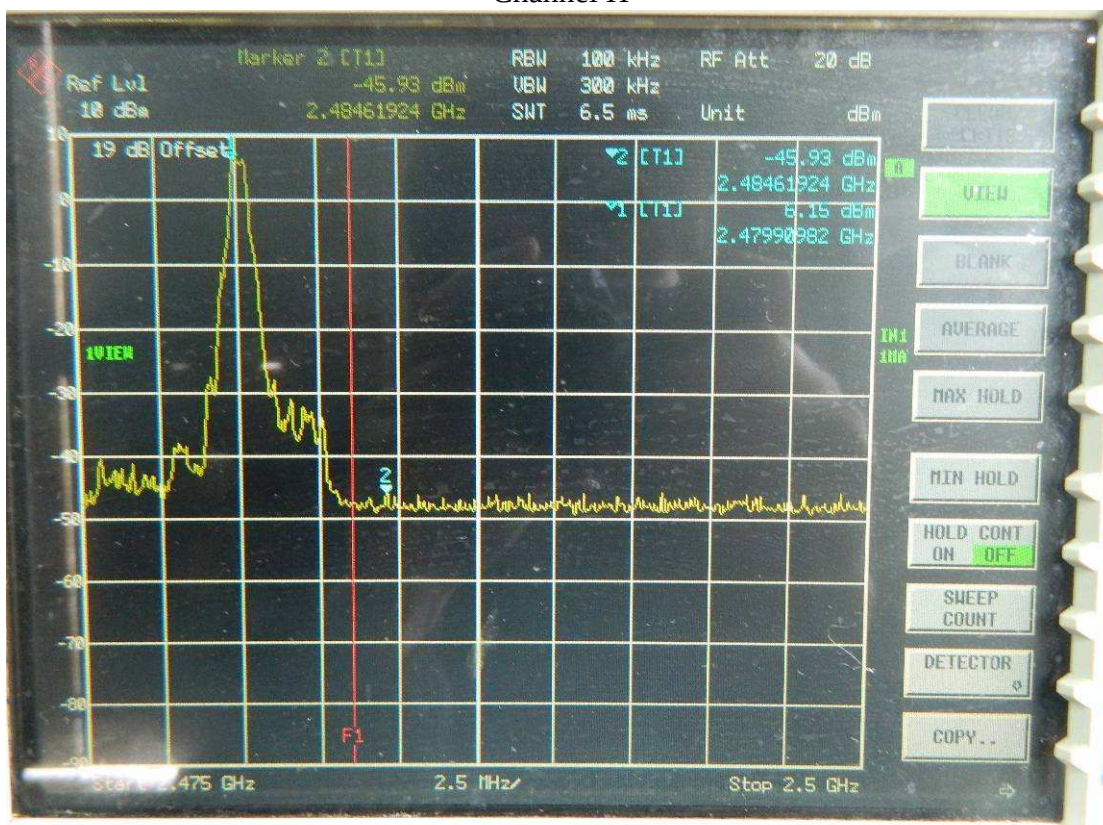

8. Power line conducted emission


Test result: Pass

8.1 Limit

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

8.2 Test configuration

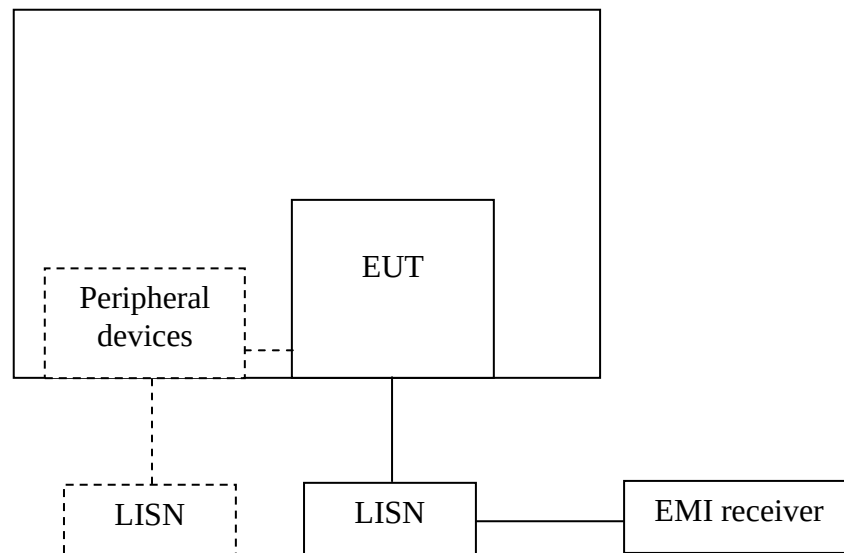

☒ For table top equipment, wooden support is 0.8m height table


☐ For floor standing equipment, wooden support is 0.1m height rack.

8.3 Test procedure and test set up

The EUT are connected to the main power through a line impedance stabilization network (LISN). This provides a 50Ω/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50Ω/50uH coupling impedance with 50Ω termination. Both sides (Line and Neutral) of AC line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4 on conducted measurement. The bandwidth of the test receiver is set at 9 kHz.

8.4 Test protocol

Frequency	Correct Factor (dB)	Corrected Reading (dBuV)		Limit (dBuV)		Margin (dB)	
		QP	AV	QP	AV	QP	AV
0.20 (N)	3.00	52.85	42.44	63.82	53.82	10.97	11.38
0.25 (N)	3.00	45.85	35.22	61.64	51.64	15.79	16.42
0.47 (N)	3.00	38.27	25.41	56.52	46.52	18.25	21.11
2.93 (L)	3.00	33.50	20.88	56.00	46.00	22.50	25.12
5.15 (N)	3.00	33.70	19.59	60.00	50.00	26.30	30.41
28.46 (L)	3.00	23.33	3.07	60.00	50.00	30.67	46.93
Remark: 1. Correction Factor (dB) = LISN Factor (dB) + Cable Loss (dB). 2. Margin (dB) = Limit - Corrected Reading.							

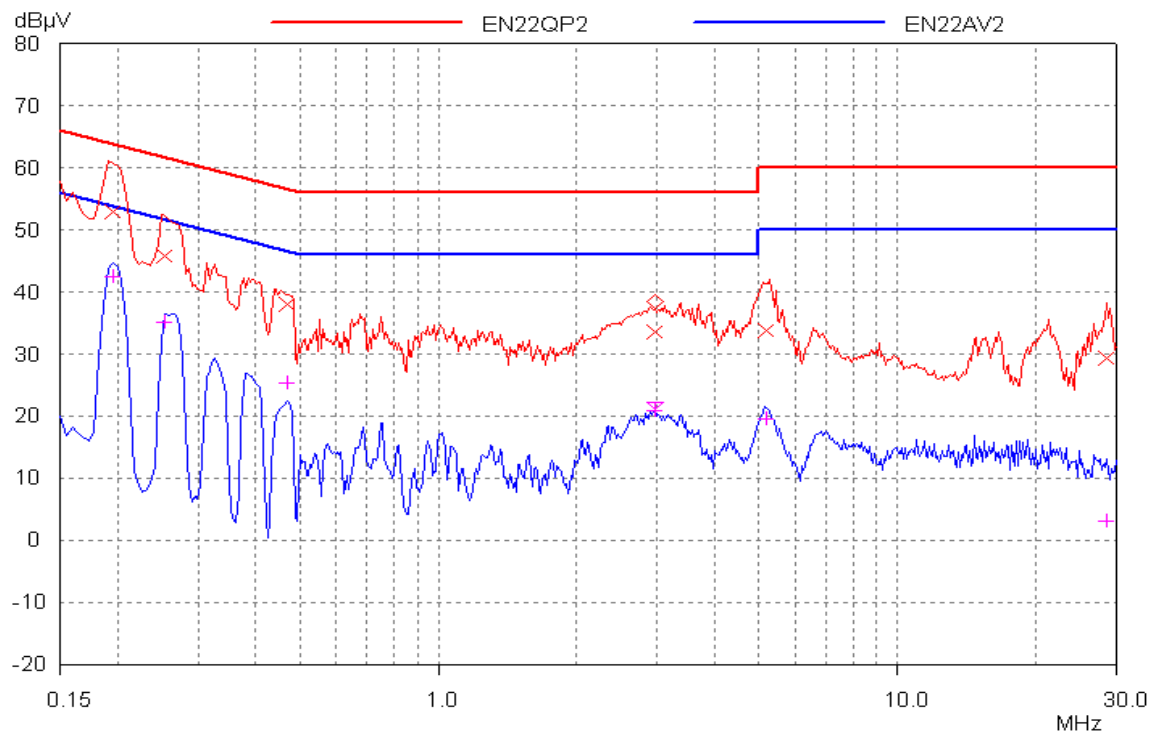


9. Number of Hopping Frequencies

Test result: Pass

9.1 Limit

Number of Hopping Frequencies in the 2400-2483.5 MHz band shall use at least 15 channels.

9.2 Test Configuration

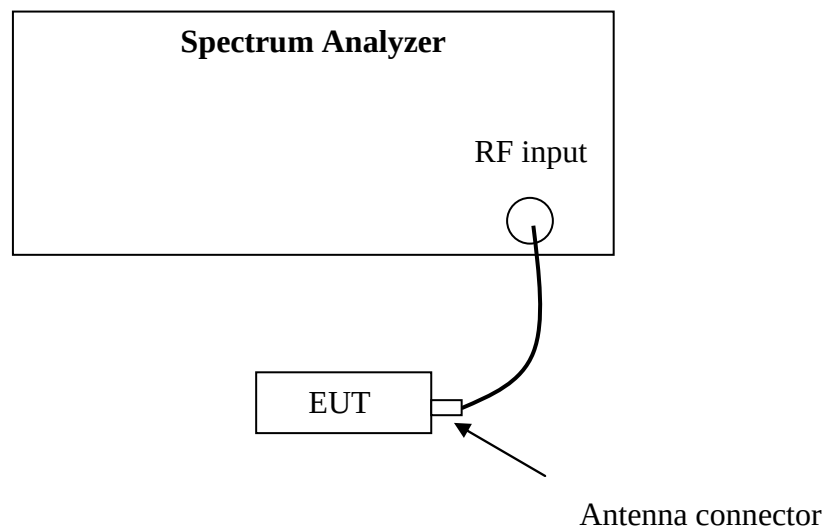


9.3 Test procedure and test setup

The channel number per FCC §15.247(a)(1)(iii) is measured using the Spectrum Analyzer with RBW=100kHz, VBW $\geq$ RBW, Sweep = auto, Detector = peak, Trace = max hold. The EUT was tested according to DA 00-705 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems).

9.4 Test protocol

Channel Number	Limit
79	≥ 15

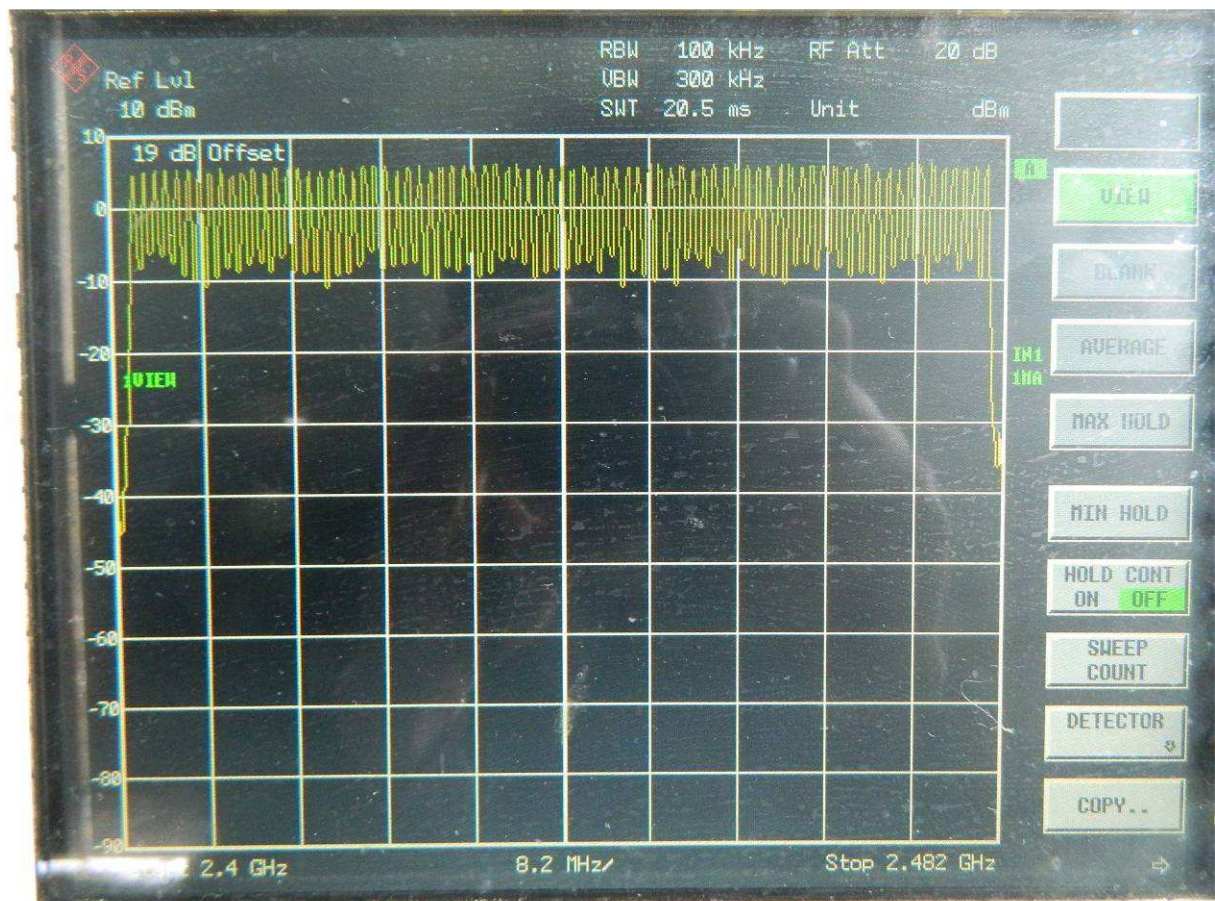


10. Dwell Time

Test result: Pass

10.1 Limit

The dwell time on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

10.2 Test Configuration

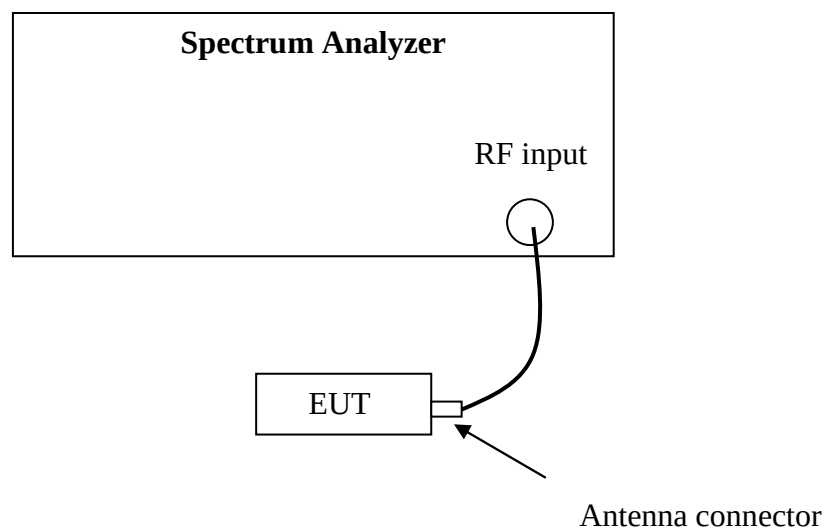

10.3 Test procedure and test setup

Dwell time per FCC § 15.247(a)(1)(iii) is measured using the Spectrum Analyzer with Span = 0, RBW=1MHz, VBW $\geq$ RBW, Sweep can capture the entire dwell time, Detector = peak, Trace = max hold.

The EUT was tested according to DA 00-705 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems).


10.4 Test protocol

Packet	Occupancy time for single hop (ms) O	CH	Real observed period (s) P	Hops among Observed period I	Dwell time (s) T	Limit (s)
DH1	0.41	L	3.16	32	0.13	≤0.4
		M	3.16	32	0.13	
		H	3.16	32	0.13	
DH3	1.68	L	3.16	16	0.27	
		M	3.16	16	0.27	
		H	3.16	16	0.27	
DH5	2.93	L	3.16	11	0.32	
		M	3.16	11	0.32	
		H	3.16	11	0.32	

Remark: 1. There are 79 channels in all. So the complete observed period $P = 0.4 * 79 = 31.6$ s.

2. Average time of occupancy $T = O * I * 31.6 / P$


Single pulse of DH1

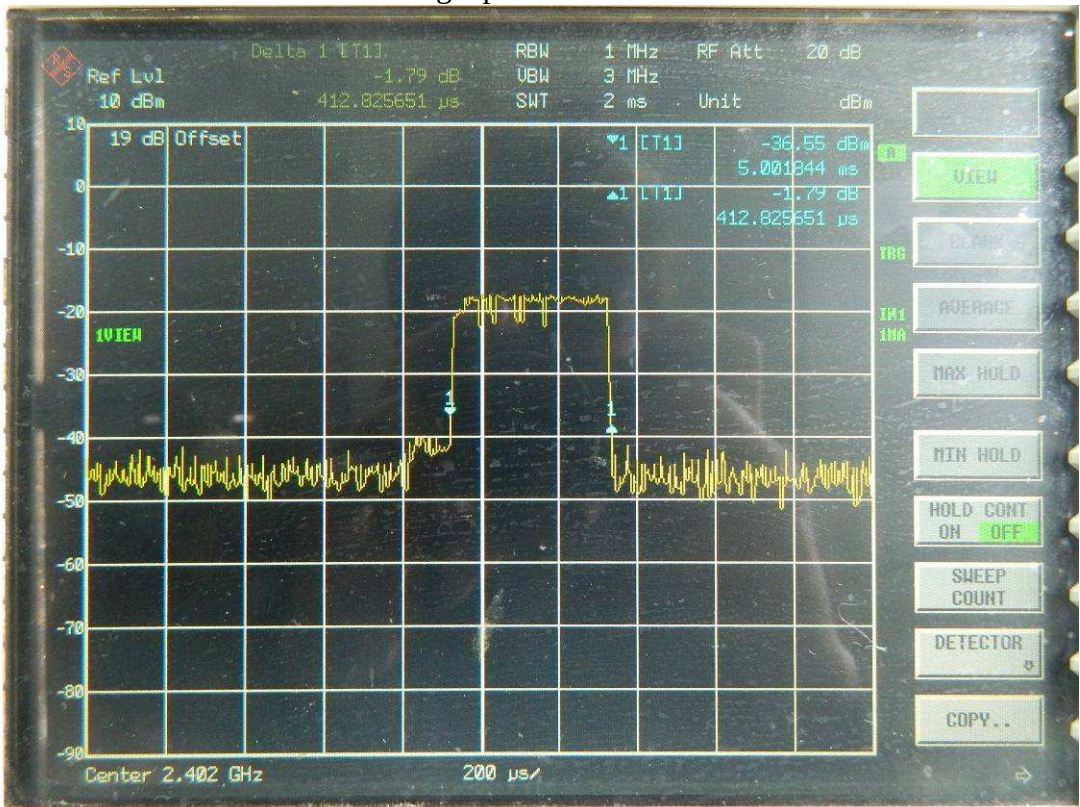


Channel L of DH1




Channel M of DH1

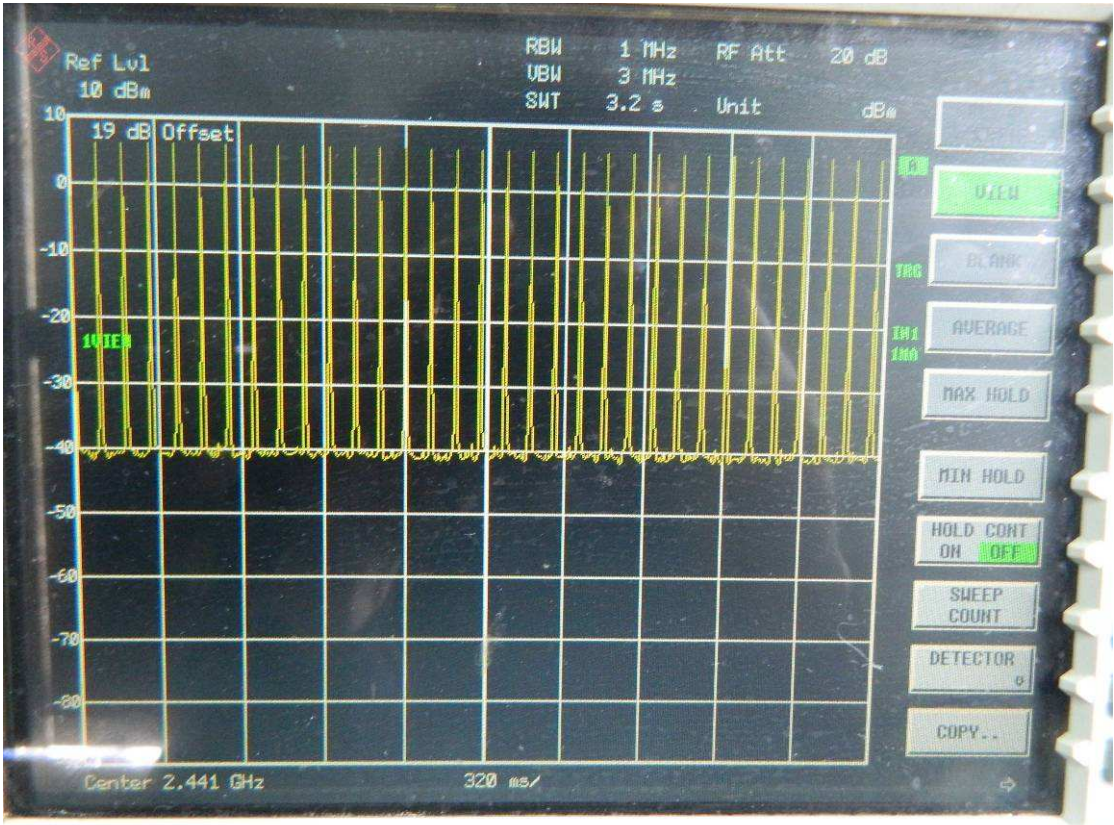


Channel H of DH1

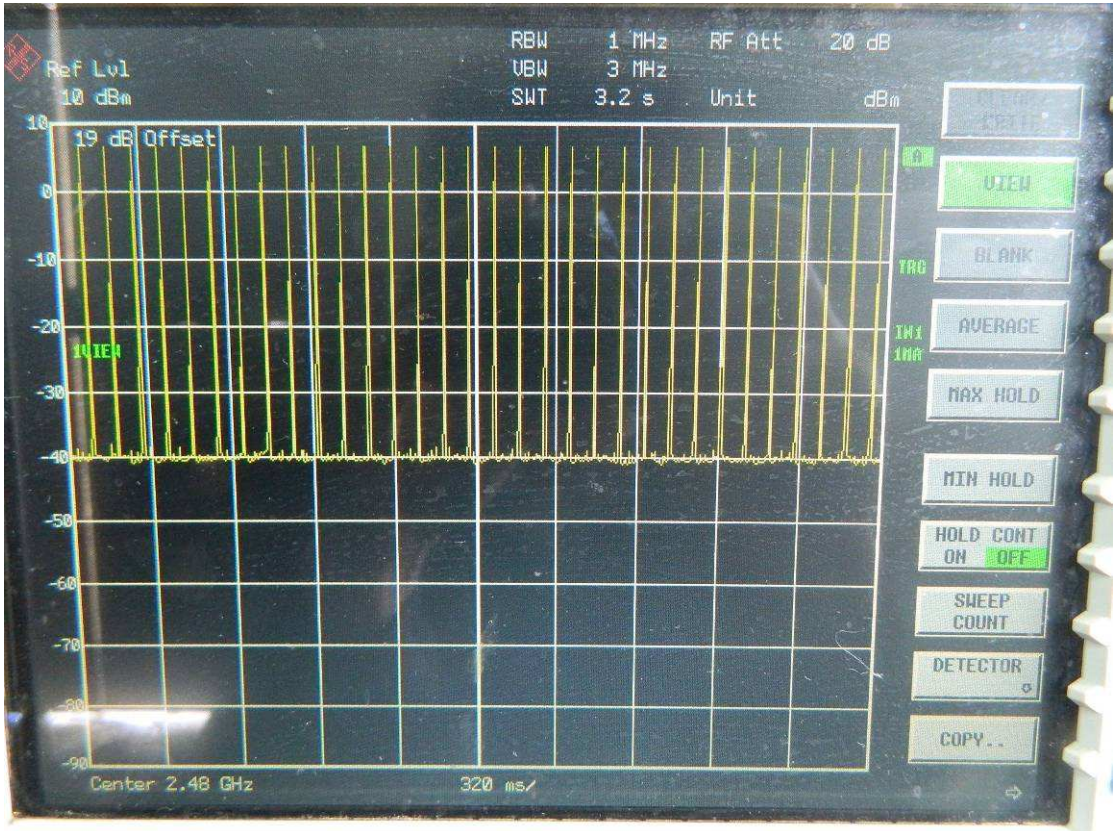


Single pulse of DH3

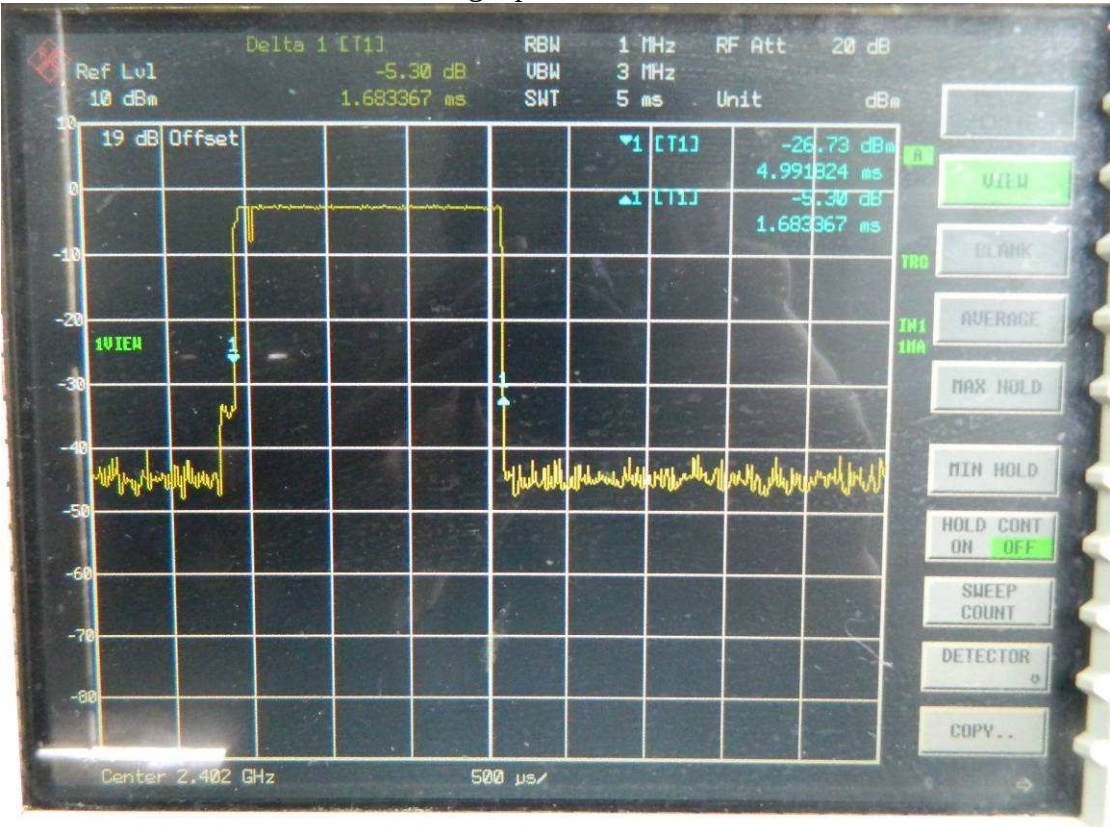


Channel L of DH3

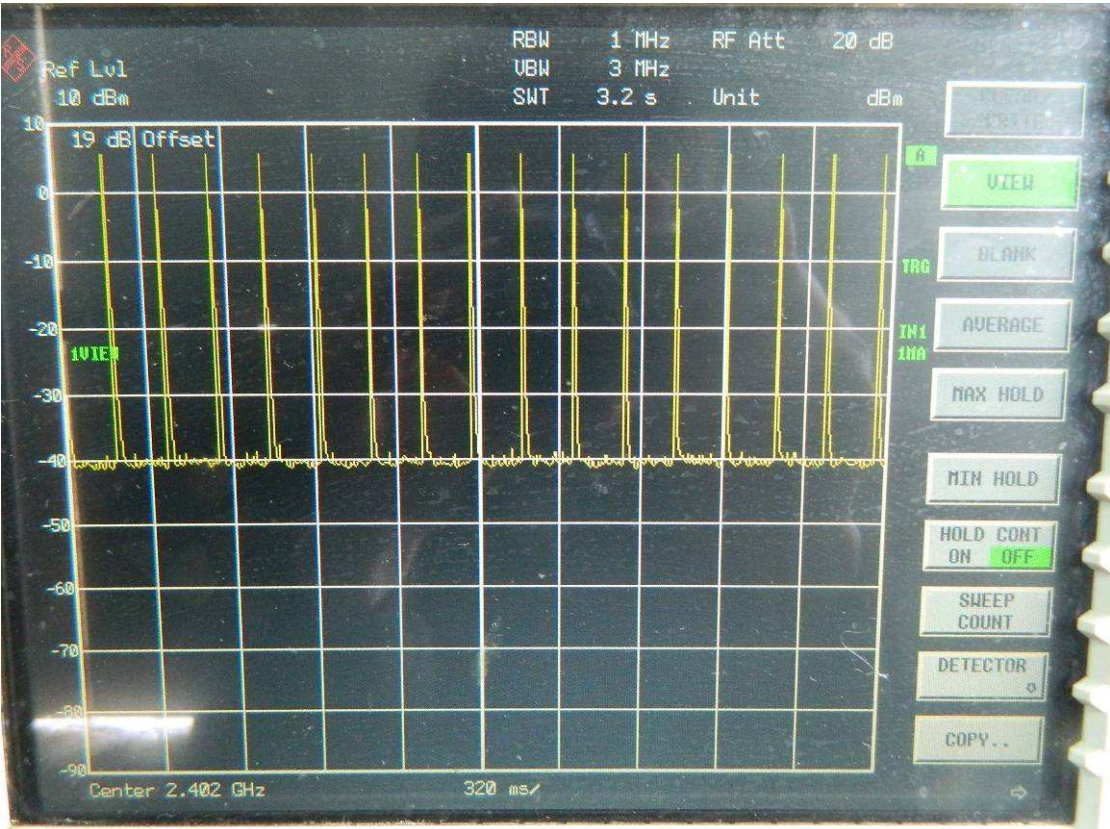


Channel M of DH3

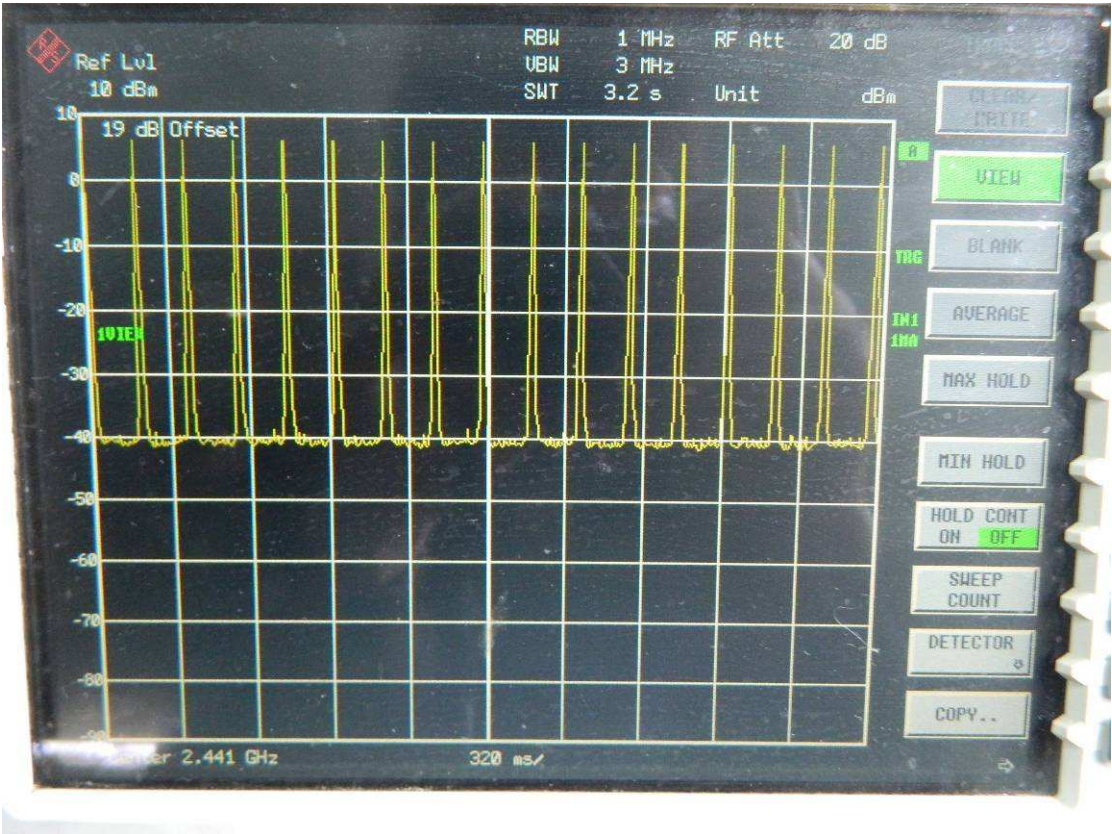


Channel H of DH3

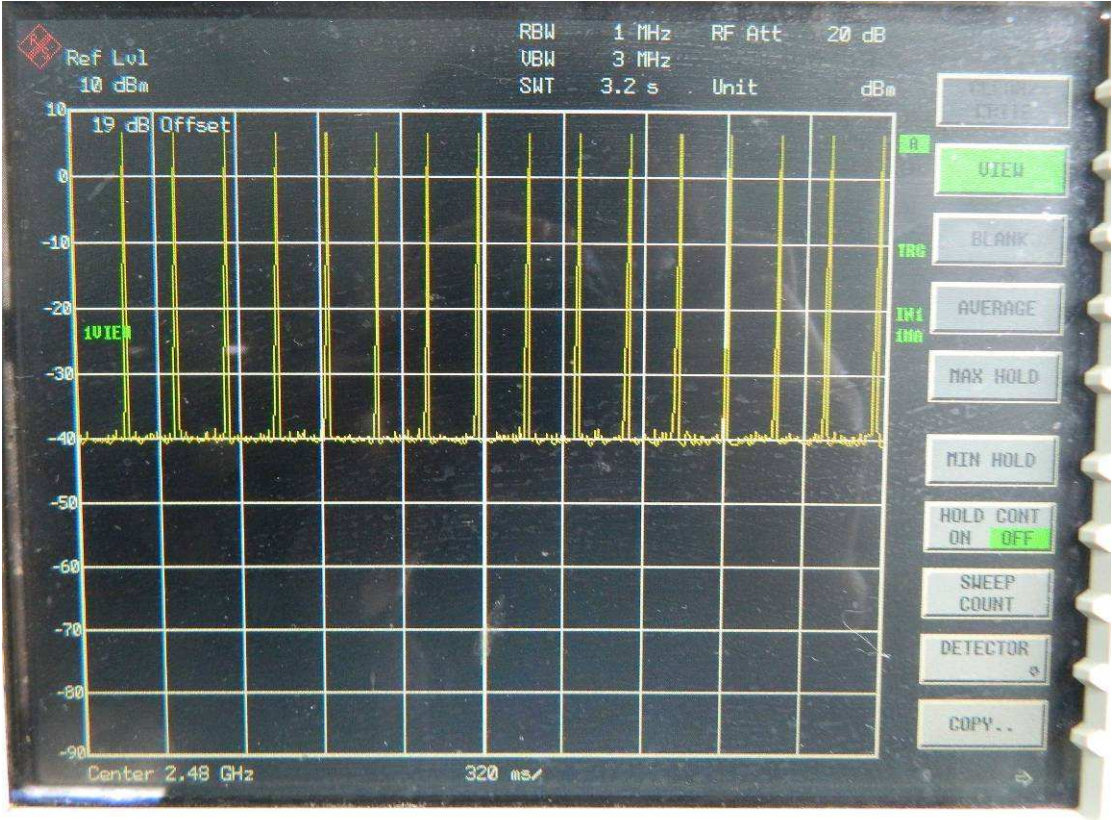


Single pulse of DH5

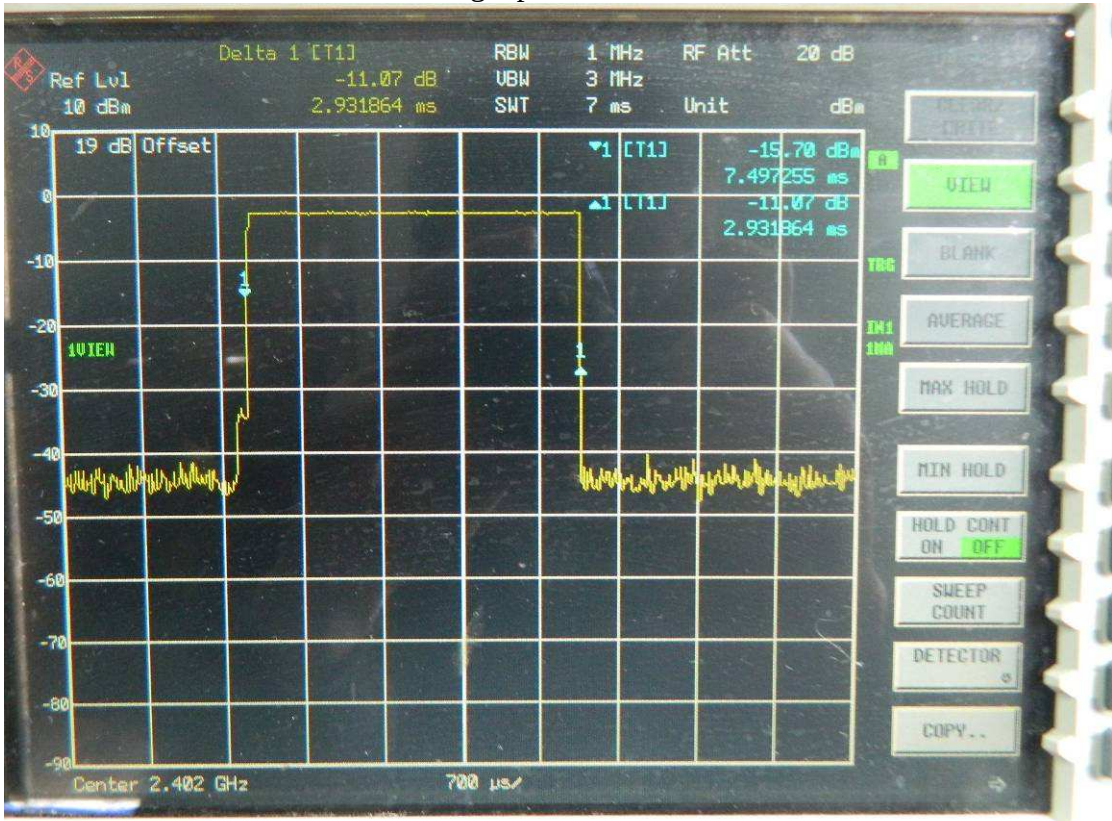


Channel L of DH5

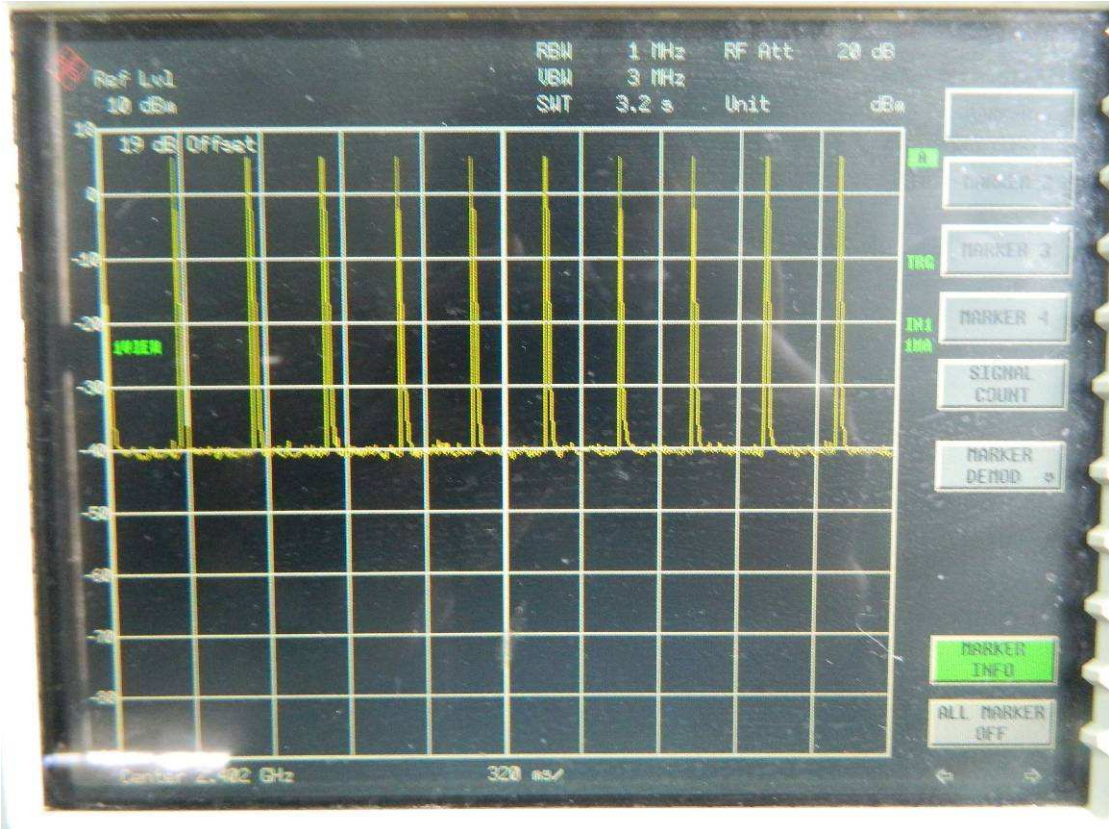

Channel M of DH5

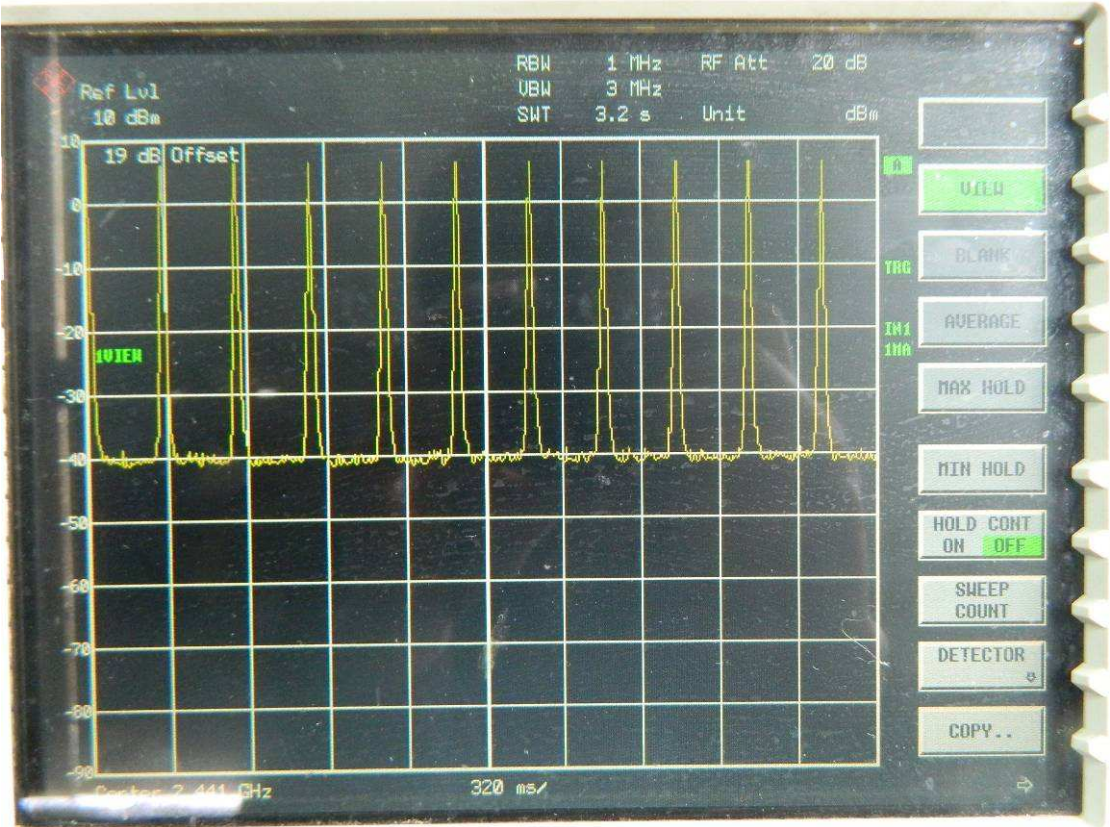

Channel H of DH5

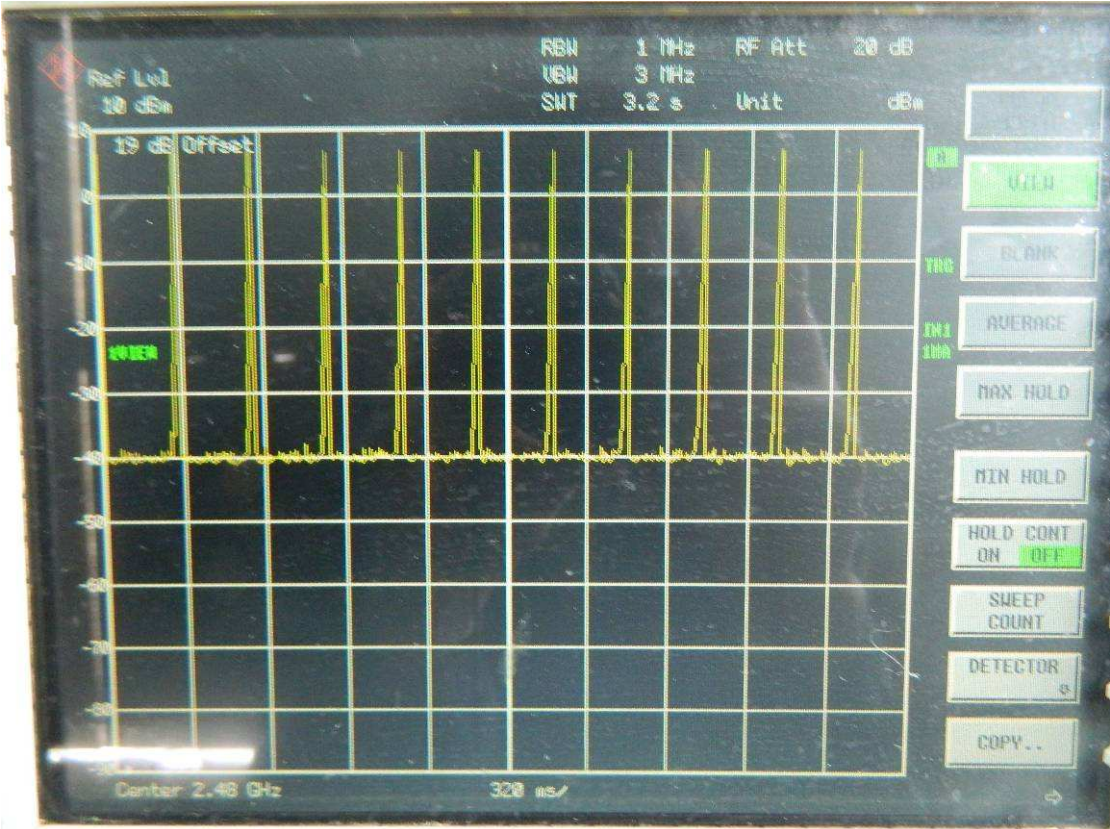


11. Occupied Bandwidth

Test Status: Tested

11.1 Test limit

None

11.2 Test Configuration

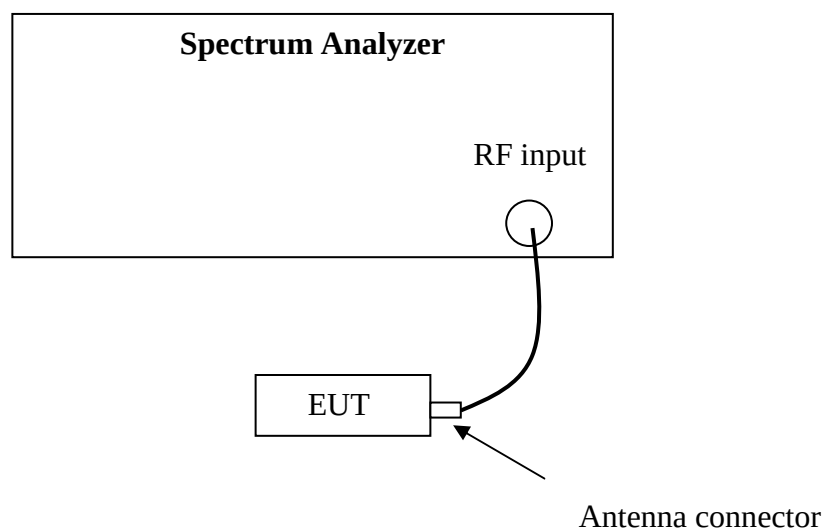

11.3 Test procedure and test setup

The occupied bandwidth per RSS-Gen Issue 3 Clause 4.6.1 was measured using the Spectrum Analyzer with the RBW close to 1% of the selected span, VBW = 3 * RBW Detector = Sample, Sweep = Auto.

11.4 Test protocol

Temperature : 22 °C
Relative Humidity : 55 %

Channel	Occupied Bandwidth (kHz)
L	847.70
M	847.70
H	847.70

Channel L



Channel M



Channel H



12. Spurious emission for receiver

Test result: NA

12.1 Test limit

The spurious emission shall test through 3 times tuneable or local oscillator frequency whichever is the higher, without exceeding 40 GHz.

☐ If a conducted measurement is made, no spurious output signals appearing at the antenna terminals shall exceed 2nW per any 4 kHz spurious frequency in the band 30-1000 MHz, or 5nW above 1 GHz.

☐ If a radiated measurement is made, all spurious emissions shall comply with the limits of Table below:

Frequency (MHz)	Field Strength (dBuV/m)	Measurement Distance (m)
30 - 88	40.0	3
88 - 216	43.5	3
216 - 960	46.0	3
Above 960	54.0	3

12.2 Test Configuration

Please refer to clause 6.2

12.3 Test procedure and test setup

Please refer to clause 6.3.

12.4 Test protocol

Polarization	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-

Remark: 1. Correct Factor = Antenna Factor + Cable Loss (-Amplifier, is employed)
 2. Corrected Reading = Original Receiver Reading + Correct Factor
 3. Margin = limit – Corrected Reading

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,
 Original Receiver Reading = 10dBuV.
 Then Correct Factor = 30.20 + 2.00 = 32.20dB/m; Corrected Reading = 10dBuV + 32.20dB/m = 42.20dBuV/m
 Assuming limit = 54dBuV/m, Corrected Reading = 42.20dBuV/m, then Margin = 54 - 42.20 = 11.80dBuV/m