

Emissions Test Report

EUT Name: ViSi Mobile Monitor

Model No.: 92-10010

CFR 47 Part 15.247:2010 and RSS 210:2010

Prepared for:

Eben Gordon
Sotera Wireless, Inc.
9444 Waples Street, Ste. 280
San Diego, CA 92121
Tel: (858) 373-4841
Fax: (858) 427-4639

Prepared by:

TUV Rheinland of North America, Inc.
1279 Quarry Lane
Pleasanton, CA 94566
Tel: (925) 249-9123
Fax: (925) 249-9124
<http://www.tuv.com/>

Report/Issue Date: May 20 2011
Report Number: 31151518.003

Statement of Compliance

Manufacturer: Sotera Wireless, Inc.
9444 Waples Street, Ste. 280
San Diego, CA 92121
(858) 373-4841

Requester / Applicant: Eben Gordon
Name of Equipment: ViSi Mobile Monitor
Model No. 92-10010
Type of Equipment: Industrial, Scientific, or Medical (ISM)
Application of Regulations: CFR 47 Part 15.247:2010 and RSS 210:2010
Test Dates: 13 May 2011 to 2 June 2011

Guidance Documents:

Emissions: ANSI C63.10: 2009

Test Methods:

Emissions: ANSI C63.10: 2009

The electromagnetic compatibility test and documented data described in this report has been performed and recorded by TUV Rheinland, in accordance with the standards and procedures listed herein. As the responsible authorized agent of the EMC laboratory, I hereby declare that the equipment described above has been shown to be compliant with the EMC requirements of the stated regulations and standards based on these results. If any special accessories and/or modifications were required for compliance, they are listed in the Executive Summary of this report.

This report must not be used to claim product endorsement by NVLAP or any agency of the U.S. Government. This report contains data that are not covered by NVLAP accreditation. This report shall not be reproduced except in full, without the written authorization of TUV Rheinland of North America.



Jeremy Luong 2 June 2011

Test Engineer Date



Sarbjit Shelopal 2 June 2011

NVLAP Signatory Date



NVLAPCODE 500011-0



US5254

Industry Canada

2932M-1

Table of Contents

1	Executive Summary	6
1.1	Scope	6
1.2	Purpose	6
1.3	Summary of Test Results	6
1.4	Special Accessories	6
1.5	Equipment Modifications	6
2	Laboratory Information	7
2.1	Accreditations & Endorsements	7
2.1.1	US Federal Communications Commission	7
2.1.2	NIST / NVLAP	7
2.1.3	Canada – Industry Canada	7
2.1.4	Japan – VCCI	7
2.1.5	Acceptance by Mutual Recognition Arrangement	7
2.2	Test Facilities	8
2.2.1	Emission Test Facility	8
2.2.2	Immunity Test Facility	8
2.3	Measurement Uncertainty	8
2.3.1	Sample Calculation – radiated & conducted emissions	9
2.3.2	Measurement Uncertainties	9
2.4	Calibration Traceability	10
3	Product Information	11
3.1	Product Description	11
3.2	Equipment Configuration	11
3.3	Operating Mode	11
3.4	Unique Antenna Connector	12
3.4.1	Results	12
4	Emissions	13
4.1	Output Power Requirements	13
4.1.1	Test Method	13
4.1.2	Results	14
4.2	Occupied Bandwidth	19
4.2.1	Test Method	19
4.2.2	Results	20
4.3	Out-of-Band Emissions	24
4.3.1	Test Method	24
4.3.2	Test Result	25
4.4	Peak Power Spectral Density	33
4.4.1	Test Method	33
4.4.2	Results	34
4.5	Maximum Permissible Exposure	38

Table of Contents

4.5.1	Test Methodology	38
4.5.2	RF Exposure Limit	38
4.5.3	EUT Operating Condition	38
4.5.4	Classification	38
4.5.5	Results	38
4.6	Transmitter Spurious Emissions	40
4.6.1	Test Methodology	40
4.6.2	Transmitter Spurious Emission Limit	41
4.6.3	Test Results	41
4.6.4	Sample Calculation	61
4.7	Receiver Spurious Emissions	62
4.7.1	Test Methodology	62
4.7.2	Receiver Spurious Emission Limit	63
4.7.3	Test Results	63
4.8	AC Conducted Emissions	68
4.8.1	Test Methodology	68
4.8.2	Test Results	68
5	Test Equipment List	69
5.1	Equipment List	69
6	EMC Test Plan	70
6.1	Introduction	70
6.2	Customer	70
6.3	Equipment Under Test (EUT)	71
6.4	Test Specifications	73

Index of Tables

Table 1: Summary of Test Results 6
Table 2: Summary of Uncertainties 9
Table 3: RF Output Power at the Antenna Port – Test Results 14
Table 4: Average Output Power at the Antenna Port – Test Results 15
Table 5: Occupied Bandwidth – Test Results 20
Table 6: Emissions at the Band-Edge – Test Results 25
Table 7: Out of band Conducted Emission – Test Results 26
Table 8: Peak Power Spectral Density – Test Results 34
Table 9: Transmit Spurious Emission at Band-Edge Requirements 42
Table 10: Customer Information 70
Table 11: Technical Contact Information 70
Table 12: EUT Specifications 71
Table 13: Interface Specifications 72
Table 14: Supported Equipment 72
Table 15: Description of Sample used for Testing 72
Table 16: Description of Test Configuration used for Radiated Measurement. 72
Table 17: Test Specifications 73

1 Executive Summary

1.1 Scope

This report is intended to document the status of conformance with the requirements of the CFR 47 Part 15.247:2010 and RSS 210:2010 based on the results of testing performed on 13 May 2011 through 2 June 2011 on the ViSi Mobile Monitor Model 92-10010 manufactured by Sotera Wireless, Inc.. This report only applies to the specific samples tested under the stated test conditions. It is the responsibility of the manufacturer to assure that additional production units of this model are manufactured with identical or EMI equivalent electrical and mechanical components. This report is further intended to document changes and modifications to the EUT throughout its life cycle. All documentation will be included as a supplement.

1.2 Purpose

Testing was performed to evaluate the EMC performance of the EUT in accordance with the applicable requirements, procedures, and criteria defined in the application of regulations and application of standards listed in this report.

1.3 Summary of Test Results

Table 1: Summary of Test Results

Test	Test Method ANSI C63.4	Test Parameters (from Standard)	Result
Spurious Emission in Received Mode	CFR47 15.109, RSS-GEN Sect.7.2.3	Class B	Complied
Spurious Emission in Transmitted Mode	CFR47 15.209, RSS-GEN Sect.7.2.3	Class B	Complied
Restricted Bands of Operation	CFR47 15.205, RSS 210 Sect.2.6	Class B	Complied
AC Power Conducted Emission	CFR47 15.207, RSS-GEN Sect.7.2.2	Na	Complied
Occupied Bandwidth	CFR47 15.247 (a2), RSS GEN Sect.4.4.1	500 kHz Minimum	Complied
Maximum Transmitted Power	CFR47 15.247 (b3), RSS 210 Sect. A.8.4	30 dBm w/ 6 dBi antenna	Complied
Peak Power Spectral Density	CFR47 15.247 (e), RSS 210 Sect. A.8.2	8 dBm/ 3 kHz.	Complied
Band Edge Measurement	CFR47 15.247 (d), RSS 210 Sect. A.8.5	30 dB	Complied
RF Exposure	CFR47 15.247 (i), 2.1091	General Population	Complied

1.4 Special Accessories

No special accessories were necessary in order to achieve compliance.

1.5 Equipment Modifications

None.

2 Laboratory Information

2.1 Accreditations & Endorsements

2.1.1 US Federal Communications Commission



TUV Rheinland of North America at 1279 Quarry Lane, Ste. A, Pleasanton, CA 94566, is recognized by the commission for performing testing services for the general public on a fee basis. These laboratory test facilities have been fully described in reports submitted to and accepted by the FCC (FRN # US5254). The laboratory scope of accreditation includes: Title 47 CFR Parts 15, 18, and 90. The accreditation is updated every 3 years.

2.1.2 NIST / NVLAP



TUV Rheinland of North America is accredited by the National Voluntary Laboratory Accreditation Program, which is administered under the auspices of the National Institute of Standards and Technology. The laboratory has been assessed and accredited in accordance with ISO Guide 17025:2005 and ISO 9002 (Lab Code 500011-0). The scope of laboratory accreditation includes emission and immunity testing. The accreditation is updated annually.

2.1.3 Canada – Industry Canada

Industry Canada

TUV Rheinland of North America at the 1279 Quarry Lane, Ste. A, Pleasanton, CA 94566 address is accredited by Industry Canada for performing testing services for the general public on a fee basis. This laboratory test facilities have been fully described in reports submitted to and accepted by Industry Canada (File Number 2932M-1). This reference number is the indication to the Industry Canada Certification Officers that the site meets the requirements of RSS 212, Issue 1 (Provisional). The accreditation is updated every 3 years.

2.1.4 Japan – VCCI



The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) is a group that consists of Information Technology Equipment (ITE) manufacturers and EMC test laboratories. The purpose of the Council is to take voluntary control measures against electromagnetic interference from Information Technology Equipment, and thereby contribute to the development of a socially beneficial and responsible state of affairs in the realm of Information Technology Equipment in Japan. TUV Rheinland of North America at 1279 Quarry Lane, Pleasanton, CA 94566 has been assessed and approved in accordance with the Regulations for Voluntary Control Measures. (Registration Nos. R-3269, C-3637, C-3638, T-1752, T-1753).

2.1.5 Acceptance by Mutual Recognition Arrangement



The United States has an established agreement with specific countries under the Asia Pacific Laboratory Accreditation Corporation (APLAC) Mutual Recognition Arrangement. Under this agreement, all TUV Rheinland at 1279 Quarry Lane, Pleasanton, CA 94566 test results and test reports within the scope of the laboratory NIST / NVLAP accreditation will be accepted by each member country.

2.2 Test Facilities

All of the test facilities are located at 1279 Quarry Lane, Ste. A, Pleasanton, California 94566, USA. The 2305 Mission College, Santa Clara, 95054, USA location is considered a Pleasanton annex.

2.2.1 Emission Test Facility

The Semi-Anechoic chamber and AC Line Conducted measurement facility used to collect the radiated and conducted data has been constructed in accordance with ANSI C63.7:1992. The site has been measured in accordance with and verified to comply with the theoretical normalized site attenuation requirements of ANSI C63.4:2003, at test distances of 3 and 5 meters. The site is listed with the FCC and accredited by NVLAP (Lab Code 500011-0). The 3/5-meter semi-anechoic chamber used to collect the radiated data has been verified to comply with the theoretical normalized site attenuation requirements of ANSI C63.4:2003, at test distances of 3 meters and 5 meters. A report detailing this site can be obtained from TUV Rheinland of North America.

2.2.2 Immunity Test Facility

ESD, EFT, Surge, PQF: These tests are performed in an environmentally controlled room with a 3.7 m x 4.8 m x 3.175 mm thick aluminum floor connected to PE ground.

For ESD testing, tabletop equipment is placed on an insulated mat with a surface resistivity of 10^9 Ohms/square on a 1.6 m x 0.8 m x 0.8 m high non-conductive table with a 3.175 mm aluminum top (Horizontal Coupling Plane). The HCP is connected to the main ground plane via a low impedance ground strap through two 470-k Ω resistors. The Vertical Coupling Plane consists of an aluminum plate 50 cm x 50 cm x 3.175 mm thick. The VCP is connected to the main ground plane via a low impedance ground strap through two 470-k Ω resistors.

For EFT, Surge, PQF, the HCP and VCP are removed.

RF Field Immunity testing is performed in a 7.3m x 4.3m x 4.1m anechoic chamber.

RF Conducted and Magnetic Field Immunity testing is performed on a 4.8m x 3.7m x 3.175mm thick aluminum ground plane.

All test areas allow a minimum distance of 1 meter from the EUT to walls or conducting objects.

2.3 Measurement Uncertainty

Two types of measurement uncertainty are expressed in this report, per *ISO Guide To The Expression Of Uncertainty In Measurement*, 1st Edition, 1995.

The Combined Standard Uncertainty is the standard uncertainty of the result of a measurement when that result is obtained from the values of a number of other quantities; it is equal to the positive square root of the sum of the variances or co-variances of these other quantities, weighted according to how the measurement result varies with changes in these quantities. The term *standard uncertainty* is the result of a measurement expressed as a standard deviation.

The *Expanded Uncertainty* defines an interval about the result of a measurement that may be expected to encompass a large fraction of the distribution of values that could reasonably be attributed to the measurand. The fraction may be viewed as the coverage probability or level of confidence of the interval.

2.3.1 Sample Calculation – radiated & conducted emissions

The field strength is calculated by subtracting the Amplifier Gain and adding the Cable Loss and Antenna Correction Factor to the measured reading. The basic equation is as follows:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{RAW} - \text{AMP} + \text{CBL} + \text{ACF}$$

Where: RAW = Measured level before correction (dB μ V)

AMP = Amplifier Gain (dB)

CBL = Cable Loss (dB)

ACF = Antenna Correction Factor (dB/m)

$$\mu\text{V/m} = 10^{\frac{\text{dB}\mu\text{V/m}}{20}}$$

Sample radiated emissions calculation @ 30 MHz

Measurement +Antenna Factor–Amplifier Gain+Cable loss=Radiated Emissions (dBuV/m)

$$25 \text{ dBuV/m} + 17.5 \text{ dB} - 20 \text{ dB} + 1.0 \text{ dB} = 23.5 \text{ dBuV/m}$$

2.3.2 Measurement Uncertainties

Table 2: Summary of Uncertainties

	U_{lab}	U_{cispr}
Radiated Disturbance		
30 MHz – 25,000 MHz	3.2 dB	5.2 dB
Conducted Disturbance @ Mains Terminals		
150 kHz – 30 MHz	2.4 dB	3.6 dB
Disturbance Power		
30 MHz – 300 MHz	3.92 dB	4.5 dB

Note: U_{lab} is the calculated Combined Standard Uncertainty
 U_{cispr} is the measurement uncertainty requirement per CISPR 16.

Measurement Uncertainty Immunity

The estimated combined standard uncertainty for ESD immunity measurements is $\pm 4.1\%$.
The estimated combined standard uncertainty for radiated immunity measurements is $\pm 2.7\text{dB}$.
The estimated combined standard uncertainty for conducted immunity measurements is $\pm 1.4\text{ dB}$.
The estimated combined standard uncertainty for damped oscillatory wave immunity measurements is $\pm 8.8\%$.
The estimated combined standard uncertainty for harmonic current and flicker measurements is $\pm 0.45\%$.

Measurement Uncertainty – Radio Testing

The estimated combined standard uncertainty for frequency error measurements is $\pm 3.88\text{ Hz}$
The estimated combined standard uncertainty for carrier power measurements is $\pm 1.59\text{ dB}$.
The estimated combined standard uncertainty for adjacent channel power measurements is $\pm 1.47\text{ dB}$.
The estimated combined standard uncertainty for modulation frequency response measurements is $\pm 0.46\text{ dB}$.
The estimated combined standard uncertainty for transmitter conducted emission measurements is $\pm 4.01\text{ dB}$

The expanded uncertainty at a level of 95% confidence is obtained by multiplying the combined standard uncertainty by a coverage factor of 2. Compliance criteria are not based on measurement uncertainty.

2.4 Calibration Traceability

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Measurement method complies with ANSI/NCSL Z540-1-1994 and ISO Guide 17025:2005.

3 Product Information

3.1 Product Description

ViSi Mobile Monitor is a vital sign monitoring system using 802.11b as a primary RF communication

3.2 Equipment Configuration

A description of the equipment configuration is given in Test Plan Section. The EUT was tested as called for in the test standard and was configured and operated in a manner consistent with its intended use. The EUT was connected to rated power and allowed to reach intended operating conditions. The placement of the EUT system components was guided by the test standard and selected to represent typical installation conditions.

In the case of an EUT that can operate in more than one configuration, preliminary testing was performed to determine the configuration that produced maximum radiation.

The final configuration was selected to produce the worst case radiation for emissions testing and to place the EUT in the most susceptible state for immunity testing.

3.3 Operating Mode

A description of the operation mode is given in Test Plan Section. In the case of an EUT that can operate in more than one state, preliminary testing was performed to determine the operating mode that produced maximum radiation.

The final operating mode was selected to produce the worst case radiation for emissions testing and to place the EUT in the most susceptible state for immunity testing.

3.4 Unique Antenna Connector

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of CFR47 Parts 15.211, 15.213, 15.217, 15.219, or 15.221.

3.4.1 Results

The ViSi Mobile Monitor uses the permanently attached antenna inside the device.

4 Emissions

Testing was performed in accordance with CFR 47 Part 15.247:2010 and RSS 210 Annex 8:2010. These test methods are listed under the laboratory's NVLAP Scope of Accreditation. This test measures the levels emanating from the EUT, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices. Procedures described in ANSI C63.10: 2009 were used.

4.1 Output Power Requirements

The maximum peak output power requirement is the maximum equivalent isotropic radiated power delivering at the transmitting antenna under specified conditions of measurements in the presence of modulation.


The maximum output power and harmonics shall not exceed CFR47 Part 15.247 (b3):2010 and RSS 210 A.8.4: 2010

The maximum transmitted power is +30 dBm or 1 Watt.

4.1.1 Test Method

The conducted method was used to measure the channel power output according to ANSI C63.10:2009 Section 6.10.3.1. The measurement was performed with modulation per CFR47 Part15.247 (b3):2010 and RSS 210 A.8.4: 2010. This test was conducted on 3 channels of Sample, S/N AAAA20110400018. The worst mode result indicated below.

Test Setup:

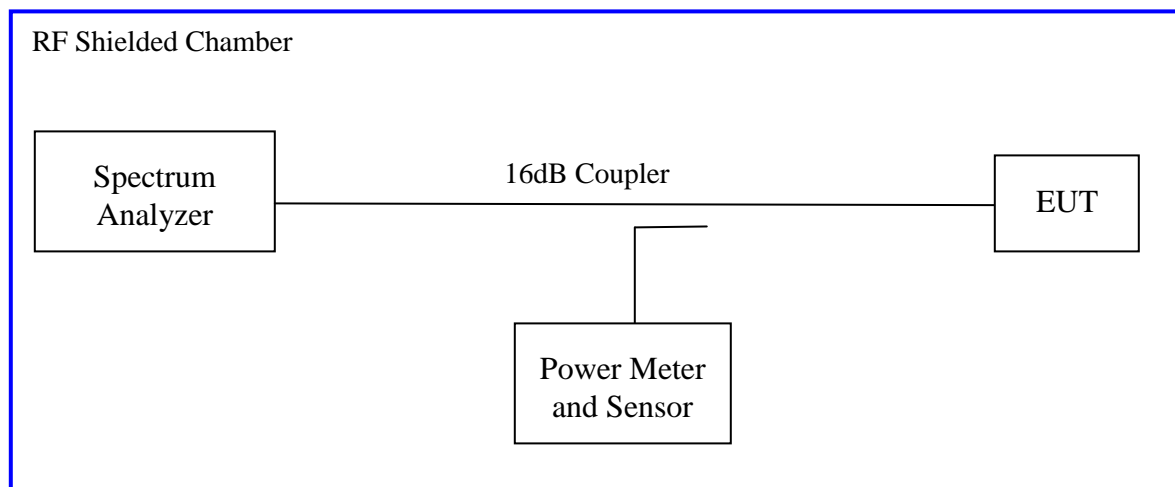

Method #1 of "Measurement of Digital Transmission Systems Operating under Section 15.247" applies since the ViSi Mobile Monitor continuously transmit; where T, Transmission Duration Pulse, is greater than analyzer sweep time. Sample detector was used.

4.1.2 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Table 3: RF Output Power at the Antenna Port – Test Results

Test Conditions: Conducted Measurement, Normal Temperature			
Antenna Type: Integrated		Power Setting: Standard (Fixed)	
Max. Antenna Gain: +2.0 dBi		Signal State: Modulated	
Ambient Temp.: 21 °C		Relative Humidity: 41%	
802.11b Mode			
Frequency (MHz)	Limit [dBm]	Output [dBm]	Margin [dB]
2412	+30.00	7.03	-22.97
2437	+30.00	7.01	-22.99
2462	+30.00	6.99	-23.01
Note: The highest output power was observed at 5.5Mbps.			

Table 4: Average Output Power at the Antenna Port – Test Results

Test Conditions: Conducted Measurement, Normal Temperature			
Antenna Type: Integrated		Power Setting: Standard (Fixed)	
Max. Antenna Gain: +2.0 dBi		Signal State: Modulated	
Ambient Temp.: 21 °C		Relative Humidity: 41%	
802.11b Mode			
Frequency (MHz)	Limit [dBm]	Output [dBm]	Margin [dB]
2412	Na	6.71	
2437	Na	6.62	
2462	Na	6.59	
Note: The highest output power was observed at 5.5Mbps. Average output power measurements is reference use only.			

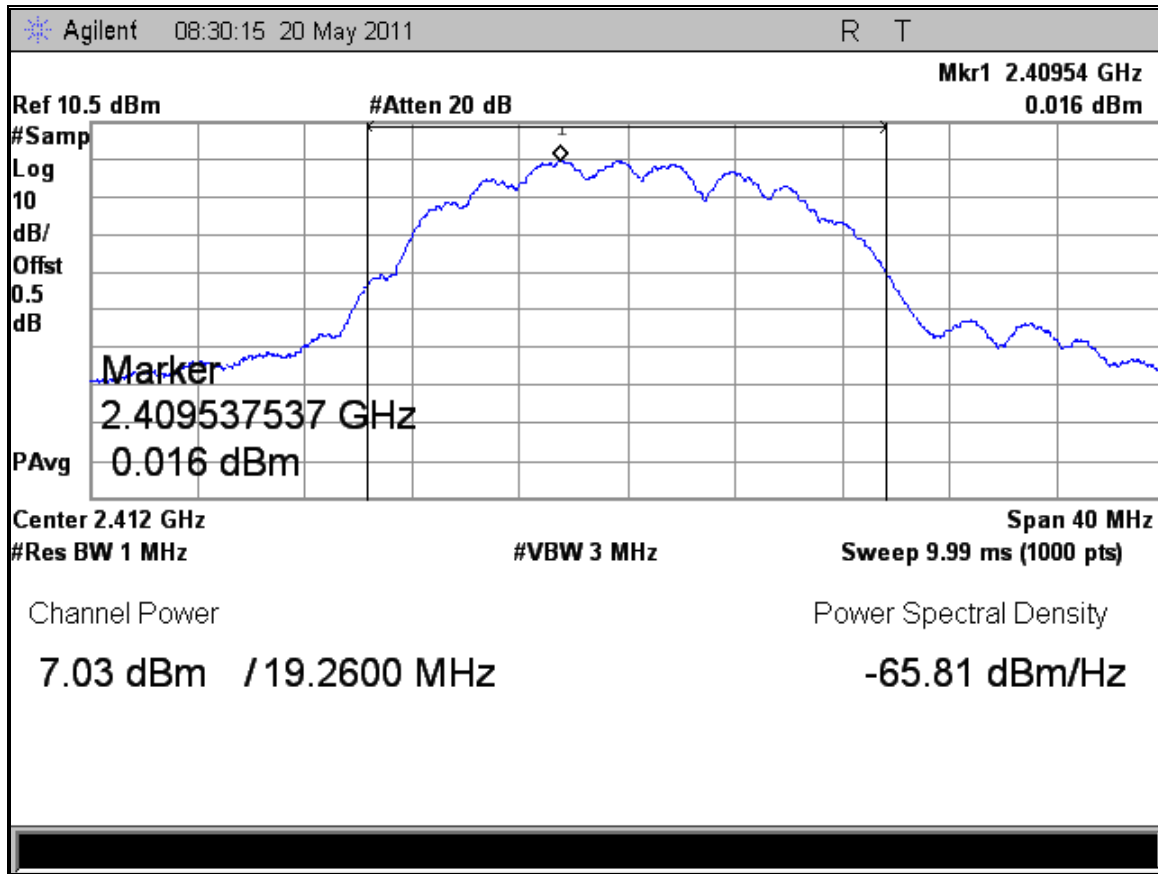


Figure 1: Maximum Transmitted Power, 2412 MHz of 802.11b 5.5Mbps

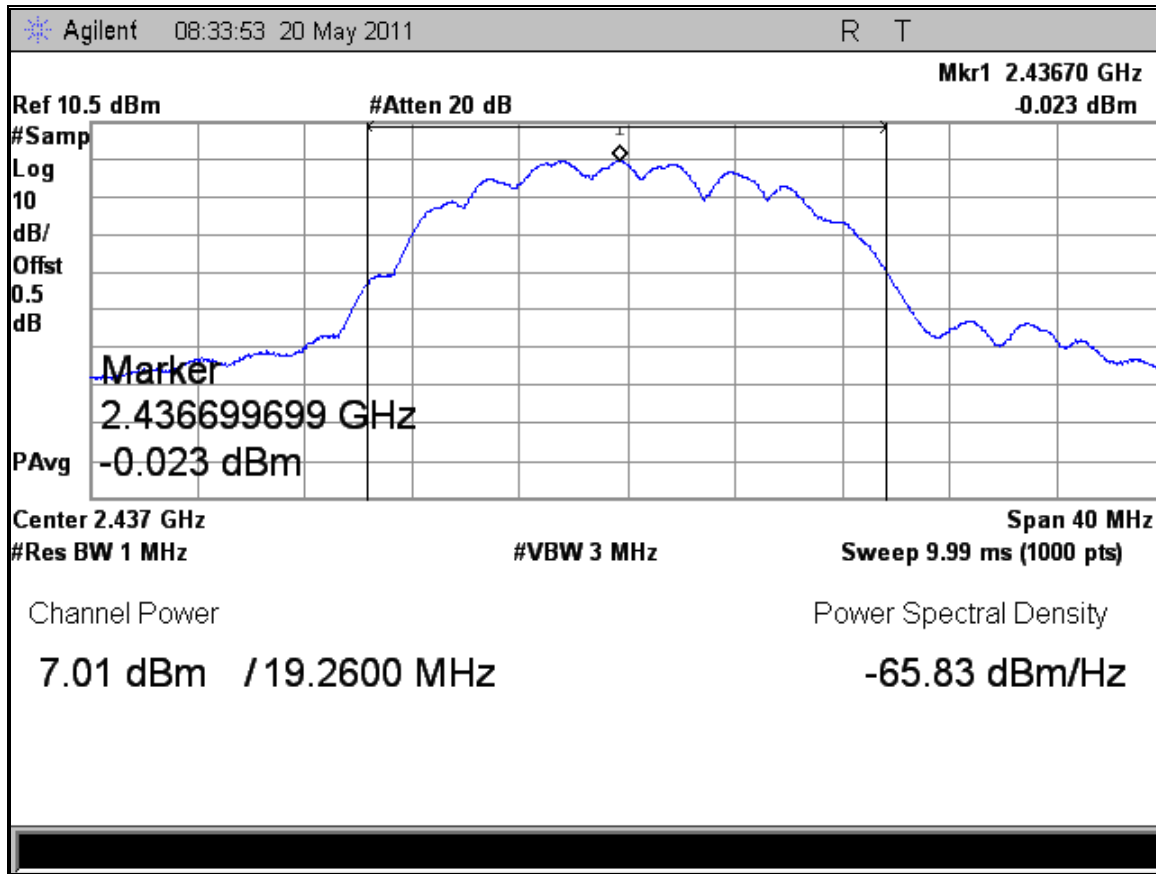


Figure 2: Maximum Transmitted Power, 2437 MHz of 802.11b 5.5Mbps

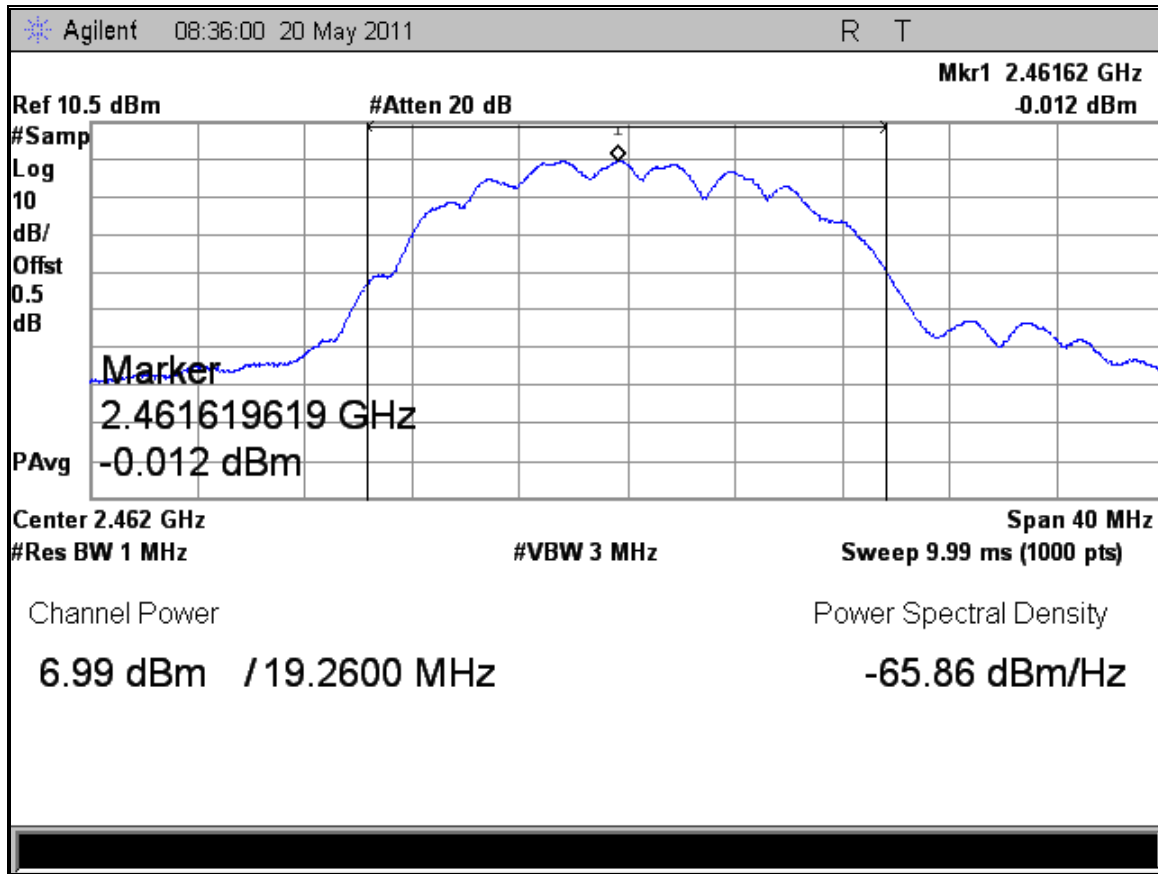


Figure 3: Maximum Transmitted Power, 2462 MHz of 802.11b 5.5Mbps

4.2 Occupied Bandwidth

The occupied bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency.

The 99% bandwidth is the bandwidth in which 99% of the transmitted power occupied.


The 6 dB bandwidth is defined the bandwidth of 6 dBr from highest transmitted level of the fundamental frequency.

The bandwidth shall be at least 500 kHz per Section CFR47 15.247(a2) 2010 and RSS Gen Sect. 4.4.1: 2010.

4.2.1 Test Method

The conducted method was used to measure the occupied bandwidth according to ANSI C63.10:2009 Section 6.9.1. The measurement was performed with modulation per CFR47 15.247(a2) 2010 and RSS Gen Sect. 4.4.1:2010. This test was conducted on 3 channels of Sample SN AAAA20110400018. The worst sample result indicated below.

Test Setup:

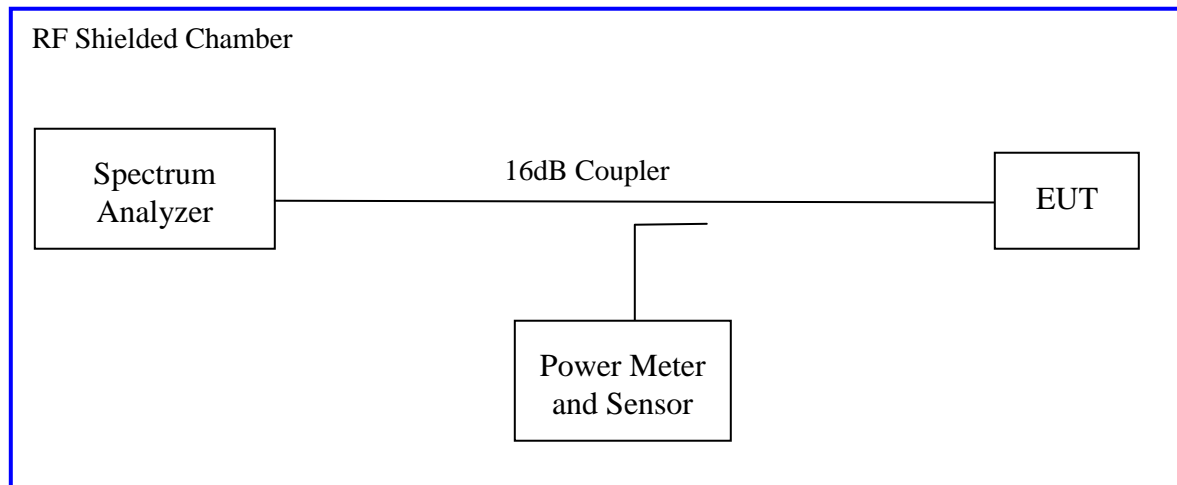

4.2.2 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Table 5: Occupied Bandwidth – Test Results

Test Conditions: Conducted Measurement, Normal Temperature and Voltage only				
Antenna Type: Integrated		Power Setting: Standard (Fixed)		
Max. Antenna Gain: +2.0 dBi		Signal State: Modulated		
Ambient Temp.: 21 °C		Relative Humidity: 38%		
Bandwidth for 802.11b				
Frequency (MHz)	Limit (kHz)	99% BW (MHz)	6 dB BW (MHz)	Results
2412	500	14.5416	9.802	Pass
2437	500	14.5322	9.808	Pass
2462	500	14.5991	9.807	Pass
Note: The bandwidth was measured at 5.5Mbps for 802.11b mode.				

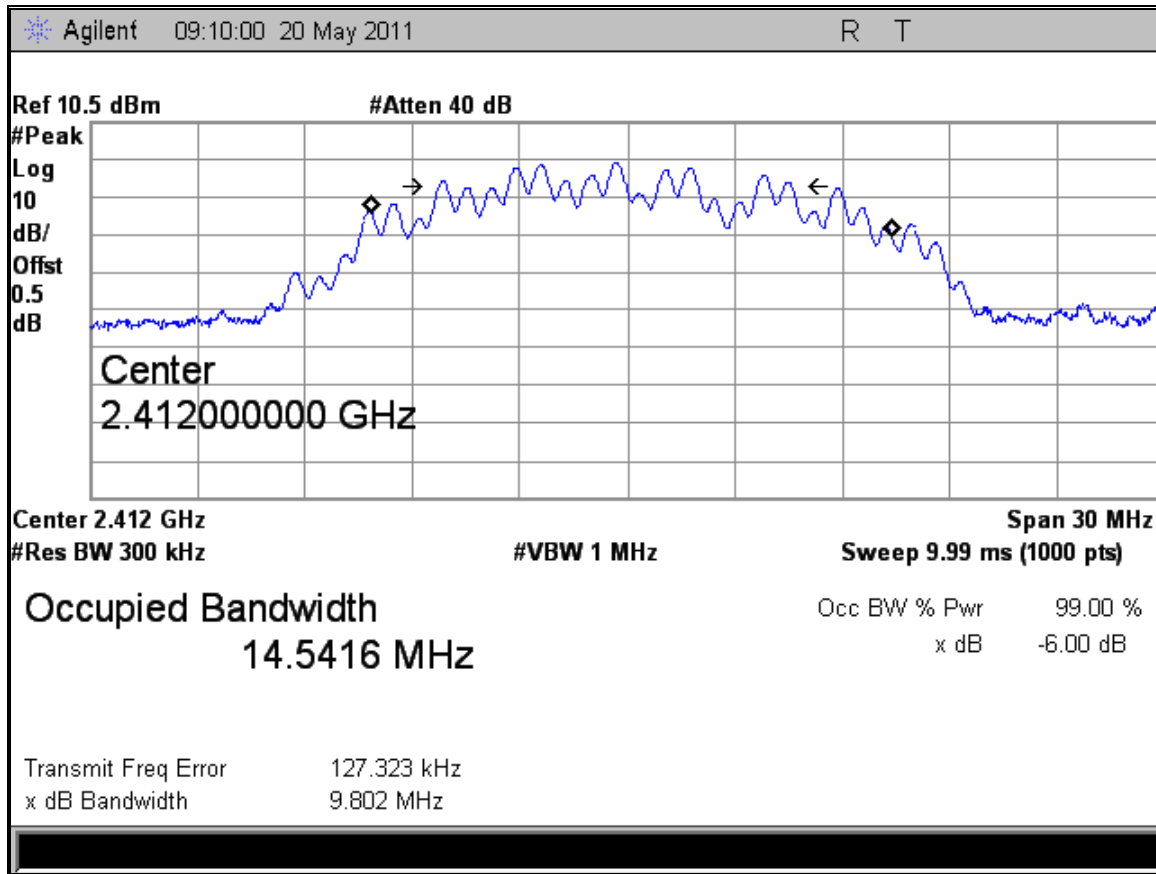


Figure 4: Occupied Bandwidth, 2412 MHz at 802.11b, 5.5Mbps

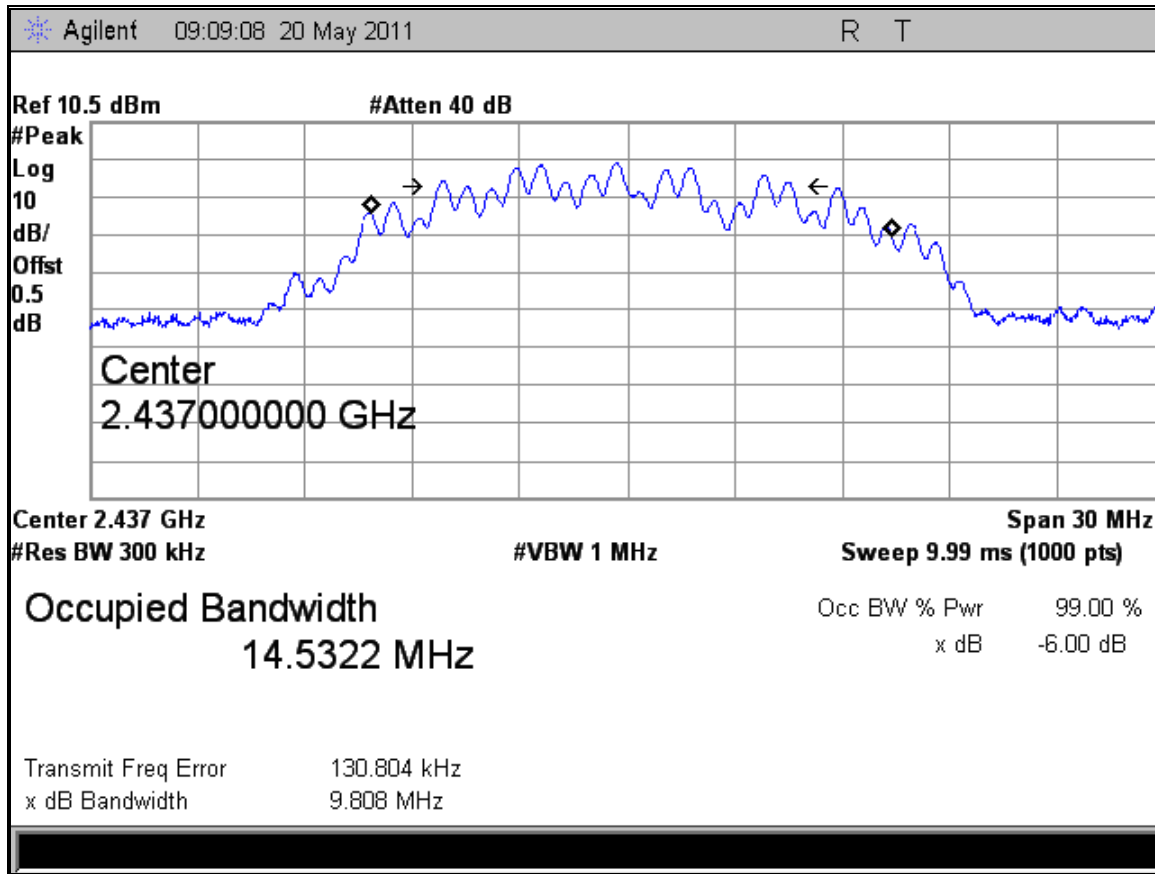


Figure 5: Occupied Bandwidth, 2437 MHz at 802.11b, 5.5Mbps

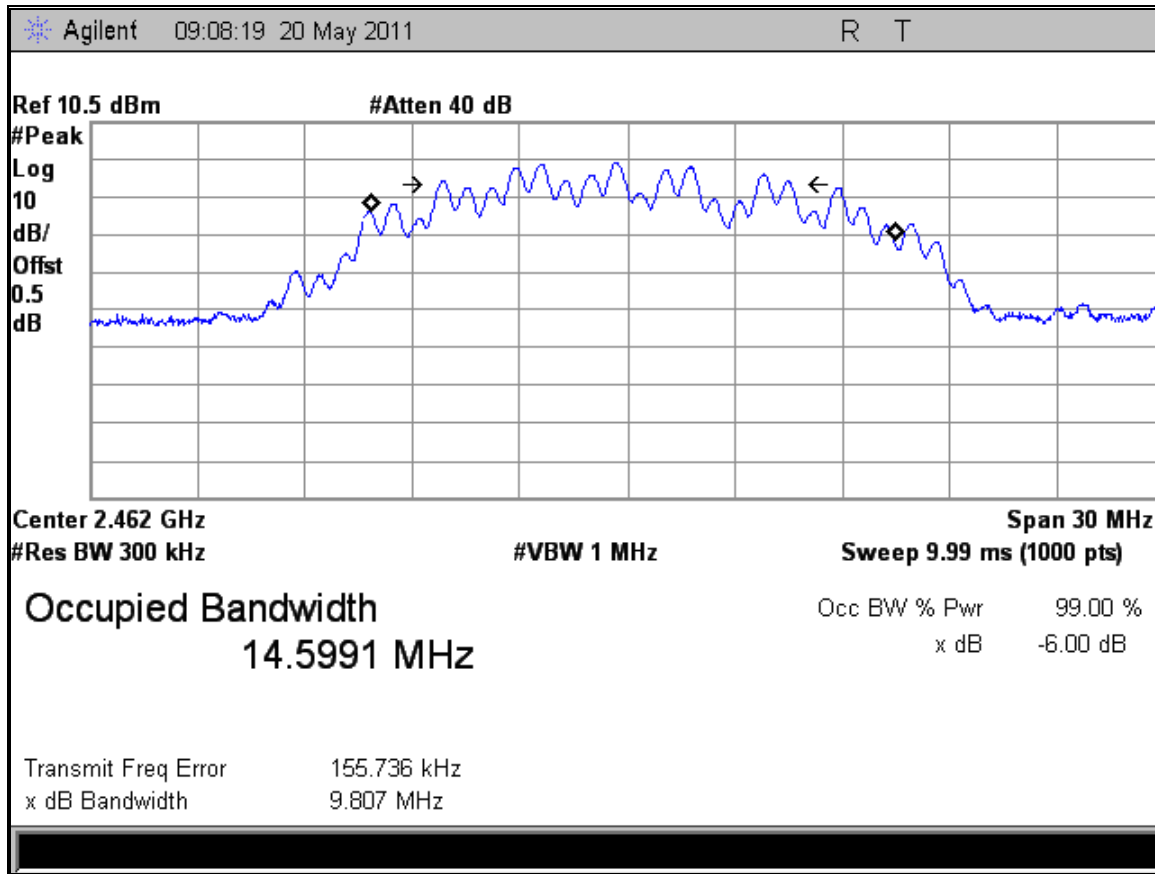


Figure 6: Occupied Bandwidth, 2462 MHz at 802.11b, 5.5Mbps

4.3 Out-of-Band Emissions


The setup was identical to RF output power measurement. Intentional radiators operating under the alternative provisions to the general emission limits, must be designed to ensure that the 20 dB or 30 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If the frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

Since the transmitter complies with the conducted power limits base on the use of RMS averaging per CFR47 Part 15.247(b)(3), any frequency outside the band of 2400 MHz to 2483.5 MHz, the power output level must be below 30db from the in-band transmitting signal; CFR 47 Part 15.215, 15.247(d) and RSS 210 A8.5

4.3.1 Test Method

The conducted method was used to measure the out-of-band emission requirement. The measurement was performed with modulation per CFR47 15.247(4)(d) 2010 and RSS 210 A8.5: 2010. This test was conducted on 3 channels of Sample SN: AAAA20110400018. The worst sample result indicated below.

Test Setup:

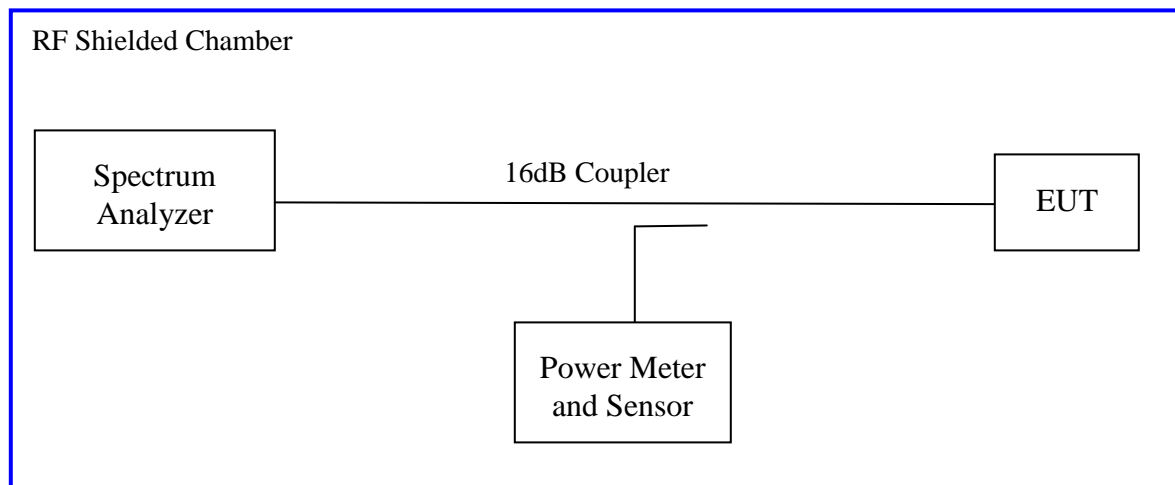

4.3.2 Test Result


As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Table 6: Emissions at the Band-Edge – Test Results

Test Conditions: Conducted Measurement, Normal Temperature and Voltage only				
Antenna Type: Integrated		Power Setting: Standard (Fixed)		
Max. Antenna Gain: +2.0 dBi		Signal State: Modulated		
Ambient Temp.: 21 °C		Relative Humidity: 34%		
Band-Edge Results				
Operating Channel	Mode	Band-edge Level (dBm)	30 dB Level (dBm)	Margin (dB)
2412 MHz	5.5Mbps	-12.22	-29.73	-17.51
2437 MHz	5.5Mbps	-11.56	-41.98	-30.42
2462 MHz	5.5Mbps	-13.27	-34.10	-20.83
Note: The band-edge level must lower than the 30dBr level.				

Table 7: Out of band Conducted Emission – Test Results

Test Conditions: Conducted Measurement, Normal Temperature and Voltage only			
Antenna Type: Integrated		Power Setting: See test plan	
Max. Antenna Gain: +2.0 dBi		Signal State: Modulated	
Ambient Temp.: 21 °C		Relative Humidity: 34%	
Output of Band Results			
Operating Channel	Limit	Band 30MHz- 26GHz	Result
2412 MHz	-12.22	-30.07	Pass
2437 MHz	-11.56	-28.35	Pass
2462 MHz	-13.27	-40.32	Pass
Note: Measurements were taken at 5.5 Mbps			

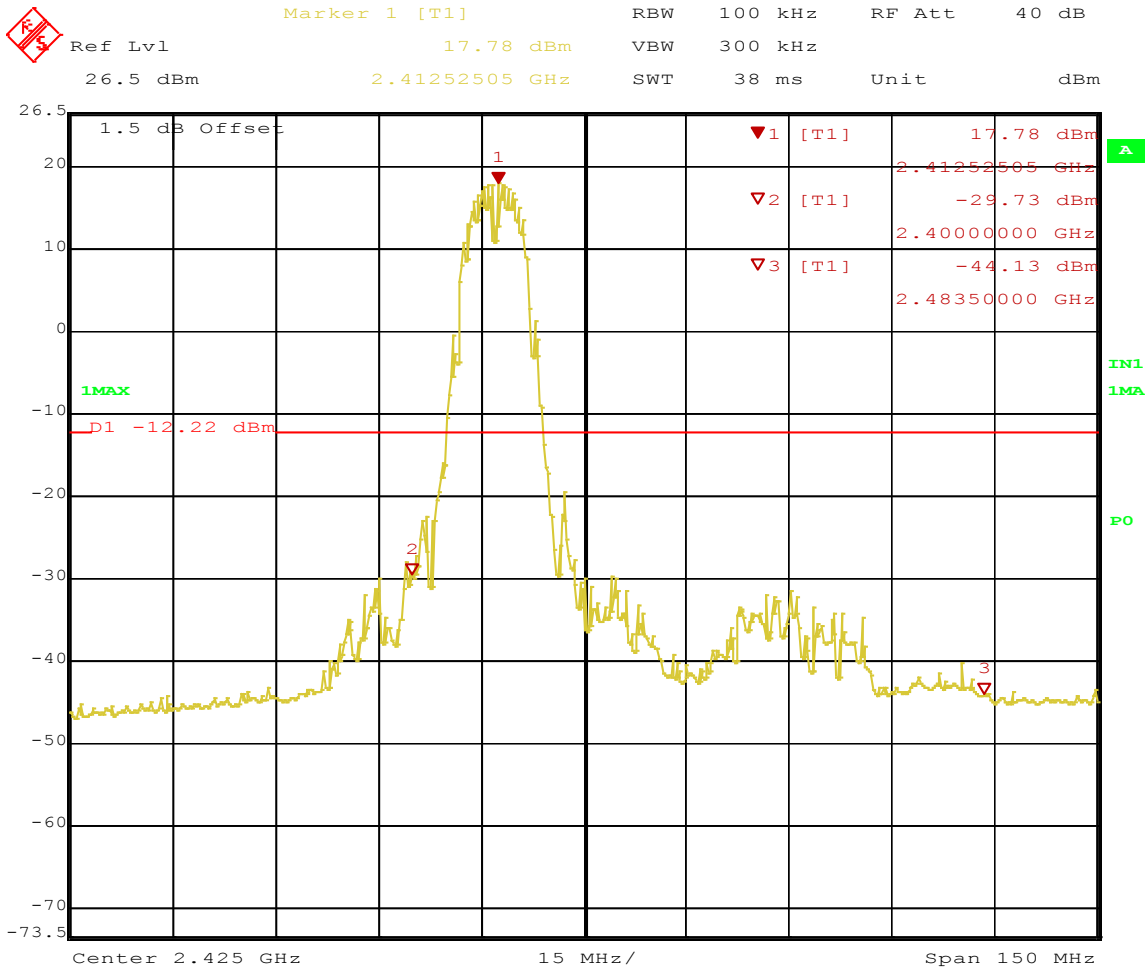

Date: 19.MAY.2011 11:51:53

Figure 7: Band-edge Requirement at Operating Channel 2412 MHz, 5.5MBit/s


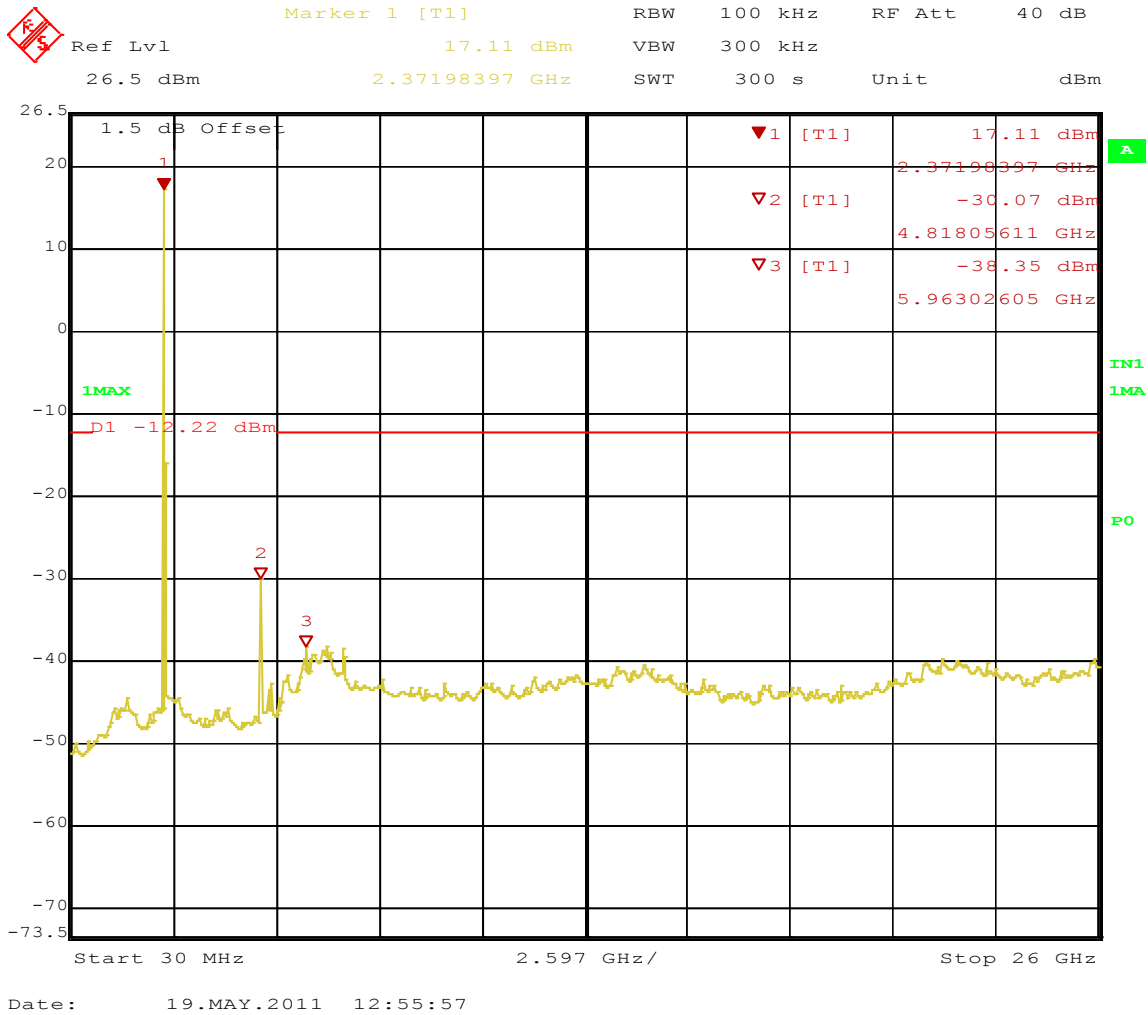


Figure 8: Out of Band Emission for Channel 2412 MHz at 5.5Mbit/s

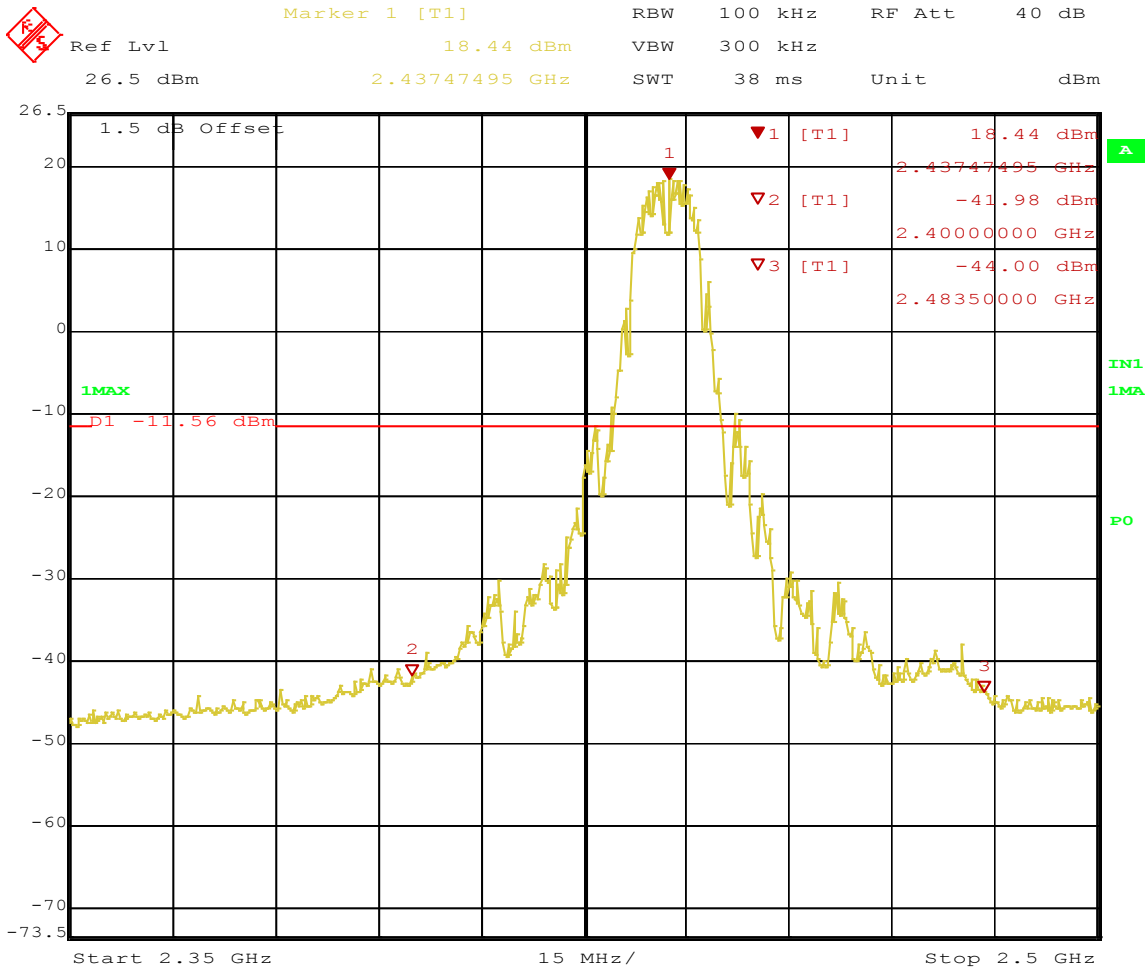

Date: 19.MAY.2011 13:01:40

Figure 9: Band-edge Requirement at Operating Channel 2437 MHz, 5.5MBit/s


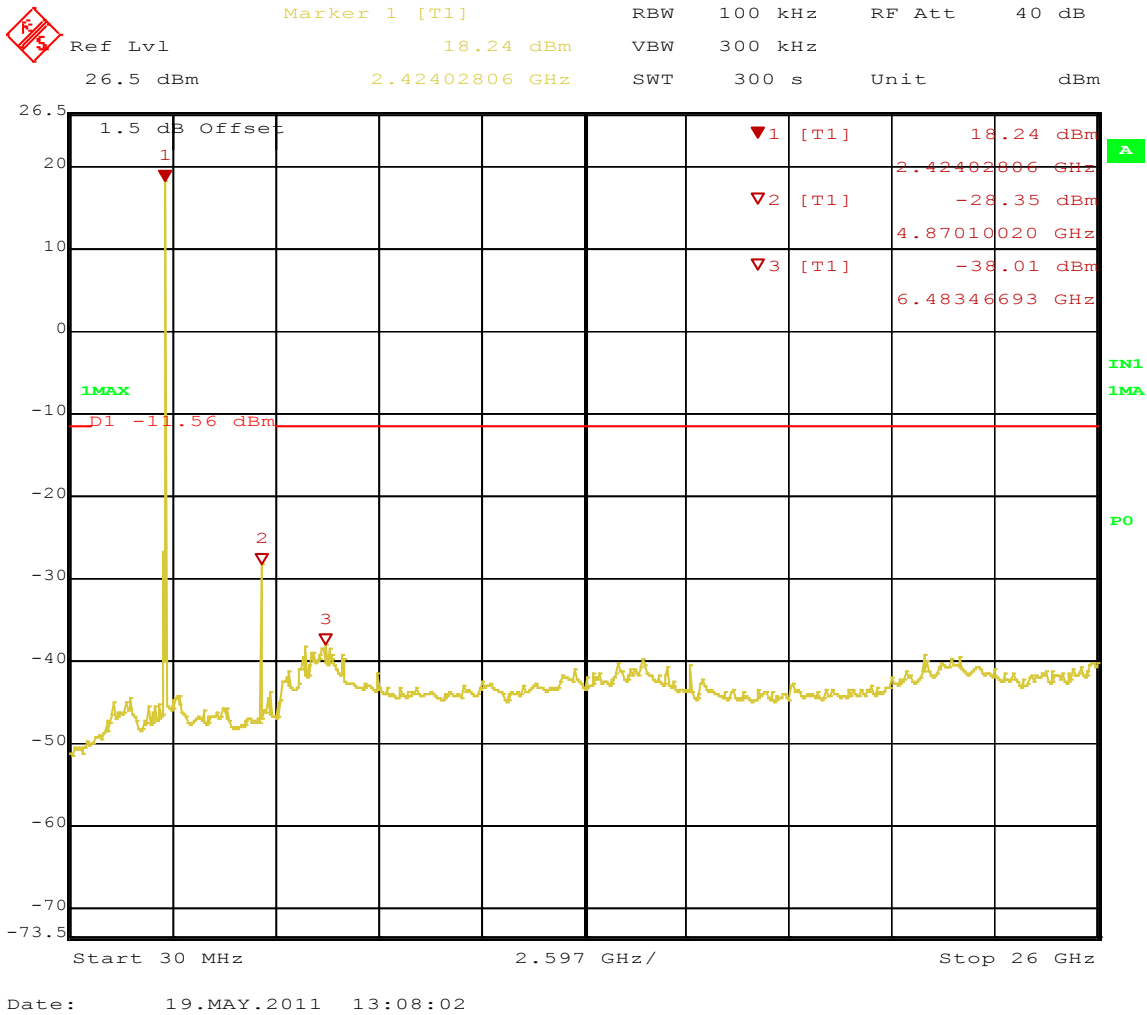


Figure 10: Out of Band Emission for Channel 2437 MHz at 5.5Mbit/s

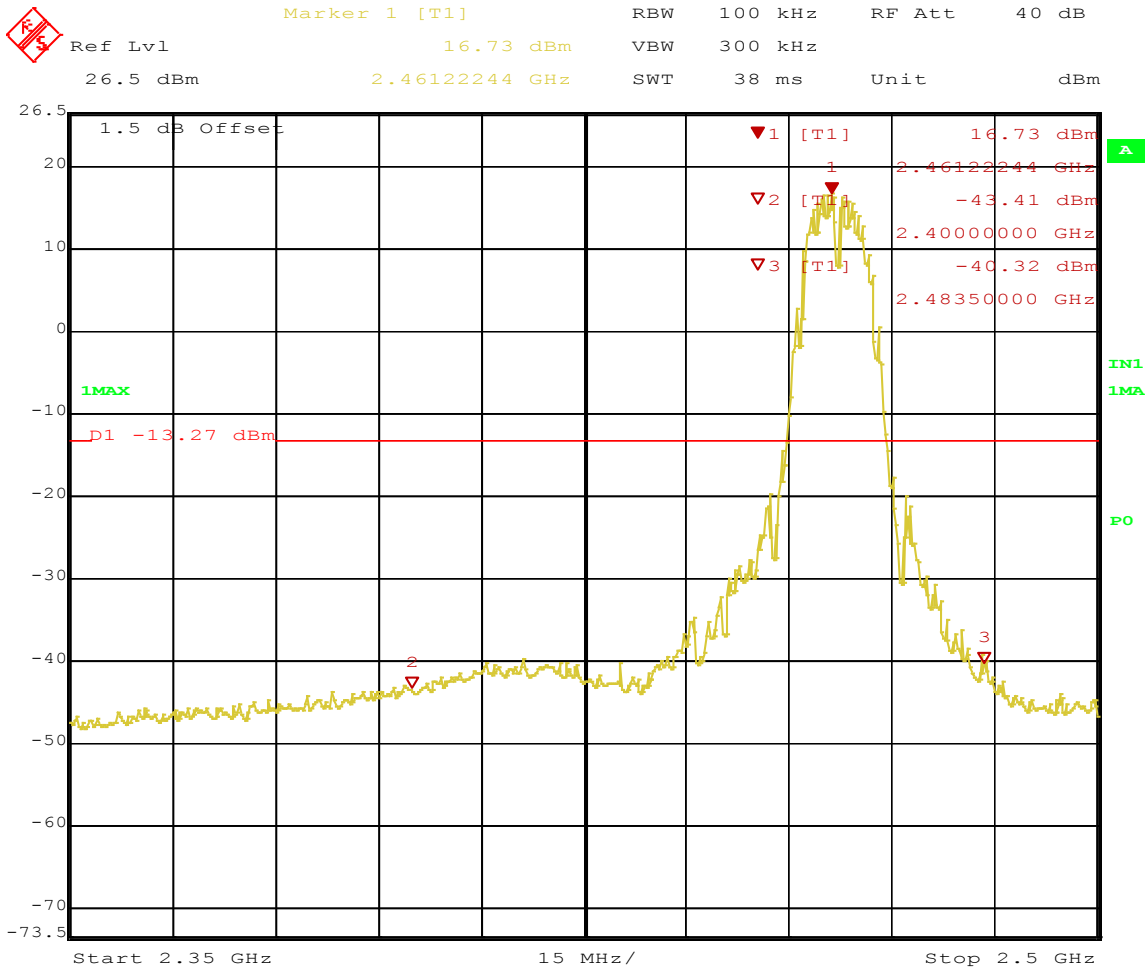

Date: 19.MAY.2011 13:12:55

Figure 11: Band-edge Requirement at Operating Channel 2462 MHz, 5.5MBit/s

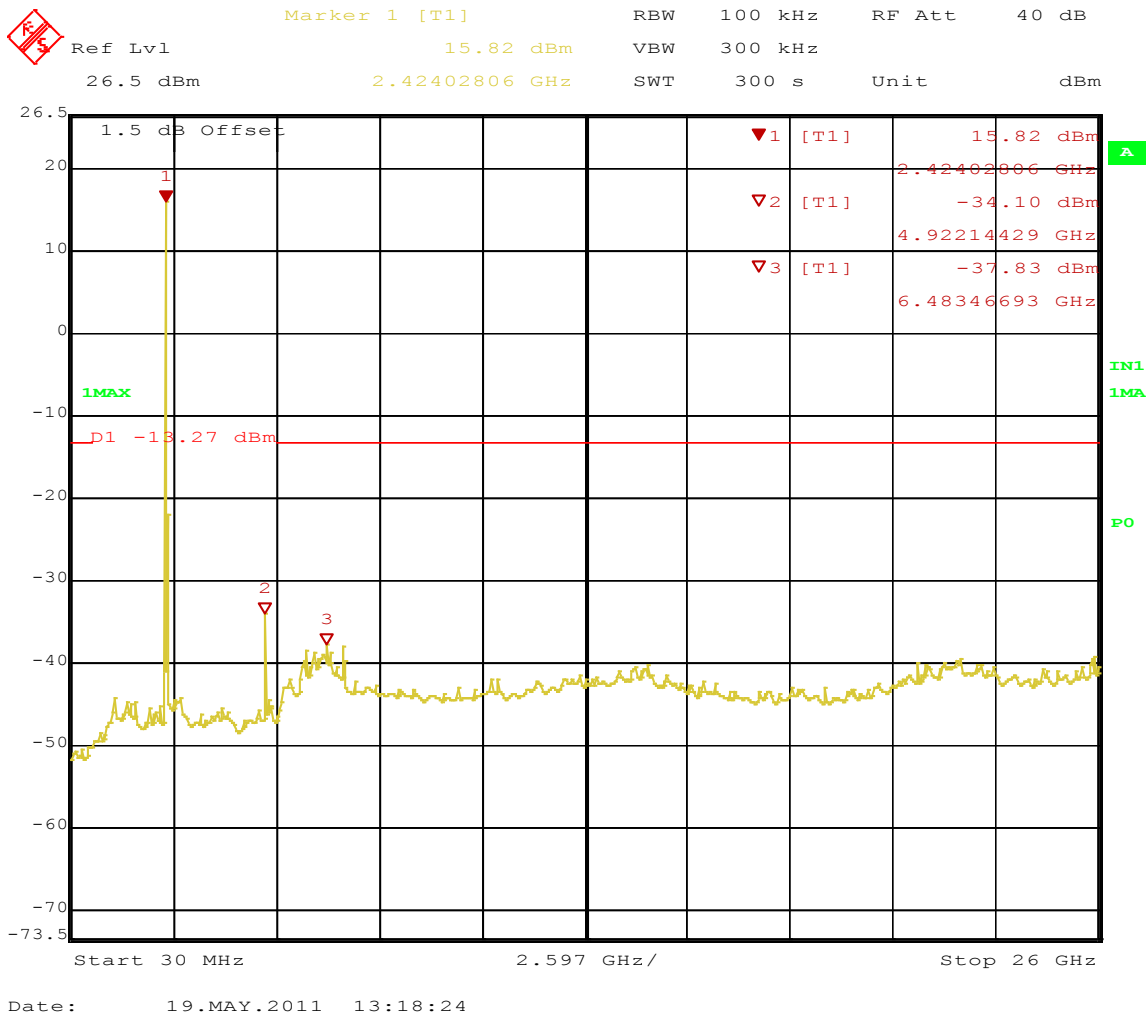


Figure 12: Out of Band Emission for Channel 2462 MHz at 5.5Mbit/s


4.4 Peak Power Spectral Density

According to the CFR47 Part 15.247 (e) and RSS 210 (A8.2), the spectral power density output of the antenna port shall be less than 8 dBm in any 3kHz band during any time interval of continuous transmission.

4.4.1 Test Method

The conducted method was used to measure the channel power output per ANSI C63.10:2009 Section 6.11.2. The measurement was performed with modulation per CFR47 Part 15.247 (e) and RSS 210 (A8.2). This test was conducted on 3 channels of Sample SN AAAA20110400018. The worst sample result indicated below.

Test Setup:

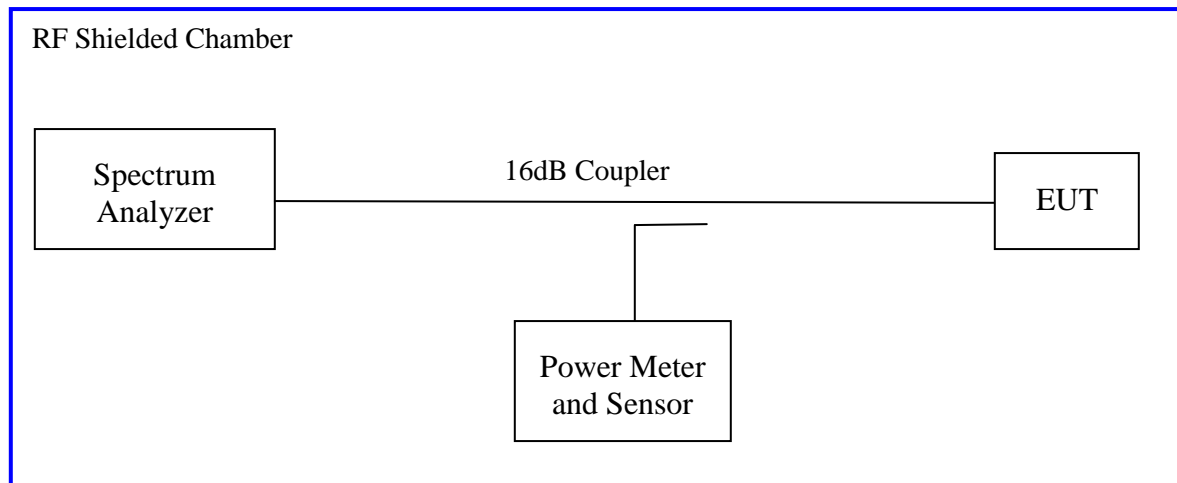

4.4.2 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Table 8: Peak Power Spectral Density – Test Results

Test Conditions: Conducted Measurement, Normal Temperature and Voltage only				
Antenna Type: Integrated		Power Setting: Standard (Fixed)		
Max. Antenna Gain: + 2.0dBi		Signal State: Modulated		
Ambient Temp.: 21 °C		Relative Humidity: 39%		
Peak Power Spectral Density				
Freq. (MHz)	Mode	Chain 0 [dBm]	Limit [dBm]	Margin [dB]
2412	5.5Mbps	-0.769	8.00	-8.77
2437	5.5Mbps	-0.717	8.00	-8.72
2462	5.5Mbps	-0.714	8.00	-8.71
Note: None.				

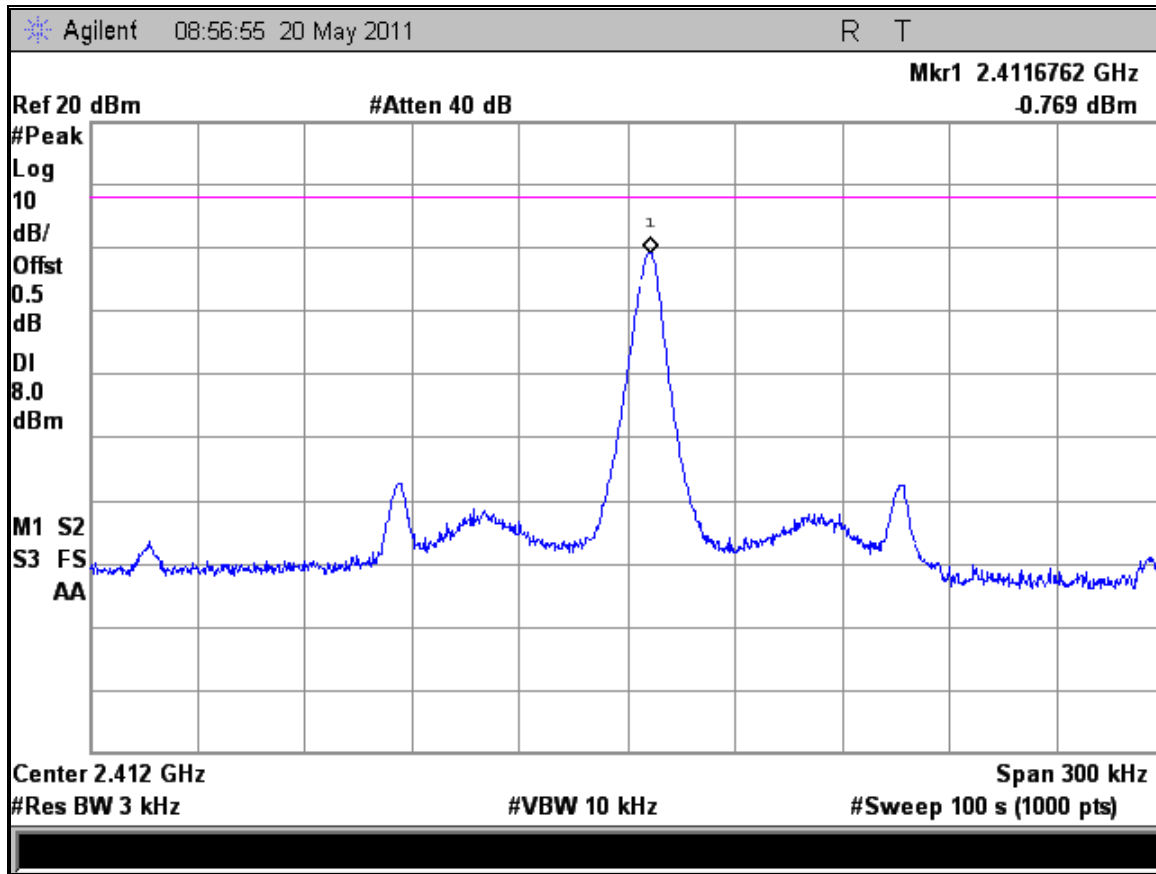


Figure 13: Peak Power Spectral Density for Operating Channel 2412 MHz – 5.5Mbps

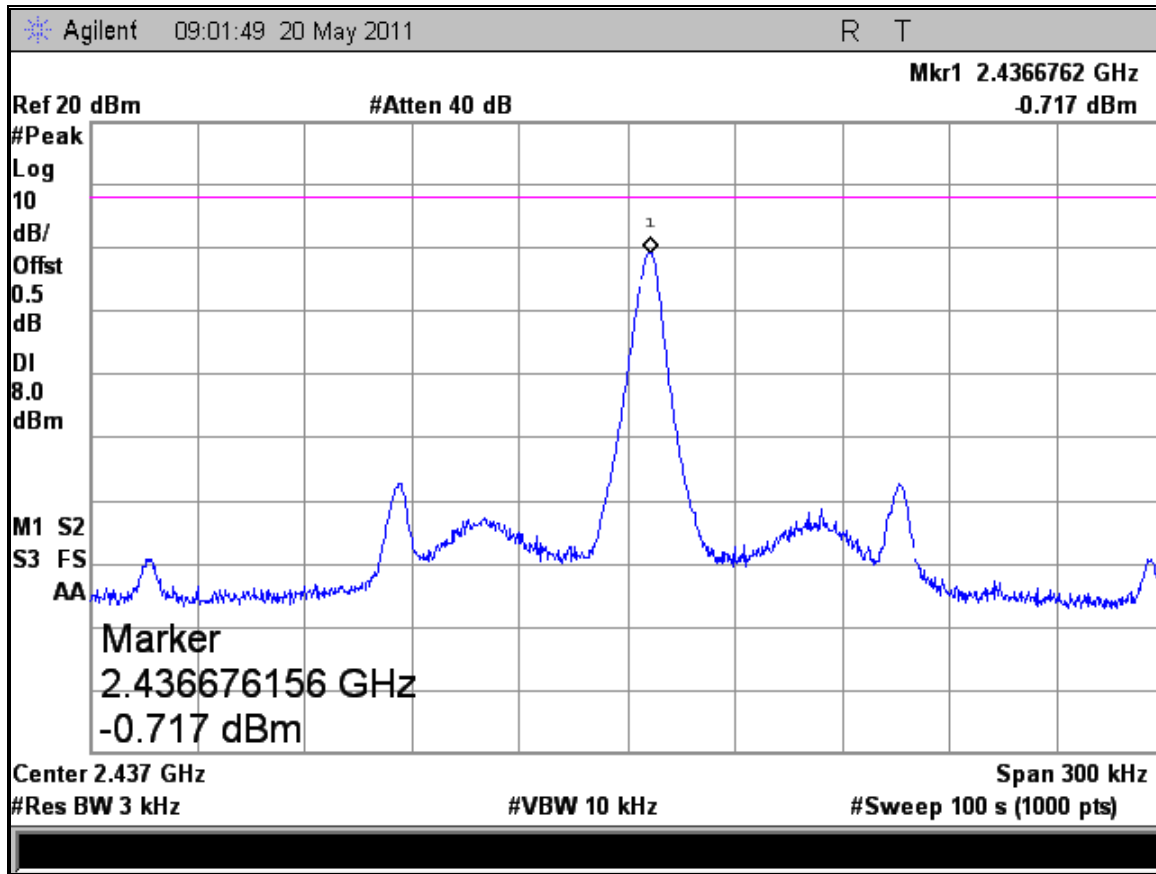


Figure 14: Peak Power Spectral Density for Operating Channel 2437 MHz – 5.5Mbps

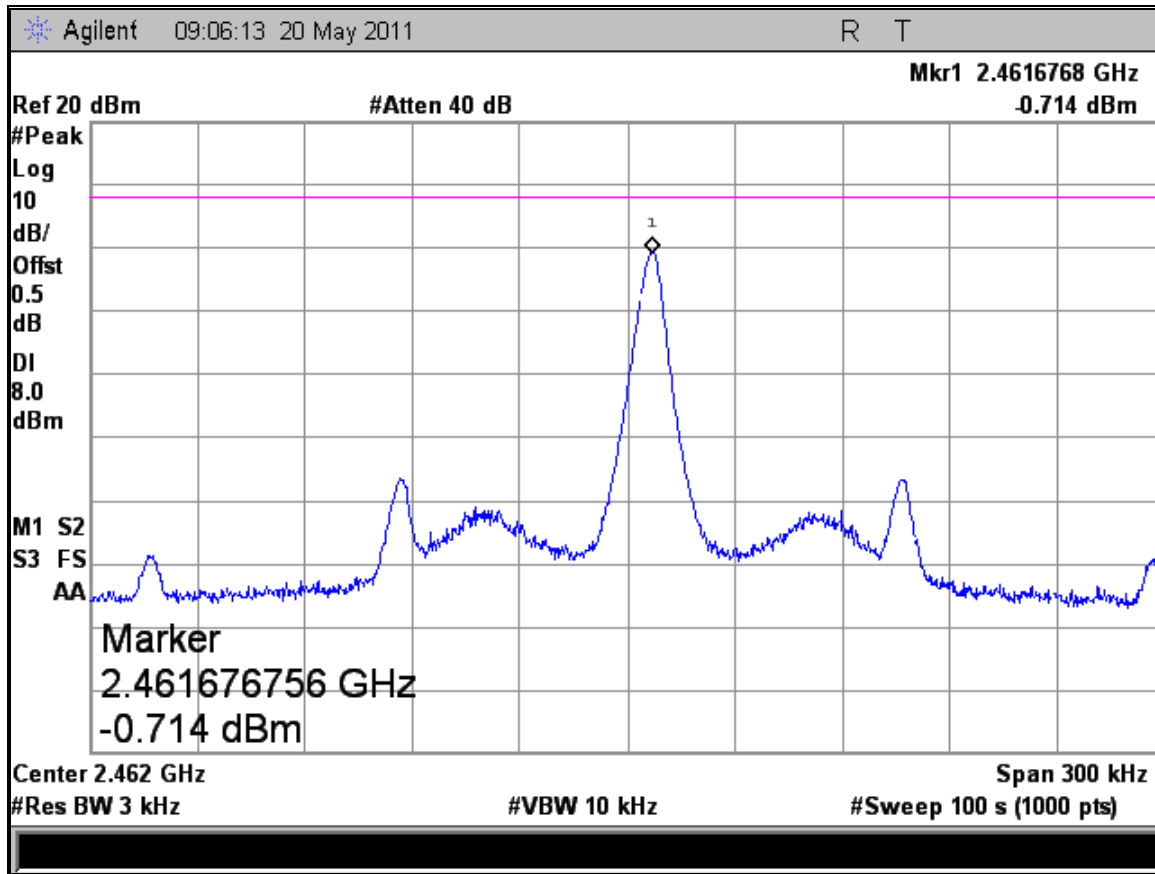


Figure 15: Peak Power Spectral Density for Operating Channel 2462 MHz – 5.5Mbps

4.5 Maximum Permissible Exposure

4.5.1 Test Methodology

In this section, we try to prove that safety of radiation harmfulness to the human body for the product. The limit for SAR specified in FCC 2.1093 is exempt.

4.5.2 RF Exposure Limit

According to FCC 2.1093 the limits for general population/uncontrolled exposure is 0.08 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 1.6 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 4 W/kg, as averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube).

4.5.3 EUT Operating Condition

The ViSi Mobile Monitor is a body-worn product. It will be in direct contact with the user/ patiente.

4.5.4 Classification

The antenna of the product, under normal use condition, is less than 20cm away from the body of the user. This device is classified as a **Portable Device**.

4.5.5 Results

4.5.5.1 Antenna Gain

The transmitting antenna was integrated. The antenna gain was +2.0 dBi or 1.58 (numeric).

4.5.5.2 Output Power into Antenna:

Since the device is a standalone transmitter operating in 2.4GHz range, the SAR exclusion threshold is used for calculation;

$$\left[\frac{\text{max. power of channel, including tolerance, mW}}{(60/\sqrt{f(\text{GHz})}, \text{mW})} \right] \left[\frac{20 \text{ mm}}{\text{min. separation distance, mm}} \right] \leq 1.0$$

The highest measured power is +7.03 dBm or 5.04 mW

The minimum separation distance is 3.4 mm

Frequency is 2.4835 GHz.

$$\begin{aligned}\text{Threshold} &= [5.04\text{mW} / ((60/\sqrt{(2.4835\text{GHz}))})] * [20 \text{ mm}/3.4]; \text{ must less than } 1.0 \\ &= [5.04 / 38.07] * [5.88] \\ &= 0.778 \leq 1.0;\end{aligned}$$

Since the threshold is less than factor of 1, it is exempted from SAR evaluation.

According to the above calculation, the EUT was found to be compliant to the requirements of the test standard(s) per SAR exclusion.

Ref. :Chan Wok, TCB Workshop 2012, RF Exposure, Page 24.

4.6 Transmitter Spurious Emissions

Transmitter spurious emissions are emissions outside the frequency range of the equipment when the equipment is in transmit mode; per requirement of CFR47 15.205, 15.209, 15.247(d), RSS 210 Sect. A.8.5

4.6.1 Test Methodology

4.6.1.1 Preliminary Test

A test program that controls instrumentation and data logging was used to automate the preliminary RF emission test procedure. The frequency range of interest was divided into sub-ranges to yield a frequency resolution of approximately 120 kHz and provide a reading at each frequency for no more than 12° of turntable rotation. For each frequency sub-range the turntable was rotated 360° while peak emission data was recorded and plotted over the frequency range of interest in horizontal and vertical antenna polarization's.

Preliminary emission profile testing was performed inside the anechoic chamber. The EUT was placed on a 1.0m x 1.5m non-conductive table 80cm above the floor. The EUT was positioned as shown in the setup photographs. The receiving antenna was placed at a distance of 3m at a fixed height of 1m. Measurement equipment was located outside of the chamber. A video camera was placed inside the chamber to view the EUT.

Preliminary scans were performed on 3 orthogonal axis with different data rates.

Worst case was observed at 1 Mbps on Z-Axis.

4.6.1.2 Final Test

For each frequency measured, the peak emission was maximized by manipulating the receiving antenna from 1 to 4 meters above the ground plane and placing it at the position that produced the maximum signal strength reading. The turntable was then rotated through 360° while observing the peak signal and placing the EUT at the position that produced maximum radiation. The six highest emissions relative to the limit were measured unless such emissions were more than 20 dB below the limit. If less than six emissions are within 20 dB of the limit, than the noise level of the receiver is measured at frequencies where emissions are expected. Multiples of all oscillator and microprocessor frequencies were also checked.

Final testing was performed on an NSA compliant test site. The EUT was placed on a 1.0m x 1.5m non-conductive table 80cm above the ground plane. The placement of EUT and cables were the same as for preliminary testing and is shown in the setup photographs.

The final band-edge and spurious emission scans performed on the Z-Axis for three operating channels; 2412 MHz, 2437 MHz, and 2462 MHz at 1Mbit/s for 802.11b mode with EUT positioned vertically.

4.6.1.3 Deviations

None.

4.6.2 Transmitter Spurious Emission Limit

The spurious emissions of the transmitter shall not exceed the values in CFR47 Part 15.205, 15.209: 2010 and RSS 210 A1.1.2 2010.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490.....	2400/F (kHz)	300
0.490-1.705.....	24000/F (kHz)	30
1.705-30.0.....	30	30
30-88.....	100 **	3
88-216.....	150 **	3
216-960.....	200 **	3
Above 960.....	500	3

All harmonics and spurious emission which are outside of the restricted band shall be 20dB below the in-band peak emission.


4.6.3 Test Results

The final measurement data was taken under the worst case operating modes, configurations, and/or cable positions. It also reflects the results including any modifications and/or special accessories listed in Sections 1.4 and 1.5.

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).


Table 9: Transmit Spurious Emission at Band-Edge Requirements

Test Conditions: Radiated Measurement, Normal Temperature and Voltage only							
Antenna Type: Integrated				Power Setting: Standard (fixed)			
Max. Antenna Gain: + 2.0 dBi				Signal State: Modulated			
Ambient Temp.: 22 °C				Relative Humidity: 34%			
Band-Edge Results							
Operating Channel	EUT Position	Polarity	Pk Plots	Peak Limit	Ave. Plots	Ave. Limit	Result
2412 MHz	Y-Axis	Horizontal	Fig. 16	74.00	Fig. 17	54.00	Pass
2412 MHz	Y-Axis	Vertical	Fig. 18	74.00	Fig. 19	54.00	Pass
2437 MHz	Y-Axis	Horizontal	Fig. 20	74.00	Fig. 21	54.00	Pass
2437 MHz	Y-Axis	Vertical	Fig. 22	74.00	Fig. 23	54.00	Pass
2462 MHz	Y-Axis	Horizontal	Fig. 24	74.00	Fig. 25	54.00	Pass
2462 MHz	Y-Axis	Vertical	Fig. 26	74.00	Fig. 27	54.00	Pass

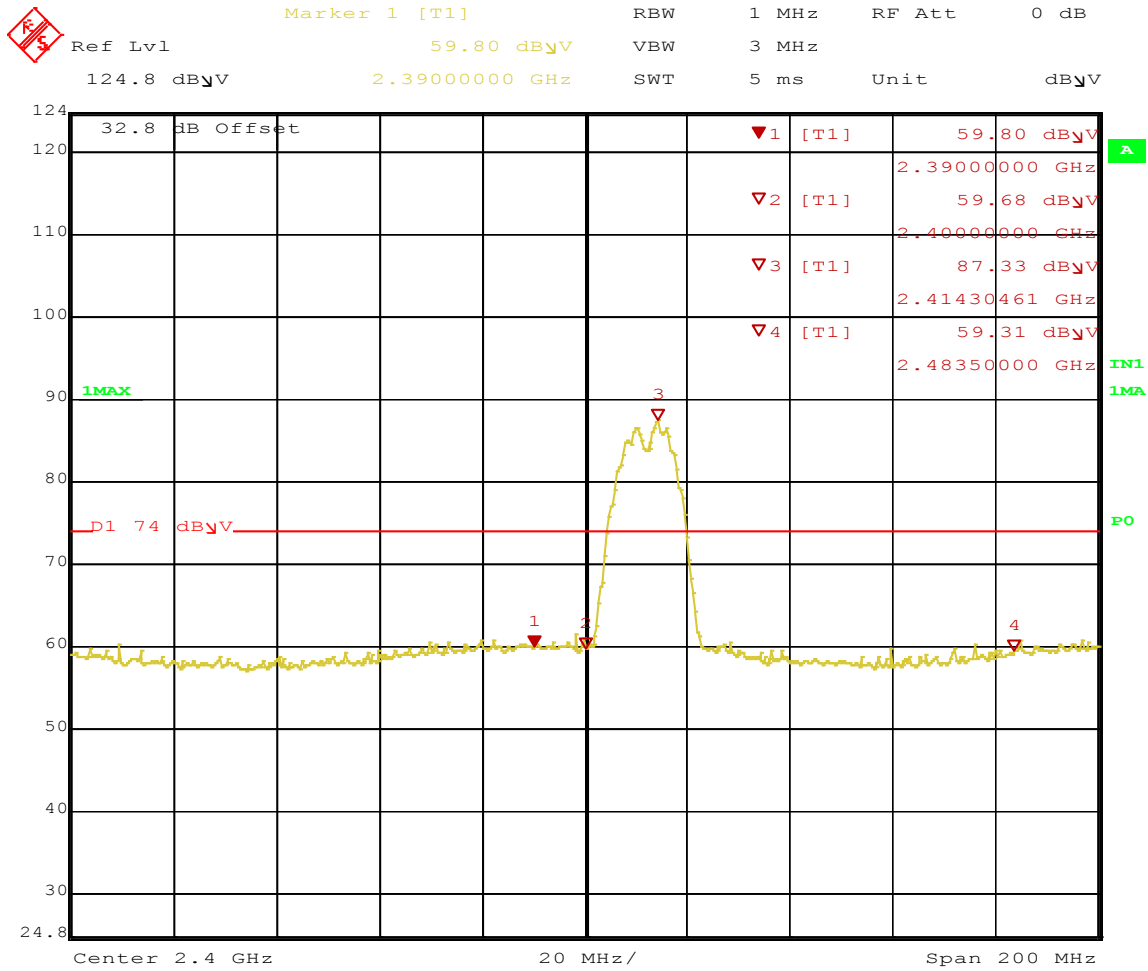


Date: 2.JUN.2011 15:29:05

Figure 16: Radiated Emission at the Edge for Channel 2412 MHz at 1 Mbps – Horizontal (Peak)

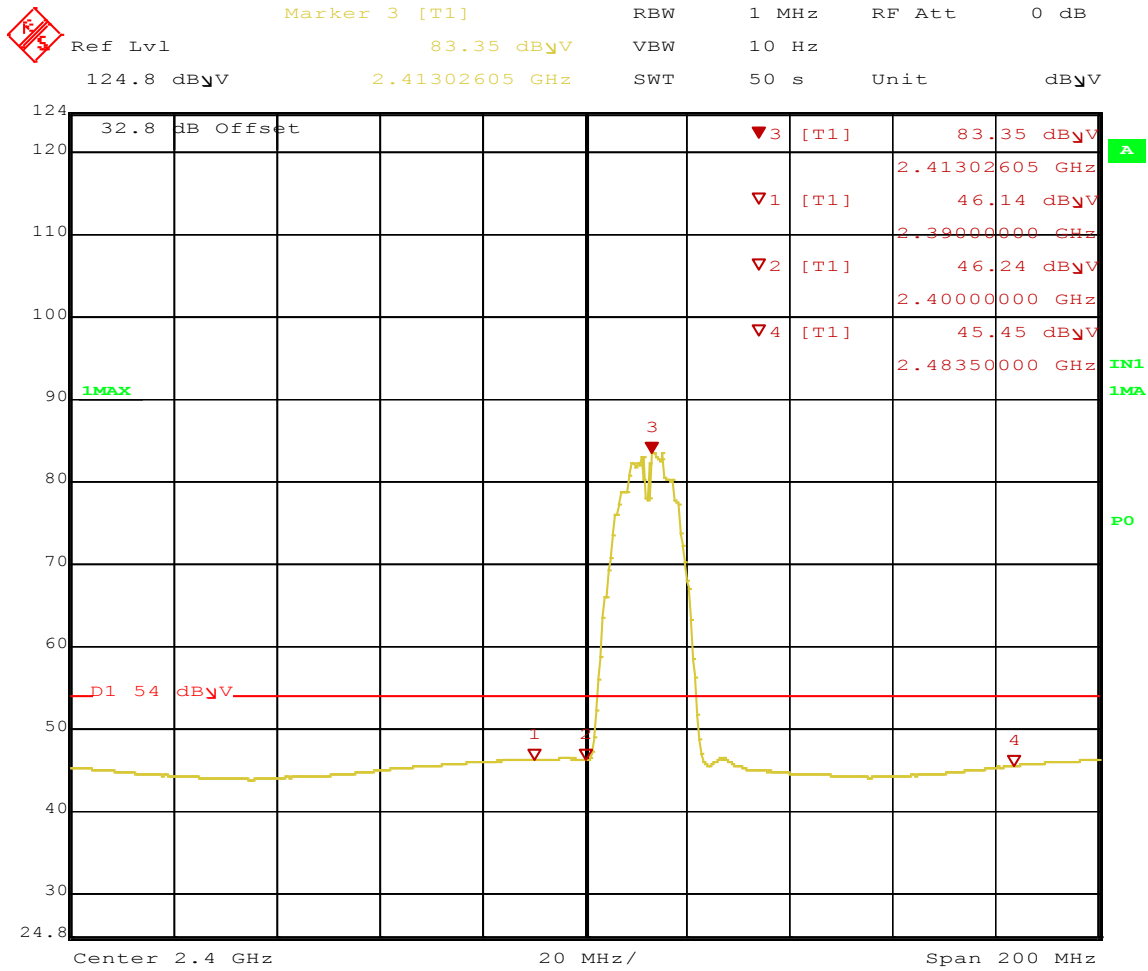


Date: 2.JUN.2011 15:31:23

Figure 17: Radiated Emission at the Edge for Channel 2412 MHz at 1 Mbps – Horizontal (Ave.)

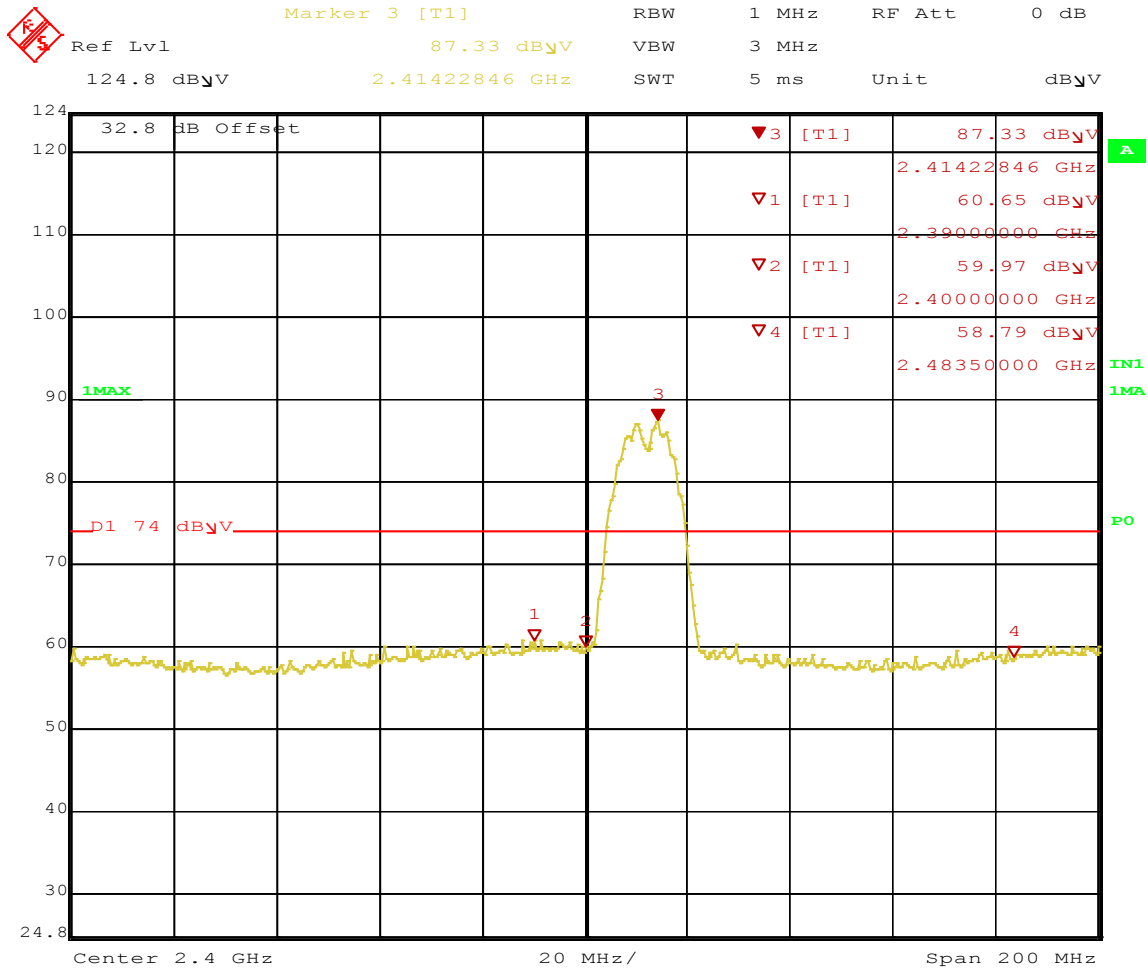


Date: 2.JUN.2011 15:33:16

Figure 18: Radiated Emission at the Edge for Channel 2412 MHz at 1 Mbps – Vertical (Peak)

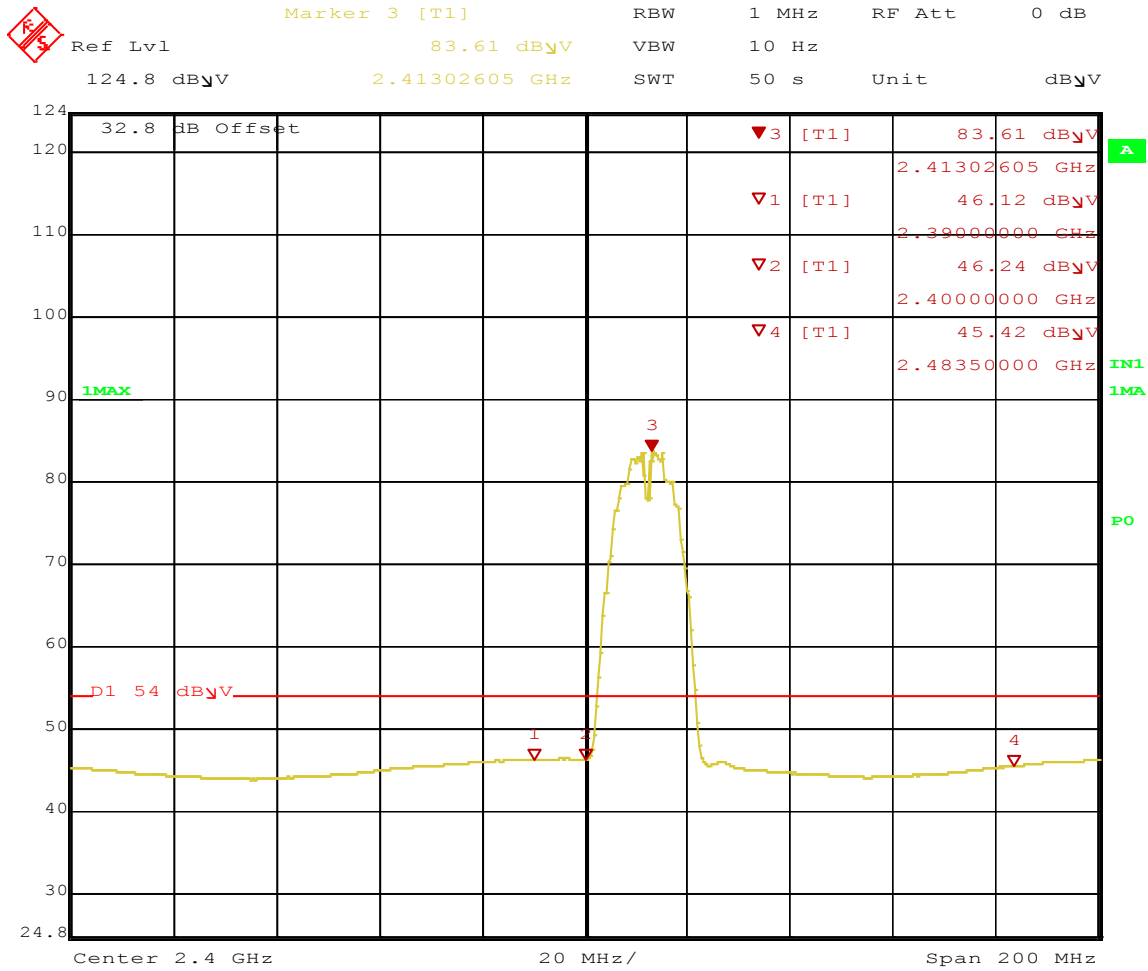


Date: 2.JUN.2011 15:34:41

Figure 19: Radiated Emission at the Edge for Channel 2412 MHz at 1 Mbps – Vertical (Ave)

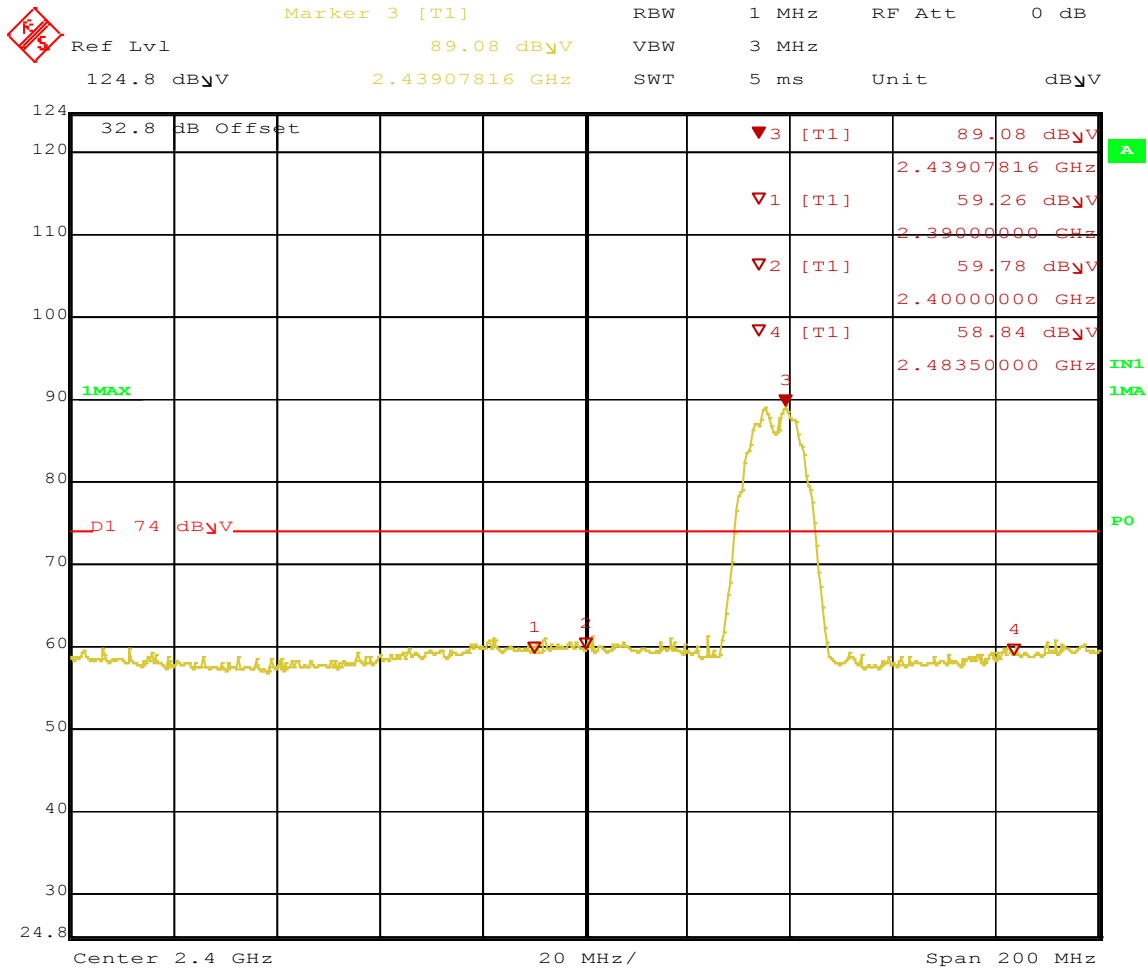


Date: 2.JUN.2011 15:37:44

Figure 20: Radiated Emission at the Edge for Channel 2437 MHz at 1 Mbps – Horizontal (Peak)

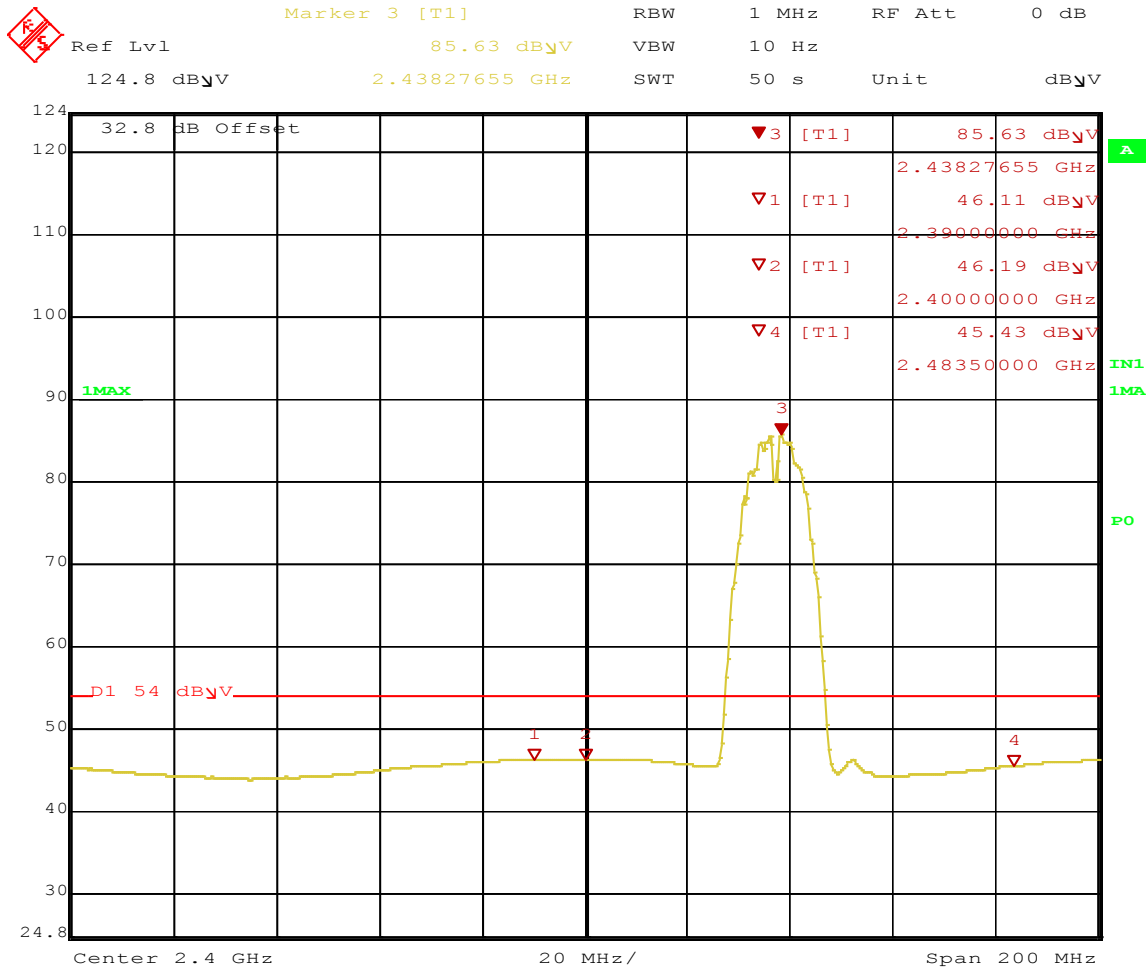


Date: 2.JUN.2011 15:39:10

Figure 21: Radiated Emission at the Edge for Channel 2437 MHz at 1 Mbps – Horizontal (Ave)

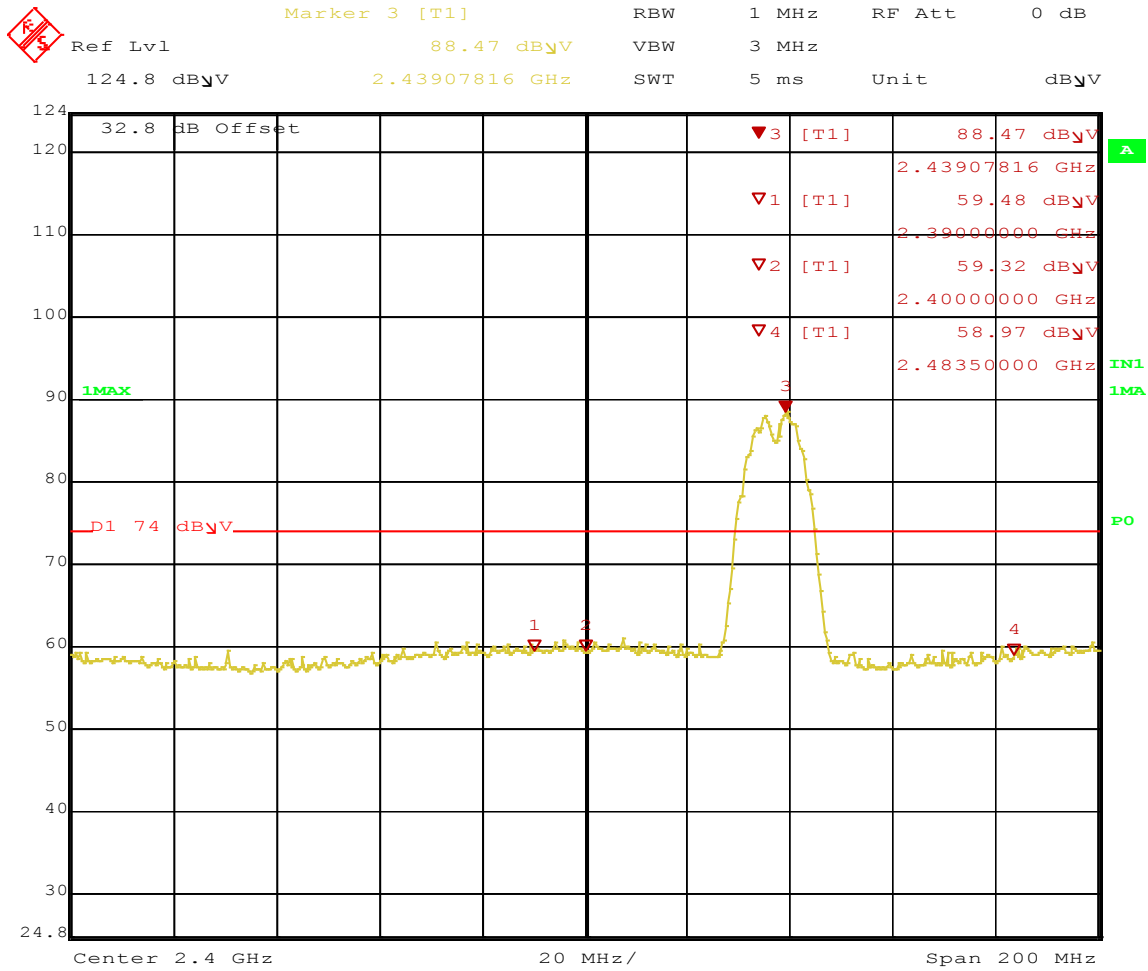


Date: 2.JUN.2011 15:41:26

Figure 22: Radiated Emission at the Edge for Channel 2437 MHz at 1 Mbps – Vertical (Peak)

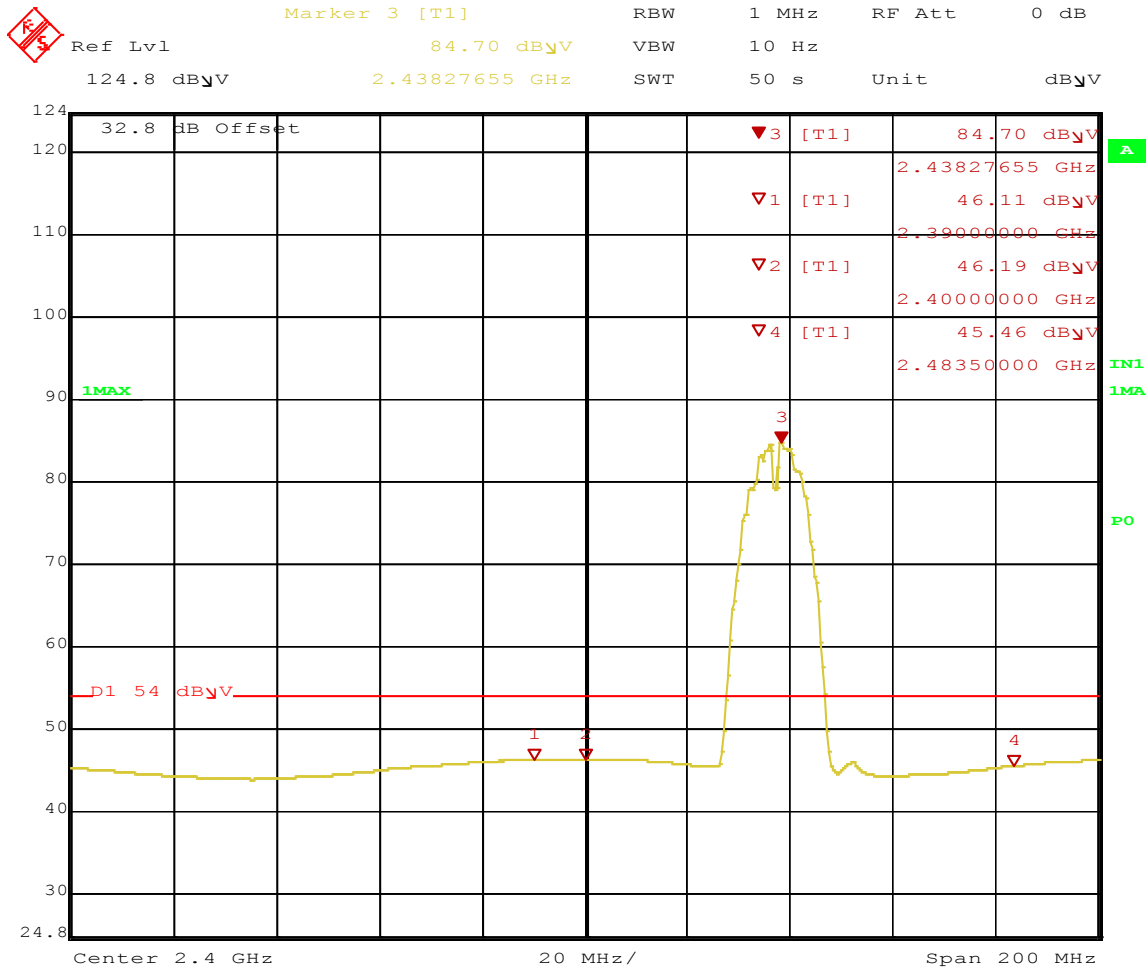


Date: 2.JUN.2011 15:42:55

Figure 23: Radiated Emission at the Edge for Channel 2437 MHz at 1 Mbps – Vertical (Ave)

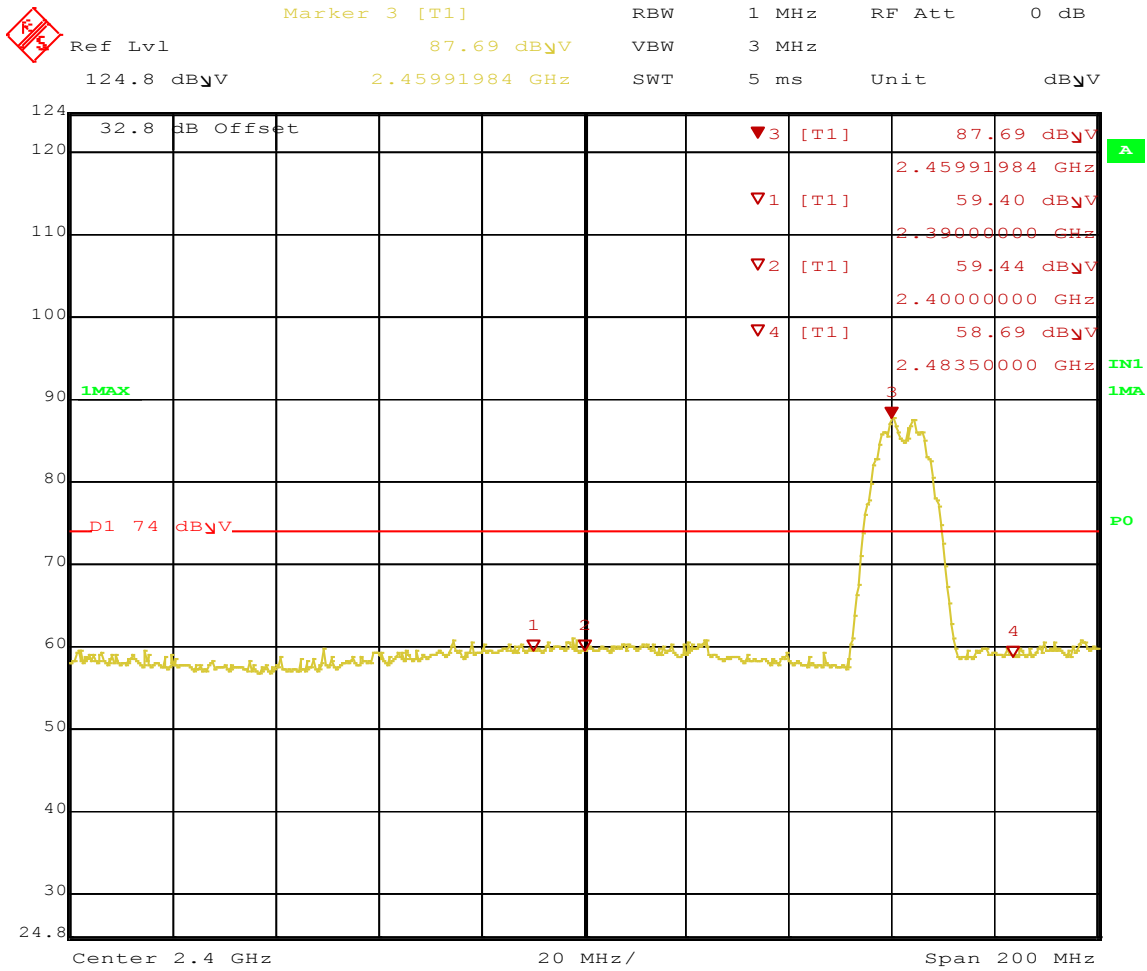


Date: 2.JUN.2011 15:56:13

Figure 24: Radiated Emission at the Edge for Channel 2462 MHz at 1 Mbps – Horizontal (Peak)

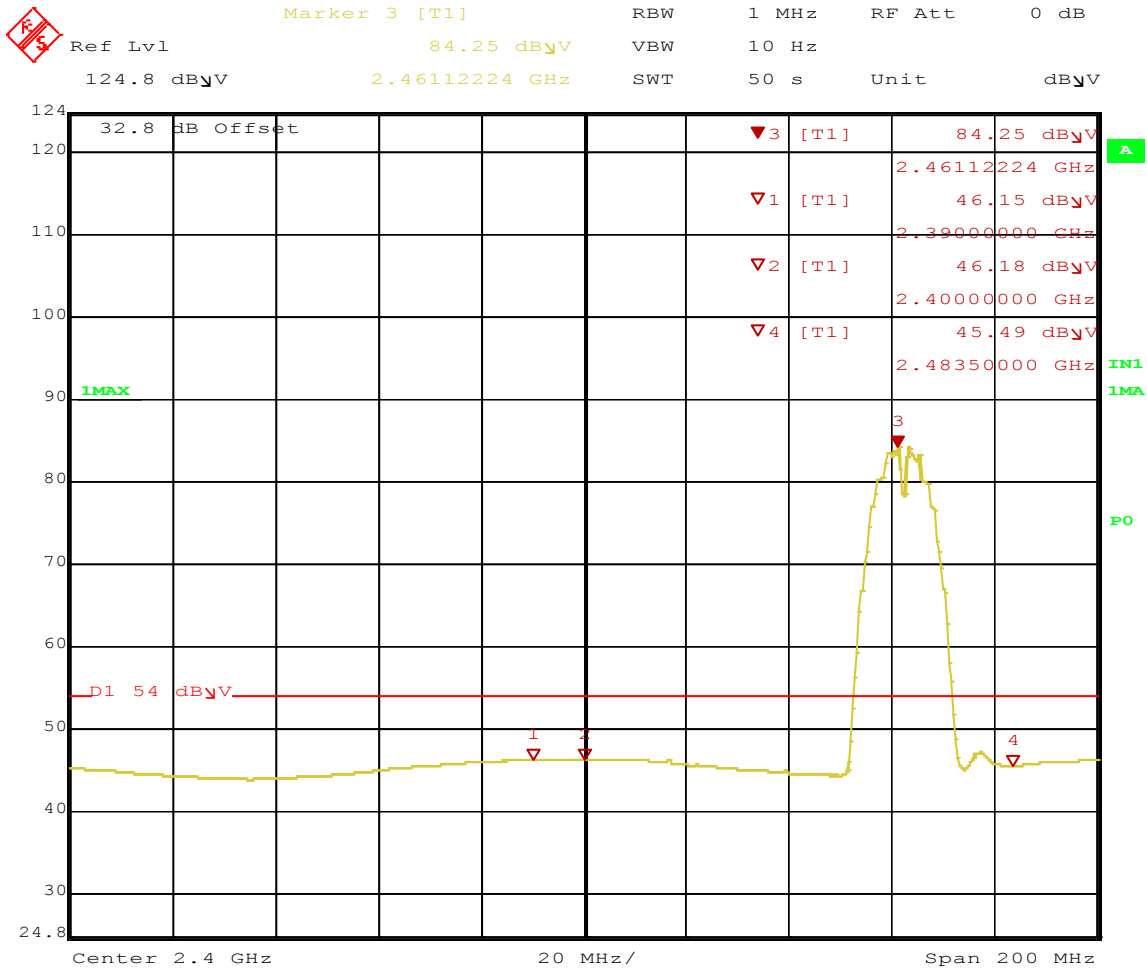


Date: 2.JUN.2011 15:57:41

Figure 25: Radiated Emission at the Edge for Channel 2462 MHz at 1 Mbps – Horizontal (Ave)

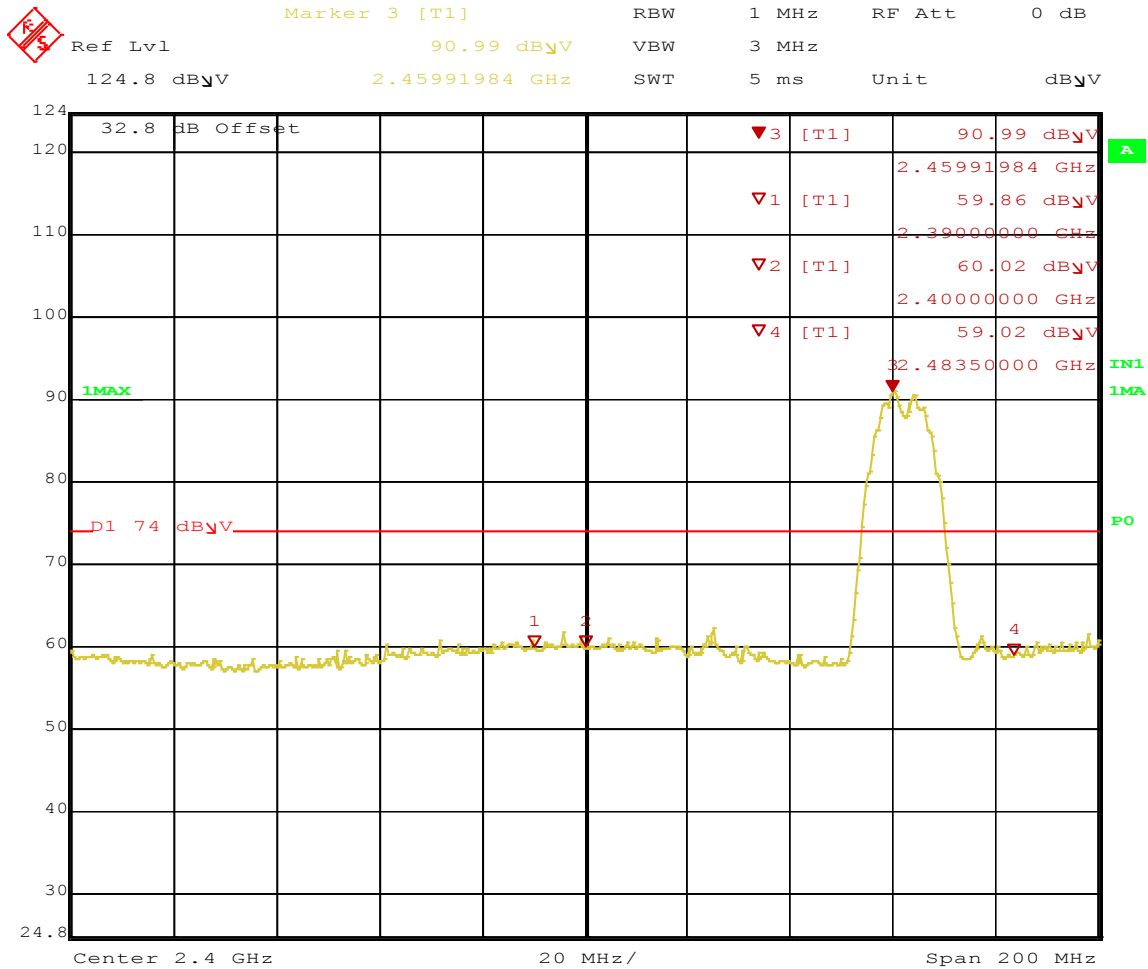

Date: 2.JUN.2011 16:01:21

Figure 26: Radiated Emission at the Edge for Channel 2462 MHz at 1 Mbps – Vertical (Peak)

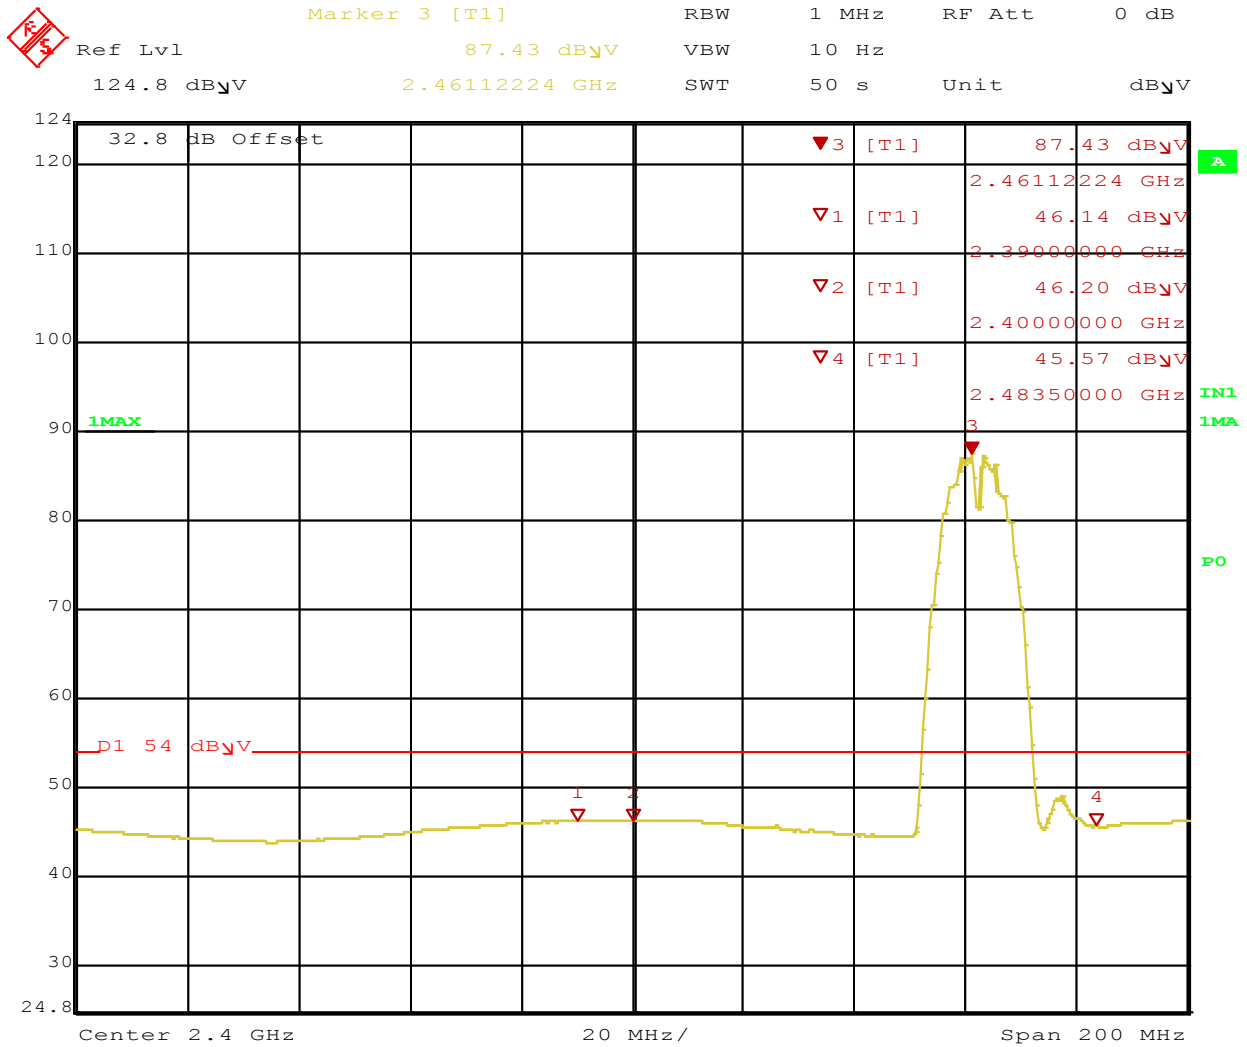

Date: 2.JUN.2011 16:02:47

Figure 27: Radiated Emission at the Edge for Channel 2462 MHz at 1 Mbps – Vertical (Ave)

SOP 1 Radiated Emissions							Tracking # 31151518.003 Page 1 of 6				
EUT Name	ViSi Mobile Monitor						Date	May 17, 2011			
EUT Model	92-10010						Temp / Hum in	23°C / 39%rh			
EUT Serial	AAAA20110400016						Temp / Hum out	N/A			
EUT Config.	802.11b, 1Mbps at Z-Axis (30MHz-1GHz)						Line AC / Freq	Battery Operated			
Standard	CFR47 Part 15 Subpart C						RBW / VBW	120 kHz/ 300 kHz			
Dist/Ant Used	3m / JB3						Performed by	Jeremy Luong			
Emission Freq (MHz)	ANT Polar (H/V)	ANT Pos (cm)	Table Pos (deg)	FIM (Pk) (dBuV/m)	FIM QP (dBuV/m)	Total CF (dBuV)	E-Field QP (dBuV/m)	Spec Limit (dBuV/m)	Spec Margin (dB)	Type	
Transmitted Data at 2412 MHz											
223.98	H	110	107	32.02	30.85	-13.73	10.12	46.02	-35.90	Spurious	
287.99	H	109	101	33.00	31.39	-10.93	24.32	46.02	-21.70	Spurious	
319.99	H	106	104	29.41	27.90	-10.05	24.55	46.02	-21.47	Spurious	
351.99	H	106	280	28.29	26.47	-9.44	24.78	46.02	-21.24	Spurious	
Spec Margin = E-Field QP – Limit, E-Field QP = FIM QP+ Total CF ± Uncertainty											
Total CF= Amp Gain + Cable Loss + ANT Factor											
Combined Standard Uncertainty $u_c(y) = \pm 3.2$ dB Expanded Uncertainty $U = ku_c(y)$ $k = 2$ for 95% confidence											
Note: Channel 1, 2412 MHz was the worst case at 1Mbps											



SOP 1 Radiated Emissions							Tracking # 31151518.003 Page 2 of 6				
EUT Name	ViSi Mobile Monitor						Date	May 25, 2011			
EUT Model	92-10010						Temp / Hum in	21°C / 36%rh			
EUT Serial	AAAA20110400016						Temp / Hum out	N/A			
EUT Config.	802.11b, 1Mbps at Z-Axis (above 1GHz)						Line AC / Freq	Battery Operated			
Standard	CFR47 Part 15 Subpart C						RBW / VBW	1MHz / 3MHz			
Dist/Ant Used	3m / EMCO3115						Performed by	Jeremy Luong			
Emission Freq (MHz)	ANT Polar (H/V)	ANT Pos (cm)	Table Pos (deg)	FIM (Pk) (dBuV/m)	FIM Ave. (dBuV/m)	Total CF (dBuV)	E-Field Pk/Ave. (dBuV/m)	Spec Limit (dBuV/m)	Spec Margin (dB)	Type	
Transmitted Data at 2412 MHz at 802.11b, 1Mbit/s											
4824.11	H	138	270	41.85	34.55	2.42	36.97	53.98	-17.01	Restricted	
4824.13	V	181	-38	39.67	34.06	2.42	36.48	53.98	-17.50	Restricted	
9648.14	H	222	-13	38.03	31.51	10.59	42.10	53.98	-11.88	Restricted	
19296.10	V	93	373	38.86	30.51	11.36	41.87	63.98	-22.11	Unrestricted	
19296.20	H	102	82	38.52	30.80	11.36	42.16	63.98	-21.82	Restricted	
Transmitted Data at 2437 MHz at 802.11b, 1Mbit/s											
4874.08	H	248	104	39.69	31.95	2.52	34.47	53.98	-19.51	Restricted	
4874.11	V	296	339	38.33	29.74	2.52	32.26	53.98	-21.72	Restricted	
19496.20	V	107	81	40.09	32.48	11.55	44.03	63.98	-19.95	Restricted	
19496.20	H	103	14	39.01	30.10	11.55	41.65	63.98	-22.33	Restricted	
Transmitted Data at 2462 MHz at 802.11b, 1Mbit/s											
4924.10	H	161	106	37.26	27.56	2.60	30.16	53.98	-23.82	Restricted	
4924.10	V	100	276	39.14	28.69	2.60	31.29	53.98	-22.69	Restricted	
9848.14	H	99	252	35.56	27.18	11.13	38.31	53.98	-15.67	Unrestricted	
9848.14	V	224	5	35.18	26.72	11.13	37.84	53.98	-16.14	Unrestricted	
19696.20	V	96	211	35.98	28.15	11.71	39.86	63.98	-24.12	Restricted	
19696.20	H	93	78	37.01	30.20	11.71	41.91	63.98	-22.07	Restricted	
Spec Margin = E-Field Ave. - Limit, E-Field Ave. = FIM Ave. + Total CF ± Uncertainty											
Total CF= Amp Gain + Cable Loss + ANT Factor											
Combined Standard Uncertainty $u_c(y) = \pm 3.2\text{dB}$ Expanded Uncertainty $U = ku_c(y)$ $k = 2$ for 95% confidence											
Notes: All emissions in the unrestricted band met the limit under CFR47 Part 15.205											

SOP 1 Radiated Emissions

Tracking # 31151518.003 Page 3 of 6

EUT Name	ViSi Mobile Monitor	Date	May 17, 2011
EUT Model	92-10010	Temp / Hum in	23°C / 39%rh
EUT Serial	AAAA20110400018	Temp / Hum out	N/A
EUT Config.	802.11b, 1Mbps at Z-Axis	Line AC	Battery Operated
Standard	CFR47 Part 15 Subpart C	RBW / VBW	120kHz / 300kHz
Dist/Ant Used	3m / JB3	Performed by	Jeremy Luong

30MHz to 1000MHz Plot for Transmit 802.11b, 1Mbit/s Mode at 2412 MHz

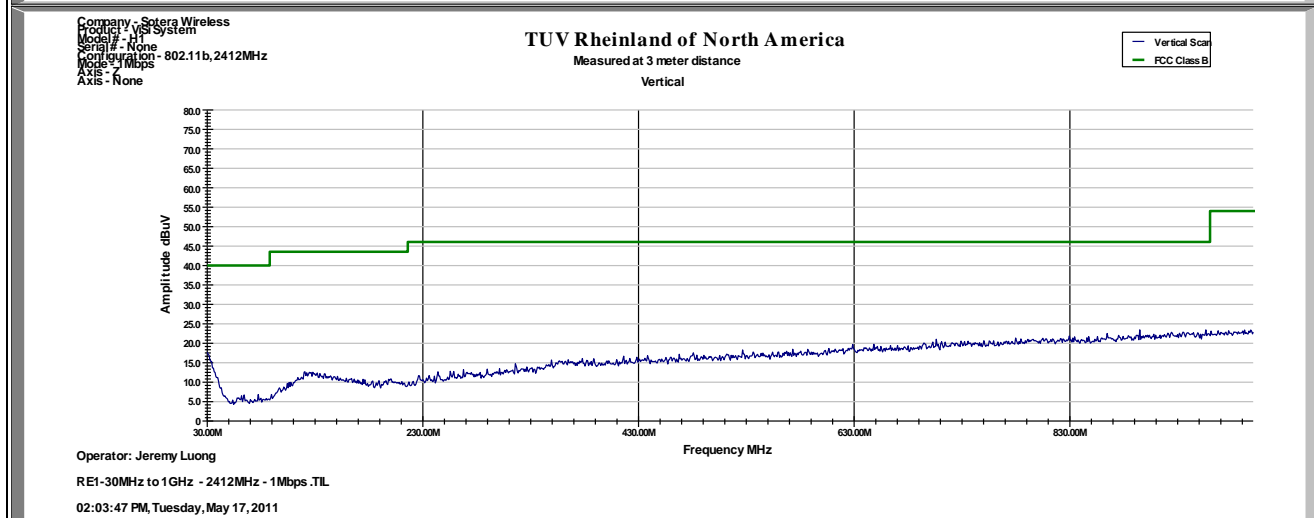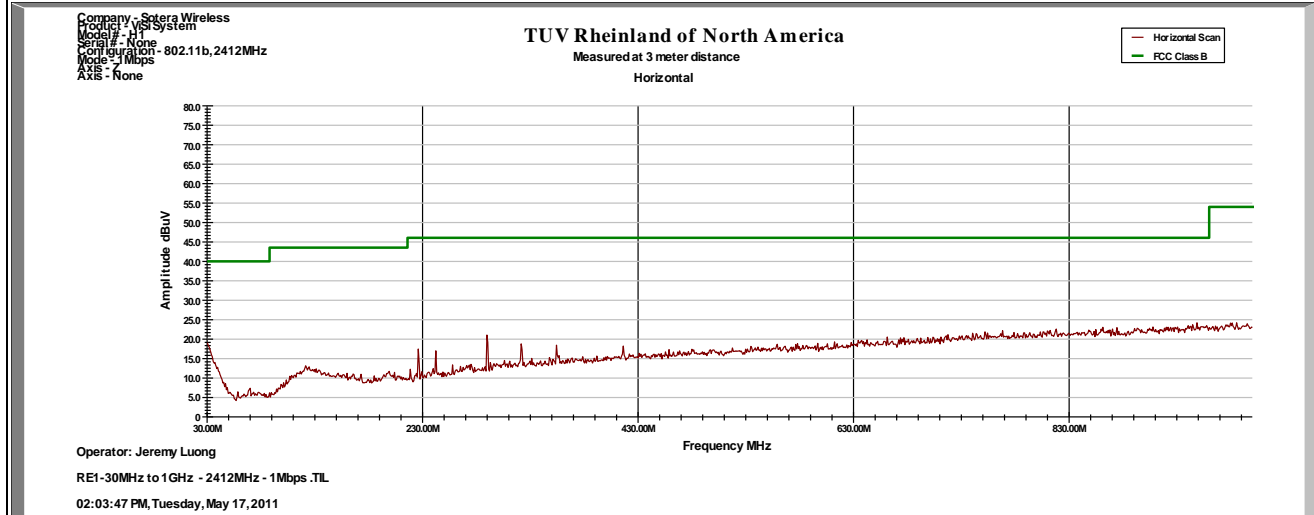



Notes: None.

SOP 1 Radiated Emissions

Tracking # 31151518.003 Page 4 of 6

EUT Name	ViSi Mobile Monitor	Date	May 25, 2011
EUT Model	92-10010	Temp / Hum in	21°C / 36%rh
EUT Serial	AAAA20110400018	Temp / Hum out	N/A
EUT Config.	802.11b, 1Mbps at Z-Axis	Line AC	Battery Operated
Standard	CFR47 Part 15 Subpart C	RBW / VBW	1MHz / 3MHz
Dist/Ant Used	3m - EMCO3115 / 1m - RA42-K-F-4B-C	Performed by	Jeremy Luong

Above 1GHz Plots for Transmit Mode at 2412 MHz, 802.11b 1Mbit/s

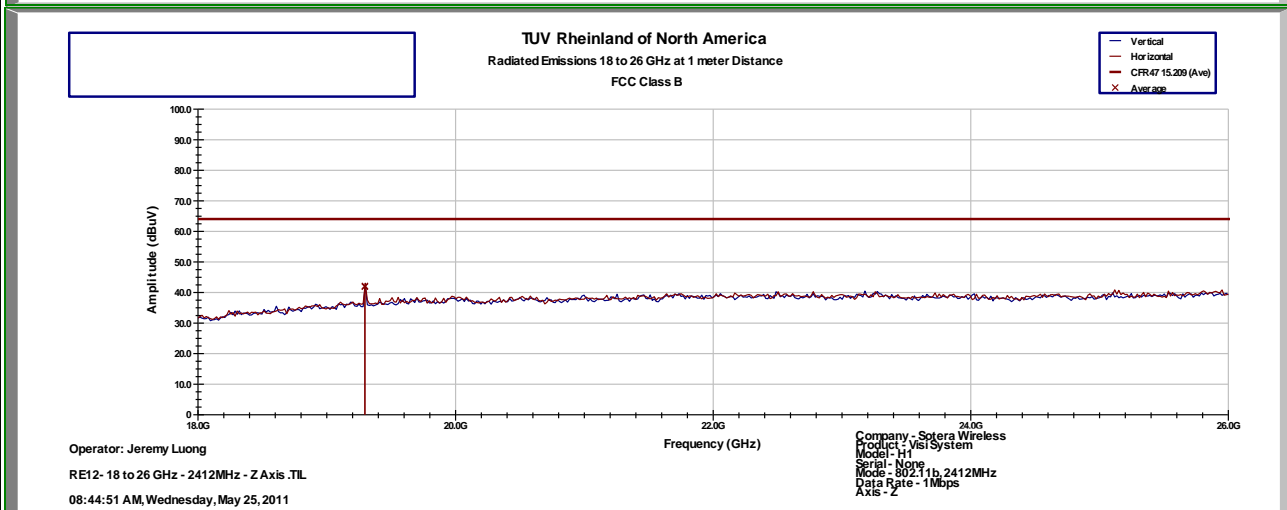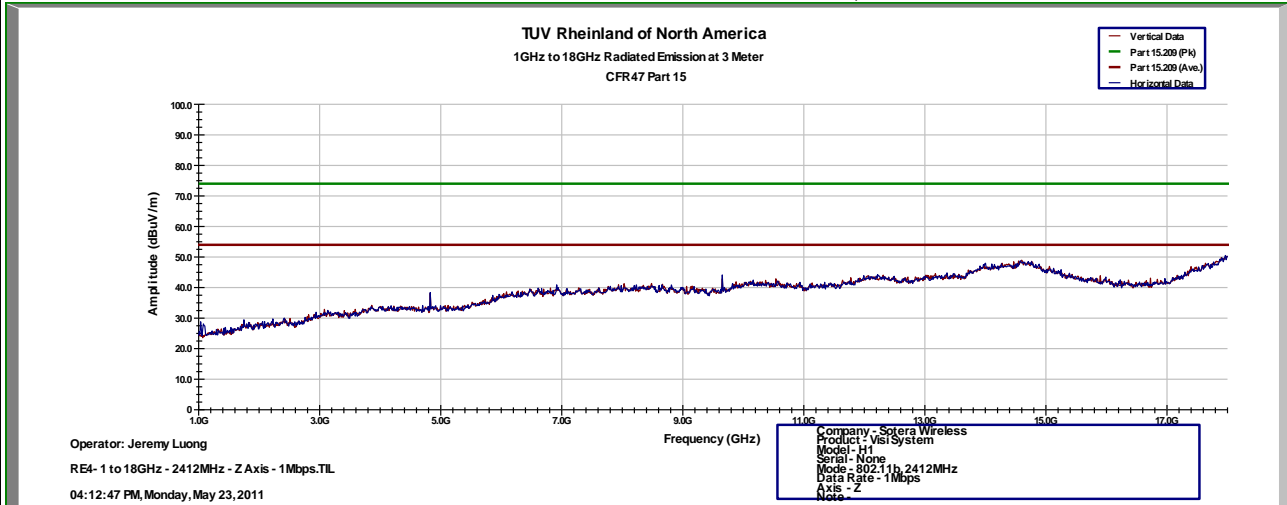



Notes: Limit was extrapolated to 1m distance for 18GHz – 25GHz range.
 1GHz – 25GHz Setting: RBW = 1MHz/ VBW = 3MHz

SOP 1 Radiated Emissions

Tracking # 31151518.003 Page 5 of 6

EUT Name	ViSi Mobile Monitor	Date	May 25, 2011
EUT Model	92-10010	Temp / Hum in	21°C / 36%rh
EUT Serial	AAAA20110400018	Temp / Hum out	N/A
EUT Config.	802.11b, 1Mbps at Z-Axis	Line AC	Battery Operated
Standard	CFR47 Part 15 Subpart C	RBW / VBW	1MHz / 3MHz
Dist/Ant Used	3m - EMCO3115 / 1m - RA42-K-F-4B-C	Performed by	Jeremy Luong

Above 1GHz Plots for Transmit Mode at 2437 MHz, 802.11b 1Mbit/s

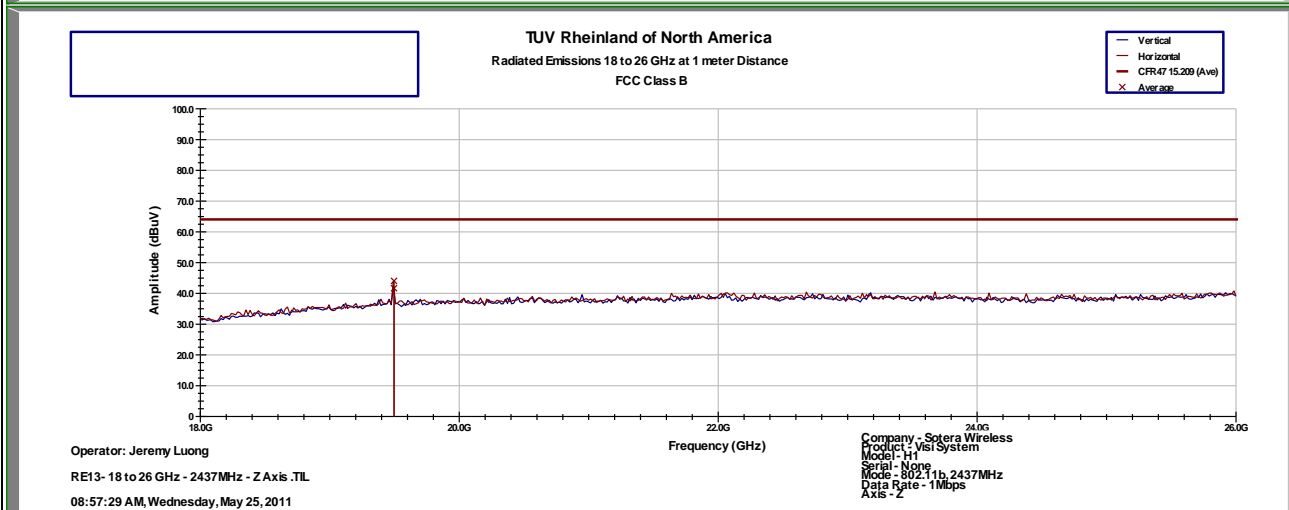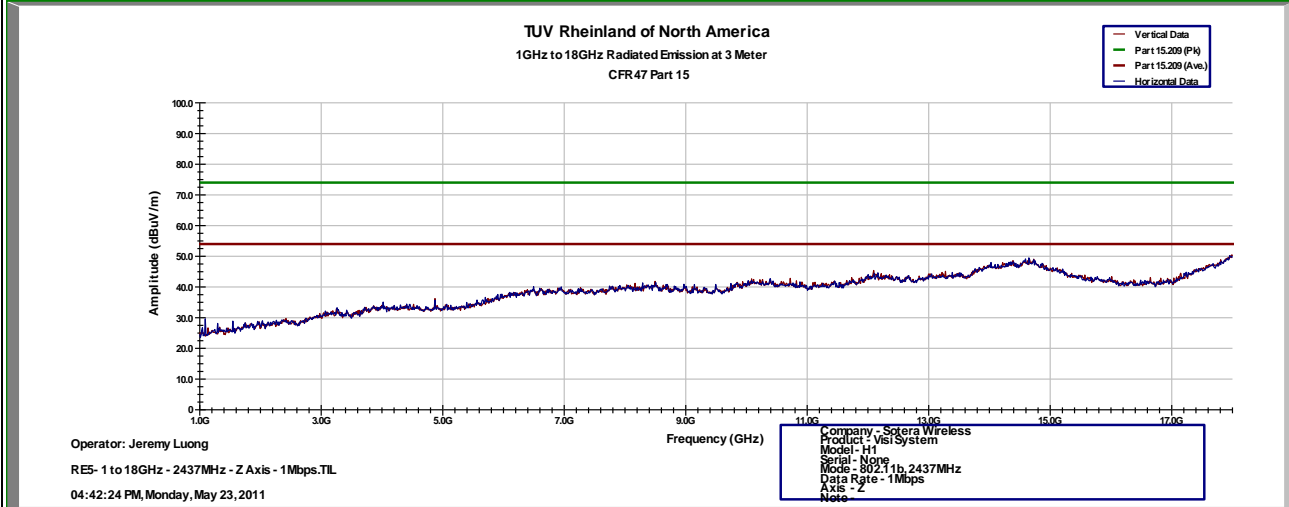



Notes: Limit was extrapolated to 1m distance for 18GHz – 25GHz range.
 1GHz – 25GHz Setting: RBW = 1MHz/ VBW = 3MHz

SOP 1 Radiated Emissions

Tracking # 31151518.003 Page 6 of 6

EUT Name	ViSi Mobile Monitor	Date	May 25, 2011
EUT Model	92-10010	Temp / Hum in	21°C / 36%rh
EUT Serial	AAAA20110400018	Temp / Hum out	N/A
EUT Config.	802.11b, 1Mbps at Z-Axis	Line AC	Battery Operated
Standard	CFR47 Part 15 Subpart C	RBW / VBW	1MHz / 3MHz
Dist/Ant Used	3m - EMCO3115 / 1m - RA42-K-F-4B-C	Performed by	Jeremy Luong

Above 1GHz Plots for Transmit Mode at 2462 MHz, 802.11b 1Mbit/s

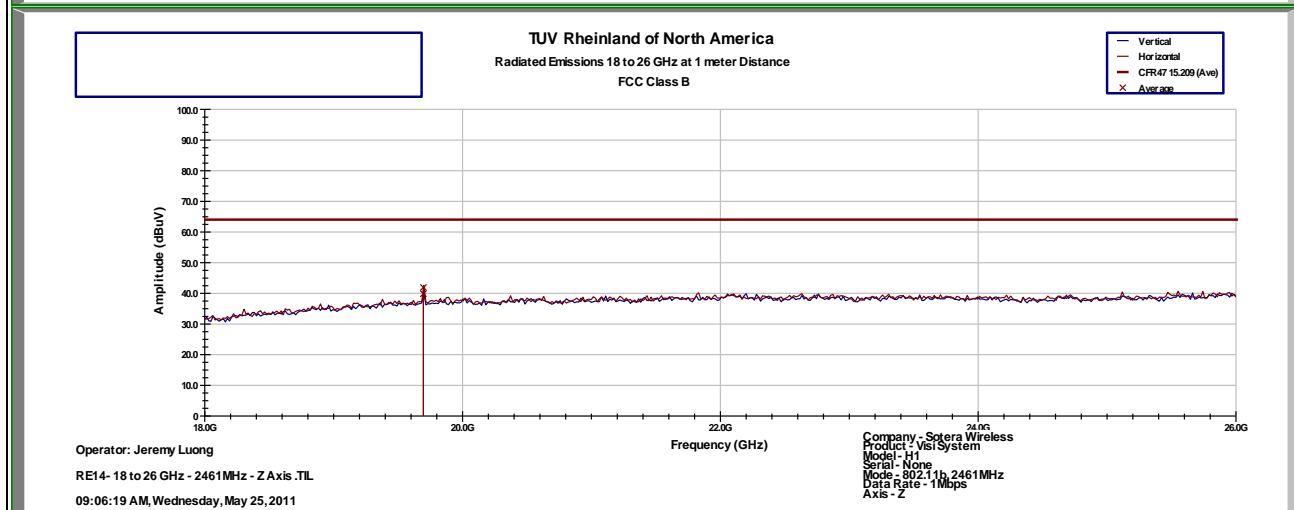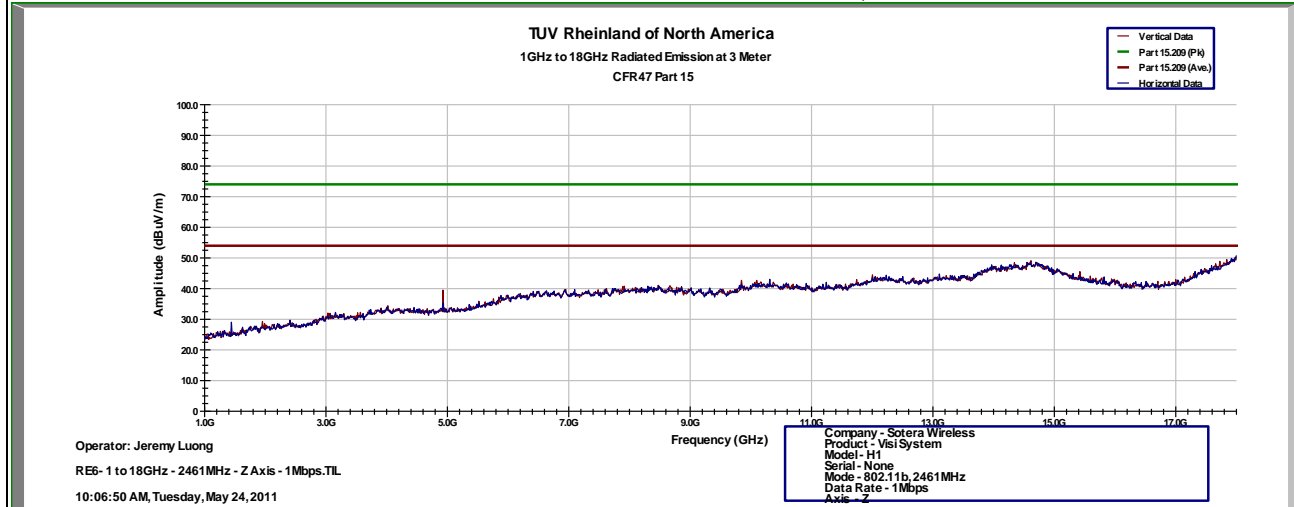

Notes: Limit was extrapolated to 1m distance for 18GHz – 25GHz range.
 1GHz – 25GHz Setting: RBW = 1MHz/ VBW = 3MHz

4.6.4 Sample Calculation

The field strength is calculated by subtracting the Amplifier Gain and adding the Cable Loss and Antenna Correction Factor to the measured reading. The basic equation is as follows:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{FIM} - \text{AMP} + \text{CBL} + \text{ACF}$$

Where: FIM = Field Intensity Meter (dB μ V)
AMP = Amplifier Gain (dB)
CBL = Cable Loss (dB)
ACF = Antenna Correction Factor (dB/m)

$$\mu\text{V/m} = 10^{\frac{\text{dB}\mu\text{V/m}}{20}}$$

4.7 Receiver Spurious Emissions

Receiver spurious emissions are emissions at any frequency when the equipment is in receive mode.

The spurious emissions of the receiver shall not exceed the values in CFR47 Part 15.109 and RSS 210 Sect 2.7.

4.7.1 Test Methodology

4.7.1.1 Preliminary Test

A test program that controls instrumentation and data logging was used to automate the preliminary RF emission test procedure. The frequency range of interest was divided into sub-ranges to yield a frequency resolution of approximately 120 kHz and provide a reading at each frequency for no more than 12° of turntable rotation. For each frequency sub-range the turntable was rotated 360° while peak emission data was recorded and plotted over the frequency range of interest in horizontal and vertical antenna polarization's.

Preliminary emission profile testing was performed inside the anechoic chamber. The EUT was placed on a 1.0m x 1.5m non-conductive table 80cm above the floor. The EUT was positioned as shown in the setup photographs. The receiving antenna was placed at a distance of 3m at a fixed height of 1m. Measurement equipment was located outside of the chamber. A video camera was placed inside the chamber to view the EUT.

Preliminary scans performed with EUT positioned all 3 orthogonal axes. Z-Axis was worse.

4.7.1.2 Final Test

For each frequency measured, the peak emission was maximized by manipulating the receiving antenna from 1 to 4 meters above the ground plane and placing it at the position that produced the maximum signal strength reading. The turntable was then rotated through 360° while observing the peak signal and placing the EUT at the position that produced maximum radiation. The six highest emissions relative to the limit were measured unless such emissions were more than 20 dB below the limit. If less than six emissions are within 20 dB of the limit, than the noise level of the receiver is measured at frequencies where emissions are expected. Multiples of all oscillator and microprocessor frequencies were also checked.

Final testing was performed on an NSA compliant test site. The EUT was placed on a 1.0m x 1.5m non-conductive table 80cm above the ground plane. The placement of EUT and cables were the same as for preliminary testing and is shown in the setup photographs.

The final scans performed on Channel 6; 2437 MHz with EUT positioned vertically, Z-Axis.

4.7.1.3 Deviations

None.

4.7.2 Receiver Spurious Emission Limit

The spurious emissions of the receiver shall not exceed the values in CFR47 Part 15.205, 15.209: 2010 and RSS 210 A1.1.2 2010.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490.....	2400/F (kHz)	300
0.490-1.705.....	24000/F (kHz)	30
1.705-30.0.....	30	30
30-88.....	100 **	3
88-216.....	150 **	3
216-960.....	200 **	3
Above 960.....	500	3

4.7.3 Test Results

The final measurement data indicates the worst case operating modes, configurations, and/or cable positions. It also reflects the results including any modifications and/or special accessories listed in Sections 1.4 and 1.5.

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

4.7.3.1 Final Data

The data recorded in this section contains the final results under the worst-case conditions and without any modifications or special accessories implemented as the manufacturer intends.

SOP 1 Radiated Emissions											Tracking # 31151518.003 Page 1 of 4
EUT Name		ViSi Mobile Monitor				Date		May 17, 2011			
EUT Model		92-10010				Temp / Hum in		23°C / 39%rh			
EUT Serial		AAAA20110400018				Temp / Hum out		N/A			
EUT Config.		RX on Z-Axis				Line AC / Freq		Battery Operated			
Standard		CFR47 Part 15 Subpart C				RBW / VBW		120kHz / 300kHz			
Dist/Ant Used		3m / JB3				Performed by		Jeremy Luong			
Emission Freq (MHz)	ANT Polar (H/V)	Table Pos (deg)	ANT Pos (cm)	FIM (Pk) (dBuV/m)	FIM (QP) (dBuV/m)	Total CF (dBuV)	E-Field (dBuV/m)	Spec Limit (dBuV/m)	Spec Margin (dB)	Type	
Receive Mode at 2437 MHz											
224.00	H	104	112	31.86	30.64	-13.73	16.90	46.02	-29.12	Spurious	
287.99	H	108	114	33.32	31.98	-10.93	19.47	46.02	-26.55	Spurious	
319.98	H	103	117	30.66	29.61	-10.05	18.32	46.02	-27.70	Spurious	
351.98	H	107	299	29.13	27.02	-9.44	16.97	46.02	-29.05	Spurious	
Spec Margin = E-Field QP - Limit, E-Field QP = FIM QP+ Total CF ± Uncertainty											
Total CF= Amp Gain + Cable Loss + ANT Factor											
Combined Standard Uncertainty $u_c(y) = \pm 1.6\text{dB}$ Expanded Uncertainty $U = ku_c(y)$ $k = 2$ for 95% confidence											
Notes: RX mode at 2437 MHz											



SOP 1 Radiated Emissions											Tracking # 31151518.003 Page 2 of 4	
EUT Name	ViSi Mobile Monitor					Date	May 25, 2011					
EUT Model	92-10010					Temp / Hum in	21°C / 36%rh					
EUT Serial	AAAA20110400018					Temp / Hum out	N/A					
EUT Config.	RX on Z-Axis					Line AC / Freq	Battery Operated					
Standard	CFR47 Part 15 Subpart C					RBW / VBW	1MHz / 3MHz					
Dist/Ant Used	3m / EMCO3115					Performed by	Jeremy Luong					
Emission Freq (MHz)	ANT Polar (H/V)	Table Pos (deg)	ANT Pos (cm)	FIM (Pk) (dBuV/m)	FIM Ave (dBuV/m)	Total CF (dBuV)	E-Field Ave (dBuV/m)	Spec Limit (dBuV/m)	Spec Margin (dB)	Type		
Transmitted Data at 2437 MHz												
2387.31	V	100	-51	47.48	25.19	-3.05	22.14	53.98	-31.84	Spurious		
3497.75	V	144	380	38.43	25.04	0.21	25.25	53.98	-28.73	Spurious		
4874.10	H	267	177	39.75	32.23	2.52	34.75	53.98	-19.23	Spurious		
4874.10	V	191	246	40.04	30.78	2.52	33.30	53.98	-20.68	Spurious		
19496.20	V	100	76	40.68	32.97	11.55	44.52	63.98	-19.46	Spurious		
19496.20	H	97	373	37.08	29.77	11.55	41.32	63.98	-22.66	Spurious		
Spec Margin = E-Field Ave - Limit, E-Field Ave = FIM Ave+ Total CF ± Uncertainty												
Total CF= Amp Gain + Cable Loss + ANT Factor												
Combined Standard Uncertainty $u_c(y) = \pm 1.6$ dB Expanded Uncertainty $U = k u_c(y)$ $k = 2$ for 95% confidence												
Notes RX mode at 2437 MHz												

SOP 1 Radiated Emissions

Tracking # 31151518.003 Page 3 of 4

EUT Name	ViSi Mobile Monitor	Date	May 17, 2011
EUT Model	92-10010	Temp / Hum in	23°C / 39%rh
EUT Serial	AAAA20110400018	Temp / Hum out	N/A
EUT Config.	RX on Z-Axis	Line AC	Battery Operated
Standard	CFR47 Part 15 Subpart C	RBW / VBW	120kHz / 300kHz
Dist/Ant Used	3m / JB3	Performed by	Jeremy Luong

30 MHz to 1000 MHz Plot for Receive Mode at 2437 MHz

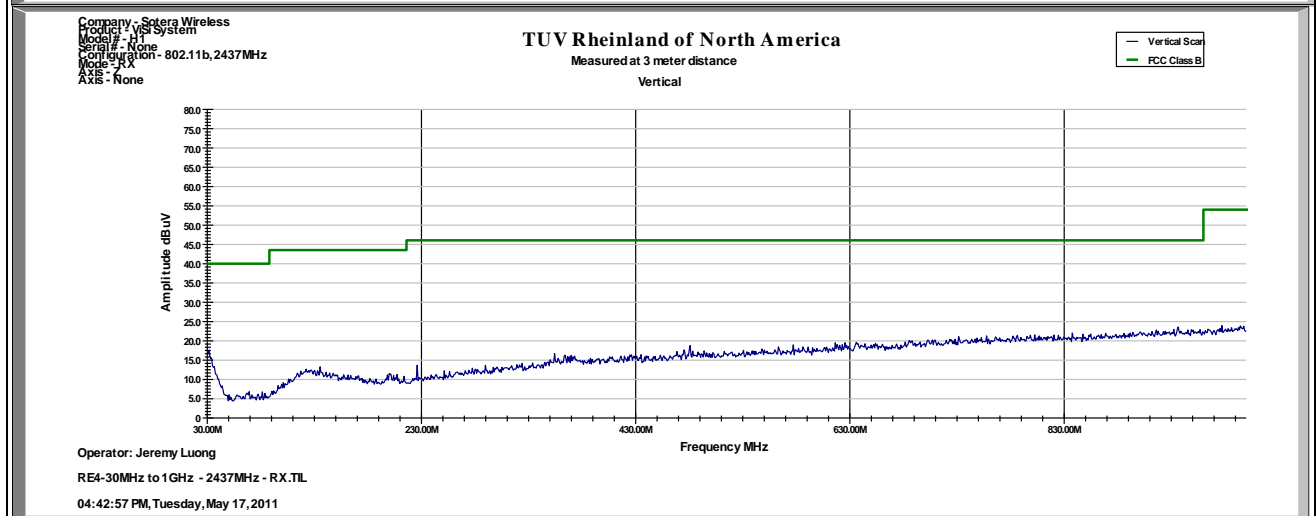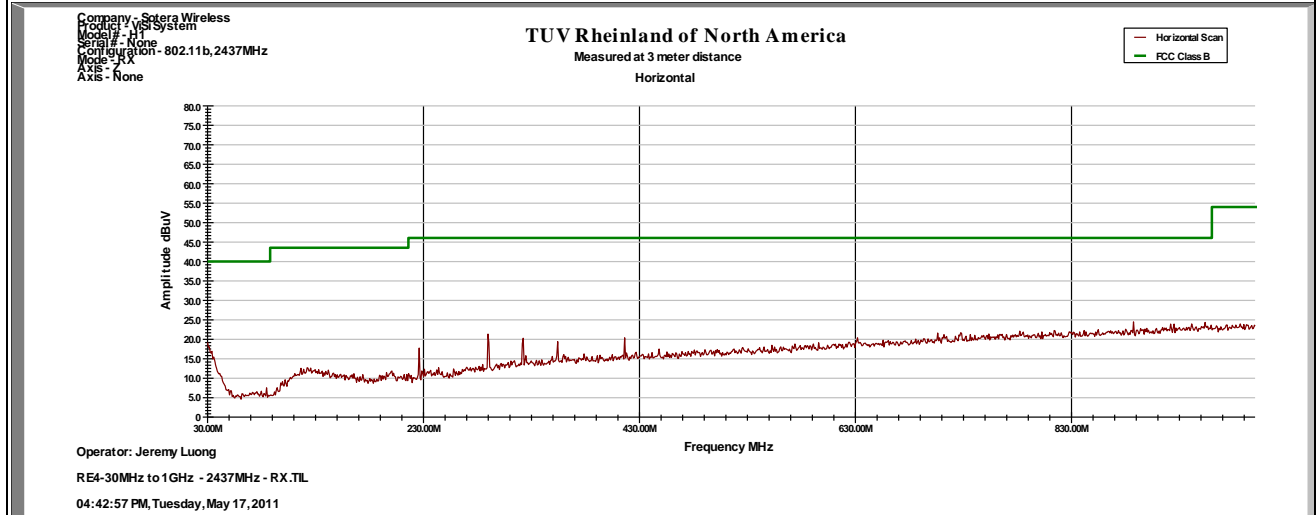



Notes: None.

SOP 1 Radiated Emissions

Tracking # 31151518.003 Page 4 of 4

EUT Name	ViSi Mobile Monitor	Date	May 25, 2011
EUT Model	92-10010	Temp / Hum in	21°C / 36%rh
EUT Serial	AAAA20110400018	Temp / Hum out	N/A
EUT Config.	RX on Z-Axis	Line AC	Battery Operated
Standard	CFR47 Part 15 Subpart C	RBW / VBW	1MHz / 3MHz
Dist/Ant Used	3m / EMCO3115	Performed by	Jeremy Luong

1 GHz to 13 GHz Plot for Receive Mode at 2437 MHz

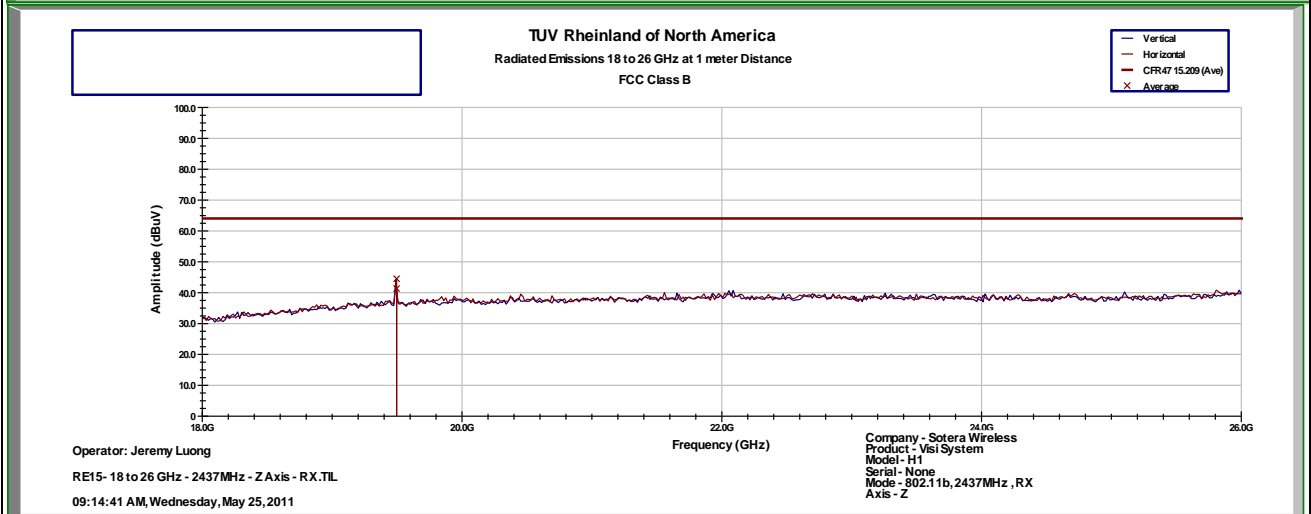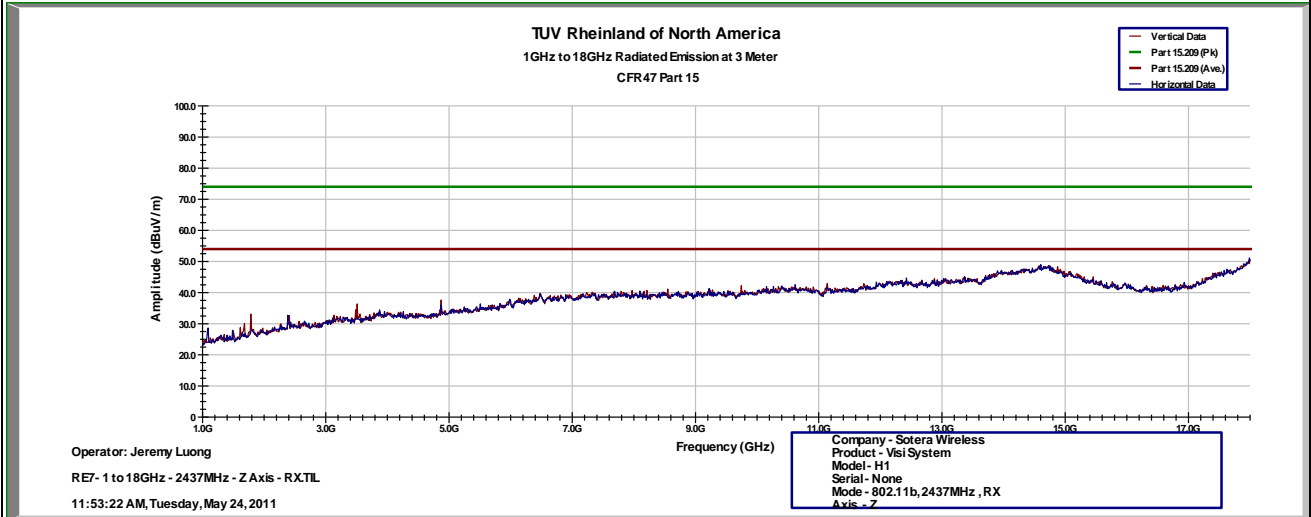

Notes: None

4.8 AC Conducted Emissions

Testing was performed in accordance with ANSI C63.4: 2003. These test methods are listed under the laboratory's NVLAP Scope of Accreditation.

This test measures the levels emanating from the EUT's AC input port, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices.

The AC conducted emissions of equipment under test shall not exceed the values in CFR47 Part 15.207: 2010 and RSS 210: 2010.

4.8.1 Test Methodology

A test program that controls instrumentation and data logging was used to automate the AC Power Line Conducted emission test procedure. The frequency range of interest was divided into sub-ranges such as to yield a frequency resolution of 9 kHz. Each phase and neutral of the AC power line were measured with respect to ground. Measurements were performed using a set of 50 μ H / 50 Ω LISNs.

Testing is either performed in Lab 2. The setup photographs clearly identify which site was used. The vertical ground plane used in the semi-anechoic chamber is a 2m x 2m solid aluminum frame and panel, and it is bonded to the horizontal ground plane.

In the case of tabletop equipment, the EUT is placed on a 1.0m x 1.5m non-conductive table 80cm above the ground plane and 40cm from a vertical ground reference plane. The rear of the EUT was positioned flush with the backside of the table and directly over the LISNs. The power and I/O cables were routed over the edge of the table and bundled approximately 40cm from the ground plane. Support equipment was powered from a separate LISN.

4.8.1.1 Deviations

There were no deviations from this test methodology.

4.8.2 Test Results

The EUT was found to be compliant to the requirements of the test standard(s) since it is powered by 3.7V lithium battery.

5 Test Equipment List

5.1 Equipment List

Equipment	Manufacturer	Model #	Serial/Inst #	Last Cal dd/mm/yy	Next Cal dd/mm/yy
Bilog Antenna	Sunol Science	JB3	A102606	2/18/2010	2/18/2012
Tuned Dipole Antenna	A.H Systems, Inc.	TDS-200/535-1	154	11/10/2010	11/10/2011
Tuned Dipole Antenna	A.H Systems, Inc.	TDS-200/535-2	154	11/10/2010	11/10/2011
Tuned Dipole Antenna	A.H Systems, Inc.	TDS-200/535-3	154	11/10/2010	11/10/2011
Tuned Dipole Antenna	A.H Systems, Inc.	TDS-200/535-4	154	11/10/2010	11/10/2011
Horn Antenna	Sunol Science	DRH-118	A040806	9/29/2010	9/29/2012
Antenna (18-26GHz)	CMT	RA42-K-F-4B-C	020131-004	10/15/2010	10/15/2011
EMI Receiver	Hewlett Packard	8546A	3807A00445	2/5/2011	2/5/2012
Preselector	Hewlett Packard	85460A	3704A00407	2/5/2011	2/5/2012
Amplifier	Hewlett Packard	8447D	2944A07996	1/17/2011	1/17/2012
Spectrum Analyzer	Rhode&Schwarz	ESIB	832427/002	1/18/2011	1/18/2012
Amplifier	Rhode&Schwarz	TS-PR18	3545.7008.03	9/29/2010	9/29/2012
Amplifier	Rhode&Schwarz	TS-PR26	100011	10/15/2010	10/15/2011
Signal Generator	Anritsu	MG3694A	42803	1/26/2011	1/26/2012
Notch Filter	Micro-Tronics	BRM50702	37	1/19/2011	1/19/2012
High Pass Filter (3.5 GHz)	Hewlett Packard	84300-80038	820004	1/19/2011	1/19/2012
High Pass Filter (8.5 GHz)	Micro-Tronics	HPM50107	4	1/19/2011	1/19/2012
Power Meter	Agilent	E4418B	MY45103902	1/18/2011	1/18/2012
Power Sensor	Hewlett Packard	8482A	55-5131	10/27/2010	10/27/2011

* Calibration of equipment past due for re-calibration will be performed expeditiously. If any equipment is found to be out of tolerance at that time, affected customers will be notified accordingly.

6 EMC Test Plan

6.1 Introduction

This section provides a description of the Equipment Under Test (EUT), configurations, operating conditions, and performance acceptance criteria. It is an overview of information provided by the manufacturer so that the test laboratory may perform the requested testing.

6.2 Customer

Table 10: Customer Information

Company Name	Sotera Wireless, Inc.
Address	9444 Waples Street, Ste. 280
City, State, Zip	San Diego, CA 92121
Country	USA
Phone	(858) 373-4841
Fax	(858) 427-4639

Table 11: Technical Contact Information

Name	Eben Gordon
E-mail	eben.gordon@soterawireless.com
Phone	(858) 373-4841
Fax	(858) 427-4639

6.3 Equipment Under Test (EUT)

Table 12: EUT Specifications

EUT Specification	
Dimensions	93mm x48mm x 27mm
Power Rating	3.7 VDC via Lithium Battery 192 mA
Environment	Indoor (Hospitals)
Operating Temperature Range:	0 to 50 degrees C
Multiple Feeds:	<input type="checkbox"/> Yes and how many <input checked="" type="checkbox"/> No. Battery powered device.
Hardware Version	1111 158119-2A
Part Number	6-000021-00
RF Software Version	5-000053-01
Operating Mode	802.11b
Transmitter Frequency Band	2.412 GHz to 2.462 GHz (DSSS)
Max. Rated Power Output	5.05 mW (+7.03dBm)
Power Setting @ Operating Channel	2412 MHz, 2417 MHz, 2422 MHz, 2427 MHz, 2432 MHz, 2437 MHz, 2442 MHz, 2447 MHz, 2452 MHz, 2457 MHz, 2462 MHz.
Antenna Type	Attached on board
Modulation Type	<input type="checkbox"/> AM <input type="checkbox"/> FM <input type="checkbox"/> Phase <input checked="" type="checkbox"/> Other describe: DSSS
Date Rate	802.11b – 1 Mbit/s, 2 Mbit/s, 5.5 Mbit/s, 9 Mbit/s, 11 Mbit/s.
Type of Equipment	<input type="checkbox"/> Table Top <input type="checkbox"/> Wall-mount <input type="checkbox"/> Floor standing cabinet <input checked="" type="checkbox"/> Other describe: <i>Body-Wear Device.</i>
Note: None.	

Table 13: Interface Specifications

Interface Type	Cabled with what type of cable?	Is the cable shielded?	Maximum potential length of the cable?	Metallic (M), Coax (C), Fiber (F), or Not Applicable?
Na	--	--	--	--
Note: No supporting device was used for testing				

Table 14: Supported Equipment

Equipment	Manufacturer	Model	Serial	Used for
Charger	Sotera Wireless	Visi	SO11700005	Used to charge EUT
Note: The charger was used to charge EUT while the H1 is in the off mode/ charging mode.				

Table 15: Description of Sample used for Testing

Device	Serial Number	Configuration	Used For
92-10010	AAAA20110400016	Radiated Sample	Radiated Emission
92-10010	AAAA20110400018	Conducted Sample	Output Power, Bandwidth, Conducted Spurious Emission, Peak Power Spectral Density,
Note: None			

Table 16: Description of Test Configuration used for Radiated Measurement.

Device	Antenna	Mode	Setup Description
92-10010	Attached	Transmit & Receive	EUT faces up; X-Axis
92-10010	Attached	Transmit & Receive	EUT lays on its side ; Y-Axis
92-10010	Attached	Transmit & Receive	EUT stands up; Z-Axis
Note: Test configurations are used in the preliminary testing.			

6.4 Test Specifications

Testing requirements

Table 17: Test Specifications

Emissions and Immunity	
Standard	Requirement
CFR 47 Part 15.247: 2010	All
RSS 210 Iss. 8 2010	All