



PHILIPS

Professional
Display Solutions

CRD81



Quick Start




© 2020 Koninklijke Philips N.V. All rights reserved.
This product was manufactured and brought to the market
by or on behalf of Top Victory Investments Ltd. or one of
its affiliates. Top Victory Investments Ltd. is the warrantor
in relation to this product. Philips and the Philips Shield
Emblem are registered trademarks of Koninklijke Philips
N.V. used under license.

Specifications are subject to change without notice.
Version: V1.01 2020-06-01

82433-91711-30210-G


Please visit the website below for more product information.
www.philips.com/signagesolutions-support

1 Description of functions

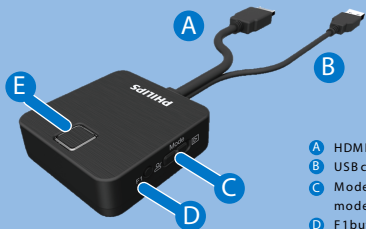

- A HDMI connector
- B USB connector
- C Mode Switch: switch between presentation mode and Video mode
- D F1 button: Hold down to reboot the device
- E Main button: pairing/start mirroring/stop mirroring

2 Connection

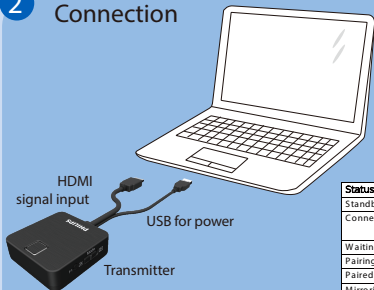

LED indicator

Status	Color	LED action
Standby	Red	Lights up constantly
Connection failed	Red	Flash three seconds and stop three seconds
Waiting for pairing	white	Blink
Pairing	Green	Blink
Paired and Ready	Green	Lights up constantly
Mirroring	Blue	Lights up constantly
Error	Red	Blink
Without HDMI Source	Yellow	Lights up constantly
FW update	White	Blink

3 How to pair

When using the CRD81 IMD T-Sync Transmitter for the first time

1. Activate the IMD R-Sync app on your Interactive Meeting room Display.
2. Select "Setting".
3. "WiFi HDMI Tx pairing" on your Interactive Meeting room Display.
4. Press the main button of transmitter for 4 seconds. The main button will not light up with a constantly white color.
5. Enter your Wi-Fi password and press "pairing", while pairing the main button will blink green, and when successful, it will stay green.

How to use

1. Connect the hardware Transmitter to your laptop.
2. Activate the IMD R-Sync app on your Interactive Meeting room Display.

When a green light appears, the device is ready to mirror. Press the main button to mirror, the main button will change into blue.

FEDERAL COMMUNICATIONS COMMISSION INTERFERENCE STATEMENT

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/ TV technician for help.

CAUTION:

Any changes or modifications not expressly approved by the grantee of this device could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This device meets the government's requirements for exposure to radio waves. This device is designed and manufactured not to exceed the emission limits for exposure to radio frequency (RF) energy set by the Federal Communications Commission of the U.S. Government.

The exposure standard employs a unit of measurement known as the Specific Absorption Rate, or SAR. The SAR limit set by the FCC is 1.6 W/kg. Tests for SAR are conducted using standard operating positions accepted by the FCC with the EUT transmitting at the specified power level in different channels.

The FCC has granted an Equipment Authorization for this device with all reported SAR levels evaluated as in compliance with the FCC RF exposure guidelines.

This equipment should be installed and operated with minimum distance 5mm between the radiator & your body.