

label 料号: label Part NO.:  
Q40G027E-615-55B

客户 Customer: AOC

型号 Model: P2779VC

销向 Sales Area: NA

安规审核Safety parts:  
Yes  No

内销中文字体要求高度20mm以上  
Yes  No

针对带有UL logo的标签,其厂家须在最小包装上标示UL Recognized Component Mark  公司名称,型号及 UL file no.

条码印刷:  
barcode print:  
1. 所有条码读码等级: C级及以上, 客户有特殊要求除外;

**REVISION**

**VERSION A**

版本变更说明:  
Version Changed Description:

与Q40G027E-615-55A相比  
追加FCC 警示语


July-12-16  
xiaoling.zheng

**备注Remark:**

捷联电子(福建)有限公司  
TPV Electronics (Fujian) Co., Ltd.  
地址(Add): 中国福建省福清市元洪路上郑 Shangzheng, Yuanhong Road, Fuqing City, Fujian Province, China  
电话(Tel): +86-591-85285555 85285559  
传真(Fax): +86-591-85285447  
邮编(Postcode): 350301

1) 根据 TPV 推行 RoHS 的有关规定, 所有的原材料及辅助材料必须符合 RoHS 的有关规定  
2) 所有原材料的规定物质: 如镉 (Cd) 汞 (Hg) 铅 (Pb) 六价铬 PBB's PBDE's 及镉 (Cd)+汞 (Hg)+铅 (Pb)+六价铬 (针对随机出货的包装材料) 的具体含量依据最新版 RD EMS-01<<供应商环境管理物质管控标准>>的具体限值要求执行

1)According to the rule about RoHS of TPV,All raw material and assistant material should accord with the rule of RoHS  
2)All the stated substance of raw material: the actual content of Cd/Hg/Pb/Cr/PBB's/PBDE's and Cd+Hg+Pb+Cr(aim at the packing material with the product), should accord with the latest version of RD EMS-01<<The controlled standard aboutenvironment substance for supplier>>.

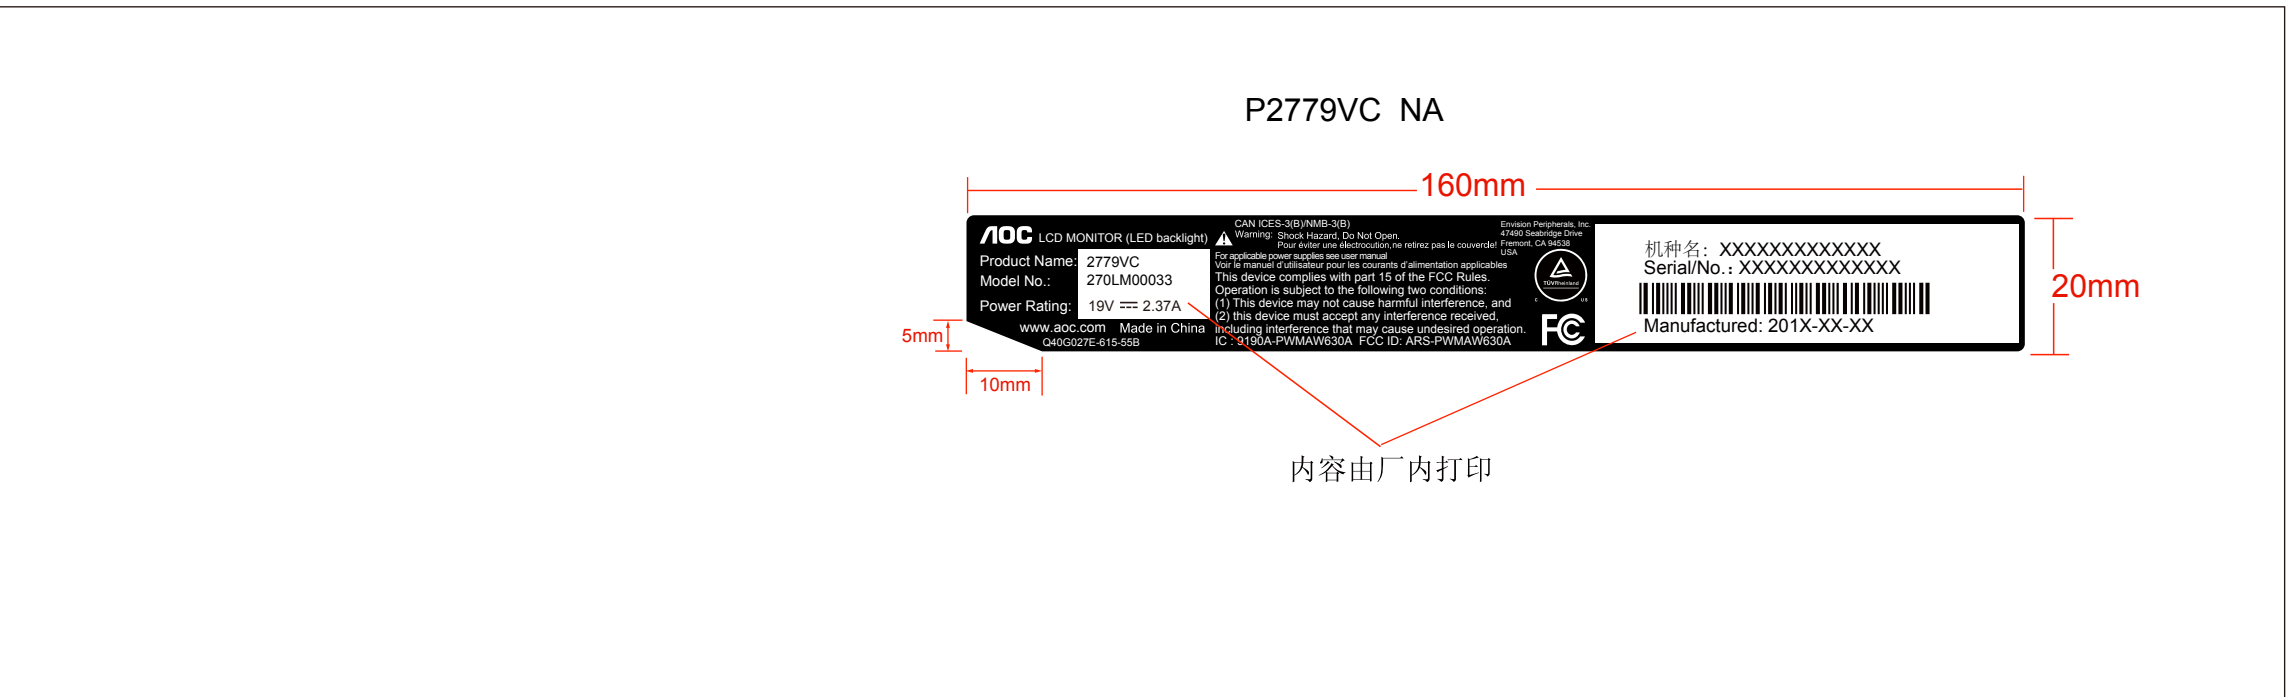

内容由厂内打印

NOTE:  
1.印刷如上图  
Printing as the drawing  
2.尺寸:具体见上图所示 (公差: +/-0.2mm),R=1mm  
Dimension:as the above drawing(Tolerance:+/-0.2mm),R=1mm  
3.材质: 50#PET带不干背胶(材质需经过UL认证).  
Material:50#PET with glue on the backside (material must be certified by UL laboratory)  
4.底色: 黑色; 字体颜色: 银色  
5.贴附位置: 后壳ID槽内  
6.粘力: 将label切成25mm宽, 一端粘贴于钢板上, 以180°方向的力拉胶带另一端, 所得拉力即为粘力。用粘力测试仪进行测试。  
Stickiness strength :Cut label into 25mm width ,one end paste on the plate , with 180 ° direction pulling the other end of the tape, the pull is stickiness strength. With stickiness strength instrument for testing.  
7.正常耐温测试: 在钢板上耐温范围为-20~100°C, 在80~100°C保持8小时后不翘角,不分层,不脱落,不起泡等。  
在塑胶、纸箱上耐温范围为-20~65° C, 在65°C保持8小时后不翘角,不分层,不脱落,不起泡等。  
The normal temperature test: The range of temperature on plate is -20 ~ 100 ° C . In 80 ~ 100 ° C to maintain 8 hours , the label should not be warp,delamination,frothy and so on. The range of temperature on plastic and carton is -20 ~ 65 ° C. In 65 ° C to maintain 8 hours ,the label should not be warp, delamination,frothy and so on.  
8.耐温湿度循环测试: 循环条件: 温度-20~65°C, 湿度30~90%, 时间 96小时后不翘角不分层不脱落不起泡等。  
Temperature and humidity cycle test :Cycle conditions:In temperature of -20 ~ 65 ° C and humidity of 30~90%to maintain 96 hours , the label should not be warp,delamination,frothy and so on.  
9.裁切需均匀且印刷不可有溢墨及颜色不均等不良现象。  
Printing ink can not have overflow and printing color can not be uneven etc.  
10.包装方式: 卷状, 连接处打齿孔。  
Packing style: coil and there should be a toothed hole between the link of two pieces  
11.两张连接处距离3mm, 左右边离型纸3mm(公差: +/-0.5mm).  
3mm should be left between the link of two pieces.Around the edge of paper distance is 3mm(Tolerance:+/-0.5mm)  
12.内容由厂内打印, 具体内容业务提供。  
The content printed by the factory barcode group and the specific content provided by SS.  
13.其它测试要求详见 (FQ-背胶类产品测试检验规格).

1)根据 TPV 推行 RoHS 的有关规定, 所有的原材料及辅助材料必须符合 RoHS 的有关规定  
2)All the stated substance of raw material: the actual content of Cd/Hg/Pb/Cr/PBB's/PBDE's and Cd+Hg+Pb+Cr(aim at the packing material with the product), should accord with the latest version of RD EMS-01<<The controlled standard aboutenvironment substance for supplier>>.

1)According to the rule about RoHS of TPV,All raw material and assistant material should accord with the rule of RoHS  
2)All the stated substance of raw material: the actual content of Cd/Hg/Pb/Cr/PBB's/PBDE's and Cd+Hg+Pb+Cr(aim at the packing material with the product), should accord with the latest version of RD EMS-01<<The controlled standard aboutenvironment substance for supplier>>.