

Top Victory Electronics (Taiwan) Co. Ltd.

TEST REPORT

Model:
SAT1001R-02, SAT1001****

REPORT NUMBER
221100111THC-001

ISSUE DATE
Dec. 20, 2022

PAGES
36

DOCUMENT CONTROL NUMBER
GFT-OP-10h (28-Nov-2018)
© 2020 Intertek



Radio Spectrum TEST REPORT

Applicant:	Top Victory Electronics (Taiwan) Co. Ltd. 10F., No. 230, Liancheng Rd., Zhonghe Dist., New Taipei City 23553, Taiwan
Product:	Home Monitoring Platform
Model No.:	SAT1001R-02, SAT1001****
FCC ID:	ARS-SAT1001
Test Method/ Standard:	47 CFR FCC Part 15.247 & ANSI C63.10 2013 KDB 558074 D01 v05r02
Test By:	Intertek Testing Services Taiwan Ltd., Hsinchu Laboratory No. 11, Lane 275, Ko-Nan 1 Street, Chia-Tung Li, Shiang-Shan District, Hsinchu City, Taiwan



A handwritten signature in black ink that reads "Mark Chang".

Mark Chang
Engineer

A handwritten signature in black ink that reads "Rico Deng".

Rico Deng
Reviewer

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT**Revision History**

Report No.	Issue Date	Revision Summary
221100111THC-001	Dec. 20, 2022	Original report

Table of Contents

Summary of Test Data	5
1. General Information	6
1.1 Identification of the EUT	6
1.2 Antenna description	6
1.3 Operation mode	7
1.4 Peripherals equipment	7
2. Minimum 6 dB Bandwidth	8
2.1 Instrument Setting.....	8
2.2 Test Procedure	8
2.3 Test Diagram	8
2.4 Limit.....	8
2.5 Test Results	9
3. Maximum Peak Conducted Output Power.....	10
3.1 Instrument Setting.....	11
3.2 Test Procedure.....	11
3.3 Test Diagram	11
3.4 Limit.....	11
3.5 Test Results	12
4. Power Spectral Density.....	13
4.1 Instrument Setting.....	13
4.2 Test Procedure	13
4.3 Test Diagram	13
4.4 Limit.....	13
4.5 Test Results	14
5. Emissions in Non-Restricted Frequency Bands	16
5.1 Instruments Setting	16
5.2 Test Procedure	16
5.3 Test Diagram	16
5.4 Limit.....	16
5.5 Test Results	16
6. Emissions in Restricted Frequency Bands (Radiated emission measurements)	17
6.1 Instrument Setting.....	20
6.2 Test setup & procedure	20
6.3 Limit.....	22
6.4 Test Result.....	23
7. Emission on Band Edge.....	27
7.1 Instrument Setting.....	27
7.2 Test Procedure	27

TEST REPORT

7.3 Test Results 27

8. AC Power Line Conducted Emission 30

 8.1 Measuring instrument setting..... 30

 8.2 Test Procedure 30

 8.3 Test Diagram 30

 8.4 Limit..... 30

 8.5 Test Results 32

Appendix A: Test equipment list..... 34

Appendix B: Measurement Uncertainty..... 36

Summary of Test Data

Test Requirement	Applicable Rule (Section 15.247)	Result
Minimum 6 dB Bandwidth	15.247(a)(2)	Pass
Maximum Peak Conducted Output Power	15.247(b)(3)	Pass
Power Spectral Density	15.247(e)	Pass
Emissions In Non-Restricted Frequency Bands	15.247(d)	Pass
Emissions In Restricted Frequency Bands (Radiated emission measurements)	15.247(d), 15.205, 15.209	Pass
Emission On The Band Edge	15.247(d), 15.205	Pass
AC Power Line Conducted Emission	15.207	Pass
Antenna Requirement	15.203	Pass

Note: Please note that the test results with statement of conformity, the decision rules which are based on: Safety Testing: the specification, standard or IEC Guide 115.

Other Testing: the specification, standard and not taking into account the measurement uncertainty.

1. General Information

1.1 Identification of the EUT

Product:	Home Monitoring Platform
Model No.:	SAT1001R-02
Operating Frequency:	2402 MHz ~ 2480 MHz
Channel Number:	40 channels
Frequency of Each Channel:	2402+2 k, k=0 ~ 39
Rated Power:	100-240Vac, 50/60Hz
Power Cord:	N/A
Sample receiving date:	2022/11/07
Sample condition:	Workable
Test Date(s):	2022/11/28~ 2022/12/07

1.2 Additional information about the EUT

The customer confirmed SAT1001**** is a series model to SAT1001R-02 (EUT), the different model numbers are served as marketing strategy.

Explanation of model designation SAT1001****:

The customer confirmed the "*" can be any alphanumeric character including blank, for marketing differences.


1.3 Antenna description

Antenna Gain : -1.0 dBi
Antenna Type : Chip antenna
Connector Type : Fixed


1.3 Operation mode

Connected to Notebook PC via USB Cable, executing “EspRFTestTool_v2.8_Manual” to select different frequency.


The signal is maximized through rotation and placement in the three orthogonal axes.

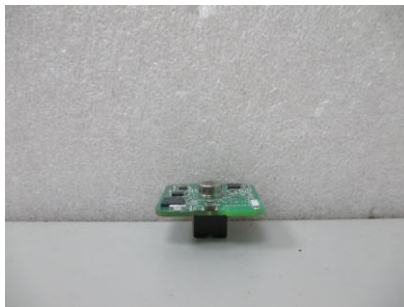

X axis

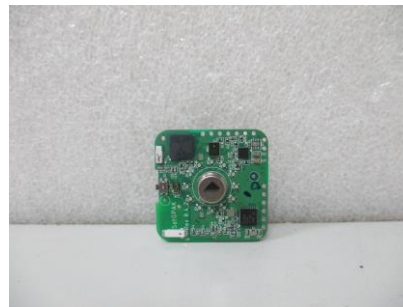

Y axis

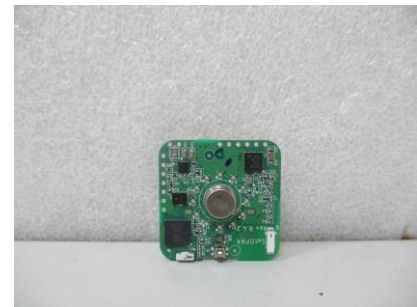

Z axis

After verifying three axes, we found the maximum electromagnetic field was occurred at X axis. The final test data was executed under this configuration.

Mode	Channel	Frequency (MHz)	Signal on time(ms)	Signal on & off time(ms)	Duty cycle	Duty Cycle factor
BLE 1M	19	2440	2.084	2.504	0.832	0.797

1.4 Peripherals equipment

Peripherals	Brand	Model No.	Serial No.	Data cable
Notebook PC	HP	HP Probook 440 G3	5CD8021S99	USB shielded cable 1.5m
Fixture	N/A	N/A	N/A	Type-B USB 1.5m

2. Minimum 6 dB Bandwidth


2.1 Instrument Setting

Spectrum Parameter	Setting
Detector	Peak
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Sweep	Auto couple
Trace	Allow the trace to stabilize.
Span	Between two times and five times the occupied bandwidth
Attenuation	Auto

2.2 Test Procedure

Step 1	The transmitter output was connected to the spectrum analyzer.
Step 2	Test was performed accordance with ANSI C63.10.
Step 3	Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

2.3 Test Diagram

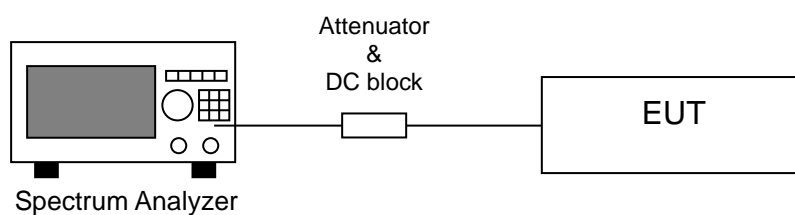

2.4 Limit

The minimum 6 dB bandwidth shall be at least 500 kHz.

2.5 Test Results


Temperature (°C) :	22
Relative Humidity (%) :	64
Test date :	2022/11/25

Mode	Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
BLE 1M	0	2402	0.645	>0.5	Pass
	19	2440	0.638	>0.5	Pass
	39	2480	0.643	>0.5	Pass


Chain 0: 6dB Bandwidth @ BLE 1M Mode Ch 0



Chain 0: 6dB Bandwidth @ BLE 1M Mode Ch 19

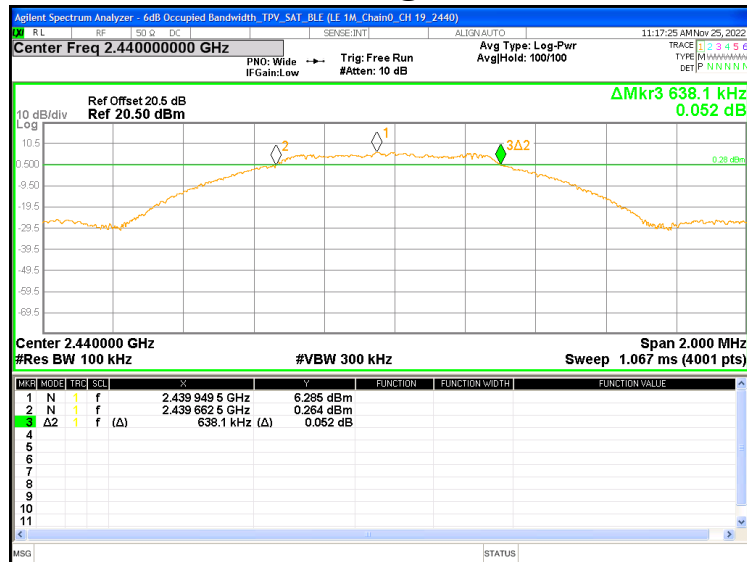

Chain 0: 6dB Bandwidth @ BLE 1M Mode Ch 39

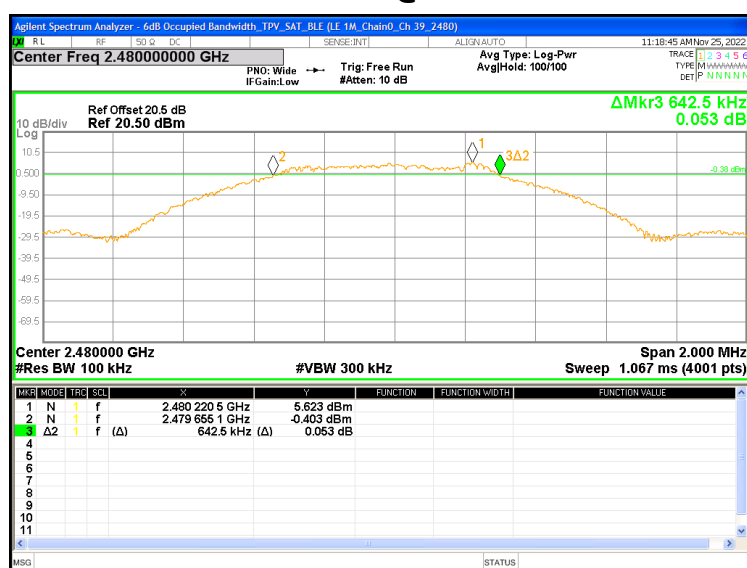

3. Maximum Peak Conducted Output Power


3.1 Instrument Setting

Power Meter Parameter	Setting
Bandwidth	65MHz bandwidth is greater than the EUT emission bandwidth
Detector	Peak & Average

3.2 Test Procedure

The preferred methodology is to use integrated average power measurements, as described in 11.9.2 and 11.13.3 of ANSI C63.10. The peak integrated band power methods of 11.9.1.2 and 11.13.3.2 of ANSI C63.10 are not applicable for FCC compliance testing purposes.

3.3 Test Diagram

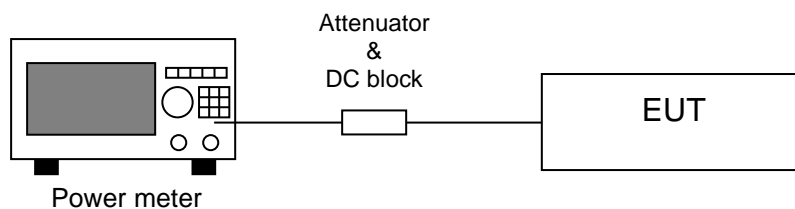

3.4 Limit

For systems using digital modulation in the 2400-2483.5 MHz: 1 Watt (30dBm)

TEST REPORT

3.5 Test Results

Temperature (°C) :	22
Relative Humidity (%) :	64
Test date :	2022/11/25

Mode	Channel	Frequency (MHz)	Output Power [AV] (dBm)	Total Power [AV] (mW)	Maximum Power [PK] (dBm)	Maximum Power [PK] (mW)	Limit (dBm)	Margin (dB)
BLE 1M	0	2402	7.40	5.50	7.90	6.17	30	-22.10
	19	2440	7.30	5.37	7.80	6.03	30	-22.20
	39	2480	6.60	4.57	7.10	5.13	30	-22.90

4. Power Spectral Density


4.1 Instrument Setting

Spectrum Function	Setting
Detector	Peak
RBW	≥ 3 kHz
VBW	≥ 3 x RBW
Sweep	Auto couple
Trace	Max hold
Span	1.5 times x 6dB bandwidth
Attenuation	Auto

4.2 Test Procedure

Step 1	Test procedure refer to subclause 11.10 of ANSI C63.10.
Step 2	Using the maximum conducted output power in the fundamental emission demonstrates compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
Step 3	Use the peak marker function to determine the maximum amplitude level within the RBW.

4.3 Test Diagram

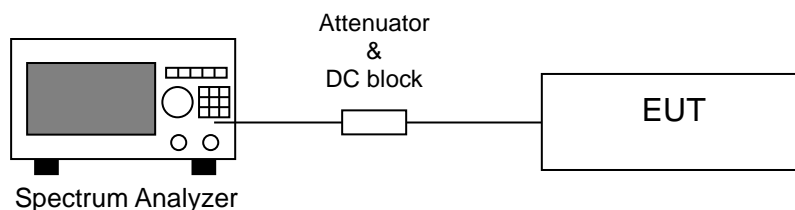

4.4 Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission


TEST REPORT

4.5 Test Results


Temperature (°C) :	22
Relative Humidity (%) :	64
Test date :	2022/11/25

Mode	Channel	Frequency (MHz)	PSD (dBm)	Limit (dBm)	Margin (dB)
BLE 1M	0	2402	-2.857	8	-10.857
	19	2440	-2.804	8	-10.804
	39	2480	-3.872	8	-11.872


Chain 0: Power Spectral Density @ BLE 1M Mode CH 0

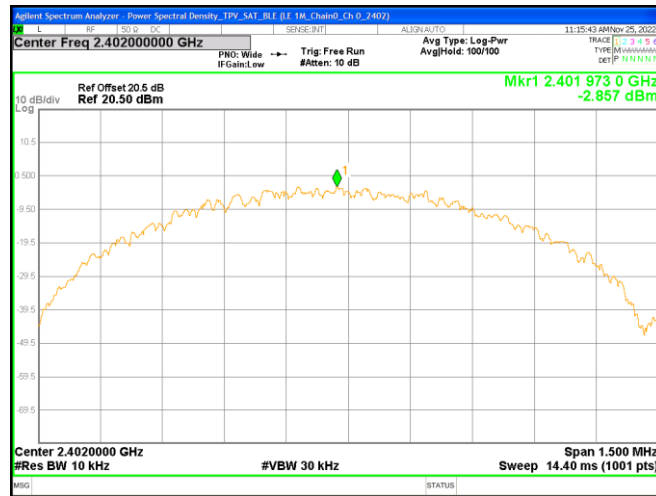

Chain 0: Power Spectral Density @ BLE 1M Mode CH 19

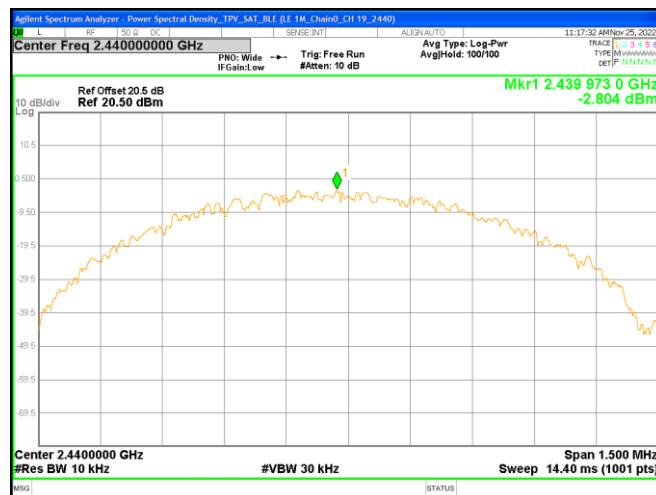

Chain 0: Power Spectral Density @ BLE 1M Mode CH 39

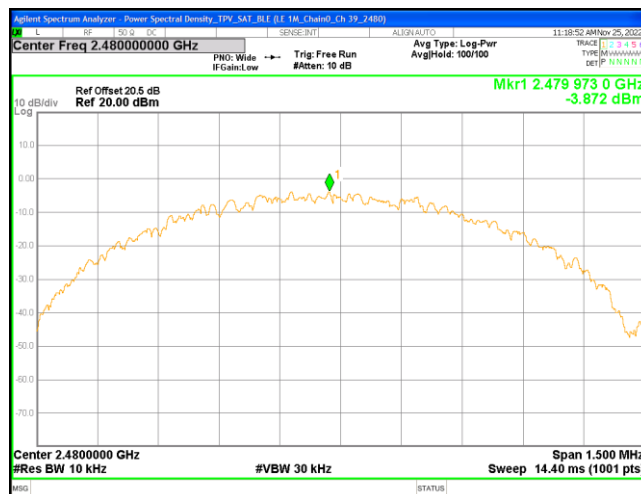

5. Emissions in Non-Restricted Frequency Bands


5.1 Instruments Setting

Spectrum Function	Setting (Reference Level)	Setting (Emission Level)
Detector	Peak	Peak
RBW	≥ 100 kHz	≥ 100 kHz
VBW	$\geq 3 \times$ RBW	$\geq 3 \times$ RBW
Sweep	Auto couple	Auto couple
Trace	Max hold	Max hold
Span	≥ 1.5 time 6dB bandwidth	
Attenuation	Auto	Auto

5.2 Test Procedure

- Step 1 The procedure was used in antenna-port conducted and connected to the spectrum analyzer.
- Step 2 Set instrument center frequency to center frequency.
- Step 3 Use the parameter configured in subclause 11.11 of ANSI C63.10 to measure.
- Step 4 Use the peak marker function to determine the maximum amplitude level.

5.3 Test Diagram

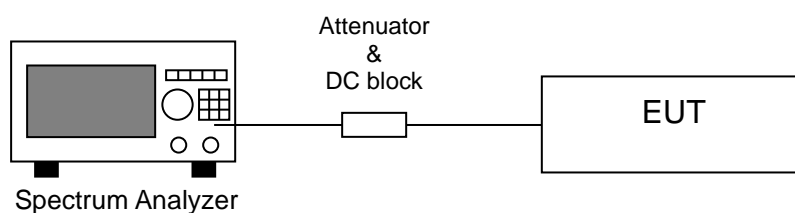


5.4 Limit

The peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz


5.5 Test Results

Temperature (°C) :	22
Relative Humidity (%) :	64
Test date :	2022/11/25


Chain 0: Conducted Spurious @ BLE 1M Mode Ch 0

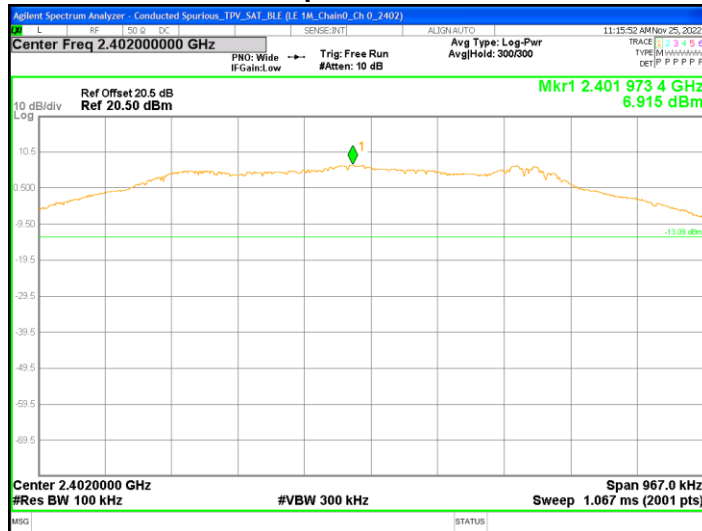


Chain 0: Conducted Spurious @ BLE 1M Mode Ch 0

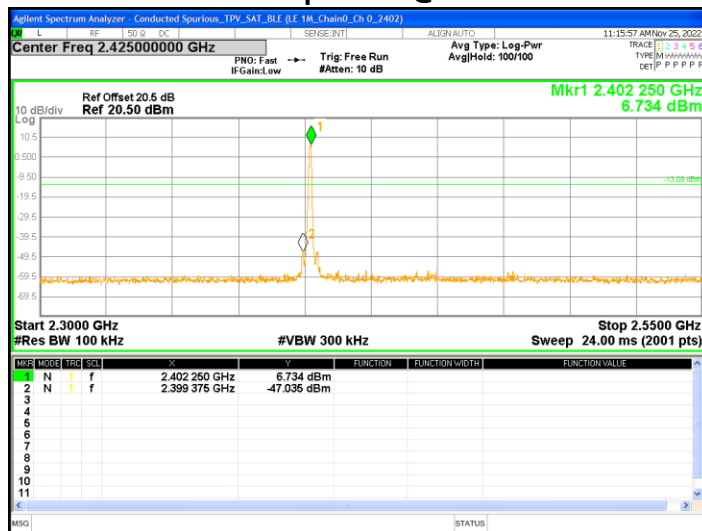


Chain 0: Conducted Spurious @ BLE 1M Mode Ch 0

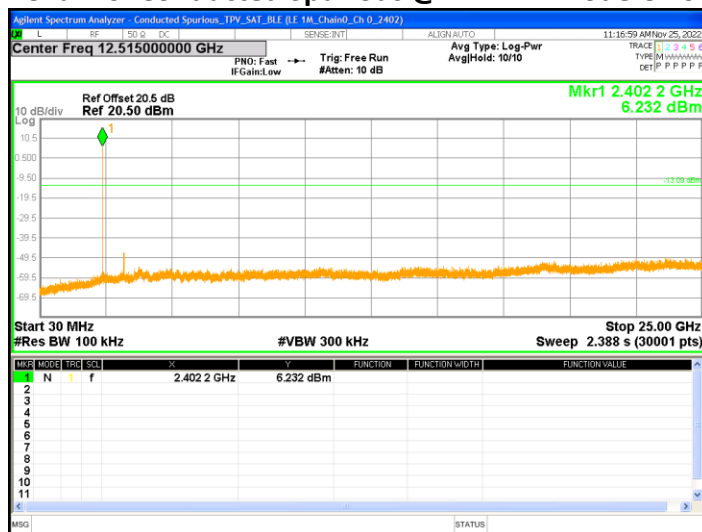


Chain 0: Conducted Spurious @ BLE 1M Mode Ch 19

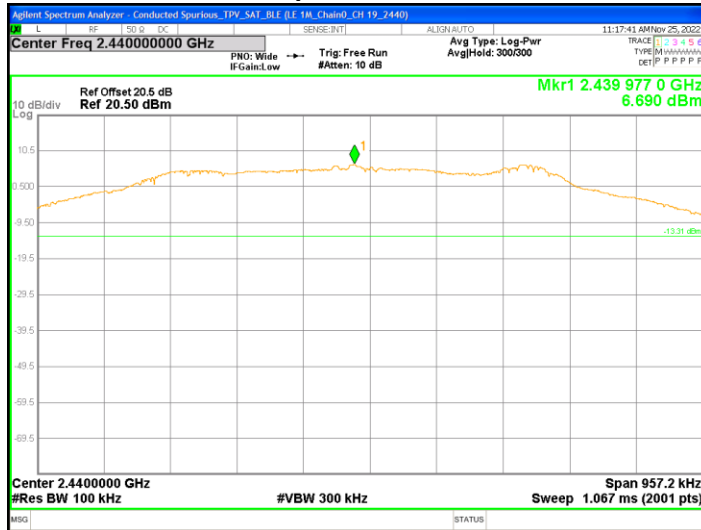


Chain 0: Conducted Spurious @ BLE 1M Mode Ch 19

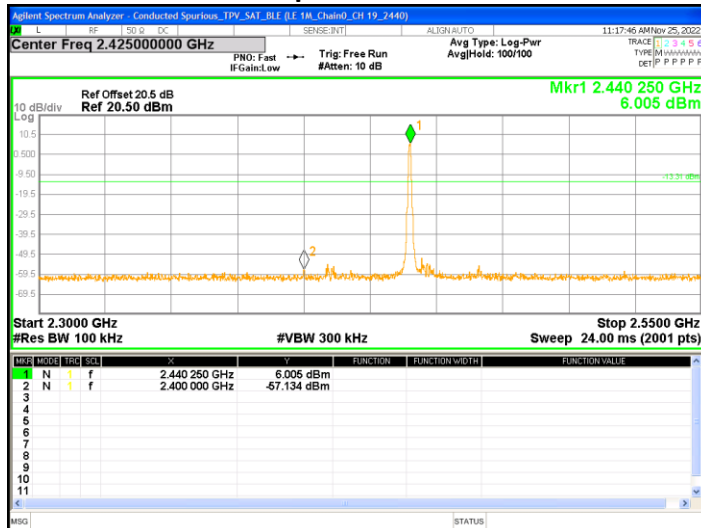


Chain 0: Conducted Spurious @ BLE 1M Mode Ch 19

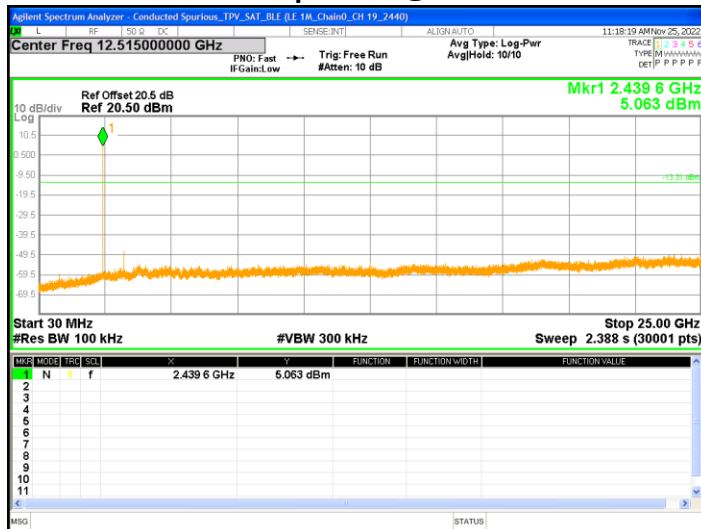


Chain 0: Conducted Spurious @ BLE 1M Mode Ch 39

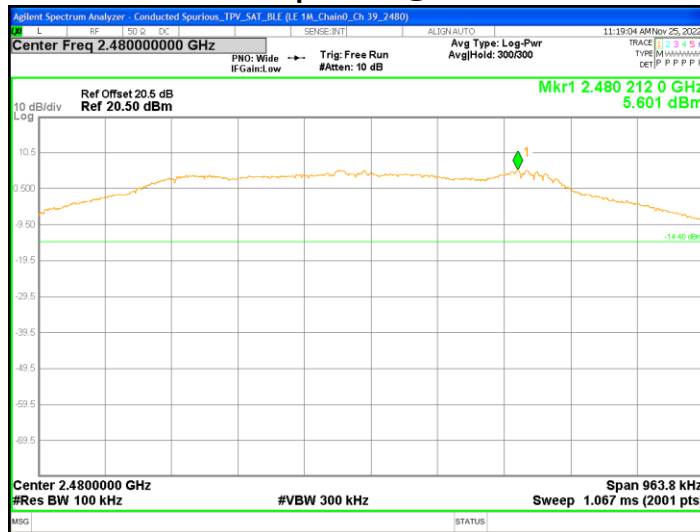

Chain 0: Conducted Spurious @ BLE 1M Mode Ch 39

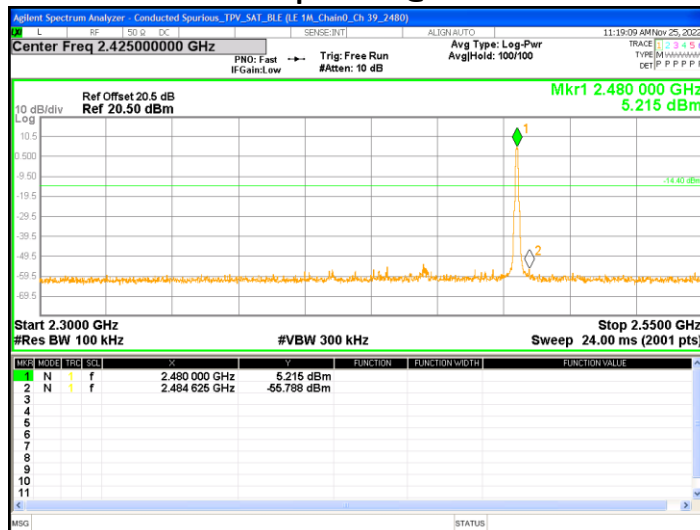

Chain 0: Conducted Spurious @ BLE 1M Mode Ch 39

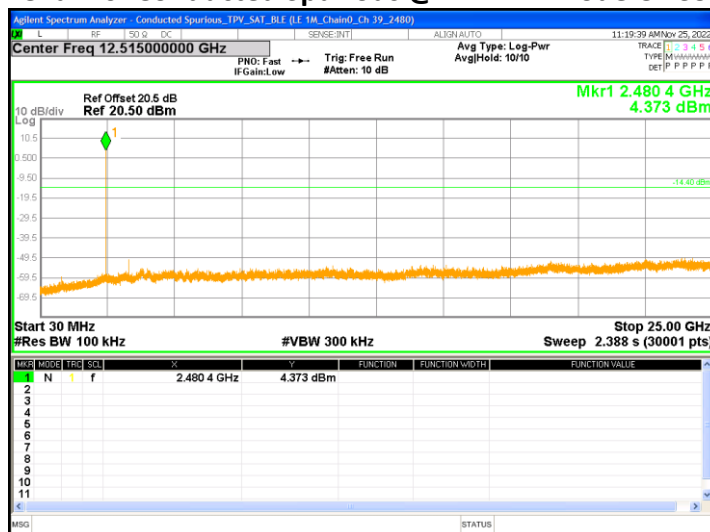


6. Emissions in Restricted Frequency Bands (Radiated emission measurements)

6.1 Instrument Setting


Receiver Function	Setting (Below 1GHz)	Setting (Above 1GHz)
Detector	QP	Peak and Average
RBW	9-150 kHz; 200-300 Hz 0.15-30 MHz; 9-10 kHz 30-1000 MHz; 100-120 kHz	1MHz
VBW	$\geq 3 \times \text{RBW}$	3MHz & 1/T Minimum VBW
Sweep	Auto couple	Auto couple
Start Frequency	9 kHz	1GHz
Stop Frequency	1 GHz	Tenth harmonic
Attenuation	Auto	Auto

6.2 Test setup & procedure


Radiated emission from 9kHz to 30MHz uses Loop Antenna:

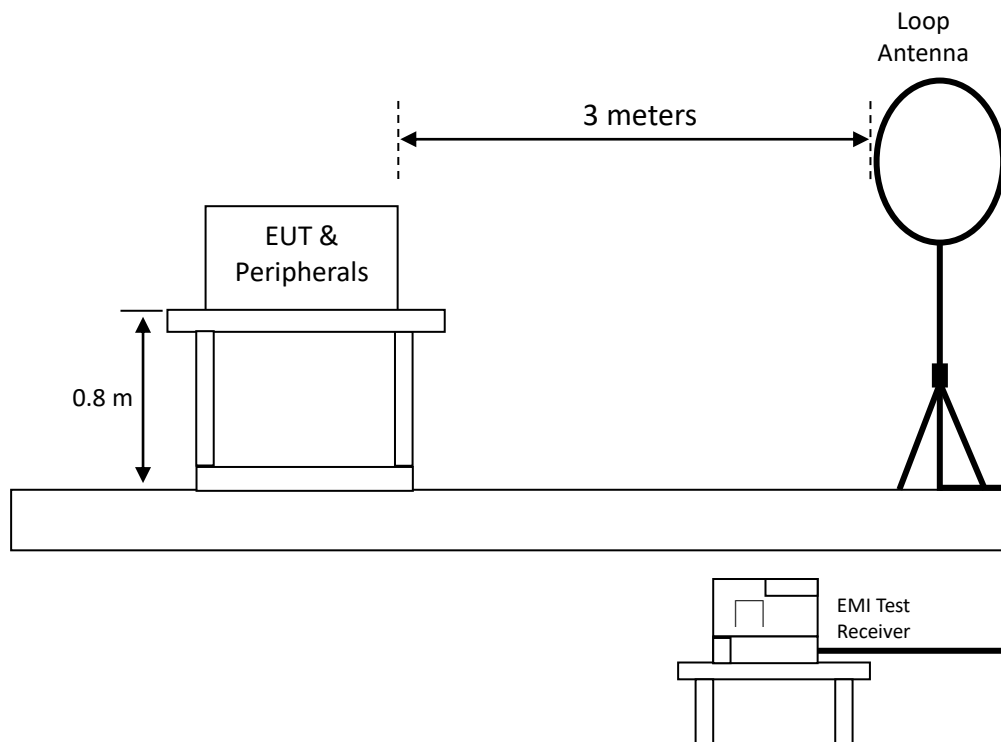

Radiated emission below 1GHz using Bilog Antenna

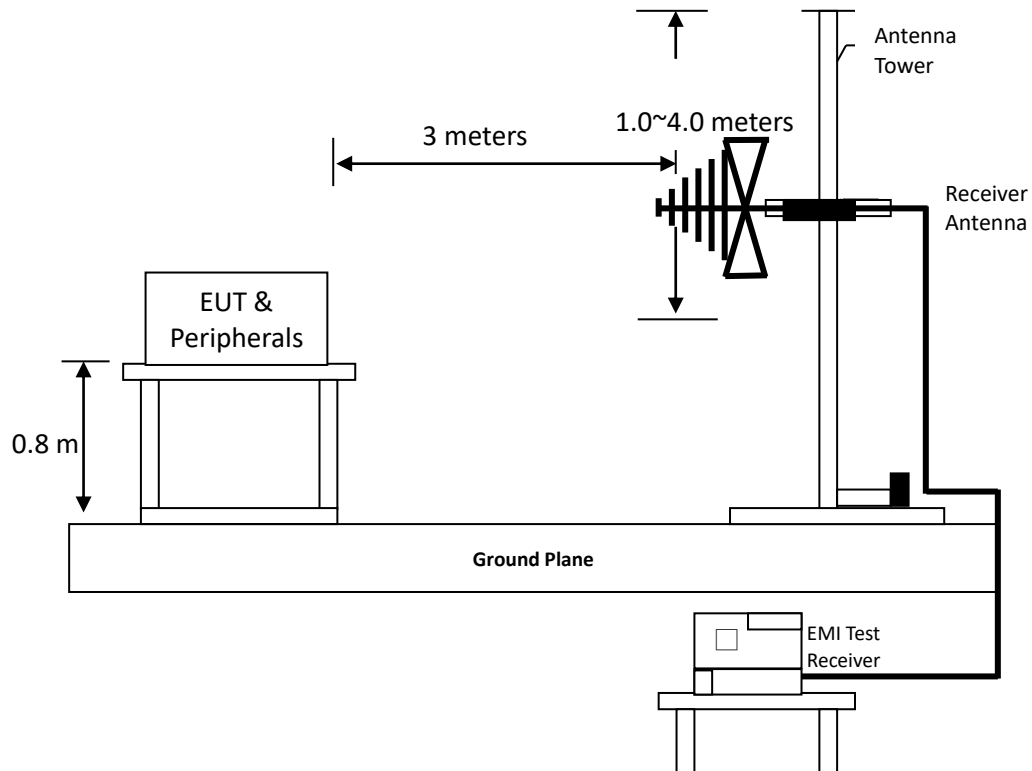

Radiated emission above 1GHz using Horn Antenna

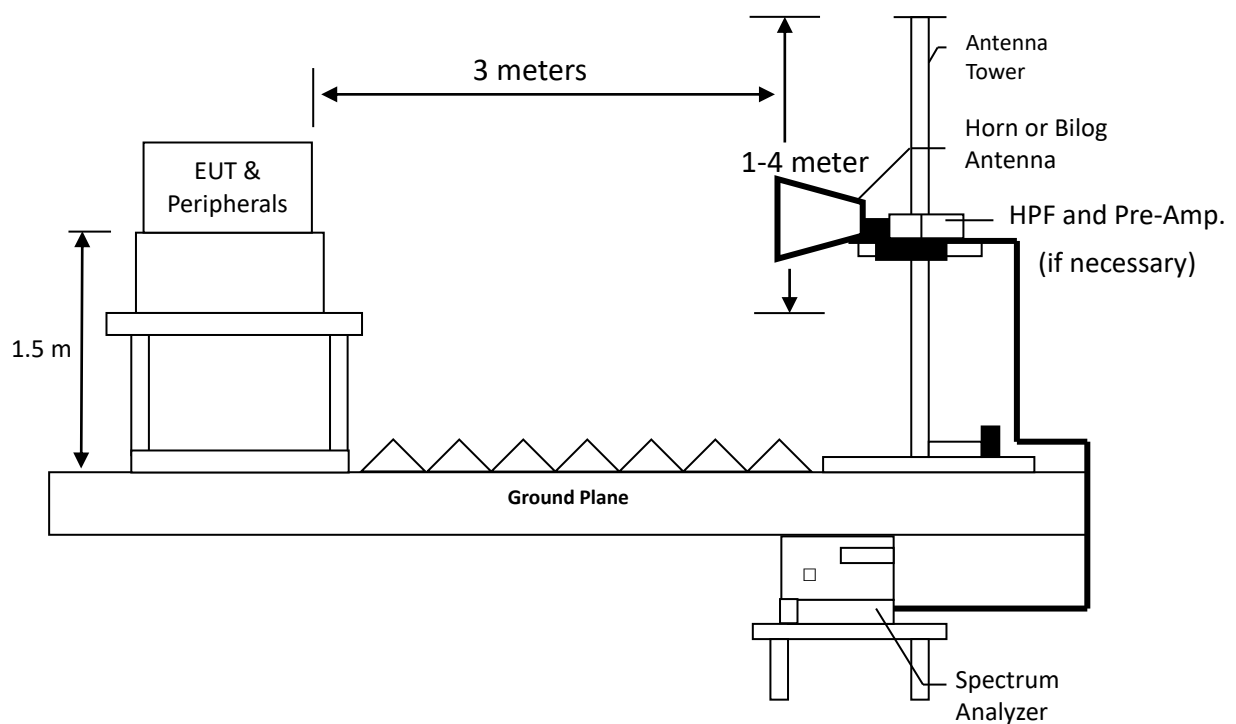

TEST REPORT

Radiated emissions were investigated cover the frequency range from 30MHz to 1000MHz using a receiver RBW of 120kHz record QP reading, and the frequency over 1GHz using a spectrum analyzer RBW of 1MHz and 10Hz VBW record Average reading. (15.209 paragraph), the Peak reading (1 MHz RBW/ 3 MHz VBW) recorded also on the report.

The EUT for testing is arranged on a turntable. If some peripherals apply to the EUT, the peripherals will be connected to EUT and the whole system. During the test, all cables were arranged to produce worst-case emissions. The signal is maximized through rotation. The height of antenna and polarization is changing constantly for exploring for maximum signal level. The height of antenna can be up to 4 meters and down to 1 meter.

The measurement for radiated emission will be done at the distance of three meters unless the signal level is too low to measure at that distance. In the case of the reading under noise floor, a pre-amplifier is used and/or the test is conducted at a closer distance. And then all readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance.

6.3 Limit

Frequency(MHz)	Field Strength(uV/m)	Measurement distance(m)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark:

1. In the above table, the tighter limit applies at the band edges.
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system

6.4 Test Result

6.4.1 Measurement results: frequencies 9kHz to 30MHz

Temperature (°C) :	20
Relative Humidity (%) :	60
Test date :	2022/12/05

The test was performed on EUT under continuously transmitting mode. The worst case occurred at BLE 1M, Ch_0.

Antenna Polarity	Frequency (MHz)	Spectrum Analyzer Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Perpendicular	0.609	QP	18.86	37.42	56.28	71.91	-15.63
Perpendicular	1.209	QP	19.10	28.29	47.39	65.96	-18.57
Perpendicular	1.808	QP	19.10	24.43	43.53	69.54	-26.01
Perpendicular	2.408	QP	19.10	21.45	40.55	69.54	-28.99
Perpendicular	3.008	QP	19.10	19.97	39.07	69.54	-30.47
Perpendicular	3.638	QP	19.26	16.64	35.90	69.54	-33.64

Remark: Corr. Factor = Antenna Factor + Cable Loss

Antenna Polarity	Frequency (MHz)	Spectrum Analyzer Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Parallel	0.579	QP	18.85	31.37	50.22	72.35	-22.13
Parallel	1.209	QP	19.10	25.05	44.15	65.96	-21.81
Parallel	1.808	QP	19.10	21.31	40.41	69.54	-29.13
Parallel	2.408	QP	19.10	18.66	37.76	69.54	-31.78
Parallel	3.008	QP	19.10	17.25	36.35	69.54	-33.19
Parallel	3.608	QP	19.24	16.15	35.39	69.54	-34.15

Remark: Corr. Factor = Antenna Factor + Cable Loss

TEST REPORT

Antenna Polarity	Frequency (MHz)	Spectrum Analyzer Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Ground-parallel	0.609	QP	18.86	23.99	42.85	71.91	-29.06
Ground-parallel	0.999	QP	19.10	18.65	37.75	67.61	-29.86
Ground-parallel	1.838	QP	19.10	15.98	35.08	69.54	-34.46
Ground-parallel	3.548	QP	19.23	13.04	32.27	69.54	-37.27
Ground-parallel	5.737	QP	19.81	11.45	31.26	69.54	-38.28
Ground-parallel	7.867	QP	20.41	10.87	31.28	69.54	-38.26

Remark: Corr. Factor = Antenna Factor + Cable Loss

TEST REPORT

6.4.2 Measurement results: frequencies below 1 GHz

Temperature (°C) :	23
Relative Humidity (%) :	64
Test date :	2022/11/22

The test was performed on EUT under continuously transmitting mode. The worst case occurred at BLE 1M, Ch_0.

Antenna Polarity	Frequency (MHz)	Spectrum Analyzer Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Horizontal	122.15	QP	22.80	3.66	26.46	43.50	-17.04
Horizontal	286.08	QP	21.79	-0.21	21.58	46.00	-24.42
Horizontal	448.07	QP	25.84	0.66	26.50	46.00	-19.50
Horizontal	623.64	QP	28.37	0.27	28.64	46.00	-17.36
Horizontal	729.37	QP	29.55	2.53	32.08	46.00	-13.92
Horizontal	822.49	QP	31.22	0.44	31.66	46.00	-14.34

Antenna Polarity	Frequency (MHz)	Spectrum Analyzer Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Vertical	73.65	QP	13.48	22.65	36.13	40.00	-3.87
Vertical	128.94	QP	22.94	14.81	37.75	43.50	-5.75
Vertical	190.05	QP	17.28	11.06	28.34	43.50	-15.16
Vertical	245.34	QP	20.02	8.48	28.50	46.00	-17.50
Vertical	644.01	QP	29.56	1.32	30.88	46.00	-15.12
Vertical	732.28	QP	29.41	2.53	31.94	46.00	-14.06

Remark: Corr. Factor = Antenna Factor + Cable Loss

TEST REPORT

6.4.3 Measurement results: frequency above 1GHz to 25GHz

Temperature (°C) :	23
Relative Humidity (%) :	64
Test date :	2022/11/22

Mode	Frequency (MHz)	Spectrum Analyzer Detector	Ant. Pol. (H/V)	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
BLE 1M_Ch0	3206.6	PK	H	-12.90	62.00	49.10	74	-24.90
	4804	PK	H	-6.59	58.00	51.41	74	-22.59
	4260	PK	V	-8.40	60.95	52.55	74	-21.45
	4804	PK	V	-6.59	60.00	53.41	74	-20.59
	4804	AV	V	-6.59	55.50	48.91	54	-5.09
BLE 1M_Ch19	3253.3	PK	H	-12.83	62.56	49.73	74	-24.27
	4880	PK	H	-6.11	54.50	48.39	74	-25.61
	4245	PK	V	-8.48	60.89	52.41	74	-21.59
	4880	PK	V	-6.11	58.50	52.39	74	-21.61
BLE 1M_Ch39	4960	PK	H	-6.04	50.00	43.96	74	-30.04
	3306.6	PK	V	-13.10	63.23	50.13	74	-23.87
	4260	PK	V	-8.40	61.77	53.37	74	-20.63
	4960	PK	V	-6.04	54.00	47.96	74	-26.04

Remark: Correction Factor = Antenna Factor + Cable Loss + High Pass Filter Loss - Pre_Amplifier Gain

7. Emission on Band Edge

7.1 Instrument Setting

Spectrum Function	Setting
Detector	Peak and Average
RBW	1MHz
VBW	3MHz & 1/T Minimum VBW
Sweep	Auto couple
Restrict bands	2310 MHz ~ 2390 MHz 2483.5 MHz ~ 2500 MHz
Attenuation	Auto

7.2 Test Procedure

The test procedure is the same as Emissions in Restricted Frequency Bands (Radiated emission measurements).


7.3 Test Results

Temperature (°C) :	23
Relative Humidity (%) :	64
Test date :	2022/11/22


Mode	Frequency (MHz)	Spectrum Analyzer Detector	Ant. Pol. (H/V)	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)	Restricted band (MHz)
BLE 1M	2377.26	PK	H	34.31	8.92	43.23	74	-30.77	2310~2390
	2362.06	AV	H	34.38	-1.89	32.49	54	-21.51	
	2494.49	PK	H	34.68	9.39	44.07	74	-29.93	2483.5~2500
	2483.50	AV	H	34.58	-0.50	34.08	54	-19.92	

Remark: Correction Factor = Antenna Factor + Cable Loss


Chain 0: Restricted Band Bandedge @ BLE 1M Mode Ch0 PK

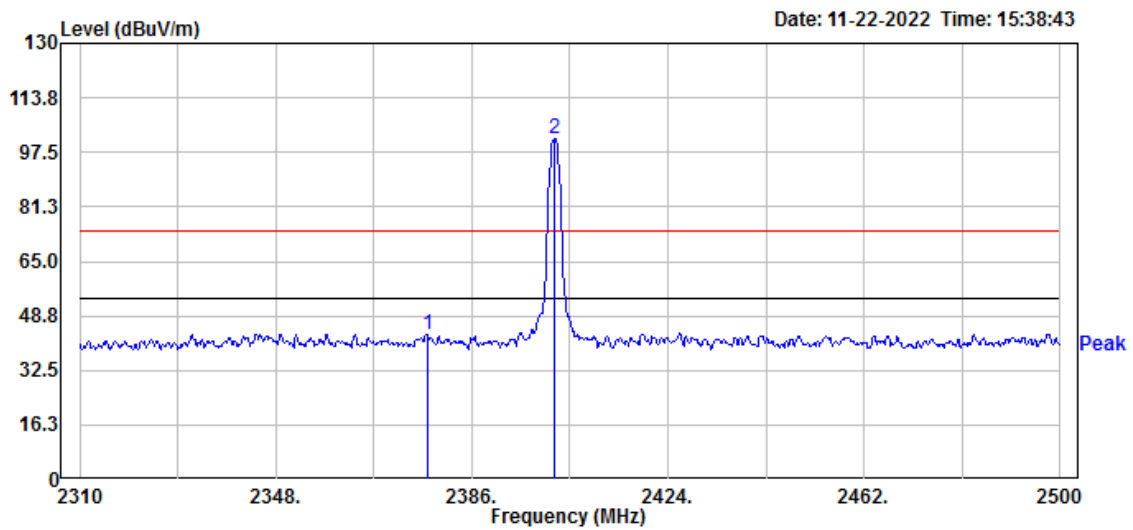


Chain 0: Restricted Band Bandedge @ BLE 1M Mode Ch0 AV

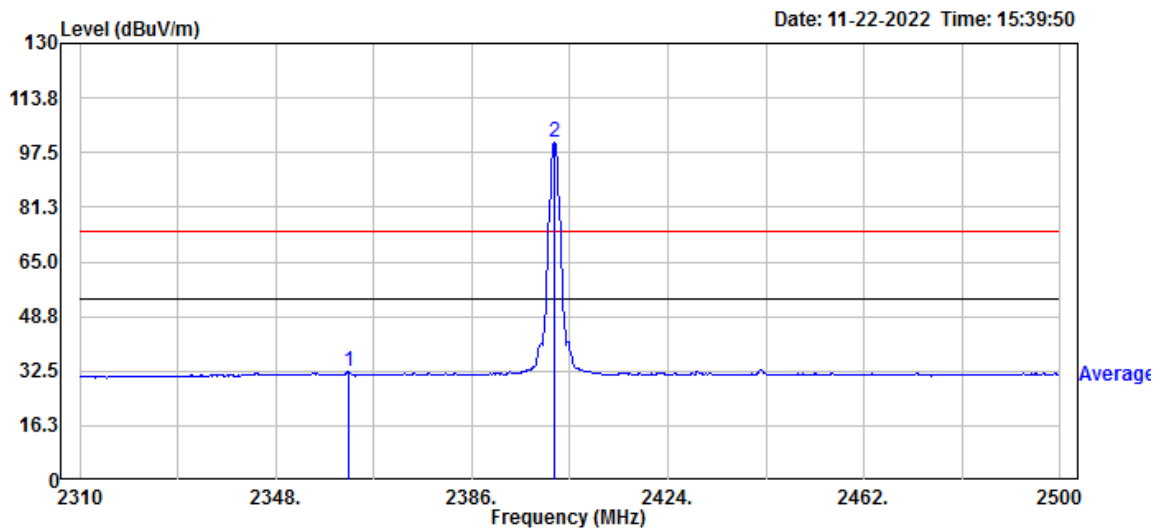

Chain 0: Restricted Band Bandedge @ BLE 1M Mode Ch39 PK

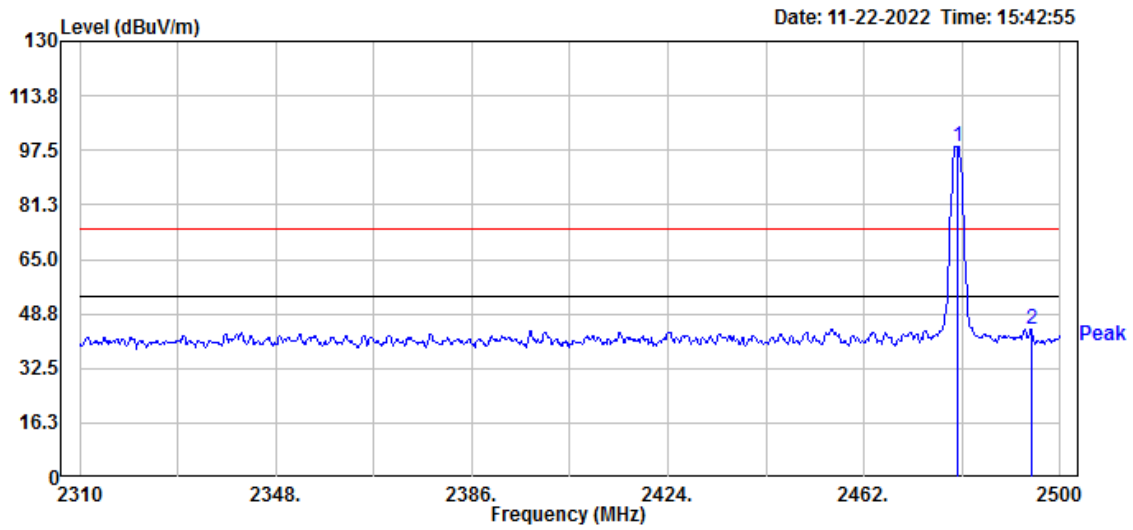

Chain 0: Restricted Band Bandedge @ BLE 1M Mode Ch39 AV

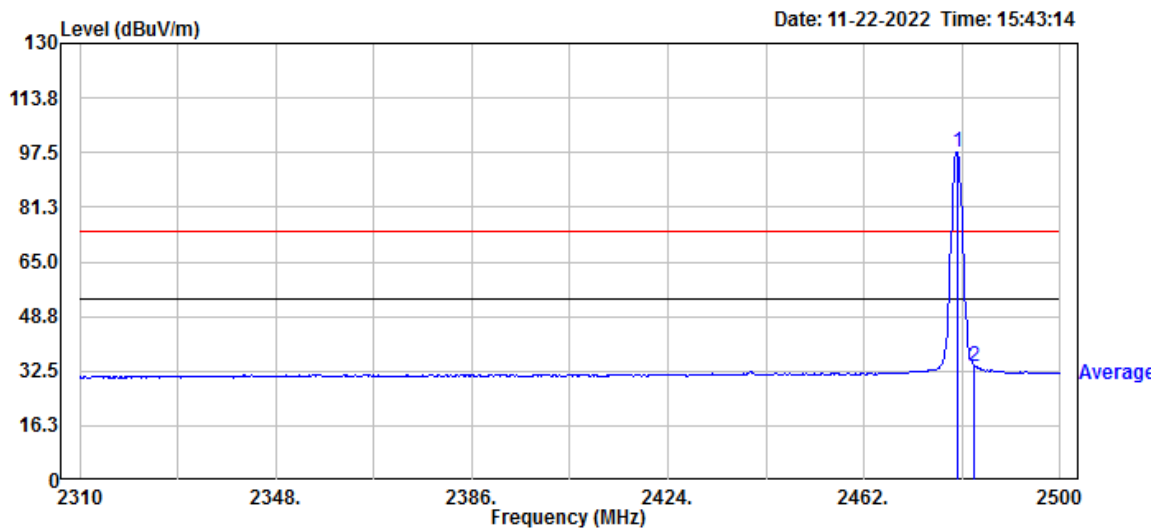

8. AC Power Line Conducted Emission


8.1 Measuring instrument setting

Receiver Function	Setting
Detector	QP
Start frequency	0.15MHz
Stop frequency	30MHz
IF bandwidth	9 kHz
Attenuation	10dB

8.2 Test Procedure

Step 1	Configure the EUT according to ANSI C63.10:2013. The EUT or host of EHT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
Step 2	Connect EUT or host of EUT to the power mains through a line impedance stabilization network.
Step 3	All the companion devices are connected to the other LISN. The LISN should provide 50Uh/50ohms coupling impedance.
Step 4	The frequency range from 150 kHz to 30MHz was searched.
Step 5	Set the test-receiver system to peak detector and specified bandwidth with maximum hold mode.
Step 6	The measurement has to be done between each power line and ground at the power terminal.

8.3 Test Diagram

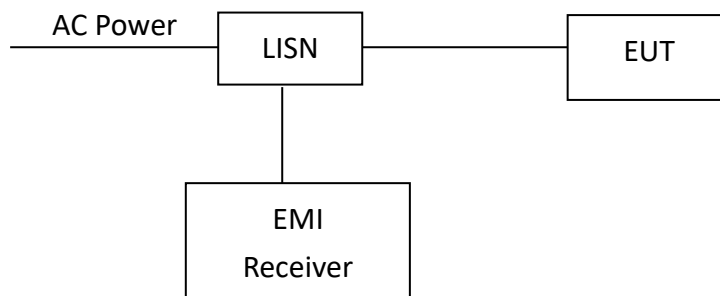


8.4 Limit

Frequency (MHz)	Conducted Limit (dBuV)	
	Q.P.	Ave.
0.15~0.50	66 – 56	56 – 46
0.50~5.00	56	46
5.00~30.0	60	50

TEST REPORT

8.5 Test Results

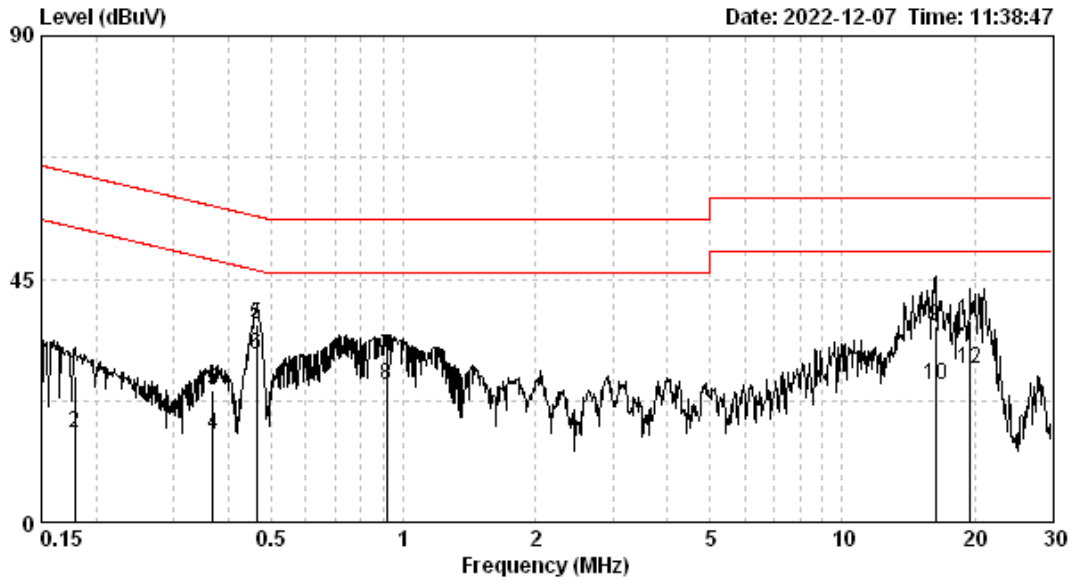


Test voltage : AC 120V/60Hz
 Temp. / R.H. : 23°C / 55%RH
 Atmospheric pressure : 1006hPa

Phase	Frequency (MHz)	Corr. Factor (dB)	Reading QP (dBuV)	Level QP (dBuV)	Limit QP (dBuV)	Reading AV (dBuV)	Level AV (dBuV)	Limit AV (dBuV)	Margin (dB)	
									QP	AV
LINE	0.179	9.65	17.32	26.97	64.55	6.96	16.62	54.55	-37.58	-37.93
LINE	0.369	9.66	14.78	24.43	58.52	6.47	16.13	48.52	-34.08	-32.39
LINE	0.464	9.66	26.83	36.49	56.63	21.35	31.01	46.63	-20.14	-15.61
LINE	0.918	9.69	21.02	30.70	56.00	15.65	25.33	46.00	-25.30	-20.67
LINE	16.312	9.82	26.43	36.25	60.00	15.69	25.52	50.00	-23.75	-24.48
LINE	19.532	9.84	27.57	37.41	60.00	18.57	28.41	50.00	-22.59	-21.59

Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Level (dBuV) = Corr. Factor (dB) + Reading (dBuV)
3. Margin (dB) = Level (dBuV) – Limit (dBuV)

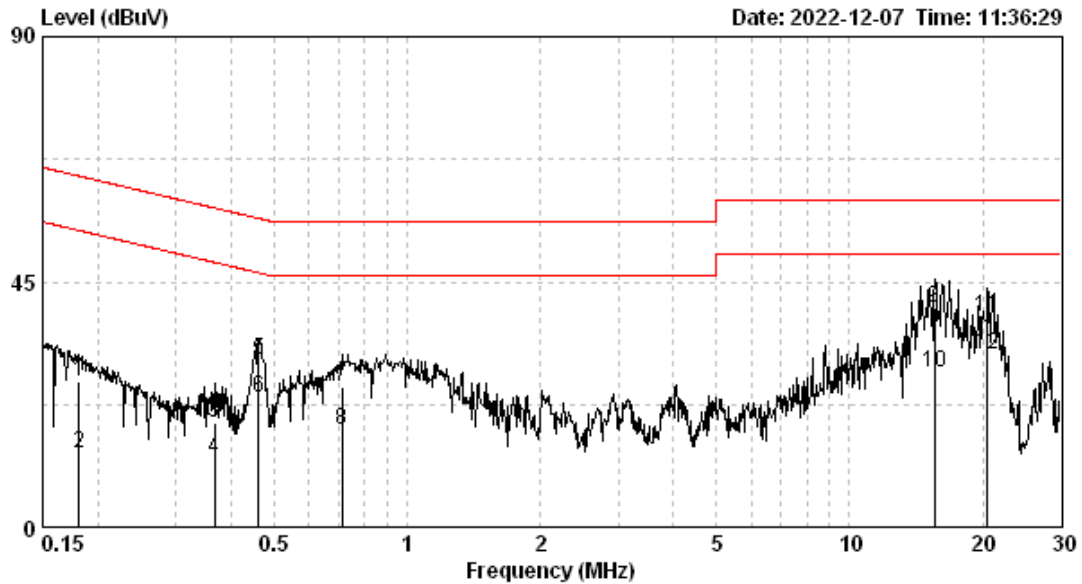

Test voltage : AC 120V/60Hz
 Temp. / R.H. : 23°C / 55%RH
 Atmospheric pressure : 1006hPa

Phase	Frequency (MHz)	Corr. Factor (dB)	Reading QP (dBuV)	Level QP (dBuV)	Limit QP (dBuV)	Reading AV (dBuV)	Level AV (dBuV)	Limit AV (dBuV)	Margin (dB)	
									QP	AV
NEUTRAL	0.182	9.66	16.96	26.62	64.42	3.80	13.47	54.42	-37.80	-40.95
NEUTRAL	0.367	9.67	9.62	19.28	58.56	2.99	12.66	48.56	-39.28	-35.91
NEUTRAL	0.461	9.67	21.13	30.81	56.67	14.04	23.71	46.67	-25.87	-22.96
NEUTRAL	0.712	9.69	16.08	25.77	56.00	8.06	17.76	46.00	-30.23	-28.24
NEUTRAL	15.552	9.87	30.31	40.18	60.00	18.54	28.41	50.00	-19.82	-21.59
NEUTRAL	20.486	9.93	28.70	38.63	60.00	21.67	31.59	50.00	-21.37	-18.41

Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Level (dBuV) = Corr. Factor (dB) + Reading (dBuV)
3. Margin (dB) = Level (dBuV) – Limit (dBuV)

Appendix A: Test equipment list

Test Equipment/ Test site	Brand	Model No.	Serial No.	Calibration Date	Next Calibration Date
EMI Test Receiver	Rohde & Schwarz	ESR7	101822	2022/08/09	2023/08/08
Signal Analyzer	Agilent	N9030A	MY51380492	2022/08/09	2023/08/08
Active Loop Antenna	SCHWARZBECK MESS-ELEKTRONIC	FMZB1519	1519-067	2022/04/13	2023/04/12
Bilog Hybrid Antenna	ETC	MCTD 2786B	BLB17J04019 & JB-5-019	2022/10/04	2023/10/03
Horn Antenna	SHWARZBECK	BBHA 9120 D	9120D-456	2022/01/21	2023/01/20
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170159	2020/08/20	2023/08/19
Broadband Amplifier	SGH	SGH118(45dB)	20220105-1	2022/01/07	2023/01/06
Pre-amplifier	SGH	SGH184	20201124-1	2022/11/11	2023/11/10
Power Meter	Anritsu	ML2495A	0844001	2022/07/04	2023/07/03
Power Sensor	Anritsu	MA2491A	031543	2022/03/07	2023/03/06
966-2(A) Cable	SUHNER	SMA / EX 100	N/A	2022/03/04	2023/03/03
966-2(B) Cable	SUHNER	SUCOFLEX 104P	CB0005	2022/03/04	2023/03/03
966-2 Cable	SUHNER	SUCOFLEX 104P	9403/4P	2022/11/25	2023/11/24
966-2_3m Semi-Anechoic Chamber	966_2	CEM-966_2	N/A	2022/01/14	2023/01/13
Hight Pass Filter	Reactel	7HS-3G/18G-S11	N/A	2022/05/25	2023/05/24
20dB Attenuator	Mini-Circuits	BW-S20W5+	N/A	2022/05/25	2023/05/24
Test software	Audix	e3	V9	NCR	NCR

Note: No Calibration Required (NCR).

TEST REPORT

Test Equipment	Brand	Model No.	Serial No.	Calibration Date	Next Calibration Date
EMI Test Receiver	R&S	ESCI	100018	2022/11/07	2023/11/06
LISN	R&S	ENV216	101160	2022/07/13	2023/07/12
CON-2 Cable	SUHNER	EMCCFD300-B M-NM-6000	170502	2022/04/29	2023/04/28
Test software	Audix	e3	V4.20040112L	NCR	NCR

Note: No Calibration Required (NCR).

Appendix B: Measurement Uncertainty

This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of $k=2$.

Item	Uncertainty
Vertically polarized radiated disturbances from 30MHz~1GHz in a semi-anechoic chamber at a distance of 3m	5.16 dB
Horizontally polarized radiated disturbances from 30MHz~1GHz in a semi-anechoic chamber at a distance of 3m	5.02 dB
Radiated disturbances from 1GHz~18GHz in a semi-anechoic chamber at a distance of 3m	5.17 dB
Vertically polarized Radiated disturbances from 18GHz~26.5GHz in a semi-anechoic chamber at a distance of 1m	2.39 dB
Horizontally polarized Radiated disturbances from 18GHz~26.5GHz in a semi-anechoic chamber at a distance of 1m	2.39 dB
Radiated disturbances from 9kHz~30MHz in a semi-anechoic chamber at a distance of 3m	3.70 dB
Emission on the Band Edge Test	4.32 dB
Occupied Bandwidth	7.78 %
Maximum Peak Conducted Output Power	0.44 dB
Power Spectral Density	1.27 dB
Emissions In Non-Restricted Frequency Bands	1.27 dB
AC Power Line Conducted Emission	3.08 dB