



FCC ID:ARS-WCT5GM2511

AUDIX Technology (Shenzhen) Co., Ltd.

FCC PART 15C TEST REPORT FOR CERTIFICATION

On Behalf of

Top Victory Electronics(Taiwan) Co., Ltd.

WiFi +BT module

WCT5GM2511

FCC ID: ARS-WCT5GM2511

Prepared for : Top Victory Electronics(Taiwan) Co., Ltd.
10F No.230, Liancheng Rd., Zhonghe Dist., New Taipei City
23553 Taiwan (R.O.C)

Prepared By : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Kefeng Road, Science & Technology Park,
Nanshan District , Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F20029
Date of Test : Feb.11~Apr.05,2020
Date of Report : May.14,2020

TABLE OF CONTENTS

<u>Description</u>	<u>Page</u>
1. SUMMARY OF STANDARDS AND RESULTS	5
1.1. Description of Standards and Results	5
2. GENERAL INFORMATION.....	6
2.1. Description of Equipment Under Test	6
2.2. Feature of Equipment Under Test.....	7
2.3. Tested Supporting System Details	8
2.4. Block Diagram of connection between EUT and simulators.....	8
2.5. Test information.....	8
2.6. Test Facility	9
2.7. Measurement Uncertainty (95% confidence levels, k=2).....	9
3. POWER LINE CONDUCTED EMISSION TEST	10
3.1. Test Equipments.....	10
3.2. Block Diagram of Test Setup.....	10
3.3. Power Line Conducted Emission Test Limits.....	10
3.4. Configuration of EUT on Test	10
3.5. Operating Condition of EUT.....	11
3.6. Test Procedure	11
3.7. Power Line Conducted Emission Test Results	11
4. RADIATED EMISSION MEASUREMENT	13
4.1. Test Equipment	13
4.2. Block Diagram of Test Setup.....	14
4.3. Radiated Emission Limit Standard:	15
4.4. EUT Configuration on Test	15
4.5. Operating Condition of EUT.....	15
4.6. Test Procedure	15
4.7. Radiated Emission Test Results	16
5. CONDUCTED SPURIOUS EMISSIONS.....	25
5.1. Test Equipment	25
5.2. Block Diagram of Test Setup.....	25
5.3. Limit.....	25
5.4. Test Procedure	25
5.5. Test result.....	25
6. 20 DB & 99% BANDWIDTH TEST	31
6.1. Test Equipment	31
6.2. Limit.....	31
6.3. Test Procedure	31
6.4. Test Results	32
7. CARRIER FREQUENCY SEPARATION TEST.....	34
7.1. Test Equipment	34
7.2. Limit.....	34
7.3. Test Procedure	34
7.4. Test Results	35
8. NUMBER OF HOPPING FREQUENCY TEST.....	36
8.1. Test Equipment	36
8.2. Limit.....	36
8.3. Test Procedure	36

8.4. Test Results	36
9. DWELL TIME	37
9.1. Test Equipment	37
9.2. Limit	37
9.3. Test Procedure	37
9.4. Test Results	37
10. MAXIMUM PEAK OUTPUT POWER TEST.....	40
10.1. Test Equipment	40
10.2. Limit	40
10.3. Test Procedure	40
10.4. Test Results	40
11. BAND EDGE COMPLIANCE TEST	41
11.1. Test Equipment	41
11.2. Limit	41
11.3. Test Produce	41
11.4. Test Results	41
12. ANTENNA REQUIREMENT.....	44
12.1. Standard Applicable	44
12.2. Antenna Connected Construction	44
13. DEVIATION TO TEST SPECIFICATIONS.....	45

Appendix A. Photograph of Test

Appendix B. Photo of the EUT

TEST REPORT CERTIFICATION

Applicant : Top Victory Electronics(Taiwan) Co., Ltd.
Manufacturer : Top Victory Electronics(Taiwan) Co., Ltd.
Product : WiFi +BT module
FCC ID : ARS-WCT5GM2511
(A) Model No. : WCT5GM2511
(B) Test Voltage : DC 5V From PC Input AC 120V/60Hz

Tested for comply with:
FCC CFR47 Part 15 Subpart C

Test procedure used:
ANSI C63.10: 2013

The device described above is tested by AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. to confirm comply with all the FCC Part 15 Subpart C requirements. The test results are contained in this test report and AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. is assumed full responsibility for the accuracy and completeness of these tests. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements. This report contains data that are not covered by the NVLAP accreditation.


This Report is made under FCC Part 2.1074. No modifications were required during testing to bring this product into compliance.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Date of Test : Feb.11~Apr.05,2020 Report of date: May.14,2020

Prepared by : Brave Zhang Reviewed by : Sunny Lu
Brave Zhang / Assistant Sunny Lu / Deputy Manager

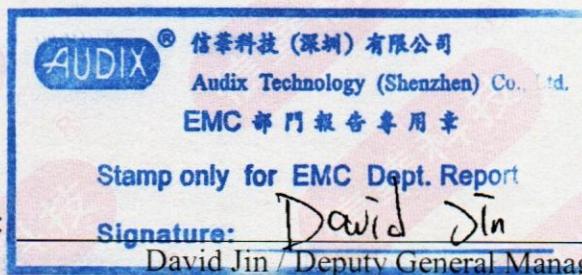

Approved & Authorized Signer :

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT has been tested according to the applicable standards as referenced below.

EMISSION		
Description of Test Item	Standard	Results
Power Line Conducted Emission Test	FCC Part 15: 15.207 ANSI C63.10 2013	PASS
Radiated Emission Test	FCC Part 15 15.209 FCC Part 15 15.205 FCC Part 15 15.247(d) ANSI C63.10 2013	PASS
Conducted Spurious Emissions	FCC Part 15: 15.247(d) ANSI C63.10 2013	PASS
Carrier Frequency Separation Test	FCC Part 15: 15.247(a)(1) ANSI C63.10 2013	PASS
20dB & 99% Bandwidth Test	FCC Part 15: 15.215 ANSI C63.10 2013	PASS
Number Of Hopping Frequency Test	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10 2013	PASS
Dwell Time Test	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10 2013	PASS
Maximum Peak Output Power Test	FCC Part 15 15.247(b)(1) ANSI C63.10 2013	PASS
Band Edge Compliance Test	FCC Part 15 15.247(d) ANSI C63.10 2013	PASS
Antenna requirement	FCC Part 15: 15.203	PASS
N/A is an abbreviation for Not Applicable.		

2. GENERAL INFORMATION

2.1. Description of Equipment Under Test

Applicant	Top Victory Electronics(Taiwan) Co., Ltd.
Applicant Address	10F No.230, Liancheng Rd., Zhonghe Dist., New Taipei City 23553 Taiwan (R.O.C)
Manufacturer	Top Victory Electronics(Taiwan) Co., Ltd.
Manufacturer Address	10F No.230, Liancheng Rd., Zhonghe Dist., New Taipei City 23553 Taiwan (R.O.C)
Factory	TPV Electronics (Fujian) Co., Ltd.
Factory Address	Rongqiao Economic and Technological Development Zone, Fuqing City, Fujian Province, P.R. China.
Product	WiFi +BT module
Model No.	WCT5GM2511
FCC ID	ARS-WCT5GM2511
Sample Type	Prototype production
Date of Receipt	Jan.17,2020
Date of Test	Feb.11~Apr.05,2020
Remark: This report only for Bluetooth V3.0+EDR.	

2.2. Feature of Equipment Under Test


Product Feature & Specification		
Product	WiFi +BT module	
Model No.	WCT5GM2511	
Radio	IEEE802.11 a/b/g/n/ac; Bluetooth V3.0+EDR; Bluetooth V4.0; Bluetooth V5.0	
Power Source	<input type="checkbox"/> Commercial Power	AC 100~240 V
	<input checked="" type="checkbox"/> External Power Source	DC 5V
	<input type="checkbox"/> Li-ion Battery	DC V
	<input type="checkbox"/> UM battery	DC V
Bluetooth		
Bluetooth Version	V5.0 dual mode	
Frequency Range	2402-2480MHz	
Type of Modulation	GFSK, $\pi/4$ DQPSK, 8DPSK	
Data Rate	1Mbps, 2Mbps, 3Mbps	
Quantity of Channels	79/40	
Channel Separation	1MHz/2MHz	
2.4GHz Wi-Fi		
Support Modes	802.11b/g/n20/n40	
Frequency Range	2412-2462MHz	
Type of Modulation	802.11b(DSSS): CCK, QPSK, BPSK; 802.11g/n(OFDM): 64QAM,16QAM, QPSK, BPSK	
Data Rate	802.11b: 1/2/5.5/11 Mbps; 802.11g: 6/9/12/18/24/36/48/54 Mbps; 802.11n: up to 300Mbps	
Channel Separation	5MHz	
5GHz Wi-Fi		
Support Modes	802.11a/n20/n40/ac20/ac40/ac80	
Frequency Range	5180-5240MHz, 5745-5825MHz	
Type of Modulation	802.11a/n (OFDM): QPSK, BPSK, 16QAM, 64QAM 802.11ac (OFDM): QPSK, BPSK, 16QAM, 64QAM,256QAM	
Data Rate	802.11a: 6/9/12/18/24/36/48/54 Mbps; 802.11n: up to 300Mbps; 802.11ac: up to 867Mbps	
Channel Separation	5MHz	
Antenna System		
Type of Antenna	PCB Antenna	
Antenna Number	2 (ANT A and ANT B)	
Operation Modes	Only MIMO mode supported	
Antenna Peak Gain	Bluetooth Peak Gain: 1.72dBi DTS Band (2400-2483.5MHz) Peak Gain: ANTA: 2.08dBi; ANTB: 2.00dBi. U-NII-1 Band(5150-5250MHz) Peak Gain: ANTA: 3.06dBi; ANTB: 3.04dBi U-NII-3 Band (5725-5850MHz) Peak Gain: ANT A: 3.08dBi; ANT B: 3.10dBi.	

2.3. Tested Supporting System Details

No.	Description	ACS No.	Manufacturer	Model	Serial Number
1.	Notebook	N/A	acer	ZOW	NVX7C

USB Cable: Shielded, Detachable, 1.0m

2.4. Block Diagram of connection between EUT and simulators

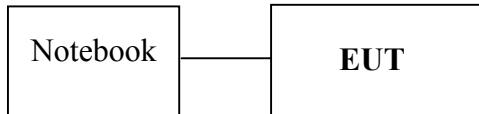

(EUT: WiFi +BT module)

2.5. Test information

A special software was used to control EUT work in continuous TX mode

Tested mode, Packet Type, peak output power information			
Mode	Packet Type	Output power(dBm) P max	Output Power(dBm) P low
GFSK	DH1	7.746	6.990
	DH3		
	DH5		
$\pi/4$ DQPSK	2-DH1	7.619	6.923
	2-DH3		
	2-DH5		
8DPSK	3-DH1	7.747	6.978
	3-DH3		
	3-DH5		

$\pi/4$ DQPSK mode has been verified to have the lowest power, so the final test were performed with GFSK and 8DPSK mode, the worse-case packet type were:

GFSK Mode: DH5

8DPSK Mode: 3DH5

Item		Modulation	Data Rate	Test Channel
Radiated Test Case	Radiated Band Edge		GFSK	1Mbps
	8-DPSK	3Mbps	00/78	
	Radiated Spurious Emission		GFSK	1Mbps
	8-DPSK	3Mbps	00/39/78	
Conducted Test Case	20dB Bandwidth		GFSK	1Mbps
	8-DPSK	3Mbps	00/39/78	
	Carrier Frequency Separation		GFSK	1Mbps
	8-DPSK	3Mbps	39	
	Time of Occupancy		GFSK	1Mbps
	8-DPSK	3Mbps	39	
	Number of Hopping Channels		GFSK	1Mbps
	8-DPSK	3Mbps	39	
	Maximum Peak Output Power		GFSK	1Mbps
	8-DPSK	3Mbps	00/39/78	
Band Edges	Band Edges		GFSK	1Mbps
	8-DPSK	3Mbps	00/78	
	Spurious Emission		GFSK	1Mbps
	8-DPSK	3Mbps	00/39/78	

2.6. Test Facility Site Description

Name of Firm

Audix Technology (Shenzhen) Co., Ltd.
: No. 6, Kefeng Road, Science & Technology Park,
Nanshan District , Shenzhen, Guangdong, China

EMC Lab.

Certificated by Industry Canada
: Registration Number: IC 5183A-1
Valid Date: May.07, 2020Certificated by DAkkS, Germany
: Registration No: D-PL-12151-01-00
Valid Date: Dec.07, 2021Accredited by NVLAP, USA
: NVLAP Code: 200372-0
Valid Date: Mar.31, 2021Certificated by FCC USA.
: Designation No.: CN5022
Valid Date: Mar.31, 2021

2.7. Measurement Uncertainty (95% confidence levels, k=2)

Test Item	Uncertainty
Uncertainty for Conduction emission test in No. 1 Conduction	2.6dB(150KHz to 30MHz)
Uncertainty for Radiation Emission test in 3m chamber	3.6dB(30~200MHz, Polarization: H)
	4.0dB(30~200MHz, Polarization: V)
	3.6dB(200M~1GHz, Polarization: H)
	3.8dB(200M~1GHz, Polarization: V)
Uncertainty for Radiation Emission test in 3m chamber(1GHz-25GHz)	4.6dB(1~6GHz, Distance: 3m)
	4.6dB(6~25GHz, Distance: 3m)
Uncertainty for Radiated Spurious Emission test in RF chamber	3.7dB(30MHz~1000MHz)
	3.3dB(1~26.5GHz)
Uncertainty for Conduction Spurious emission test	2.0dB
Uncertainty for Output power test	0.8dB
Uncertainty for Bandwidth test	83kHz
Uncertainty for DC power test	0.1%
Uncertainty for test site temperature and humidity	0.6°C
	3%

Note: EMI uncertainty is evaluated by CISPR16-4-2.

The value of measurement uncertainty of EMI is less than U_{CISPR} .

The value is not calculated in the test results.


3. POWER LINE CONDUCTED EMISSION TEST

3.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	1# Shielding Room	AUDIX	N/A	N/A	May.17,18	3 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100842	Apr.14,19	1 Year
3.	L.I.S.N.#1	Rohde & Schwarz	ENV216	102160	Oct.13,19	1 Year
4.	L.I.S.N.#2	Kyoritsu	KNW-407	8-1636-1	Apr.18,19	1 Year
5.	Terminator	Hubersuhner	50Ω	No.1	Apr.14,19	1 Year
6.	Terminator	Hubersuhner	50Ω	No.2	Apr.14,19	1 Year
7.	RF Cable	Fujikura	RG55/U	No.2	Apr.13,19	1 Year
8.	Coaxial Switch	Anritsu	MP59B	6201397223	Apr.14,19	1 Year
9.	Test Software	AUDIX	e3	6.100913a	N/A	N/A

Note: N/A means Not applicable.

3.2. Block Diagram of Test Setup

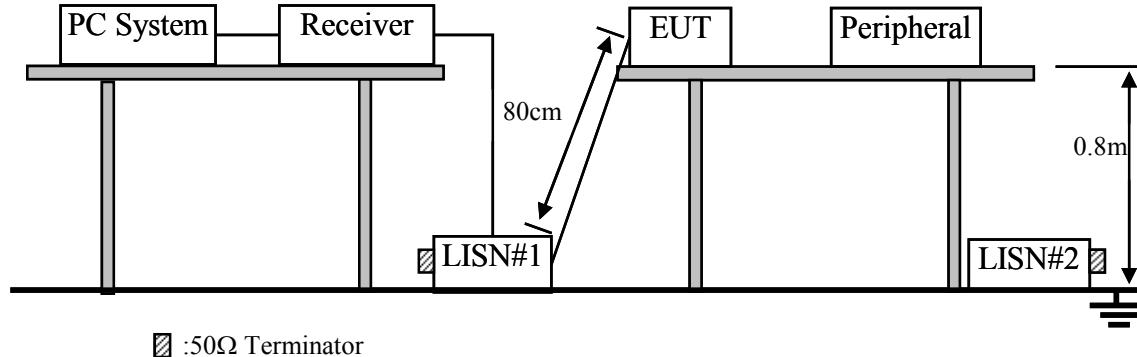

3.3. Power Line Conducted Emission Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(µV)	Average Level dB(µV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

3.4. Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

3.4.1. WiFi +BT module (EUT)

Model Number : WCT5GM2511

Serial Number : N/A

3.4.2. Support Equipment: As Tested Supporting System Details, in Section 2.2.

3.5.Operating Condition of EUT

- 3.5.1. Setup the EUT and simulator as shown as Section 3.2.
- 3.5.2. Turn on the power of all equipments.
- 3.5.3. PC run test software to control EUT work in Tx mode.

3.6.Test Procedure


The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power Via AC unit connected to the power mains through a line impedance stabilization network (L.I.S.N. 1#). This provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs). The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Test.

The bandwidth of test receiver (R & S ESCI) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.7.Power Line Conducted Emission Test Results


PASS. (All emissions not reported below are too low against the prescribed limits.)

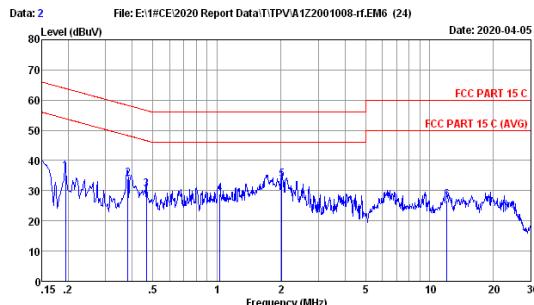

Site no :1# Conduction Data No :2
Dis./Lisn :2019 ENV216 L LISN phase:
Limit :FCC PART 15 C
Env./Ins. :21.7*C/46% Engineer :Evan
EUT :
Power Rating :DC 5V From Adapter Input AC 120V/60Hz
Test Mode :BT3.0 TX

No	Freq (MHz)	LISN		Cable		Emission			Margin (dB)	Remark
		Factor (dB)	loss (dB)	Reading (dBuV)	Level (dBuV)	Limits (dBuV)				
1	0.194	9.60	0.03	26.73	36.36	63.64	27.48	QP		
2	0.381	9.60	0.02	24.42	34.04	58.25	24.21	QP		
3	0.466	9.60	0.02	20.92	30.54	56.58	26.04	QP		
4	1.032	9.60	0.03	19.18	28.81	56.00	27.19	QP		
5	2.023	9.60	0.04	23.96	33.60	56.00	22.40	QP		
6	12.060	9.70	0.11	16.94	26.75	60.00	33.25	QP		

Remarks: 1. Emission Level=LISN Factor+Cable Loss+Reading.
2. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.

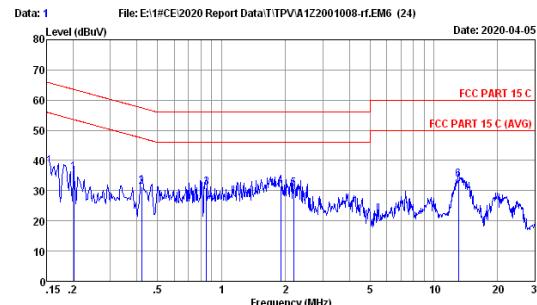

Site no :1# Conduction Data No :1
Dis./Lisn :2019 ENV216 N LISN phase:
Limit :FCC PART 15 C
Env./Ins. :21.7*C/46% Engineer :Evan
EUT :
Power Rating :DC 5V From Adapter Input AC 120V/60Hz
Test Mode :BT3.0 TX

No	Freq (MHz)	LISN Factor (dB)	Cable loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.202	9.60	0.03	26.37	36.00	63.54	27.54	QP
2	0.421	9.60	0.02	21.58	31.20	57.42	26.22	QP
3	0.848	9.60	0.03	21.49	31.12	56.00	24.88	QP
4	1.898	9.60	0.04	21.98	31.62	56.00	24.38	QP
5	2.190	9.60	0.04	20.91	30.55	56.00	25.45	QP
6	13.057	9.60	0.12	23.92	33.64	60.00	26.36	QP

Remarks: 1. Emission Level=LISN Factor+Cable Loss+Reading.
2. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.

4. RADIATED EMISSION MEASUREMENT**4.1. Test Equipment**

Frequency range: 30~1000MHz

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3#Chamber(NSA)	AUDIX	N/A	N/A	May.10,19	1 Year
2.	3#Chamber(SE)	AUDIX	N/A	N/A	May.17,18	3 Year
3.	Signal Analyzer	Rohde & Schwarz	FSV30	104050	Apr.14,19	1 Year
4.	EMI Test Receiver	Rohde & Schwarz	ESR7	101547	Apr.14,19	1 Year
5.	Amplifier	HP	8447D	2648A04738	Apr.14,19	1 Year
6.	Tri-log-Broadband Antenna	SCHWARZBECK	VULB 9168	493	Jul.24,19	1 Year
7.	NSA Cable	HUBER+SUHNER	CFD400NL-LW	No.3	Oct.13,19	1 Year
8.	Coaxial Switch	Anritsu	MP59B	6201397222	Apr.14,19	1 Year
9.	Test Software	AUDIX	e3	6.2009-5-21a(n)	N/A	N/A


Note: N/A means Not applicable.

Frequency range: above 1000MHz


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3#Chamber(Svswr)	AUDIX	N/A	N/A	Apr.18,19	1 Year
2.	3#Chamber(SE)	AUDIX	N/A	N/A	May.17,18	3 Year
3.	Signal Analyzer	Rohde & Schwarz	FSV30	104050	Apr.14,19	1 Year
4.	Horn Antenna	ETC	MCTD 1209	DRH15F03007	Jun.17,19	1 Year
5.	Horn Antenna	ETS	3116	00060089	Dec.02,19	1 Year
6.	Amplifier	Agilent	83017A	MY53270084	Oct.13,19	1 Year
7.	RF Cable	Hubersuhner	SUCOFLEX-106	505238/6	Apr.13,19	1 Year
8.	Test Software	AUDIX	e3	6.2009-5-21a(n)	N/A	N/A

Note: N/A means Not applicable.

4.2. Block Diagram of Test Setup For frequency range 30MHz-1000MHz

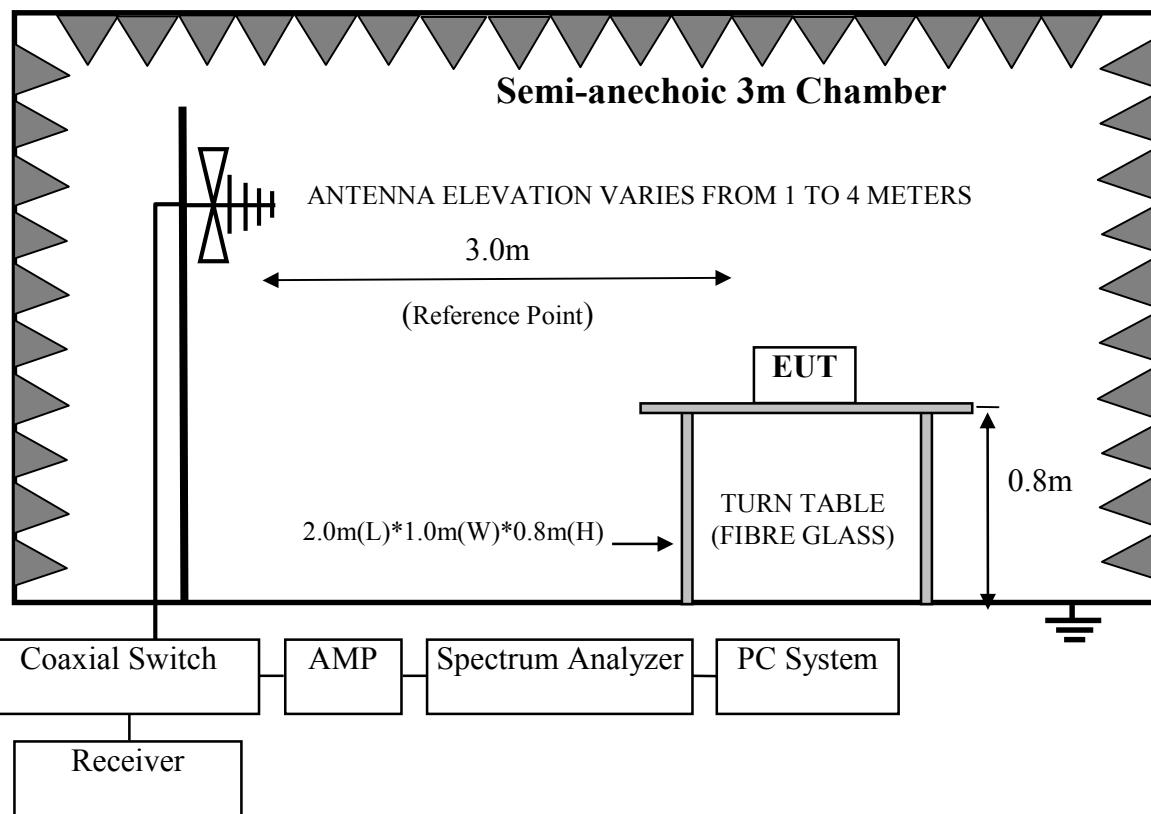

For frequency range above 1GHz

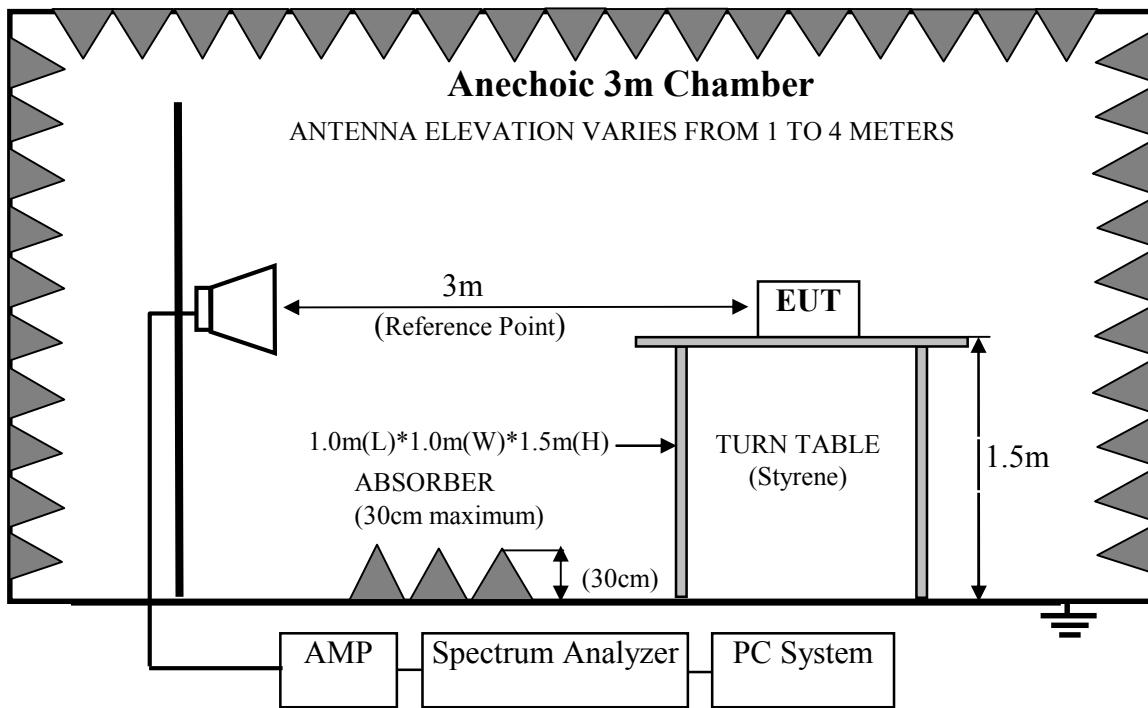

4.3.Radiated Emission Limit Standard:

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		µV/m	dB(µV)/m
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000MHz	3	74.0 dB(µV)/m (Peak) 54.0 dB(µV)/m (Average)	

Remark : (1) Emission level $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V}/\text{m}$

- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.
- (4) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

4.4.EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

4.4.1. WiFi +BT module (EUT)

Model Number	:	WCT5GM2511
Serial Number	:	N/A

4.5.Operating Condition of EUT

4.5.1. Setup the EUT and simulator as shown as Section 4.2.

4.5.2. Turn on the power of all equipments.

4.5.3. Let EUT work in Tx mode.

4.6.Test Procedure**Frequency below 30MHz:**

The EUT setup on the turn table which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 1 m to find the maximum emission level. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground for frequency 30MHz~1000MHz, 1.5 meter high above ground for frequency above 1GHz and put the absorbing with $2.4\text{m(L)} \times 2.4\text{m(W)} \times 0.3\text{m(H)}$ on the ground . The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna for frequency 30MHz~1000MHz, and the Horm antenna is used as receiving antenna for frequency above 1GHz. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.10-2013 on radiated emission Test.

This test was performed with EUT in X, Y, Z position, and the worse case was found when EUT in X position as the test photo indicated.

The bandwidth of the EMI test receiver (R&S ESR7) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's RBW is set at 1MHz and VBW is set at 3MHz for peak emissions measurement above 1GHz

This device is pulse Modulated, a duty cycle factor was used to calculated average level based measured peak level.

The frequency range from 30MHz to 10th harmonic (25GHz) are checked. and no any emissions were found from 18GHz to 25 GHz, So the radiated emissions from 18GHz to 25GHz were not record.

4.7.Radiated Emission Test Results



PASS.

All the emissions from 30MHz to 25GHz were comply with the 15.209 Limit.


Note 1: The duty cycle factor for calculate average level is -24.627dB, and average limit is 20dB below peak limit, so if peak measured level comply with average limit, the average level was deemed to comply with average limit.

Note 2: The emissions (9kHz~30MHz) not reported for there is no emission be found.


Duty cycle factor = $20\log(\text{Dwell time}/100\text{ms}) = -24.627\text{dB}$

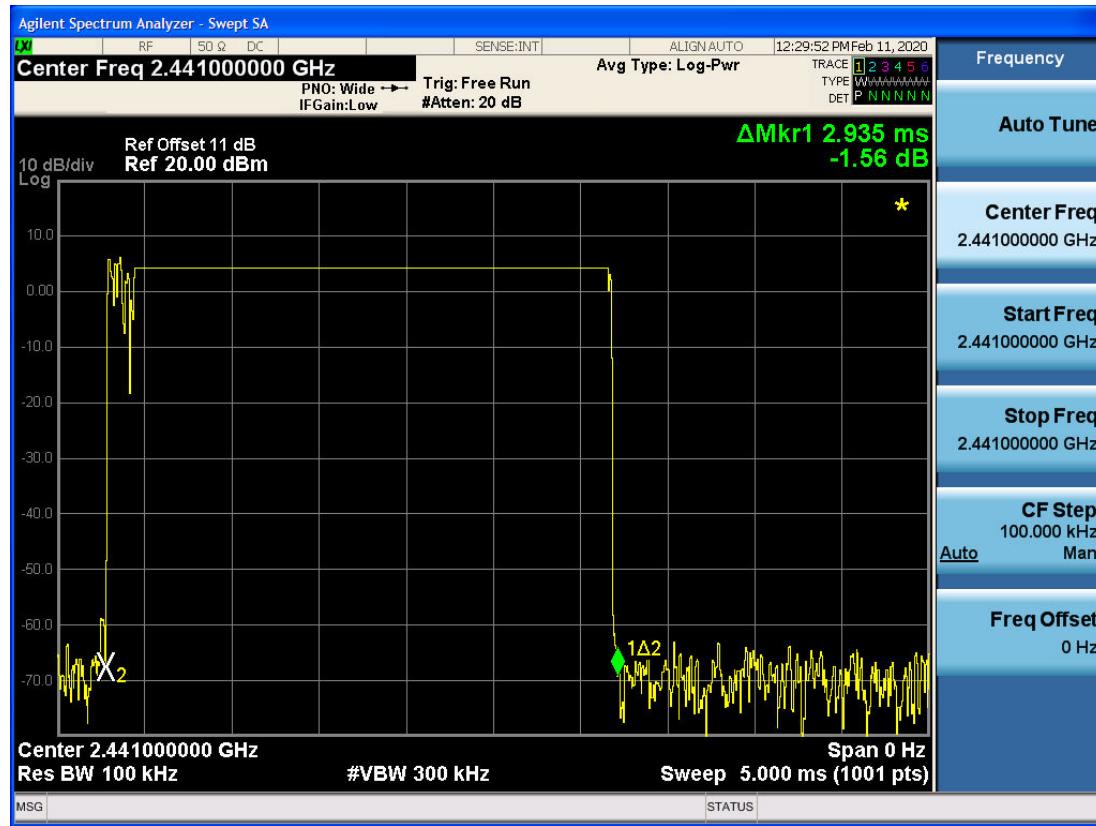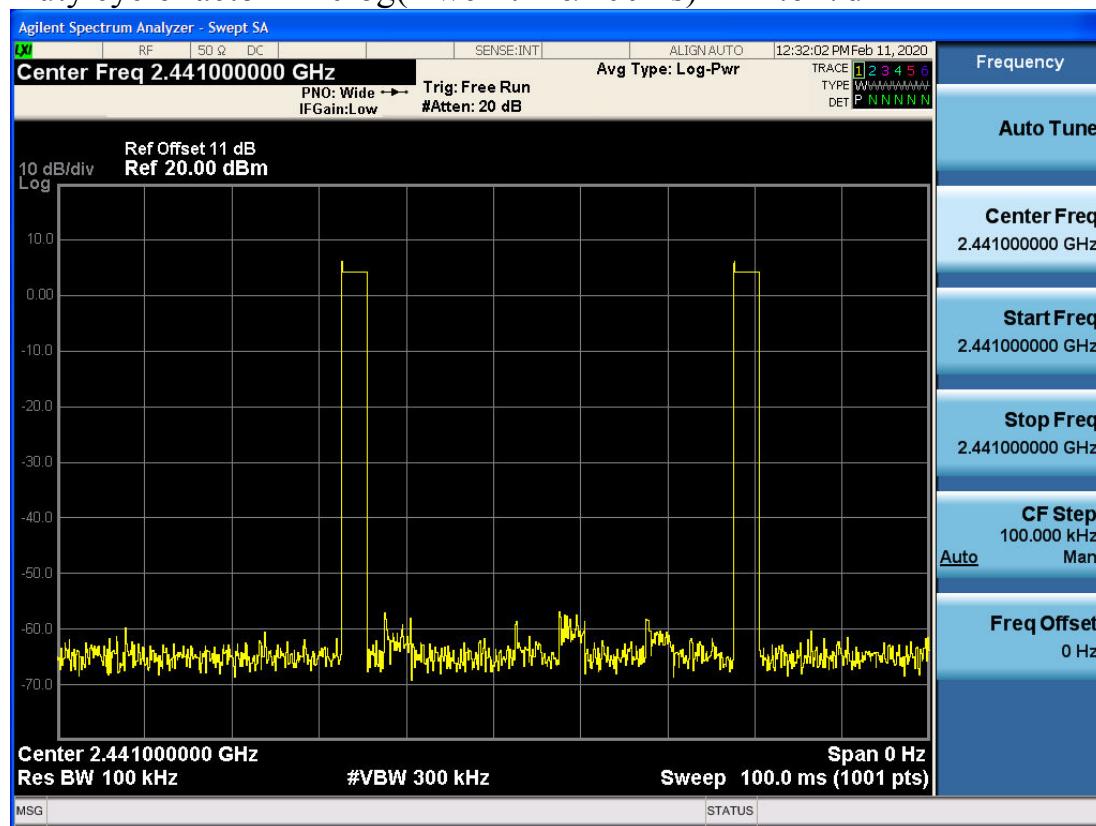

Frequency: 30MHz~1GHz

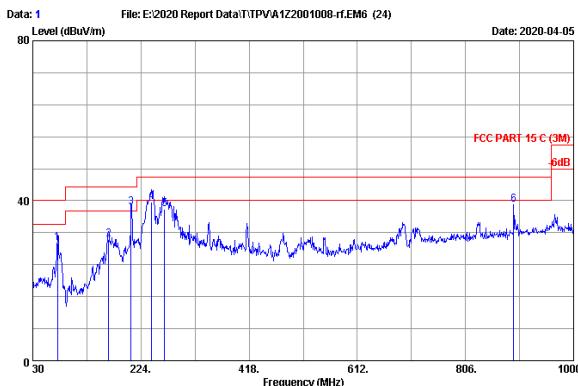

Site no. : 3m Chamber Data no. : 1
 Dis. / Ant. : 3m 2019 VULB9168-493 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 22.4°C/59% Engineer : Hogen
 EUT :
 Power rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : BT3.0 Tx

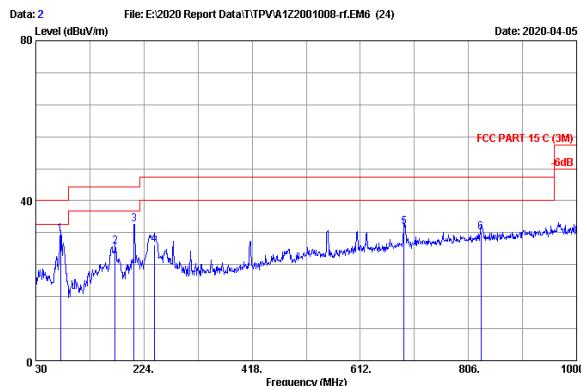


Site no. : 3m Chamber Data no. : 2
 Dis. / Ant. : 3m 2019 VULB9168-493 Ant. pol. : VERTICAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 22.4°C/59% Engineer : Hogen
 EUT :
 Power rating : DC 5V From PC Input AC 120V/60Hz
 Test Mode : BT3.0 Tx

No.	Freq. (MHz)	Ant. (dB/m)	Cable (dB)	Emission Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	74.620	16.60	0.82	11.90	29.32	40.00	10.68	QP
2	165.800	19.40	1.29	9.57	30.26	43.50	13.24	QP
3	206.540	17.03	1.47	19.94	38.44	43.50	5.06	QP
4	243.400	18.03	1.60	20.12	39.75	46.00	6.25	QP
5	266.680	18.82	1.69	17.48	37.99	46.00	8.01	QP
6	892.330	29.30	3.33	6.40	39.03	46.00	6.97	QP


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

No.	Freq. (MHz)	Ant. (dB/m)	Cable (dB)	Emission Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	74.620	16.60	0.82	14.20	31.62	40.00	8.38	QP
2	172.590	18.80	1.32	8.43	28.55	43.50	14.95	QP
3	206.540	17.03	1.47	15.53	34.03	43.50	9.47	QP
4	242.430	18.00	1.60	9.30	28.90	46.00	17.10	QP
5	690.570	27.00	2.85	3.56	33.41	46.00	12.59	QP
6	828.310	28.66	3.23	0.27	32.16	46.00	13.84	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

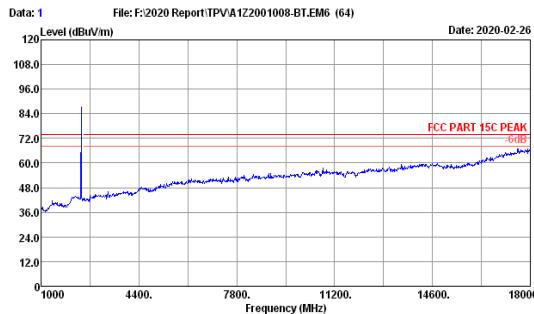Frequency: 1GHz~18GHz


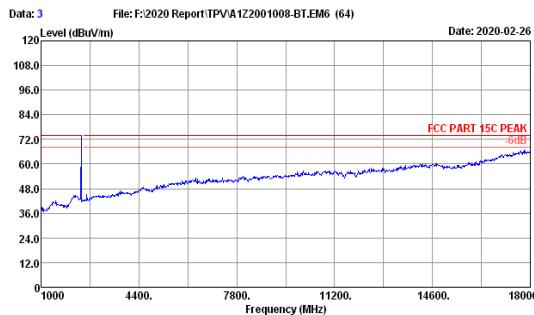
Site no. : 3m Chamber Data no. : 1
Dis. / Ant. : 3m 2019 MCTD1209-3007 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT :
Power rating : DC 5V From PC Input AC 120V/60Hz
Test Mode : BT3.0 GFSK 2402MHz Tx Mode

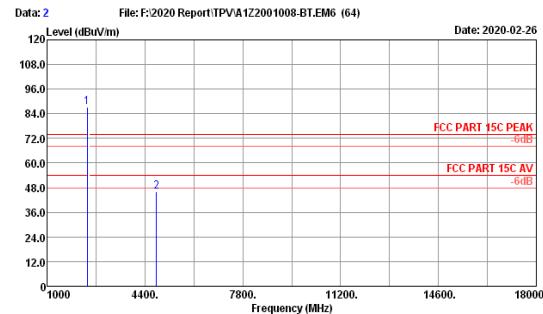


Site no. : 3m Chamber Data no. : 2
Dis. / Ant. : 3m 2019 MCTD1209-3007 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT :
Power rating : DC 5V From PC Input AC 120V/60Hz
Test Mode : BT3.0 GFSK 2402MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading Level (dBuV)	Emission Limits (dBuV/m)	Margin (dB)	Remark
1	4002.00	27.70	3.04	35.04	91.52	87.22	-----	Peak
2	4804.00	31.70	4.27	34.36	44.53	46.14	74.00	27.86 Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official
limit are not reported.



Site no. : 3m Chamber Data no. : 3
Dis. / Ant. : 3m 2019 MCTD1209-3007 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT :
Power rating : DC 5V From PC Input AC 120V/60Hz
Test Mode : BT3.0 GFSK 2402MHz Tx Mode


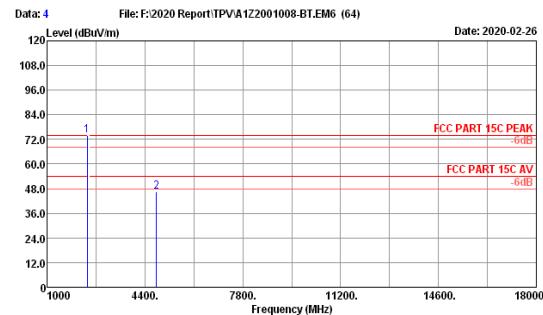


Site no. : 3m Chamber Data no. : 4
Dis. / Ant. : 3m 2019 MCTD1209-3007 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Garry
EUT :
Power rating : DC 5V From PC Input AC 120V/60Hz
Test Mode : BT3.0 GFSK 2402MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading Level (dBuV)	Emission Limits (dBuV/m)	Margin (dB)	Remark
1	4002.00	27.70	3.04	35.04	78.33	74.03	-----	Peak
2	4804.00	31.70	4.27	34.36	45.07	46.68	74.00	27.32 Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official
limit are not reported.

FCC ID: ARS-WCT5GM2511

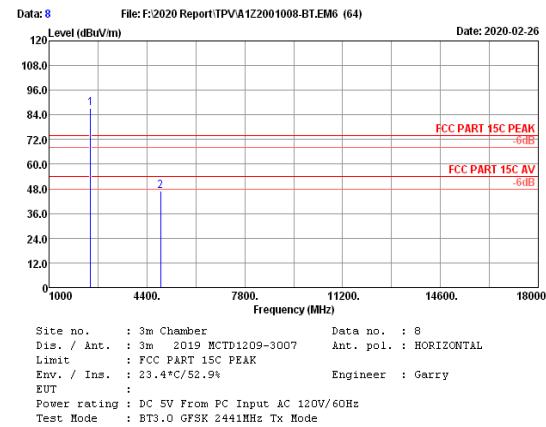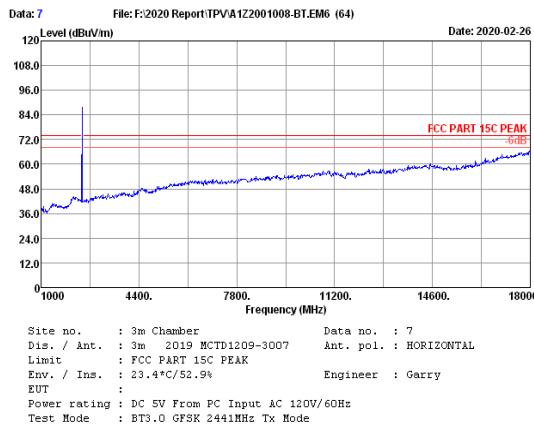

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.90	3.08	35.02	91.09	87.05	-----	-----	Peak
2	4882.00	32.02	4.30	34.38	45.18	47.12	74.00	26.88	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official
limit are not reported.

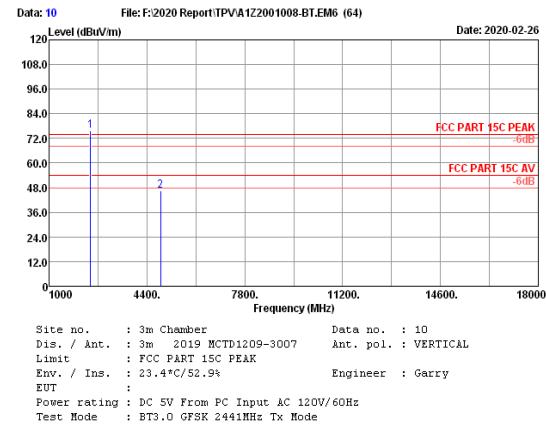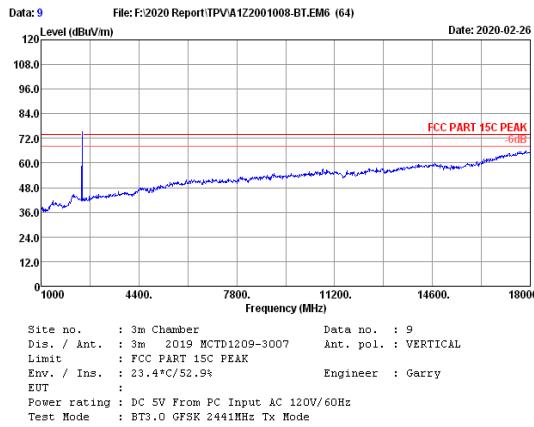

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.90	3.08	35.02	79.62	75.58	-----	-----	Peak
2	4882.00	32.02	4.30	34.38	44.72	46.66	74.00	27.34	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official
limit are not reported.

FCC ID: ARS-WCT5GM2511

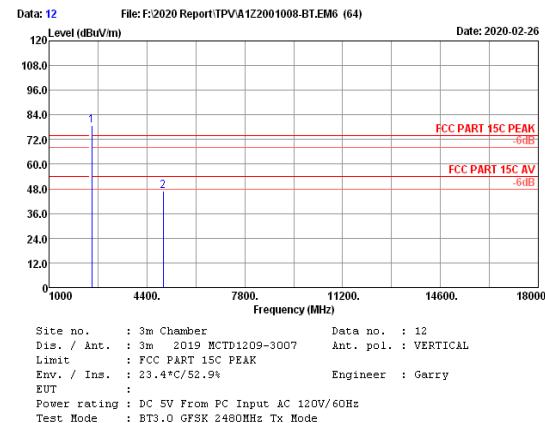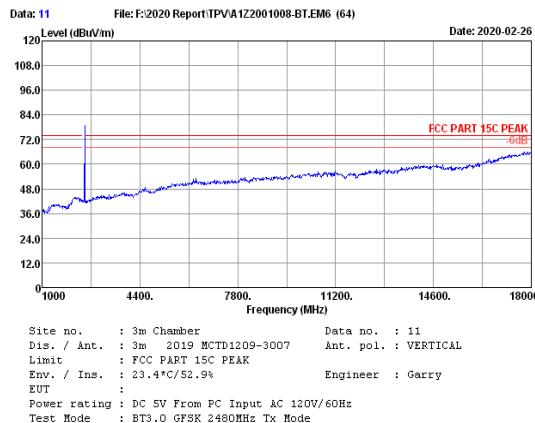

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	28.03	3.10	35.01	82.64	78.76	-----	-----	Peak
2	4960.00	32.70	4.33	34.39	44.43	47.07	74.00	26.93	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

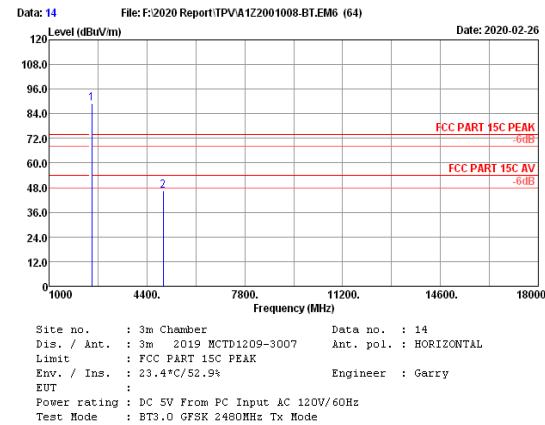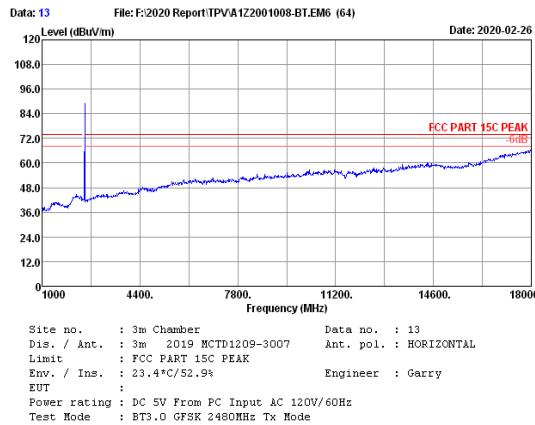

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	28.03	3.10	35.01	92.67	88.79	-----	-----	Peak
2	4960.00	32.70	4.33	34.39	43.74	46.38	74.00	27.62	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: ARS-WCT5GM2511

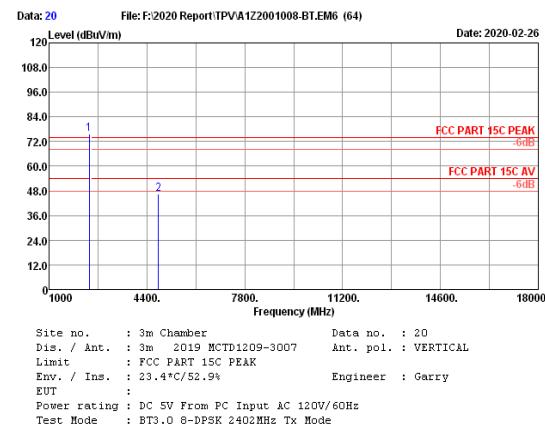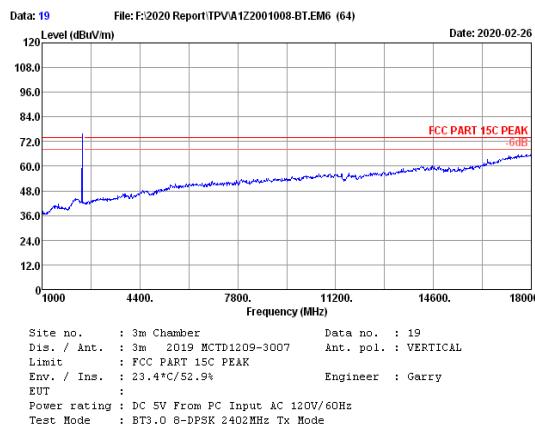

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.70	3.04	35.04	80.06	75.76	-----	-----	Peak
2	4804.00	31.70	4.27	34.36	44.80	46.41	74.00	27.59	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

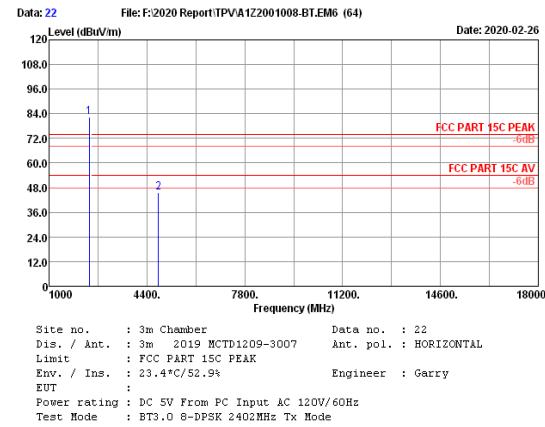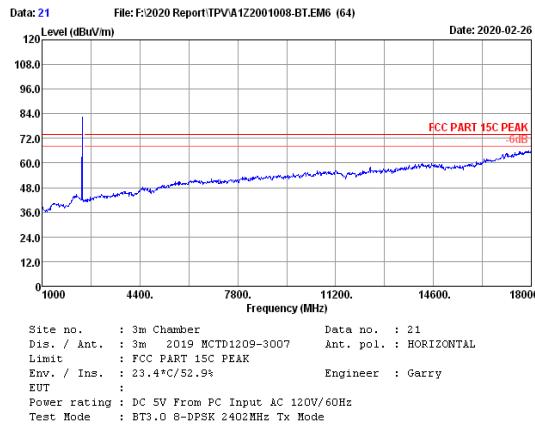

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.70	3.04	35.04	86.68	82.38	-----	-----	Peak
2	4804.00	31.70	4.27	34.36	43.88	45.49	74.00	28.51	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: ARS-WCT5GM2511

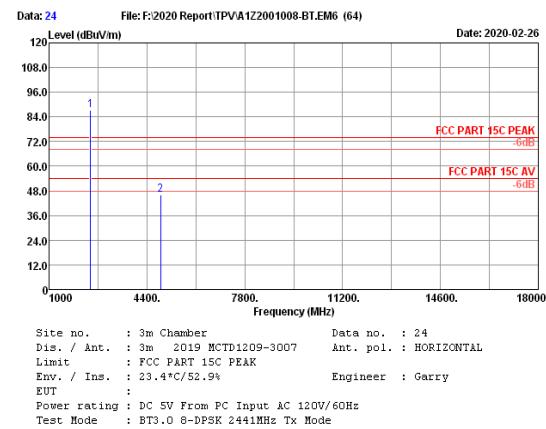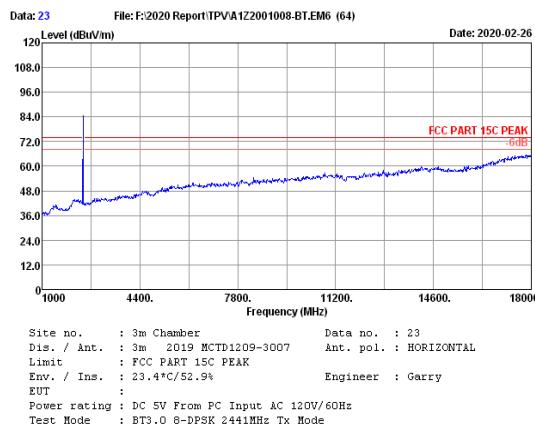

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.90	3.08	35.02	91.22	87.18	-----	-----	Peak
2	4882.00	32.02	4.30	34.38	44.14	46.08	74.00	27.92	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

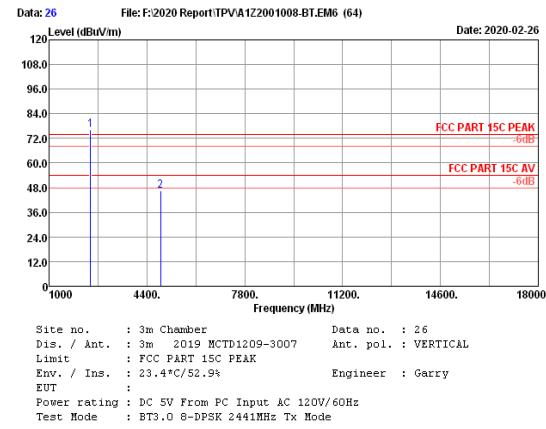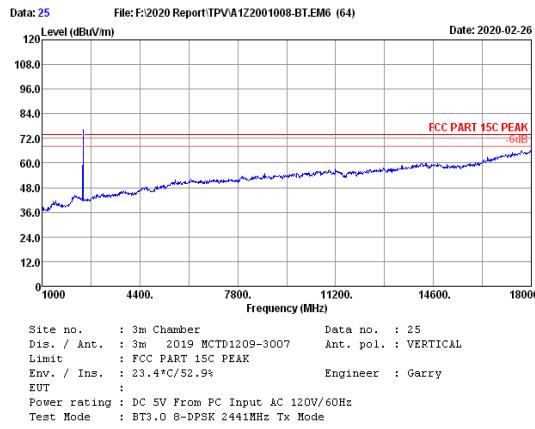

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.90	3.08	35.02	80.40	76.36	-----	-----	Peak
2	4882.00	32.02	4.30	34.38	44.45	46.39	74.00	27.61	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: ARS-WCT5GM2511

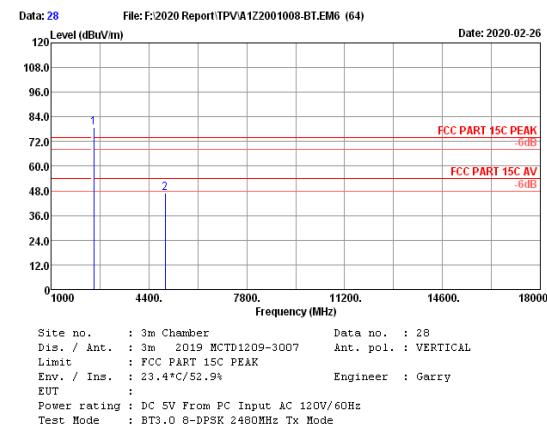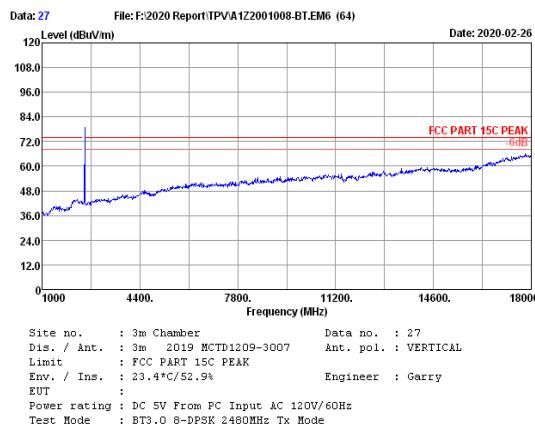

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	28.03	3.10	35.01	82.67	78.79	-----	-----	Peak
2	4960.00	32.70	4.33	34.39	44.38	47.02	74.00	26.98	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

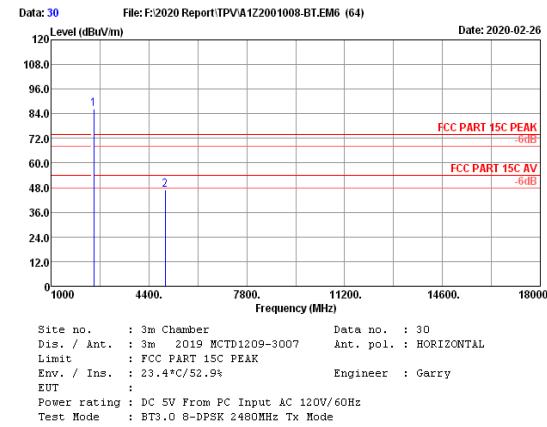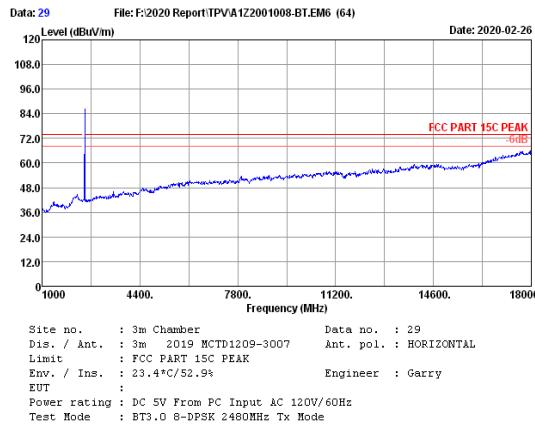

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	28.03	3.10	35.01	90.15	86.27	-----	-----	Peak
2	4960.00	32.70	4.33	34.39	44.15	46.79	74.00	27.21	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp factor.
2. The emission levels that are 20dB below the official limit are not reported.

5. CONDUCTED SPURIOUS EMISSIONS

5.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Jun.30,19	1 Year
2.	Attenuator	Agilent	8491B	MY39269201	Oct.13,19	1 Year
3.	RF Cable	EMCI	EMC102-KM-KM 3500	170702	May.13,19	1 Year

5.2. Block Diagram of Test Setup



5.3. Limit

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

5.4. Test Procedure

Use the test method described in ANSI C63.10 clause 7.8.8:

The transmitter output was connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz, The video bandwidth is set to 300 kHz and measure all the emissions With peak detector.

Note: The cable loss and attenuator loss were offset into spectrum analyzer as an amplitude offset.

5.5. Test result


PASS (The testing data was attached in the next pages.)

EUT: WiFi +BT module		
M/N: WCT5GM2511		
Test date: 2020-02-11	Pressure: 102.1±1.0 kpa	Humidity: 51.1±3.0%
Tested by: Lynn	Test site: RF site	Temperature: 22.8±0.6 °C


The figure displays four sets of Agilent Spectrum Analyzer screenshots arranged in a 4x2 grid. Each set includes a spectrum plot, a marker table, and a control panel with a 'More' button.

- Top Left:** 2402MHz(30MHz – 1GHz) - Spectrum from 30 MHz to 1 GHz. Marker 1 at 845.77 MHz is -59.627 dBm. Control panel shows 'Mkr1→Ref Lvl'.
- Top Right:** 2402MHz(10GHz – 26GHz) - Spectrum from 10 GHz to 26 GHz. Marker 1 at 25.600 GHz is -49.822 dBm. Control panel shows 'Mkr1→Ref Lvl'.
- Middle Left:** 2402MHz(1GHz – 10GHz) - Spectrum from 1 GHz to 10 GHz. Marker 2 at 3.331 GHz is -34.081 dBm. Control panel shows 'Mkr1→Ref Lvl'.
- Middle Right:** 2441(30MHz – 1GHz) - Spectrum from 30 MHz to 1 GHz. Marker 1 at 737.13 MHz is -59.165 dBm. Control panel shows 'Mkr1→Ref Lvl'.
- Bottom Left:** 2402MHz(2.3GHz – 2.4GHz) - Spectrum from 2.3 GHz to 2.4 GHz. Marker 1 at 2.401 GHz is -6.851 dBm. Control panel shows 'Mkr1→Ref Lvl'.
- Bottom Right:** 2441(1GHz – 10GHz) - Spectrum from 1 GHz to 10 GHz. Marker 2 at 3.331 GHz is -34.132 dBm. Control panel shows 'Mkr1→Ref Lvl'.


2441(10GHz – 26GHz)

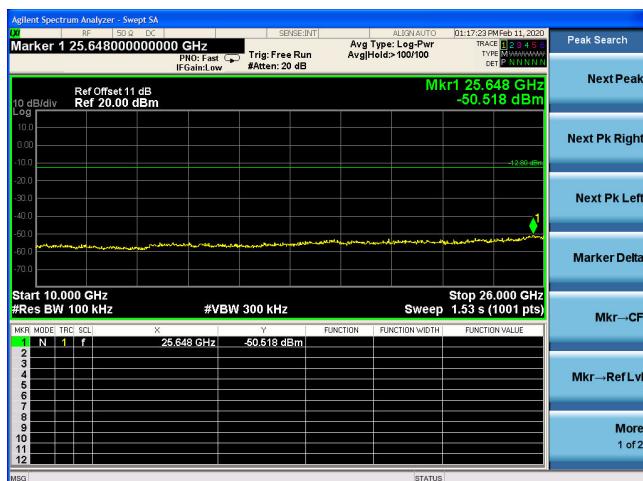


2480MHz(2.4GHz – 2.5GHz)

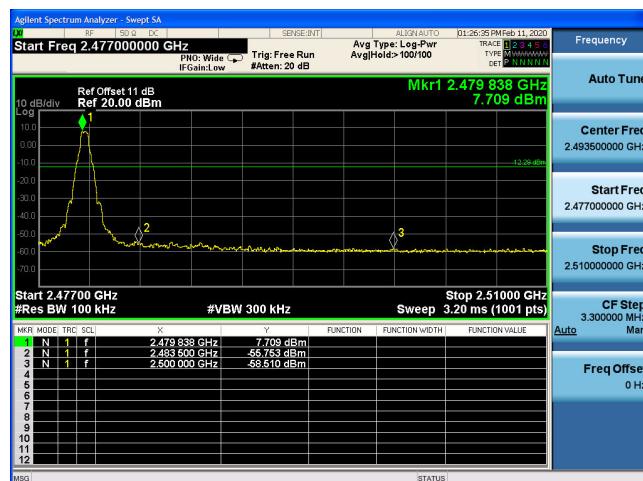


2480MHz(30MHz – 1GHz)

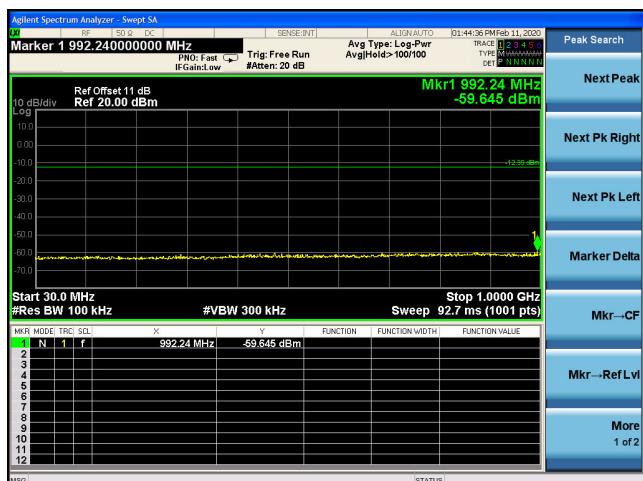


2480MHz(10GHz – 26GHz)

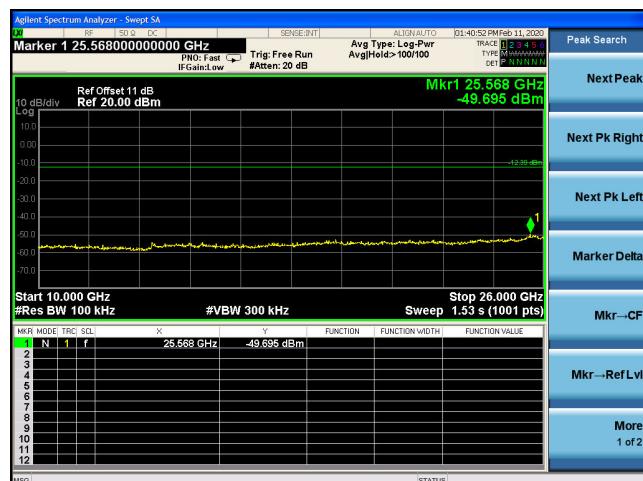


2480MHz(1GHz – 10GHz)

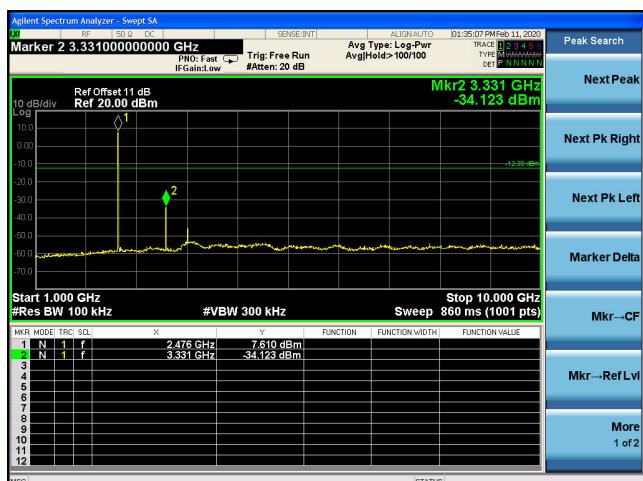


8-DPSK

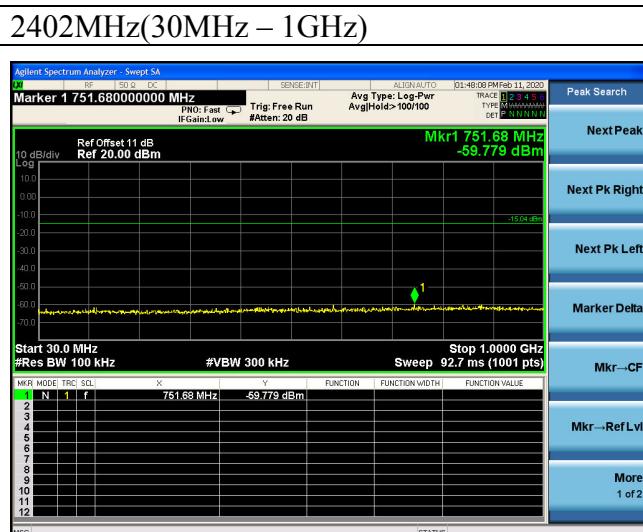


2402MHz(1GHz – 10GHz)

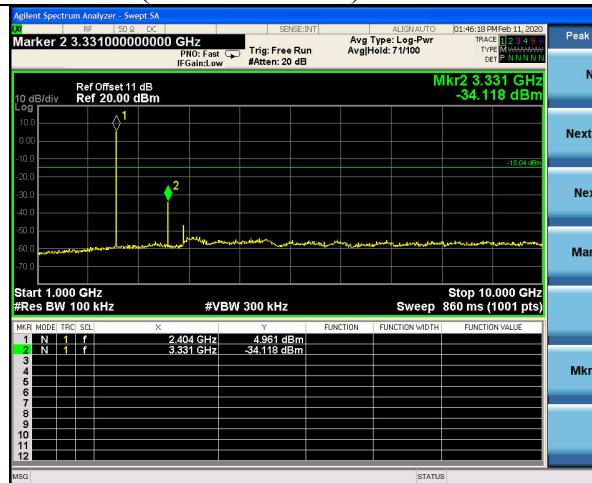


2441MHz (30MHz – 1GHz)

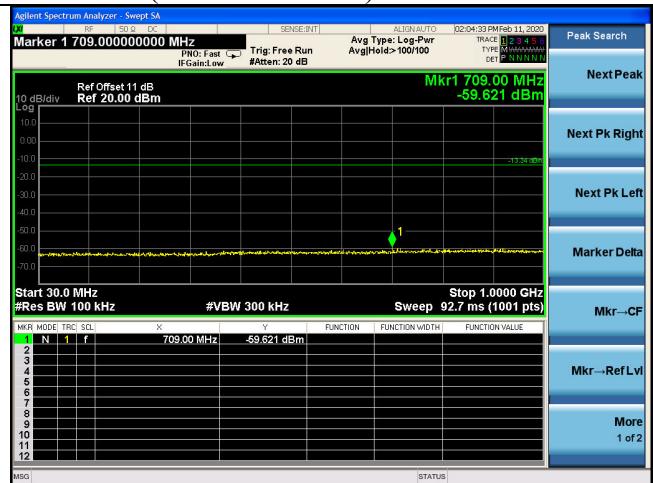


2402MHz(2.3GHz – 2.4GHz)

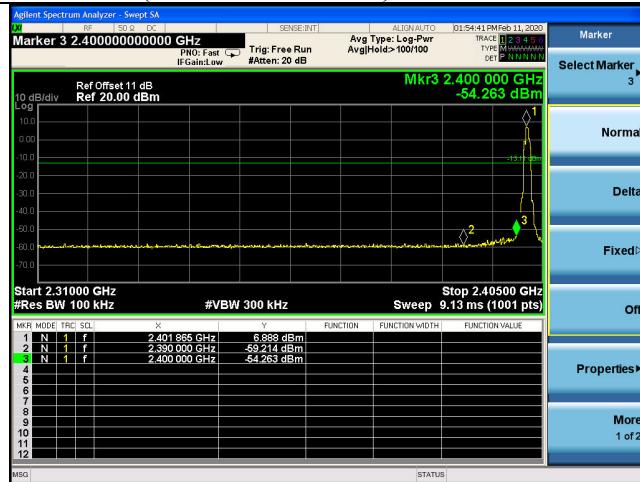

2441MHz(1GHz – 10GHz)

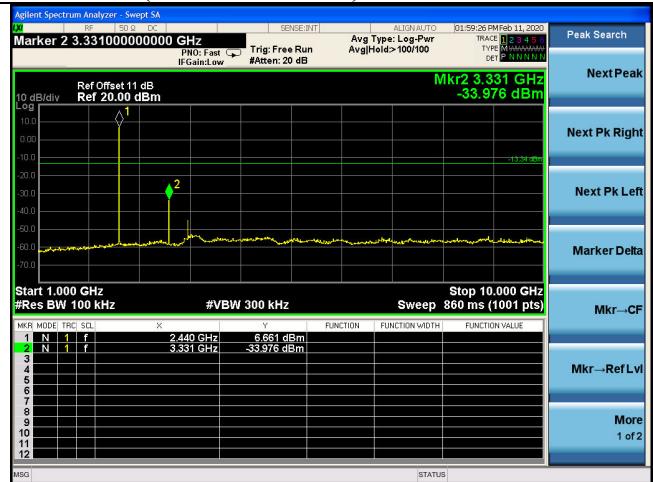

2402MHz(10GHz – 26GHz)

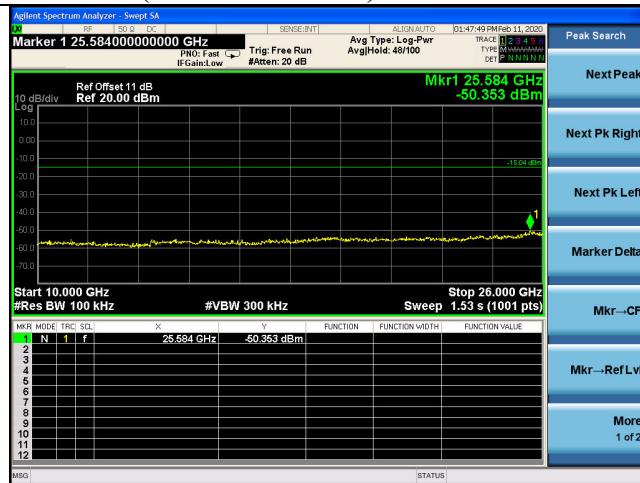

2441MHz(10GHz – 26GHz)

