



Applicant	TOP VICTORY ELECTRONICS (TAIWAN) CO., LTD.
FCC ID: ARS-WPCWATXA11	IC: 9190A-WPCWATXA11
RF Exposure Requirements (FCC KDB 680106 D01)	
Requirements	Statements
(a) Power transfer frequency is less than 1 MHz	120KHz~145KHz Please refer to Operational Description (Specification) (Page 8)
(b) Output power from each primary coil is less than 5 watts	Less than 5W, Please refer to: Please refer to Operational Description (Specification) (Page 8)
(c) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils	This device single coil, Please refer to Operational Description (Specification) (1. General Description) photo 
(d) Client device is inserted in or placed directly in contact with the transmitter	Charging only when the client device is placed directly in contact with transmitter. 

<p>(e) The maximum coupling surface area of the transmit (charging) device is between 60 cm² and 400 cm².</p>	<p>The coil round area is $3.1416 \times 2.5 \times 2.5 = 19.635$ cm². Please refer to Operational Description (Specification) (Page 6)</p>
<p>(f) Aggregate leakage fields at 10 cm surrounding the device from all simultaneous transmitting coils are demonstrated to be less than 30% of the MPE limit.</p>	<p>The highest leakage filed is less than 30 % of the MPE limit. Please refer to BV RF Exposure Report FCC Application: SA160823D05 ISED Application: SA160823D05-1</p>

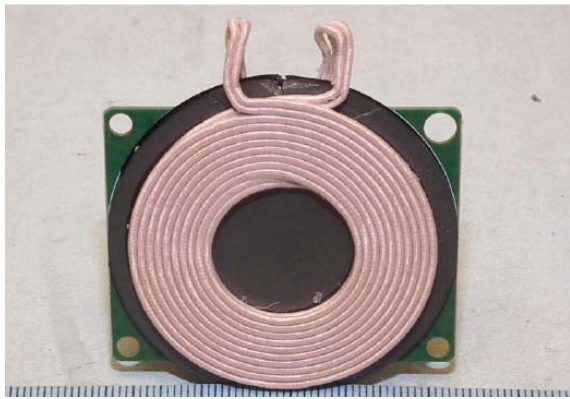

Rex Lai
Assistant Manager
Bureau Veritas Consumer Products Services (H.K.) Ltd., Hsinchu Branch