



Applicant:	TOP VICTORY ELECTRONICS (TAIWAN) CO., LTD.
FCC ID:	ARS-WPCWATXMPA5
RF Exposure Requirements ( FCC KDB 680106 D01 v03)	
Requirements	Statements
(a) Power transfer frequency is less than 1 MHz	Operating Frequency: 127~128kHz Please refer to Operational Description-ENS000115400_WP C-W-A-TX-MPA5-00.
(b) Output power from each primary coil is less than or equal to 15 watts.	Equal to 15W, Please refer to page 1 of Operational Description-ENS000115400_WP C-W-A-TX-MPA5-00 as below.  <b>1. Features and application:</b>  (1) Power transfer up to 15W
(c) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.	This device single coil, please refer to product specification (1. General Description)photo  
(d) Client device is placed directly in contact with the transmitter.	Charging only when the client device is placed directly in contact with transmitter.  
(e)	This device is designed for typical desktop Qi

Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).	Charging monitor base so it applies to mobile RF exposure condition only.
(f) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.	The highest leakage field is less than 30 % of the MPE limit. Please refer to RF Exposure Info (MPE).

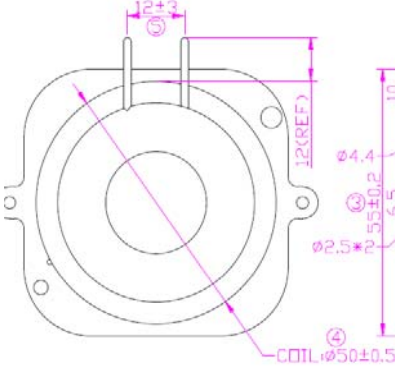

Rex Lai  
Assistant Manager  
Bureau Veritas Consumer Products Services (H.K.) Ltd., Hsinchu Branch