


label 料号: label Part NO.: Q40G046N-813-07A	
客户 Customer	PHILIPS
型号 Model	BDL4620QL
销向 Sales Area	WW(除JP)
安规签核Safety parts: Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	
内销中文字体要求高度1.8mm以上 Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	
针对带有UL logo的标签,其厂家须在最小包装上标示UL Recognized Component Mark  公司名称,型号及 UL file no.	
条码印刷: barcode print: 1. 所有条码读码等级: C级及以上, 客户有特殊要求除外;	
<b>REVISION</b>	
<b>VERSION A</b> 版本变更说明: Version Changed Description:	
与Q40G042N-813-07D相比, 删除FCC logo 增加FCC警告, FCC ID	
备注Remark:  OCT-04-15 WR.ZHENG	

**NOTE:**

- 印刷如上图  
Printing as the drawing
- 尺寸:具体见上图所示(公差: +/-0.2mm),4R=2mm  
Dimension:as the above drawing(Tolerance:+/-0.2mm),4R=2mm
- 材质: 白色PET带不干背胶(材质需经过UL认证)  
Material:PET with gule on the backside (material must be certified by UL laboratory)
- 底色: 黑色; 字体颜色: 白色  
Background color:Black, Fonts color:White
- 贴附位置: 后壳ID LABEL槽内
- 粘力: 将label切成25mm宽,一端粘贴于钢板上,以180°方向的力拉胶带另一端,所得拉力即为粘力。用粘力测试仪进行测试。  
Stickiness strength :Cut label into 25mm width ,one end paste on the plate , with 180 ° direction pulling the other end of the tape, the pull is stickiness strength. With stickiness strength instrument for testing.
- 正常耐温测试: 在钢板上耐温范围为-20~100°C, 在80~100°C保持8小时后不翘角,不分层,不脱落,不起泡等。  
在塑胶、纸箱上耐温范围为-20~65°C, 在65°C保持8小时后不翘角,不分层,不脱落,不起泡等。  
The normal temperature test: The range of temperature on plate is -20 ~ 100 ° C . In 80 ~ 100 ° C to maintain 8 hours , the label should not be warp,delamination,frothy and so on. The range of temperature on plastic and carton is -20 ~ 65 ° C. In 65 ° C to maintain 8 hours ,the label should not be warp, delamination,frothy and so on.
- 耐温湿度循环测试: 循环条件(贴在塑胶咬花面(PET)贴在塑胶咬花面): 温度-20~65°C,湿度30~90%,时间96小时后不翘角不分层不脱落不起泡等。  
Temperature and humidity cycle test : Cycle conditions(stick on texture(PET) , stick on texture):In temperature of -20 ~ 65 ° C and humidity of 30~90%to maintain 96 hours , the label should not be warp,delamination,frothy and so on.
- 其它测试要求详见(FQ-背胶类产品测试检验规格)
- 裁切均匀且印刷不可有溢墨及颜色不均等不良现象  
Printing ink can not have overflow and printing color can not be uneven etc.
- 包装方式: 卷状, 连接处打齿孔。  
Packing style: coil and there should be a toothed hole between the link of two pieces
- 两张连接处距离3mm, 左右边离型纸3mm。  
3mm should be left between the link of two pieces.Around the edge of paper distance is 3mm
- 内容由厂内打印, 具体内容业务提供。  
The content printed by the factory barcode group and the specific content provided by SS.
- 印刷不可有溢墨及颜色不均等不良现象

- 根据 TPV 推行 RoHS 的有关规定,所有的原材料及辅助材料必须符合 RoHS 的有关规定
- 所有原材料的规定物质: 如镉(Cd) 汞(Hg) 铅(Pb) 六价铬 PBB's PBDE's 及镉(Cd)+汞(Hg)+铅(Pb)+六价铬(针对随机出货的包装材料)的具体含量依据最新版 RD EMS-01<<供应商环境管理物质管控标准>>的具体限值要求执行

- 1)According to the rule abut RoHS of TPV,All raw material and assistant material should accord with the rule of RoHS
- 2)All the stated substance of raw material: the actual content of Cd/Hg/Pb/Cr/PBB's/PBDE's and Cd+Hg+Pb+Cr(aim at the packing material with the product), should accord with the latest version of RD EMS-01<<The controlled standard aboutenvironment substance for supplier>>.

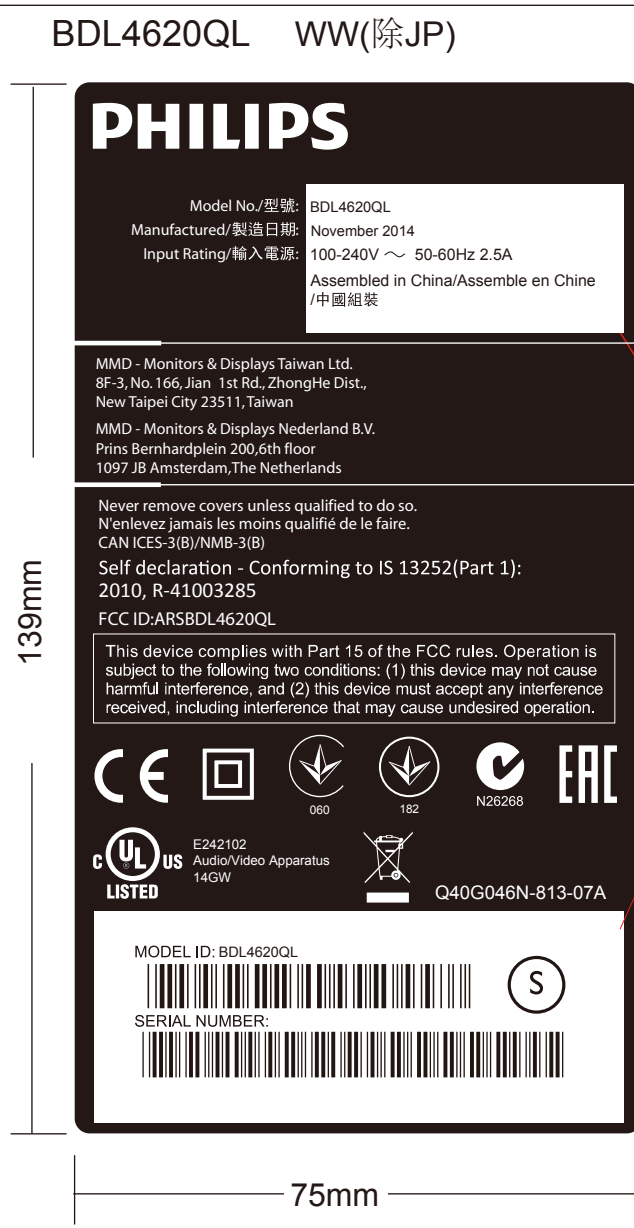

厂内打印,  
具体内容以业务发文为准



Label location