

Top Victory Electronics (Taiwan) Co., Ltd.

Monitor

Model Number: 105S6**

Prepared for : Top Victory Electronics (Taiwan) Co., Ltd.
18/F, No.738, Chung Cheng Road, Chung Ho,
Taipei, Hsien, Taiwan 235

Prepared By : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Ke Feng Rd., 52 Block,
Shenzhen Science & Industrial Park,
Nantou, Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F04104
Date of Test : Mar.17~25, 2004
Date of Report : May.09, 2004

TABLE OF CONTENTS

Description	Page
FCC Test Report for Declaration of Conformity	
1. GENERAL INFORMATION	1-1
1.1. Description of Device (EUT)	1-1
1.2. Tested Supporting System Details	1-2
1.3. Test Facility	1-4
1.4. Test Uncertainty	1-4
2. POWER LINE CONDUCTED EMISSION TEST.....	2-1
2.1. Test Equipment	2-1
2.2. Block Diagram of Test Setup	2-1
2.3. Power Line Conducted Emission Test Limits	2-2
2.4. Configuration of EUT on Test	2-2
2.5. Operating Condition of EUT	2-2
2.6. Test Procedure	2-2
2.7. Power Line Conducted Emission Test Results	2-3
3. RADIATED EMISSION TEST	3-1
3.1. Test Equipment	3-1
3.2. Block Diagram of Test Setup	3-1
3.3. Radiated Emission Limit	3-2
3.4. EUT Configuration on Test	3-2
3.5. Operating Condition of EUT	3-3
3.6. Test Procedure	3-3
3.7. Radiated Emission Test Result	3-4
4. DEVIATION TO TEST SPECIFICATIONS	4-1
5. PHOTOGRAPH.....	5-1
5.1. Photos of Power Line Conducted Emission Test	5-1
5.2. Photos of Radiated Emission Test (In 3m Anechoic Chamber).....	5-2
 APPENDIX I	 (7 pages)
APPENDIX II	(7 pages)

TEST REPORT DECLARATION

Applicant : Top Victory Electronics (Taiwan) Co., Ltd.
 Manufacturer : Top Victory Electronics (Fujian) Co., Ltd.
 EUT Description : Monitor
 (A) MODEL NO. : 105S6**
 (B) SERIAL NO. : F2004050901
 (C) POWER SUPPLY : AC 120V/60Hz

Test Procedure Used:
 FCC Rules and Regulations Part 15 Subpart B Class B Aug, 2003.


The device described above is tested by AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart Class B limits both radiated and conducted emissions.

The test results are contained in this test report and AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. is assumed full responsibility for the accuracy and completeness of these tests. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.


This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

This report must not be used by the applicant to claim product endorsement by NVLAP or any agency of the U.S. Government.

Date of Test : Mar.17~25, 2004

Prepared by : 
 Elsa Wu / Assistant

Reviewer : 
 Lake Wang / Supervisor

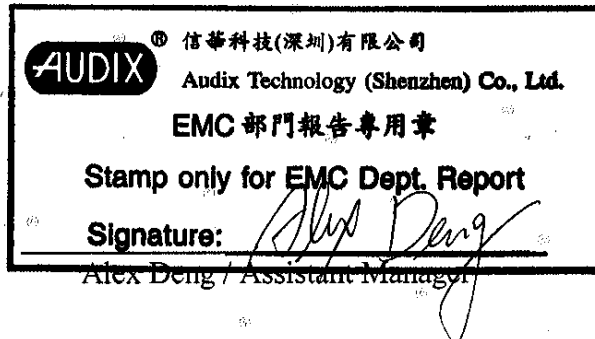

Approved & Authorized Signer :

Name of the Representative of the Responsible Party : _____

Signature : _____

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Description : Monitor

Model Number : 105S6**

Applicant : Top Victory Electronics (Taiwan) Co., Ltd.
18/F, No.738, Chung Cheng Road, Chung Ho,
Taipei, Hsien, Taiwan 235

Manufacturer : Top Victory Electronics (Fujian) Co., Ltd.
Yuanhong Road Shangzheng, Honglu, Fuqing City,
Fujian, China

Data Cable : Shielded, Undetachable, 1.8m

Power Cord : Unshielded, Detachable, 1.5m

Date of Test : Mar.17~25, 2004

1.2. Tested Supporting System Details

1.2.1. PERSONAL COMPUTER

Main Board	:	M/N: TUSL2-C Manufacturer: ASUS
CPU	:	M/N: Pentium III 750 Manufacturer: Intel
Hard Disk	:	M/N: D740X-6L Manufacturer: Maxtor
Floppy Disk	:	M/N: JU-257A605P Manufacturer: Panasonic
S.P.S	:	M/N: MPA-250 Manufacturer: Priver
VGA Card	:	M/N: CM64A S/N: C10G445335 Manufacturer: Power Color
Sound Card	:	M/N: CT4830 S/N: T4830120151591 Manufacturer: CREATIVE

1.2.2. PRINTER

Model Number	:	2225C+
Serial Number	:	22937S56660
FCC ID	:	DSI6XU225
Manufacturer	:	Hewlett Packard
Power Adapter	:	Hewlett Packard, Model 8241A
Data Cable	:	Shielded, Detachable, 1.5m

1.2.3. MODEM#1

Model Number	:	MODEM 1414
Serial Number	:	980013578
FCC ID	:	IFAXDM1414
Manufacturer	:	ACEEX
Data Cable	:	Shielded, Detachable, 1.5m
Power Adapter	:	Datatronics, Model: SCP41-91000A

1.2.4.MODEM#2

Model Number : MODEM 1414
Serial Number : 980013573
FCC ID : IFAXDM1414
Manufacturer : ACEEX
Data Cable : Shielded, Detachable, 1.5m
Power Adapter : Datatronics
Model :SCP41-91000AAD-09

1.2.5.MOUSE (USB)

Model Number : NWW-5
Manufacturer : A4 TECH
Data Cable : Shield : 1.5m

1.2.6.MOUSE (PS/2)

Model Number : DL-M305L
FCC ID : NZ8DLFAM800
Manufacturer : DELUX
Data Cable : Shield : 1.5m

1.2.7.KEYBOARD (USB)

Model Number : SK-3325
Serial Number : B57C80ACPN8021
Manufacturer : HP
Data Cable : Shield : 1.5m

1.2.8.KEYBOARD (PS/2)

Model Number : SK-9921
Serial Number : B285874
Manufacturer : GATEWAY
Data Cable : Shield : 1.5m

1.3. Test Facility

Site Description

3m Anechoic Chamber : Certificated by FCC, USA
Aug. 15, 2003

3m & 10m Anechoic Chamber : Certificated by FCC, USA
Mar. 15, 2004

EMC Lab. : Certificated by DATech, German
Feb. 02, 2004

Certificated by NVLAP, USA
NVLAP Code: 200372-0
Mar. 31, 2003

Name of Firm : Audix Technology (Shenzhen) Co., Ltd.

Site Location : No. 6, Ke Feng Rd., 52 Block,
Shenzhen Science & Industrial Park,
Nantou, Shenzhen, Guangdong, China

1.4. Test Uncertainty

Conducted Emission Uncertainty = $\pm 2.66\text{dB}$

Radiated Emission Uncertainty = $\pm 4.26\text{dB}$

2. POWER LINE CONDUCTED EMISSION TEST


2.1. Test Equipment

The following test equipments are used during the power line conducted emission test:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESHS10	838693/001	May.31, 03	1 Year
2.	L.I.S.N. #1	Kyoritsu	KNW-407	8-541-4	May.31, 03	1 Year
3.	L.I.S.N. #2	R&S	ESH2-Z5	834066/011	May.31, 03	1 Year
4.	Terminator	EMCO	50Ω	No. 1	May.31, 03	1 Year
5.	Terminator	EMCO	50Ω	No. 2	May.31, 03	1 Year
6.	RF Cable	FUJIKURA	RG-55/U	LISN Cable	Feb.20, 04	1/2 Year
7.	Coaxial Switch	Anritsu	MP59B	M74389	Nov.28, 03	1/2 Year
8.	PC	N/A	586ATXS	N/A	N/A	N/A
9.	Printer	HP	Laserjet2100	SGGJ092351	N/A	N/A

2.2. Block Diagram of Test Setup

2.2.1. Block diagram of connection between the EUT and simulators

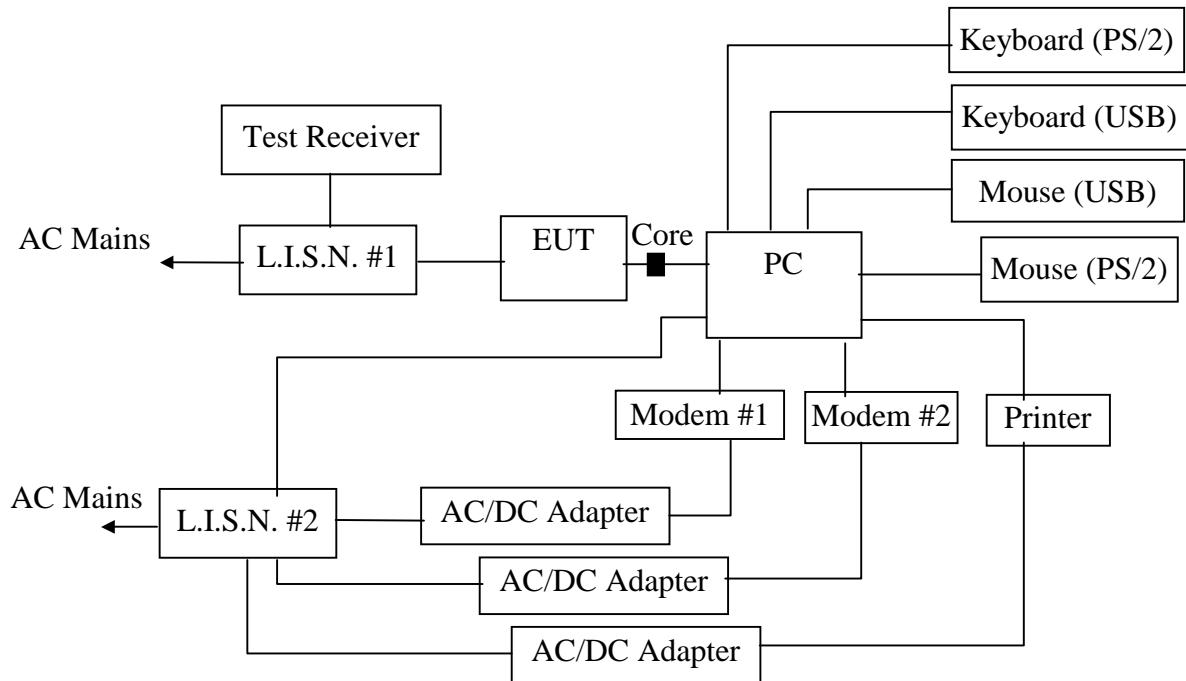

(EUT: Monitor)

2.3.Power Line Conducted Emission Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150KHz ~ 500KHz	66 ~ 56*	56 ~ 46*
500KHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

2.4.Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

2.4.1.Monitor (EUT)

Model Number : 105S6**
 Serial Number : F2004050901
 Manufacturer : Top Victory Electronics (Fujian) Co., Ltd.

2.4.2.Support Equipment : As Tested Supporting System Detail, in Section 1.2..

2.5.Operating Condition of EUT

2.5.1.Setup the EUT and simulator as shown as Section 2.2.

2.5.2.Turn on the power of all equipment.

2.5.3.Let the EUT work in test mode (Running "H" pattern 640*480 60Hz/
 Running "H" pattern 800*600 70Hz/Running "H" pattern 800*600 85Hz)
 and test it.

2.6.Test Procedure

The EUT is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm coupling impedance for the EUT. Please refer the block diagram of the test setup and photographs. Power on the EUT and let it work normally, we use a keyboard test soft ware, let EUT working in test mode, then test it. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.4-2001 on Conducted Emission Test.

The bandwidth of test receiver (R & S ESHS20) is set at 10KHz.

The frequency range from 150KHz to 30MHz is checked.

The test result are reported on Section 2.7., all the scanning waveforms for Conducted Emission Test are attached in Appendix I.

2.7.Power Line Conducted Emission Test Results

PASS.

The frequency range from 150KHz to 30 MHz is investigated.

All emissions not reported below are too low against the prescribed limits.

Date of Test	: Mar.17, 2004	Temperature	: 25°C
EUT	: Monitor	Humidity	: 56%
Model No.	: 105S6**	Test Mode	: Running "H" pattern 800*600 70Hz
Test Engineer	: Pebble		

Frequency (MHz)	Reading (dB μ V)				Limit (dB μ V)	
	VA		VB		Quasi-Peak	Average
	Quasi-Peak	Average	Quasi-Peak	Average		
0.185	43.28	40.05	45.82	43.28	64.26	54.26
0.280	*	*	37.43	35.41	60.82	50.82
0.282	41.89	39.87	*	*	60.76	50.76
0.561	*	*	34.37	32.08	56.00	46.00
0.751	35.55	32.42	*	*	56.00	46.00
1.400	37.89	19.82	*	*	56.00	46.00
1.500	*	*	36.73	32.66	56.00	46.00
5.956	40.44	28.71	*	*	60.00	50.00
6.006	*	*	39.25	18.41	60.00	50.00
9.350	*	*	32.96	7.77	60.00	50.00

"*" As the QP value is too low against AV limit, So AV Value had been omitted.

Reviewer:

Cake Wang

3. RADIATED EMISSION TEST

3.1. Test Equipment


The following test equipments are used during the radiated emission test:

3.1.1. For Anechoic Chamber

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Analyzer	HP	8591EM	3628A00914	May.31, 03	1 Year
2.	Test Receiver	Rohde & Schwarz	ESVS20	830350/005	May.31, 03	1 Year
3.	Amplifier	HP	8447D	2944A07794	Mar.17, 04	1/2 Year
4.	Bilog Antenna	Schaffner	CBL6111C	2598	Jan. 13, 04	1 Year
5.	PC	N/A	586ATX3	N/A	N/A	N/A
6.	Printer	HP	Laserjet6P	SGCF019673	N/A	N/A
7.	RF Cable	MIYAZAKI	5D-2W	3# Chamber No.1	Feb.01, 04	1/2 Year
8.	RF Cable	MIYAZAKI	5D-2W	3# Chamber No.2	Feb.01, 04	1/2 Year
9.	RF Cable	FUJIKURA	RG-55/U	3# Chamber No.3	Feb.01, 04	1/2 Year
10.	RF Cable	FUJIKURA	RG-55/U	3# Chamber No.4	Feb.01, 04	1/2 Year
11.	Coaxial Switch	Anritsu	MP59B	M73989	Nov.28, 03	1/2 Year


3.2. Block Diagram of Test Setup

3.2.1. Block diagram of connection between the EUT and simulators

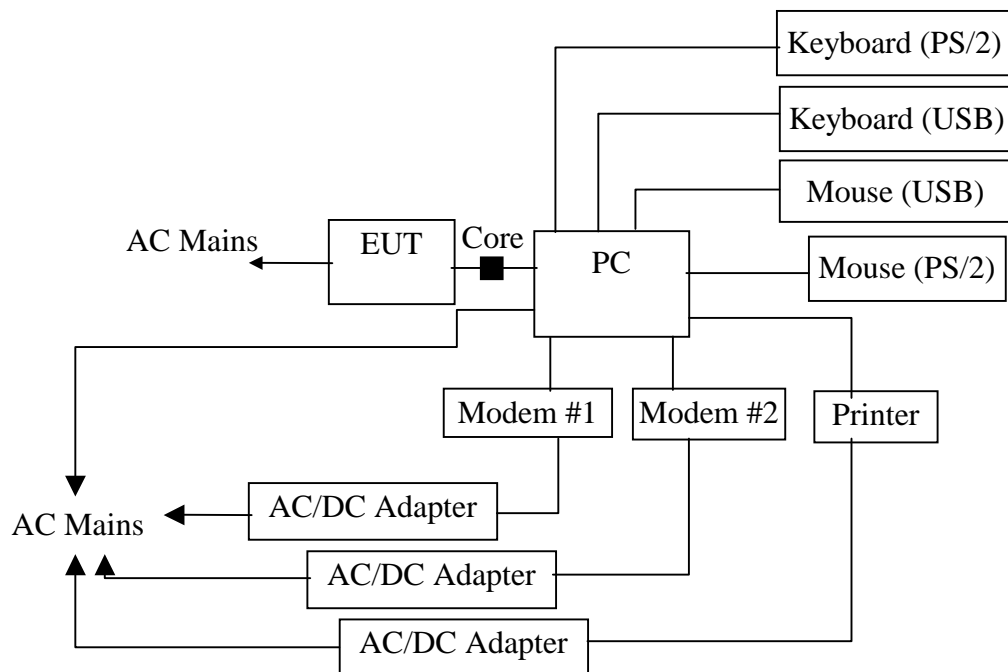

(EUT: Monitor)

3.2.2.In Anechoic Chamber

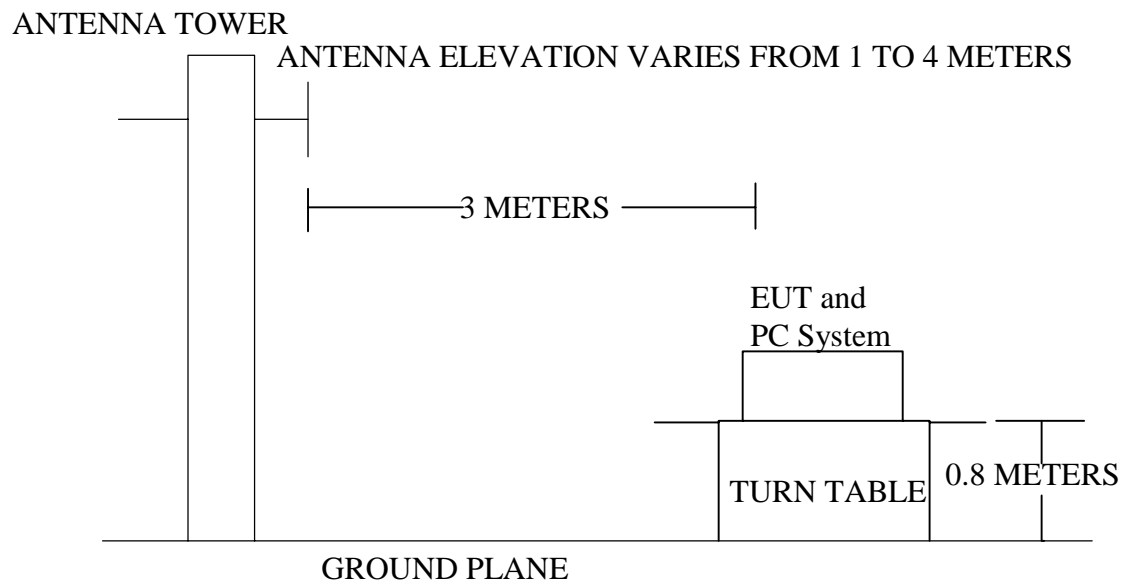

3.3.Radiated Emission Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0

- Remark :
- (1) Emission level (dB)μV = 20 log Emission level μV/m
 - (2) The smaller limit shall apply at the cross point between two frequency bands.
 - (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

3.4.EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

3.4.1.Monitor (EUT)

Model Number : 105S6**
 Serial Number : F2004050901
 Manufacturer : Top Victory Electronics (Fujian) Co., Ltd.

3.4.2.Support Equipment : As Tested Supporting System Detail, in Section 1.2.

3.5. Operating Condition of EUT

1. Setup the EUT as shown in Section 3.2..
2. Let the EUT work in test mode (Running “H” pattern 640*480 60Hz/
Running “H” pattern 800*600 70Hz/Running “H” pattern 800*600 85Hz)
and test it.

3.6. Test Procedure

EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it work normally, we use a keyboard test soft ware, let EUT working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna are set on test.

The bandwidth of the EMI test receiver (R&S ESVS20) is set at 120KHz.

The frequency range from 30MHz to 1000MHz is checked.

The test mode (Running “H” pattern 640*480 60Hz/Running “H” pattern 800*600 70Hz/Running “H” pattern 800*600 85Hz) is tested in Anechoic Chamber, and all the scanning waveforms are attached in Appendix II.

3.7.Radiated Emission Test Result

PASS.

The frequency range from 30MHz to 1000MHz is investigated.
Please see the following pages.

Date of Test :	<u>Mar.25, 2004</u>	Temperature :	<u>25°C</u>
EUT :	<u>Monitor</u>	Humidity :	<u>50%</u>
Model No. :	<u>105S6**</u>	Test Mode :	<u>Running "H" pattern 800*600 85Hz</u>
Test Engineer:	<u>Pebble</u>		

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Horizontal dB μ V	Emission Level Horizontal dB μ V/m	Over Limits dB	Limits dB μ V/m
38.730	13.01	1.20	16.32	30.53	-9.47	40.00
242.430	11.73	3.29	17.61	32.63	-13.37	46.00
269.590	12.86	3.46	17.16	33.48	-12.52	46.00
298.690	13.34	3.81	17.06	34.21	-11.79	46.00
376.290	15.98	4.38	14.50	34.86	-11.14	46.00
564.470	19.34	6.07	13.58	38.99	-7.01	46.00

Remark: 1. All readings are Quasi-Peak values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading

3. The worst emission was detected at 564.470MHz with corrected signal level of 38.99dB μ V/m (Limit is 46.00dB μ V/m) when the antenna was at horizontal polarization and at 1.2m high and the turn table was at 305 ° .

4. 0 ° was the table front facing the antenna. Degree is calculated from 0 ° clockwise facing the antenna.


Reviewer:

Caikang Wang



Shenzhen Science & Ind. Park.
 Tel: 0755-26639495~7
 Fax: 0755-26632877

Serial: File#: Aoc.emi Date: 2004-03-25 Time: 19:01:53

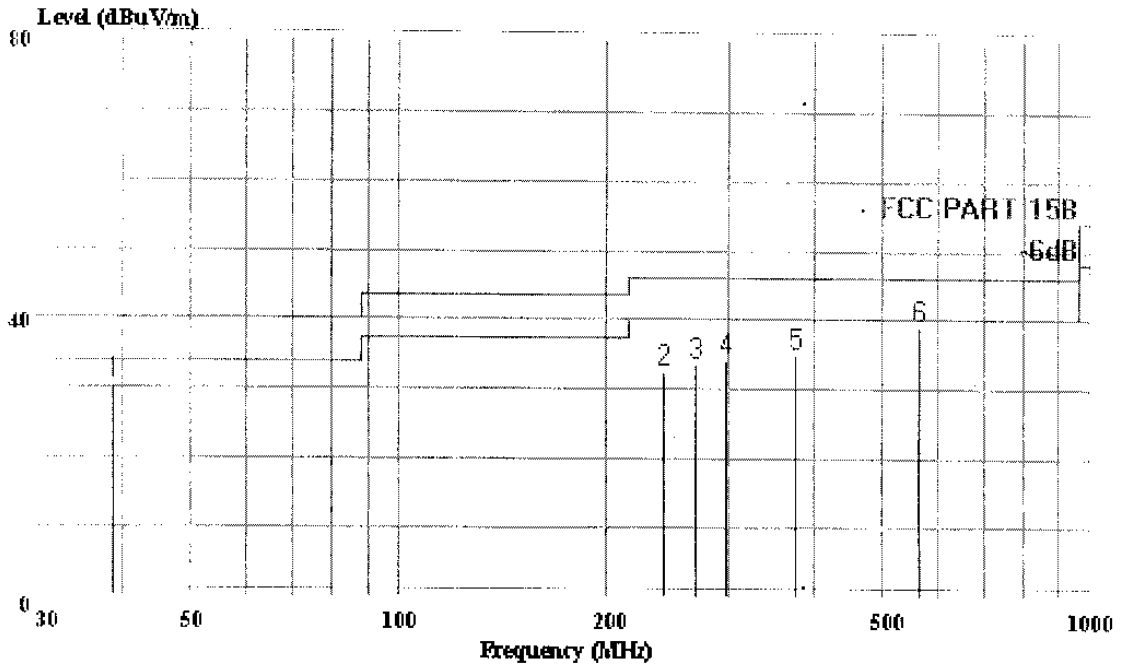

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL
 EUT : Monitor
 Brand Name : PHILIPS M/N:105S6**
 Power : AC 120V/60Hz
 Test Mode : Running 'H' pattern 800*600 85Hz
 Test Engineer: Pebble
 Date : Temp:25'C Humi:50%
 : H:1.2m Deg:305'


Page: 1

	Freq	Level	Limit	Over	Read	Cable	Probe
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor
			dBuV/m	dB	dBuV	dB	dB
1	38.730	30.53	40.00	-9.47	16.32	1.20	13.01
2	242.430	32.63	46.00	-13.37	17.61	3.29	11.73
3	269.590	33.48	46.00	-12.52	17.16	3.46	12.86
4	298.690	34.21	46.00	-11.79	17.06	3.81	13.34
5	376.290	34.86	46.00	-11.14	14.50	4.38	15.98
6	564.470	38.99	46.00	-7.01	13.58	6.07	19.34



Shenzhen Science & Ind. Park
 Tel: 0755-26639495~7
 Fax: 0755-26632877

Date#: File#: Aoc.emi Date: 2004-03-25 Time: 19:07:15

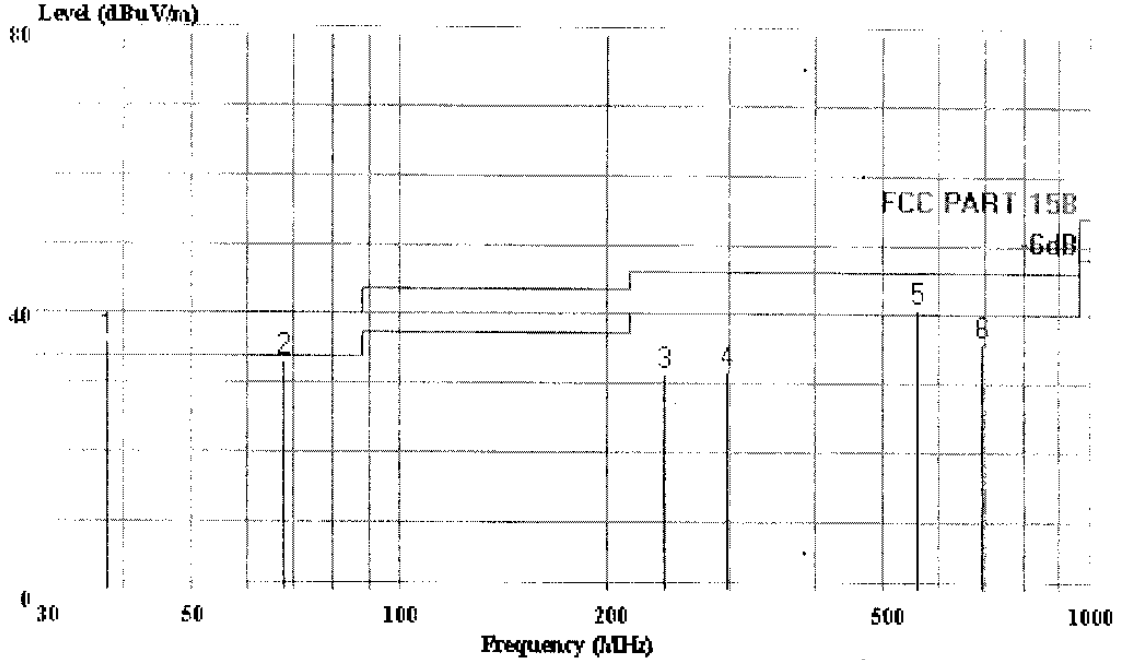

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL
 RUT : Monitor
 Brand Name : PHTLTPS M/N:105S6**
 Power : AC 120V/60Hz
 Test Mode : Running 'H' pattern 800*600 85Hz
 Test Engineer: Pebble
 Memo : Temp:25'C Humi:50%
 : H:1m Deg:120'

Page: 1

	Freq	Level	Limit	Over	Read	Cable	Probe
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor
				dB	dBuV	dB	dB
1	37.760	35.97	40.00	-4.03	23.86	1.20	10.91
2	67.830	33.08	40.00	-6.92	21.29	1.61	10.17
3	242.430	31.61	46.00	-14.39	15.71	3.29	12.61
4	298.690	31.75	46.00	-14.25	14.37	3.81	13.57
5	561.560	40.86	46.00	-5.14	14.69	6.13	20.05
6	698.330	36.14	46.00	-9.86	9.06	6.50	20.58

4. DEVIATION TO TEST SPECIFICATIONS

(None.)


APPENDIX I



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park
 Tel:0755-26639496
 Fax:26632877

Data#: 165 File#: Aoc.emi Date: 2004-03-17 Time: 21:23:00

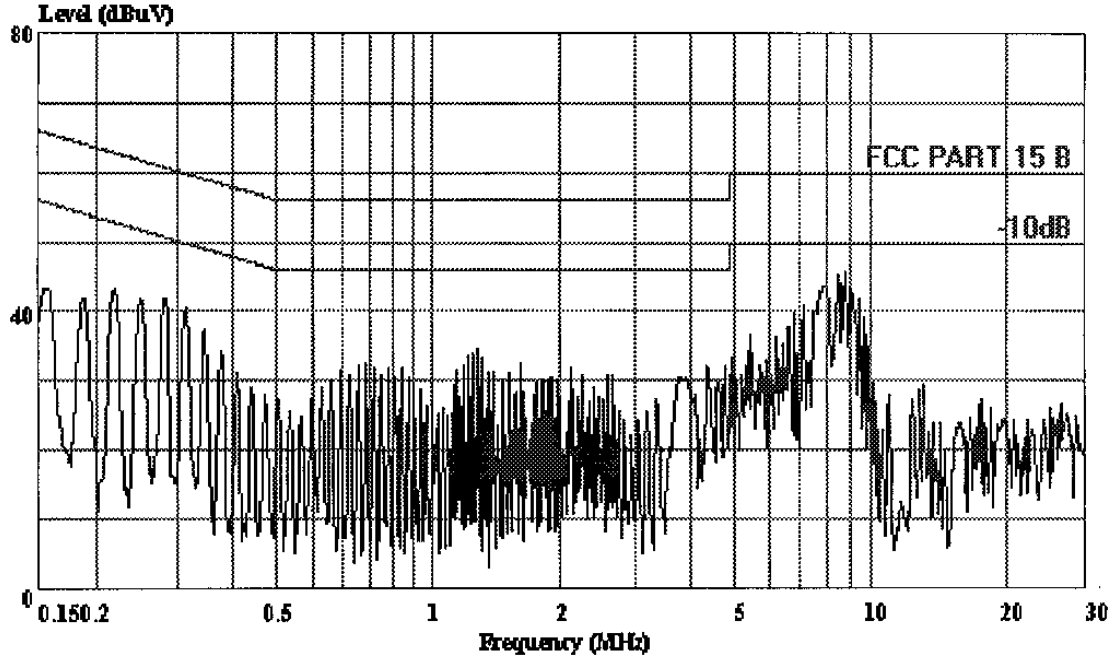

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:

Condition: FCC PART 15 B VA (KNW-407)
 EUT : Monitor
 BRAND : PHILIPS M/N:105S6**
 POWER : AC 120V/60Hz
 Test Engineer: Pebble
 Test Mode : Running 'H' pattern 640*480 60Hz
 Memo : Temp:25'C Humi:56%




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park
 Tel:0755-26639496
 Fax:26632877

Data#: 166 File#: Aoc.emi

Date: 2004-03-17 Time: 21:23:51

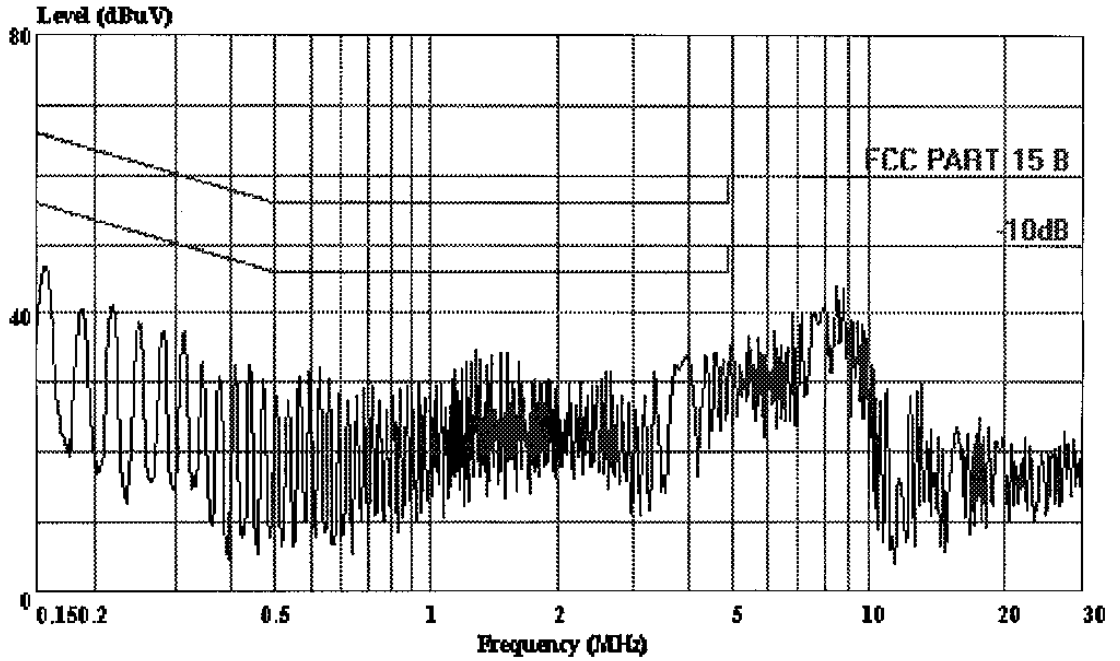

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:

Condition: FCC PART 15 B VB (KNW-407)
 EUT : Monitor
 BRAND : PHILIPS M/N:105S6**
 POWER : AC 120V/60Hz
 Test Engineer: Pebble
 Test Mode : Running 'H' pattern 640*480 60Hz
 Memo : Temp:25'C Humi:56%




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park
 Tel:0755-26639496
 Fax:26632877

Data#: 169 File#: Aoc.emi

Date: 2004-03-17 Time: 21:27:58

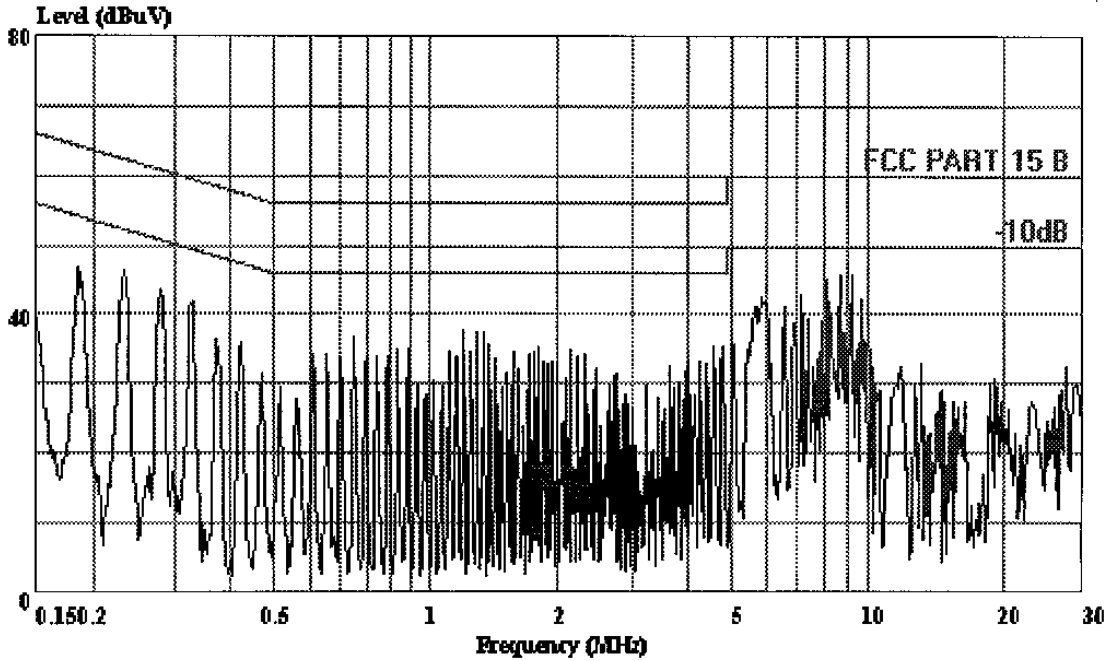

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:

Condition: FCC PART 15 B VA (KNW-407)
 EUT : Monitor
 BRAND : PHILIPS M/N:105S6**
 POWER : AC 120V/60Hz
 Test Engineer: Pebble
 Test Mode : Running 'H' pattern 800*600 70Hz
 Memo : Temp:25'C Humi:56%




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park
 Tel:0755-26639496
 Fax:26632877

Data#: 171 File#: Aoc.emi

Date: 2004-03-17 Time: 21:33:24

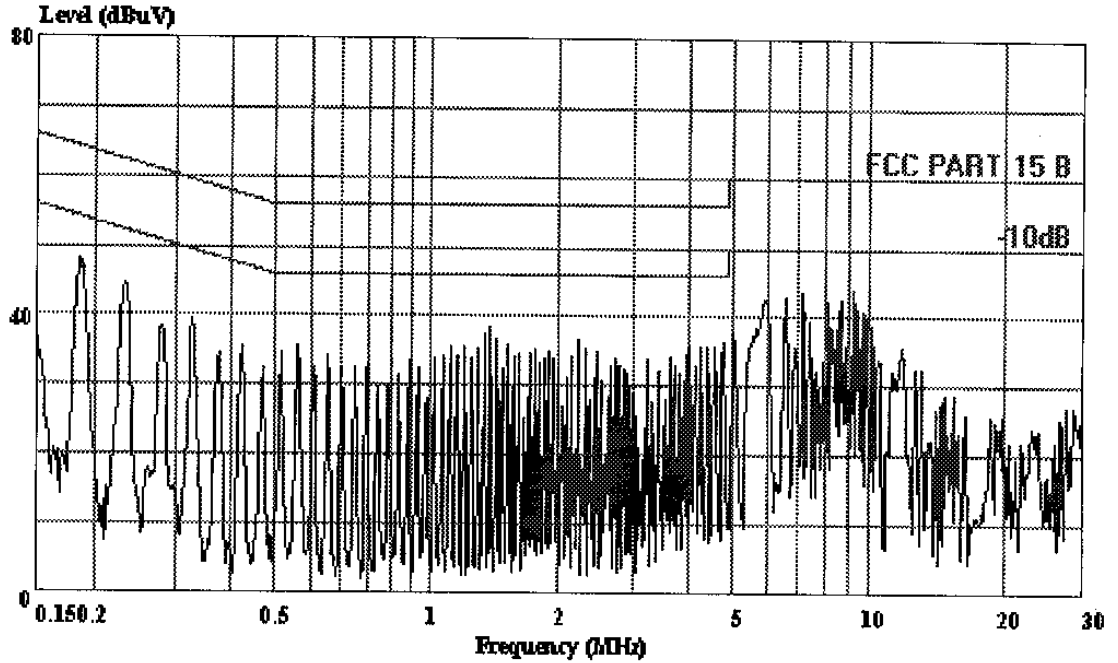

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:

Condition: FCC PART 15 B VB (KNW-407)
 EUT : Monitor
 BRAND : PHILIPS M/N:105S6**
 POWER : AC 120V/60Hz
 Test Engineer: Pebble
 Test Mode : Running 'H' pattern 800*600 70Hz
 Memo : Temp:25'C Humi:56%




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park
 Tel:0755-26639496
 Fax:26632877

Data#: 168 File#: Aoc.emi

Date: 2004-03-17 Time: 21:26:13

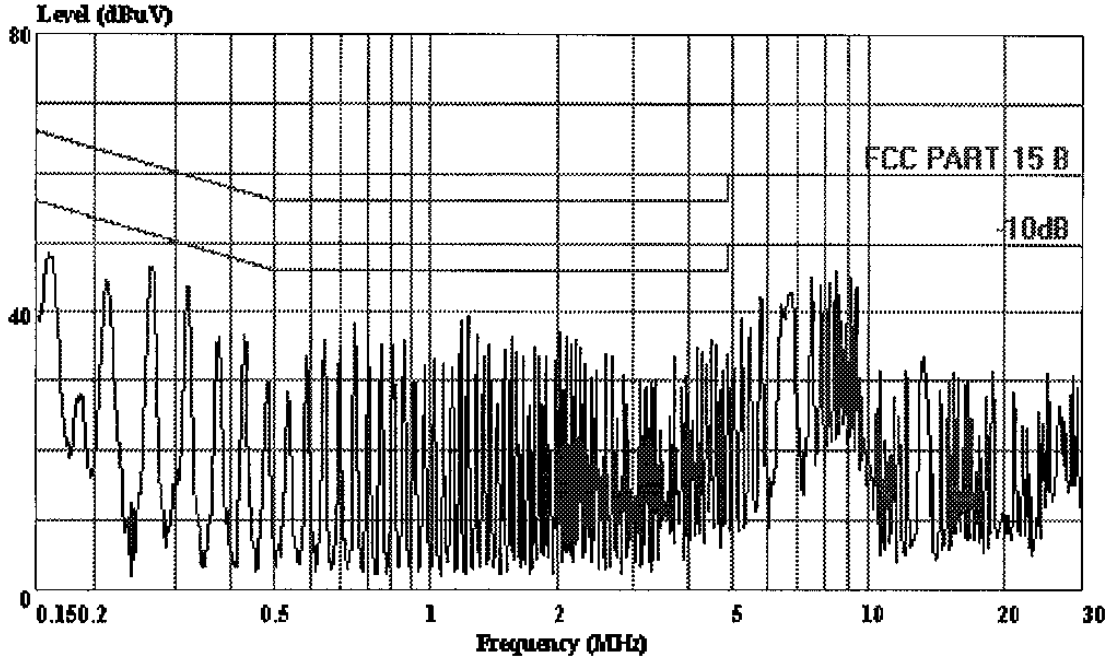

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:

Condition: FCC PART 15 B VA (KNW-407)
 EUT : Monitor
 BRAND : PHILIPS M/N:105S6**
 POWER : AC 120V/60Hz
 Test Engineer: Pebble
 Test Mode : Running 'H' pattern 800*600 85Hz
 Memo : Temp:25'C Humi:56%




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park
 Tel:0755-26639496
 Fax:26632877

Data#: 167 File#: Aoc.emi

Date: 2004-03-17 Time: 21:25:39

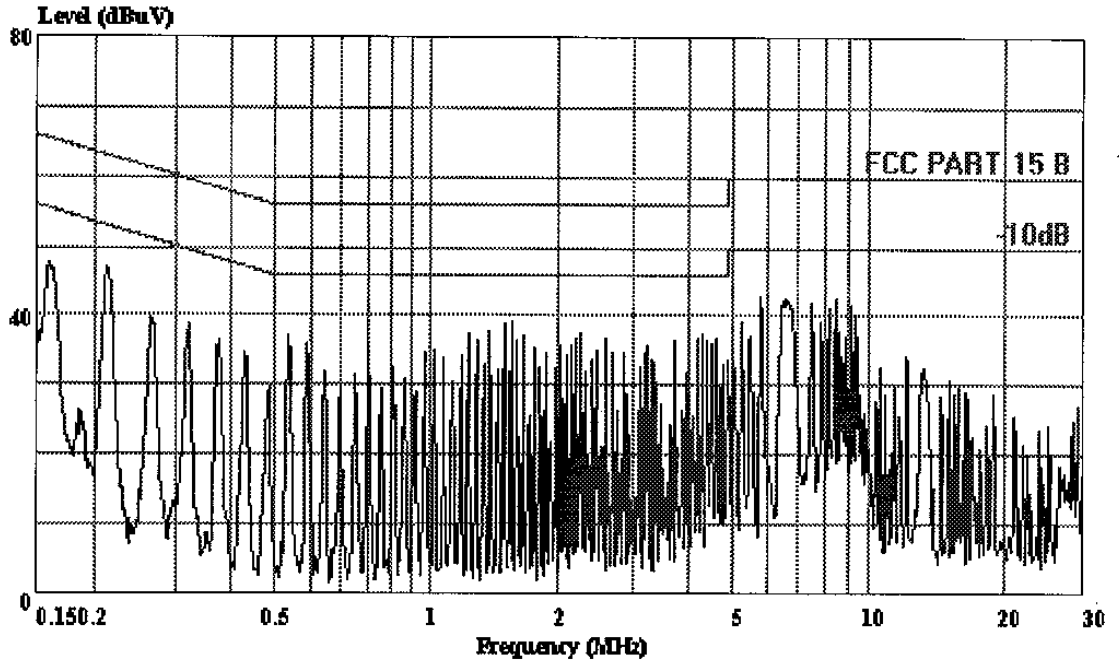

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:

Condition: FCC PART 15 B VB (KNW-407)
 EUT : Monitor
 BRAND : PHILIPS M/N:105S6**
 POWER : AC 120V/60Hz
 Test Engineer: Pebble
 Test Mode : Running 'H' pattern 800*600 85Hz
 Memo : Temp:25'C Humi:56%

APPENDIX II




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park
 Tel: 0755-26639495~7
 Fax: 0755-26632877

Part#: File#: Aoc.emi

Date: 2004-03-25 Time: 19:22:00

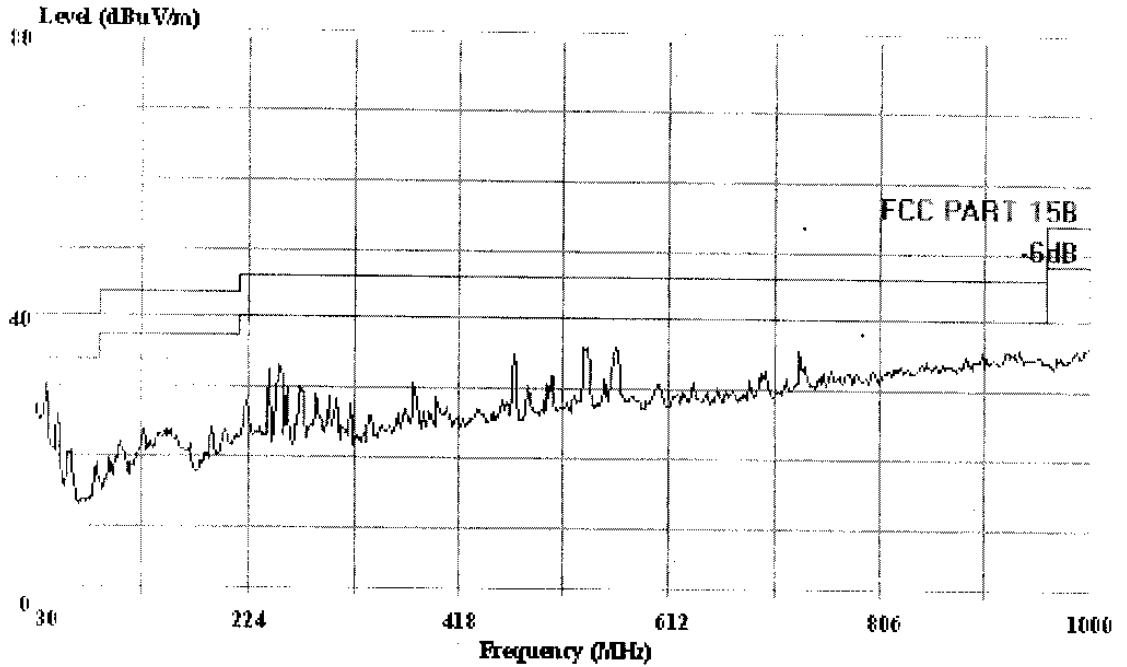

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL
 RUT : Monitor
 Brand Name : PHTI.TPS M/N:105S6**
 Pow : AC 120V/60Hz
 Test Mode : Running 'H' pattern 640*480 60Hz
 Test Engineer: Pebble
 Meas : Temp:25'C Humi:50%




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park
 Tel: 0755-26639495~7
 Fax: 0755-26632877

Data#: File#: Aoc.emi

Date: 2004-03-25 Time: 19:23:44

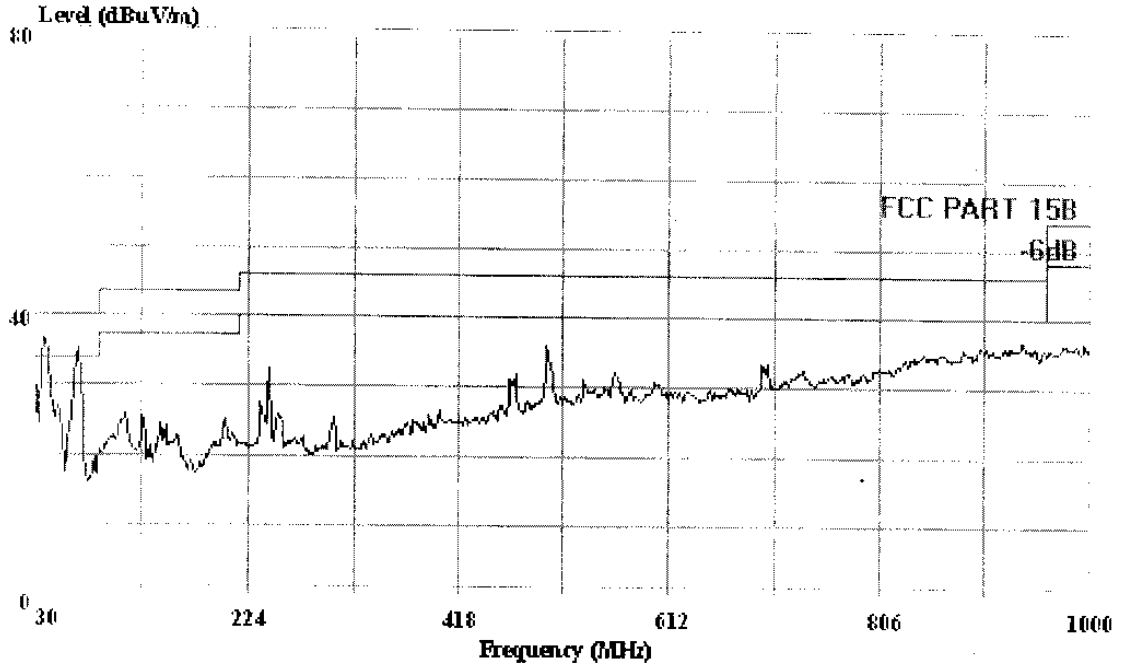

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace 1:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL
 PUF : Monitor
 Brand Name : PHT.TPS M/N:105S6**
 Power : AC 120V/60Hz
 Test Mode : Running 'H' pattern 640*480 60Hz
 Test Engineer: Pebble
 Metro : Temp:25'C Humi:50%



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.


Shenzhen Science & Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: File#: Aoc.emi

Date: 2004-03-25 Time: 19:18:22

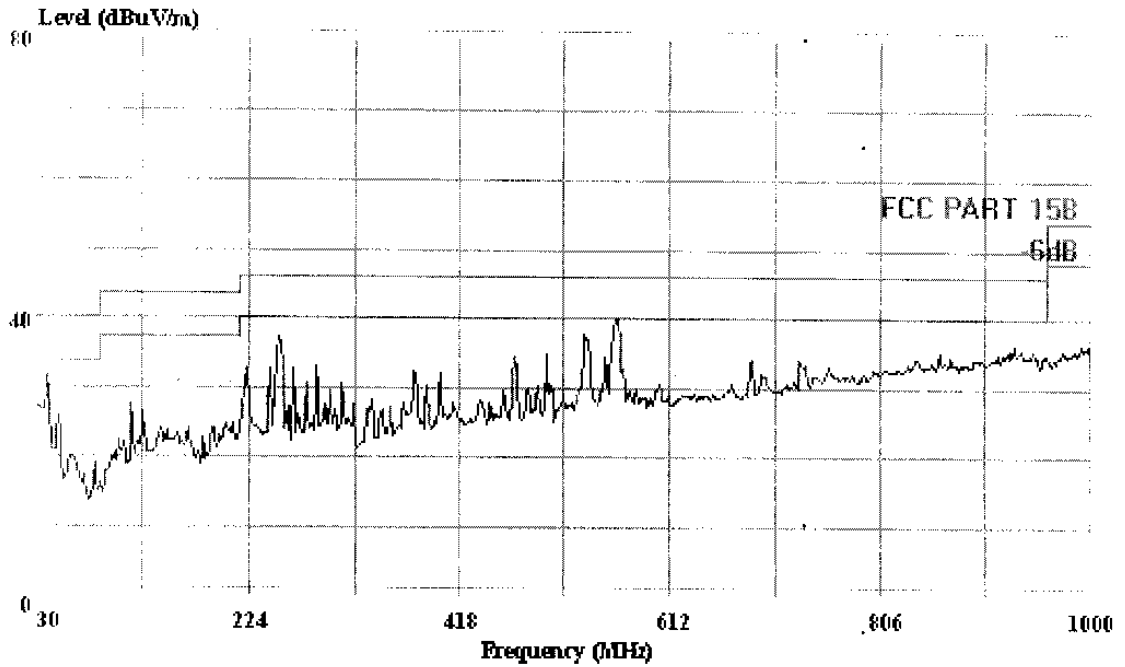

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:


Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL
 EUT : Monitor
 Brand Name : PHILIPS M/N:105S6**
 Power : AC 120V/60Hz
 Test Mode : Running 'H' pattern 800*600 70Hz
 Test Engineer: Pebble
 Mem : Temp:25'C Humi:50%



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen, Science & Ind. Park
 Tel: 0755-26639495~7
 Fax: 0755-26632877

Data#: File#: Aoc.emi Date: 2004-03-25 Time: 19:11:57

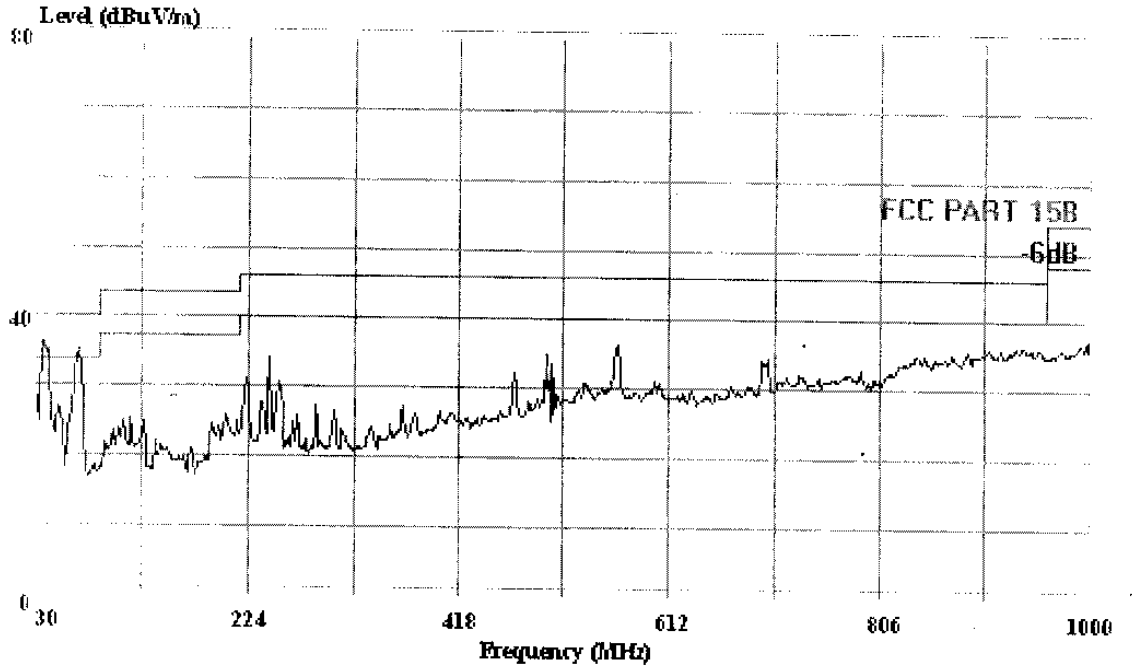

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:


Condition: FCC PART 15B 3m 2598FACTOR VERTICAL
 EUT : Monitor
 Board Name : PHTTIPS M/N:105S6**
 Power : AC 120V/60Hz
 Test Mode : Running 'H' pattern 800*600 70Hz
 Test Engineer: Pebble
 Memo : Temp:25'C Humi:50%



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park
 Tel: 0755-26639495~7
 Fax: 0755-26632877

Data#: File#: Aoc.emi Date: 2004-03-25 Time: 18:58:12

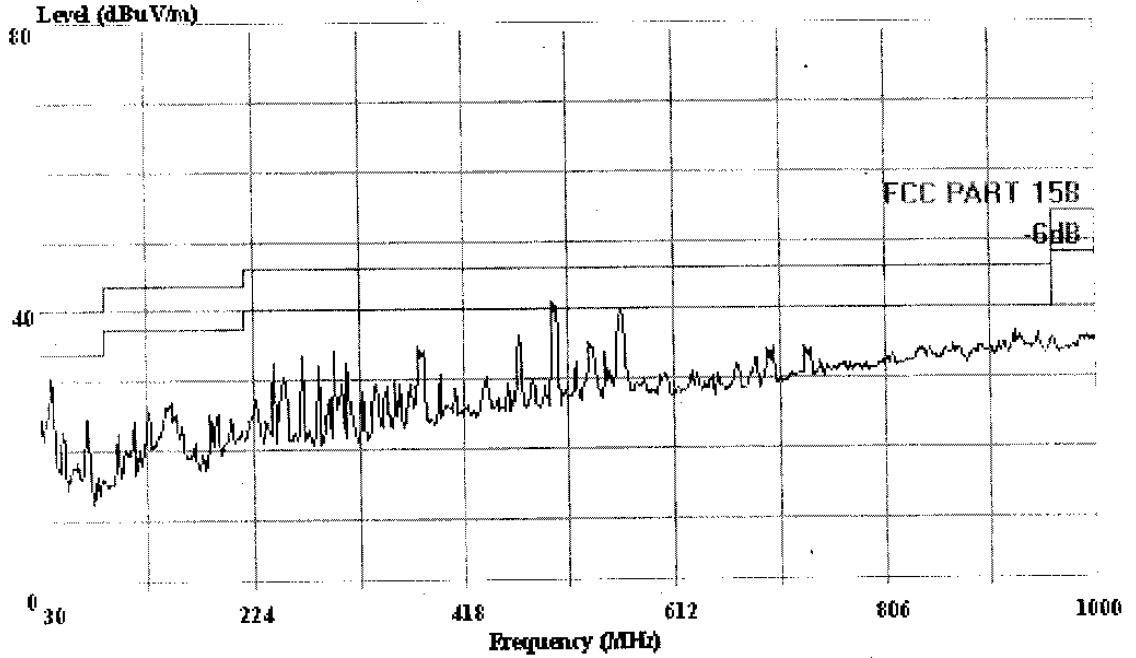

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:


Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL
 EUT : Monitor
 Brand Name : PHILIPS M/N:105S6**
 Power : AC 120V/60Hz
 Test Mode : Running 'H' pattern 800*600 85Hz
 Test Engineer: Pebble
 Memo : Temp:25'C Humi:50%



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park
 Tel: 0755-26639495~7
 Fax: 0755-26632877

Data#: File#: Aoc.emi Date: 2004-03-25 Time: 19:02:39

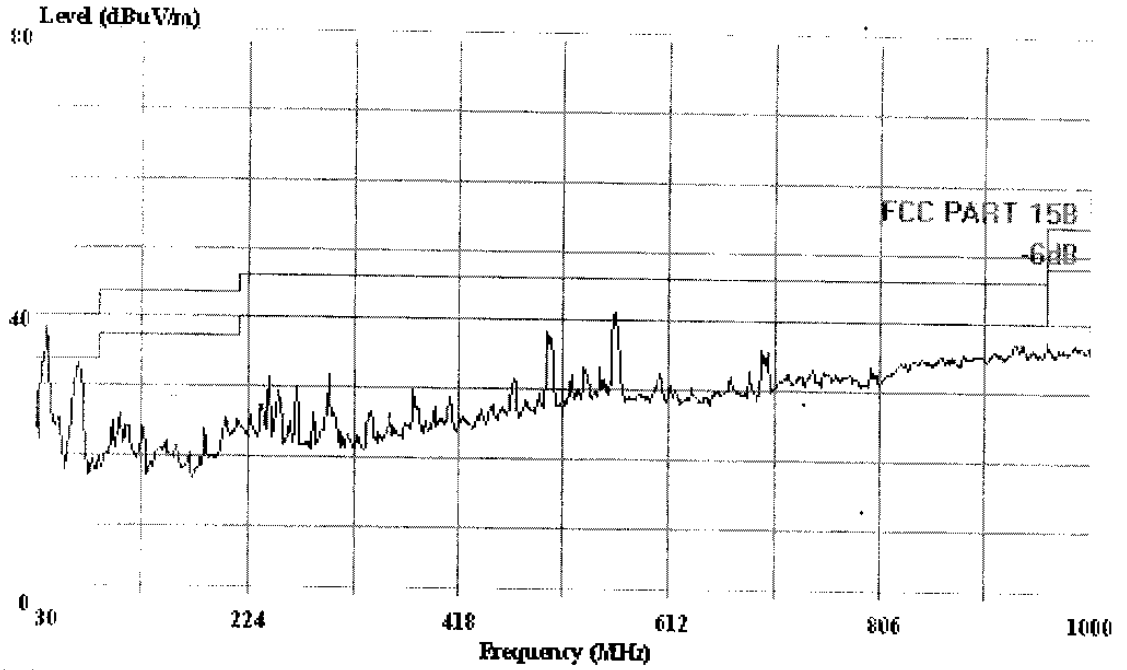

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL
 EUT : Monitor
 Brand Name : PHILIPS M/N:105S6**
 Power : AC 120V/60Hz
 Test Mode : Running 'H' pattern 800*600 85Hz
 Test Engineer: Pebble
 Memo : Temp:25'C Humi:50%