

APPLICANT: Alcatel-Lucent

FCC ID: AS5BBTRX-15

FCC ID Label



Photograph of FCC ID Label Affixed




FCC ID Label Drawing


SPEC DRAWING
FOR REFERENCE ONLY
(DO NOT USE FOR REPRODUCTION)

ORIGINAL ARTWORK
USE FOR REPRODUCTION
COMPOSITE

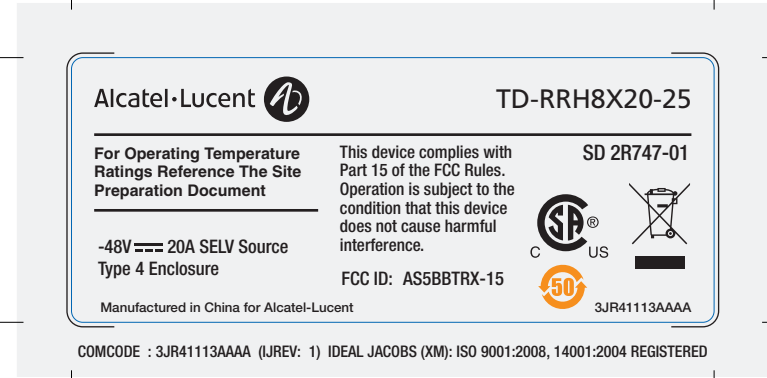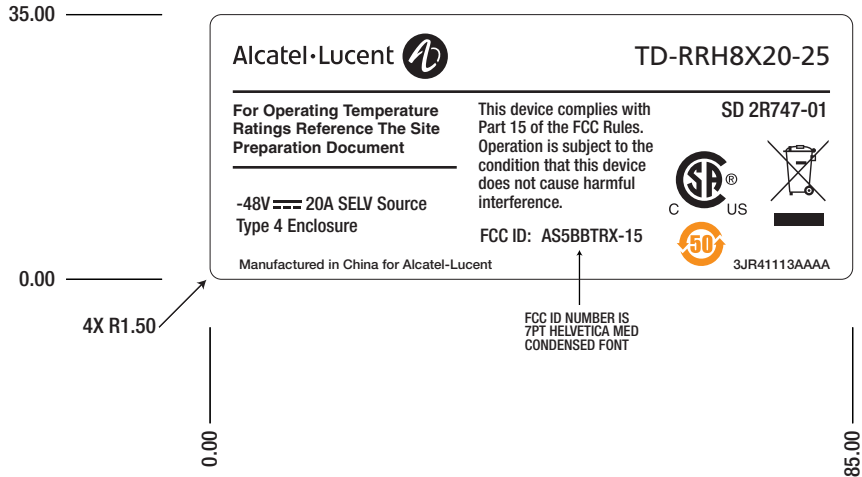

Alcatel-Lucent  TD-RRH8X20-25

For Operating Temperature Ratings Reference The Site Preparation Document




-48V  20A SELV Source
Type 4 Enclosure


Manufactured in China for Alcatel-Lucent


This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

FCC ID: AS5BBTRX-15


SD 2R747-01

 3JR41113AAAA

Alcatel-Lucent  TD-RRH8X20-25

For Operating Temperature Ratings Reference The Site Preparation Document




-48V  20A SELV Source
Type 4 Enclosure


Manufactured in China for Alcatel-Lucent

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

FCC ID: AS5BBTRX-15

SD 2R747-01

 3JR41113AAAA

COMCODE : 3JR41113AAAA (JREV: 1) IDEAL JACOBS (XM): ISO 9001:2008, 14001:2004 REGISTERED

Ideal Jacobs Corporation • 515 Valley Street • Maplewood, NJ 07040 • 973-275-5100 • FAX: 973-275-5161 • email: info@idealjacobs.com
Ideal Jacobs (Xiamen) Corporation • 319 East Hubin Road • Xiamen, Fujian 361012 • 0592-506-4000 • FAX: 0592-507-4000 • email: info@idealjacobs.com.cn

Title: TD-RRH8X20-25 Label **Materials:** 10mil velvet/matte polycarbonate 8B35V (VTM-2) with 3M 467.

P/N(Comcode): 3JR41113AAAA **Inks:** Subsurface print Black, China RoHS Orange and Cool Gray 1 as per OS20000.

Cust. Rev#: --- **Text:** 10pt Frutiger Roman; 8/7/6.5/5pt HelveticaNeue Med. Cond; 6pt Helvetica Bold **Die Strike:** .02"

Engineer: --- **Dwg. Date:** --- **Client:** ASB **Job#:** P1306030017-1

Certifications: Labels shall meet UL and CSA requirements where applicable. Vendor must be UL and/or CSA approved. Documentation verifying the vendor's certifications for the material shall be provided by the vendor with each package/container. Labels are RoHS compliant.

All units are in millimeters • Tolerance is: 2 places .25mm • Symbology agrees with: ISO 1101 and ISO 1302

IJREV	DESCRIPTION	DRAWN	CHECKED	DATE	APPROVED	DATE
1	Initial release.	JX	CC	09-17-13	---	---