

Exhibit 11: Listing of Required Measurements

SECTION 2.1033(c)(14) Listing of Required Measurements

The data required by Section 2.1046 through 2.1057, inclusive, measured in accordance with the procedures set out in Section 2.1041.

RESPONSE:

The lowest clock frequency in the **Flexent Cellular 850 OneBTS Modular Cell 3.0** is the 10 MHz rubidium reference oscillator. Conducted spurious measurements were performed over the range of 10 MHz to 10GHz which is above the tenth harmonic of the transmit frequency range.

The following pages include the data required for the Product Certification authorization of the **mLAM / FCC ID: AS5ONEBTS-03**, measured in accordance with the procedures set out in Section 2.1041 of the Rules.

Each required measurement and its corresponding exhibit number are:

| | | |
|------------|----------------|--|
| Exhibit 12 | Section 2.1046 | Measurement of Radio Frequency Power Output |
| Exhibit 13 | Section 2.1047 | Measurement of Modulation Characteristics |
| Exhibit 14 | Section 2.1049 | Measurement of Occupied Bandwidth |
| Exhibit 15 | Section 2.1051 | Measurement of Spurious Emissions at Antenna |
| Exhibit 16 | Section 2.1053 | Field Strength of Spurious Radiation |
| Exhibit 17 | Section 2.1055 | Measurement of Frequency Stability |

Exhibit 12: Measurement of Radio Frequency Power Output

SECTION 2.1046 Measurement of Radio Frequency Power Output

The test arrangements used to measure the radio frequency power output of the **mLAM/ AS5ONEBTS-03** Linear Amplifier Module, Model m/ Multi Carrier Amplifier is on the following page. Measurements were made respectively at each frequency where Occupied Bandwidth measurements were performed. The use of the **mLAM** is for one to three CDMA carriers. This requires that the J4 power level be calibrated for the specific channel of use. The test configuration, Figure 12a, allowed the measurement of output power for each channel investigated for Occupied Bandwidth. These included the upper and lower Block edges and at the center channel for each Block.

The **mLAM** system has a maximum power output at the antenna terminals of 25.0 Watts (43.98 dBm) +2 / -4 dB, it also has a minimum power output at the antenna terminals of 0.010 Watts (10.01 dBm +2 / -4 dB, across the extended Cellular Band (869.00-894.00 MHz). The signal applied to the **mLAM** is defined in Table 12.1. The power was reset to a minimum of 25.0 Watts at each measurement frequency to verify the spectral performance at that power level at each specific frequency of interest. The attenuation range was also verified. The specific Frequencies and channels and set power level was documented on each "Occupied Bandwidth" sheet.

Applied Signal

The applied signal, from a **CBR FCC ID: AS5CMP-28**, met the recommended characteristics per ANSI/TIA/EIA-97-D section 6.5.2 as defined below.

| Type | Number of Channels | Fraction of Power (Linear) | Fraction of Power (dB) | Comments |
|---------|--------------------|----------------------------|------------------------|---|
| Pilot | 1 | 0.2 | -7 | Code channel W_0^{128} |
| Sync | 1 | 0.0471 | -13.3 | Code channel W_{32}^{64} ; always 1/8 rate |
| Paging | 1 | 0.1882 | -7.3 | Code channel W_1^{64} ; full rate only |
| Traffic | 6 | 0.09412 | -10.3 | Variable code channel assignments; full rate only |

TABLE 12.1 Base Station Test Model, Nominal for Main Path

| Type | Number of Channels | Fraction of Power (Linear) | Fraction of Power (dB) | Comments |
|--------------------------|--------------------|----------------------------|------------------------|---|
| Transmit Diversity Pilot | 1 | 0.2 | -7 | Code channel W_{16}^{128} |
| Traffic | 6 | 0.09412 | -10.3 | Variable code channel assignments; full rate only |

TABLE 12.2 Base Station Test Model, Nominal for Transmit Diversity Path

Exhibit 12 *continued*

RESULTS:

The **mLAM/ AS5ONEBTS-03** was configured in the test setup shown in Figure 12A. For each of the Cellular 850 channels tested the **mLAM/ AS5ONEBTS-03** delivered a minimum of 25.0 Watts +2/-0 dB when measured at the J4 output connection.

This data is recorded on the Occupied Bandwidth Data Sheets for “Left edge” and “Right Edge” of each frequency Band. Data is presented for the entire extended Cellular Band.

Note: The **mLAM/ AS5ONEBTS-03** is a multi channel linear amplifier and its maximum power level is verified at each cell site during setup of the Modular Cell and installation of the **CBR/FCC ID: AS5CMP-28**.

Table 12.0
Measurement Equipment used in Figure 12 For Measurement of RF Power

| <u>Equipment</u> | <u>Description</u> |
|-------------------------------------|--|
| Product Frame: | Cellular Indoor Flexent OneBTS Modular Cell 3.0 with 9 CBR’s and 9 mLAMs |
| CBR: | CDMA Baseband Radio (FCC ID: AS5CMP-28) |
| mLAM: | Linear Amplifier Module, Model m (FCC ID: AS5ONEBTS-03) |
| Transmit Filter: | Cellular Band Transmit Filter appropriate for the investigated Band |
| Directional Coupler: | HP 778D and 772D Dual Directional Coupler |
| Power Meter: | HP E4419A Power Meter with EPC-E18A Power Head |
| Test Cables: | Low loss test cables custom mfg. for Lucent FCC Laboratory |
| Plotter: | HP Model 7470A Plotter |
| Printer: | HP Model 4500DN Printer |
| Attenuator, Variable | HP 8494B and 8495B DC-18 GHz digital attenuators |
| Attenuator, Fixed | Weinschel Corp DC-18 GHz, various values |
| Low & High Pass Filters: | Triolithic, Various 10 MHz-20 GHz, Custom manufactured for Lucent FCC Laboratory |
| Spectrum Analyzer: | Rohde & Schwarz ESI EMI Test Receiver or Rohde & Schwarz FSEM Spectrum Analyzer |
| Code Domain Analyzer | H-P and Agilent E4406A VSA Series Transmitter Tester |
| Computer Controller: | EG Technology, Custom Mfg for FCC Laboratory Intel™ Pentium III & IV, 550 and 1600 MHz controllers with TILE™ software |

Exhibit 12 continued

Figure 12A RF Power Test Configuration

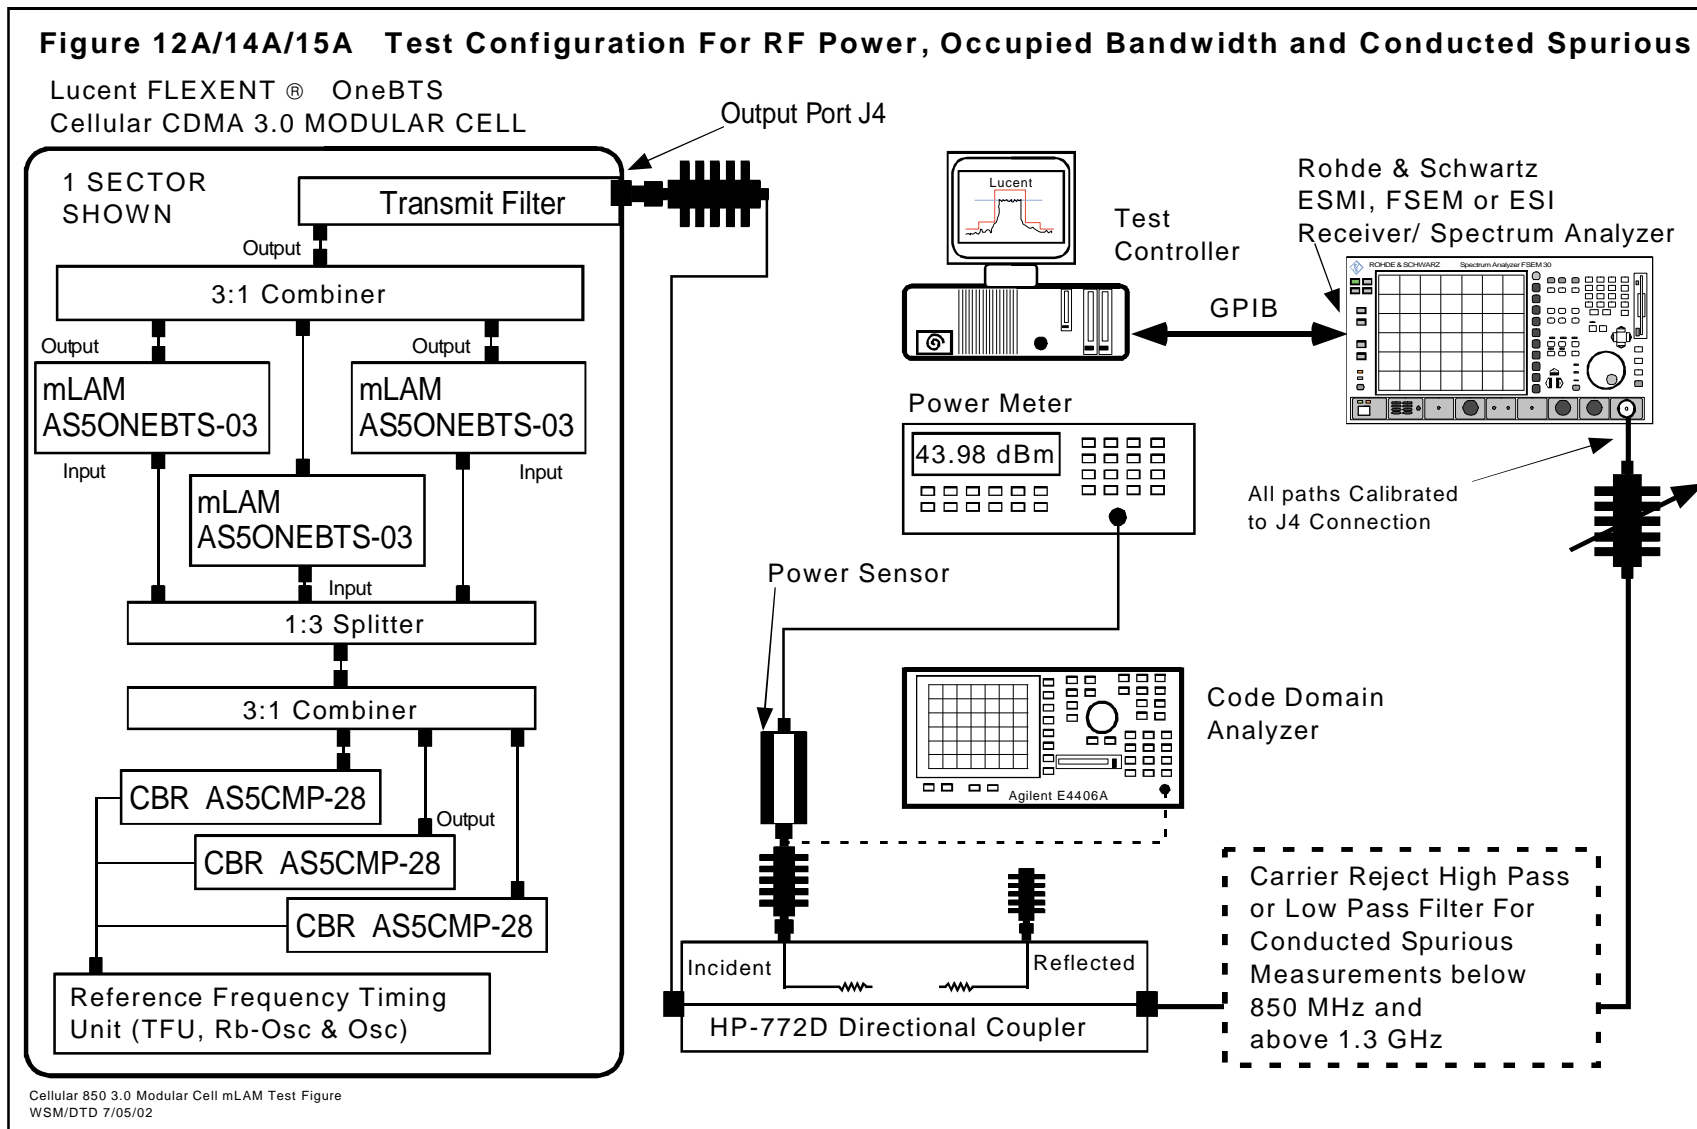


Exhibit 13: Measurement of Modulation Characteristics

SECTION 2.1047 Measurement of Modulation Characteristics.

The modulation characteristics and accuracy of the **mLAM/ AS5ONEBTS-03** output signal is a function of the input signal which is provided by the **CBR/ AS5CMP-28**, granted 19 April 1999 for the entire extended Cellular 850 band. The mLAM does not provide for any modulation of the signal.

Exhibit 14 Measurement of Occupied Bandwidth

SECTION 2.1049 Measurement of Occupied Bandwidth

Because of the multi-carrier application of the **mLAM**, occupied bandwidth measurements were performed for all three of the **MCA** configurations. This documents the typical performance of the **mLAM** while supplied with single, dual and three CDMA carriers. Since the **mLAM** is a fixed gain device all power adjustments were performed via the attenuation control in the **CDMA Baseband Radio CBR/ FCC ID: AS5CMP-28**.

The occupied bandwidth of the **mLAM/ FCC ID: AS5ONEBTS-03** was measured using a Rohde & Schwarz FSEM spectrum analyzer, a PC based instrumentation controller using TILE™ software and calibrated RF equipment. The RF power level was measured and adjusted via the test setup in Figure 14A. The calibrated RF output from the transmitter was reduced (to an amplitude usable by the spectrum analyzer) by using a calibrated broadband attenuator. The total attenuation was set to avoid overdrive of the spectrum analyzer and still allow high dynamic range measurements. Because of the broadband nature of the CDMA signal and the required 30 kHz RBW, a power calibration was performed to validate the accuracy of the -16.2 dBc setpoint. The -16.2 dBc level corresponds to the corrected RF power level for a 1.25 MHz signal measured with a 30 kHz resolution bandwidth (RBW). This set-point was performed as follows:

The power calibration was individually verified at each carrier using a power meter in the Figure 14A setup. Additionally a power calibration was performed to calibrate the setting of the measured 30 kHz Occupied Bandwidth signal at the -16.2 dBc line and a 3 MHz resolution bandwidth (RBW) measurement against the “Top of Mask” limit which corresponds to the output power at an RBW setting of ≥ 1.25 MHz. These measurements were performed prior to each Occupied Bandwidth measurement. The single carrier signal was measured with RBW’s of 3 MHz and 30 kHz and is co-plotted and shown in Figure 14C Typical Power Calibration. To avoid the discrepancy and offset between different detector types the Calibrated power meter value is used as the reference. The digital attenuation is therefore set to place the 3 MHz RBW signal at the “Top of Mask”. The multi-carrier measurements were performed with the required 30 kHz RBW and used the same exact attenuation values.

This test procedure above calibrates the carrier power to the “Top of Mask” and accurately places the 30 kHz RBW measured carrier at the -16.2 dBc line. This process also documents the carrier power at the specified power level of 25 watts per carrier / 43.98 dBm. All of the plots are presented with a 7.5 MHz span and the center frequency of the specific Sub-Block of interest. This allows for ease of comparison of the single, dual and three carrier signals performance. The data was electronically recorded, corrected and plotted using the TILE™ software and is shown in the Occupied Bandwidth Data Sheets. These sheets contain data for Cellular frequency Blocks A3, A1, B1, and B’ in the application.

Block Organization and Tests Performed

For Cellular Band A, the Sub-Block filter A1 is for the “Right Edge of A Band ” and is designed for three carriers. Sub-Block filter A3 is designed for one carrier and is placed for the “Left Edge of A Band”. Block B is partitioned so that the B1 Sub-Block filter is for the “Left edge of B Band” and is designed for three carriers. Sub-Block filter B’ is designed for a maximum of one carrier and is placed for the “Right Edge”. **(Note: Because of the extreme narrowness of the B’ band the right edge of the cellular band is only 705 kHz from the signal center frequency.)**

When operated in the multi-carrier MCA configuration the A1 and B1 Occupied Bandwidth plots present one, two and three center channel performance charts at the Right Edge of Block for A1 and Left Edge of Block for B1. The A3 and B’ Plots present the one carrier performance for their respective bands.

Filter combination tests were performed for the one, two and three carrier operational configurations of the **mLAM** **where** applicable. When a second source manufacturer is to be qualified for a granted block, the tests are performed and the source approved via a Class I change to each of the applicable filings.

Exhibit 14 *continued*

Applied Signal

The applied signal, from a CBR FCC ID: AS5CMP-28, met the recommended characteristics per ANSI/TIA/EIA-97-D section 6.5.2 as defined below.

| Type | Number of Channels | Fraction of Power (Linear) | Fraction of Power (dB) | Comments |
|---------|--------------------|----------------------------|------------------------|---|
| Pilot | 1 | 0.2 | -7 | Code channel W_0^{128} |
| Sync | 1 | 0.0471 | -13.3 | Code channel W_{32}^{64} ; always 1/8 rate |
| Paging | 1 | 0.1882 | -7.3 | Code channel W_1^{64} ; full rate only |
| Traffic | 6 | 0.09412 | -10.3 | Variable code channel assignments; full rate only |

TABLE 14.1 Base Station Test Model, Nominal for Main Path

| Type | Number of Channels | Fraction of Power (Linear) | Fraction of Power (dB) | Comments |
|--------------------------|--------------------|----------------------------|------------------------|---|
| Transmit Diversity Pilot | 1 | 0.2 | -7 | Code channel W_{16}^{128} |
| Traffic | 6 | 0.09412 | -10.3 | Variable code channel assignments; full rate only |

TABLE 14.2 Base Station Test Model, Nominal for Transmit Diversity Path

“Suppression Inside the Licensee’s Frequency Block(s)”

For all frequencies within the base station transmit band of 869 – 894 MHz that are within the specific block(s) allocated to the operator's system, the total conducted spurious emissions in any 30kHz band greater than 750 kHz for the CDMA channel center frequency shall not exceed a level of -45 dBc....

Measurement at a resolution bandwidth of 30 kHz is based on our experience with Section 22.917 of The Code and lacking other guidance.

The spectrum analysis output plots shows the peak of the CDMA channel signal 16.2 dB below the Mask reference / “zero dBc line” of the spectrum analyzer for the following reason: For the CDMA system there is no carrier without modulation. The following relationship was used to provide the correct level for an unmodulated carrier vs. the modulated signal.

Equation (1): $\text{Signal Offset} = 10 \cdot \log (\text{Measured resolution bandwidth} / \text{Transmit signal bandwidth})$

For the peak of the CDMA signal measured with a resolution bandwidth of 30 kHz the signal offset is:

Signal Offset = $10 \cdot \log (30 \text{ kHz} / 1.25 \text{ MHz}) = -16.2 \text{ dB}$

Exhibit 14 *continued*

Adjusted Levels

All of the tolerance lines for the output are referenced to the top of the Occupied Bandwidth mask, which is defined as 43.98 dBm/ zero dBc. For all measurements of the **mLAM / MCA's** Occupied Bandwidth, the output power was measured / adjusted individually to the 25 W level for each carrier and this is the 43.98 dBm value at the 0 dBc reference line.

In order to depict the tolerance lines that are required by Sec 22.917 of the FCC Rules, all measurements were made with a resolution bandwidth (RBW) of 30 kHz and the limits were adjusted using equation (1). An average detector was employed using minimum of 25 sweeps per trace.

Mask Description for Single Carrier

The Mask limits are identical for the left and right side of the Cellular Band and are as follows. Figure 14-B shows the Mask limit for Cellular channels 37 which is at the left Band edge for A Band. The Spectrum Analyzer reference level is set above the Signal Reference to allow for the necessary dynamic range of a CDMA carrier presentation. The top of a typical 43.98 dBm single carrier CDMA signal viewed at a resolution bandwidth of 30 kHz is shown at the 27.78 dBm/ -16.2 dBc line. This line is based on equation 1, and the ratio of the 1.25 MHz bandwidth and the 30 kHz resolution bandwidth of the spectrum analyzer. The vertical line from a to b (i.e. a-b) is at 750 kHz from the center of channel 37 (i.e. Fc), per IS-97-D. The horizontal line b-c is 45 dB below the 43.98 dBm/ 0 dBc reference level. The vertical line c-d on this chart is at 869 MHz which is the left band edge for the 869-894 MHz Cellular Band. When the subblock is entirely inside the cellular band the line c-d is at +/- 1.98 MHz from the carrier center frequency per ANSI/TIA/EIA-97-D-2001. The placement of line d-e is the out of band limit level of -13 dBm appropriate for a 25 watt signal. This limit as specified in 47CFR 22.917 as an attenuation from the transmitted signal of:

Equation (2) Attenuation = 43 + 10 LOG (P) Where P is the power in watts.

The out of band limit of -13 dBm is specified to be measured with an RBW of 30 kHz. The same logic was used in determining the other block and band edge tolerances.

Mask Description for Multiple Carrier

The mask for multiple carriers only adjusts the width of the carrier portion of the mask. For the example given with multiple carriers there would be no adjustments made to the “Left Edge of Block” requirements. The specified “Right Edge Limit” is treated as an expansion of the non Block edge corner **aa** to be the required + 750 kHz from the center of the “right most” channel. The “Right Edge of Block” limits were derived consistently.

Measurement

All of the tolerance lines for the output are referenced to the top of the Occupied Bandwidth mask, which is defined as 43.98 dBm/ zero dBc. For all measurements of the **mLAM / MCA's** Occupied Bandwidth, the output power was measured / adjusted individually to the 25 W level for each carrier and this is the 43.98 dBm value at the 0 dBc reference line.

In order to depict the tolerance lines that are required by Sec 22.917 of the FCC Rules , all measurements were made with a resolution bandwidth of 30 kHz and the limits were adjusted using equation (1). An average detector was employed using minimum of 25 sweeps per trace.

Exhibit 14 *continued*

Presented Results

The frequencies and channels used are tabulated on the bottom of each plot. Input and output signals are plotted at each frequency/ channel. Plots are provided for Left Edge, Center and Right Edge of the Cellular Band. These frequencies were also chosen to show the occupied bandwidth in the channels at the edge of Cellular Bands "A" and "B" in which this equipment can be operated, in compliance with Section 22.917 of the Commission code. There are no SAT or Wide band data signals associated with CDMA. The signal used to show the occupied bandwidth is defined in table 14.1. This is the signal recommended in ANSI/TIA/EIA-97-D-2001. The power output level was adjusted to provide the documented power levels at the bottom of each chart.

RESULTS: The following exhibits illustrate the spectrums investigated and document compliance.

W. Steve Majkowski NCE

Exhibit 14 *continued*

Test Equipment and Results

Table 14-3

Equipment used for Measurement of RF Transmit Power, Occupied Bandwidth and Conducted Spurious Emissions

| <u>Equipment</u> | <u>Description</u> |
|-----------------------------|---|
| Product Frame: | Cellular Indoor FLEXENT™ OneBTS Modular Cell 3.0 with 9 CBR's and 9 mLAMs |
| CBR: | CDMA Baseband Radio (FCC ID: AS5CMP-28) |
| mLAM: | Linear Amplifier Module, Model m (FCC ID: AS5ONEBTS-03) |
| OM 1&2 : | Oscillator Module, 15 MHz Rubidium and Crystal types |
| Transmit Filter: | Cellular Band Transmit Filter appropriate for the investigated Block |
| Directional Coupler: | HP 778D and 772D Dual Directional Coupler |
| Power Meter: | Agilent E4419B Power Meter with EPC-E18A Power Sensor or HP Model 437 Power Meter with HP-8481A Power Sensor |
| Test Cables: | Low loss test cables custom mfg. for Lucent FCC Laboratory |
| Plotter: | HP Model 7470A Plotter |
| Printer: | HP Model 4500DN Printer |
| Attenuator, Variable | HP 8494B and 8495B DC-18 GHz digital attenuators |
| Attenuator, Fixed | Weinschel Corp DC-18 GHz, various values |
| High Pass Filters: | Trialithic, 1-18 GHz, Custom manufactured for Lucent FCC Laboratory |
| Low Pass Filters: | Trialithic, 10MHz –900 MHz, Custom manufactured for Lucent FCC Laboratory |
| Spectrum Analyzer: | Rohde & Schwarz ESMI EMI Test Receiver or Rohde & Schwarz FSEM Spectrum Analyzer |
| Code Domain Analyzer | H-P and Agilent E4406A VSA Series Transmitter Tester |
| Computer Controller: | EG Technology, Custom Mfg for FCC Laboratory, Intel™ Pentium III & IV, 550 and 1600 MHz controllers with TILE™ software |

Figure 14A Test Setup for Antenna Port Measurement of Transmit Power, Occupied Bandwidth and Conducted Spurious Emissions

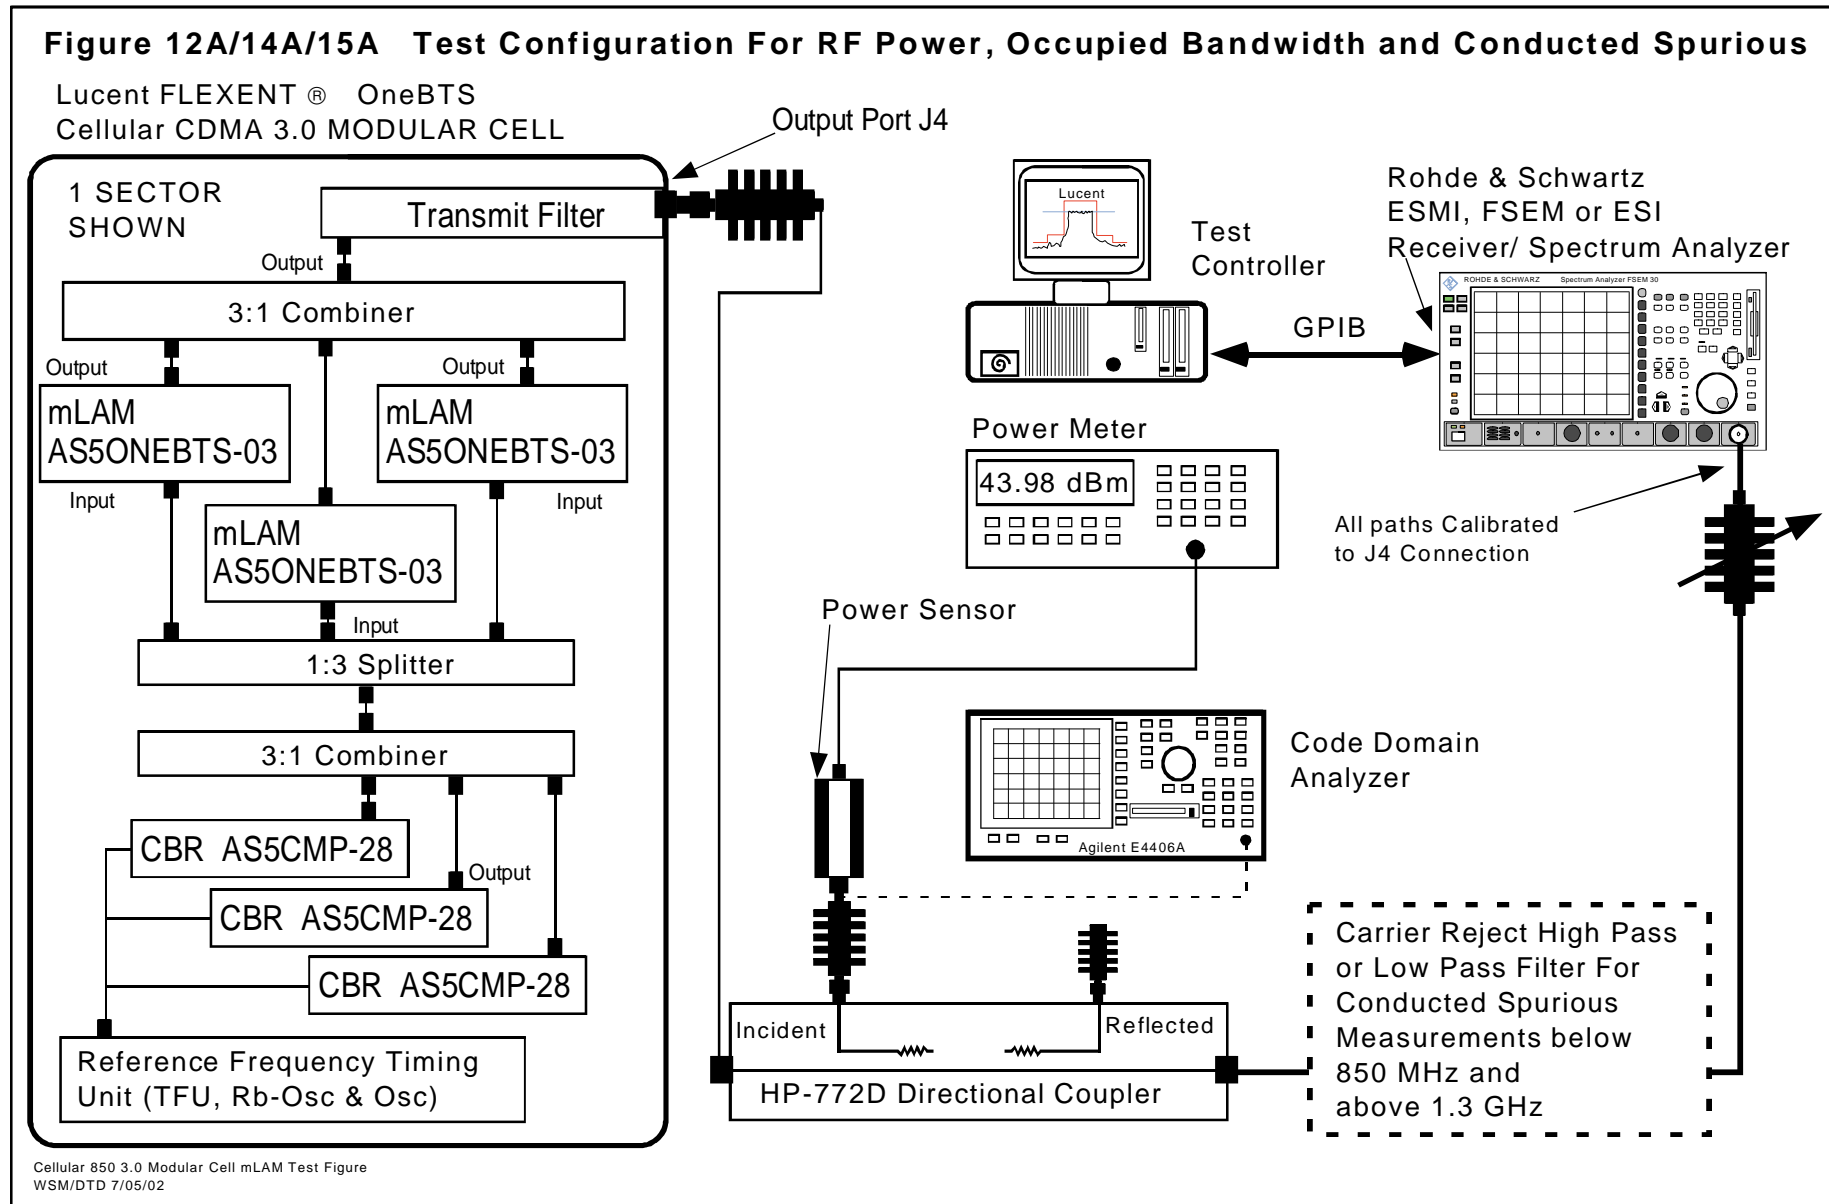


Figure 14B Occupied Bandwidth Mask

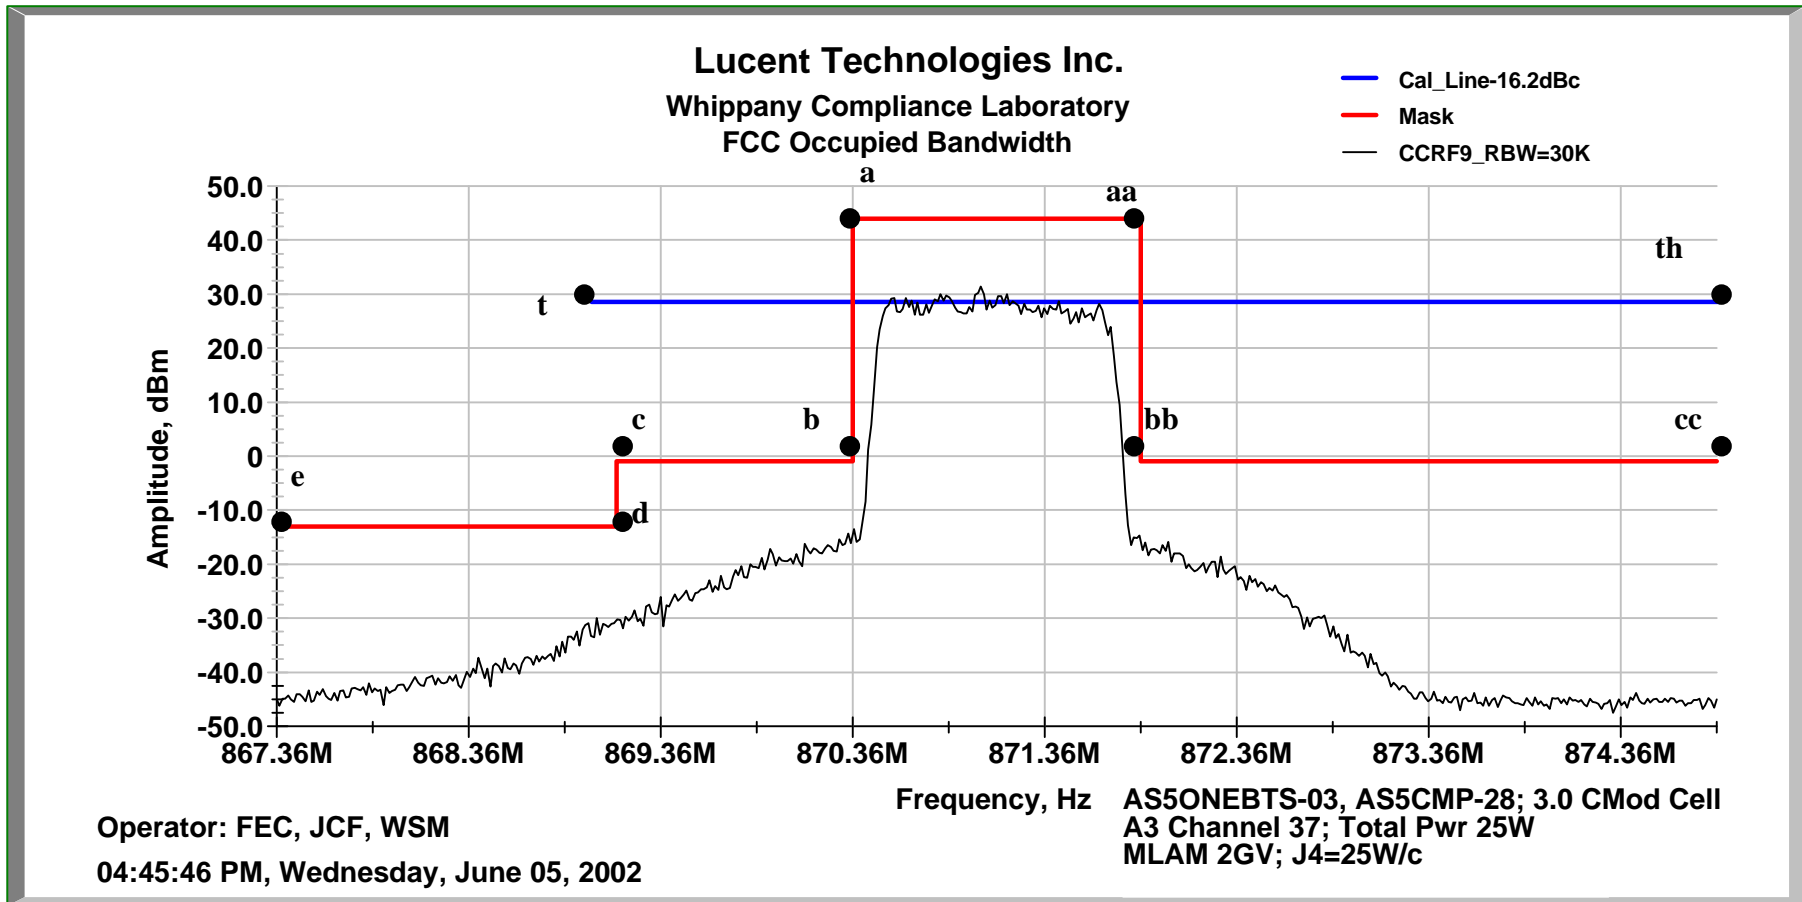


Figure 14C Typical Power Calibration

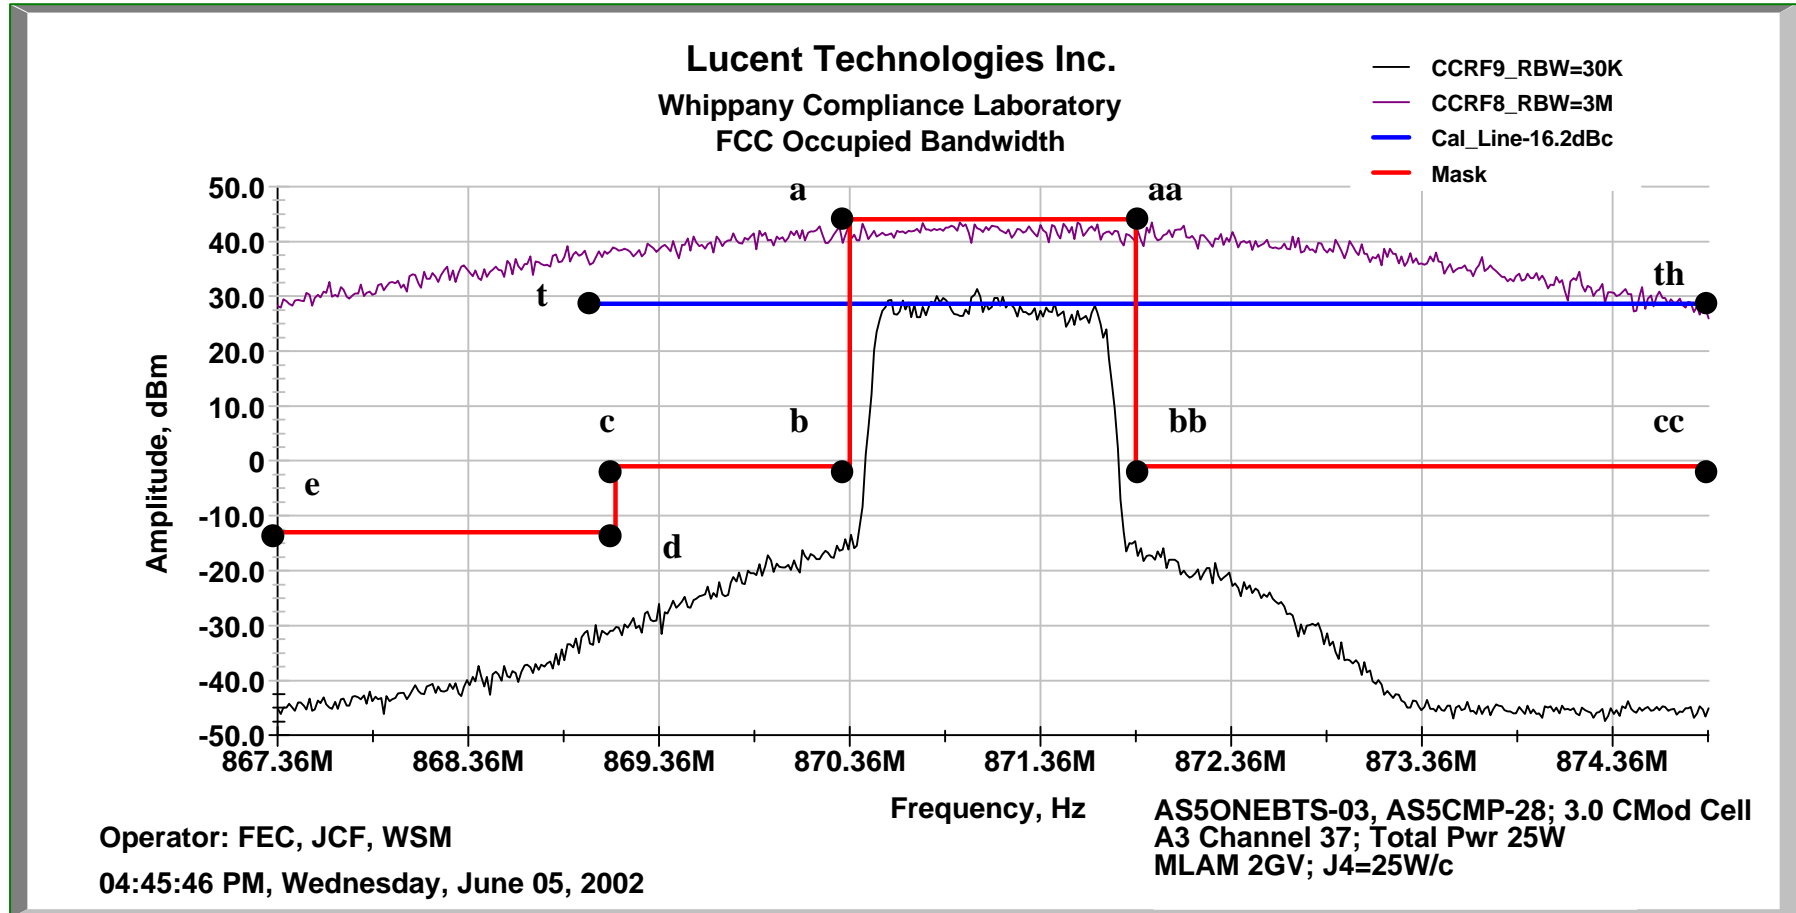


Exhibit 14 *Continued*

**FCC
Occupied Bandwidth
Data Scans
of
Lucent Technologies Inc.**

**Cellular 850
Linear Amplifier Module (Model m)/
(mLAM)**

**Single, Dual and Three Carrier
Multi Carrier Amplifier Configurations**

Exhibit 14 *Continued*

FCC Occupied Bandwidth: Input Chart - Cellular A Block, Sub-Block A3, Single Carrier Configuration MLAM/MCA

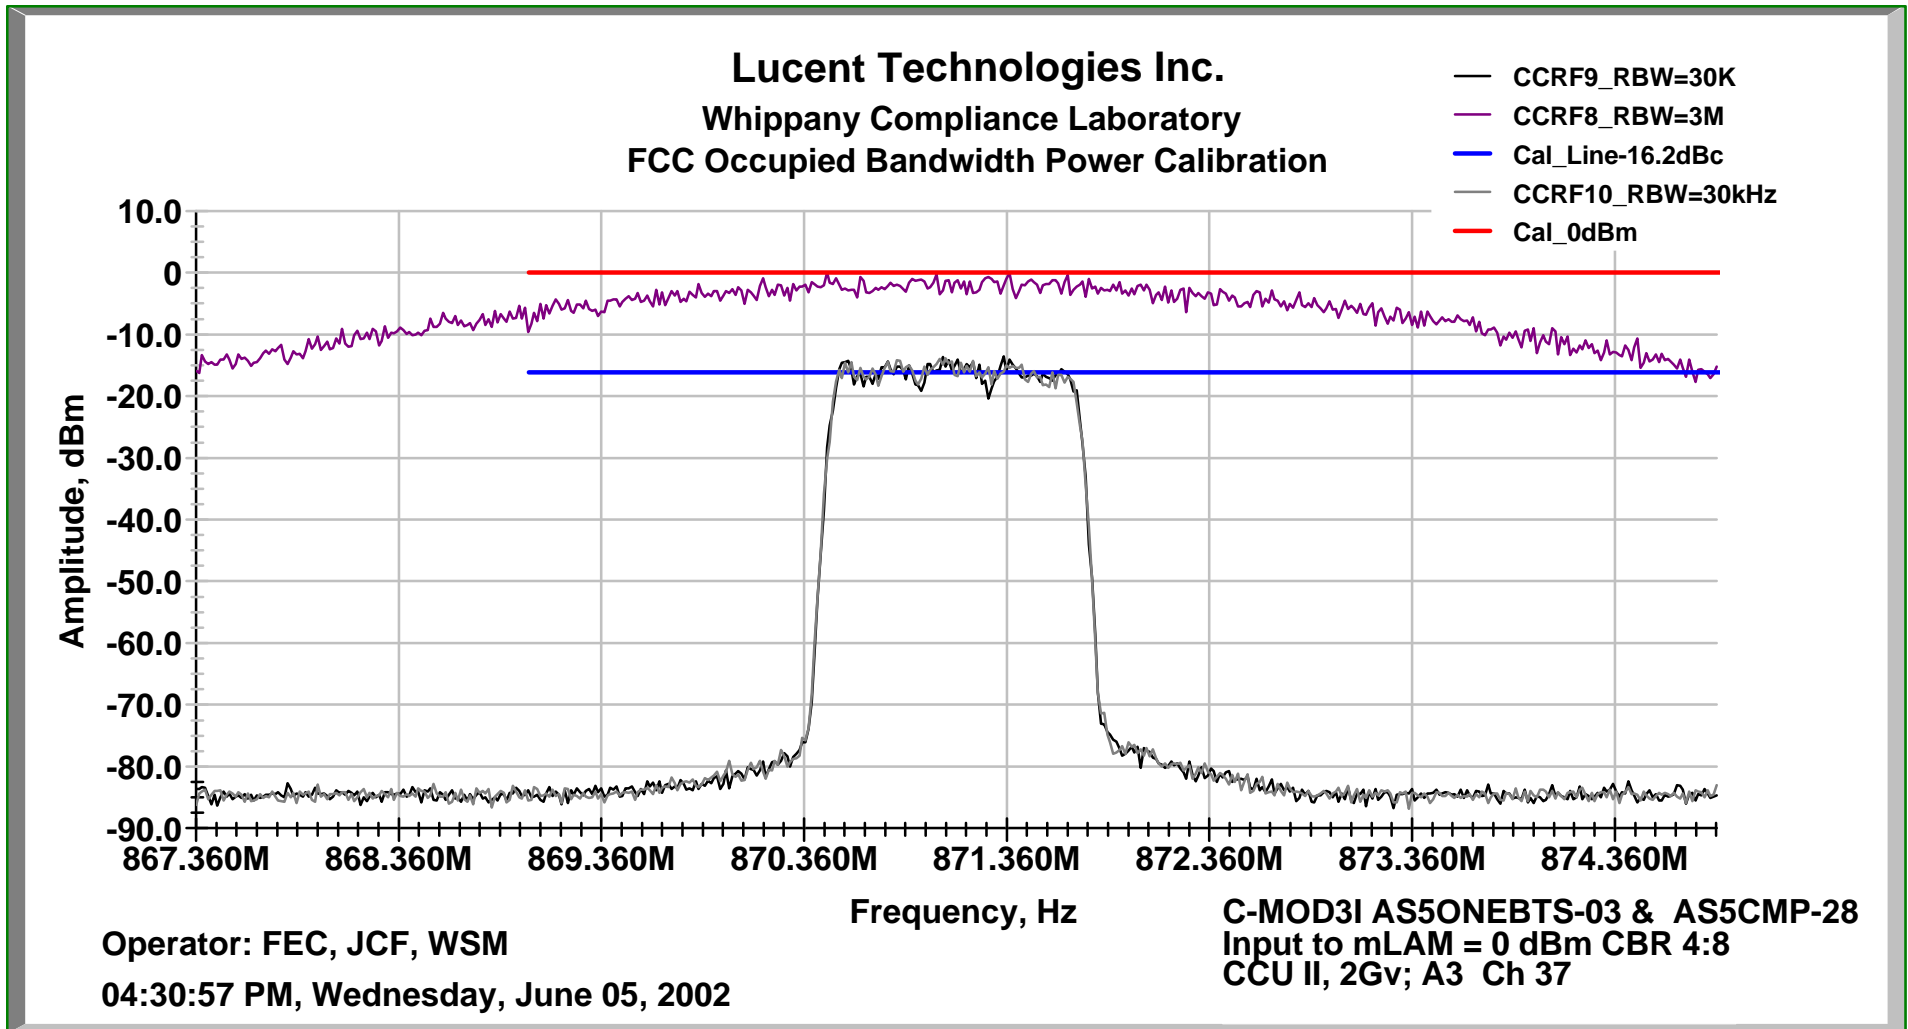


Exhibit 14 *Continued*

FCC Occupied Bandwidth: Output Chart - Cellular A Block, Sub-Block A3, Single Carrier Configuration MLAM/MCA

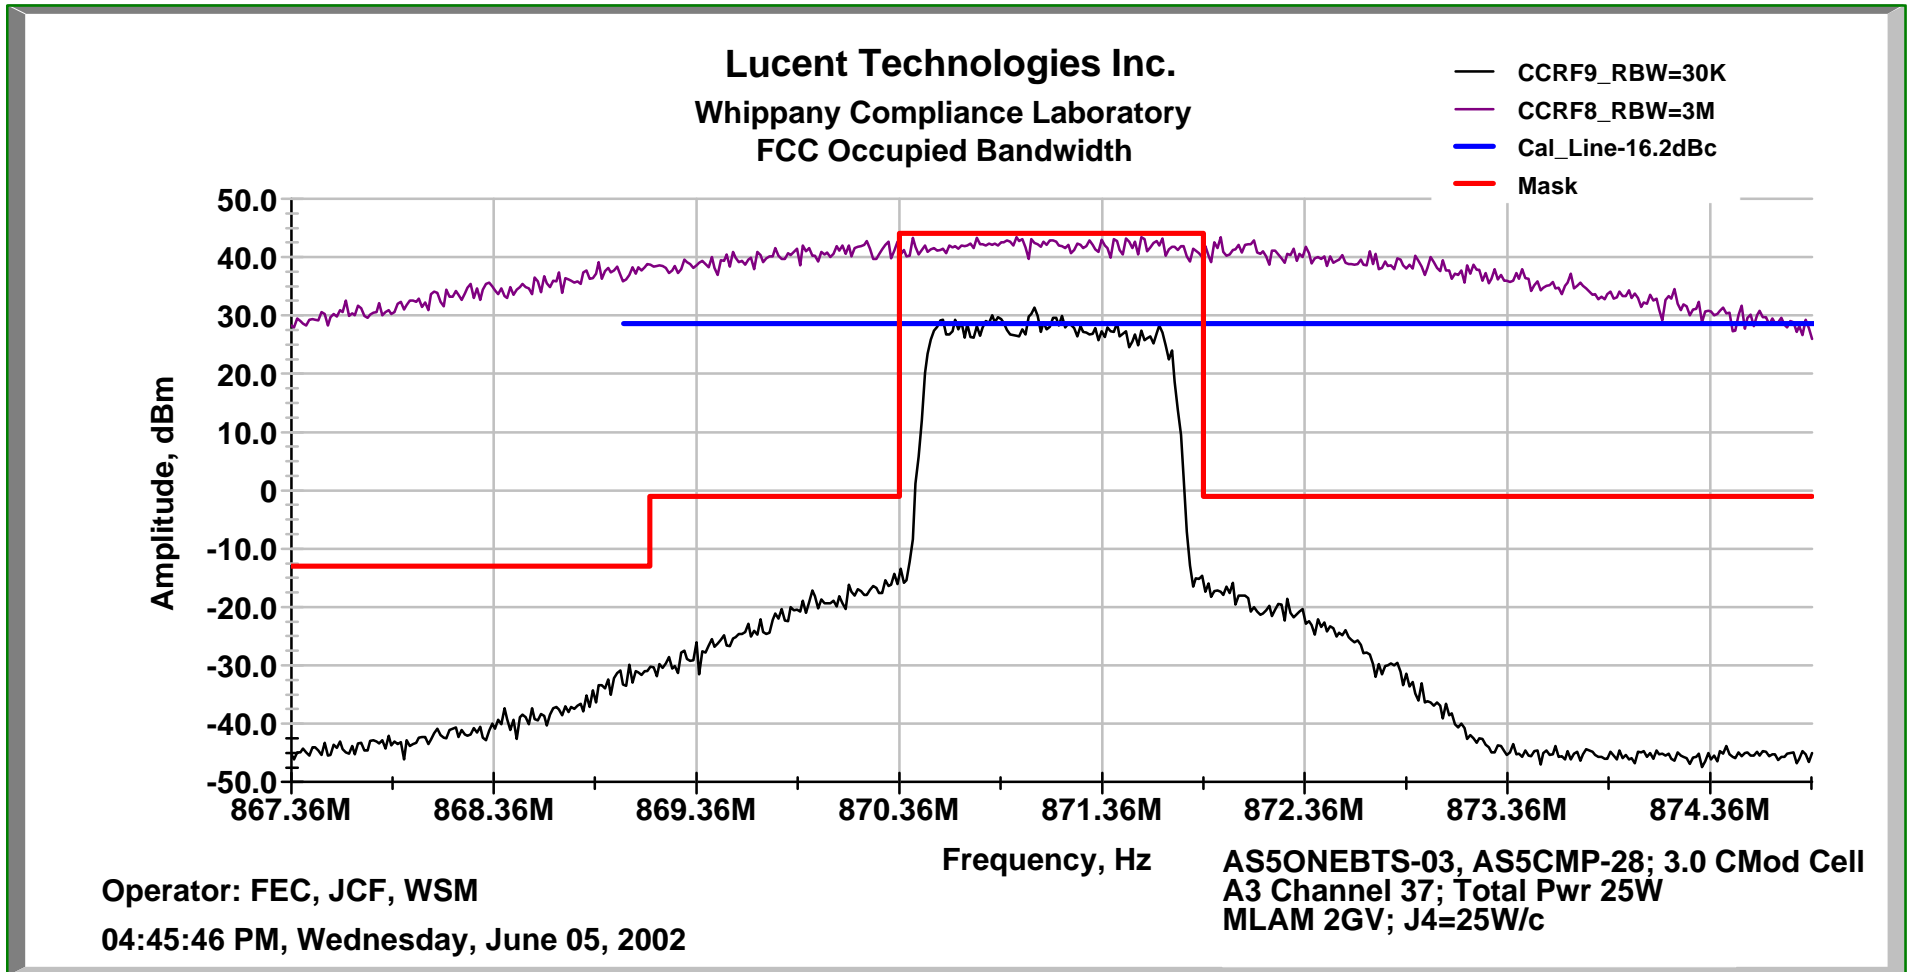


Exhibit 14 *Continued*

FCC Occupied Bandwidth: Input Chart - Cellular A Block, Sub-Block A1, Single Carrier Configuration MLAM/MCA

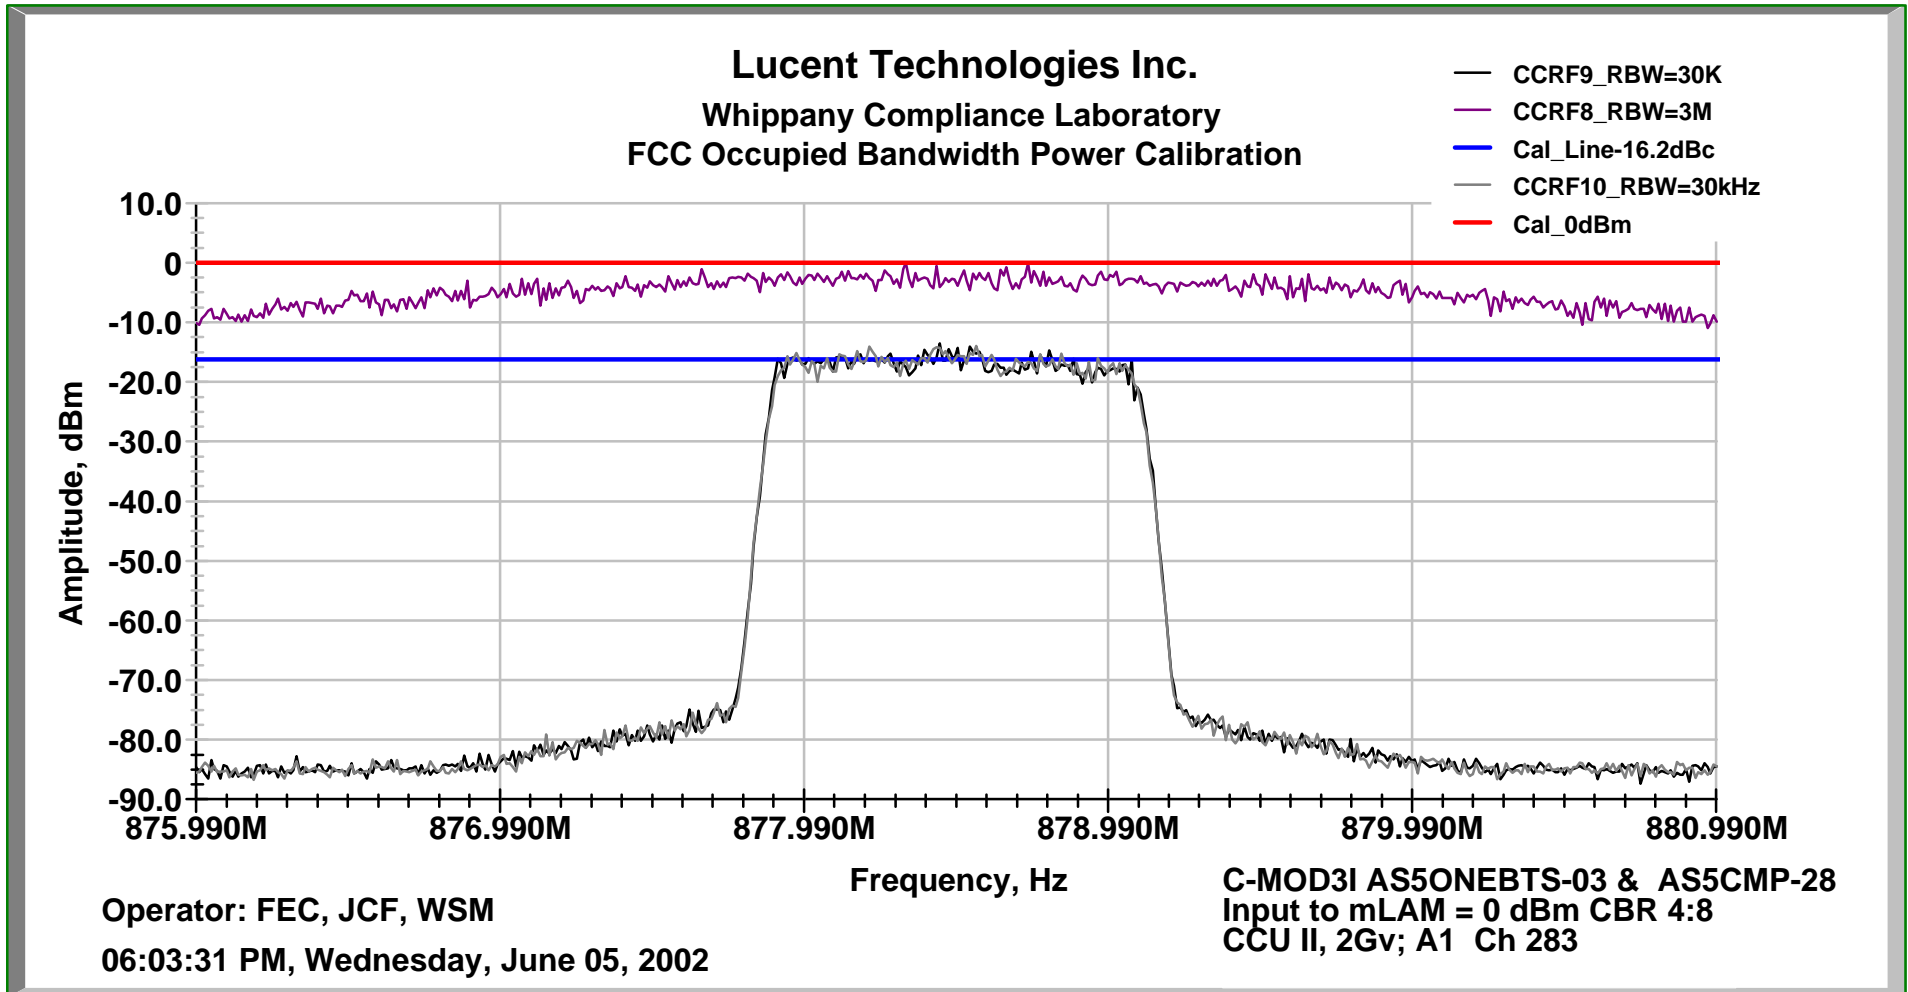


Exhibit 14 *Continued*

FCC Occupied Bandwidth: Output Chart - Cellular A Block, Sub-Block A1, Single Carrier Configuration MLAM/MCA

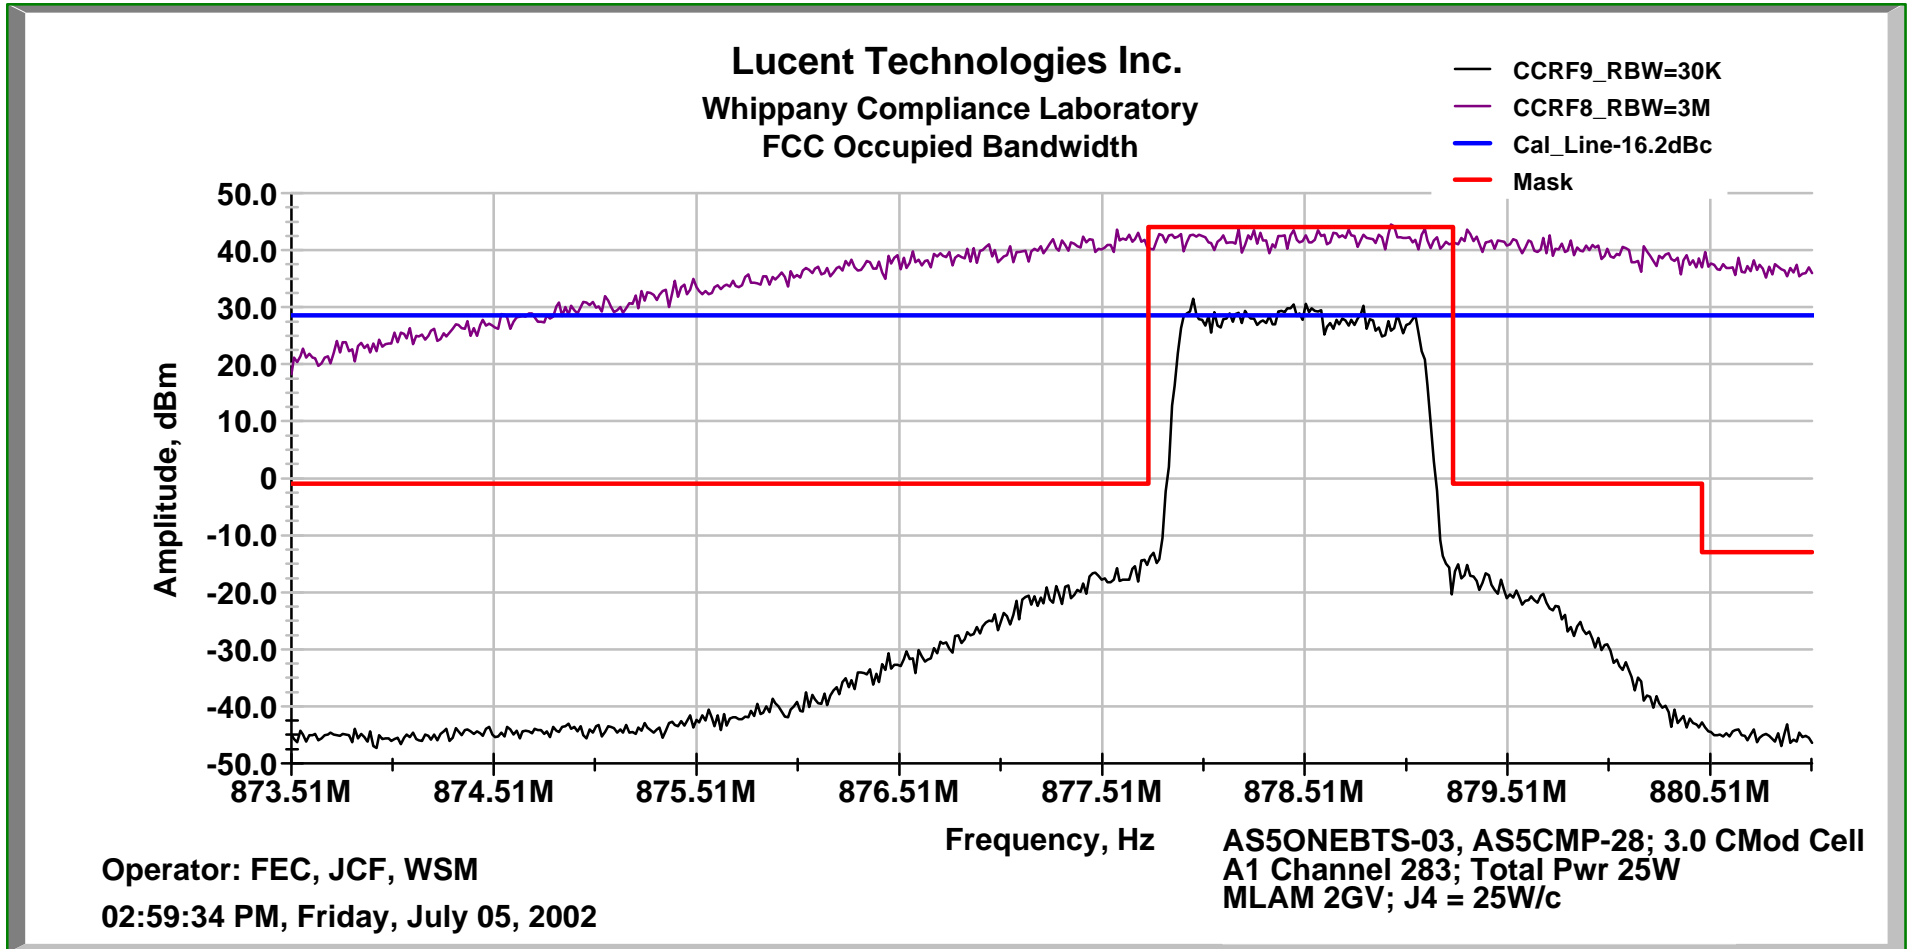


Exhibit 14 *Continued*

FCC Occupied Bandwidth: Input Chart - Cellular A Block, Sub-Block A1, Dual Carrier Configuration MLAM/MCA

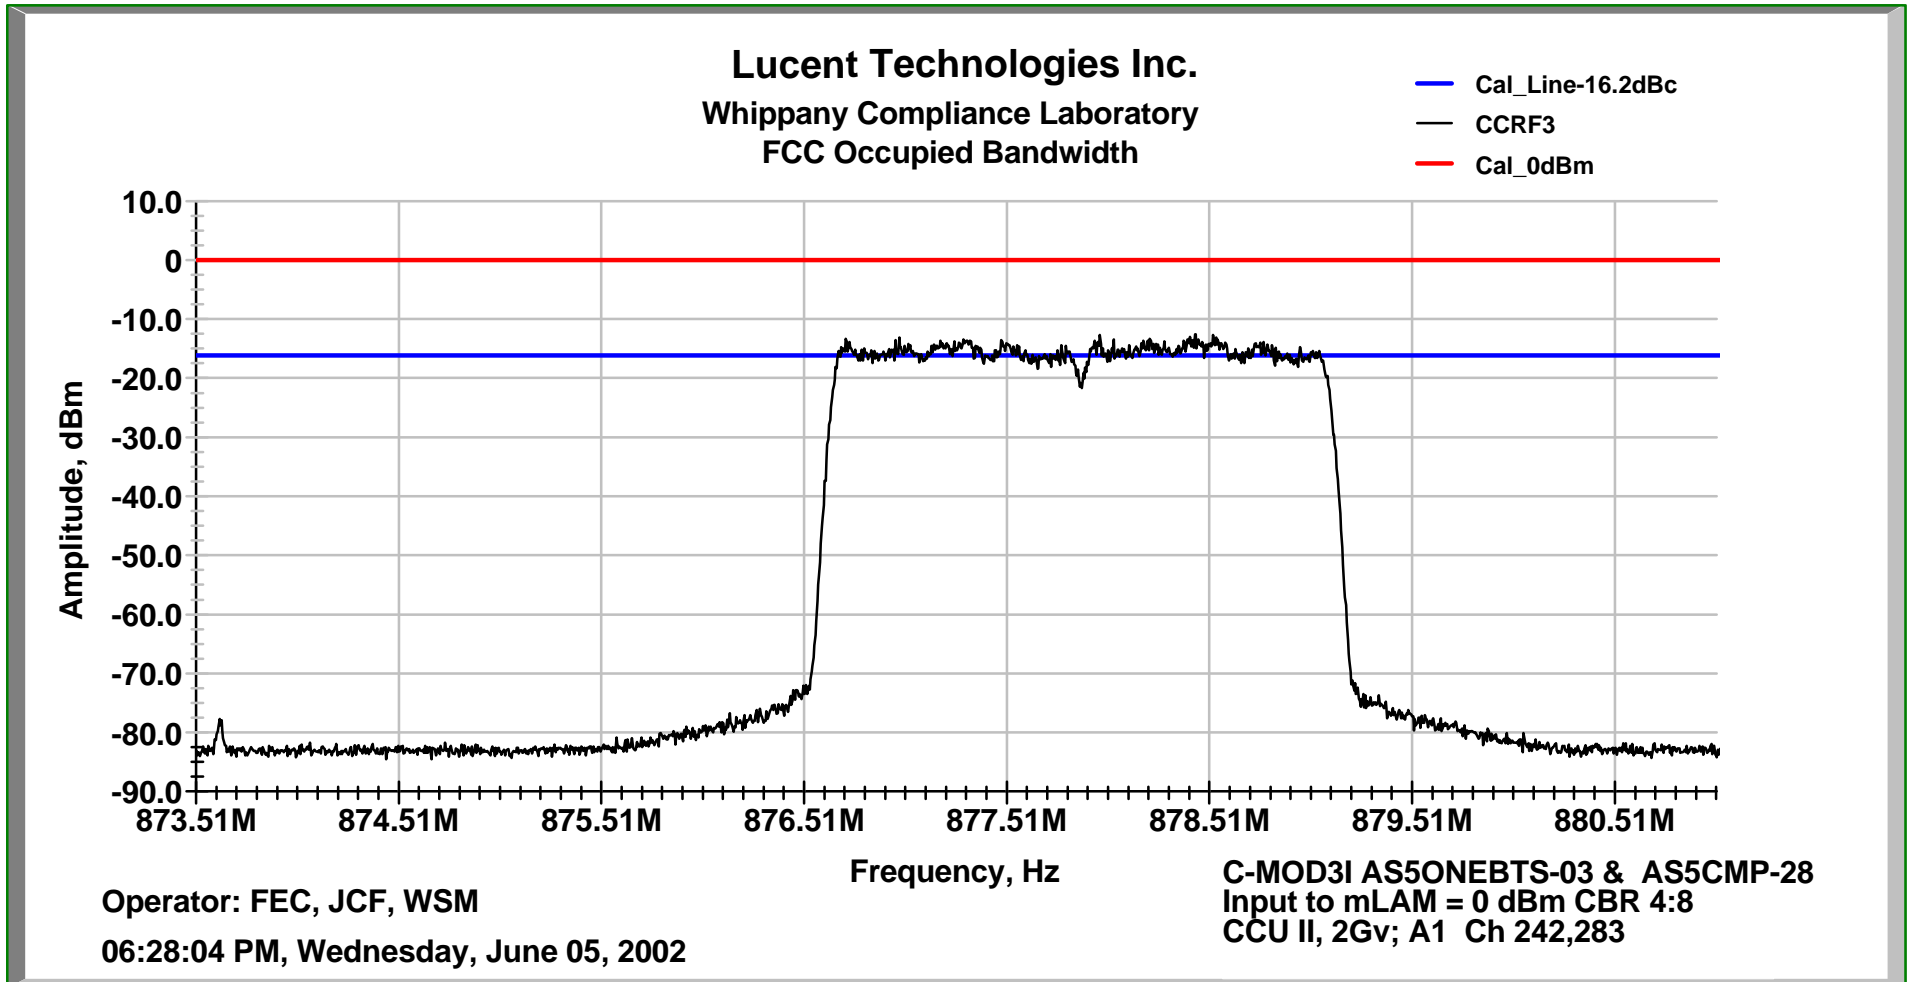


Exhibit 14 Continued

FCC Occupied Bandwidth: Output Chart - Cellular A Block, Sub-Block A1, Dual Carrier Configuration MLAM/MCA

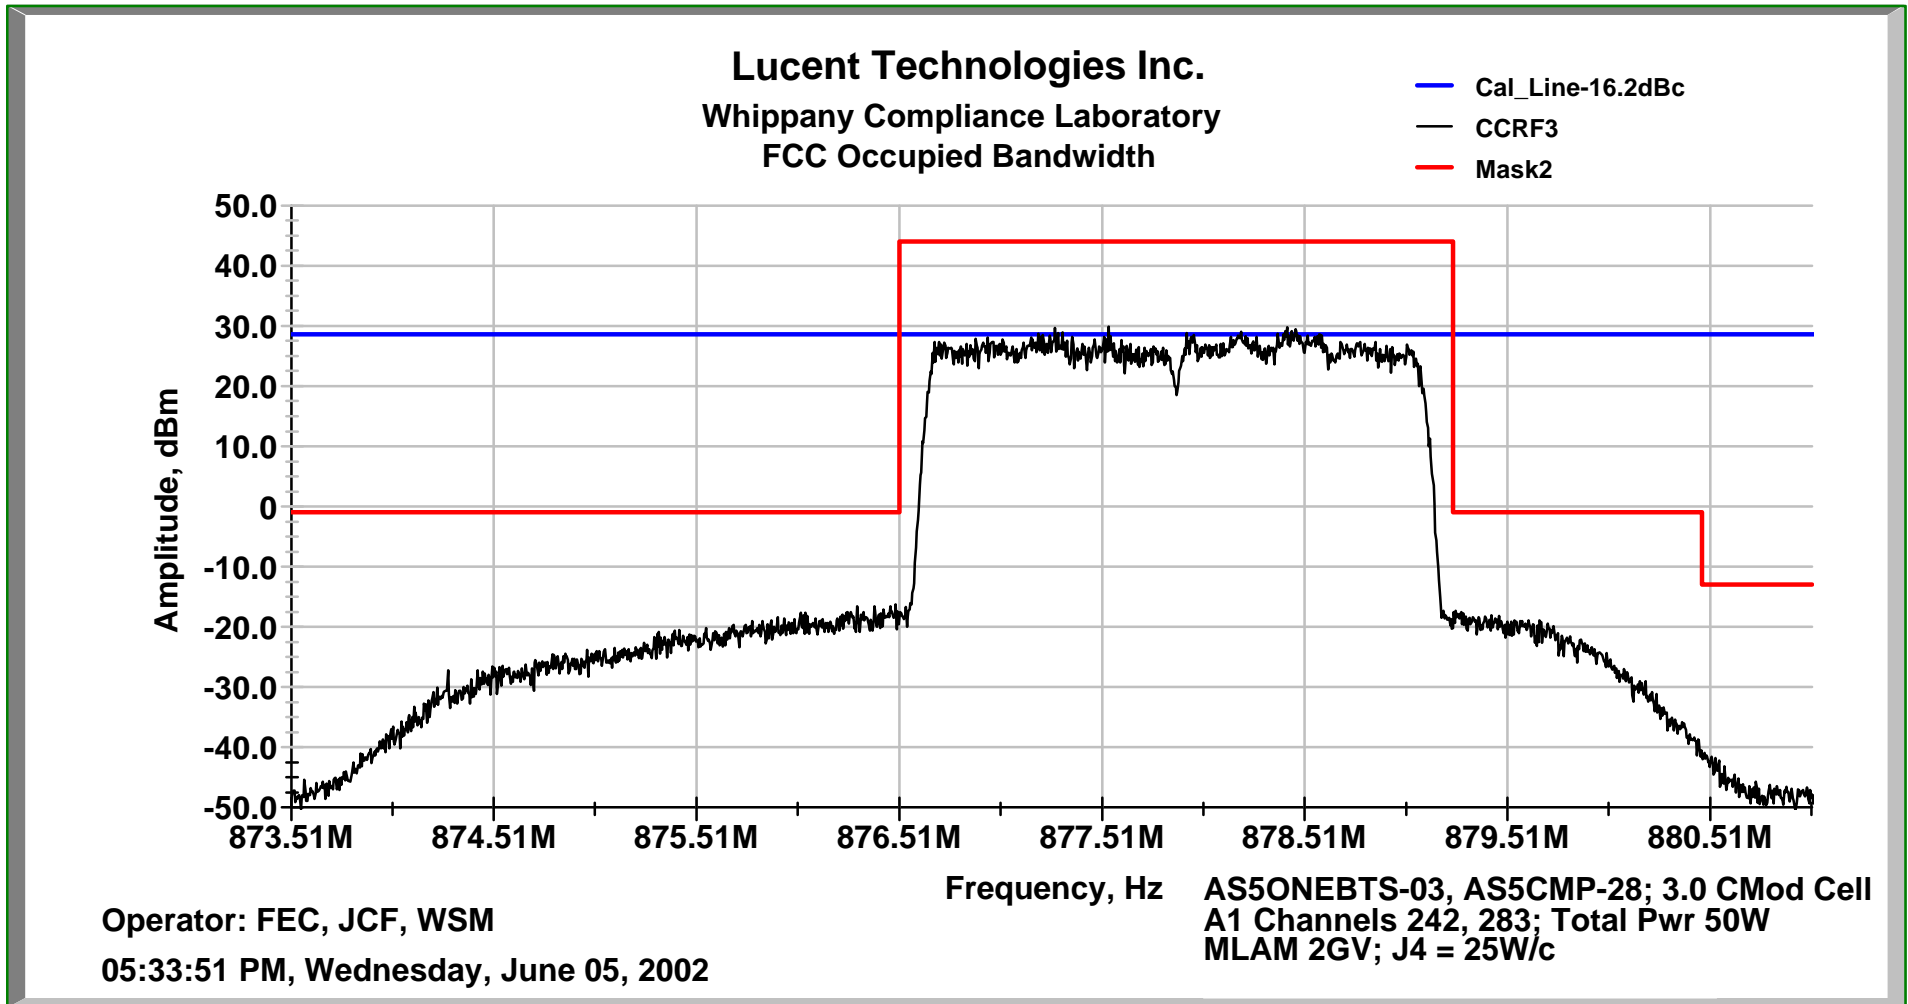


Exhibit 14 *Continued*

FCC Occupied Bandwidth: Input Chart - Cellular A Block, Sub-Block A1, Three Carrier Configuration MLAM/MCA

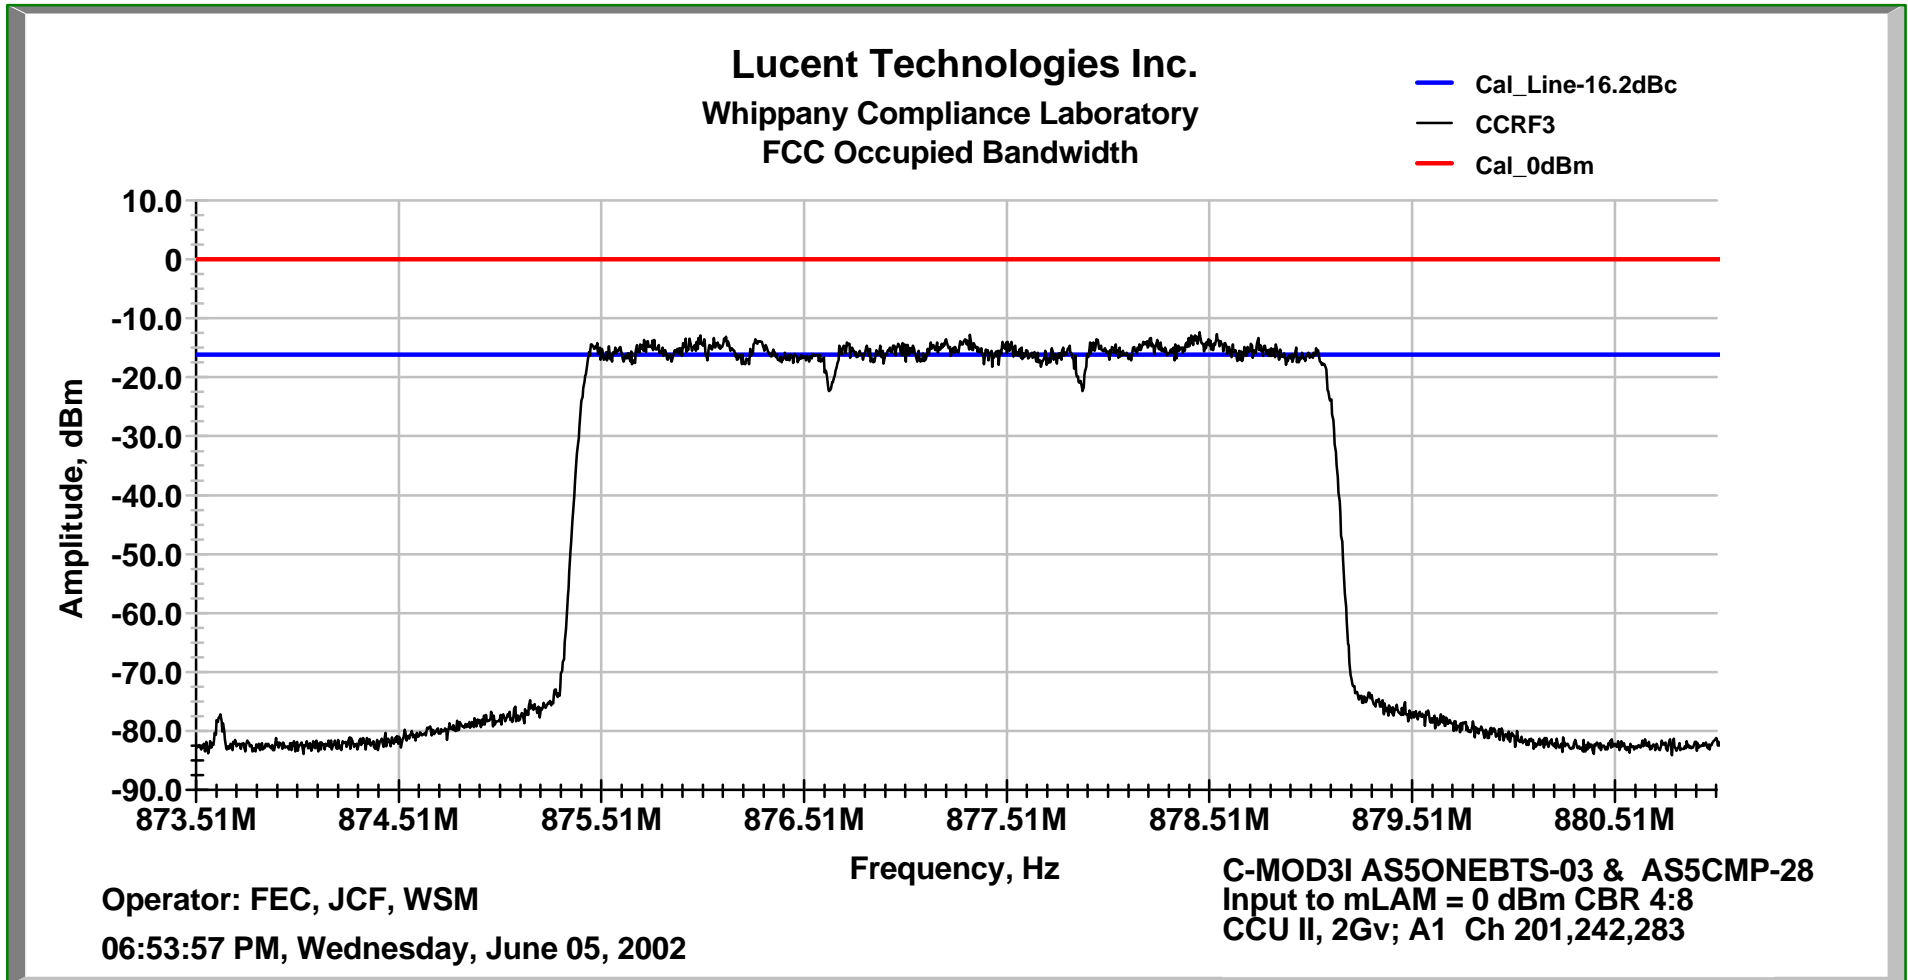


Exhibit 14 Continued

FCC Occupied Bandwidth: Output Chart - Cellular A Block, Sub-Block A1, Three Carrier Configuration MLAM/MCA

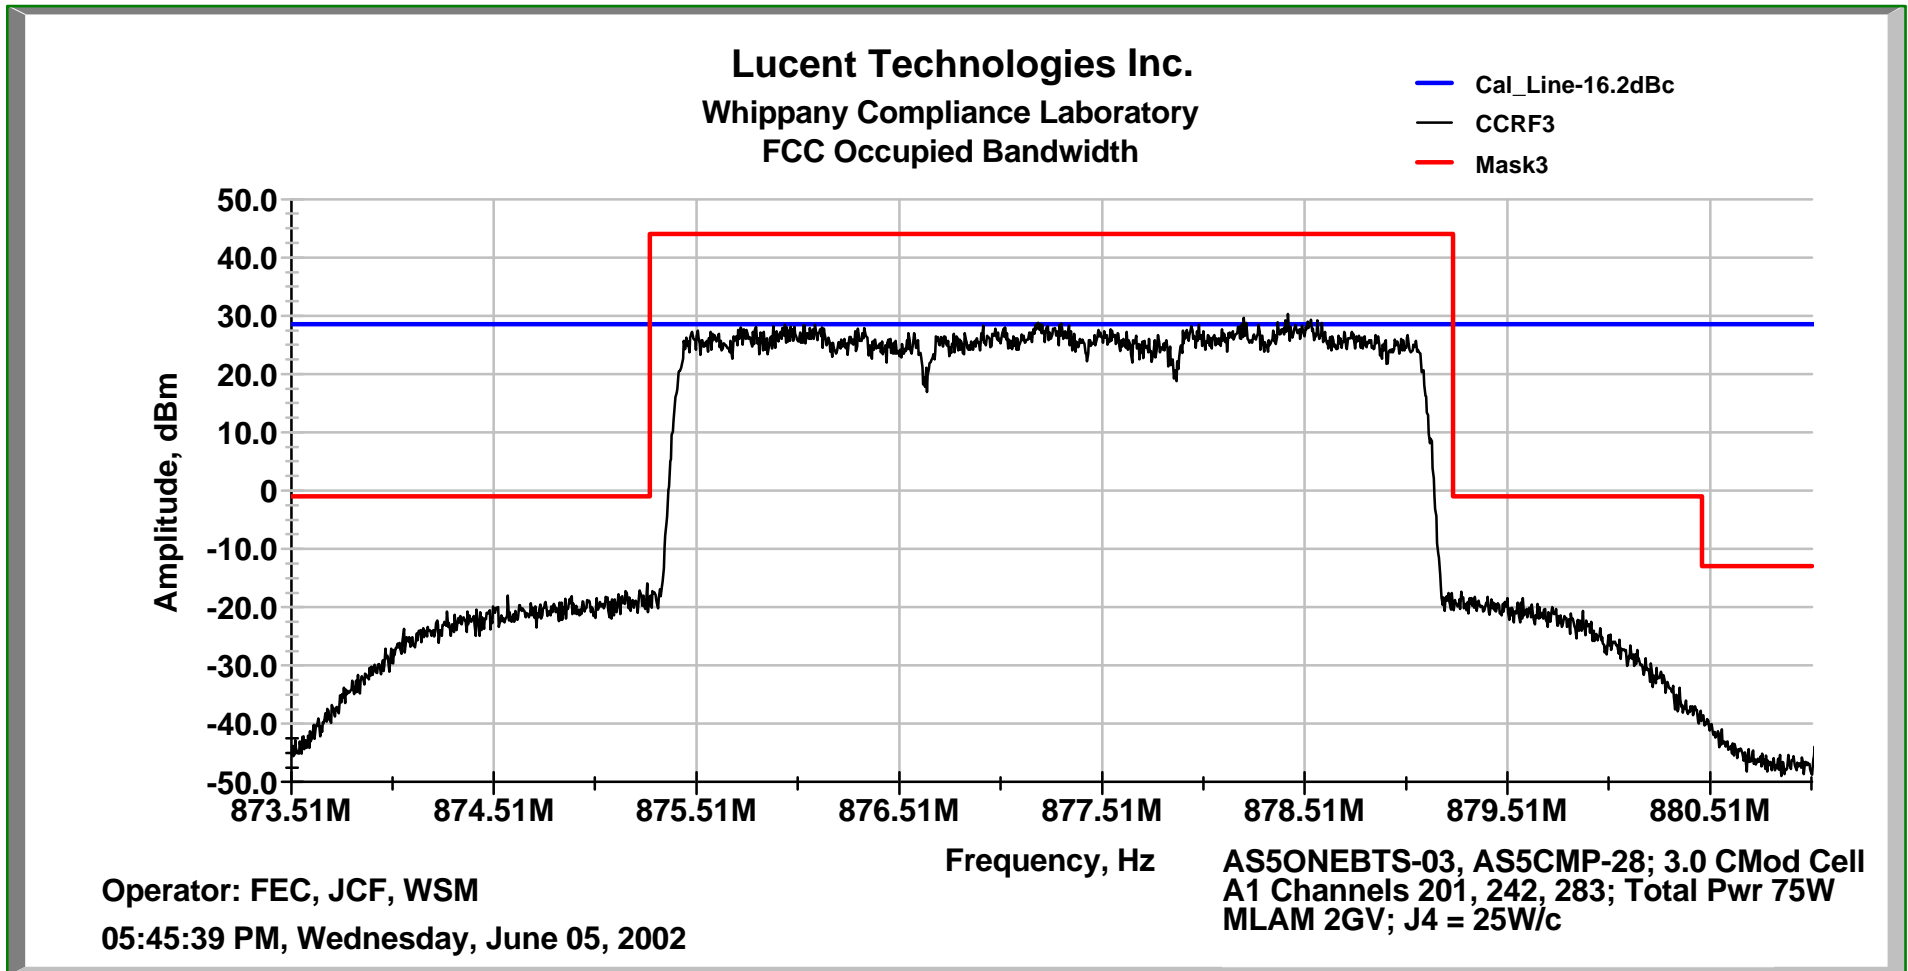


Exhibit 14 Continued

FCC Occupied Bandwidth: Input Chart - Cellular B Block, Sub-Block B1, Single Carrier Configuration MLAM/MCA

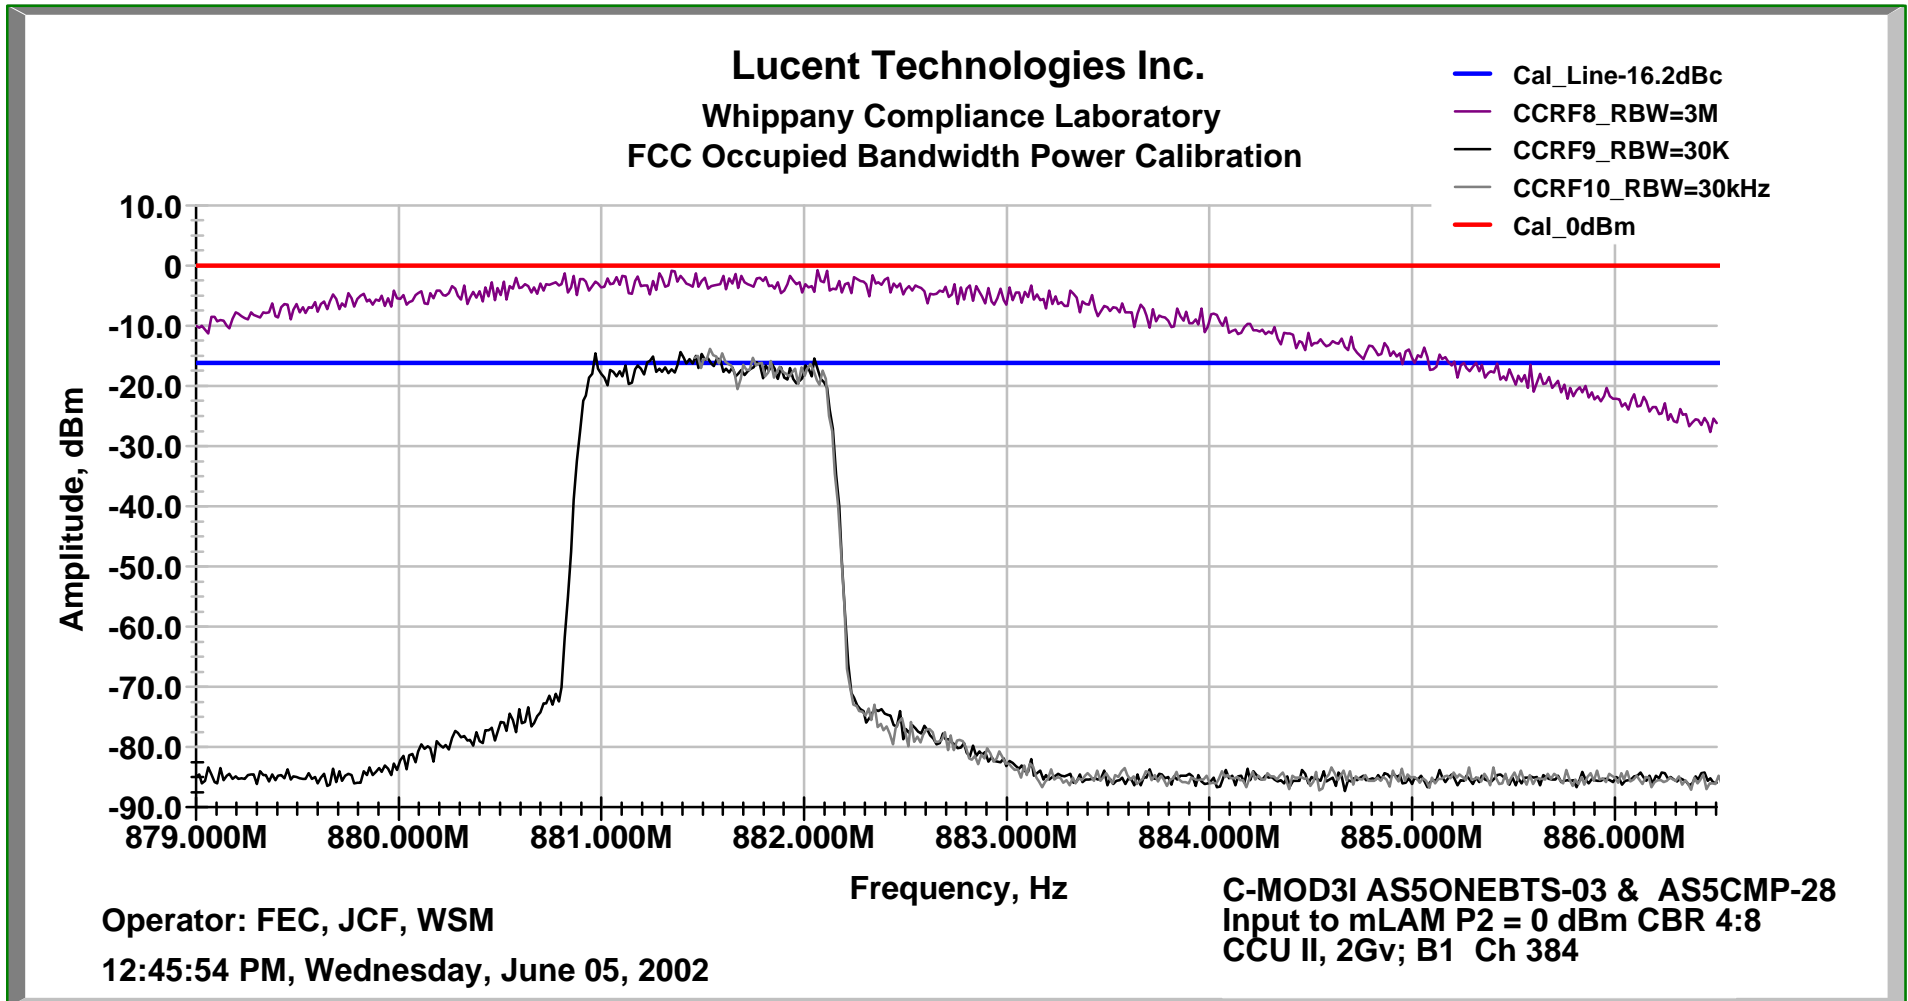


Exhibit 14 Continued

FCC Occupied Bandwidth: Output Chart - Cellular B Block, Sub-Block B1, Single Carrier Configuration MLAM/MCA

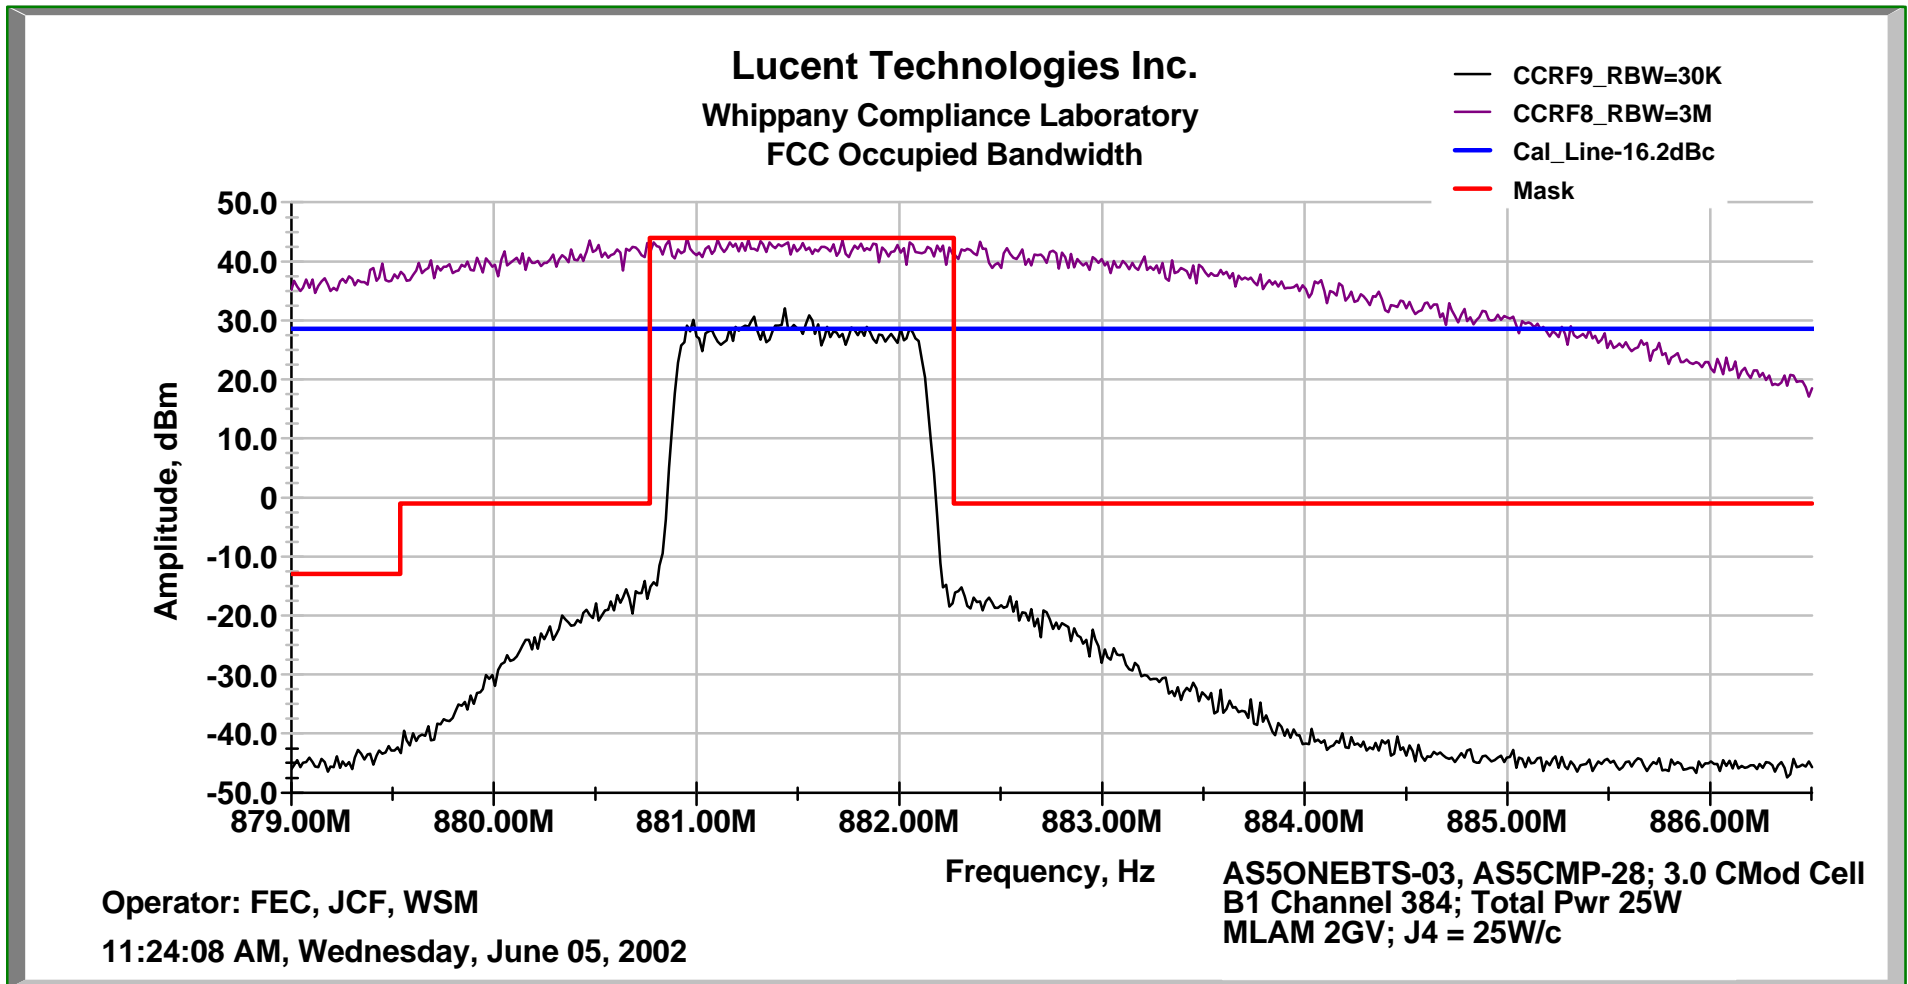


Exhibit 14 Continued

FCC Occupied Bandwidth: Input Chart - Cellular B Block, Sub-Block B1, Dual Carrier Configuration MLAM/MCA

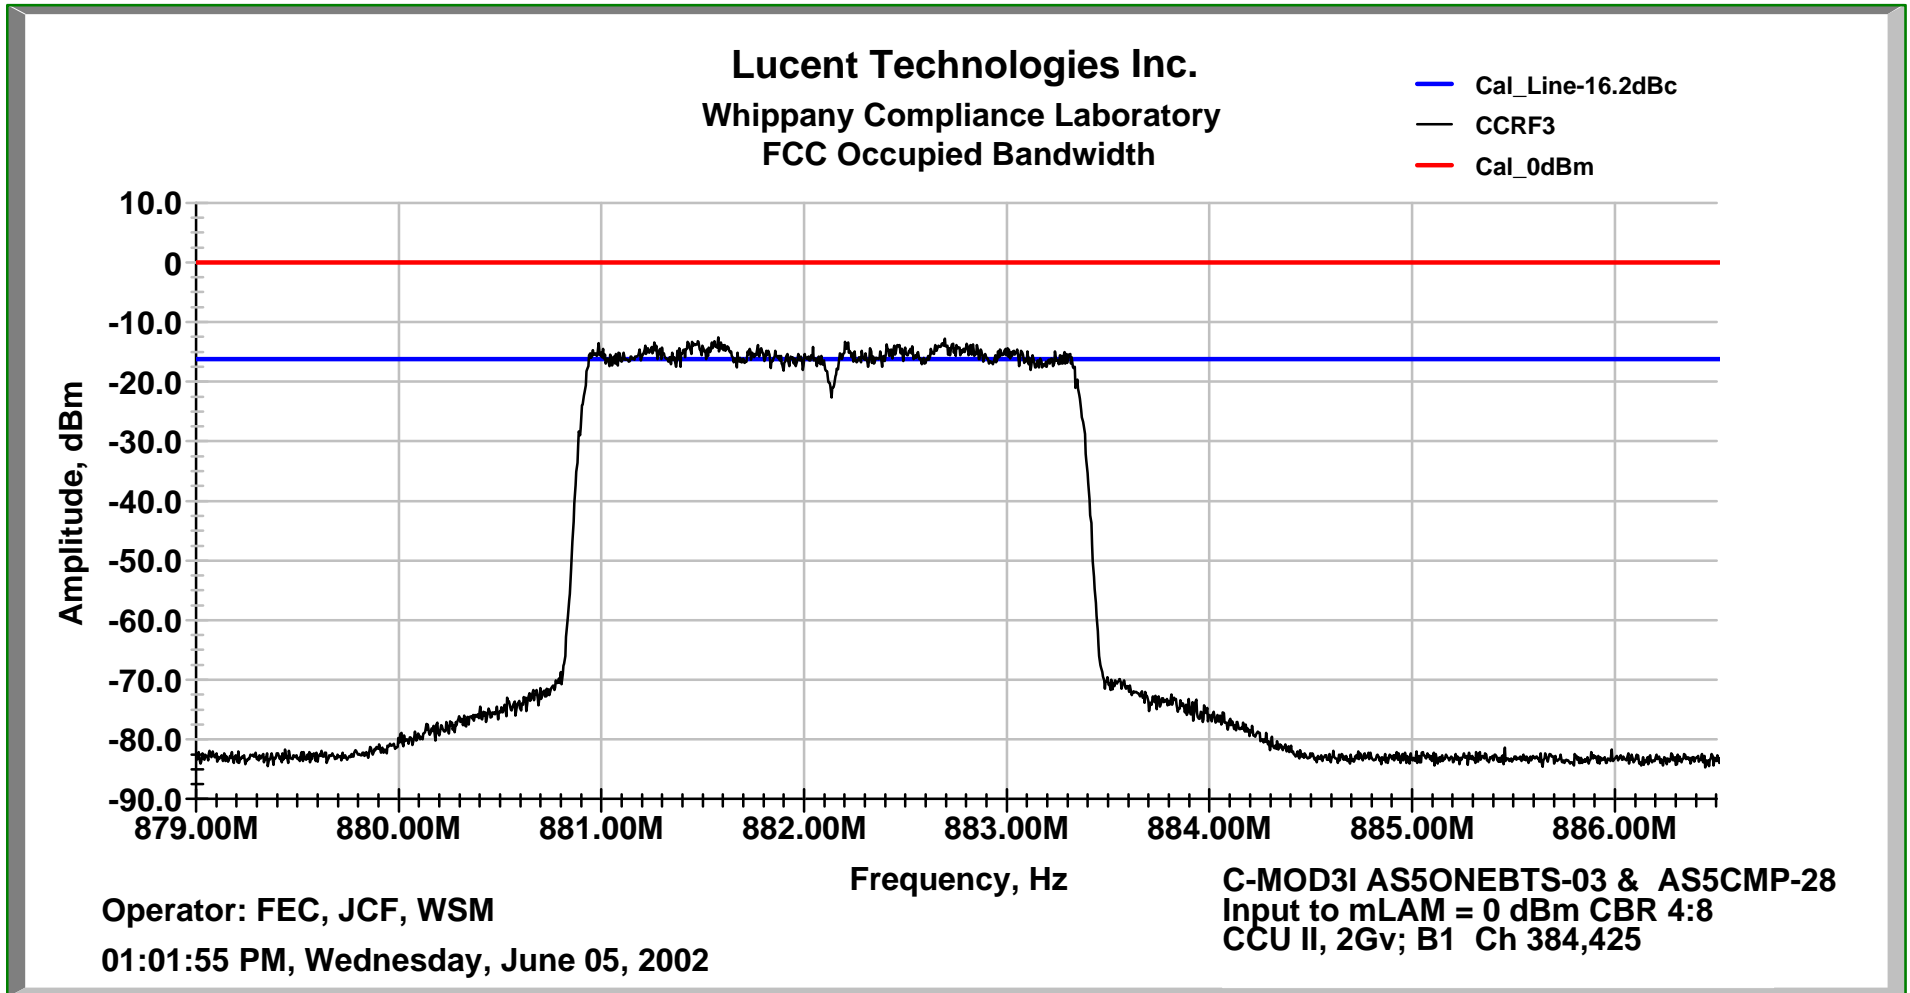


Exhibit 14 Continued

FCC Occupied Bandwidth: Output Chart - Cellular B Block, Sub-Block B1, Dual Carrier Configuration MLAM/MCA

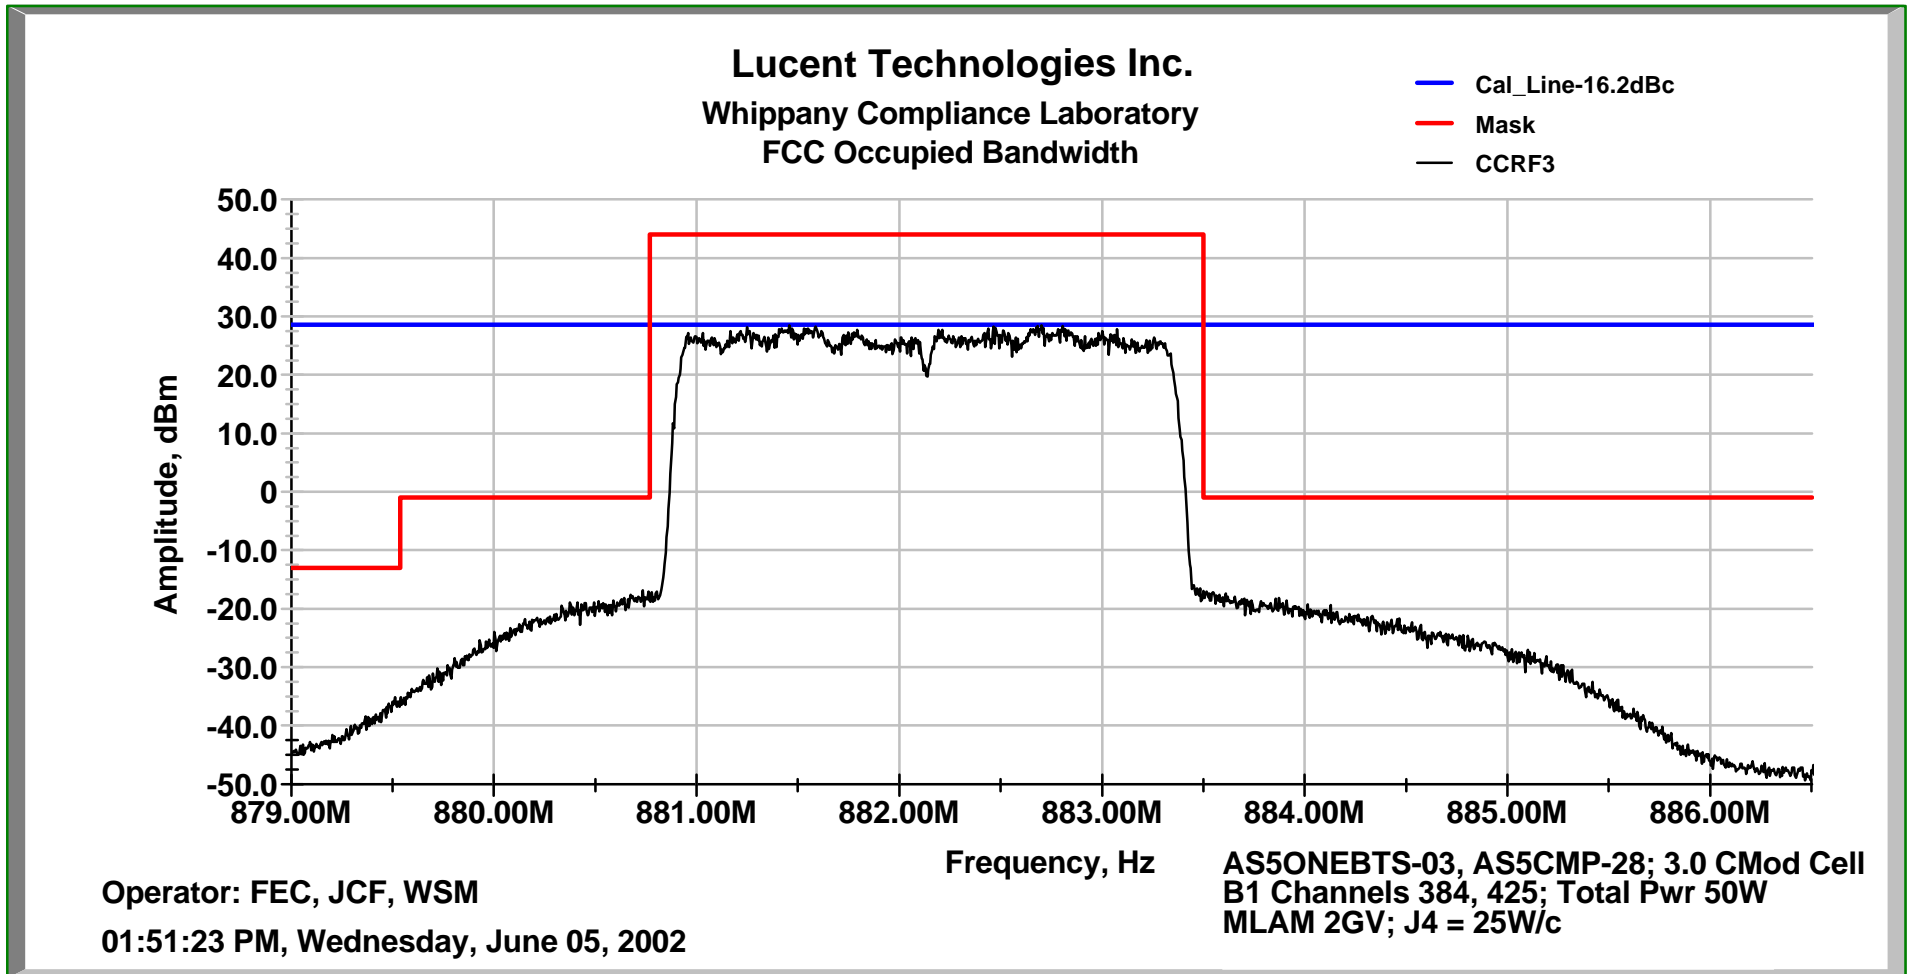


Exhibit 14 Continued

FCC Occupied Bandwidth: Input Chart - Cellular B Block, Sub-Block B1, Three Carrier Configuration MLAM/MCA

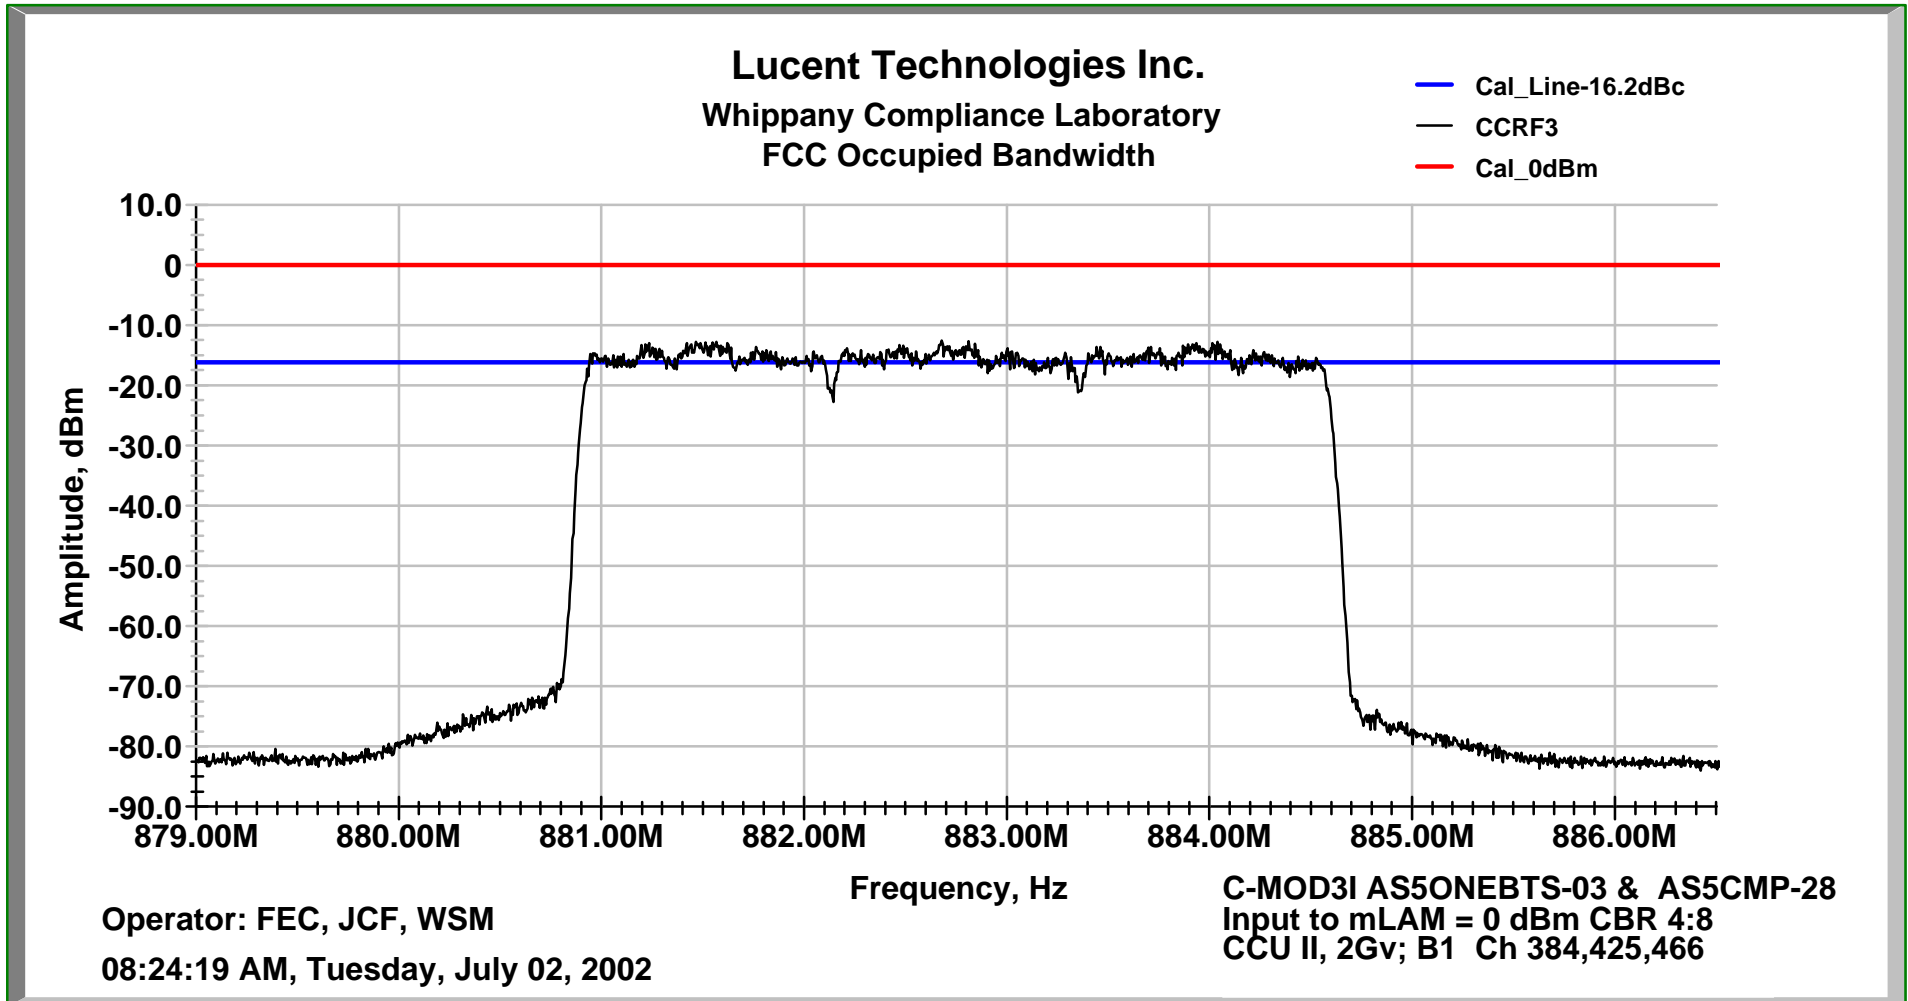


Exhibit 14 Continued

FCC Occupied Bandwidth: Output Chart - Cellular B Block, Sub-Block B1, Three Carrier Configuration MLAM/MCA

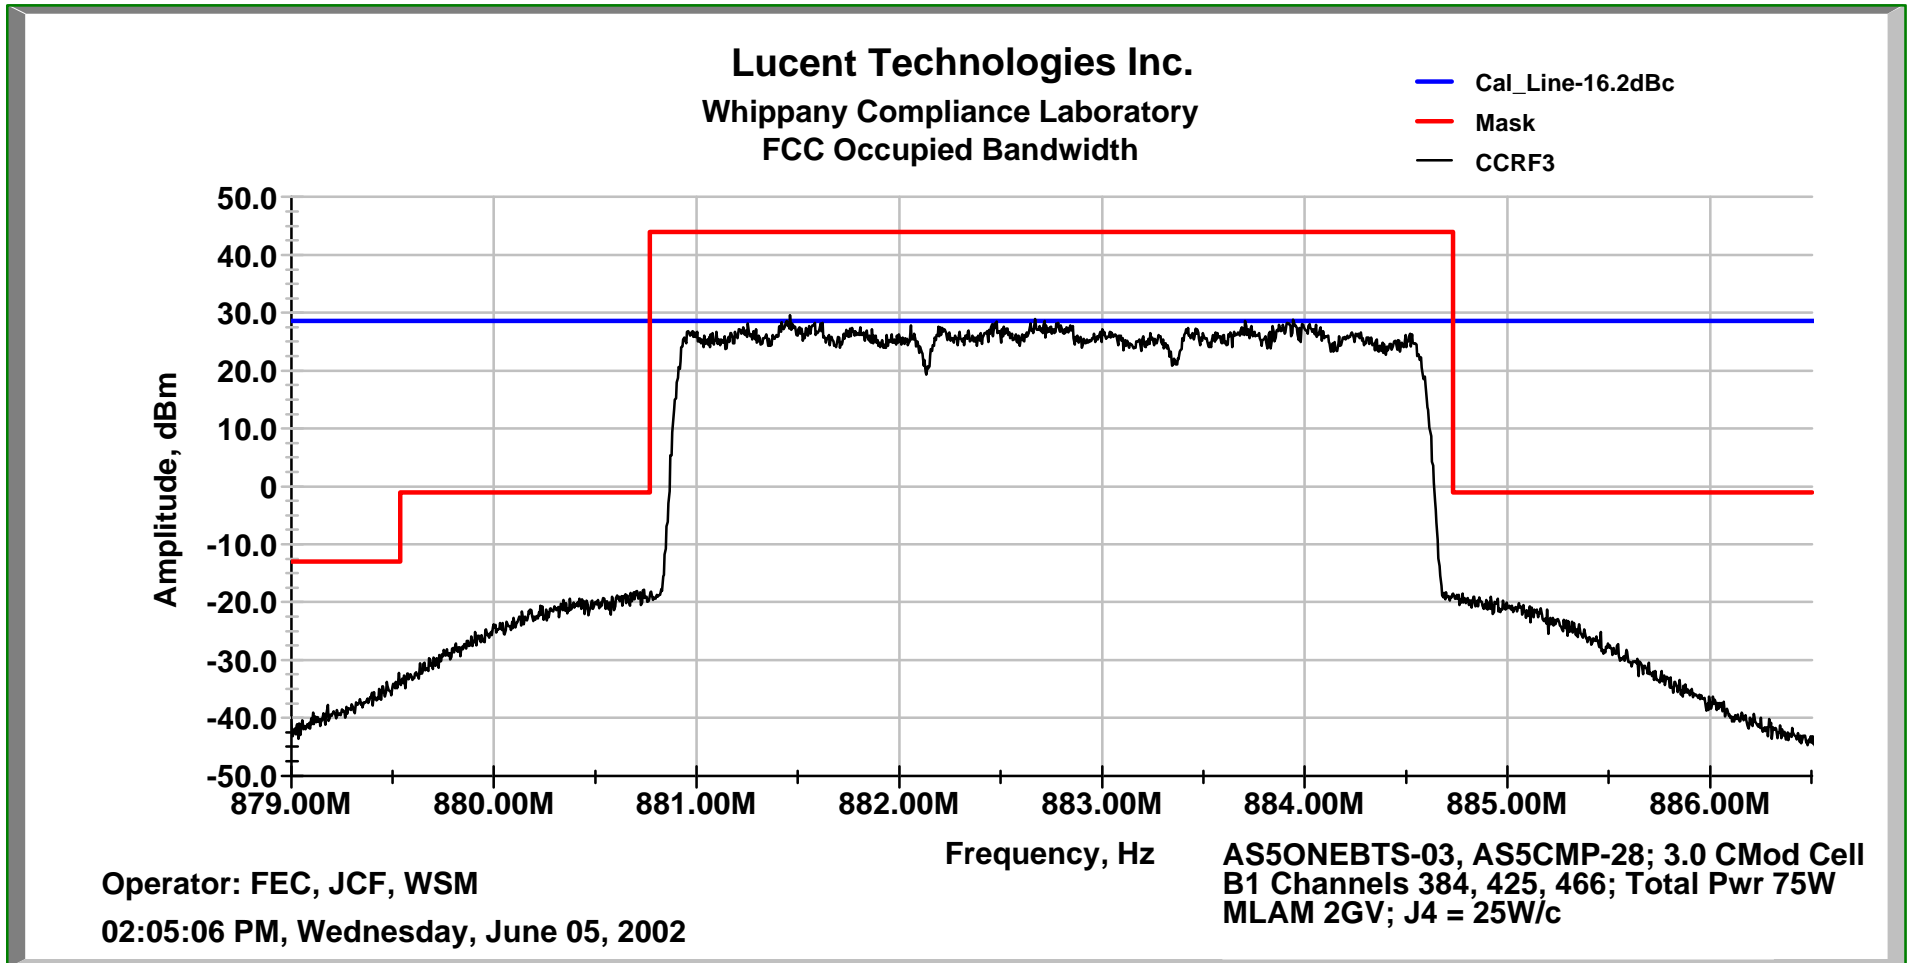


Exhibit 14 *Continued*

FCC Occupied Bandwidth: Input Chart - Cellular B Block, Sub-Block B', Single Carrier Configuration MLAM/MCA

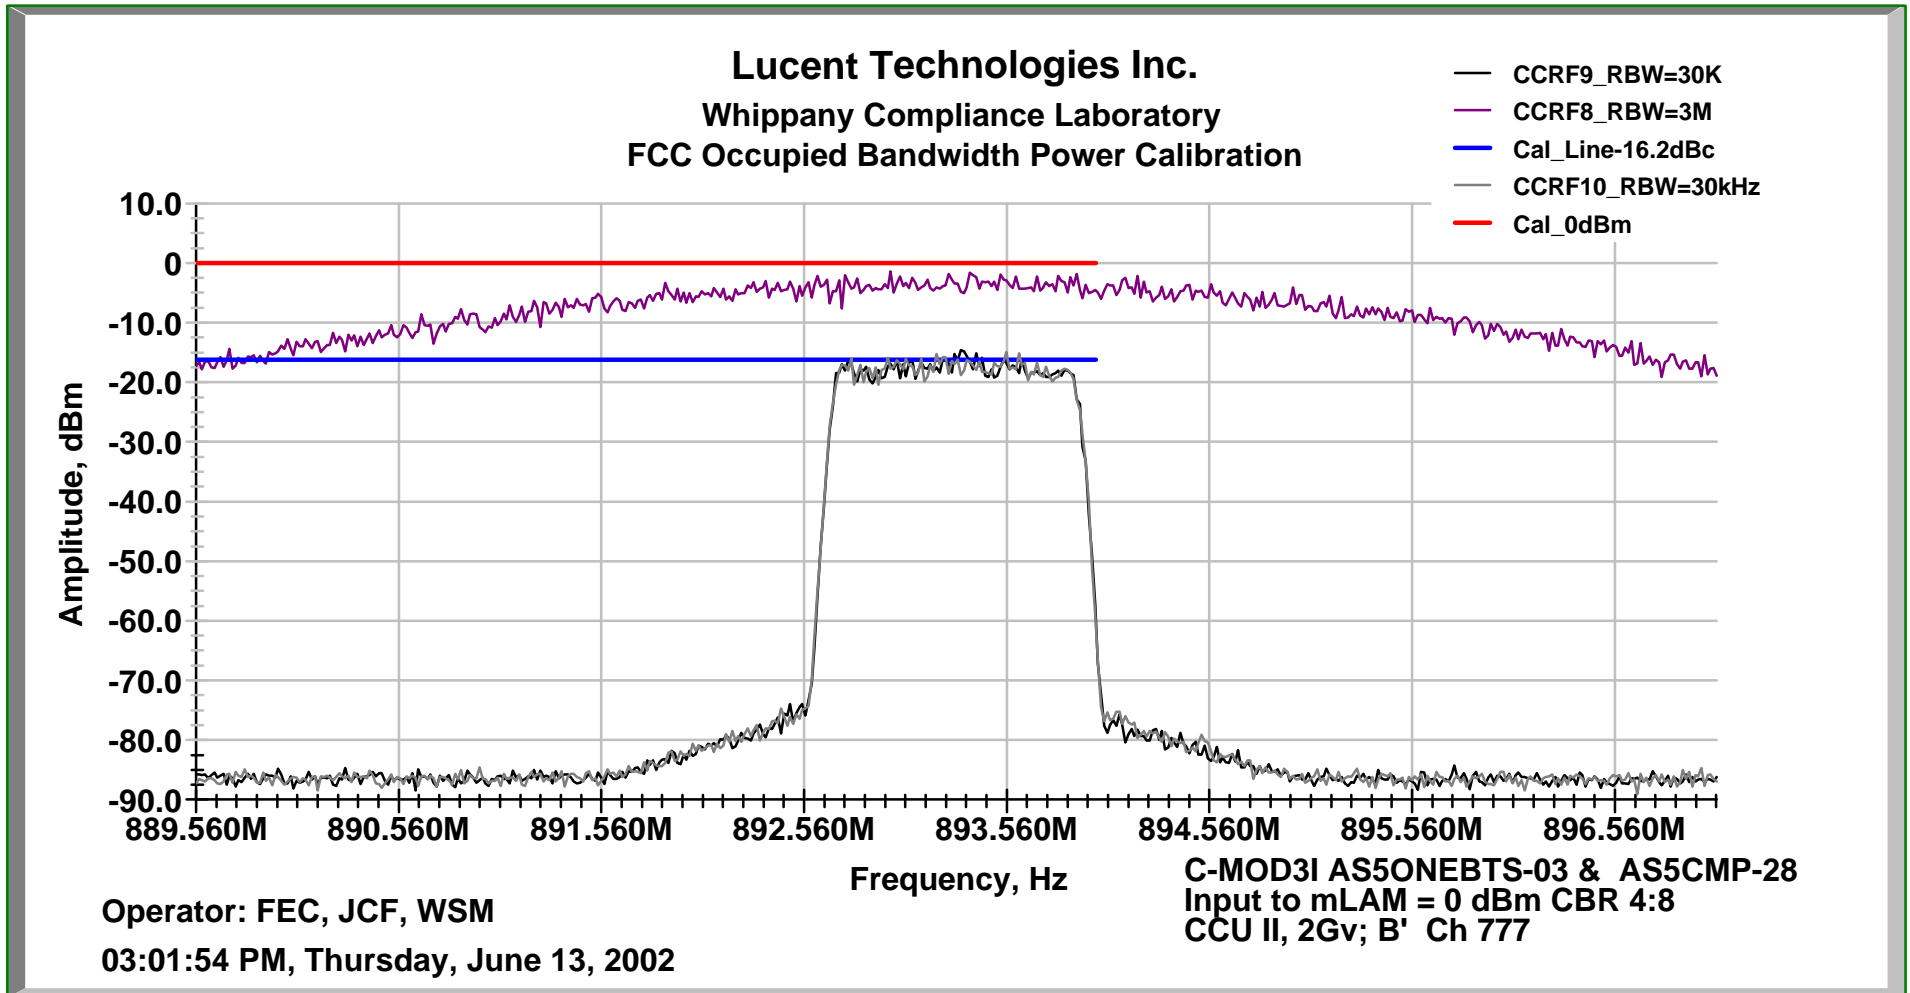


Exhibit 14 Continued

FCC Occupied Bandwidth: Output Chart - Cellular B Block, Sub-Block B', Single Carrier Configuration MLAM/MCA

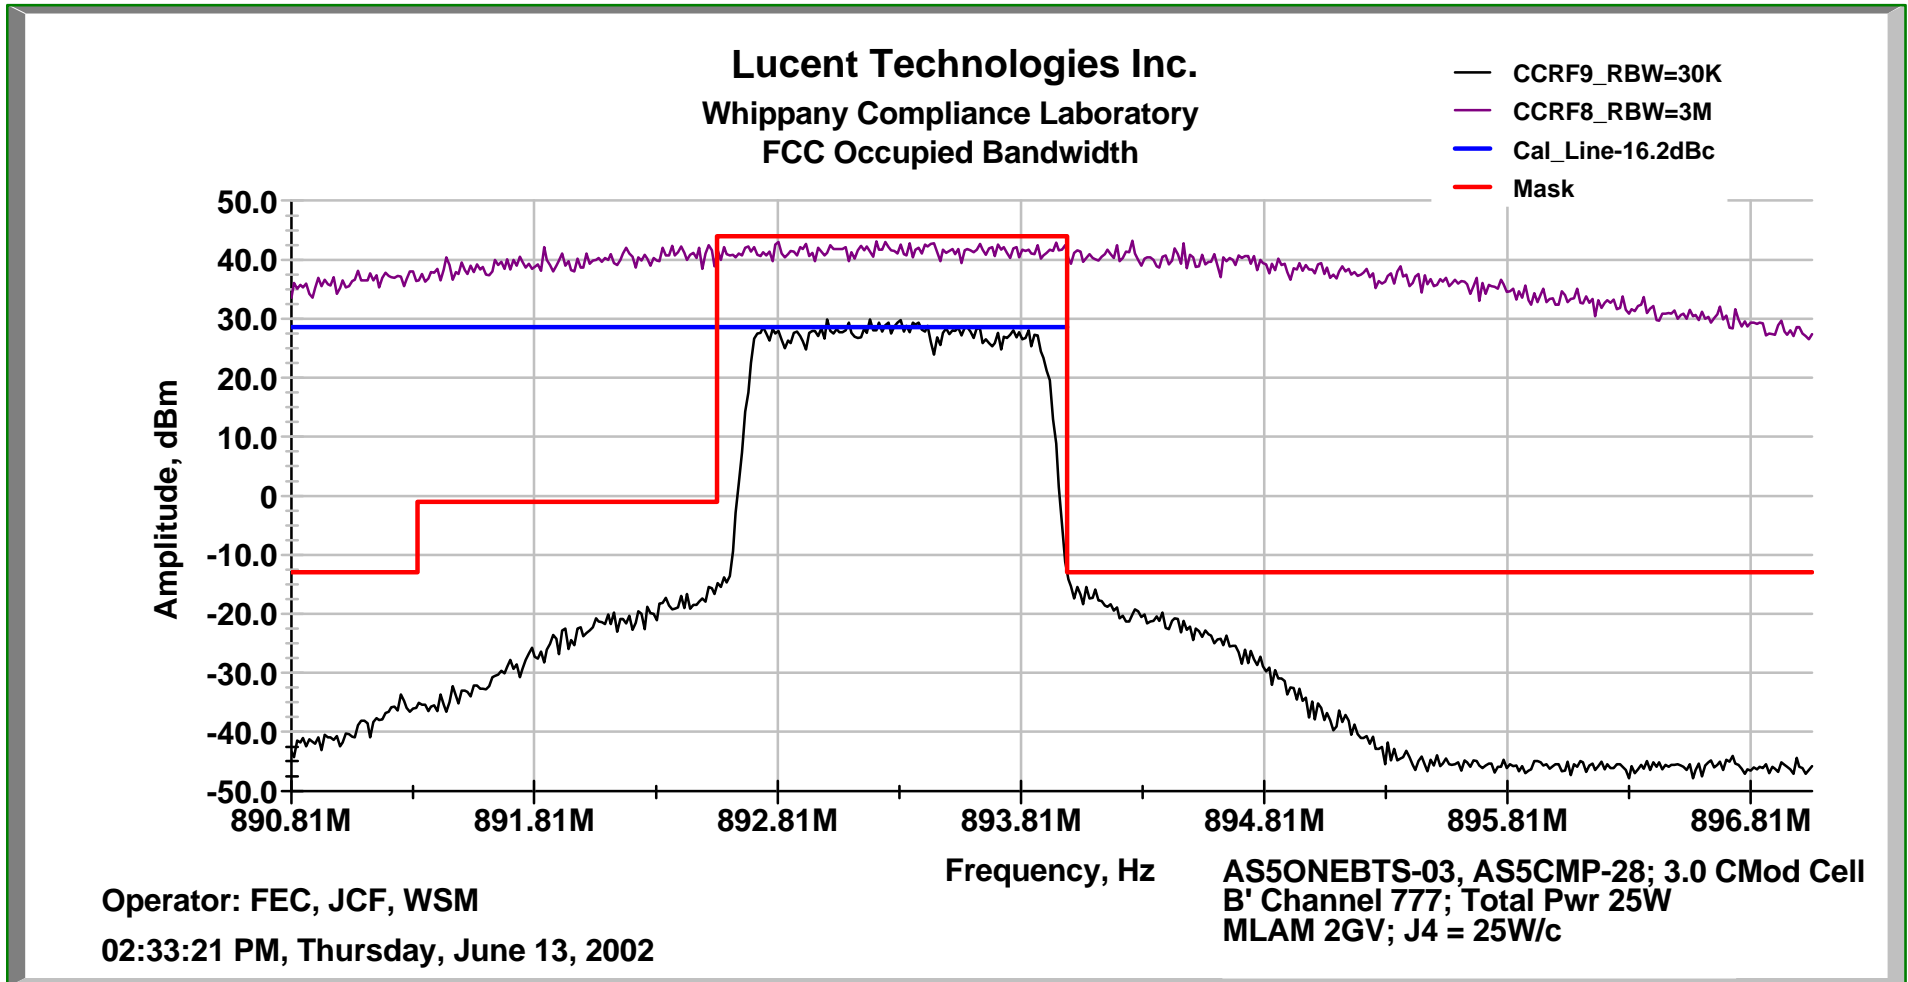


Exhibit 14 Continued

FCC Occupied Bandwidth: Output Chart – Sub-Block B' Channel 777 Edge of Band

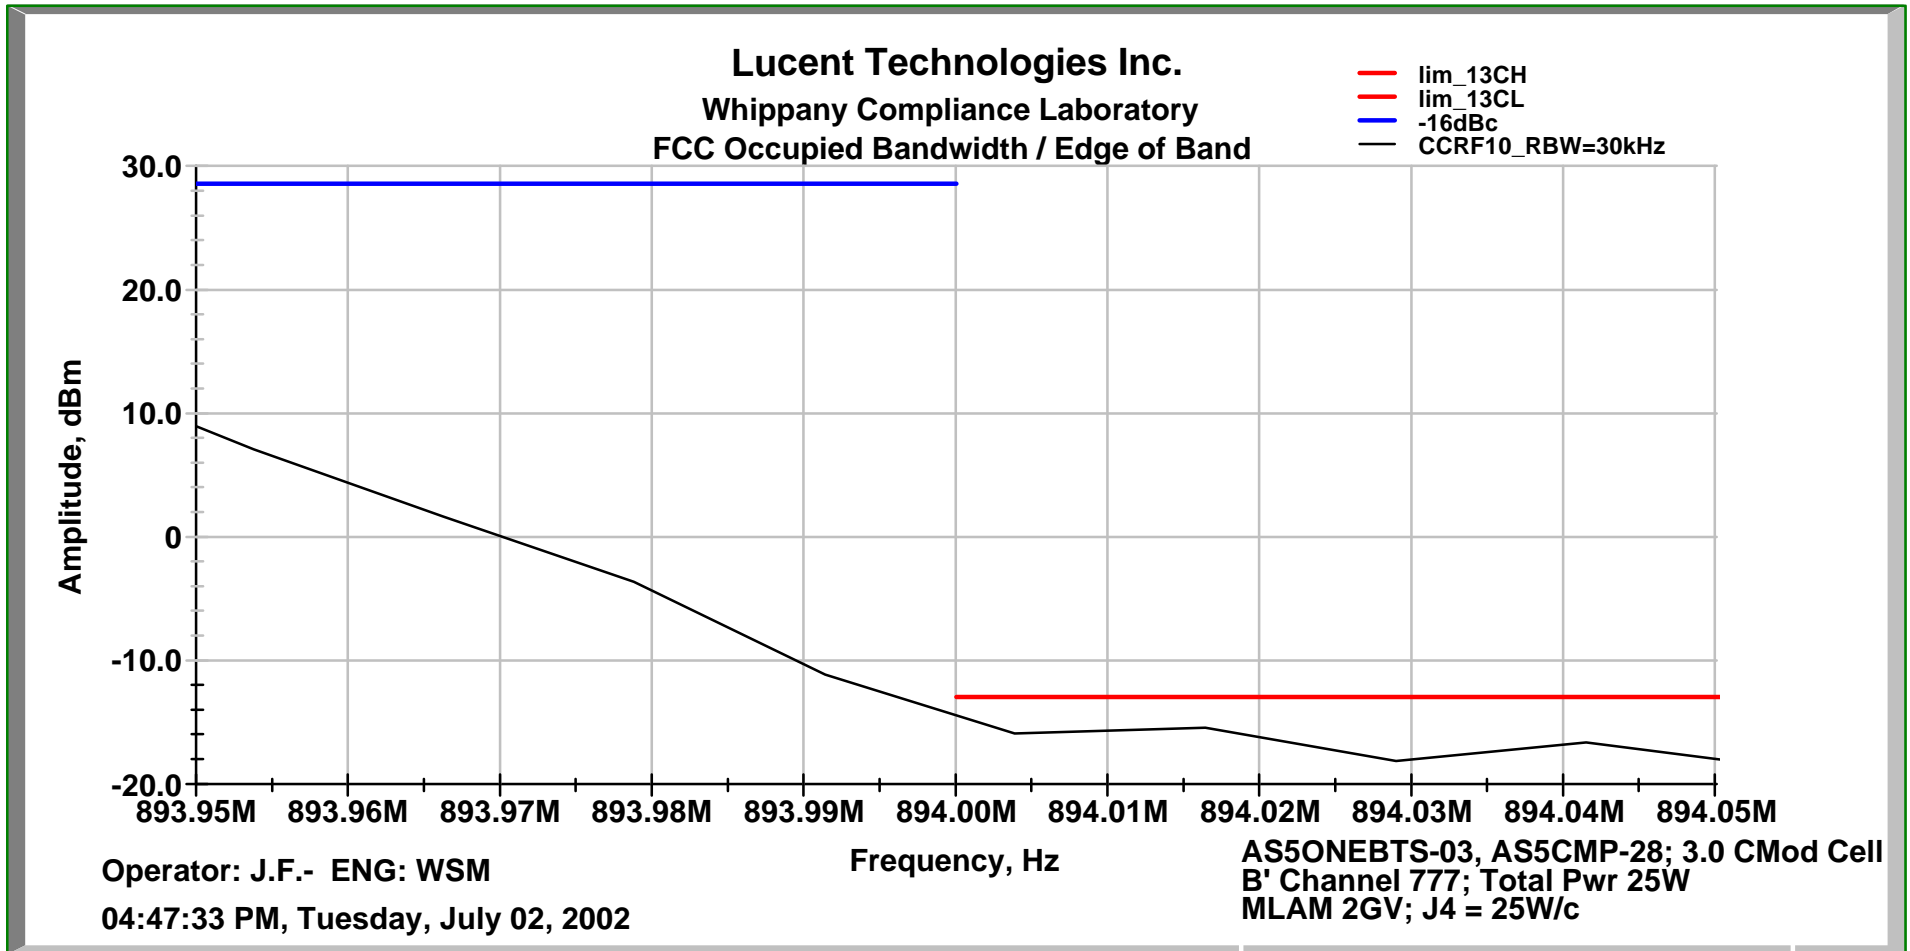


Exhibit 15: Measurement of Spurious Emissions at Antenna Terminals

Section 2.1051 Spurious Emissions at Antenna Terminals

Spurious Emissions at the antenna terminals were investigated over the frequency range of 10 MHz to beyond the 10th harmonic of the carrier frequency. The RF output from the transmitter was reduced (to an amplitude usable by the spectrum analyzer) by using an attenuator calibrated over the 10 MHz-10GHz range. The RF power level was measured during setup and monitored continuously during the test via the test setup in Figure 15A.

Measurements were made using a Rohde & Schwarz FSEM Spectrum Analyzer, a PC based computer test controller, specialized RF components and a TILE™ software program to acquire the test data. This system allows measurement and presentation of the data in an accurate and compact form for FCC review. The volume of collected data is greater than 2×10^6 data points over the frequency range of 10 MHz to 10 GHz.

The use of a High-Pass Carrier reject filter allows for rapid and accurate acquisition of CDMA broadband spurious without desensitization or spurious generation by the carrier in the front end of the spectrum analyzer. The high pass filter and the entire RF test setup is calibrated as a unit over the frequency range.

The required emission limitation specified in Section 22.917(H) of the Code was applied to these tests. Based upon the criterion given in Section 22.917(H) of the Code the required out of band emission limit is equal to -56.98 dBc or -13 dBm. The -13 dBm limit holds for all signals when measured with the specified 30 kHz resolution bandwidth. The measurements of the spurious signals on the attached charts in this section were made using a minimum resolution bandwidth of 30 kHz and a step size appropriate to acquire all spurious emissions. The carrier signal shown on these plots is the sum of measurements at resolution Bandwidths of 120 kHz and 1 MHz. This was done so that the carrier plot correctly and accurately depicts the carrier output power in relation to the spurious signals and the defined limit. There were no adjustments made to any signals for resolution bandwidth.

The measurements of the spurious signals close to the carrier can also be evaluated in the Occupied Bandwidth plots, which were made using a resolution bandwidth of 30 kHz. Harmonics of the CDMA Carrier must be shown to be lower than -13 dBm as specified in 47CFR 22.917(H). The measurement of narrow-band spurious signals, such as clocks, oscillators and other pure tone types of signals are unchanged by variation of the analyzers resolution bandwidth. Per 47CFR 22.917(H) the -13 dBm limit is therefore appropriate for all narrowband or broadband signals.

Exhibit 15:continued

The applied signal met the recommended characteristics per IS-97-D section 6.5.2 as defined below.

| Type | Number of Channels | Fraction of Power (Linear) | Fraction of Power (dB) | Comments |
|---------|--------------------|----------------------------|------------------------|--|
| Pilot | 1 | 0.2 | -7 | Code channel W_0^{128} |
| Sync | 1 | 0.0471 | -13.3 | Code channel W_{32}^{64} ; always 1/8 rate |
| Paging | 1 | 0.1882 | -7.3 | Code channel W_1^{64} ; full rate only |
| Traffic | 6 | 0.09412 | -10.3 | Variable code channel assignments; full rate only |

TABLE 15.1 Base Station Test Model, Nominal for Main Path

| Type | Number of Channels | Fraction of Power (Linear) | Fraction of Power (dB) | Comments |
|--------------------------|--------------------|----------------------------|------------------------|--|
| Transmit Diversity Pilot | 1 | 0.2 | -7 | Code channel W_{16}^{128} |
| Traffic | 6 | 0.09412 | -10.3 | Variable code channel assignments; full rate only |

TABLE 15.2 Base Station Test Model, Nominal for Transmit Diversity Path


Test Results Summary:

Measurements were performed while transmitting at the upper and lower channels in each cellular band tested. The attached spectral plots document the typical performance and shows that there are no emissions above the applicable limit of -13. dBm for harmonics and spurious. The attached data plots document the results for single, dual and three carrier **mLAM / MCA** test configurations. Conducted Spurious tests on the Receiver antenna terminal documented compliance with the **2 nW requirement of 47CFR Part 15 section 15.**

Exhibit 15 continued

Figure 12A/14A/15A Test Configuration For RF Power, Occupied Bandwidth and Conducted Spurious

Lucent FLEXENT® OneBTS
Cellular CDMA 3.0 MODULAR CELL

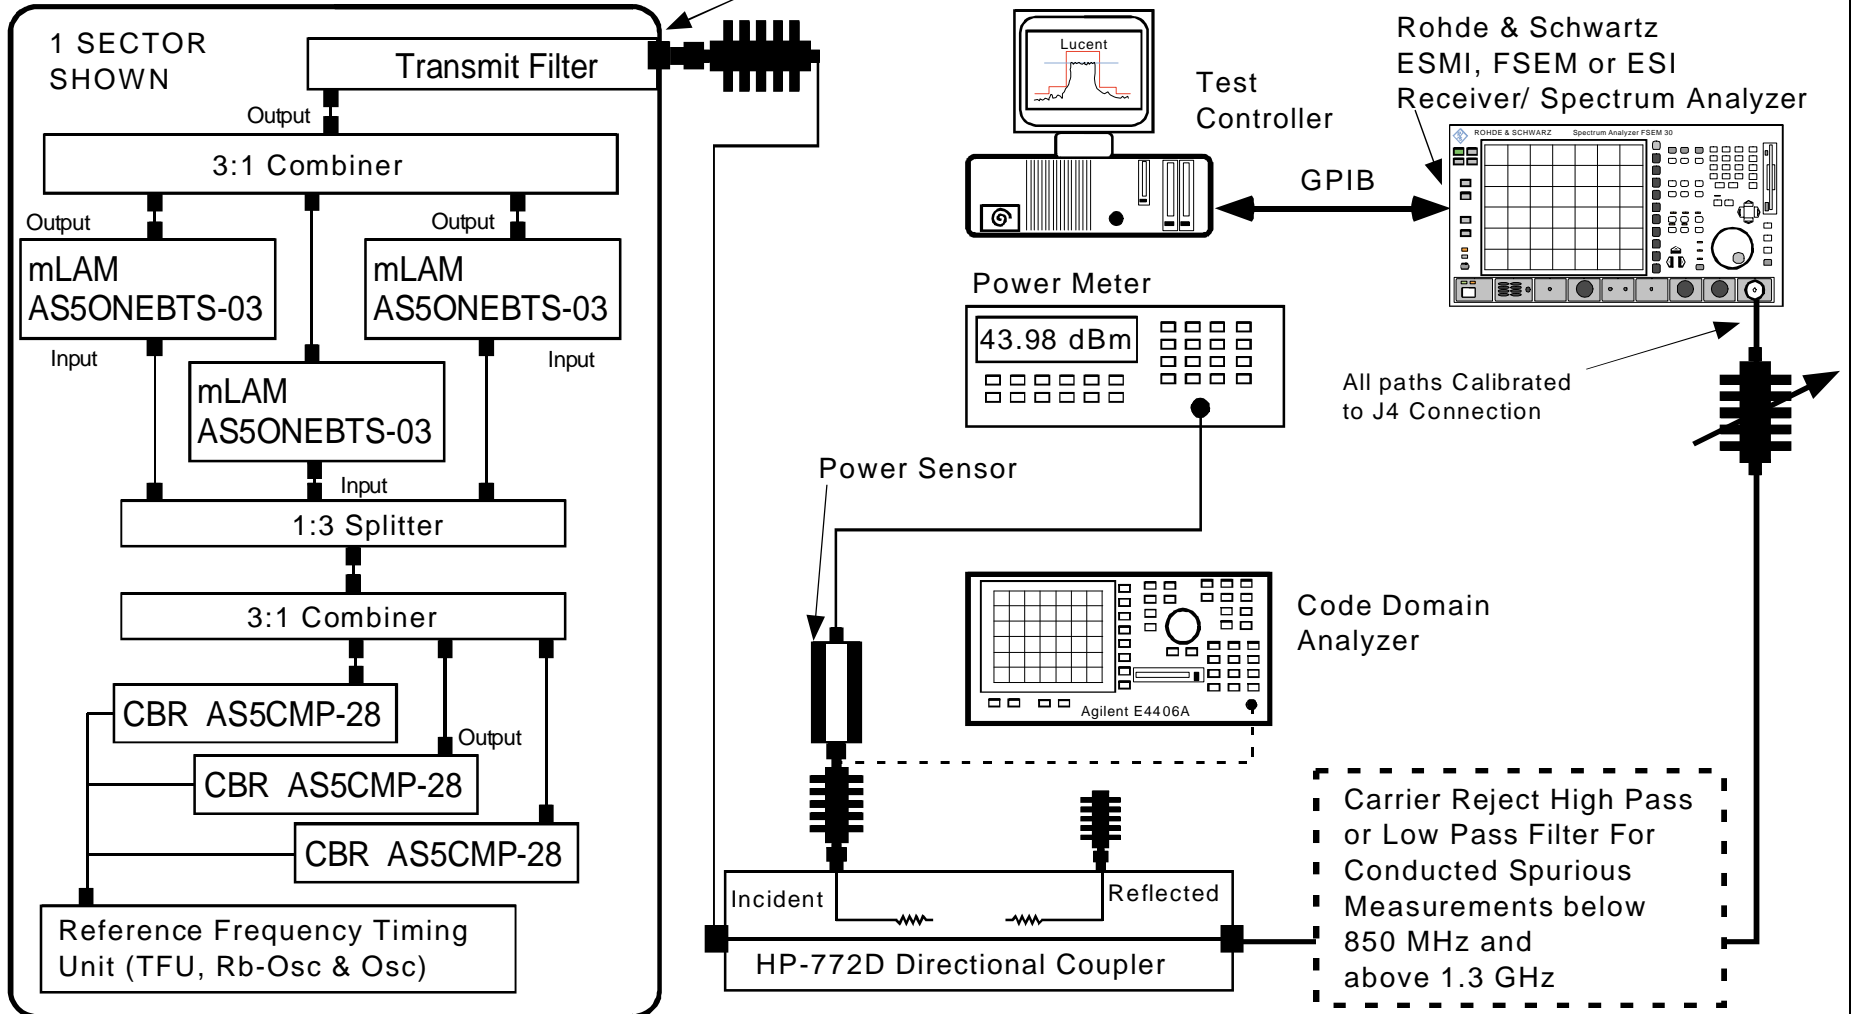

Cellular 850 3.0 Modular Cell mLAM Test Figure
WSM/DTD 7/05/02

Exhibit 15 *continued*

**FCC Conducted Spurious Data
for
Lucent Technologies Inc.
Cellular 850 ONEBTS Modular Cell 3.0
Incorporating
Cellular 850 Linear Amplifier Module Model m
mLAM
Filed under AS5ONEBTS-03**

**Single, Dual and Three Carrier
Multi Carrier Amplifier Configurations**

Exhibit 15 *continued*

Band A, Sub-Block A3, 1 Carrier Configuration 10 MHz -10GHz

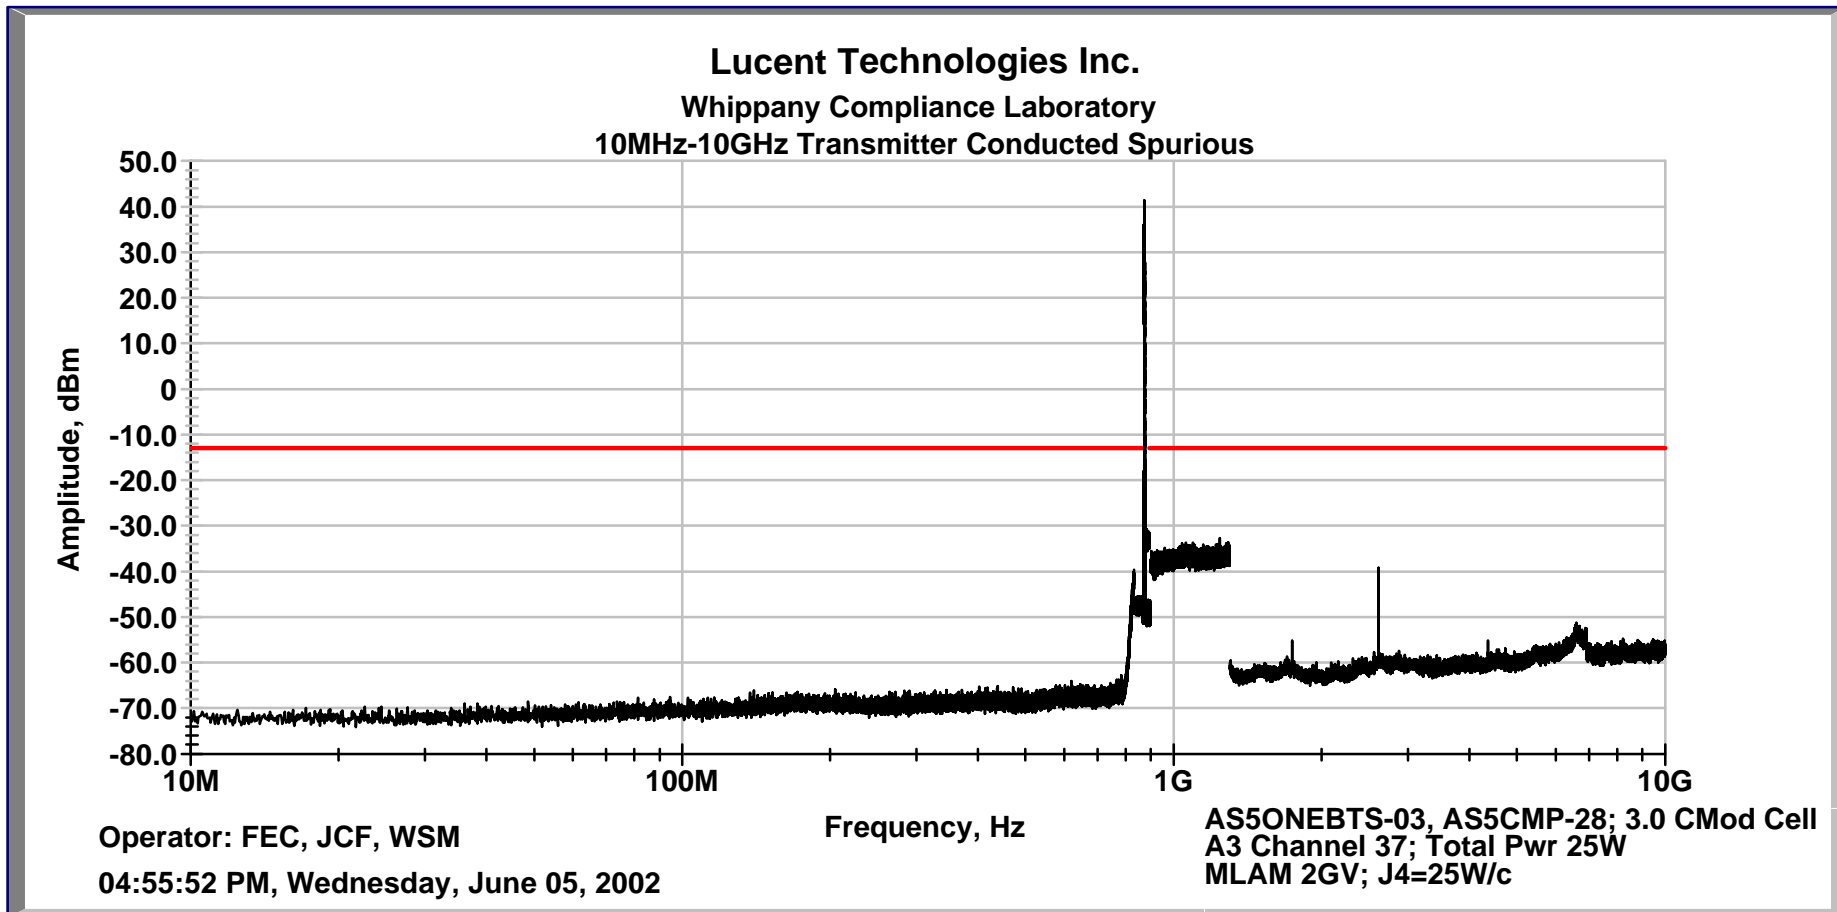


Exhibit 15 *continued*

Band A, Sub-Block A1, 1 Carrier Configuration 10 MHz -10GHz

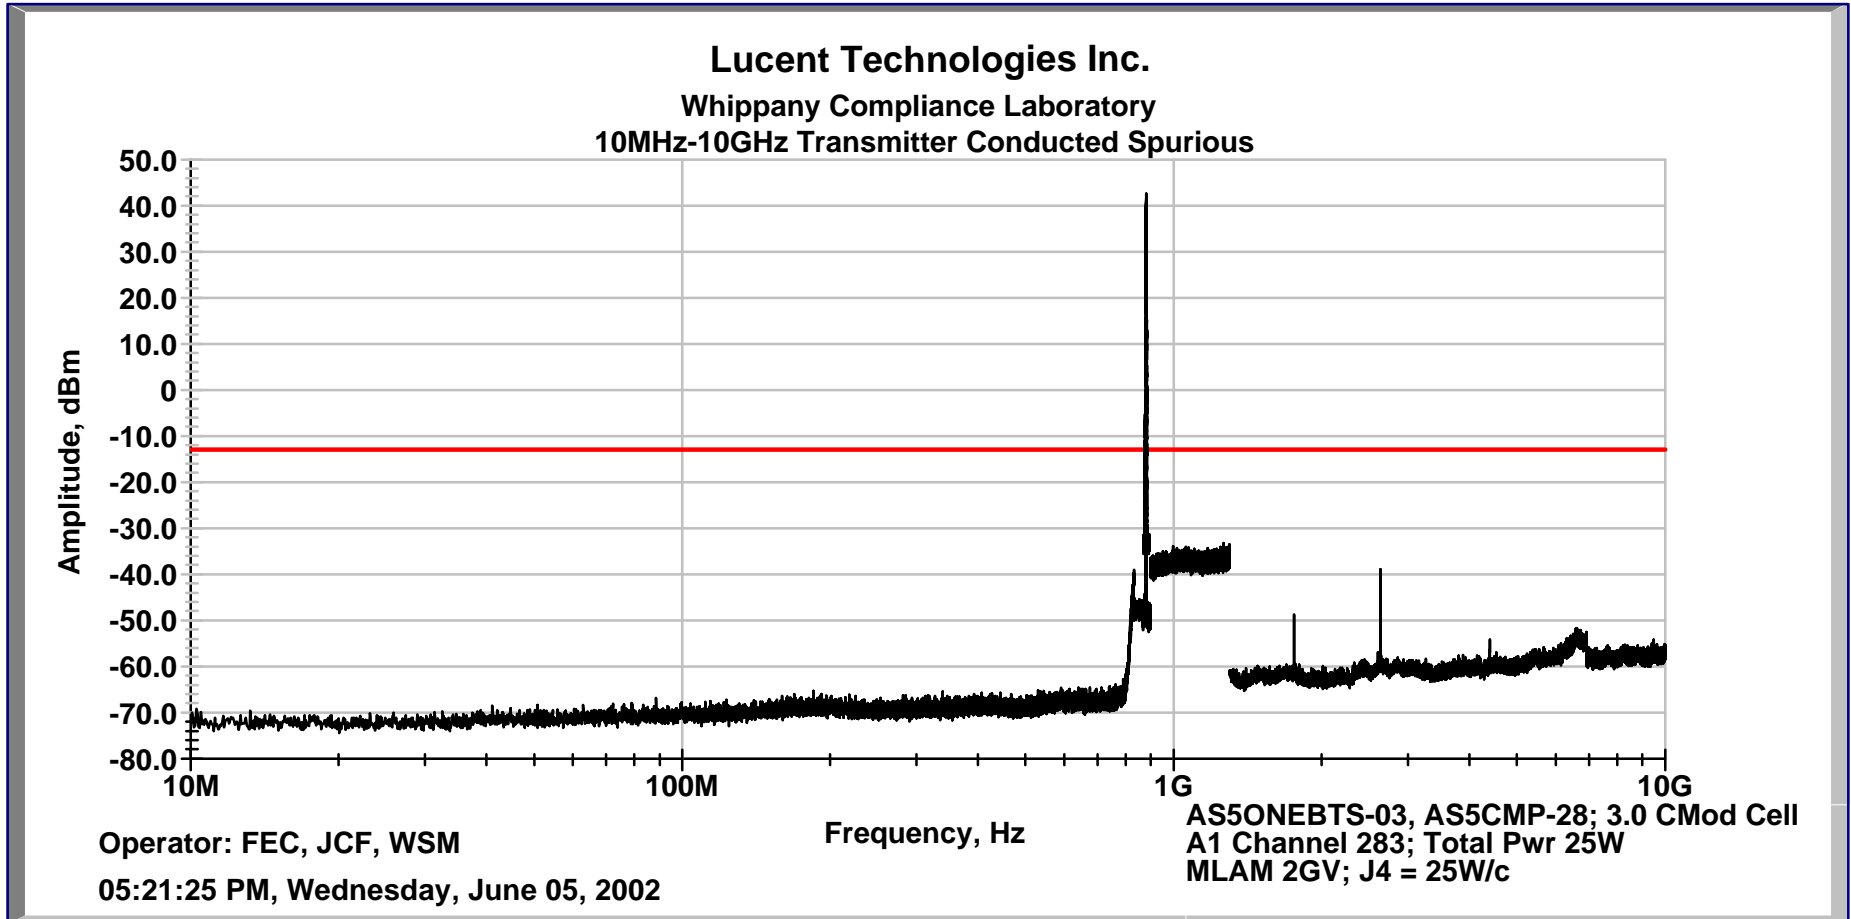


Exhibit 15 *continued*

Band A, Sub-Block A1, 2 Carrier Configuration 10 MHz -10GHz

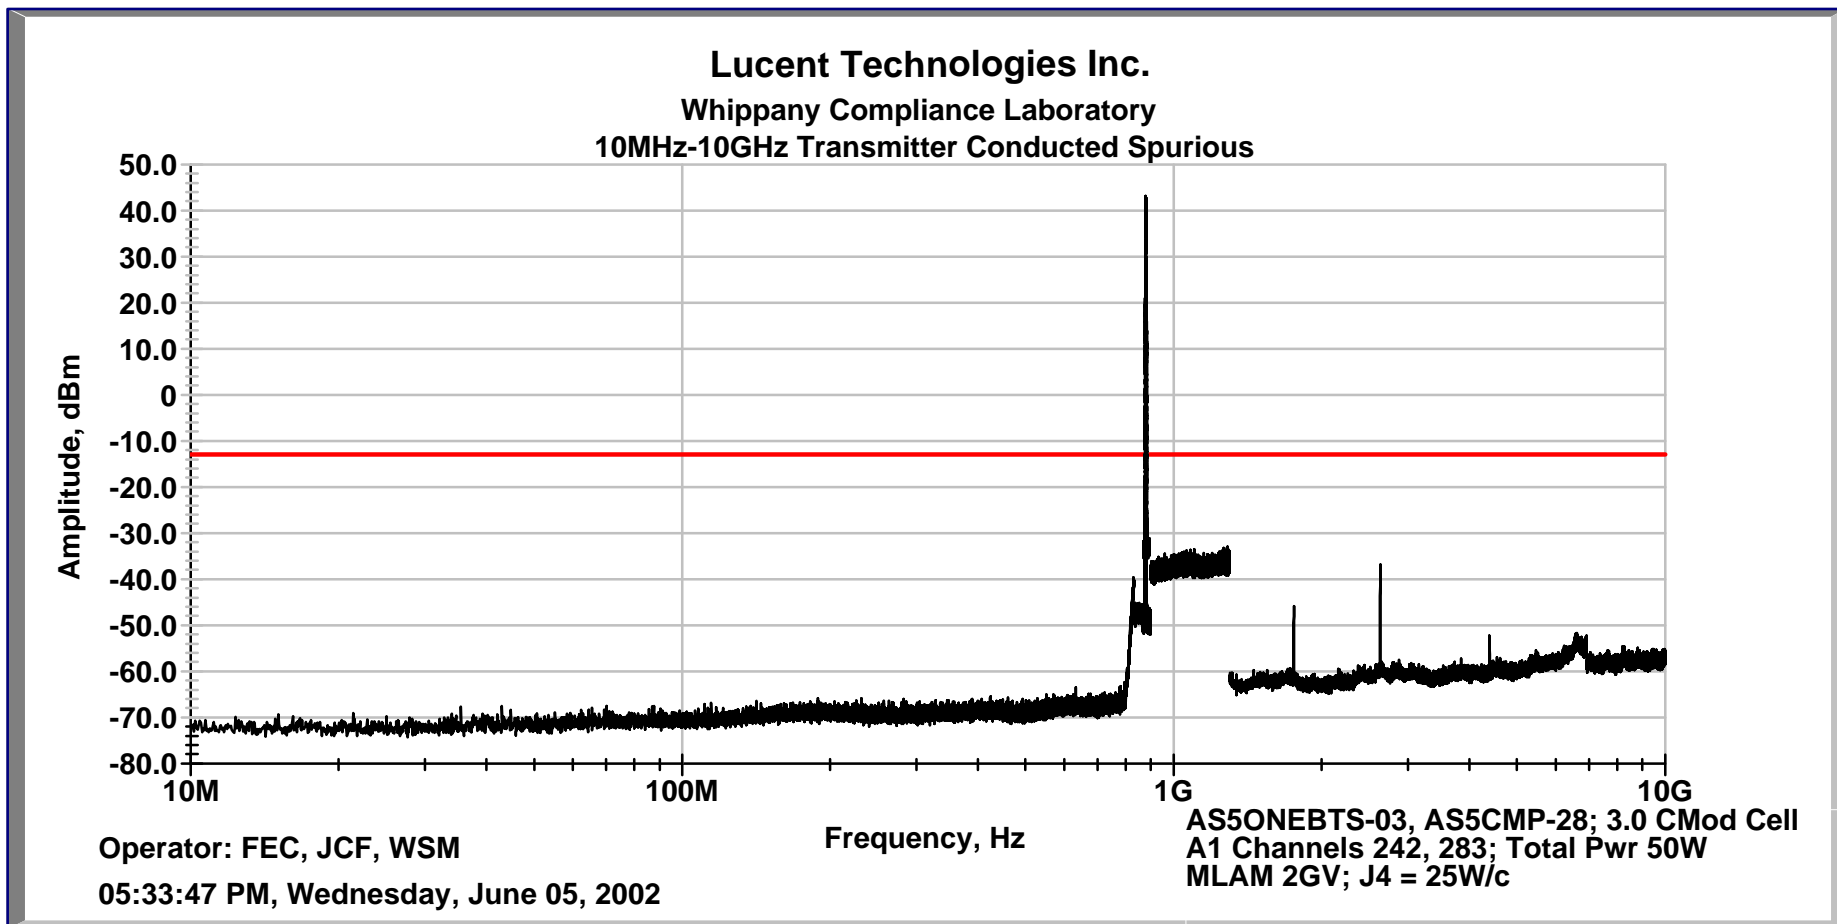


Exhibit 15 *continued*

Band A, Sub-Block A1, 3 Carrier Configuration 10 MHz -10GHz

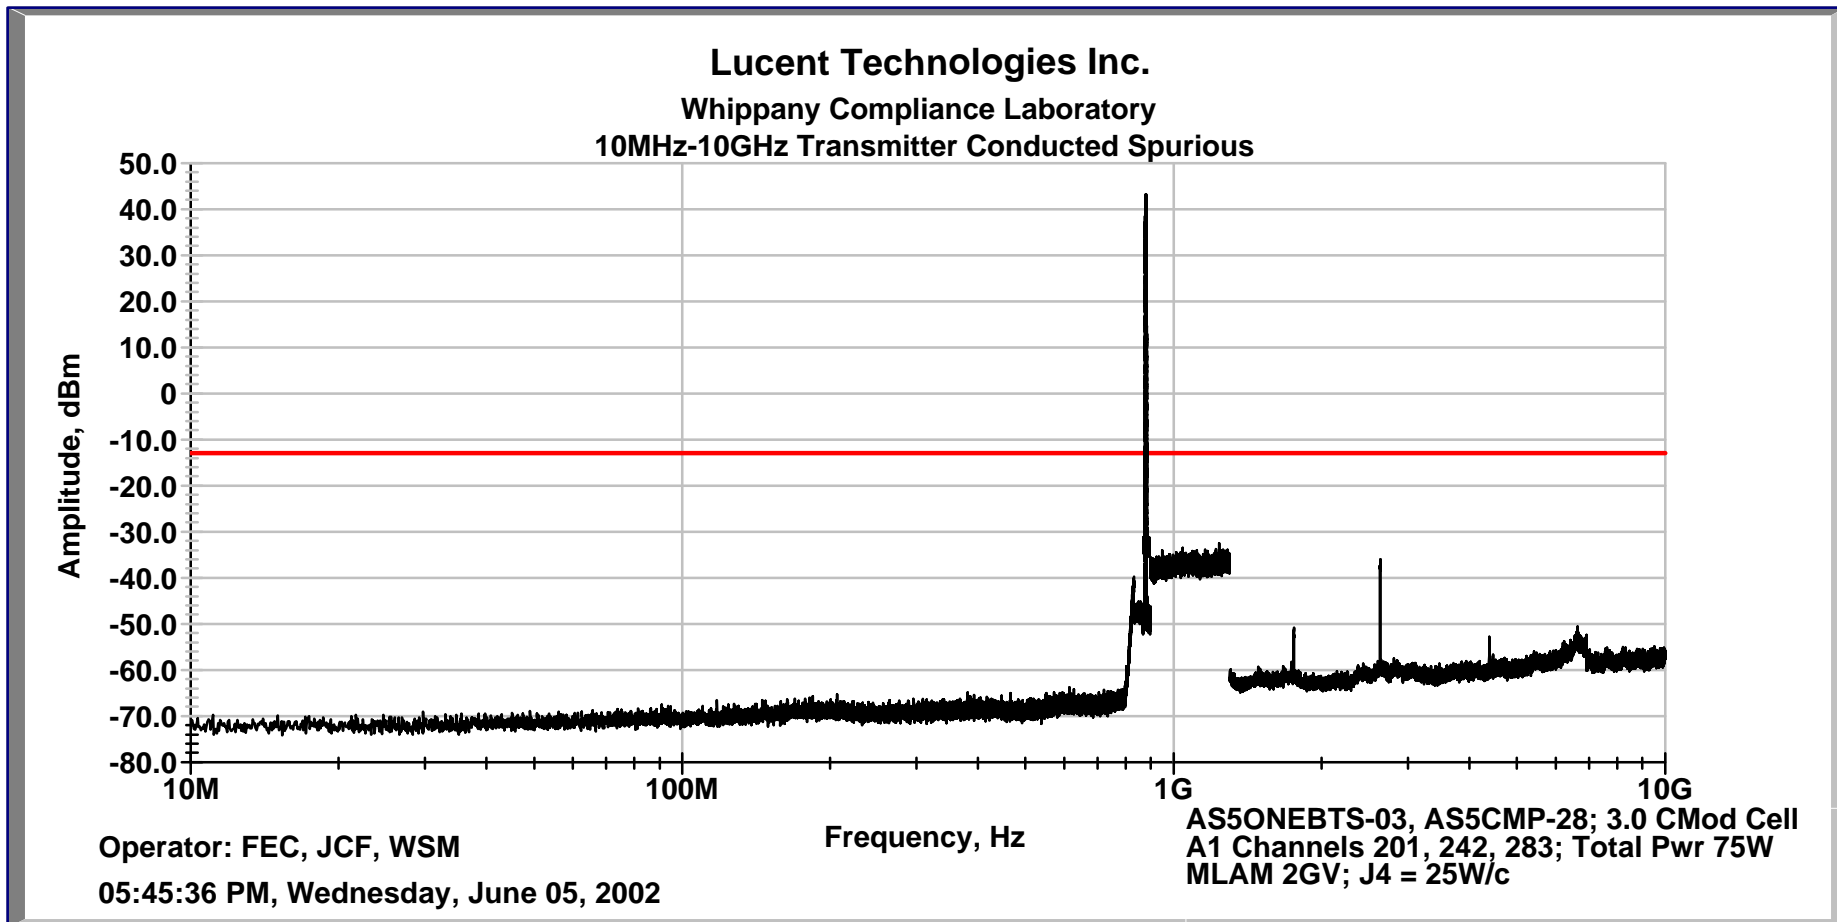


Exhibit 15 *continued*

Band B, Sub-Block B1, 1 Carrier Configuration 10 MHz -10GHz

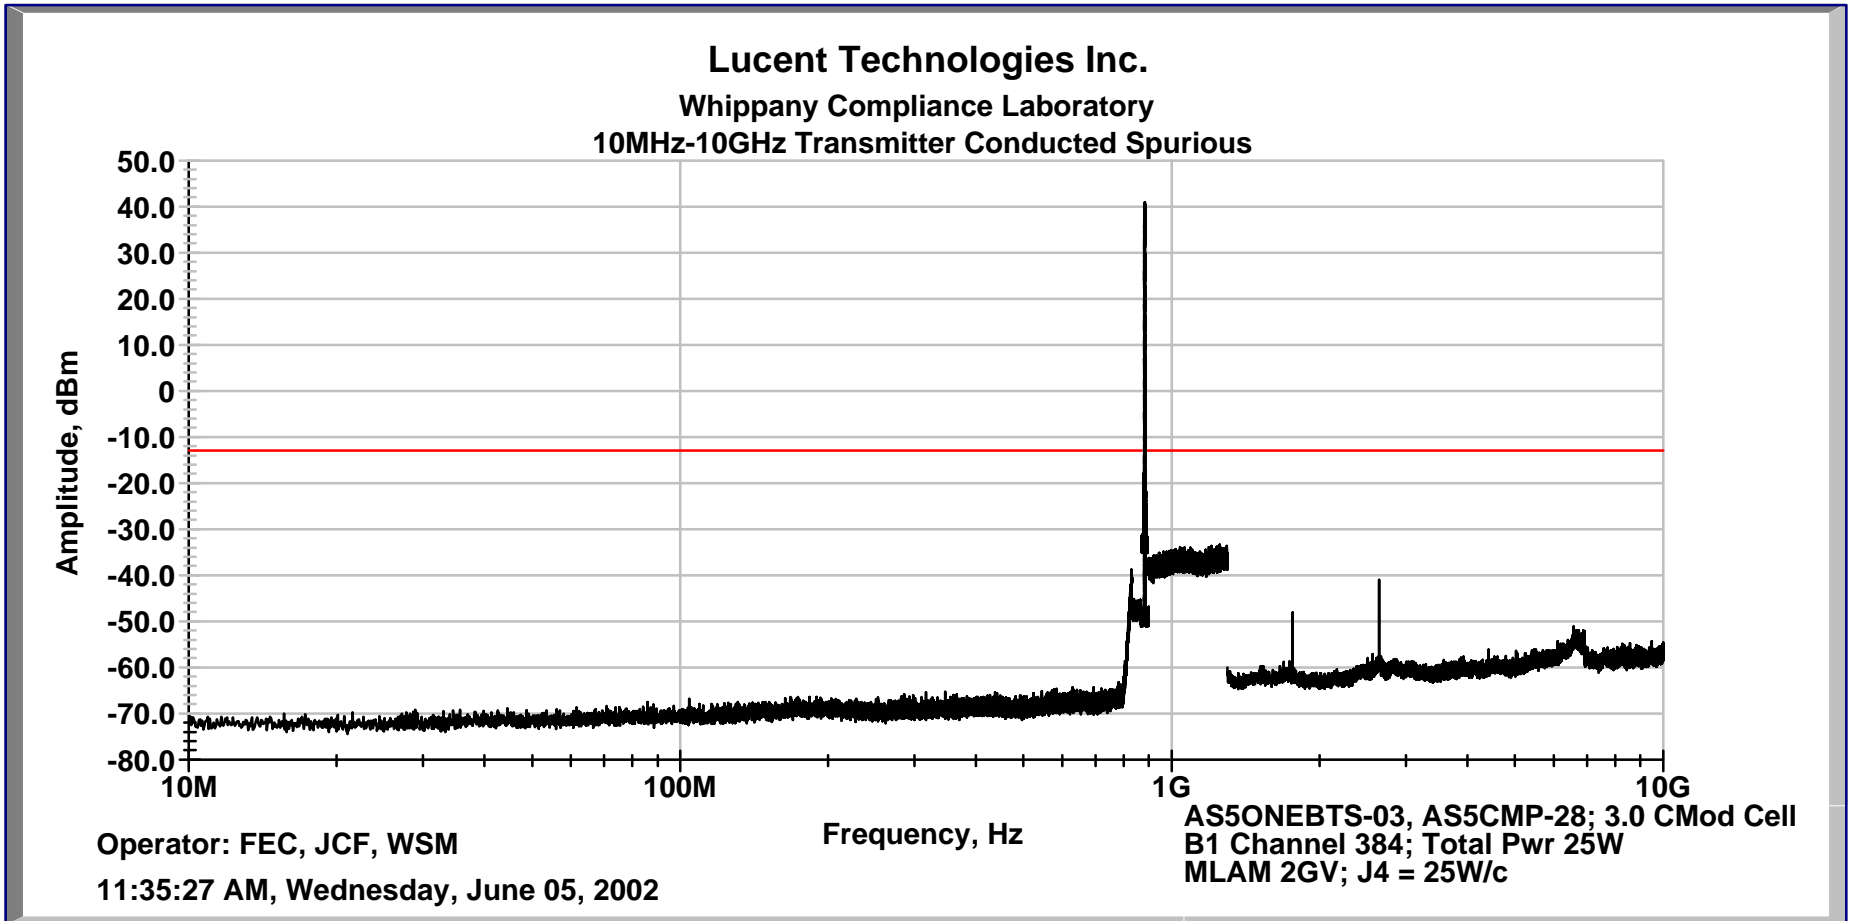


Exhibit 15 *continued*

Band B, Sub-Block B1, 2 Carrier Configuration 10 MHz -10GHz

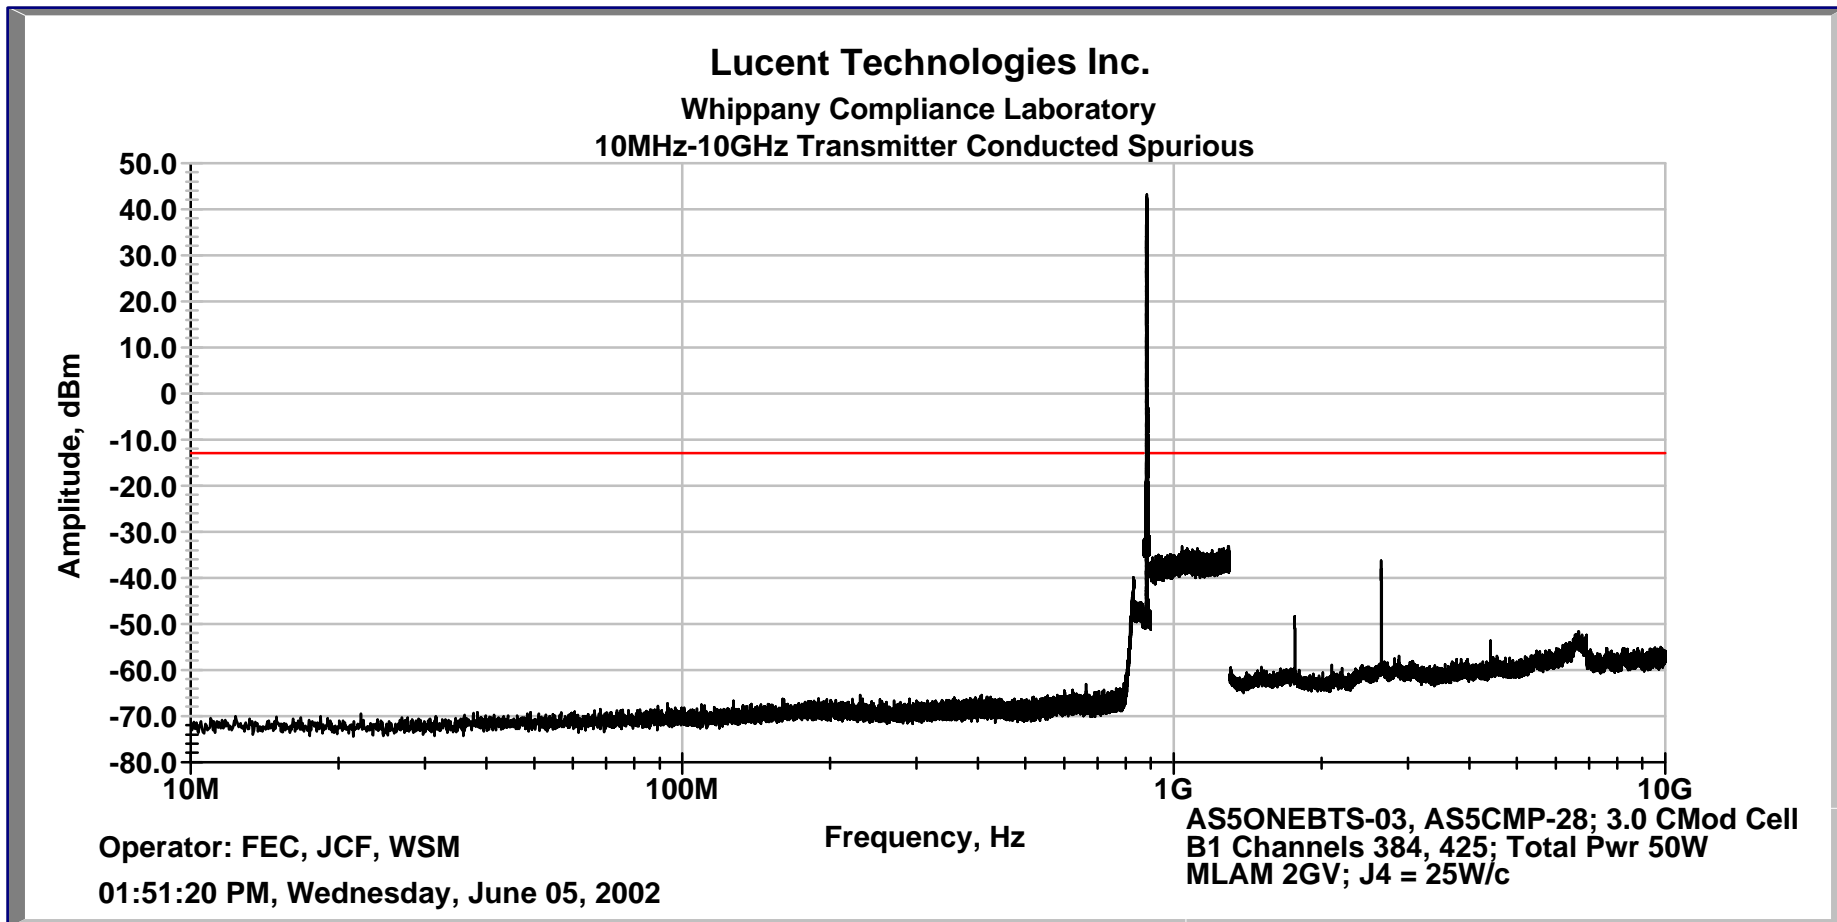


Exhibit 15 *continued*

Band B, Sub-Block B1, 3 Carrier Configuration 10 MHz -10GHz

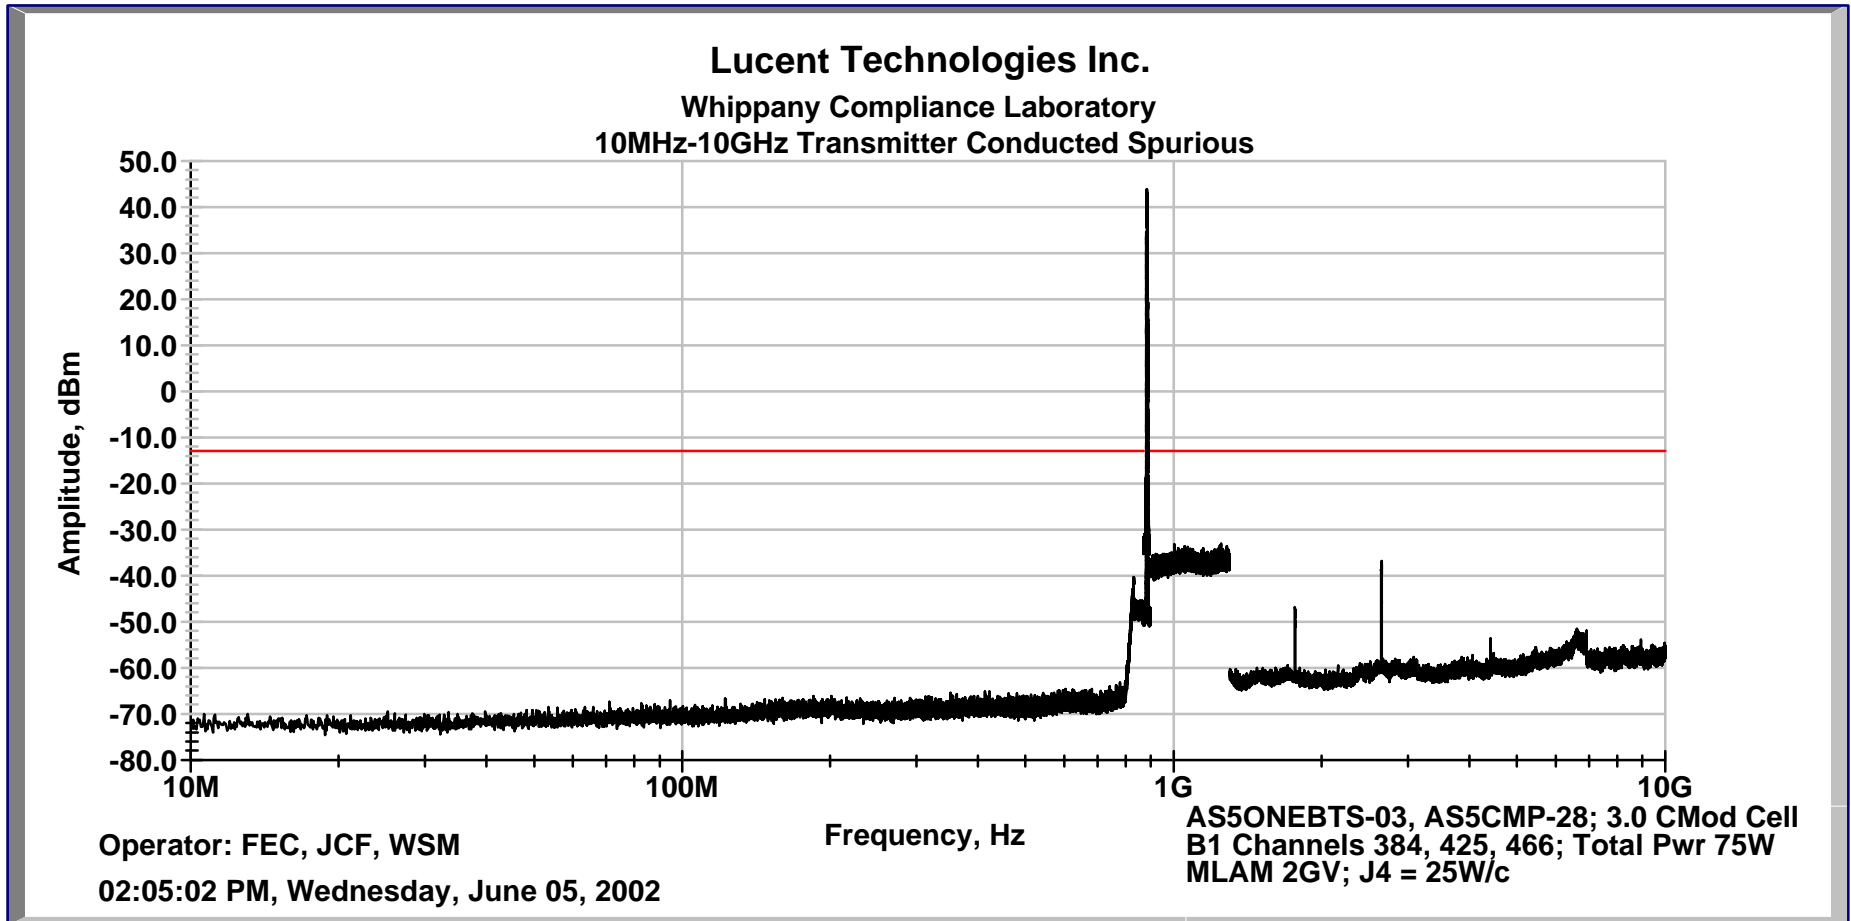


Exhibit 15 *continued*

Band B, Sub-Block B', 1 Carrier Configuration 10 MHz -10GHz

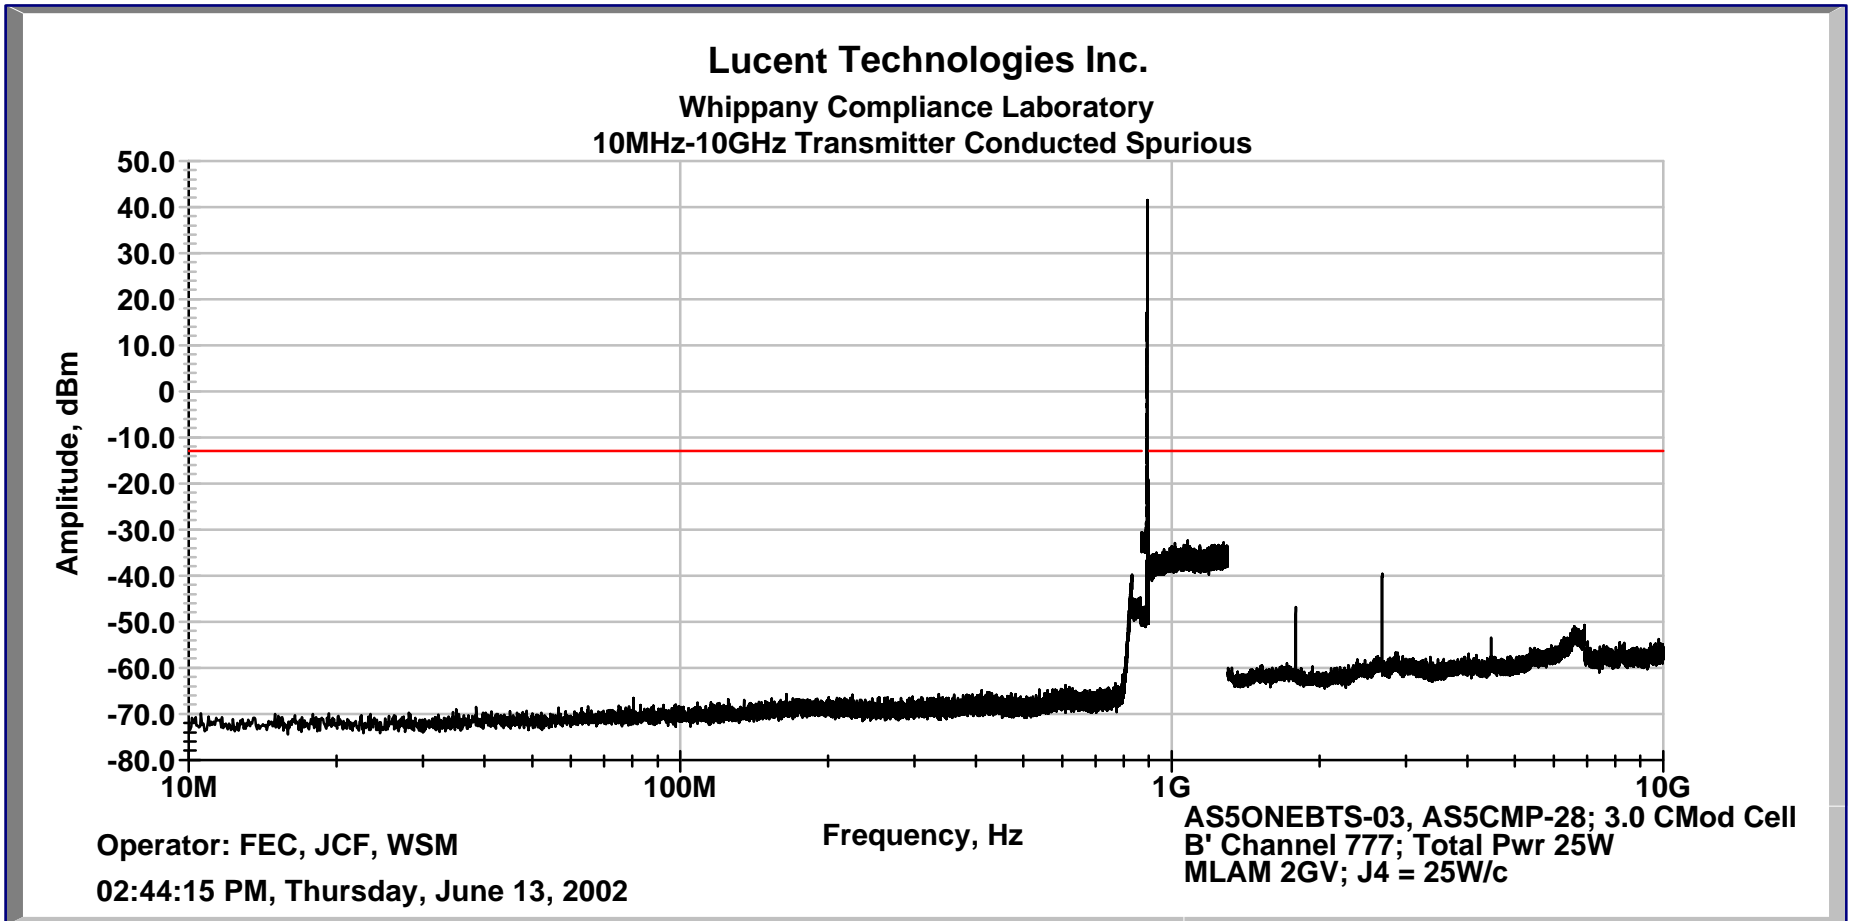


Exhibit 16: Measurement of Field Strength of Spurious Radiation

SECTION 2.1053 Measurement of Field Strength of Spurious Radiation

Field strength measurements of radiated spurious emissions were made at a ten meter test site (open field) and a 3 meter semi-Anechoic precompliance chamber maintained by Lucent Technologies Bell Laboratories Wireless Compliance Laboratory in Whippany, New Jersey. A complete description and full measurement data for the open air test site have been placed on file with the Commission.

A minimum of 9 BCR's were assembled with 9 **mLAM's** and all other associated equipment in a **FLEXENT** **® Cellular 850 Modular Cell 3.0**. The spectrum from 10 MHz to the tenth harmonic of the carrier (10 GHz) was searched for spurious radiation. Measurements were made using both horizontally and vertically polarized antennas. All emissions more than 20 dB below the specification limit are considered not reportable (Section 2.1053).

The calculated emission levels were found by:

$$P_{meas} \text{ (dBm)} + \text{Cable Loss(dB)} + \text{Antenna Factor(dB)} + 107 \text{ (dB}\mu\text{V/dBm)} - \text{Amplifier Gain (dB)} \\ = \text{Field Strength (dB}\mu\text{V/m)}$$

Section 22.917 and 2.1053 contains the requirements for the levels of spurious radiation as a function of the level of the unmodulated carrier. . The reference level for the unmodulated carrier is calculated as the field produced by an isotropic radiator excited by the transmitter output power according to the following relation taken from Reference Data for Radio Engineers, page 27-7, 6th edition, IT&T Corp.

$$P = P_t / 4\pi R^2 \quad \text{Watts/meter}^2$$

$$E = (120\pi P)^{1/2} = [(30 * P_t)^{1/2}] / R$$

$$20 \log (E * 10^6) - (43 + 10 \log P) = 71.77 \text{ dB } \mu\text{V/meter}$$

- Where:
- E = Field Intensity in Volts/ meter
 - P_t = Transmitted Power in watts = 25 W/ Carrier
 - P = Power density in Watts/meter²
 - R = Distance in meters = 10 m

RESULTS:

For this particular test, the field strength of any spurious radiation is required to be less than 71.8 dBμV/meter. Reportable measurements are equal to or greater than 51.8 dB μV/meter. Outside the transmit band of 869-894 MHz and over the spectrum investigated, 10 MHz to tenth harmonic of the carrier, no reportable spurious emissions were detected. This demonstrates that the Linear Amplifier Module/ Multi Carrier Amplifier (**mLAM/ MCA**), the subject of this application, complies with Sections 2.1053, 24.238 and 2.1057 of the Rules.

Additional testing to 47CFR Part 15 documented compliance with the Class B requirements.

Exhibit 17 Measurement of Frequency Stability

SECTION 2.995 Measurement of Frequency Stability

The frequency stabilization and accuracy of the CDMA signal amplified by the **mLAM** is a function of the input signal which it is provided from the **CBR (FCC ID: AS5CMP-28)**. The Time Frequency Unit (**TFU**) provides the time and frequency reference used by the **CBR (FCC ID: AS5CMP-26)**. The **TFU** is highly accurate time and frequency unit which relies upon a signal lock of GPS satellite signals to provide the primary discipline of system timing. In the event of loss of GPS lock the Rubidium Reference Oscillator (**Rb-Osc**) or the Crystal Oscillator Module (**OM**) can provides up to eight hours of freewheel operation. The system provides for automatic timing synchronization upon reacquisition of GPS lock. The system is powered by an AC-DC power converter with battery backup to provide immunity to power fluctuations and failures.

This system exceeds the frequency stability requirements necessary for **FLEXENT®** system compliance with FCC Rules for frequency stability. The **CBR's** are compliant with **FCC Part 2 and 22 rules** when powered by and installed in a Lucent Technologies Inc. **FLEXENT®** Modular Cell.

The following frequency stability test data for the **TFU, CBR, Rb-Osc** and **OM** was measured as installed and tested in a **FLEXENT® Modular Cell**. The entire **Modular Cell** was subjected to the **FCC** specified environments while operating at full rated power. Both carrier center frequency and reference oscillator deviations were measured.

Results:

The frequency stability performance for the integrated **CBR/FCC ID: AS5CMP-28** and the **mLAM/FCC ID: AS5ONEBTS-03** is as presented in the was presented in the original filing of the **CBR/FCC ID: AS5CMP-28** and has not changed.