




FIELD STRENGTH OF SPURIOUS RADIATION Plots -1 to 2.5 GHz

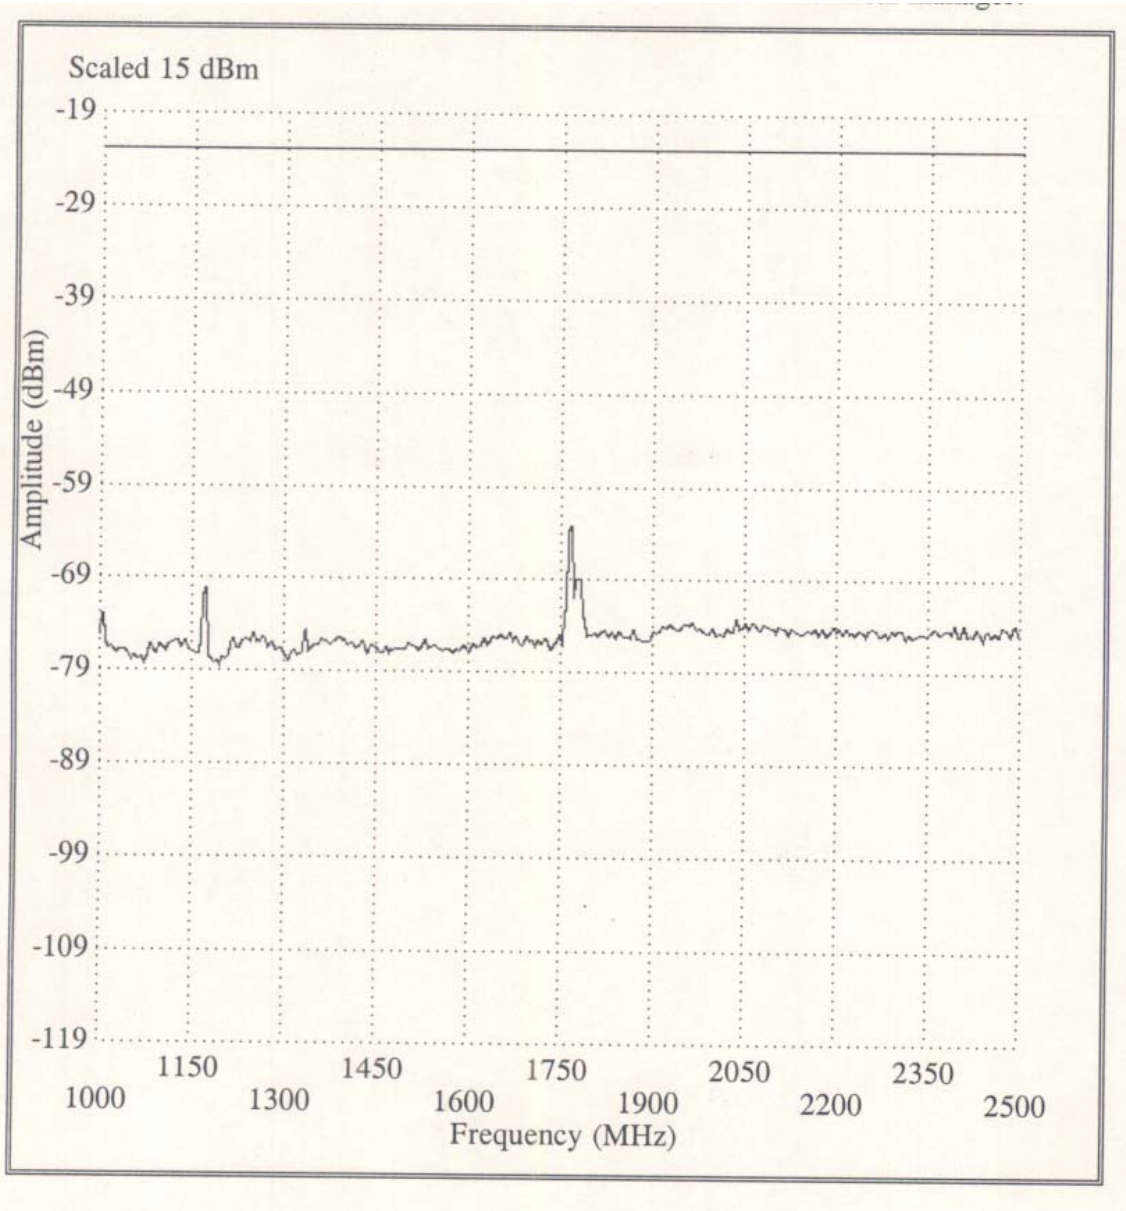

FIELD STRENGTH OF SPURIOUS RADIATION Plots – 2.5 to 5 GHz

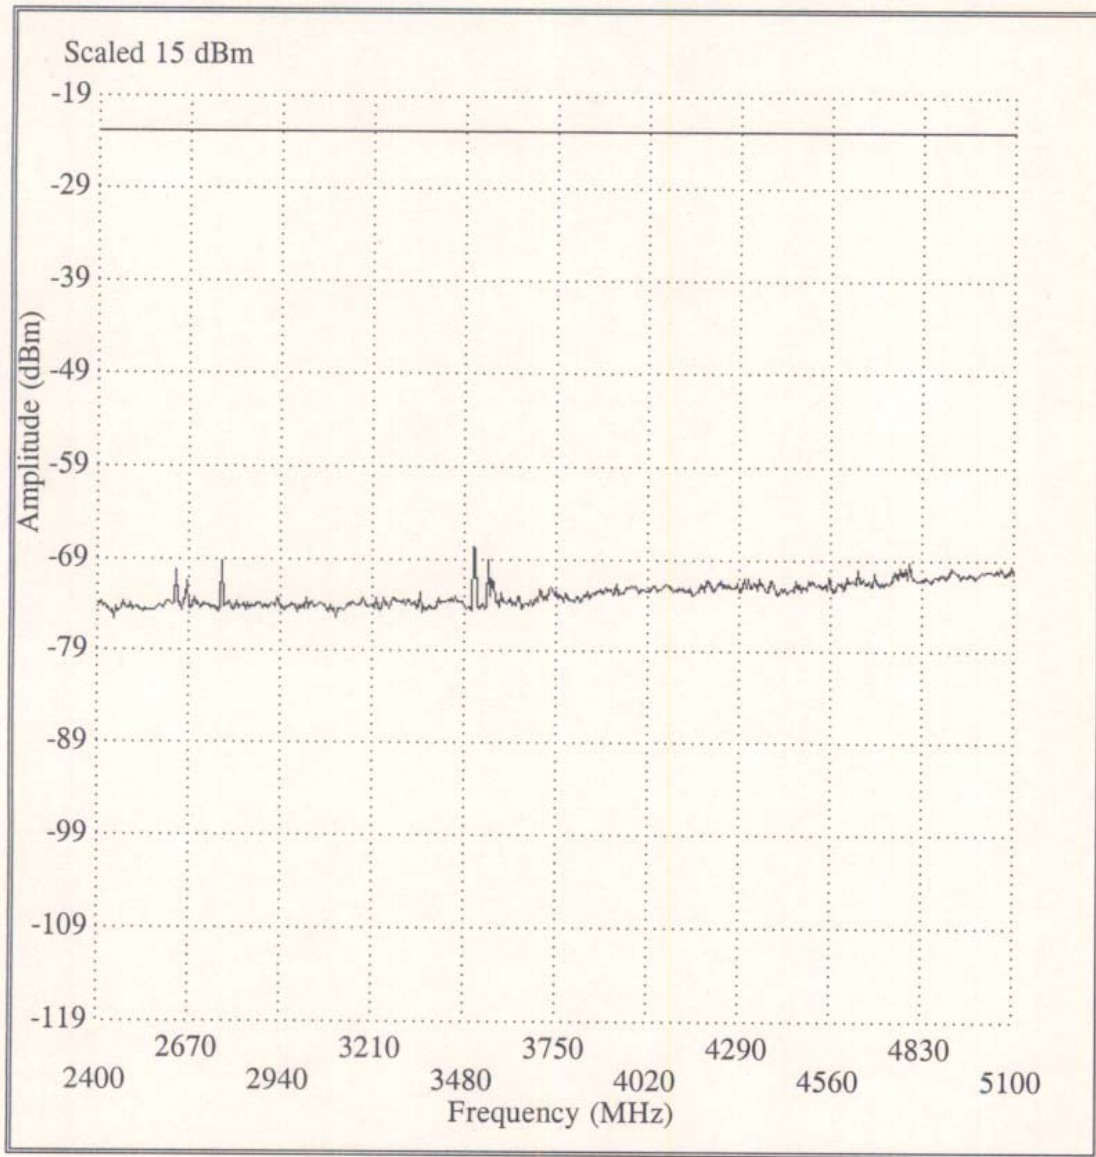

FIELD STRENGTH OF SPURIOUS RADIATION Plots -5 to 10 GHz

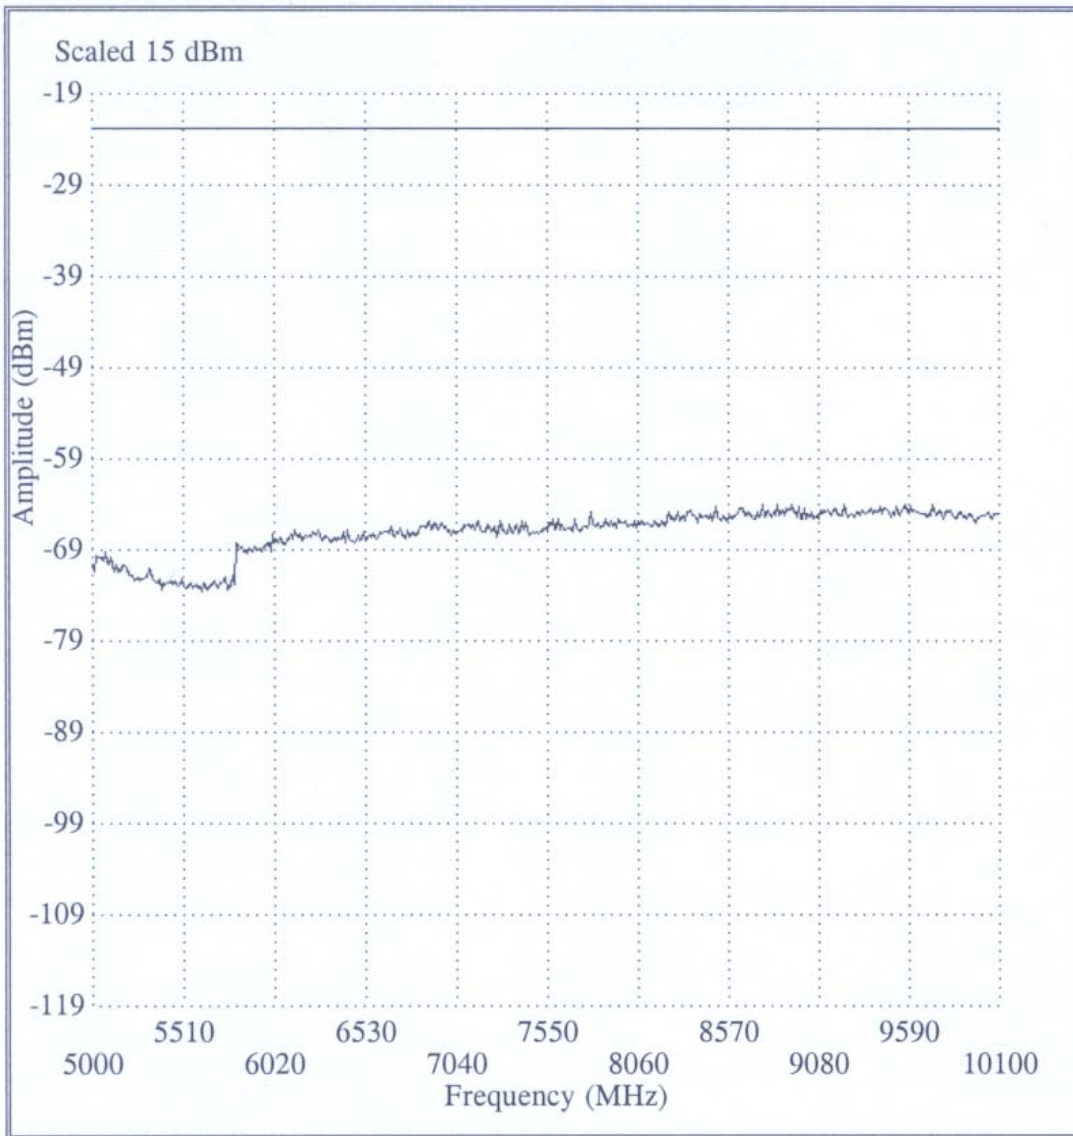

Section 2.1055 MEASUREMENT REQUIRED: FREQUENCY STABILITY

The output frequency of the AS5ONEBTS-11 UMTS CDMA transceiver is determined by the internal transmit synthesizer and the external OM. The 15 MHz output frequency of OM is disciplined by the CTU using proprietary phase lock loop (PLL) software and GPS reference.

The stability of the AS5ONEBTS-11 UMTS CDMA transceiver output frequency was measured at the transmit port end antenna connector (EAC) from $-40\text{ }^{\circ}\text{C}$ to $+50\text{ }^{\circ}\text{C}$ in $10\text{ }^{\circ}\text{C}$ steps and with a variation of primary supply voltage from 85% to 115% of the nominal value per Section 2.1055. The nominal supply voltage is +24 VDC. The 85% of 24 VDC is 20.4 V and 115% is 27.6 V. The frequency was measured at the radio output every 30 seconds at each temperature and each supply voltage. Seven data were collected at each temperature and each supply voltage.

At each temperature and each supply voltage, the AS5ONEBTS-11 UMTS CDMA transceiver was given sufficient time for its thermal stabilization. The primary OM was used for providing 15MHz reference frequency to the CTU. The temperature was recorded during the testing to ensure that the thermal stability was achieved at each temperature prior to frequency measurement.

The minimum requirement specified for CDMA Cellular transmitter is ± 1.50 ppm (i.e. maximum frequency error of 1341 Hz). TIA/EIA specifies the minimum requirement is ± 0.050 ppm (i.e. maximum frequency error of 44 Hz).

The maximum measured frequency derivations (Δf) at each temperature and supply voltage are summarized in the following table.

Results for cdma2000 (3G-1x)

Stabilized Temp. ($^{\circ}\text{C}$)	Δf 85% V_{norm} (Hz)	Δf 100% V_{norm} (Hz)	Δf 115% V_{norm} (Hz)
-40	2.656	1.278	1.342
-30	1.235	1.839	1.081
-20	2.459	1.237	1.042
-10	0.766	0.956	3.470
0	1.698	1.254	1.184
+10	1.336	1.776	0.947
+20	2.026	1.941	3.092
+30	2.440	1.340	0.623
+40	1.087	2.335	2.339
+50	1.617	2.146	0.821

Results for IS-856 (1xEV)


Stabilized Temp. ($^{\circ}\text{C}$)	Δf 85% V_{norm} (Hz)	Δf 100% V_{norm} (Hz)	Δf 115% V_{norm} (Hz)
-40	0.81	0.87	2.25
-30	0.67	1.49	3.09
-20	1.05	1.80	1.55
-10	1.19	0.97	0.86
0	1.57	1.54	2.19
+10	2.26	2.28	3.20
+20	1.01	2.20	1.79
+30	1.39	1.67	1.41
+40	0.87	1.23	1.18
+50	2.97	1.48	2.54

All the measurement equipment was calibrated in accordance with ISO 9001 process. The EUT configuration diagram is given in the following.

Results:

The AS5ONEBTS-11 UMTS CDMA transceiver demonstrates full compliance with the Rules of the Commission.

SET-UP FOR MEASUREMENT OF FREQUENCY STABILITY

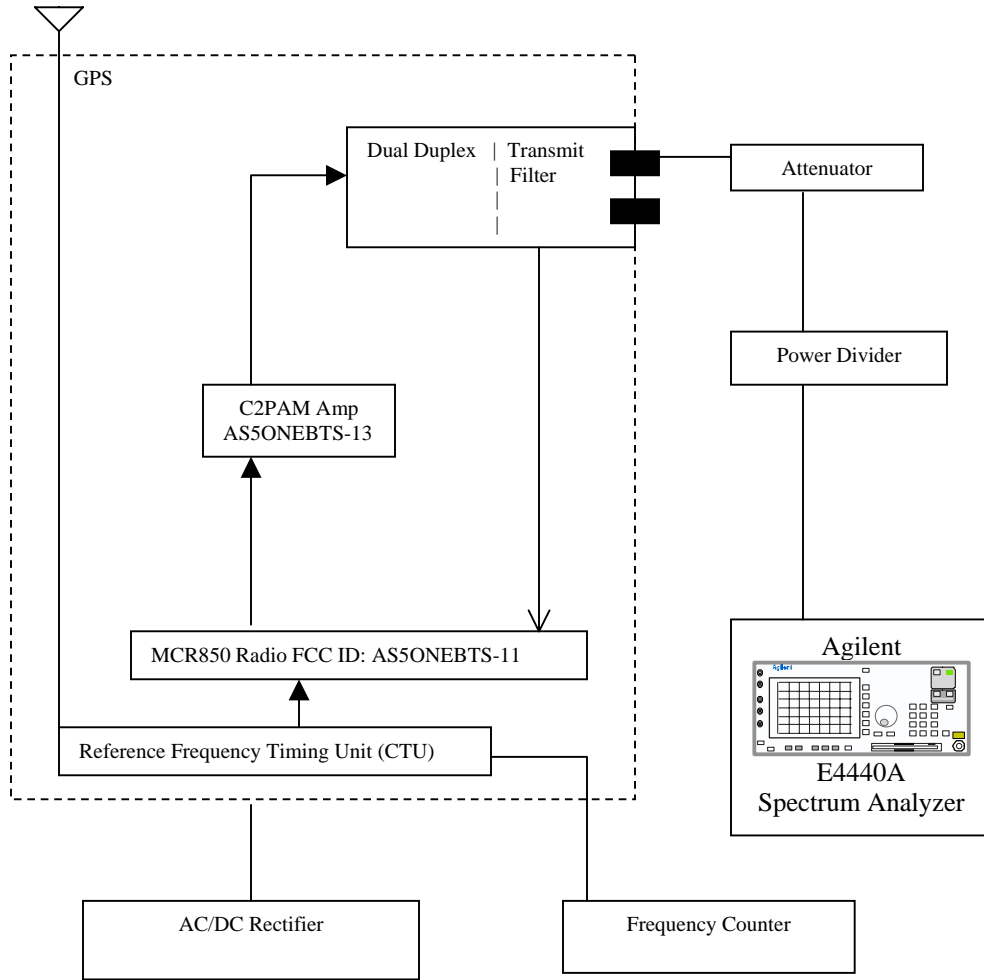

SUBEXHIBIT 11.6**Section 2.947 LISTING OF TEST EQUIPMENT USED**

Equipment	Manufacturer	Model	Serial No.	Calibrated Date	Due Cal. Date
1.5 GHz Filter	Agilent		84300-80037	N/A	N/A
3.5 GHz Filter	Agilent		84300-80038	N/A	N/A
8.2 GHz Filter	Agilent		84300-80039	N/A	N/A
Spectrum Analyzer	Agilent	E4440A	US42221614	10/20/06	10/20/07
Coaxial Resistor	Bird	8201	4252	N/A	N/A
Coaxial Resistor	Bird	8329	204506	N/A	N/A
Coaxial Resistor	Bird	8890-300	2289	N/A	N/A
Antenna Positioning System	EMCO	1051	1321	N/A	N/A
Bore Sight Antenna Mast	EMCO	2071-2	2239	N/A	N/A
Antenna Mast	EMCO	2075-2	2388	N/A	N/A
Biconical Antenna	EMCO	3110B	3127	5/16/06	5/16/07
Biconical Antenna	EMCO	3110B	3128	5/16/06	5/16/07
Horn Antenna	EMCO	3115	3324	6/20/06	6/20/07
Horn Antenna	EMCO	3115	5638	6/8/06	6/8/07
Log Periodic Antenna	EMCO	3148	1030	6/12/06	6/12/07
Log Periodic Antenna	EMCO	3148	1029	6/12/06	6/12/07
Active Rod Antenna	EMCO	3301B	9312-3477	7/21/06	7/21/07
Active Loop Antenna	EMCO	6502	3441	7/15/06	7/16/06
Active Loop Antenna	EMCO	6502	3442	4/20/06	4/20/07
Near Filed Probe Set	EMCO	7405	1385	N/A	N/A
Multi-Device Controller	ETS	2090	9804-1319	N/A	N/A
Multi-Device Controller	ETS	2090	9912-1477	N/A	N/A
Current Probe	Fisher Comm Co	F-2000	68	11/11/06	11/11/07
Current Probe	Fisher Comm Co	F-2000	67	11/11/06	11/11/07
Current Probe	Fisher Comm Co	F-51	283	11/11/06	11/11/07
Current Probe	Fisher Comm Co	F-51	284	11/11/06	11/11/07
Balance Voltage Probe	Fisher Comm Co	FCC-BCP-1	62	11/11/06	11/11/07
Multimeter	Fluke	23	49330331	1/13/07	1/13/08
AC/DC Current Multimeter	FWB	C-600	94040227	1/13/07	1/13/08
Microwave Synthesizer	Giga-tronics	12520A	0032007	6/15/06	6/15/07
Microwave Synthesizer	Giga-tronics	12520A	0214004	6/15/06	6/15/07
Power Sensor	Giga-tronics	80421A	1830056	7/15/06	7/15/07
Power Sensor	Giga-tronics	80621A	1950053	10/11/06	10/11/07
High Power Sensor	Giga-tronics	80621A	1950054	1/17/07	1/17/08
Power Meter	Giga-tronics	8542C	1834318	1/17/07	1/17/08
Power Meter	Giga-tronics	8542C	1834280	10/11/06	10/11/07
Power Meter	Hewlett-Packard	437B	312SU11066	1/05/07	1/05/08
Power Sensor	Hewlett-Packard	8482A	2652A22587	1/05/07	1/05/08
Power Supply 0-36 V,0-25A	HL	520A	1754	NA	NA
Power Supply 0-36 V,0-25A	HL	520A	1755	NA	NA
Power Supply 0-36 V,0-25A	HL	520A	4L1919	NA	NA
Power Supply 0-36 V,100A	HL	6456B	5H0646	NA	NA
Power Supply 0-36 V,100A	HL	6456B	5H0232	NA	NA

Power Supply 0-36 V,100A	HL	6472A	5M0107	NA	NA
RF Limiter	HP	11693A	03532	NA	NA
Spectrum Analyzer	Agilent	E4440A	US41421393	7/27/06	7/27/07
Spectrum analyzer, RF Sec	Hewlett-Packard	8566B	3026A19151	6/6/06	6/6/07
Spectrum analyzer, Disp Sec	Hewlett-Packard	8566B	3014A06682	6/6/06	6/6/07
EMI Test Receiver, Disp Sec	Rohde & Schwarz	ESA1-D	DE25102	12/06/06	12/06/07
EMI Test Receiver, RF Sec	Rohde & Schwarz	EMS1-RF	DE25102	12/06/06	12/06/07
Attenuator	Weinschel	6dB	AV9010	N/A	N/A
RF Limiter	Hewlett-Packard	11867A	03533	N/A	N/A
Loop Antenna	EMCO	6502	3441	7/15/2006	8/15/07
Biconical Antenna	EMCO	3110B	9807-3128	2/2/2007	2/2/08
Log-periodic Antenna	EMCO	3148	9707-1029	1/31/07	1/31/08
Double Ridged Horn Ant.	EMCO	3115	9812-5638	1/27/07	1/27/08
Pre-amplifier	Hewlett-Packard	8449B	3008A01355	1/18/07	1/18/08
Pre-amplifier	Sonoma - HP	310	185704	1/18/07	1/18/06
Multi-device Controller	EMCO	2090	9912-147-7	N/A	N/A
Thermal Coupler	Omega	T	N/A	N/A	N/A
Directional Coupler	MECA	715-40-3.5	N/A	N/A	N/A
50Ω Resistive Load	Bird Electronic	8166	9349	N/A	N/A
50Ω Resistive Load	Bird Electronic	8166	8283	N/A	N/A
50Ω Resistive Load	Bird Electronic	8166	8276	N/A	N/A
28V Power Supply	Hewlett-Packard	6684A	US36410429	N/A	N/A
28V Power Supply	Hewlett-Packard	6684A	US36410433	N/A	N/A
DC Power Supply	Hewlett-Packard	6683A	36420289	N/A	N/A
DC Power Supply	Hewlett-Packard	6038A	3025A-09939	N/A	N/A
Multi-meter	Fluke	23	49330331	1/13/07	1/13/08
RF Switch	Hewlett-Packard	11713A	2223A01767	N/A	N/A
RF Switch	Hewlett-Packard	44477A	MY42000146	N/A	N/A
RF Switch	Hewlett-Packard	44477A	MY42000147	N/A	N/A
RF Switch	Hewlett-Packard	8764C	3241A00605	N/A	N/A
RF Switch	Hewlett-Packard	8764C	3241A00622	N/A	N/A
RF Switch	Agilent	8761B	74304	N/A	N/A
RF Switch	Agilent	8761B	74261	N/A	N/A
RF Switch	Agilent	8761B	74305	N/A	N/A
Switch Control Unit	Hewlett-Packard	3488A	204925	N/A	N/A
Switch Control Unit	Hewlett-Packard	3488A	14202	N/A	N/A
Tunable Bandreject Filter	K&L	3TNF500/1000	1	N/A	N/A
Low Pass Filter	Trilithic	10LC800-3-AA	200201001	N/A	N/A
High Pass Filter	Hewlett-Packard	84300-80037	015	N/A	N/A
E4440A PSA	Agilent	E4440A	US42221740	10/13/06	10/13/07
Switch	SRFI	184	150	NA	NA
Power Divider	Weinschel	1506A		NA	NA
Attenuator	Weinschel	48-20-33		NA	NA
Universal Counter	Hp	5335A	2934A14399	7/11/06	7/11/07
Rectifier	TDI	AC-DC	128981-12	NA	NA
Freq Ref. Receiver	Symmetricon	58503B	KR93200773	NA	NA
Power Meter	HP	EPM-442A	GB37170388	5/22/2006	5/22/07
Power Sensor	HP	8482A	US37292961	5/30/06	5/30/07
Spec Analyzer	HP	8595E	3264A02230	6/30/06	6/30/07
Freq Counter	HP	53181A	3418A00309	10/18/06	10/18/07
Spec Analyzer	Agilent	E4443A	US41420102	6/30/06	6/30/07
Variable AC power supply	California Inst	MX45-3PI	55562	NA	NA