

**EXHIBIT 2: FCC ID LABEL SAMPLE AND LOCATION INFORMATION**

**SECTION 2.1033(c) (11) also SECTION 2.925 (a) (1)**

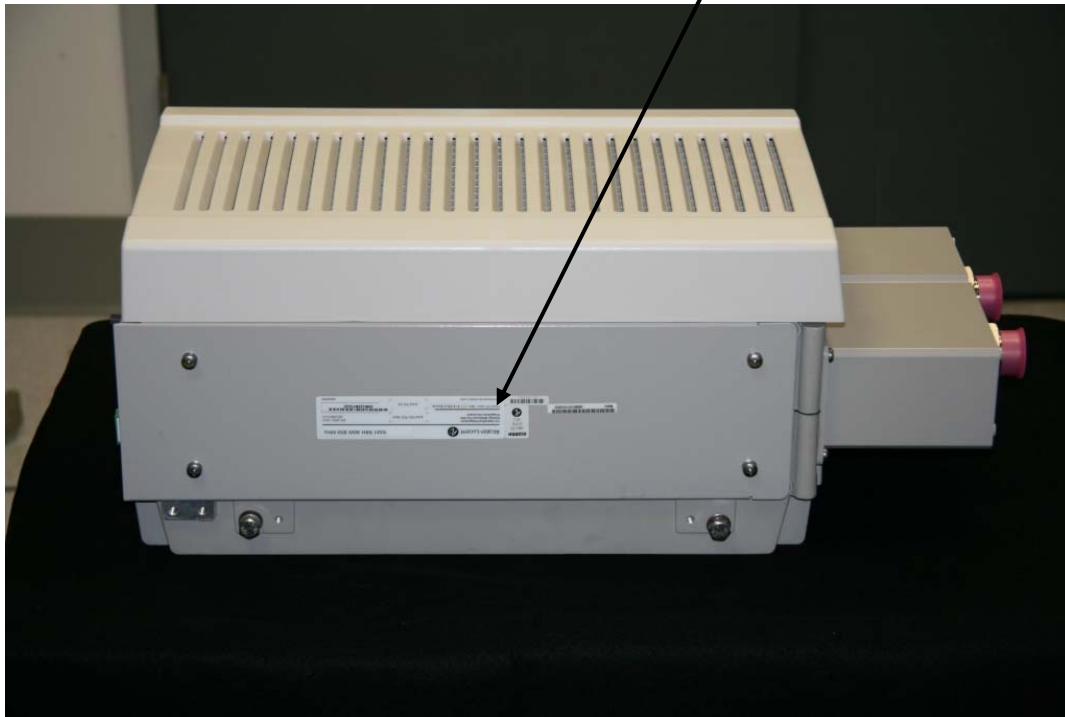
**A photograph or drawing of the equipment identification plate or label showing the information to be placed thereon.**

The Alcatel-Lucent UMTS **9341 RRH 40W 850 MHz** Distributed Base Station (850 MHz) system, subject of this Class II Permissive Change certification, is comprised of two separate modules interconnected by fiber optic cable: 1) the digital Base Band Unit (BBU), and 2) the Remote Radio Head (RRH). They have the flexibility of being installed either in close proximity to or remotely located from each other. The BBU has the capability of controlling up to 3 remotely located RRH units, via fiber optic cable, and incorporates the digital channel cards, reference oscillator module, T1/E1 and alarm interface, and the RF-to-Optical and Optical-to-RF conversion circuitry. The **9341 RRH 40W 850 MHz** Remote Radio Head incorporates the Future Technology Radio (FTR), power amplifier (PA) and passive filter with single transmit (Tx) and diversity receive functionality (Rx0, Rx1).

Due to displayable space limitations, each of the two separate equipment units will have their respective labels incorporated onto a single conspicuously displayed label. The RF Remote Radio Head will display the Part 2, Subpart J, Section 2.925 FCC Identifier Label "FCC ID: AS5ONEBTS-17". In addition, both the RF RRH and the digital Base Band Unit (BBU) will display the required Part 15, Section 15.19 label statement "This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference."

**Right Side View of the RF Remote Radio Head Showing the Label Placement**

**Label Location**



The RF Remote Radio Head label drawing is attached.

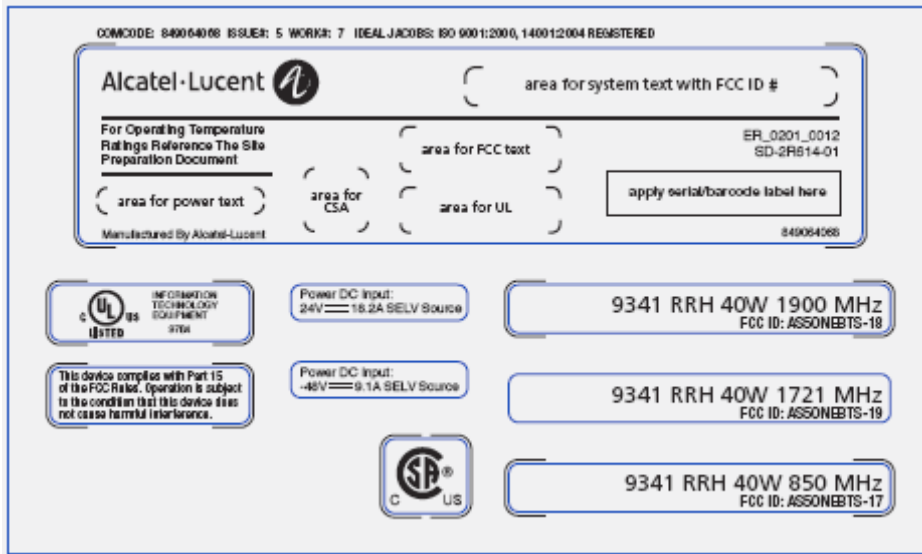
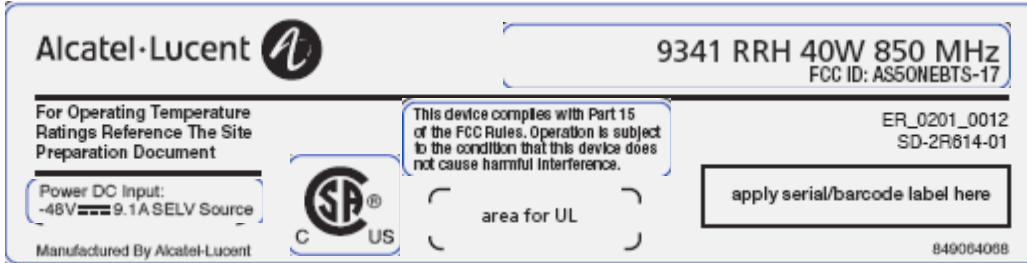
**Top View of the Digital Base Band Unit (BBU) Showing the Label Placement**

Label Location




The digital Base Band Unit label drawing is attached.

RF Remote Radio Head Label Drawing



Digital Base Band Unit (BBU) Label Drawing

COMCODE: 849071576 ISSUE#: 1 WORK#: 4 (JREV: 1W1) IDEAL JACOBS: ISO 9001:2000, 14001:2004 REGISTERED

**Alcatel-Lucent** 

**9396 Digital 2U  
NodeB Indoor**


---





**For Operating Temperature  
Ratings Reference The Site  
Preparation Document**




ER\_0201\_0012  
SD-2R624-01





apply serial/barcode label here

---

Power DC Input:  
+24V  10A SELV Source

Manufactured by Alcatel-Lucent

849071576



INFORMATION  
TECHNOLOGY  
EQUIPMENT  
97B4







These labels are to be applied to the above label when certifications have been received.

This device complies with part 15 of the FCC rules. Operation is subject to the condition that this device does not cause harmful interference.  
This device complies with 47 CFR Part 68.  
US: AS5DENAN1BTSUMTSM