

EXHIBIT 2: FCC ID LABEL SAMPLE AND LOCATION INFORMATION

SECTION 2.1033(c) (11) also SECTION 2.925 (a) (1)

A photograph or drawing of the equipment identification plate or label showing the information to be placed thereon.

The Alcatel-Lucent UMTS 9341 RRH 40W 1900 MHz System, subject of this certification, is comprised of two separate modules interconnected by fiber optic cable: 1) the digital Base Band Unit (BBU), and 2) the Remote Radio Head (RRH). They have the flexibility of being installed either in close proximity to or remotely located from each other. The BBU has the capability of controlling up to 3 remotely located RRH units, via fiber optic cable, and incorporates the digital channel cards, reference oscillator module, T1/E1 and alarm interface, and the RF-to-Optical and Optical-to-RF conversion circuitry. The 1900 MHz RRH incorporates the Future Technology Radio (FTR), power amplifier (PA) and passive filter with single transmit (Tx) and diversity receive functionality (Rx0, Rx1).

Due to displayable space limitations, each of the two separate equipment units will have their respective labels incorporated onto a single conspicuously displayed label. The RF Remote Radio Head will display the Part 2, Subpart J, Section 2.925 FCC Identifier Label "FCC ID: AS5ONEBTS-18". In addition, both the RF RRH and the digital Base Band Unit (BBU) will display the required Part 15, Section 15.19 label statement "This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference."

Faceplate View of the RF Remote Radio Head Showing the Label Placement

Label Location



The RF Remote Radio Head label drawing is attached.



Top View of the Digital Base Band Unit Showing the Label Placement

Label Location




The digital Base Band Unit label drawing is attached.

RF Remote Radio Head Label Drawing

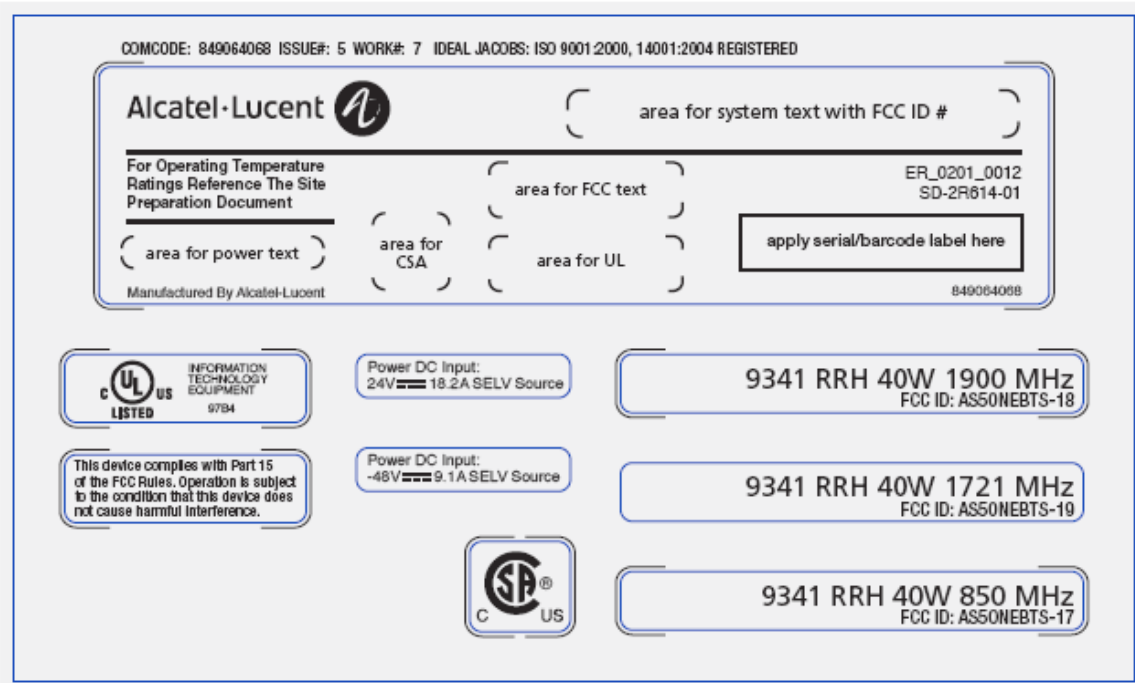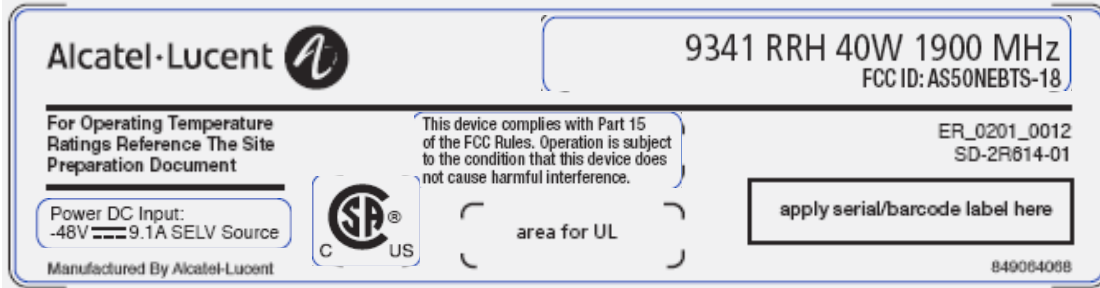


Digital Base Band Unit (BBU) Label Drawing







COMCODE: 849071576 ISSUE#: 1 WORK#: 4 (JREV: 1W1) IDEAL JACOBS: ISO 9001:2000, 14001:2004 REGISTERED





Alcatel-Lucent  **9396 Digital 2U NodeB Indoor**







For Operating Temperature Ratings Reference The Site Preparation Document ER_0201_0012
SD-2R624-01

apply serial/barcode label here


Power, DC Input:
+24V  10A SELV Source
















Manufactured by Alcatel-Lucent 849071576



INFORMATION TECHNOLOGY EQUIPMENT
97B4







These labels are to be applied to the above label when certifications have been received.

This device complies with part 15 of the FCC rules. Operation is subject to the condition that this device does not cause harmful interference. This device complies with 47 CFR Part 68. US: AS5DENAN1BTSUMTSM