



RADIO TEST REPORT

Test Report No. : 13097799H-J-R2


Applicant : JVCKENWOOD Corporation
Type of EUT : SMART HEADSETS
Model Number of EUT : WS-A1
FCC ID : ASIZWSA1
Test regulation : FCC Part 15 Subpart C: 2020
*Bluetooth Low Energy part
Test Result : Complied (Refer to SECTION 3.2)


1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. The test results in this test report are traceable to the national or international standards.
5. This test report covers Radio technical requirements.

It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)

6. The all test items in this test report are conducted by UL Japan, Inc. Ise EMC Lab.
7. This test report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.
8. The information provided from the customer for this report is identified in SECTION 1.
9. This report is a revised version of 13097799H-J-R1. 13097799H-J-R1 is replaced with this report.

Date of test: May 26 to June 25, 2020

Representative test engineer: 
Junki Nagatomi
Engineer
Consumer Technology Division

Approved by: 
Tsubasa Takayama
Leader
Consumer Technology Division



This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.
*As for the range of Accreditation in NVLAP, you may refer to the WEB address,
http://japan.ul.com/resources/emc_accredited/

- This report contains data that are not covered by the NVLAP accreditation.
 There is no testing item of "Non-accreditation".

UL Japan, Inc.
Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone : +81 596 24 8999
Facsimile : +81 596 24 8124

REVISION HISTORY

Original Test Report No.: 13097799H-J

Revision	Test report No.	Date	Page revised	Contents
- (Original)	13097799H-J	July 6, 2020	-	-
1	13097799H-J-R1	July 22, 2020	P7	Corrected the explanatory note *1)
1	13097799H-J-R1	July 22, 2020	P15	Addition of note for the EUT; “This EUT has two units, Left Earphone and Right Earphone. The test was conducted on the Left Earphone since there is no difference.”
2	13097799H-J-R2	July 28, 2020	P1	Changed A2LA logo to NVLAP logo
2	13097799H-J-R2	July 28, 2020	P12	Corrected product name of Item B; “Charger” to “Jig”

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Reference: Abbreviations (Including words undescribed in this report)

A2LA	The American Association for Laboratory Accreditation	MCS	Modulation and Coding Scheme
AC	Alternating Current	MRA	Mutual Recognition Arrangement
AFH	Adaptive Frequency Hopping	N/A	Not Applicable
AM	Amplitude Modulation	NIST	National Institute of Standards and Technology
Amp, AMP	Amplifier	NS	No signal detect.
ANSI	American National Standards Institute	NSA	Normalized Site Attenuation
Ant, ANT	Antenna	NVLAP	National Voluntary Laboratory Accreditation Program
AP	Access Point	OBW	Occupied Band Width
ASK	Amplitude Shift Keying	OFDM	Orthogonal Frequency Division Multiplexing
Atten., ATT	Attenuator	P/M	Power meter
AV	Average	PCB	Printed Circuit Board
BPSK	Binary Phase-Shift Keying	PER	Packet Error Rate
BR	Bluetooth Basic Rate	PHY	Physical Layer
BT	Bluetooth	PK	Peak
BT LE	Bluetooth Low Energy	PN	Pseudo random Noise
BW	BandWidth	PRBS	Pseudo-Random Bit Sequence
Cal Int	Calibration Interval	PSD	Power Spectral Density
CCK	Complementary Code Keying	QAM	Quadrature Amplitude Modulation
Ch., CH	Channel	QP	Quasi-Peak
CISPR	Comite International Special des Perturbations Radioelectriques	QPSK	Quadri-Phase Shift Keying
CW	Continuous Wave	RBW	Resolution Band Width
DBPSK	Differential BPSK	RDS	Radio Data System
DC	Direct Current	RE	Radio Equipment
D-factor	Distance factor	RF	Radio Frequency
DFS	Dynamic Frequency Selection	RMS	Root Mean Square
DQPSK	Differential QPSK	RSS	Radio Standards Specifications
DSSS	Direct Sequence Spread Spectrum	Rx	Receiving
EDR	Enhanced Data Rate	SA, S/A	Spectrum Analyzer
EIRP, e.i.r.p.	Equivalent Isotropically Radiated Power	SG	Signal Generator
EMC	ElectroMagnetic Compatibility	SVSWR	Site-Voltage Standing Wave Ratio
EMI	ElectroMagnetic Interference	TR	Test Receiver
EN	European Norm	Tx	Transmitting
ERP, e.r.p.	Effective Radiated Power	VBW	Video BandWidth
EU	European Union	Vert.	Vertical
EUT	Equipment Under Test	WLAN	Wireless LAN
Fac.	Factor		
FCC	Federal Communications Commission		
FHSS	Frequency Hopping Spread Spectrum		
FM	Frequency Modulation		
Freq.	Frequency		
FSK	Frequency Shift Keying		
GFSK	Gaussian Frequency-Shift Keying		
GNSS	Global Navigation Satellite System		
GPS	Global Positioning System		
Hori.	Horizontal		
ICES	Interference-Causing Equipment Standard		
IEC	International Electrotechnical Commission		
IEEE	Institute of Electrical and Electronics Engineers		
IF	Intermediate Frequency		
ILAC	International Laboratory Accreditation Conference		
ISED	Innovation, Science and Economic Development Canada		
ISO	International Organization for Standardization		
JAB	Japan Accreditation Board		
LAN	Local Area Network		
LIMS	Laboratory Information Management System		

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

CONTENTS	PAGE
SECTION 1: Customer information.....	5
SECTION 2: Equipment under test (EUT).....	5
SECTION 3: Test specification, procedures & results.....	7
SECTION 4: Operation of EUT during testing.....	11
SECTION 5: Radiated Spurious Emission	13
SECTION 6: Antenna Terminal Conducted Tests.....	15
APPENDIX 1: Test data	16
6 dB Bandwidth and 99 % Occupied Bandwidth.....	16
Maximum Peak Output Power.....	19
Average Output Power.....	20
Radiated Spurious Emission	22
Conducted Spurious Emission	33
Power Density	39
APPENDIX 2: Test instruments	41
APPENDIX 3: Photographs of test setup	42
Radiated Spurious Emission	42
Worst Case Position.....	43

SECTION 1: Customer information

Company Name : JVCKENWOOD Corporation
Address : 3-12 Moriyacho, Kanagawa-ku, Yokohama-shi, Kanagawa, 221-0022,
Japan
Telephone Number : +81-45-450-2865
Facsimile Number : +81-45-450-4531
Contact Person : Takayuki Uchida

The information provided from the customer is as follows;

- Applicant, Type of EUT, Model Number of EUT, FCC ID on the cover and other relevant pages
 - Operating/Test Mode(s) (Mode(s)) on all the relevant pages
 - SECTION 1: Customer information
 - SECTION 2: Equipment under test (EUT) other than the Receipt Date
 - SECTION 4: Operation of EUT during testing
- * The laboratory is exempted from liability of any test results affected from the above information in SECTION 2 and 4.

SECTION 2: Equipment under test (EUT)

2.1 Identification of EUT

Type : SMART HEADSETS
Model Number : WS-A1
Serial Number : Refer to SECTION 4.2
Rating : DC 3.7 V
Receipt Date : May 22, 2020
Country of Mass-production : China
Condition : Production prototype
(Not for Sale: This sample is equivalent to mass-produced items.)
Modification : No Modification by the test lab.

2.2 Product Description

Model: WS-A1 (referred to as the EUT in this report) is a SMART HEADSETS.

General Specification

Operating Temperature : +5 deg. C to +40 deg. C

Radio Specification

Bluetooth (BR / EDR function)

Radio Type : Transceiver
Frequency of Operation : 2402 MHz - 2480 MHz
Modulation : FHSS
Antenna type : PIFA Antenna
Antenna Gain : -1.3 dBi
Maximum clock frequency : 32 MHz

Bluetooth Low Energy

Equipment Type : Transceiver
Frequency of Operation : 2402 MHz - 2480 MHz
Type of Modulation : GFSK
Antenna Type : PIFA Antenna
Antenna Gain : -1.3 dBi
Maximum clock frequency : 32 MHz

*This report is applied to Bluetooth Low Energy part.

2.3 Variant model

This EUT has variant model: WS-A1G.

The difference between the EUT and variant model is circuit and Software.

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part 15 Subpart C
FCC Part 15 final revised on May 26, 2020 and effective July 27, 2020 except 15.258

Title : FCC 47 CFR Part 15 Radio Frequency Device Subpart C Intentional Radiators
Section 15.207 Conducted limits
Section 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz,
and 5725-5850 MHz

* The revision does not affect the test result conducted before its effective date.

* Also the EUT complies with FCC Part 15 Subpart B.

3.2 Procedures and results

Item	Test Procedure	Specification	Worst margin	Results	Remarks
Conducted Emission	FCC: ANSI C63.10-2013 6. Standard test methods ISED: RSS-Gen 8.8	FCC: Section 15.207 ISED: RSS-Gen 8.8	-	N/A	*1)
6dB Bandwidth	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section 15.247(a)(2) ISED: RSS-247 5.2(a)	See data.	Complied a)	Conducted
Maximum Peak Output Power	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: RSS-Gen 6.12	FCC: Section 15.247(b)(3) ISED: RSS-247 5.4(d)		Complied b)	Conducted
Power Density	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section 15.247(e) ISED: RSS-247 5.2(b)		Complied c)	Conducted
Spurious Emission Restricted Band Edges	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: RSS-Gen 6.13	FCC: Section 15.247(d) ISED: RSS-247 5.5 RSS-Gen 8.9 RSS-Gen 8.10	7.6 dB 7440.000 MHz, AV, Vert.	Complied d), e)	Conducted (below 30 MHz)/ Radiated (above 30 MHz) *2)

Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422.

*1) The test is not applicable since the EUT is not the device that is designed to be connected to the public utility (AC) power line, and besides, the EUT in the Wireless Charging Case does not transmit the radio waves.

*2) Radiated test was selected over 30 MHz based on section 15.247(d) and KDB 558074 D01 15.247 Meas Guidance v05r02 8.5 and 8.6.

a) Refer to APPENDIX 1 (data of 6 dB Bandwidth and 99 % Occupied Bandwidth)

b) Refer to APPENDIX 1 (data of Maximum Peak Output Power)

c) Refer to APPENDIX 1 (data of Power Density)

d) Refer to APPENDIX 1 (data of Conducted Spurious Emission)

e) Refer to APPENDIX 1 (data of Radiated Spurious Emission)

Symbols:

Complied The data of this test item has enough margin, more than the measurement uncertainty.

Complied# The data of this test item meets the limits unless the measurement uncertainty is taken into consideration.

* In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

FCC Part 15.31 (e)

The EUT is a battery-operated device and test was performed with the full-charged battery. Therefore, this EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203.

3.3 Addition to standard

Item	Test Procedure	Specification	Worst margin	Results	Remarks
99% Occupied Bandwidth	ISED: RSS-Gen 6.7	ISED: -	N/A	- a)	Conducted
a) Refer to APPENDIX 1 (data of 6 dB Bandwidth and 99 % Occupied Bandwidth)					

Other than above, no addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

There is no applicable rule of uncertainty in this applied standard. Therefore, the results are derived depending on whether or not laboratory uncertainty is applied.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k=2$.
Ise EMC Lab.

Antenna Terminal test

Test Item	Uncertainty (+/-)
20 dB Bandwidth / 99 % Occupied Bandwidth	0.96 %
Maximum Peak Output Power / Average Output Power	1.4 dB
Carrier Frequency Separation	0.42 %
Dwell time / Burst rate	0.10 %
Conducted Spurious Emission	2.6 dB

Conducted emission

using Item	Frequency range	Uncertainty (+/-)
AMN (LISN)	0.009 MHz to 0.15 MHz	3.4 dB
	0.15 MHz to 30 MHz	2.9 dB

Radiated emission

Measurement distance	Frequency range	Uncertainty (+/-)
3 m	9 kHz to 30 MHz	3.3 dB
10 m		3.2 dB
3 m	30 MHz to 200 MHz (Horizontal) (Vertical)	4.8 dB
		5.0 dB
	200 MHz to 1000 MHz (Horizontal) (Vertical)	5.2 dB
		6.3 dB
10 m	30 MHz to 200 MHz (Horizontal) (Vertical)	4.8 dB
		4.8 dB
	200 MHz to 1000 MHz (Horizontal) (Vertical)	5.0 dB
		5.0 dB
3 m	1 GHz to 6 GHz	4.9 dB
	6 GHz to 18 GHz	5.2 dB
1 m	10 GHz to 26.5 GHz	5.5 dB
	26.5 GHz to 40 GHz	5.5 dB
10 m	1 GHz to 18 GHz	5.2 dB

3.5 Test Location

UL Japan, Inc. Ise EMC Lab.

*A2LA Certificate Number: 5107.02 / FCC Test Firm Registration Number: 199967 / ISED Lab Company Number: 2973C

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999, Facsimile: +81 596 24 8124

Test site	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms	Maximum measurement distance
No.1 semi-anechoic chamber	19.2 x 11.2 x 7.7	7.0 x 6.0	No.1 Power source room	10 m
No.2 semi-anechoic chamber	7.5 x 5.8 x 5.2	4.0 x 4.0	-	3 m
No.3 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.3 Preparation room	3 m
No.3 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.4 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.4 Preparation room	3 m
No.4 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.5 semi-anechoic chamber	6.0 x 6.0 x 3.9	6.0 x 6.0	-	-
No.5 measurement room	6.4 x 6.4 x 3.0	6.4 x 6.4	-	-
No.6 shielded room	4.0 x 4.5 x 2.7	4.0 x 4.5	-	-
No.6 measurement room	4.75 x 5.4 x 3.0	4.75 x 4.15	-	-
No.7 shielded room	4.7 x 7.5 x 2.7	4.7 x 7.5	-	-
No.8 measurement room	3.1 x 5.0 x 2.7	3.1 x 5.0	-	-
No.9 measurement room	8.8 x 4.6 x 2.8	2.4 x 2.4	-	-
No.11 measurement room	6.2 x 4.7 x 3.0	4.8 x 4.6	-	-

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0 m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

3.6 Test data, Test instruments, and Test set up

Refer to APPENDIX.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

SECTION 4: Operation of EUT during testing

4.1 Operating Mode(s)

Mode	Remarks*
Bluetooth Low Energy (BT LE) 1M-PHY Uncoded PHY (1M-PHY)	Maximum Packet Size, PRBS9
Bluetooth Low Energy (BT LE) 2M-PHY Uncoded PHY (2M-PHY)	Maximum Packet Size, PRBS9
<p>*Power of the EUT was set by the software as follows; Power settings: Same as production model Software: Bluetest3 ver.3.2.3 (Date: May 21, 2020, Storage location: Driven by connected PC)</p> <p>*This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.</p>	

*The details of Operating mode(s)

Test Item	Operating Mode	Tested frequency
6dB Bandwidth	Tx BT LE, 1M-PHY	2402 MHz
99% Occupied Bandwidth	Tx BT LE, 2M-PHY	2440 MHz
Maximum Peak Output Power		2480 MHz
Radiated Spurious Emission		
Conducted Spurious Emission		
Power Density		

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124


4.2 Configuration and peripherals

For Antenna Terminal Conducted Tests

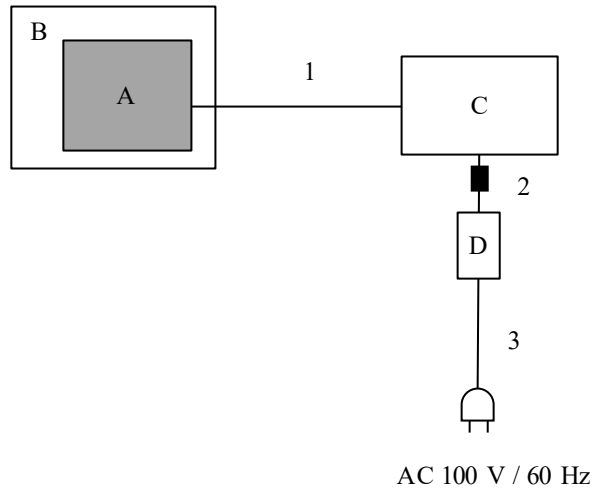

■ : Standard Ferrite Core

For Radiated Spurious Emission test



* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remark
A	SMART HEADSETS	WS-A1	001 for *AT 002 for *RE	JVCKENWOOD Corporation	EUT
B	Jig	-	-	JVCKENWOOD Corporation	-
C	Laptop PC	CF-N8HWC DPS	0BKSA08723	Panasonic	-
D	AC Adapter	CF-AA6372B	6372BM409X18054B	Panasonic	-

List of cables used

No.	Name	Length (m)	Shield		Remark
			Cable	Connector	
1	USB Cable	0.2	Shielded	Shielded	-
2	DC Cable	1.0	Unshielded	Unshielded	-
3	AC Cable	0.8	Unshielded	Unshielded	-

*AT: Antenna Terminal Conducted Tests
RE: Radiated Spurious Emission test

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

SECTION 5: Radiated Spurious Emission

Test Procedure

It was measured based on "8.5 and 8.6 of KDB 558074 D01 15.247 Meas Guidance v05r02".

[For below 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 1.0 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

[For above 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane.

The height of the measuring antenna varied between 1 m and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

Test antenna was aimed at the EUT for receiving the maximum signal and always kept within the illumination area of the 3 dB beamwidth of the antenna.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

Test Antennas are used as below;

Frequency	30 MHz to 200 MHz	200 MHz to 1 GHz	Above 1 GHz
Antenna Type	Biconical	Logperiodic	Horn

In any 100 kHz bandwidth outside the restricted band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

20 dBc was applied to the frequency over the limit of FCC 15.209 / Table 4 of RSS-Gen 8.9(ISED) and outside the restricted band of FCC15.205 / Table 6 of RSS-Gen 8.10 (ISED).

Frequency	Below 1 GHz	Above 1 GHz		20 dBc
Instrument used	Test Receiver	Spectrum Analyzer		Spectrum Analyzer
Detector	QP	PK	AV *1)	PK
IF Bandwidth	BW 120 kHz	RBW: 1 MHz VBW: 3 MHz	<u>11.12.2.5.1</u> RBW: 1 MHz VBW: 3 MHz Detector: Power Averaging (RMS) Trace: 100 traces <u>11.12.2.5.2</u> The duty cycle was less than 98% for detected noise, a duty factor was added to the 11.12.2.5.1 results.	RBW: 100 kHz VBW: 300 kHz

*1) Average Power Measurement was performed based on ANSI C63.10-2013.

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Figure 2: Test Setup


Below 1 GHz

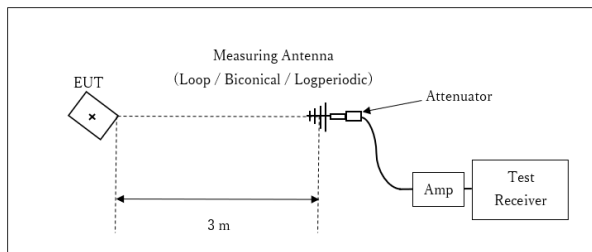

× : Center of turn table

Test Distance: 3 m

1 GHz - 10 GHz

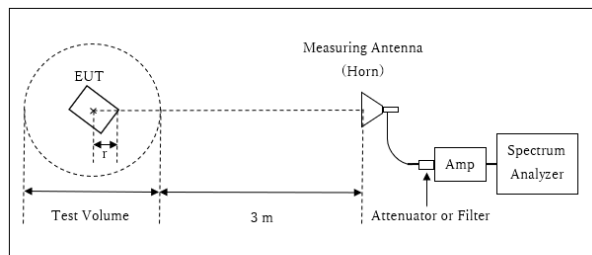


r : Radius of an outer periphery of EUT
× : Center of turn table

Distance Factor: $20 \times \log(4.0 \text{ m} / 3.0 \text{ m}) = 2.50 \text{ dB}$
* Test Distance: $(3 + \text{Test Volume} / 2) - r = 4.0 \text{ m}$

Test Volume : 2.0 m
(Test Volume has been calibrated based on CISPR 16-1-4.)
r = 0.0 m

* The test was performed with r = 0.0 m since EUT is small and it was the rather conservative condition.

10 GHz - 26.5 GHz

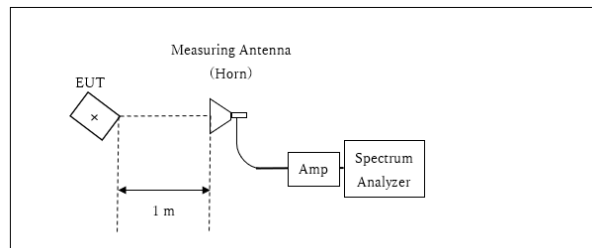

× : Center of turn table

Distance Factor: $20 \times \log(1.0 \text{ m} / 3.0 \text{ m}) = -9.5 \text{ dB}$
*Test Distance: 1 m

- The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.
This EUT has two units, Left Earphone and Right Earphone. The test was conducted on the Left Earphone which had the worst level of spurious.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Measurement range : 30 MHz - 26.5 GHz
Test data : APPENDIX
Test result : Pass

SECTION 6: Antenna Terminal Conducted Tests

Test Procedure

The tests were made with below setting connected to the antenna port.

Test	Span	RBW	VBW	Sweep time	Detector	Trace	Instrument used
6dB Bandwidth	3 MHz, 5 MHz	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
99% Occupied Bandwidth *1)	Enough width to display emission skirts	1 to 5 % of OBW	Three times of RBW	Auto	Peak	Max Hold	Spectrum Analyzer
Maximum Peak Output Power	-	-	-	Auto	Peak/Average *2)	-	Power Meter (Sensor: 50 MHz BW)
Peak Power Density	1.5 times the 6dB Bandwidth	3 kHz	10 kHz	Auto	Peak	Max Hold	Spectrum Analyzer *3)
Conducted Spurious Emission *4) *5)	9kHz to 150kHz	200 Hz	620 Hz	Auto	Peak	Max Hold	Spectrum Analyzer
	150kHz to 30MHz	9.1 kHz	27 kHz				

*1) Peak hold was applied as Worst-case measurement.

*2) Reference data

*3) Section 11.10.2 Method PKPSD (peak PSD) of "ANSI C63.10-2013".

*4) In the frequency range below 30MHz, RBW was narrowed to separate the noise contents.

Then, wide-band noise near the limit was checked separately, however the noise was low enough as shown in the chart.
(9 kHz - 150 kHz: RBW = 200 Hz, 150 kHz - 30 MHz: RBW = 9.1 kHz).

*5) The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377 Ohms. For example, the measurement at frequency 9 kHz resulted in a level of 45.5 dBuV/m, which is equivalent to $45.5 - 51.5 = -6.0$ dBuA/m, which has the same margin, 3 dB, to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit.

The test results and limit are rounded off to two decimals place, so some differences might be observed.
The equipment and cables were not used for factor 0 dB of the data sheets.

This EUT has two units, Left Earphone and Right Earphone. The test was conducted on the Left Earphone since there is no difference.

Test data : APPENDIX
Test result : Pass

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124


APPENDIX 1: Test data

6 dB Bandwidth and 99 % Occupied Bandwidth

Report No. 13097799H
Test place Ise EMC Lab. No.6 Measurement Room
Date May 26, 2020 May 27, 2020
Temperature / Humidity 23 deg. C / 57 % RH 23 deg. C / 64 % RH
Engineer Yuta Moriya Yuta Moriya
Mode Tx BT LE

Mode	Frequency [MHz]	99% Occupied Bandwidth [kHz]	6dB Bandwidth [MHz]	Limit for 6dB Bandwidth [MHz]
1M-PHY	2402	1040.7	0.712	> 0.5000
	2440	1038.7	0.708	> 0.5000
	2480	1037.7	0.709	> 0.5000
2M-PHY	2402	2065.0	1.268	> 0.5000
	2440	2060.9	1.274	> 0.5000
	2480	2060.0	1.269	> 0.5000

99% Occupied Bandwidth

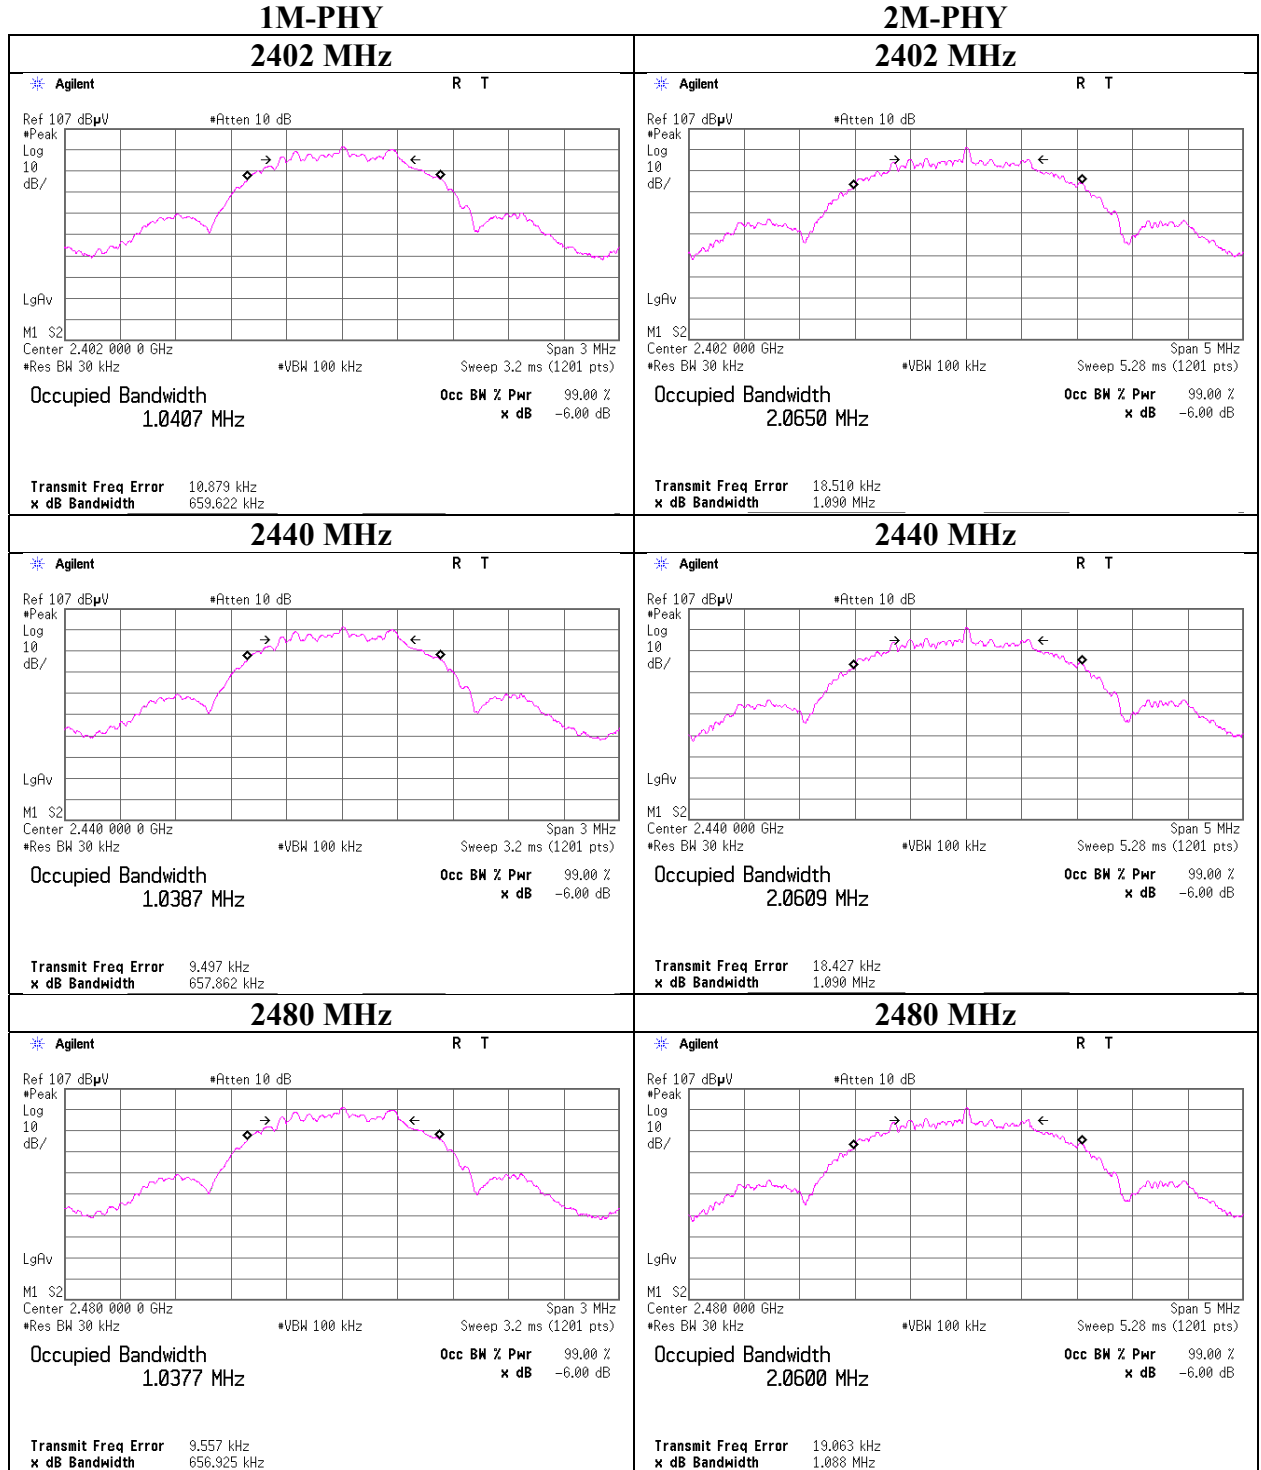

UL Japan, Inc.


Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

6dB Bandwidth

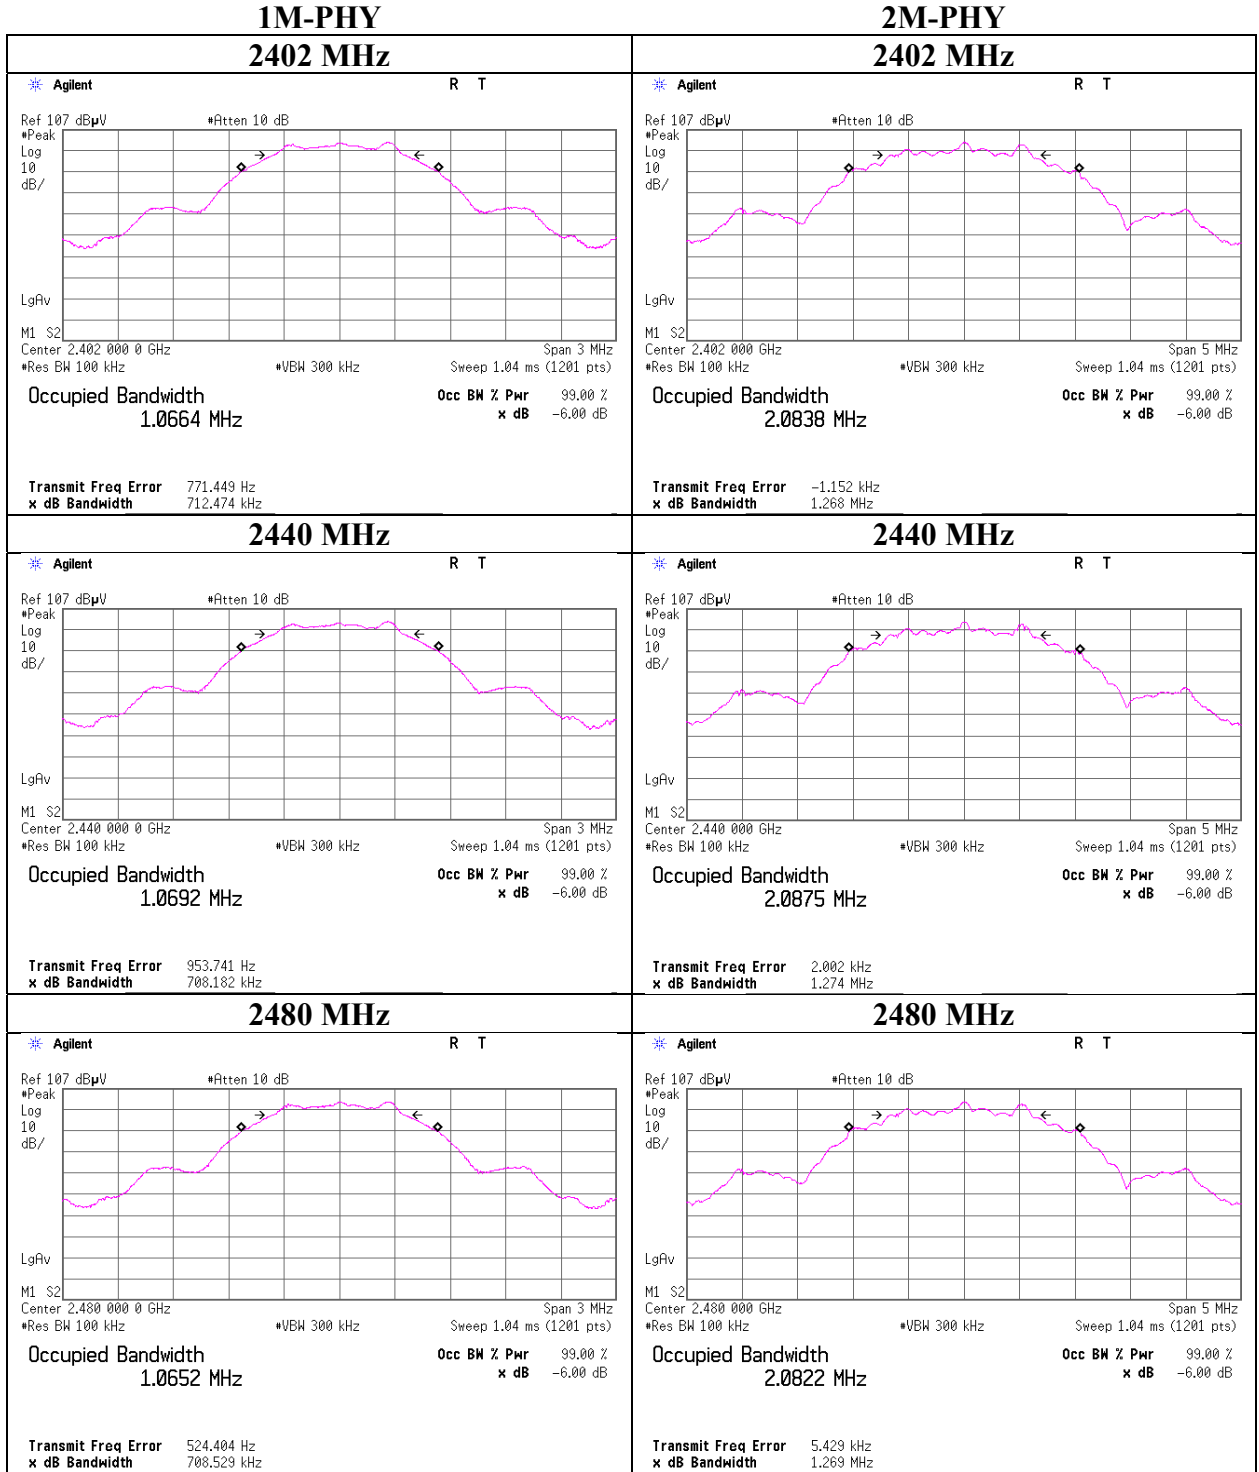

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Maximum Peak Output Power

Report No. 13097799H
Test place Ise EMC Lab. No.6 Measurement Room
Date June 22, 2020
Temperature / Humidity 22 deg. C / 63 % RH
Engineer Takeshi Hiyaji
Mode Tx BT LE

1M-PHY				Conducted Power						e.i.r.p. for RSS-247					
Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result		Limit		Margin [dB]	Antenna Gain [dBi]	Result		Limit		Margin [dB]	
				[dBm]	[mW]	[dBm]	[mW]			[dBm]	[mW]	[dBm]	[mW]		
2402	-12.23	1.79	10.03	-0.41	0.91	30.00	1000	30.41	-1.30	-1.71	0.67	36.02	4000	37.73	
2440	-12.39	1.80	10.03	-0.56	0.88	30.00	1000	30.56	-1.30	-1.86	0.65	36.02	4000	37.88	
2480	-12.47	1.81	10.03	-0.63	0.86	30.00	1000	30.63	-1.30	-1.93	0.64	36.02	4000	37.95	

2M-PHY				Conducted Power						e.i.r.p. for RSS-247					
Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result		Limit		Margin [dB]	Antenna Gain [dBi]	Result		Limit		Margin [dB]	
				[dBm]	[mW]	[dBm]	[mW]			[dBm]	[mW]	[dBm]	[mW]		
2402	-12.22	1.79	10.03	-0.40	0.91	30.00	1000	30.40	-1.30	-1.70	0.68	36.02	4000	37.72	
2440	-12.36	1.80	10.03	-0.53	0.89	30.00	1000	30.53	-1.30	-1.83	0.66	36.02	4000	37.85	
2480	-12.49	1.81	10.03	-0.65	0.86	30.00	1000	30.65	-1.30	-1.95	0.64	36.02	4000	37.97	

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

e.i.r.p. Result = Conducted Power Result + Antenna Gain

*The equipment and cables were not used for factor 0 dB of the data sheets.

Average Output Power
(Reference data for RF Exposure)

Report No. 13097799H
Test place Ise EMC Lab. No.6 Measurement Room
Date June 22, 2020
Temperature / Humidity 22 deg. C / 63 % RH
Engineer Takeshi Hiyaji
Mode Tx BT LE

1M-PHY

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Time average)		Duty factor [dB]	Result (Burst power average)	
				[dBm]	[mW]		[dBm]	[mW]
2402	-13.33	1.79	10.03	-1.51	0.71	0.67	-0.84	0.82
2440	-13.46	1.80	10.03	-1.63	0.69	0.67	-0.96	0.80
2480	-13.57	1.81	10.03	-1.73	0.67	0.67	-1.06	0.78

2M-PHY

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Time average)		Duty factor [dB]	Result (Burst power average)	
				[dBm]	[mW]		[dBm]	[mW]
2402	-15.02	1.79	10.03	-3.20	0.48	2.36	-0.84	0.82
2440	-15.13	1.80	10.03	-3.30	0.47	2.36	-0.94	0.81
2480	-15.26	1.81	10.03	-3.42	0.45	2.36	-1.06	0.78

Sample Calculation:


Result (Time average) = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

Result (Burst power average) = Time average + Duty factor

*The equipment and cables were not used for factor 0 dB of the data sheets.

Burst rate confirmation

Report No.	13097799H	
Test place	Ise EMC Lab. No.6 Measurement Room	
Date	May 26, 2020	May 27, 2020
Temperature / Humidity	23 deg. C / 57 % RH	23 deg. C / 64 % RH
Engineer	Yuta Moriya	Yuta Moriya
Mode	Tx BT LE	

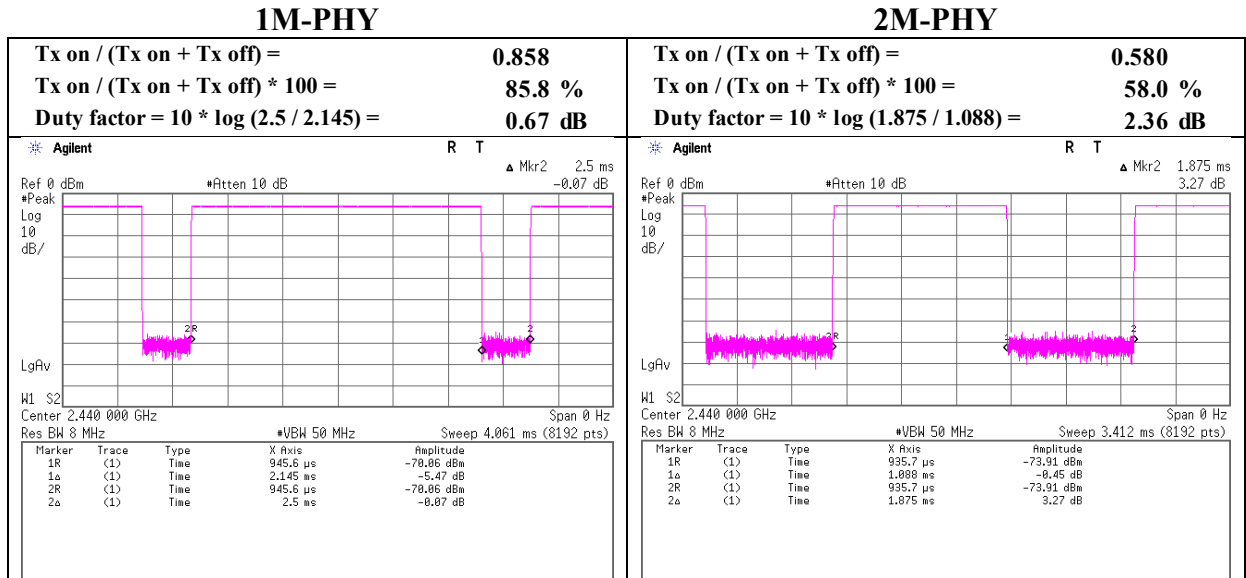

* Since the burst rate is not different between the channels, the data has been obtained on the representative channel.

Radiated Spurious Emission

Report No. 13097799H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.1 No.1
Date June 18, 2020 June 19, 2020
Temperature / Humidity 23 deg. C / 68 % RH 24 deg. C / 57 % RH
Engineer Takafumi Noguchi Junki Nagatomi
(1 GHz - 26.5 GHz) (Below 1 GHz)
Mode Tx BT LE 1M-PHY 2402 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	40.020	QP	22.5	14.6	7.6	28.6	-	16.1	40.0	24.0	
Hori.	80.162	QP	22.2	6.8	8.3	28.6	-	8.8	40.0	31.2	
Hori.	150.960	QP	22.0	14.9	9.3	28.3	-	17.8	43.5	25.7	
Hori.	299.994	QP	21.6	13.4	10.7	27.8	-	18.0	46.0	28.0	
Hori.	499.808	QP	22.4	17.5	12.3	29.2	-	23.0	46.0	23.1	
Hori.	899.654	QP	22.2	21.7	14.7	29.0	-	29.6	46.0	16.4	
Hori.	2390.000	PK	45.7	27.6	3.2	36.5	-	40.0	73.9	33.9	
Hori.	4804.000	PK	46.4	31.5	5.4	36.0	-	47.3	73.9	26.6	
Hori.	7206.000	PK	44.6	36.2	6.3	36.2	-	50.9	73.9	23.0	
Hori.	9608.000	PK	43.2	38.5	7.5	36.7	-	52.5	73.9	21.4	Floor noise
Hori.	2390.000	AV	36.7	27.6	3.2	36.5	0.7	31.7	53.9	22.2	*1)
Hori.	4804.000	AV	38.2	31.5	5.4	36.0	0.7	39.8	53.9	14.1	
Hori.	7206.000	AV	36.2	36.2	6.3	36.2	0.7	43.2	53.9	10.7	
Hori.	9608.000	AV	34.1	38.5	7.5	36.7	-	43.4	53.9	10.5	Floor noise
Vert.	40.110	QP	22.6	14.5	7.6	28.6	-	16.1	40.0	23.9	
Vert.	80.021	QP	22.2	6.8	8.3	28.6	-	8.8	40.0	31.3	
Vert.	150.730	QP	22.0	14.9	9.3	28.3	-	17.8	43.5	25.7	
Vert.	300.428	QP	21.7	13.5	10.7	27.8	-	18.1	46.0	27.9	
Vert.	500.120	QP	22.4	17.5	12.3	29.2	-	23.0	46.0	23.1	
Vert.	899.654	QP	22.2	21.7	14.7	29.0	-	29.6	46.0	16.4	
Vert.	2390.000	PK	44.8	27.6	3.2	36.5	-	39.1	73.9	34.8	
Vert.	4804.000	PK	45.4	31.5	5.4	36.0	-	46.3	73.9	27.6	
Vert.	7206.000	PK	44.7	36.2	6.3	36.2	-	51.0	73.9	22.9	
Vert.	9608.000	PK	42.7	38.5	7.5	36.7	-	52.0	73.9	21.9	Floor noise
Vert.	2390.000	AV	36.1	27.6	3.2	36.5	0.7	31.0	53.9	22.9	*1)
Vert.	4804.000	AV	38.3	31.5	5.4	36.0	0.7	39.9	53.9	14.0	
Vert.	7206.000	AV	37.6	36.2	6.3	36.2	0.7	44.5	53.9	9.4	
Vert.	9608.000	AV	35.1	38.5	7.5	36.7	-	44.4	53.9	9.5	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log(4.0 m / 3.0 m) = 2.5 dB
10 GHz - 26.5 GHz 20log(1.0 m / 3.0 m) = -9.5 dB

*1) Not Out of Band emission(Leakage Power)

20dBc Data Sheet

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2402.000	PK	90.2	27.6	3.2	36.5	84.5	-	-	Carrier
Hori.	2400.000	PK	40.0	27.6	3.2	36.5	34.2	64.5	30.2	
Vert.	2402.000	PK	89.1	27.6	3.2	36.5	83.4	-	-	Carrier
Vert.	2400.000	PK	37.8	27.6	3.2	36.5	32.1	63.4	31.3	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

**Radiated Spurious Emission
(Reference Plot for band-edge)**

Report No. 13097799H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.1
Date June 18, 2020
Temperature / Humidity 23 deg. C / 68 % RH
Engineer Takafumi Noguchi
(1 GHz - 26.5 GHz)
Mode Tx BT LE 1M-PHY 2402 MHz

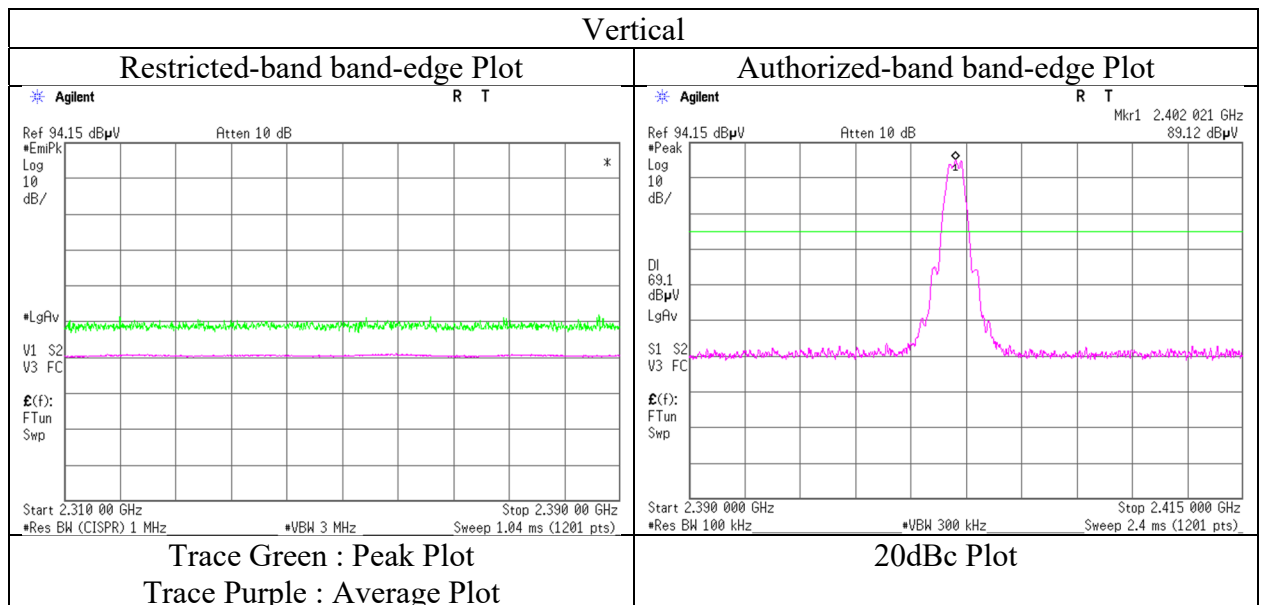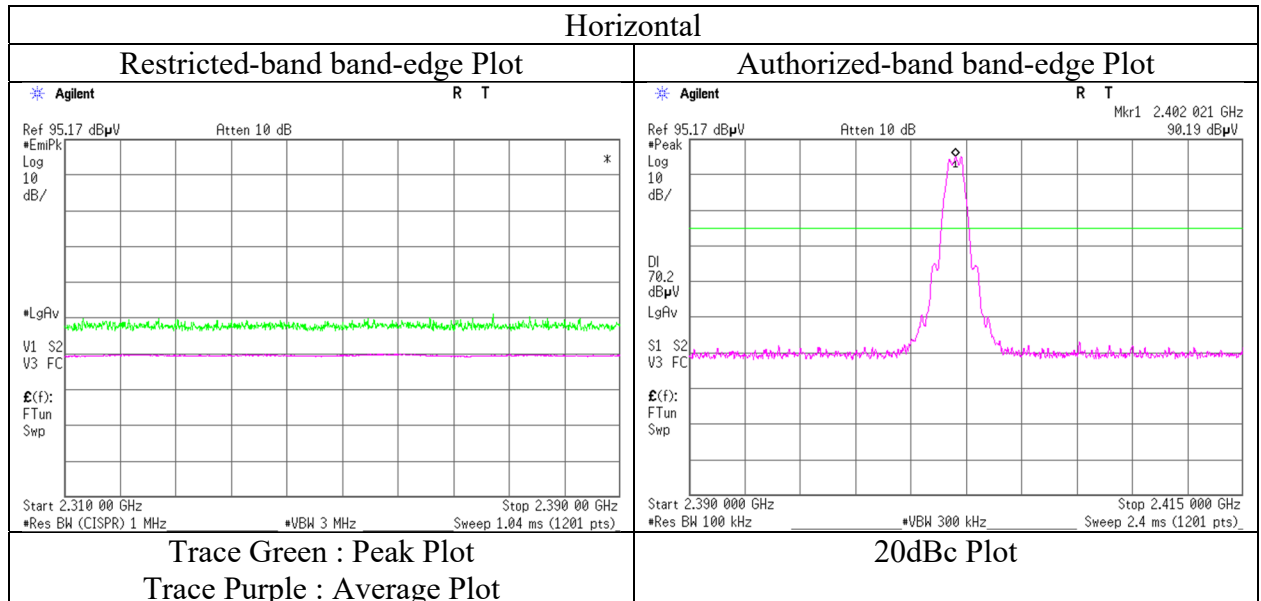

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Report No. 13097799H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.1 No.1
Date June 18, 2020 June 19, 2020
Temperature / Humidity 23 deg. C / 68 % RH 24 deg. C / 57 % RH
Engineer Takafumi Noguchi Junki Nagatomi
(1 GHz - 26.5 GHz) (Below 1 GHz)
Mode Tx BT LE 1M-PHY 2440 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	40.276	QP	22.5	14.5	7.6	28.6	-	16.0	40.0	24.0	
Hori.	80.322	QP	22.3	6.8	8.3	28.6	-	8.9	40.0	31.1	
Hori.	149.799	QP	22.0	14.9	9.2	28.3	-	17.8	43.5	25.7	
Hori.	299.688	QP	21.6	13.4	10.7	27.8	-	18.0	46.0	28.1	
Hori.	500.732	QP	22.4	17.5	12.3	29.2	-	23.0	46.0	23.0	
Hori.	899.815	QP	22.2	21.7	14.7	29.0	-	29.6	46.0	16.4	
Hori.	4880.000	PK	44.3	31.5	5.4	36.0	-	45.2	73.9	28.7	
Hori.	7320.000	PK	44.4	36.1	6.4	36.2	-	50.8	73.9	23.1	
Hori.	9760.000	PK	42.9	39.1	7.5	36.7	-	52.8	73.9	21.2	Floor noise
Hori.	4880.000	AV	37.2	31.5	5.4	36.0	0.7	38.8	53.9	15.1	
Hori.	7320.000	AV	37.3	36.1	6.4	36.2	0.7	44.2	53.9	9.7	
Hori.	9760.000	AV	34.9	39.1	7.5	36.7	-	44.8	53.9	9.1	Floor noise
Vert.	40.176	QP	22.6	14.5	7.6	28.6	-	16.1	40.0	23.9	
Vert.	79.954	QP	22.2	6.8	8.3	28.6	-	8.7	40.0	31.3	
Vert.	149.791	QP	22.0	14.9	9.2	28.3	-	17.8	43.5	25.7	
Vert.	299.884	QP	21.5	13.4	10.7	27.8	-	17.9	46.0	28.1	
Vert.	499.548	QP	22.3	17.5	12.3	29.2	-	22.9	46.0	23.2	
Vert.	900.120	QP	22.3	21.7	14.7	29.0	-	29.7	46.0	16.3	
Vert.	4880.000	PK	44.8	31.5	5.4	36.0	-	45.7	73.9	28.2	
Vert.	7320.000	PK	45.7	36.1	6.4	36.2	-	52.0	73.9	21.9	
Vert.	9760.000	PK	42.0	39.1	7.5	36.7	-	51.9	73.9	22.0	Floor noise
Vert.	4880.000	AV	36.6	31.5	5.4	36.0	0.7	38.2	53.9	15.7	
Vert.	7320.000	AV	38.3	36.1	6.4	36.2	0.7	45.3	53.9	8.6	
Vert.	9760.000	AV	35.0	39.1	7.5	36.7	-	44.9	53.9	9.0	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (4.0 m / 3.0 m) = 2.5 dB
10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Report No. 13097799H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.1 No.1
Date June 18, 2020 June 19, 2020
Temperature / Humidity 23 deg. C / 68 % RH 24 deg. C / 57 % RH
Engineer Takafumi Noguchi Junki Nagatomi
(1 GHz - 26.5 GHz) (Below 1 GHz)
Mode Tx BT LE 1M-PHY 2480MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	40.210	QP	22.5	14.5	7.6	28.6	-	16.0	40.0	24.0	
Hori.	80.103	QP	22.3	6.8	8.3	28.6	-	8.9	40.0	31.1	
Hori.	149.832	QP	22.0	14.9	9.2	28.3	-	17.8	43.5	25.7	
Hori.	299.771	QP	21.6	13.4	10.7	27.8	-	18.0	46.0	28.0	
Hori.	500.720	QP	22.4	17.5	12.3	29.2	-	23.0	46.0	23.0	
Hori.	899.902	QP	22.2	21.7	14.7	29.0	-	29.6	46.0	16.4	
Hori.	2483.500	PK	46.3	27.5	3.3	36.5	-	40.6	73.9	33.3	
Hori.	4960.000	PK	43.8	31.5	5.5	36.0	-	44.7	73.9	29.2	
Hori.	7440.000	PK	44.4	36.4	6.5	36.2	-	51.1	73.9	22.8	
Hori.	9920.000	PK	40.1	38.8	7.6	36.8	-	49.7	73.9	24.2	Floor noise
Hori.	2483.500	AV	37.2	27.5	3.3	36.5	0.7	32.1	53.9	21.8	*1)
Hori.	4960.000	AV	36.2	31.5	5.5	36.0	0.7	37.8	53.9	16.1	
Hori.	7440.000	AV	37.4	36.4	6.5	36.2	0.7	44.8	53.9	9.1	
Hori.	9920.000	AV	34.3	38.8	7.6	36.8	-	43.9	53.9	10.0	Floor noise
Vert.	40.270	QP	22.6	14.5	7.6	28.6	-	16.1	40.0	23.9	
Vert.	80.221	QP	22.2	6.8	8.3	28.6	-	8.8	40.0	31.2	
Vert.	149.810	QP	22.0	14.9	9.2	28.3	-	17.8	43.5	25.7	
Vert.	299.778	QP	21.5	13.4	10.7	27.8	-	17.9	46.0	28.1	
Vert.	500.720	QP	22.3	17.5	12.3	29.2	-	22.9	46.0	23.1	
Vert.	899.922	QP	22.3	21.7	14.7	29.0	-	29.7	46.0	16.3	
Vert.	2483.500	PK	44.8	27.5	3.3	36.5	-	39.1	73.9	34.8	
Vert.	4960.000	PK	44.3	31.5	5.5	36.0	-	45.2	73.9	28.7	
Vert.	7440.000	PK	44.8	36.4	6.5	36.2	-	51.5	73.9	22.4	
Vert.	9920.000	PK	43.1	38.8	7.6	36.8	-	52.7	73.9	21.2	Floor noise
Vert.	2483.500	AV	36.7	27.5	3.3	36.5	0.7	31.6	53.9	22.3	*1)
Vert.	4960.000	AV	35.9	31.5	5.5	36.0	0.7	37.5	53.9	16.4	
Vert.	7440.000	AV	38.2	36.4	6.5	36.2	0.7	45.6	53.9	8.3	
Vert.	9920.000	AV	35.0	38.8	7.6	36.8	-	44.6	53.9	9.3	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (4.0 m / 3.0 m) = 2.5 dB
10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

*1) Not Out of Band emission(Leakage Power)

Radiated Spurious Emission
(Reference Plot for band-edge)

Report No. 13097799H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.1
Date June 18, 2020
Temperature / Humidity 23 deg. C / 68 % RH
Engineer Takafumi Noguchi
(1 GHz - 26.5 GHz)
Mode Tx BT LE 1M-PHY 2480 MHz

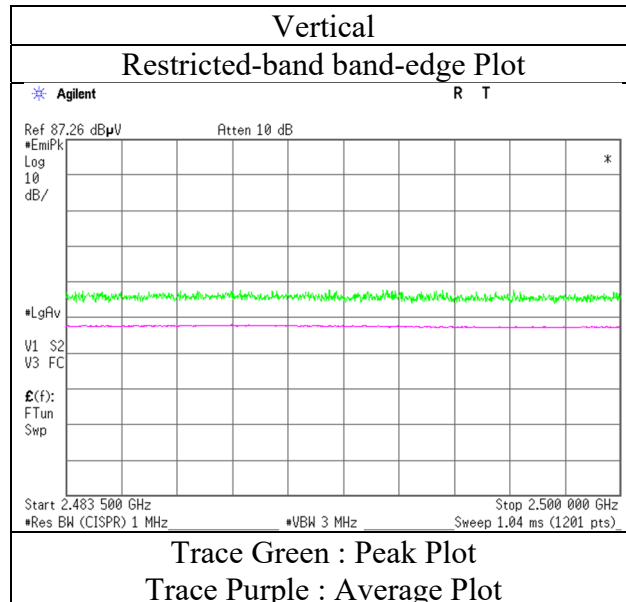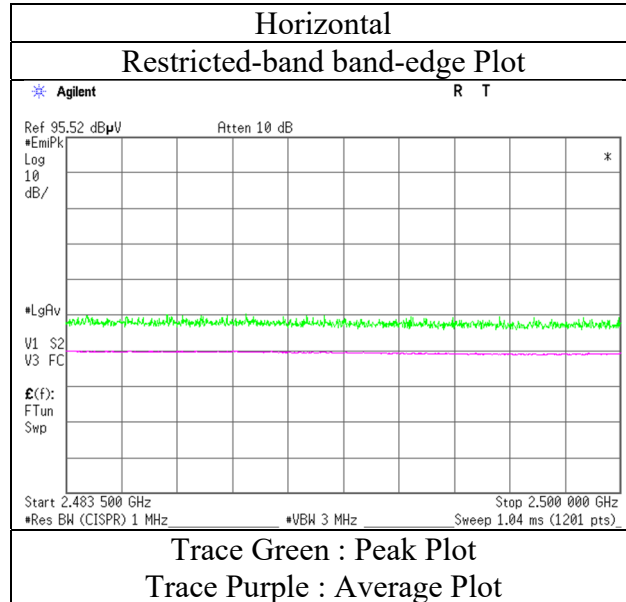

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Report No. 13097799H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.1 No.1
Date June 18, 2020 June 19, 2020
Temperature / Humidity 23 deg. C / 68 % RH 24 deg. C / 57 % RH
Engineer Takafumi Noguchi Junki Nagatomi
(1 GHz - 26.5 GHz) (Below 1 GHz)
Mode Tx BT LE 2M-PHY 2402 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	40.276	QP	22.5	14.5	7.6	28.6	-	16.0	40.0	24.0	
Hori.	80.222	QP	22.3	6.8	8.3	28.6	-	8.9	40.0	31.1	
Hori.	149.799	QP	22.1	14.9	9.2	28.3	-	17.9	43.5	25.6	
Hori.	300.031	QP	21.7	13.4	10.7	27.8	-	18.1	46.0	27.9	
Hori.	500.707	QP	22.5	17.5	12.3	29.2	-	23.1	46.0	22.9	
Hori.	899.877	QP	22.2	21.7	14.7	29.0	-	29.6	46.0	16.4	
Hori.	2390.000	PK	45.6	27.6	3.2	36.5	-	39.9	73.9	34.1	
Hori.	4804.000	PK	44.8	31.5	5.4	36.0	-	45.7	73.9	28.2	
Hori.	7206.000	PK	43.9	36.2	6.3	36.2	-	50.2	73.9	23.7	
Hori.	9608.000	PK	43.0	38.5	7.5	36.7	-	52.3	73.9	21.6	Floor noise
Hori.	2390.000	AV	36.5	27.6	3.2	36.5	2.4	33.2	53.9	20.7	*1)
Hori.	4804.000	AV	37.2	31.5	5.4	36.0	2.4	40.5	53.9	13.5	
Hori.	7206.000	AV	36.6	36.2	6.3	36.2	2.4	45.3	53.9	8.6	
Hori.	9608.000	AV	34.7	38.5	7.5	36.7	-	44.0	53.9	9.9	Floor noise
Vert.	40.222	QP	22.6	14.5	7.6	28.6	-	16.1	40.0	23.9	
Vert.	80.489	QP	22.3	6.8	8.3	28.6	-	8.9	40.0	31.1	
Vert.	149.793	QP	22.1	14.9	9.2	28.3	-	17.9	43.5	25.6	
Vert.	300.131	QP	21.6	13.4	10.7	27.8	-	18.0	46.0	28.0	
Vert.	499.988	QP	22.4	17.5	12.3	29.2	-	23.0	46.0	23.1	
Vert.	899.895	QP	22.3	21.7	14.7	29.0	-	29.7	46.0	16.3	
Vert.	2390.000	PK	44.5	27.6	3.2	36.5	-	38.7	73.9	35.2	
Vert.	4804.000	PK	44.1	31.5	5.4	36.0	-	45.0	73.9	28.9	
Vert.	7206.000	PK	44.3	36.2	6.3	36.2	-	50.6	73.9	23.3	
Vert.	9608.000	PK	43.6	38.5	7.5	36.7	-	52.9	73.9	21.0	Floor noise
Vert.	2390.000	AV	36.6	27.6	3.2	36.5	2.4	33.3	53.9	20.6	*1)
Vert.	4804.000	AV	36.6	31.5	5.4	36.0	2.4	39.8	53.9	14.1	
Vert.	7206.000	AV	36.5	36.2	6.3	36.2	2.4	45.2	53.9	8.7	
Vert.	9608.000	AV	35.1	38.5	7.5	36.7	-	44.4	53.9	9.5	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (4.0 m / 3.0 m) = 2.5 dB
10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

*1) Not Out of Band emission(Leakage Power)



20dBc Data Sheet

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2402.000	PK	89.4	27.6	3.2	36.5	83.7	-	-	Carrier
Hori.	2400.000	PK	58.8	27.6	3.2	36.5	53.1	63.7	10.6	
Vert.	2402.000	PK	88.8	27.6	3.2	36.5	83.1	-	-	Carrier
Vert.	2400.000	PK	57.8	27.6	3.2	36.5	52.0	63.1	11.1	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Radiated Spurious Emission (Reference Plot for band-edge)

Report No.	13097799H
Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.1
Date	June 18, 2020
Temperature / Humidity	23 deg. C / 68 % RH
Engineer	Takafumi Noguchi
	(1 GHz - 26.5 GHz)
Mode	Tx BT LE 2M-PHY 2402 MHz

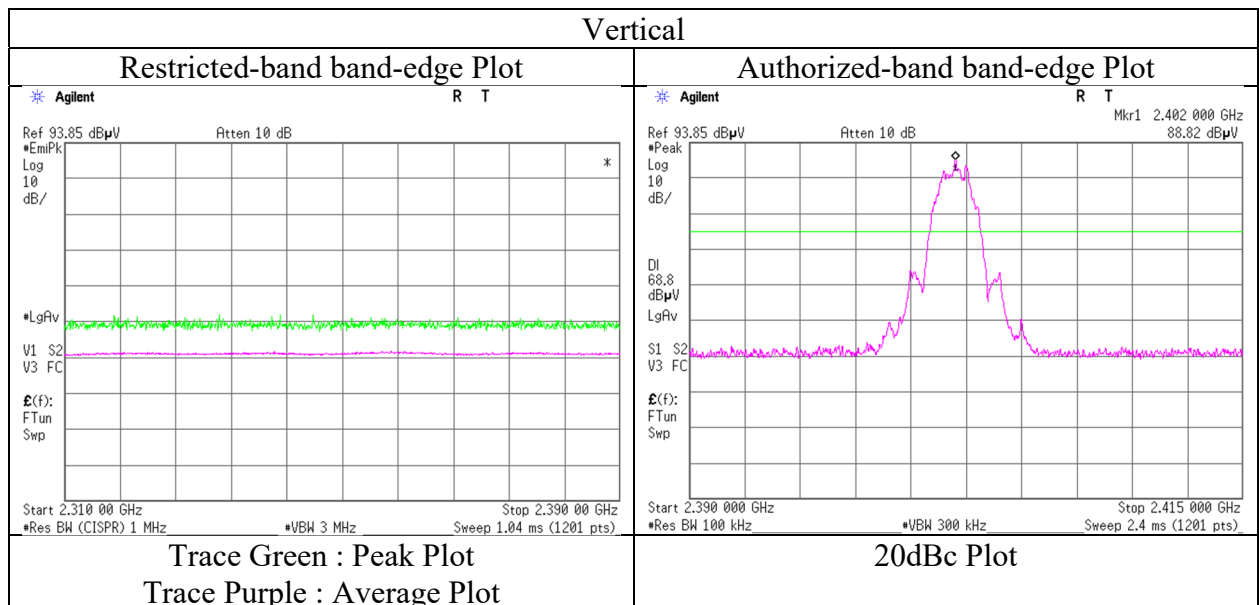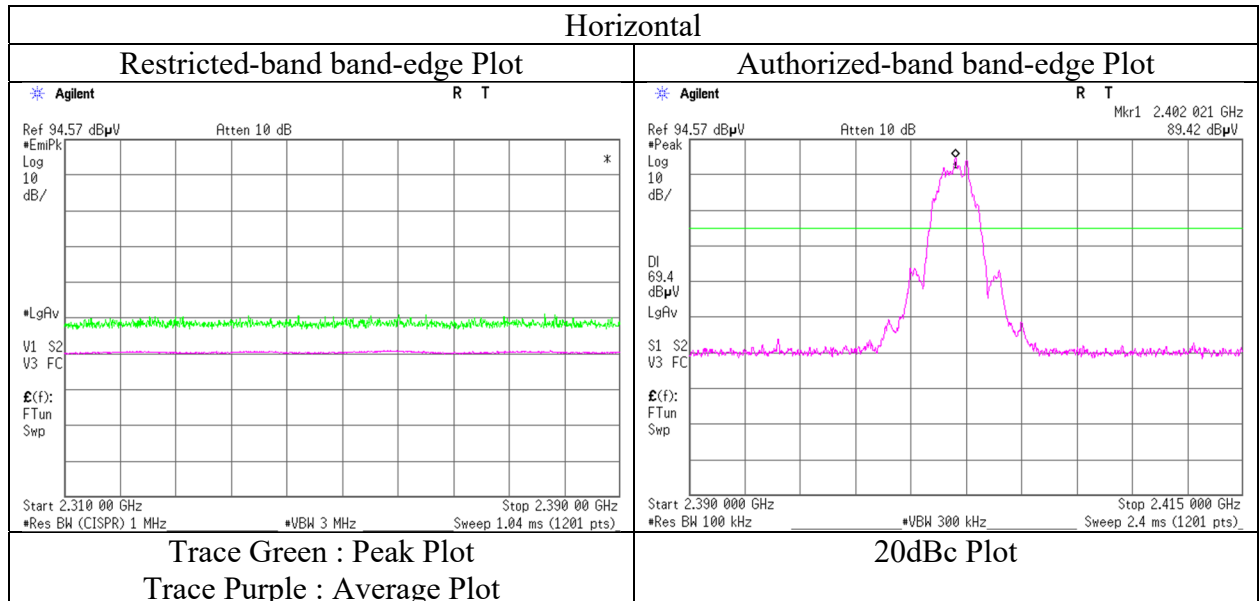

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.

Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Report No. 13097799H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.1 No.1
Date June 18, 2020 June 19, 2020
Temperature / Humidity 23 deg. C / 68 % RH 24 deg. C / 57 % RH
Engineer Takafumi Noguchi Junki Nagatomi
(1 GHz - 26.5 GHz) (Below 1 GHz)
Mode Tx BT LE 2M-PHY 2440 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	40.276	QP	22.5	14.5	7.6	28.6	-	16.0	40.0	24.0	
Hori.	80.322	QP	22.3	6.8	8.3	28.6	-	8.9	40.0	31.1	
Hori.	149.799	QP	22.0	14.9	9.2	28.3	-	17.8	43.5	25.7	
Hori.	299.982	QP	21.6	13.4	10.7	27.8	-	18.0	46.0	28.0	
Hori.	499.830	QP	22.4	17.5	12.3	29.2	-	23.0	46.0	23.1	
Hori.	899.826	QP	22.2	21.7	14.7	29.0	-	29.6	46.0	16.4	
Hori.	4880.000	PK	44.0	31.5	5.4	36.0	-	44.9	73.9	29.0	
Hori.	7320.000	PK	43.8	36.1	6.4	36.2	-	50.2	73.9	23.8	
Hori.	9760.000	PK	42.5	39.1	7.5	36.7	-	52.4	73.9	21.5	Floor noise
Hori.	4880.000	AV	35.5	31.5	5.4	36.0	2.4	38.8	53.9	15.1	
Hori.	7320.000	AV	36.4	36.1	6.4	36.2	2.4	45.1	53.9	8.8	
Hori.	9760.000	AV	34.9	39.1	7.5	36.7	-	44.8	53.9	9.1	Floor noise
Vert.	40.276	QP	22.5	14.5	7.6	28.6	-	16.0	40.0	24.0	
Vert.	80.322	QP	22.3	6.8	8.3	28.6	-	8.9	40.0	31.1	
Vert.	149.799	QP	22.0	14.9	9.2	28.3	-	17.8	43.5	25.7	
Vert.	300.182	QP	21.6	13.4	10.7	27.8	-	18.0	46.0	28.0	
Vert.	499.642	QP	22.4	17.5	12.3	29.2	-	23.0	46.0	23.1	
Vert.	899.682	QP	22.2	21.7	14.7	29.0	-	29.6	46.0	16.4	
Vert.	4880.000	PK	42.8	31.5	5.4	36.0	-	43.7	73.9	30.2	
Vert.	7320.000	PK	44.6	36.1	6.4	36.2	-	50.9	73.9	23.0	
Vert.	9760.000	PK	42.3	39.1	7.5	36.7	-	52.2	73.9	21.7	Floor noise
Vert.	4880.000	AV	35.8	31.5	5.4	36.0	2.4	39.1	53.9	14.8	
Vert.	7320.000	AV	37.1	36.1	6.4	36.2	2.4	45.8	53.9	8.1	
Vert.	9760.000	AV	35.1	39.1	7.5	36.7	-	45.0	53.9	8.9	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (4.0 m / 3.0 m) = 2.5 dB
10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Report No. 13097799H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.1 No.1
Date June 18, 2020 June 19, 2020
Temperature / Humidity 23 deg. C / 68 % RH 24 deg. C / 57 % RH
Engineer Takafumi Noguchi Junki Nagatomi
(1 GHz - 26.5 GHz) (Below 1 GHz)
Mode Tx BT LE 2M-PHY 2480 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	40.276	QP	22.5	14.5	7.6	28.6	-	16.0	40.0	24.0	
Hori.	80.322	QP	22.3	6.8	8.3	28.6	-	8.9	40.0	31.1	
Hori.	149.799	QP	22.1	14.9	9.2	28.3	-	17.9	43.5	25.6	
Hori.	299.688	QP	21.6	13.4	10.7	27.8	-	18.0	46.0	28.1	
Hori.	500.732	QP	22.4	17.5	12.3	29.2	-	23.0	46.0	23.0	
Hori.	899.815	QP	22.2	21.7	14.7	29.0	-	29.6	46.0	16.4	
Hori.	2483.500	PK	48.4	27.5	3.3	36.5	-	42.6	73.9	31.3	
Hori.	4960.000	PK	43.2	31.5	5.5	36.0	-	44.2	73.9	29.7	
Hori.	7440.000	PK	44.2	36.4	6.5	36.2	-	50.9	73.9	23.0	
Hori.	9920.000	PK	42.7	38.8	7.6	36.8	-	52.3	73.9	21.6	Floor noise
Hori.	2483.500	AV	40.4	27.5	3.3	36.5	2.4	37.0	53.9	16.9	*1)
Hori.	4960.000	AV	36.0	31.5	5.5	36.0	2.4	39.3	53.9	14.6	
Hori.	7440.000	AV	35.0	36.4	6.5	36.2	2.4	44.1	53.9	9.8	
Hori.	9920.000	AV	35.0	38.8	7.6	36.8	-	44.6	53.9	9.3	Floor noise
Vert.	40.276	QP	21.6	14.5	7.6	28.6	-	15.1	40.0	24.9	
Vert.	80.322	QP	22.4	6.8	8.3	28.6	-	9.0	40.0	31.0	
Vert.	149.799	QP	22.1	14.9	9.2	28.3	-	17.9	43.5	25.6	
Vert.	299.688	QP	21.6	13.4	10.7	27.8	-	18.0	46.0	28.1	
Vert.	500.732	QP	22.3	17.5	12.3	29.2	-	22.9	46.0	23.1	
Vert.	899.815	QP	22.2	21.7	14.7	29.0	-	29.6	46.0	16.4	
Vert.	2483.500	PK	48.1	27.5	3.3	36.5	-	42.3	73.9	31.6	
Vert.	4960.000	PK	43.7	31.5	5.5	36.0	-	44.6	73.9	29.3	
Vert.	7440.000	PK	44.6	36.4	6.5	36.2	-	51.3	73.9	22.6	
Vert.	9920.000	PK	43.1	38.8	7.6	36.8	-	52.7	73.9	21.2	Floor noise
Vert.	2483.500	AV	40.6	27.5	3.3	36.5	2.4	37.2	53.9	16.7	*1)
Vert.	4960.000	AV	35.6	31.5	5.5	36.0	2.4	39.0	53.9	15.0	
Vert.	7440.000	AV	37.3	36.4	6.5	36.2	2.4	46.3	53.9	7.6	
Vert.	9920.000	AV	35.0	38.8	7.6	36.8	-	44.6	53.9	9.3	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(4.0\text{ m} / 3.0\text{ m}) = 2.5\text{ dB}$
10 GHz - 26.5 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

*1) Not Out of Band emission(Leakage Power)

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission
(Reference Plot for band-edge)



Report No. 13097799H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.1
Date June 18, 2020
Temperature / Humidity 23 deg. C / 68 % RH
Engineer Takafumi Noguchi
(1 GHz - 26.5 GHz)
Mode Tx BT LE 2M-PHY 2480 MHz

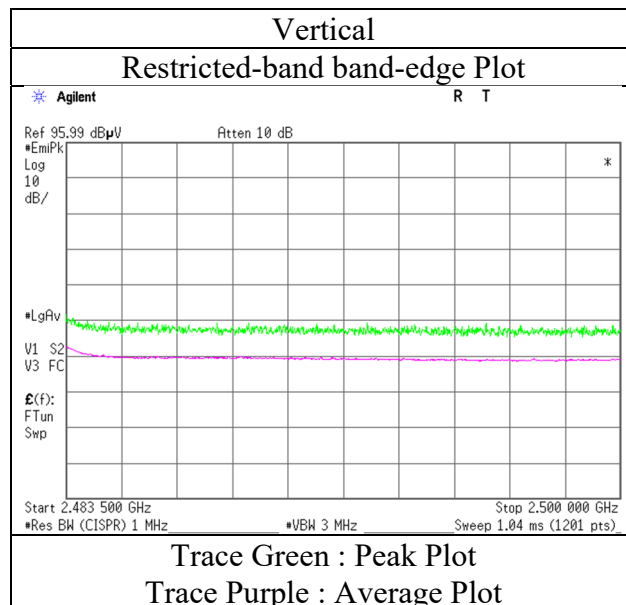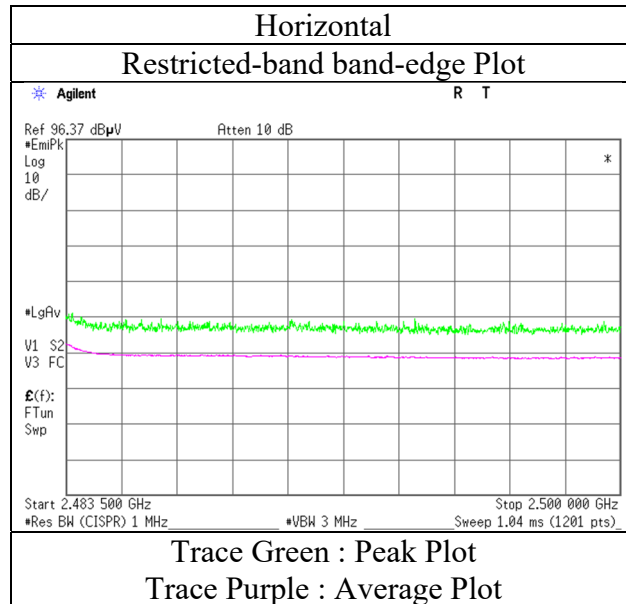

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission
(Plot data, Worst case)


Report No.	13097799H	
Test place	Ise EMC Lab.	
Semi Anechoic Chamber	No.1	No.1
Date	June 18, 2020	June 19, 2020
Temperature / Humidity	23 deg. C / 68 % RH	24 deg. C / 57 % RH
Engineer	Takafumi Noguchi	Junki Nagatomi
	(1 GHz - 26.5 GHz)	(Below 1 GHz)
Mode	Tx BT LE 2M-PHY 2402 MHz	

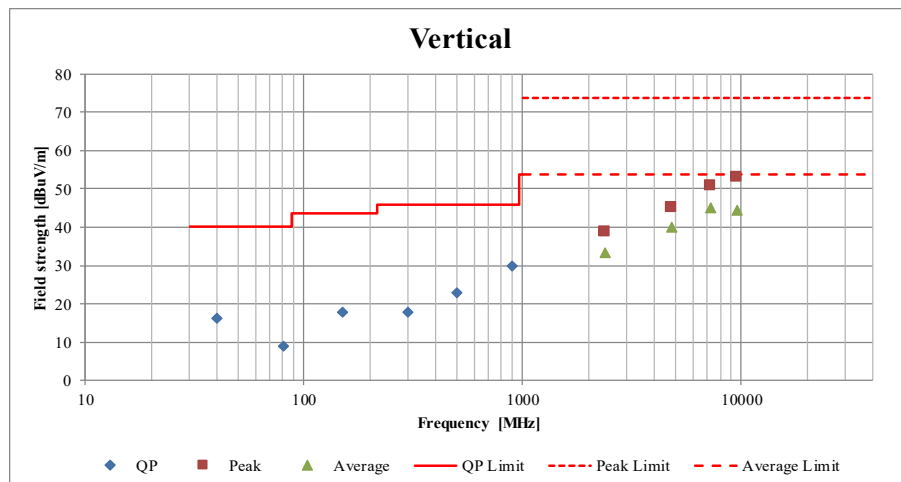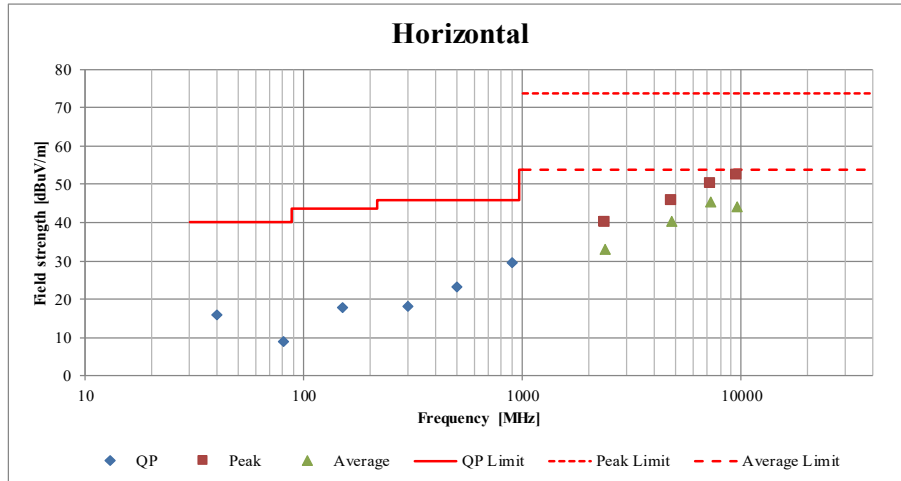

*These plots data contains sufficient number to show the trend of characteristic features for EUT.

Conducted Spurious Emission

Report No. 13097799H
 Test place Ise EMC Lab. No.6 Measurement Room
 Date May 26, 2020
 Temperature / Humidity 23 deg. C / 57 % RH
 Engineer Yuta Moriya
 Mode Tx BT LE 1M-PHY 2402 MHz

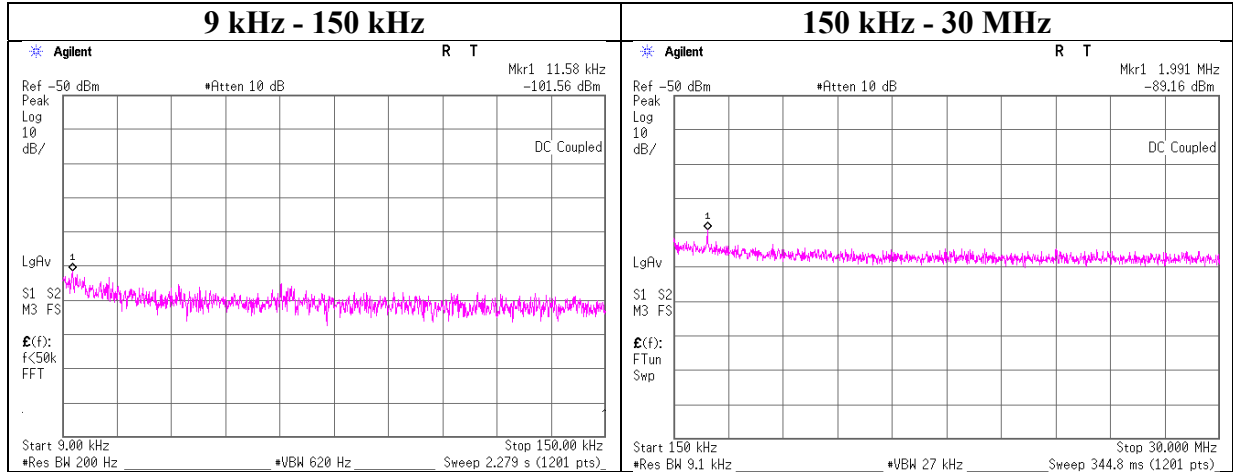

Frequency [kHz]	Reading [dBm]	Cable Loss [dB]	Attenuator Loss [dB]	Antenna Gain* [dBi]	N (Number of Output)	EIRP [dBm]	Distance [m]	Ground bounce [dB]	E (field strength) [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
11.58	-101.6	1.79	10.1	2.0	1	-87.7	300	6.0	-26.5	46.3	72.8	
1991.00	-89.2	1.79	10.1	2.0	1	-75.3	30	6.0	5.9	29.5	23.6	

$$E \text{ [dBuV/m]} = \text{EIRP [dBm]} - 20 \log(\text{Distance [m]}) + \text{Ground bounce [dB]} + 104.8 \text{ [dBuV/m]}$$

$$\text{EIRP [dBm]} = \text{Reading [dBm]} + \text{Cable loss [dB]} + \text{Attenuator Loss [dB]} + \text{Antenna gain [dBi]} + 10 * \log(N)$$

N: Number of output

*2.0 dBi was applied to the test result based on ANSI C63.10 since antenna gain was less than 2.0 dBi.

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Conducted Spurious Emission

Report No. 13097799H
 Test place Ise EMC Lab. No.6 Measurement Room
 Date May 26, 2020
 Temperature / Humidity 23 deg. C / 57 % RH
 Engineer Yuta Moriya
 Mode Tx BT LE 1M-PHY 2440 MHz

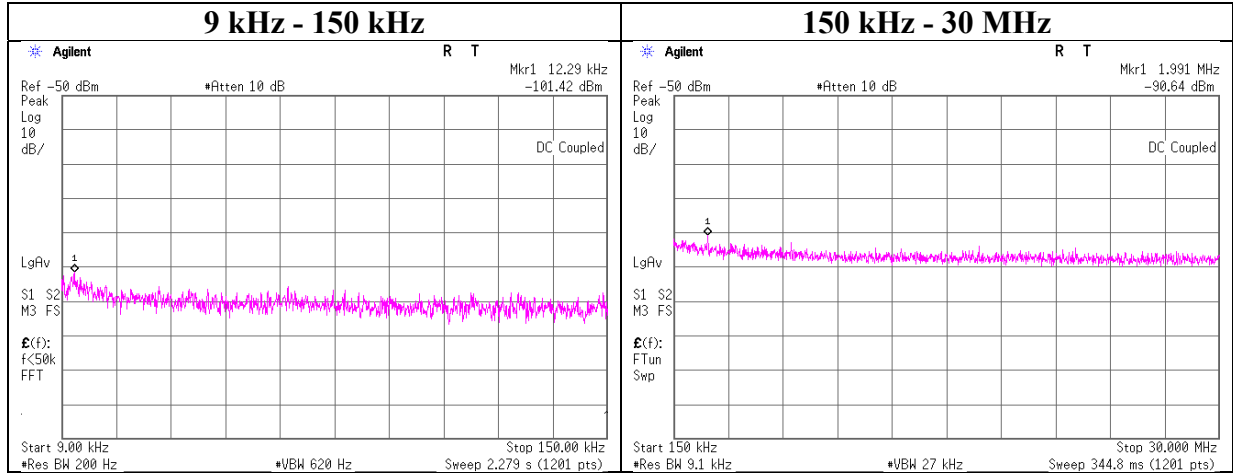

Frequency [kHz]	Reading [dBm]	Cable Loss [dB]	Attenuator Loss [dB]	Antenna Gain* [dBi]	N (Number of Output)	EIRP [dBm]	Distance [m]	Ground bounce [dB]	E (field strength) [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
12.29	-101.4	1.80	10.1	2.0	1	-87.6	300	6.0	-26.3	45.8	72.1	
1991.00	-90.6	1.80	10.1	2.0	1	-76.8	30	6.0	4.5	29.5	25.1	

$$E \text{ [dBuV/m]} = \text{EIRP [dBm]} - 20 \log(\text{Distance [m]}) + \text{Ground bounce [dB]} + 104.8 \text{ [dBuV/m]}$$

$$\text{EIRP [dBm]} = \text{Reading [dBm]} + \text{Cable loss [dB]} + \text{Attenuator Loss [dB]} + \text{Antenna gain [dBi]} + 10 * \log(N)$$

N: Number of output

*2.0 dBi was applied to the test result based on ANSI C63.10 since antenna gain was less than 2.0 dBi.

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Conducted Spurious Emission

Report No. 13097799H
 Test place Ise EMC Lab. No.6 Measurement Room
 Date May 26, 2020
 Temperature / Humidity 23 deg. C / 57 % RH
 Engineer Yuta Moriya
 Mode Tx BT LE 1M-PHY 2480 MHz

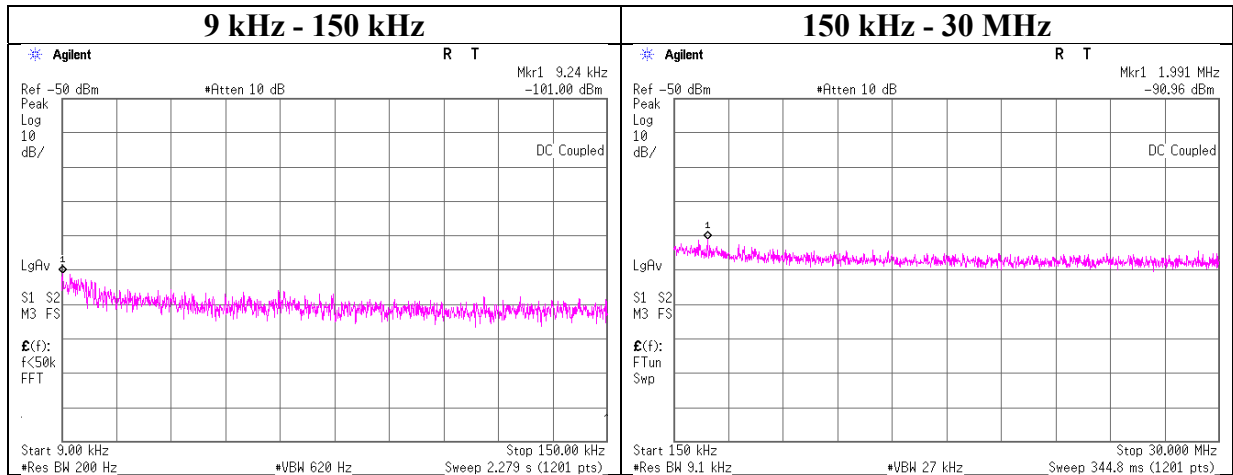

Frequency [kHz]	Reading [dBm]	Cable Loss [dB]	Attenuator Loss [dB]	Antenna Gain* [dBi]	N (Number of Output)	EIRP [dBm]	Distance [m]	Ground bounce [dB]	E (field strength) [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
9.24	-101.0	1.81	10.1	2.0	1	-87.1	300	6.0	-25.9	48.2	74.1	
1991.00	-91.0	1.81	10.1	2.0	1	-77.1	30	6.0	4.2	29.5	25.4	

$$E \text{ [dBuV/m]} = \text{EIRP [dBm]} - 20 \log(\text{Distance [m]}) + \text{Ground bounce [dB]} + 104.8 \text{ [dBuV/m]}$$


$$\text{EIRP [dBm]} = \text{Reading [dBm]} + \text{Cable loss [dB]} + \text{Attenuator Loss [dB]} + \text{Antenna gain [dBi]} + 10 * \log(N)$$

N: Number of output

*2.0 dBi was applied to the test result based on ANSI C63.10 since antenna gain was less than 2.0 dBi.

Conducted Spurious Emission

Report No. 13097799H
 Test place Ise EMC Lab. No.6 Measurement Room
 Date May 27, 2020
 Temperature / Humidity 23 deg. C / 64 % RH
 Engineer Yuta Moriya
 Mode Tx BT LE 2M-PHY 2402 MHz

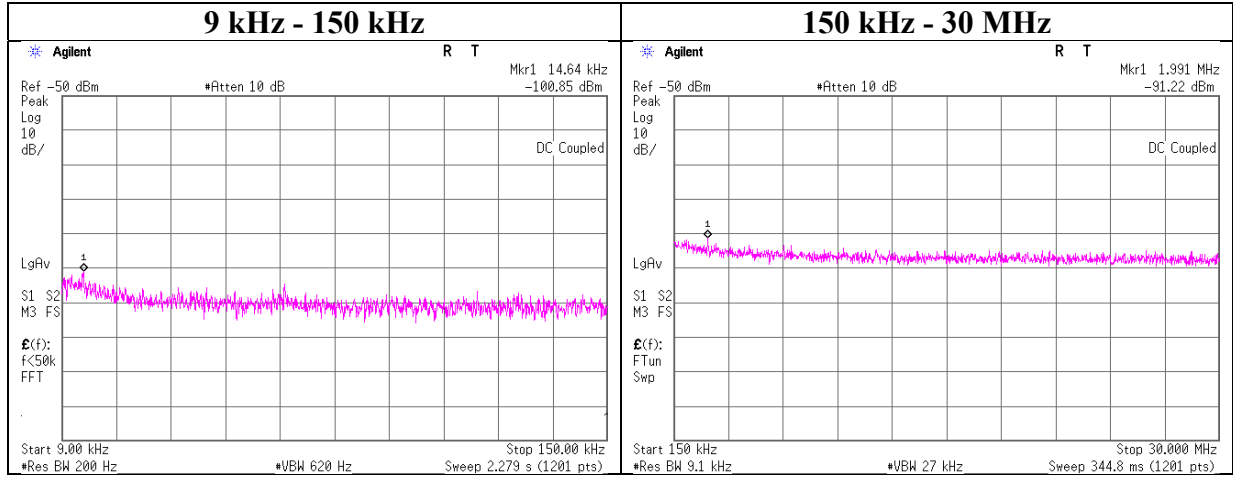

Frequency [kHz]	Reading [dBm]	Cable Loss [dB]	Attenuator Loss [dB]	Antenna Gain* [dBi]	N (Number of Output)	EIRP [dBm]	Distance [m]	Ground bounce [dB]	E (field strength) [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
14.64	-100.9	1.79	10.1	2.0	1	-87.0	300	6.0	-25.7	44.2	69.9	
1991.00	-91.2	1.79	10.1	2.0	1	-77.4	30	6.0	3.9	29.5	25.7	

$$E \text{ [dBuV/m]} = \text{EIRP [dBm]} - 20 \log(\text{Distance [m]}) + \text{Ground bounce [dB]} + 104.8 \text{ [dBuV/m]}$$

$$\text{EIRP [dBm]} = \text{Reading [dBm]} + \text{Cable loss [dB]} + \text{Attenuator Loss [dB]} + \text{Antenna gain [dBi]} + 10 * \log(N)$$

N: Number of output

*2.0 dBi was applied to the test result based on ANSI C63.10 since antenna gain was less than 2.0 dBi.

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Conducted Spurious Emission

Report No. 13097799H
 Test place Ise EMC Lab. No.6 Measurement Room
 Date May 27, 2020
 Temperature / Humidity 23 deg. C / 64 % RH
 Engineer Yuta Moriya
 Mode Tx BT LE 2M-PHY 2440 MHz

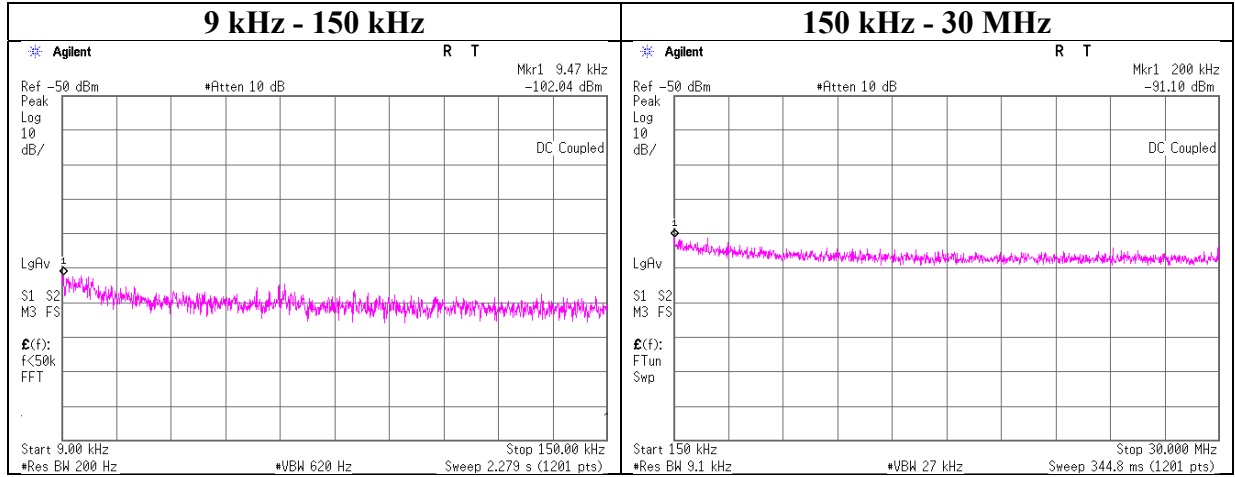

Frequency [kHz]	Reading [dBm]	Cable Loss [dB]	Attenuator Loss [dB]	Antenna Gain* [dBi]	N (Number of Output)	EIRP [dBm]	Distance [m]	Ground bounce [dB]	E (field strength) [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
9.47	-102.0	1.80	10.1	2.0	1	-88.2	300	6.0	-26.9	48.0	74.9	
200.00	-91.1	1.80	10.1	2.0	1	-77.2	300	6.0	-16.0	21.5	37.5	

$$E \text{ [dBuV/m]} = \text{EIRP [dBm]} - 20 \log (\text{Distance [m]}) + \text{Ground bounce [dB]} + 104.8 \text{ [dBuV/m]}$$

$$\text{EIRP [dBm]} = \text{Reading [dBm]} + \text{Cable loss [dB]} + \text{Attenuator Loss [dB]} + \text{Antenna gain [dBi]} + 10 * \log (N)$$

N: Number of output

*2.0 dBi was applied to the test result based on ANSI C63.10 since antenna gain was less than 2.0 dBi.

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Conducted Spurious Emission

Report No. 13097799H
 Test place Ise EMC Lab. No.6 Measurement Room
 Date May 27, 2020
 Temperature / Humidity 23 deg. C / 64 % RH
 Engineer Yuta Moriya
 Mode Tx BT LE 2M-PHY 2480 MHz

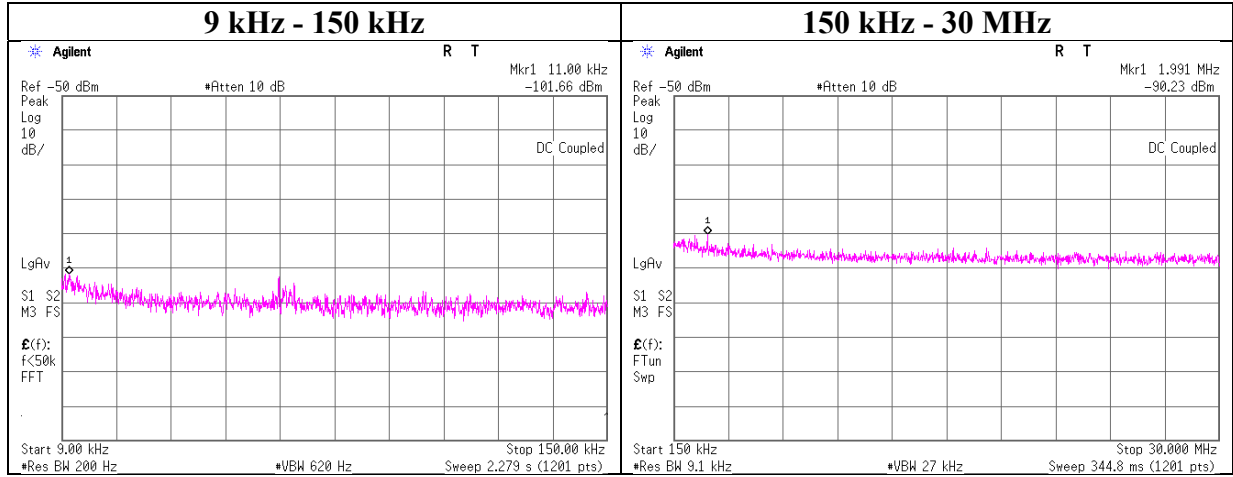

Frequency [kHz]	Reading [dBm]	Cable Loss [dB]	Attenuator Loss [dB]	Antenna Gain* [dBi]	N (Number of Output)	EIRP [dBm]	Distance [m]	Ground bounce [dB]	E (field strength) [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
11.00	-101.7	1.81	10.1	2.0	1	-87.8	300	6.0	-26.5	46.7	73.2	
1991.00	-90.2	1.81	10.1	2.0	1	-76.4	30	6.0	4.9	29.5	24.6	

$$E \text{ [dBuV/m]} = \text{EIRP [dBm]} - 20 \log(\text{Distance [m]}) + \text{Ground bounce [dB]} + 104.8 \text{ [dBuV/m]}$$

$$\text{EIRP [dBm]} = \text{Reading [dBm]} + \text{Cable loss [dB]} + \text{Attenuator Loss [dB]} + \text{Antenna gain [dBi]} + 10 * \log(N)$$

N: Number of output

*2.0 dBi was applied to the test result based on ANSI C63.10 since antenna gain was less than 2.0 dBi.

Power Density

Report No. 13097799H
Test place Ise EMC Lab. No.6 Measurement Room
Date June 25, 2020
Temperature / Humidity 23 deg. C / 57 % RH
Engineer Junya Okuno
Mode Tx BT LE

1M-PHY

Freq.	Reading	Cable Loss	Atten. Loss	Result	Limit	Margin
[MHz]	[dBm]	[dB]	[dB]	[dBm]	[dBm]	[dB]
2402	-28.36	1.79	10.01	-16.56	8.00	24.56
2440	-28.36	1.80	10.01	-16.55	8.00	24.55
2480	-28.50	1.81	10.01	-16.68	8.00	24.68

2M-PHY


Freq.	Reading	Cable Loss	Atten. Loss	Result	Limit	Margin
[MHz]	[dBm]	[dB]	[dB]	[dBm]	[dBm]	[dB]
2402	-29.50	1.79	10.01	-17.70	8.00	25.70
2440	-29.71	1.80	10.01	-17.90	8.00	25.90
2480	-29.85	1.81	10.01	-18.03	8.00	26.03

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

*The equipment and cables were not used for factor 0 dB of the data sheets.

Power Density

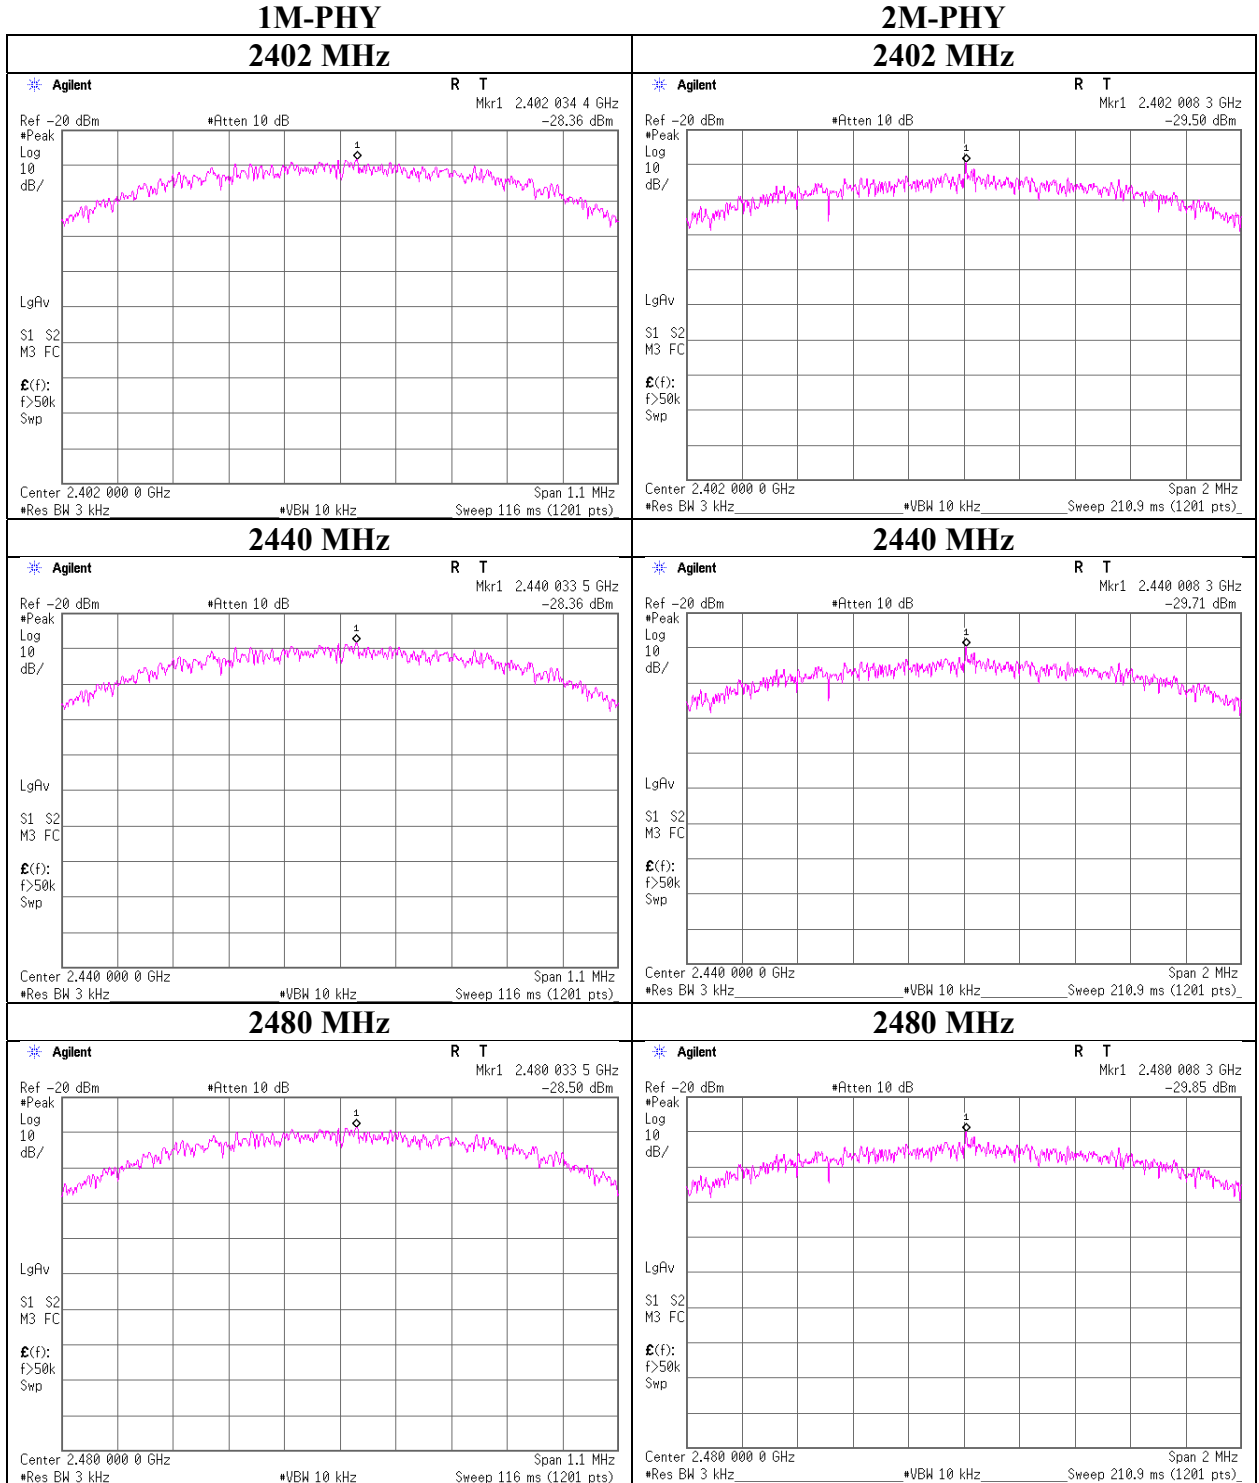

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

APPENDIX 2: Test instruments

Test equipment

Test Item	Local ID	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
AT	MSA-14	141901	Spectrum Analyzer	Keysight Technologies Inc	E4440A	MY48250080	2019/10/06	12
AT	MPM-13	141810	Power Meter	ANRITSU	ML2495A	824014	2019/10/09	12
AT	MPSE-18	141832	Power sensor	ANRITSU	MA2411B	738174	2019/10/09	12
AT	MCC-138	141410	Microwave cable	Huber+Suhner	SUCOFLEX 102	37953/2	2019/09/18	12
AT	MAT-58	141334	Attenuator(10dB)	Suhner	6810.19.A	-	2019/12/09	12
AT	MOS-14	141561	Thermo-Hygrometer	CUSTOM	CTH-201	1401	2020/01/07	12
RE	MAEC-01	141998	AC1_Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 10m	DA-06881	2020/06/08	24
RE	MOS-27	141566	Thermo-Hygrometer	CUSTOM	CTH-201	A08Q26	2020/01/07	12
RE	MMM-03	141530	Digital Tester	Fluke Corporation	FLUKE 26-3	78030621	2019/08/20	12
RE	MJM-25	142226	Measure	KOMELON	KMC-36	-	-	-
RE	MAEC-01-SVSWR	141994	AC1_Semi Anechoic Chamber(SVSWR)	TDK	Semi Anechoic Chamber 10m	DA-06881	2019/04/16	24
RE	MHA-05	141511	Horn Antenna 1-18GHz	Schwarzbeck Mess - Elektronik	BBHA9120D	253	2019/09/03	12
RE	MCC-217	141393	Microwave Cable	Junkosha	MWX221	1604S254(1 m) / 1608S088(5 m)	2019/08/06	12
RE	MPA-01	141576	Pre Amplifier	Keysight Technologies Inc	8449B	3008A01671	2020/02/20	12
RE	MHF-26	141296	High Pass Filter 3.5-18.0GHz	UL Japan	HPF SELECTOR	002	2019/09/11	12
RE	COTS-MEMI-02	178648	EMI measurement program	TSJ (Techno Science Japan)	TEPTO-DV	-	-	-
RE	MAT-08	141213	Attenuator(6dB)	Weinschel Corp	2	BK7971	2019/11/14	12
RE	KBA-05	141198	Biconical Antenna	Schwarzbeck Mess - Elektronik	VHA9103+BBA9106	2513	2020/04/22	12
RE	MCC-02	141350	Coaxial Cable	Suhner/storm/Agilent/TSJ	-	-	2019/06/27	12
RE	MTR-09	141950	EMI Test Receiver	Rohde & Schwarz	ESU26	100412	2020/06/03	12
RE	MLA-20	141264	Logperiodic Antenna(200-1000MHz)	Schwarzbeck Mess - Elektronik	VUSLP9111B	9111B-189	2020/04/22	12
RE	MPA-24	141594	Pre Amplifier	Keysight Technologies Inc	8447D	2944A10150	2020/02/10	12

*Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test item: RE: Radiated Emission test
AT: Antenna Terminal Conducted test

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124