

FCC Test Report

Equipment : Action Camera
Brand Name : JVC
Model No. : GC-XA2BU
FCC ID : ASIZXA2
Standard : 47 CFR FCC Part 15.247
Operating Band : 2400 MHz – 2483.5 MHz
FCC Classification : DTS
Applicant : JVC KENWOOD Corporation
3-12,Moriyacho,Kanagawa-ku,Yokohama-shi,
Kanagawa 221-0022, Japan
Manufacturer : Chicony Electronics Co., Ltd
No.25, Wugong 6th Rd., Wugu Dist.,
New Taipei City 248, Taiwan (R.O.C.)

The product sample received on May 03, 2013 and completely tested on May 31, 2013. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Wayne Hsu





Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Accessories	7
1.3	Support Equipment.....	7
1.4	Testing Applied Standards	7
1.5	Testing Location Information	7
1.6	Measurement Uncertainty	8
2	TEST CONFIGURATION OF EUT	9
2.1	The Worst Case Modulation Configuration	9
2.2	The Worst Case Power Setting Parameter	9
2.3	The Worst Case Measurement Configuration.....	10
2.4	Test Setup Diagram	11
3	TRANSMITTER TEST RESULT	13
3.1	AC Power-line Conducted Emissions	13
3.2	6dB Bandwidth	16
3.3	RF Output Power.....	19
3.4	Power Spectral Density	24
3.5	Transmitter Bandedge Emissions	27
3.6	Transmitter Unwanted Emissions.....	32
4	TEST EQUIPMENT AND CALIBRATION DATA	57

APPENDIX A. TEST PHOTOS

APPENDIX B. PHOTOGRAPHS OF EUT



Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.2	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	[dBuV]: 0.15MHz 30.34 (Margin 25.66dB) - AV 52.15 (Margin 13.85dB) - QP	FCC 15.207	Complied
3.2	15.247(a)	6dB Bandwidth	6dB Bandwidth Unit [MHz] 20M:17.20	≥500kHz	Complied
3.3	15.247(b)	RF Output Power (Maximum Peak Conducted Output Power)	Power [dBm]:18.35	Power [dBm]:30	Complied
3.4	15.247(d)	Power Spectral Density	PSD [dBm/100KHz]:-11.33	PSD [dBm/3kHz]:8	Complied
3.5	15.247(c)	Transmitter Radiated Bandedge Emissions	Non-Restricted Bands: 2399.94MHz: 33.52dB Restricted Bands [dBuV/m at 3m]: 2389.97MHz 72.53 (Margin 1.47dB) - PK 48.07 (Margin 5.93dB) - AV	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied
3.6	15.247(c)	Transmitter Radiated Unwanted Emissions	Restricted Bands [dBuV/m at 3m]: 270.56MHz 45.00 (Margin 1.00dB) - QP	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied

1 General Description

1.1 Information

1.1.1 RF General Information

RF General Information						
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	RF Output Power (dBm)	Co-location
2400-2483.5	b	2412-2462	1-11 [11]	1	18.27	N/A
2400-2483.5	g	2412-2462	1-11 [11]	1	18.35	N/A
2400-2483.5	n (HT20)	2412-2462	1-11 [11]	1	18.26	N/A

Note 1: RF output power specifies that Maximum Peak Conducted Output Power.
 Note 2: 802.11b uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.
 Note 3: 802.11g/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
 Note 4: Co-location, Co-location is generally defined as simultaneously transmitting (co-transmitting) antennas within 20 cm of each other. (i.e., EUT has simultaneously co-transmitting that operating 2.4GHz and 5GHz.)

1.1.2 Antenna Information

Antenna Category	
<input checked="" type="checkbox"/>	Integral antenna (antenna permanently attached)
<input type="checkbox"/>	Temporary RF connector provided
<input checked="" type="checkbox"/>	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.

Antenna General Information			
No.	Ant. Cat.	Ant. Type	Gain (dBi)
1	Integral	PIFA	4.16

1.1.3 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	<input type="checkbox"/> Production ; <input checked="" type="checkbox"/> Pre-Production ; <input type="checkbox"/> Prototype
Type of EUT	
<input checked="" type="checkbox"/>	Stand-alone
<input type="checkbox"/>	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.: ...
<input type="checkbox"/>	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.: ...
<input type="checkbox"/>	Other:

1.1.4 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle	
<input type="checkbox"/>	Operated normally mode for worst duty cycle
<input checked="" type="checkbox"/>	Operated test mode for worst duty cycle
Test Signal Duty Cycle (x)	Power Duty Factor [dB] – (10 log 1/x)
<input checked="" type="checkbox"/> 100.00% - IEEE 802.11b	0.00
<input checked="" type="checkbox"/> 98.99% - IEEE 802.11g	0.04
<input checked="" type="checkbox"/> 98.92% - IEEE 802.11n (HT20)	0.05

1.1.5 EUT Operational Condition

Supply Voltage	<input checked="" type="checkbox"/> AC mains	<input checked="" type="checkbox"/> DC	
Type of DC Source	<input type="checkbox"/> Internal DC supply	<input checked="" type="checkbox"/> External DC adapter	<input checked="" type="checkbox"/> Battery

1.2 Accessories

Accessories Information				
Battery	Brand Name	JVC	Model Name	BN-VH105
	Power Rating	3.7Vdc, 1050mAh	Type	Li-ion
USB Cable	Brand Name	VSO	Model Name	GWU1091

Note: Regarding to more detail and other information, please refer to user manual.

1.3 Support Equipment

Support Equipment- AC Conduction				
No.	Equipment	Brand Name	Model Name	Serial No.
1	Notebook	DELL	Latitudc E5520	DoC
2	USB Cable	VSO	GWU1091	---

Support Equipment- Radiated Emission				
No.	Equipment	Brand Name	Model Name	Serial No.
1	Notebook	DELL	E5520	DoC
2	USB Cable	VSO	GWU1091	---
3	Test Fixture	---	---	---

1.4 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15
- ◆ ANSI C63.10-2009
- ◆ FCC KDB 558074
- ◆ FCC KDB 662911
- ◆ FCC KDB 412172

1.5 Testing Location Information

Testing Location				
<input checked="" type="checkbox"/>	HWA YA	ADD : No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.		
		TEL : 886-3-327-3456 FAX : 886-3-327-0973		
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
RF Conducted	TH01-HY	Wei Chen	25.2°C / 56%	May 31, 2013
AC Conduction	CO04-HY	Zeus Chen	20.5°C / 51%	May 31, 2013
Radiated Emission	03CH01-WS	Haru Yang	24.5°C / 56%	May 28, 2013

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty			
Test Item		Uncertainty	Limit
AC power-line conducted emissions		±2.26 dB	N/A
Emission bandwidth, 6dB bandwidth		±1.42 %	N/A
RF output power, conducted		±0.63 dB	N/A
Power density, conducted		±0.81 dB	N/A
Unwanted emissions, conducted	30 – 1000 MHz	±0.51 dB	N/A
	1 – 18 GHz	±0.67 dB	N/A
	18 – 40 GHz	±0.83 dB	N/A
	40 – 200 GHz	N/A	N/A
All emissions, radiated	30 – 1000 MHz	±2.56 dB	N/A
	1 – 18 GHz	±3.59 dB	N/A
	18 – 40 GHz	±3.82 dB	N/A
	40 – 200 GHz	N/A	N/A
Temperature		±0.8 °C	N/A
Humidity		±3 %	N/A
DC and low frequency voltages		±3 %	N/A
Time		±1.42 %	N/A
Duty Cycle		±1.42 %	N/A

2 Test Configuration of EUT

2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing			
Modulation Mode	Transmit Chains (N _{TX})	Data Rate / MCS	Worst Data Rate / MCS
11b,1-11Mbps	1	1-11 Mbps	11 Mbps
11g,6-54Mbps	1	6-54 Mbps	6 Mbps
HT20,M0-7	1	M0-7	MCS 0




2.2 The Worst Case Power Setting Parameter

The Worst Case Power Setting Parameter (2400-2483.5MHz band)				
Test Software Version	ttermpro-BP			
Modulation Mode	N _{TX}	Test Frequency (MHz)		
		NCB: 20MHz		
		2412	2437	2462
11b,1-11Mbps	1	20	20	20
11g,6-54Mbps	1	18	20	18
HT20,M0-7	1	18	20	18


2.3 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Operating Mode Description
1	USB Charger Mode


The Worst Case Mode for Following Conformance Tests	
Tests Item	RF Output Power, Power Spectral Density, 6 dB Bandwidth
Test Condition	Conducted measurement at transmit chains
Modulation Mode	11b, 11g, HT20

The Worst Case Mode for Following Conformance Tests			
Tests Item	Transmitter Radiated Unwanted Emissions Transmitter Radiated Bandedge Emissions		
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.		
User Position	<input checked="" type="checkbox"/> EUT will be placed in fixed position. The worst planes is X.		
	<input type="checkbox"/> EUT will be placed in mobile position and operating multiple positions. EUT shall be performed two orthogonal planes.		
	<input type="checkbox"/> EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed two or three orthogonal planes.		
Operating Mode < 1GHz	<input checked="" type="checkbox"/> 1. Transmitter Mode		
Modulation Mode	11b, 11g, HT20		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			


2.4 Test Setup Diagram

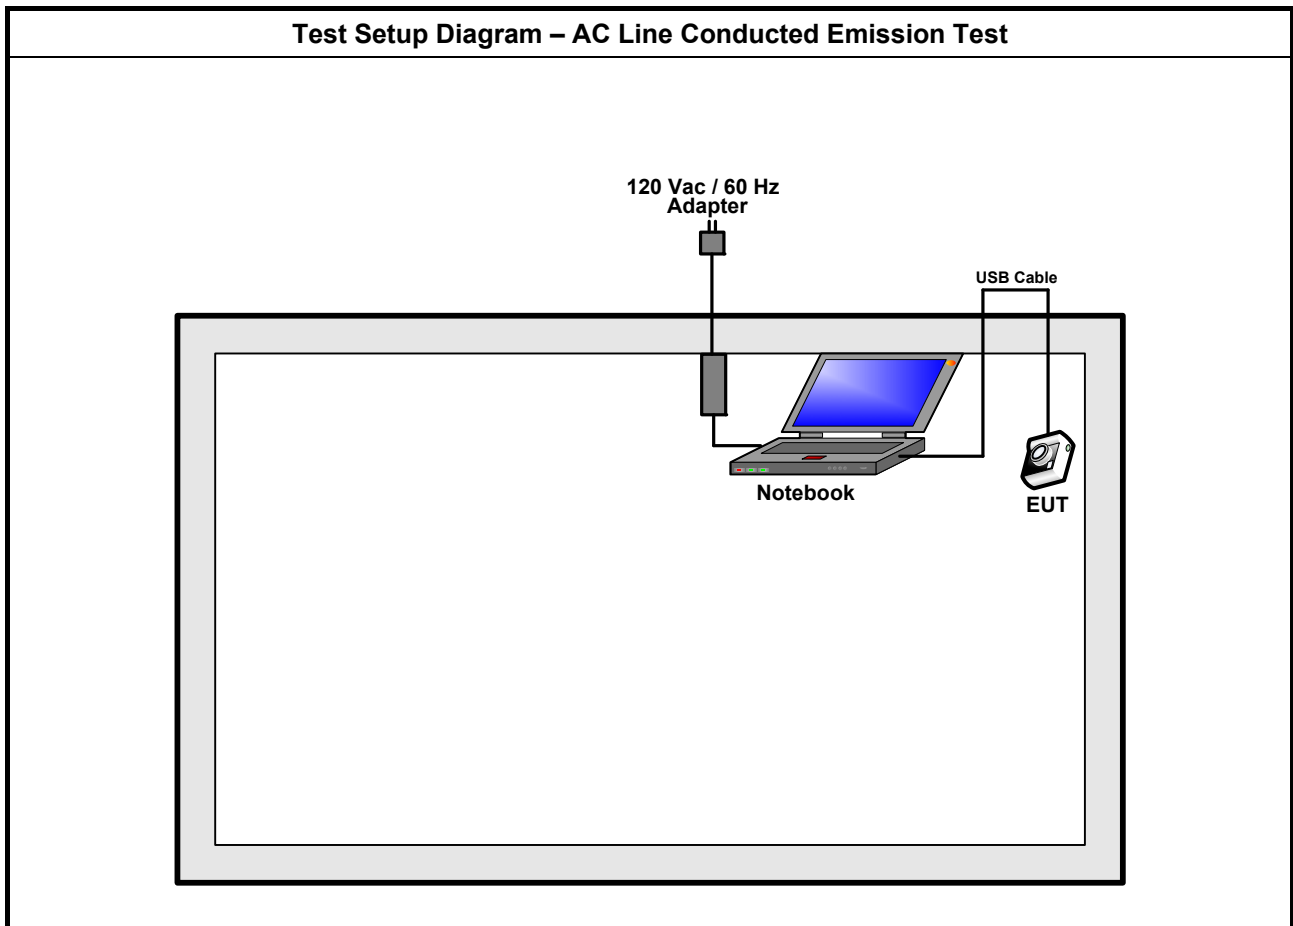

Test Setup Diagram - Radiated Test (Below 1GHz)

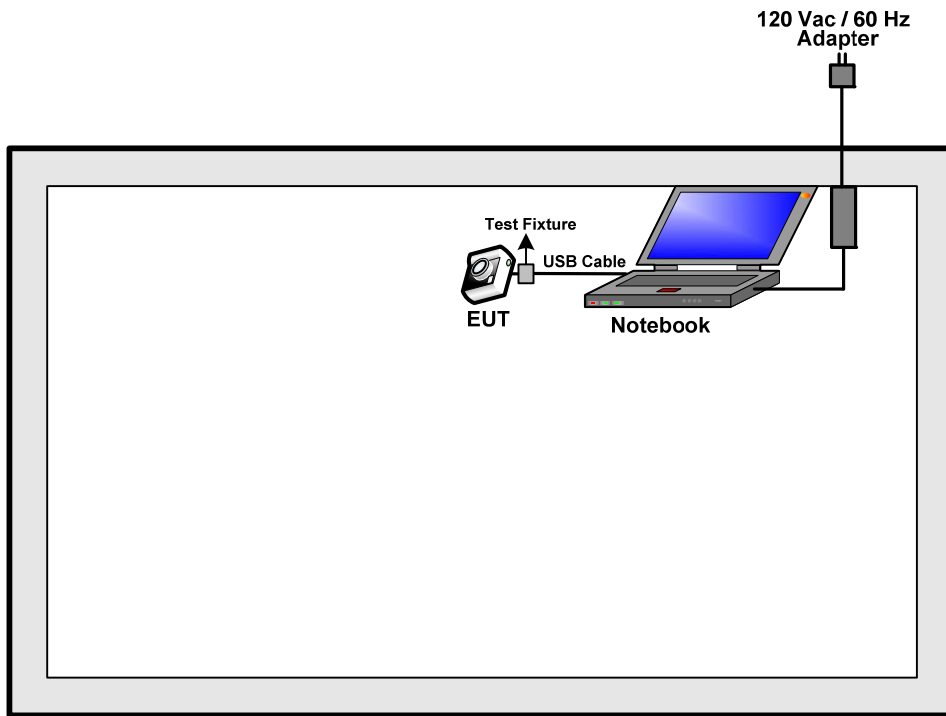

Test Setup Diagram - Radiated Test (Above 1GHz)

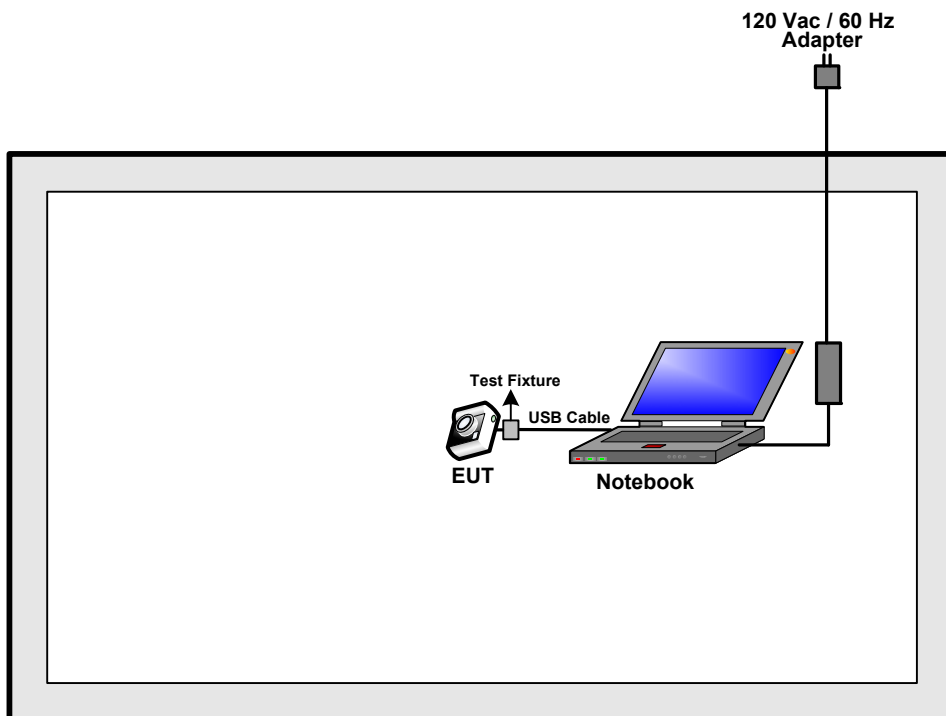

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


3.1.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

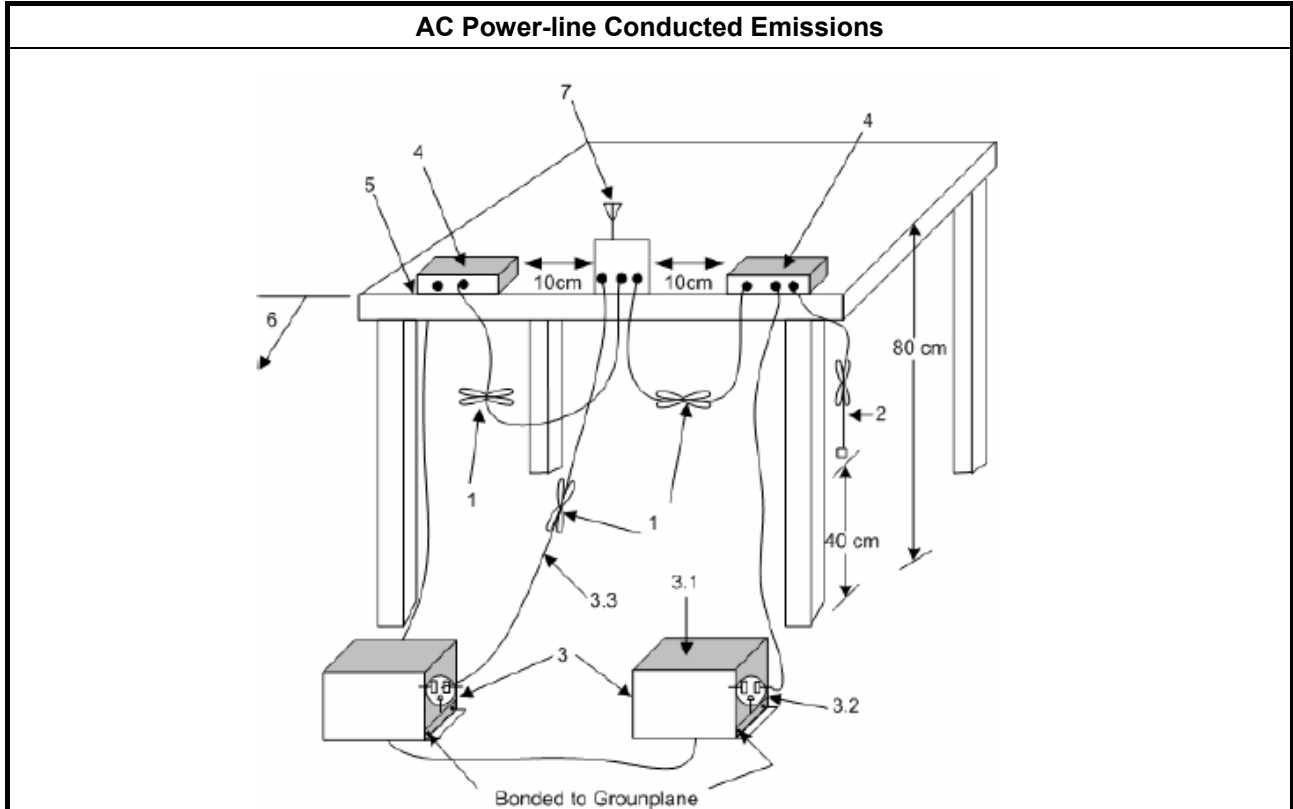


3.1.5 Test Result of AC Power-line Conducted Emissions

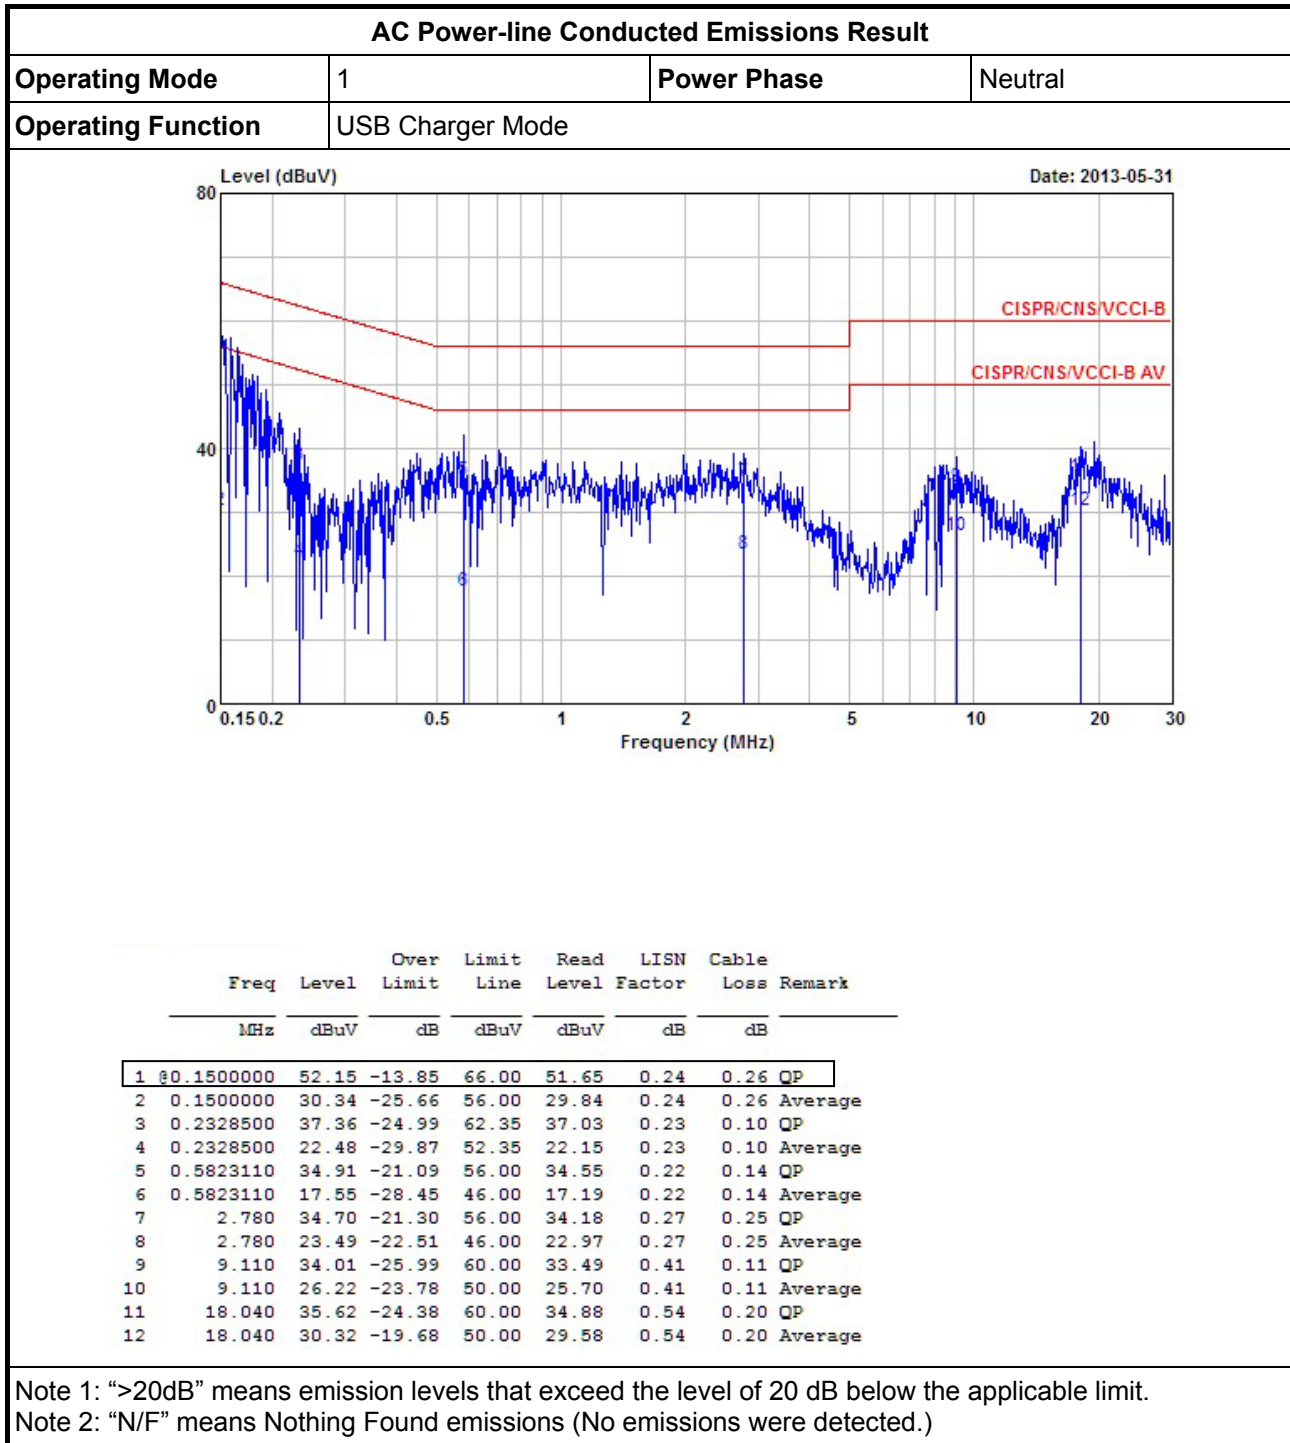

AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Line
Operating Function	USB Charger Mode		

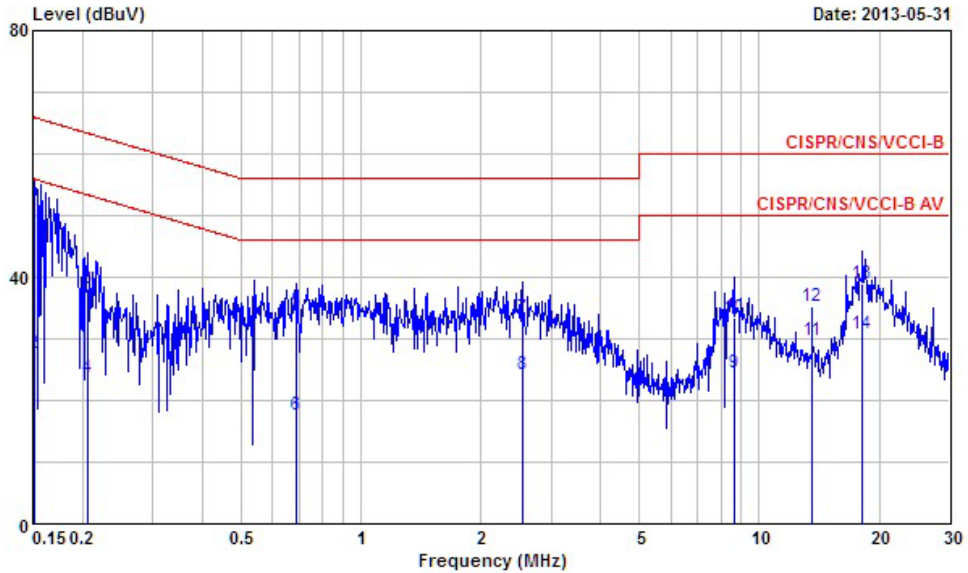

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.1515980	50.06	-15.85	65.91	49.69	0.11	0.26	QP
2	0.1515980	27.68	-28.23	55.91	27.31	0.11	0.26	Average
3	0.2061360	38.13	-25.23	63.36	37.92	0.11	0.10	QP
4	0.2061360	23.71	-29.65	53.36	23.50	0.11	0.10	Average
5	0.6899030	34.54	-21.46	56.00	34.27	0.11	0.16	QP
6	0.6899030	17.54	-28.46	46.00	17.27	0.11	0.16	Average
7	2.540	33.40	-22.60	56.00	32.99	0.14	0.27	QP
8	2.540	24.26	-21.74	46.00	23.85	0.14	0.27	Average
9	8.640	24.58	-25.42	50.00	24.23	0.23	0.12	Average
10	8.640	33.46	-26.54	60.00	33.11	0.23	0.12	QP
11	13.560	29.75	-20.25	50.00	29.31	0.27	0.17	Average
12	13.560	35.14	-24.86	60.00	34.70	0.27	0.17	QP
13	18.140	38.98	-21.02	60.00	38.48	0.30	0.20	QP
14	18.140	30.83	-19.17	50.00	30.33	0.30	0.20	Average

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

3.2 6dB Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit
Systems using digital modulation techniques:
<input checked="" type="checkbox"/> 6 dB bandwidth \geq 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> For the emission bandwidth shall be measured using one of the options below:
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.1 Option 1 for 6 dB bandwidth measurement.
<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.2 Option 2 for 6 dB bandwidth measurement.
<input type="checkbox"/> Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
<input checked="" type="checkbox"/> For conducted measurement.
<input checked="" type="checkbox"/> The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/> The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
<input type="checkbox"/> The EUT supports multiple transmit chains using options given below:
<input type="checkbox"/> Option 1: Multiple transmit chains measurements need to be performed on one of the active transmit chains (antenna outputs). All measurement had be performed on transmit chains 1.
<input type="checkbox"/> Option 2: Multiple transmit chains measurements need to be performed on each transmit chains individually (antenna outputs). All measurement had be performed on all transmit chains.

3.2.4 Test Setup

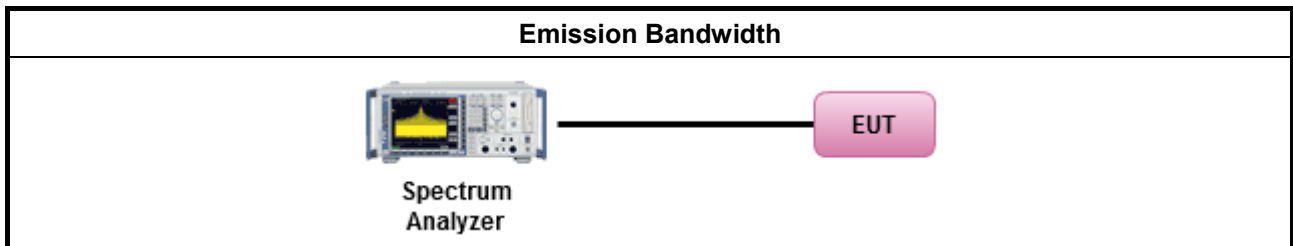


3.2.5 Test Result of Emission Bandwidth

Emission Bandwidth Result										
Condition			Emission Bandwidth (MHz)							
Modulation Mode	N _{TX}	Freq. (MHz)	99% Bandwidth				6dB Bandwidth			
			Chain-Port 1	-	-	-	Chain-Port 1	-	-	-
11b	1	2412	12.45	-	-	-	9.45	-	-	-
11b	1	2437	12.56	-	-	-	9.22	-	-	-
11b	1	2462	12.38	-	-	-	8.23	-	-	-
11g	1	2412	16.46	-	-	-	16.51	-	-	-
11g	1	2437	16.56	-	-	-	16.57	-	-	-
11g	1	2462	16.44	-	-	-	16.29	-	-	-
HT20	1	2412	17.60	-	-	-	17.16	-	-	-
HT20	1	2437	17.57	-	-	-	17.20	-	-	-
HT20	1	2462	17.49	-	-	-	16.95	-	-	-
Limit			N/A				≥500 kHz			
Result			Complied							
Note 1: N _{TX} = Number of Transmit Chains										




Worst Emission Bandwidth Plots


11b

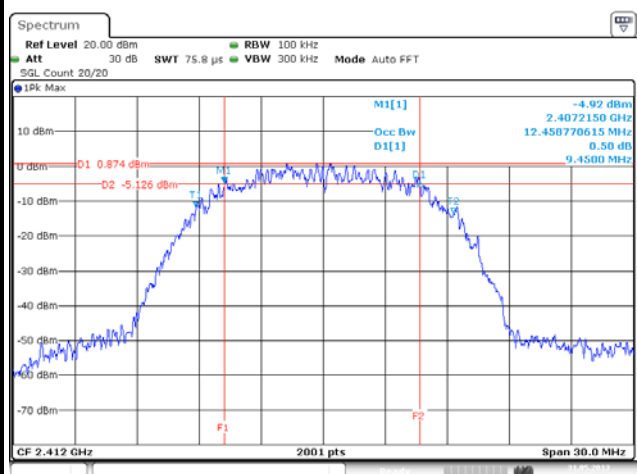

11g

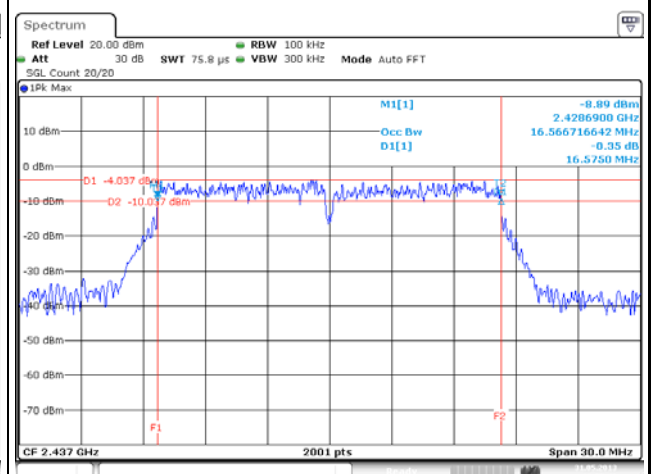

HT20

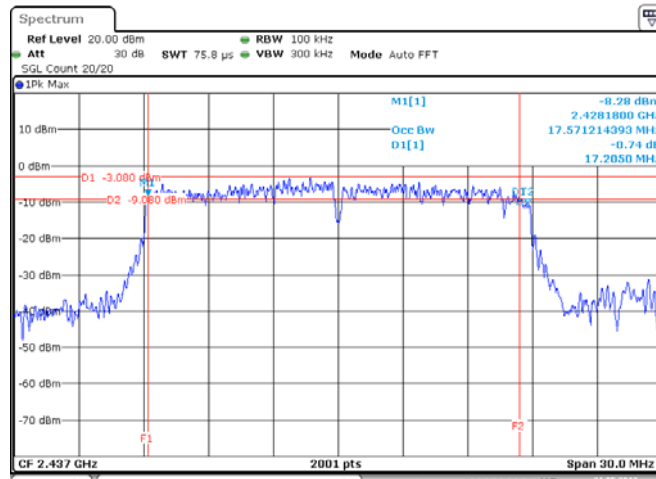

3.3 RF Output Power

3.3.1 RF Output Power Limit

RF Output Power Limit	
Maximum Peak Conducted Output Power or Maximum Conducted Output Power Limit	
<input checked="" type="checkbox"/> 2400-2483.5 MHz Band:	
<input checked="" type="checkbox"/>	If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
<input checked="" type="checkbox"/>	Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
<input type="checkbox"/>	Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
<input type="checkbox"/>	Smart antenna system (SAS):
<input type="checkbox"/>	Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
<input type="checkbox"/>	Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
<input type="checkbox"/>	Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm
e.i.r.p. Power Limit:	
<input checked="" type="checkbox"/> 2400-2483.5 MHz Band	
<input checked="" type="checkbox"/>	Point-to-multipoint systems (P2M): $P_{eirp} \leq 36$ dBm (4 W)
<input type="checkbox"/>	Point-to-point systems (P2P): $P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX}])$ dBm
<input type="checkbox"/>	Smart antenna system (SAS)
<input type="checkbox"/>	Single beam: $P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})$ dBm
<input type="checkbox"/>	Overlap beam: $P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})$ dBm
<input type="checkbox"/>	Aggregate power on all beams: $P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX} + 8])$ dBm
P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi. P_{eirp} = e.i.r.p. Power in dBm.	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Maximum Peak Conducted Output Power
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 9.1.1 Option 1 (RBW ≥ EBW method).
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 9.1.2 Option 2 (integrated band power method).
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 9.1.3 Option 2 (peak power meter for VBW ≥ DTS BW)
<input checked="" type="checkbox"/>	Maximum Conducted Output Power
	[duty cycle ≥ 98% or external video / power trigger]
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 9.2.2.2 Method AVGSA-1 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 9.2.2.3 Method AVGSA-1 Alt. (slow sweep speed)
	duty cycle < 98% and average over on/off periods with duty factor
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 9.2.2.4 Method AVGSA-2 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 9.2.2.5 Method AVGSA-2 Alt. (slow sweep speed)
	RF power meter and average over on/off periods with duty factor or gated trigger
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 9.2.3 Method AVGPM (using an RF average power meter).
<input checked="" type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/>	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
<input type="checkbox"/>	The EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
<input type="checkbox"/>	If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$

3.3.4 Test Setup

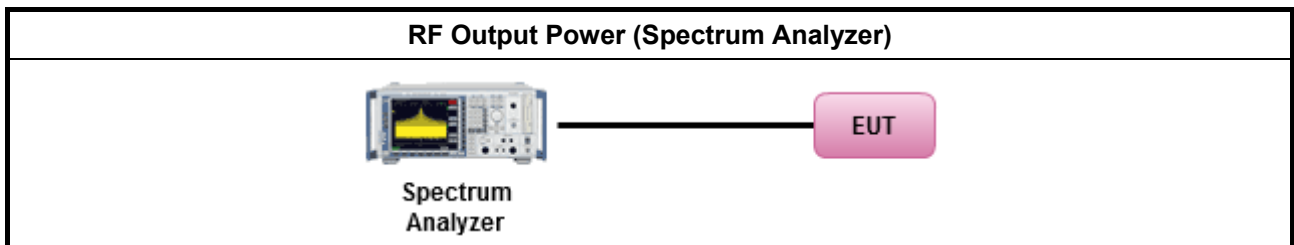

3.3.5 Directional Gain for Power Measurement

Directional Gain (DG) Result					
Transmit Chains No.		1	-	-	-
Maximum G _{ANT} (dBi)		4.16	-	-	-
Modulation Mode	DG (dBi)	N _{TX}	N _{SS} (Min.)	STBC	Array Gain (dB)
11b,1-11Mbps	4.16	1	1	-	-
11g,6-54Mbps	4.16	1	1	-	-
HT20,M0-15	4.16	1	1	-	-

Note 1: For all transmitter outputs with equal antenna gains, directional gain is to be computed as follows:
 Any transmit signals are correlated, Directional Gain = G_{ANT} + 10 log(N_{TX})
 All transmit signals are completely uncorrelated, Directional Gain = G_{ANT}

Note 2: For all transmitter outputs with unequal antenna gains, directional gain is to be computed as follows:
 Any transmit signals are correlated, Directional Gain = 10 log[(10^{G₁/20} + ... + 10^{G_N/20})² / N_{TX}]
 All transmit signals are completely uncorrelated, Directional Gain = 10 log[(10^{G₁/10} + ... + 10^{G_N/10}) / N_{TX}]

Note 3: For Spatial Multiplexing, Directional Gain (DG) = G_{ANT} + 10 log(N_{TX}/N_{SS}),
 where N_{SS} = the number of independent spatial streams data.

Note 4: For CDD transmissions, directional gain is calculated as power measurements:
 Directional Gain (DG) = G_{ANT} + Array Gain, where Array Gain is as follows:
 Array Gain = 0 dB (i.e., no array gain) for N_{TX} ≤ 4;
 Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{TX};




3.3.6 Test Result of Maximum Peak Conducted Output Power

Maximum Peak Conducted Output Power Result								
Condition			RF Output Power (dBm)					
Modulation Mode	N _{TX}	Freq. (MHz)	Chain Port 1	Sum Chain	Power Limit	DG (dBi)	EIRP Power	EIRP Limit
11b	1	2412	18.06	18.06	30	4.16	22.22	36
11b	1	2437	18.27	18.27	30	4.16	22.43	36
11b	1	2462	17.94	17.94	30	4.16	22.10	36
11g	1	2412	16.71	16.71	30	4.16	20.87	36
11g	1	2437	18.35	18.35	30	4.16	22.51	36
11g	1	2462	16.08	16.08	30	4.16	20.24	36
HT20	1	2412	16.78	16.78	30	4.16	20.94	36
HT20	1	2437	18.26	18.26	30	4.16	22.42	36
HT20	1	2462	16.18	16.18	30	4.16	20.34	36
Result			Complied					

3.3.7 Test Result of Maximum Conducted Output Power

Maximum Conducted Output Power								
Condition			RF Output Power (dBm)					
Modulation Mode	N _{TX}	Freq. (MHz)	Chain Port 1	Sum Chain	Power Limit	DG (dBi)	EIRP Power	EIRP Limit
11b	1	2412	13.81	13.81	30	4.16	17.97	36
11b	1	2437	13.89	13.89	30	4.16	18.05	36
11b	1	2462	13.40	13.40	30	4.16	17.56	36
11g	1	2412	11.75	11.75	30	4.16	15.91	36
11g	1	2437	13.43	13.43	30	4.16	17.59	36
11g	1	2462	11.19	11.19	30	4.16	15.35	36
HT20	1	2412	11.81	11.81	30	4.16	15.97	36
HT20	1	2437	13.30	13.30	30	4.16	17.46	36
HT20	1	2462	11.21	11.21	30	4.16	15.37	36
Result			Complied					

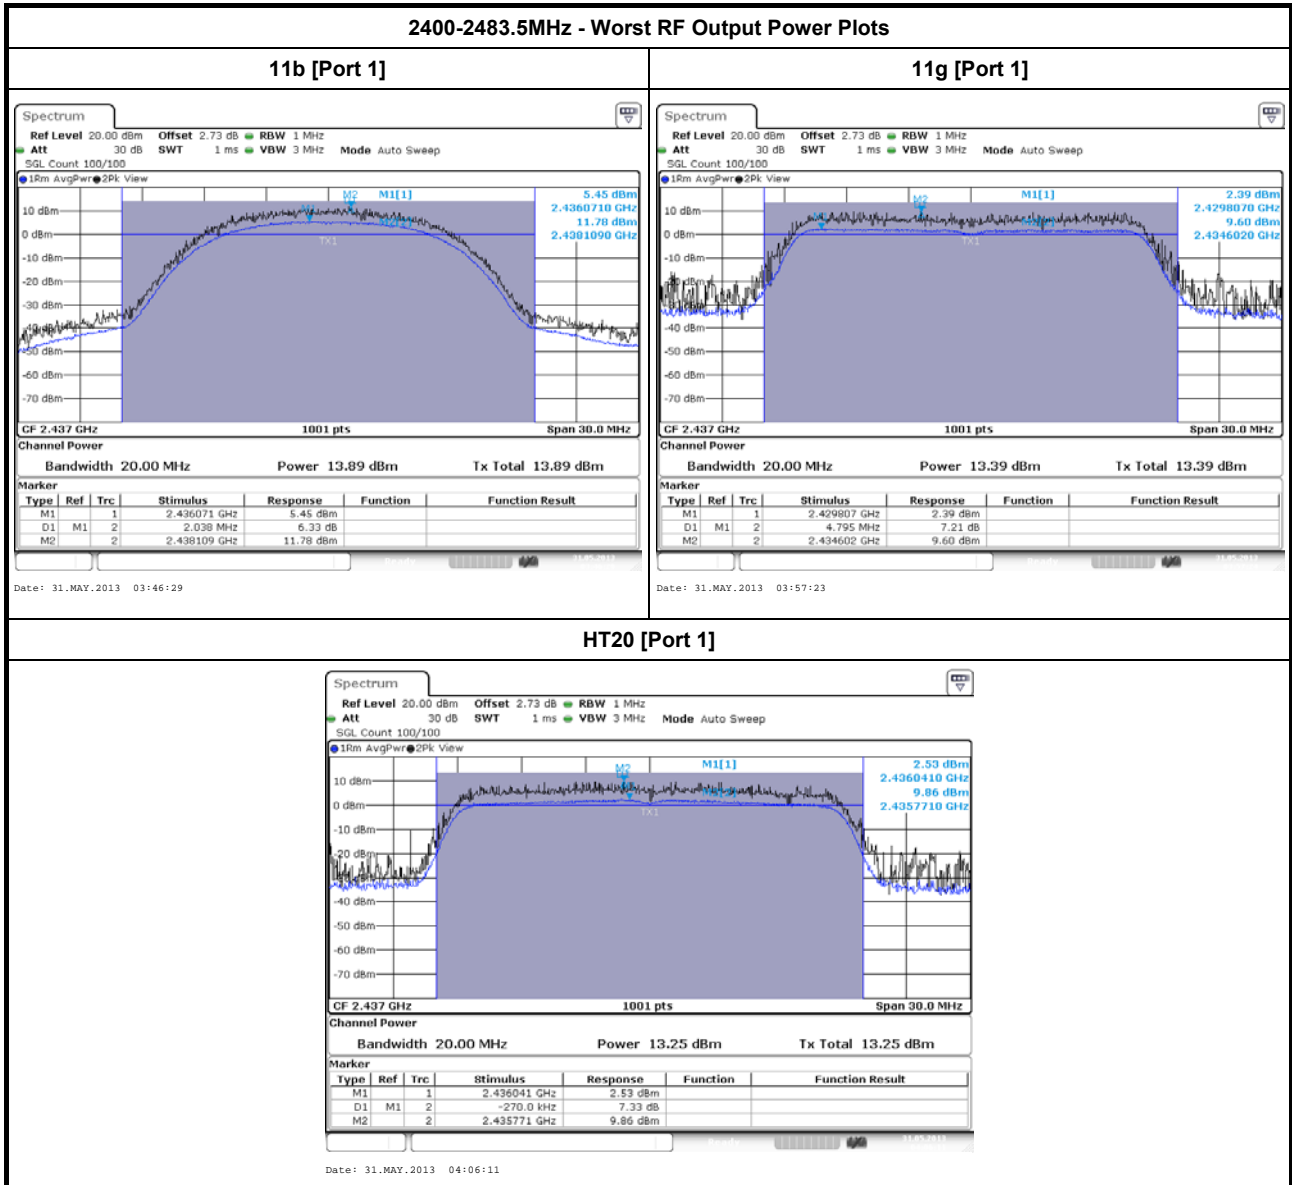

Note 1: RF Output Power Plots w/o Duty Factor

3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
<input checked="" type="checkbox"/> Power Spectral Density (PSD) \leq 8 dBm/3kHz


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 10.2 Method PKPSD (RBW=3-100kHz;detector=peak).. [duty cycle \geq 98% or external video / power trigger]
<input type="checkbox"/> Refer as FCC KDB 558074, clause 10.3 Method AVGPSD-1 (spectral trace averaging).
<input type="checkbox"/> Refer as FCC KDB 558074, clause 10.4 Method AVGPSD-1 Alt. (slow sweep speed) duty cycle $<$ 98% and average over on/off periods with duty factor
<input type="checkbox"/> Refer as FCC KDB 558074, clause 10.5 Method AVGPSD-2 (spectral trace averaging).
<input type="checkbox"/> Refer as FCC KDB 558074, clause 10.6 Method AVGPSD-2 Alt. (slow sweep speed)
<input checked="" type="checkbox"/> For conducted measurement.
<input checked="" type="checkbox"/> The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/> The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
<input type="checkbox"/> The EUT supports multiple transmit chains using options given below:
<input type="checkbox"/> Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the N_{TX} output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
<input type="checkbox"/> Option 2: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.

3.4.4 Test Setup

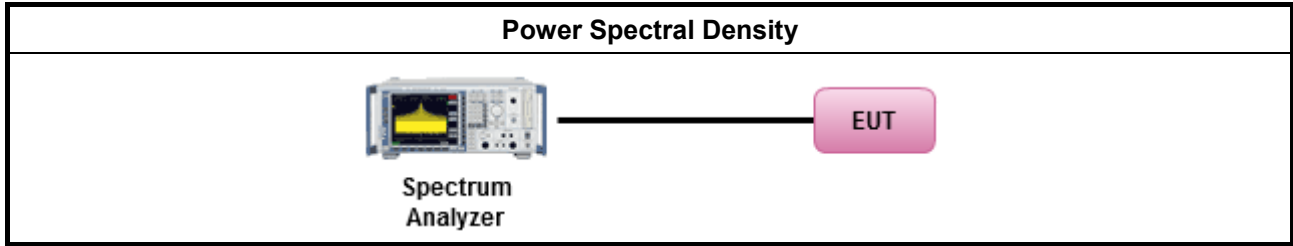

3.4.5 Test Result of Power Spectral Density


Power Spectral Density Result								
Condition			Power Spectral Density (dBm/100kHz)					
Modulation Mode	N _{TX}	Freq. (MHz)	-	-	-	-	Sum Chain	Power Limit
11b	1	2412	-	-	-	-	-11.46	8
11b	1	2437	-	-	-	-	-11.33	8
11b	1	2462	-	-	-	-	-13.02	8
11g	1	2412	-	-	-	-	-17.67	8
11g	1	2437	-	-	-	-	-16.08	8
11g	1	2462	-	-	-	-	-18.11	8
HT20	1	2412	-	-	-	-	-15.99	8
HT20	1	2437	-	-	-	-	-16.07	8
HT20	1	2462	-	-	-	-	-18.41	8
Result			Complied					

Note 1: PSD = sum each transmit chains by bin-to-bin PSD




Worst Power Spectral Density Plots


11b [Sum All Chains]

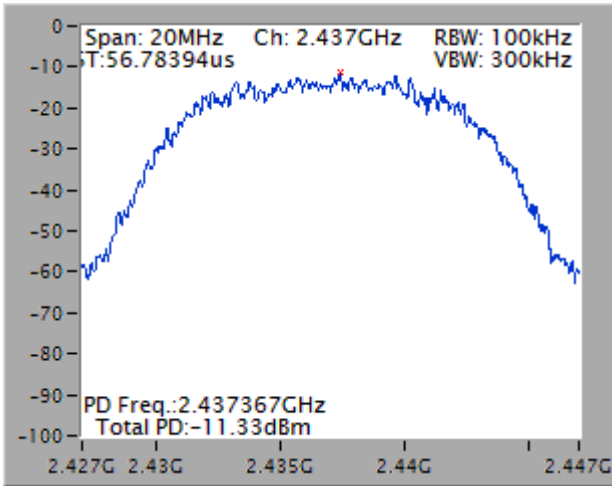

11g [Sum All Chains]

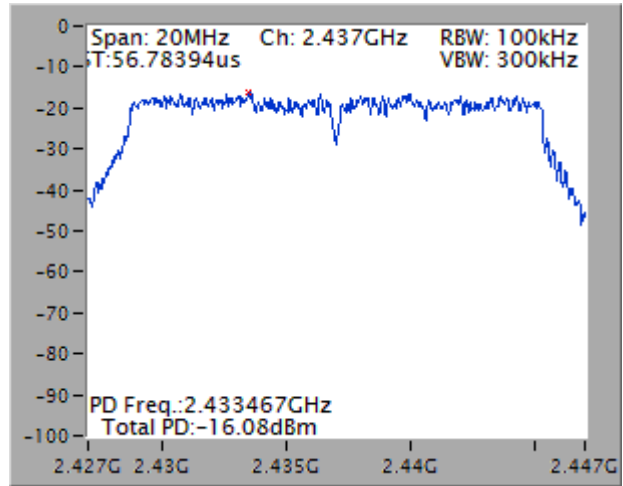


HT20 [Sum All Chains]

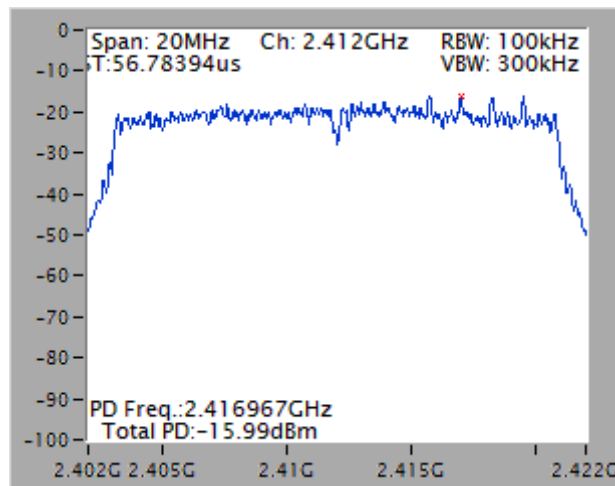

3.5 Transmitter Bandedge Emissions

3.5.1 Transmitter Radiated Bandedge Emissions Limit

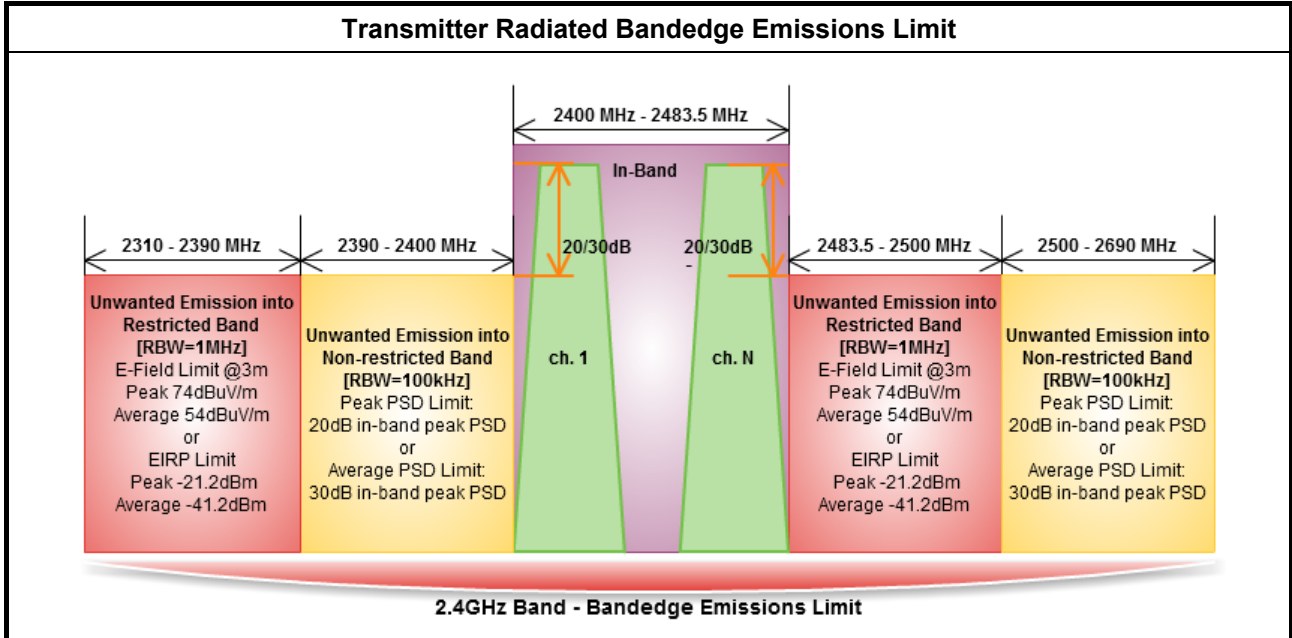

3.5.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle \geq 98 or duty factor].
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.2.2 bandedge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 11 for unwanted emissions into non-restricted bands.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 12 for unwanted emissions into restricted bands.
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 12.2.5.1 Option 1 (trace averaging for duty cycle \geq 98%)
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 12.2.5.2 Option 2 (trace averaging + duty factor).
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 12.2.5.3 Option 3 (Reduced VBW \geq 1/T).
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW \geq 1/T, where T is pulse time.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 11.3 and 12.2.4 measurement procedure peak limit.
<input checked="" type="checkbox"/>	For the transmitter bandedge emissions shall be measured using following options below:
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 13.3 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.2 for band-edge testing.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.3 for marker-delta method for band-edge measurements.
<input checked="" type="checkbox"/>	For radiated measurement, refer as FCC KDB 558074, clause 12.2.7.

Test Method	
<input type="checkbox"/>	For conducted and cabinet radiation measurement, refer as FCC KDB 558074, clause 12.2.2.
<input type="checkbox"/>	For conducted unwanted emissions into non-restricted bands (relative emission limits). Devices with multiple transmit chains: Refer as FCC KDB 662911, when testing out-of-band and spurious emissions against relative emission limits, tests may be performed on each output individually without summing or adding 10 log(N) if the measurements are made relative to the in-band emissions on the individual outputs.
<input type="checkbox"/>	For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB
<input type="checkbox"/>	For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.

3.5.4 Test Setup

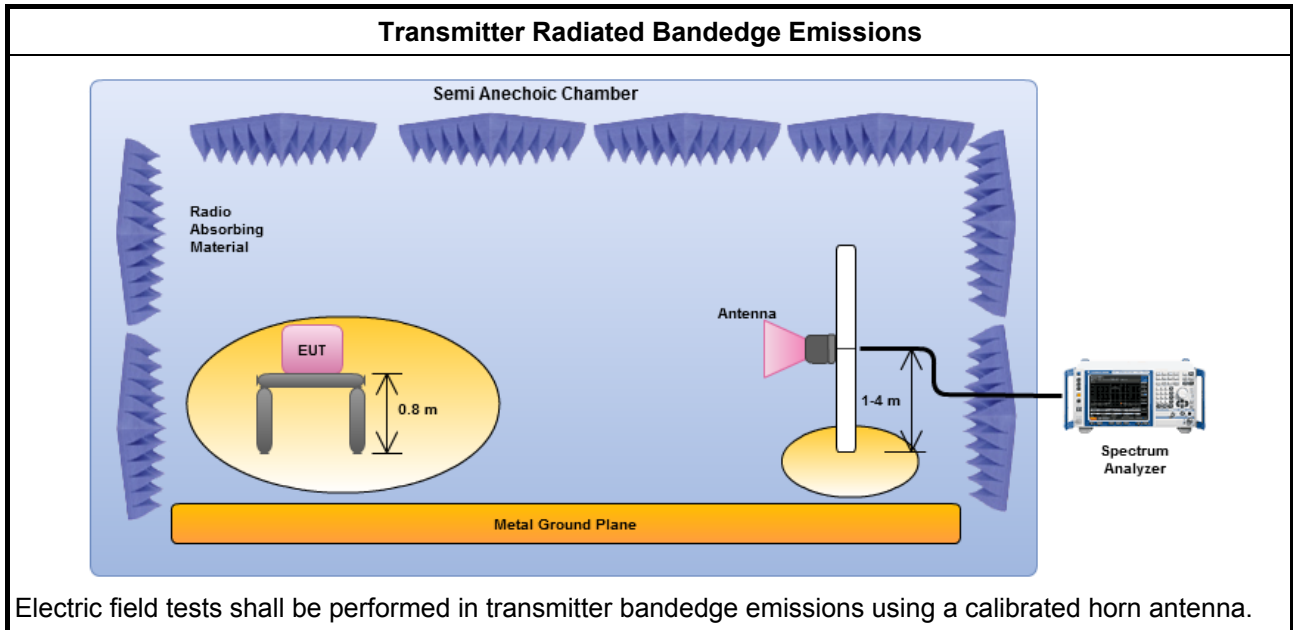

3.5.5 Transmitter Radiated Bandedge Emissions

2400-2483.5MHz Transmitter Radiated Bandedge Emissions (Non-restricted Band)								
Modulation	N _{TX}	Test Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] – [o] (dB)	Limit (dB)	Pol.
11b	1	2412	105.34	2400.00	55.41	49.93	20	V
11b	1	2462	103.51	2508.20	40.14	63.37	20	V
11g	1	2412	99.00	2399.71	65.34	33.66	20	V
11g	1	2462	98.35	2504.30	45.60	52.75	20	V
HT20,M0-7	1	2412	99.46	2399.94	65.94	33.52	20	V
HT20,M0-7	1	2462	98.69	2502.30	44.72	53.97	20	V

Note 1: Measurement worst emissions of receive antenna polarization


2400-2483.5MHz Transmitter Radiated Bandedge Emissions (Restricted Band)										
Modulation Mode	N _{TX}	Freq. (MHz)	Measure Distance (m)	Freq. (MHz) PK	Level (dBuV/m) PK	Limit (dBuV/m) PK	Freq. (MHz) AV	Level (dBuV/m) AV	Limit (dBuV/m) AV	Pol.
11b	1	2412	3	2389.97	52.28	74	2389.18	40.94	54	V
11b	1	2462	3	2483.70	54.54	74	2483.50	44.87	54	V
11g	1	2412	3	2388.06	72.53	74	2389.97	48.07	54	V
11g	1	2462	3	2485.60	72.77	74	2483.50	46.81	54	V
HT20,M0-15	1	2412	3	2388.74	72.31	74	2389.97	47.08	54	V
HT20,M0-15	1	2462	3	2484.20	72.91	74	2483.50	47.70	54	V

Note 1: Measurement worst emissions of receive antenna polarization.

3m->1m=9.54dB; 3m->1.5m=6.02dB



2400-2483.5MHz - Transmitter Radiated Bandedge Emissions Plots

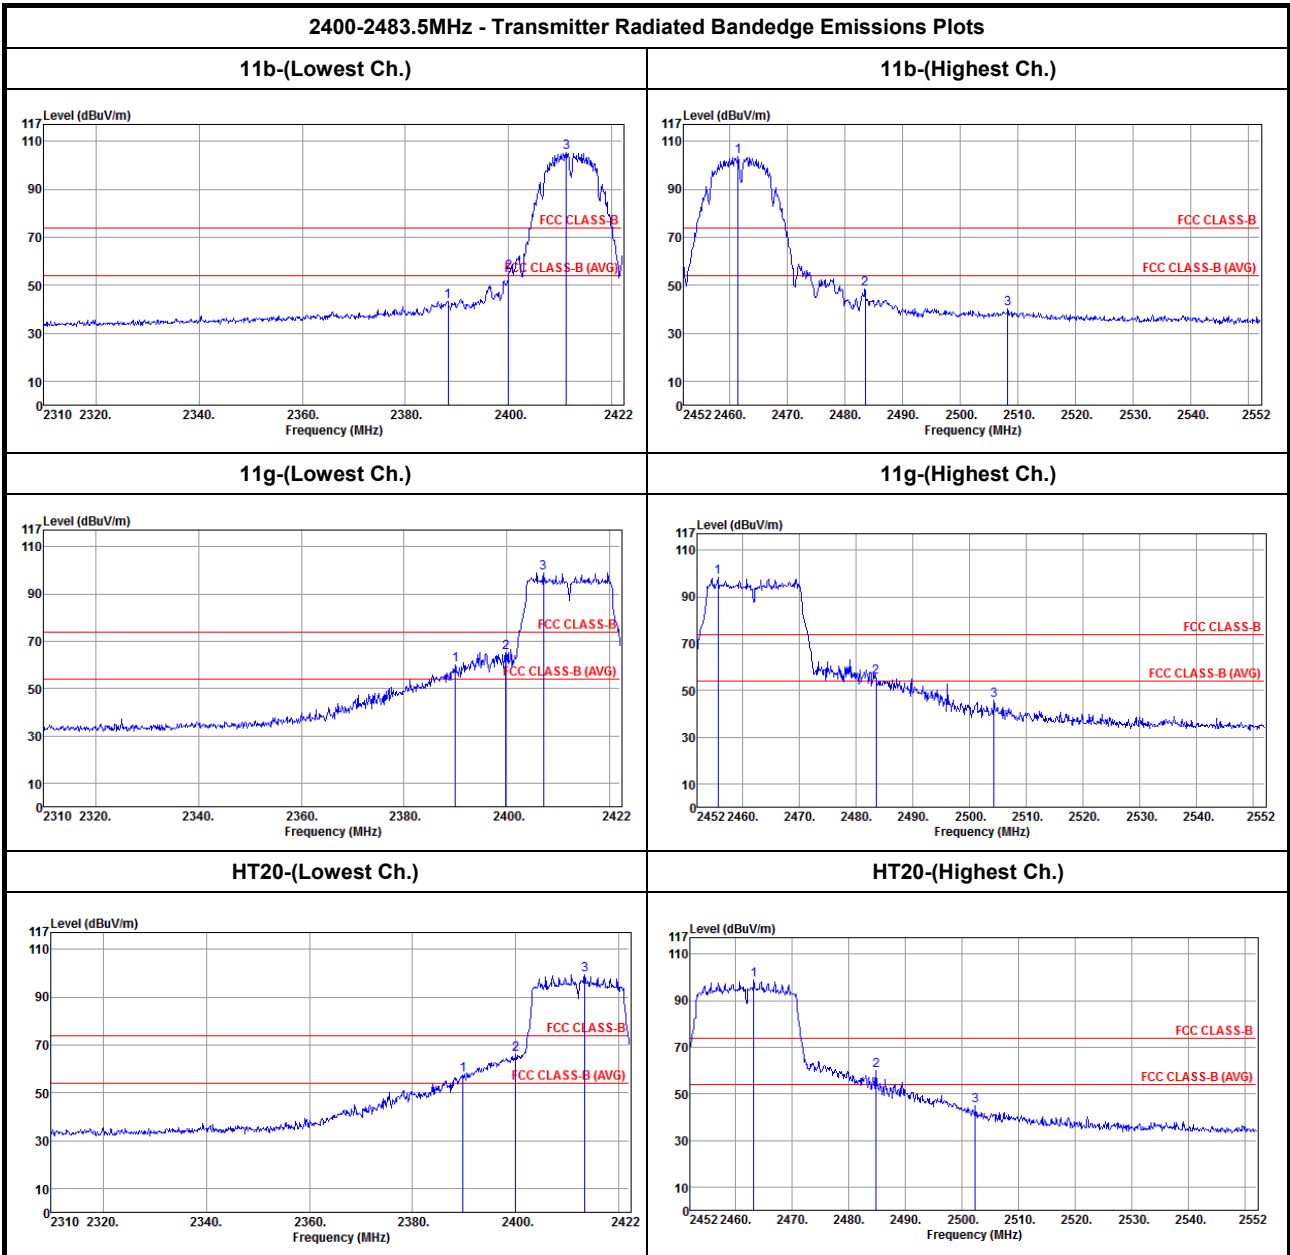

3.6 Transmitter Unwanted Emissions

3.6.1 Transmitter Radiated Unwanted Emissions Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.

3.6.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
<input checked="" type="checkbox"/>	Measurements in the frequency range 10 GHz - 18GHz are typically made at a closer distance 1m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input checked="" type="checkbox"/>	Measurements in the frequency range above 18 GHz - 25GHz are typically made at a closer distance 0.5m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle \geq 98 or duty factor].
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 11 for unwanted emissions into non-restricted bands.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 12 for unwanted emissions into restricted bands.
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 12.2.5.1 Option 1 (trace averaging for duty cycle \geq 98%)
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 12.2.5.2 Option 2 (trace averaging + duty factor).
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 12.2.5.3 Option 3 (Reduced VBW \geq 1/T).
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW \geq 1/T, where T is pulse time.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 11.3 and 12.2.4 measurement procedure peak limit.
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 12.2.3 measurement procedure Quasi-Peak limit.
<input checked="" type="checkbox"/>	For radiated measurement, refer as FCC KDB 558074, clause 12.2.7.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1000 MHz.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.6 for radiated emissions from above 1 GHz.

Test Method	
<input type="checkbox"/>	For conducted and cabinet radiation measurement, refer as FCC KDB 558074, clause 12.2.2.
<input type="checkbox"/>	For conducted unwanted emissions into non-restricted bands (relative emission limits). Devices with multiple transmit chains: Refer as FCC KDB 662911, when testing out-of-band and spurious emissions against relative emission limits, tests may be performed on each output individually without summing or adding 10 log(N) if the measurements are made relative to the in-band emissions on the individual outputs.
<input type="checkbox"/>	For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB
<input type="checkbox"/>	For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.


3.6.4 Test Setup

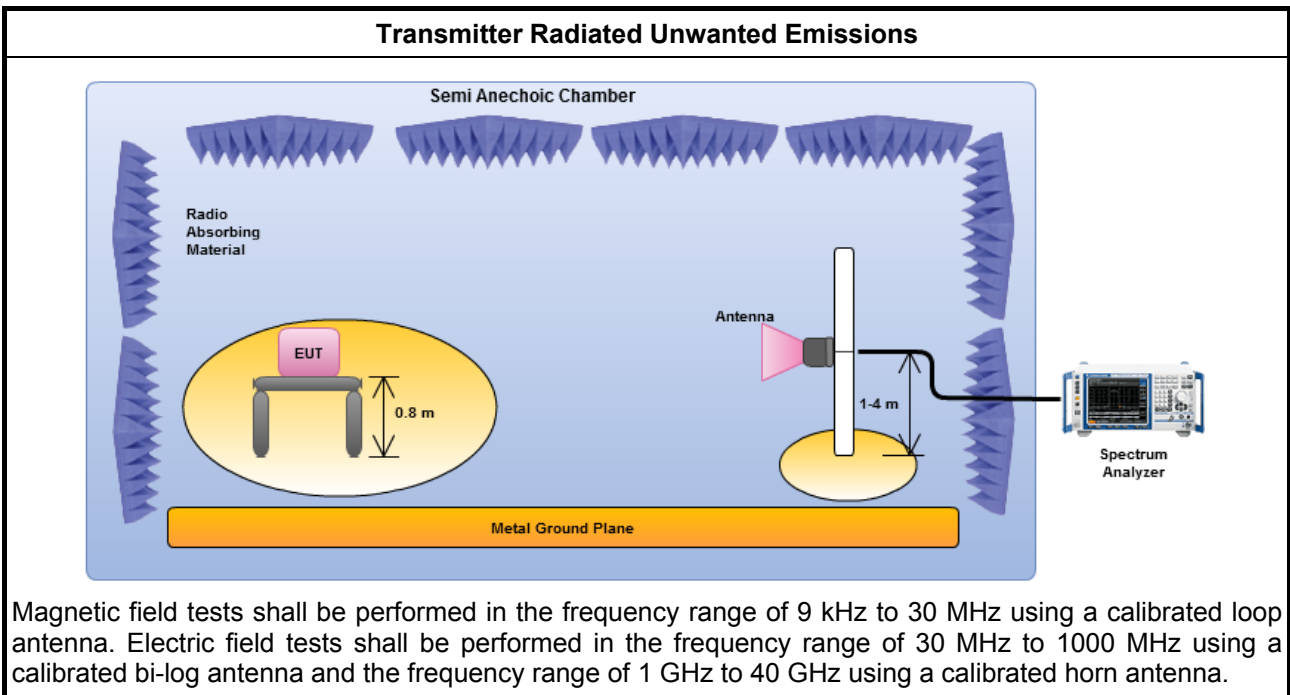

3.6.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


3.6.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)

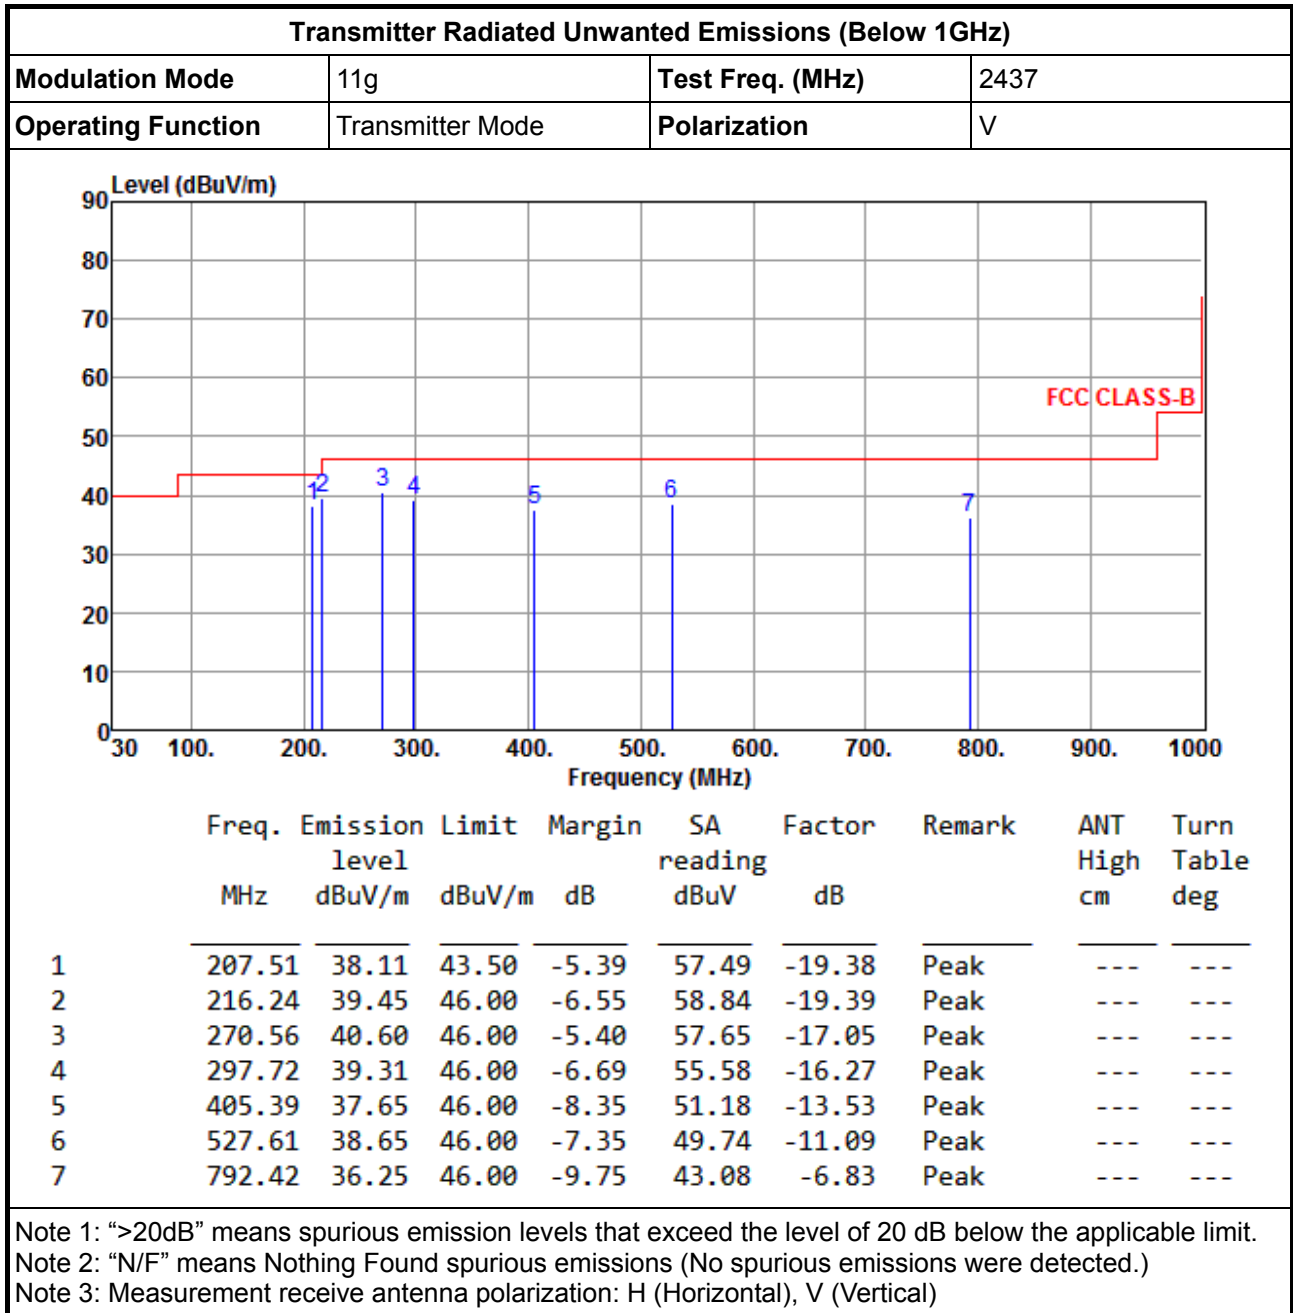



Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation Mode	11g	Test Freq. (MHz)	2437
Operating Function	Transmitter Mode	Polarization	H

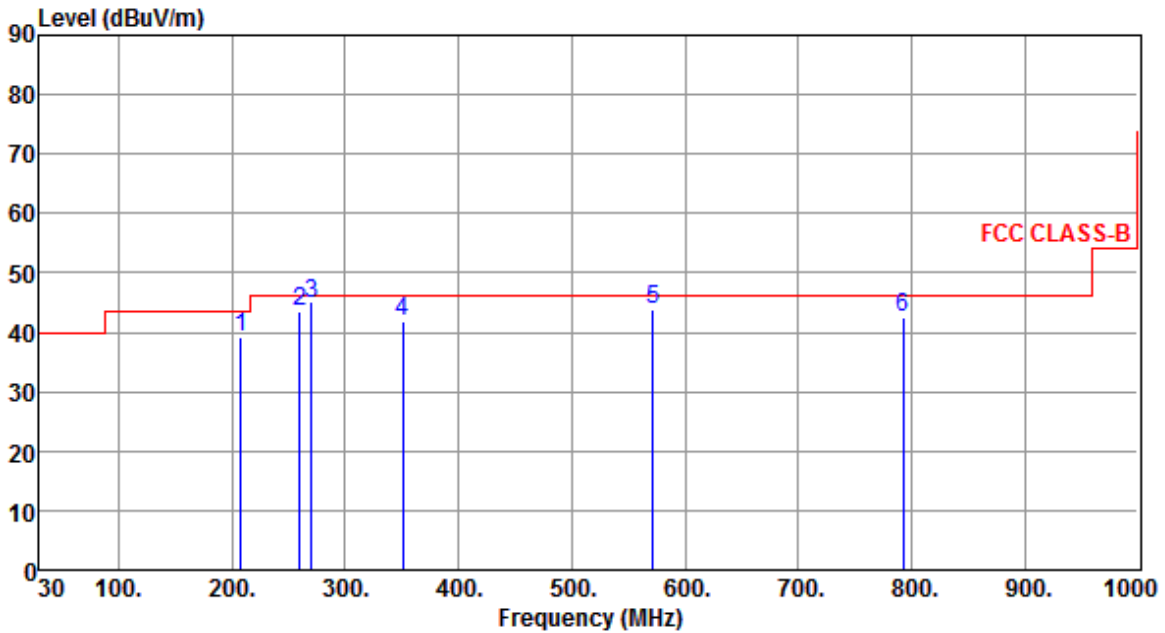

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	207.51	39.22	43.50	-4.28	58.60	-19.38	Peak	---	---
2	259.99	43.64	46.00	-2.36	61.21	-17.57	QP	---	---
3	270.56	45.00	46.00	-1.00	62.05	-17.05	QP	---	---
4	351.07	41.88	46.00	-4.12	56.75	-14.87	Peak	---	---
5	572.02	43.98	46.00	-2.02	54.26	-10.28	QP	---	---
6	792.42	42.64	46.00	-3.36	49.47	-6.83	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)




Transmitter Radiated Unwanted Emissions (Below 1GHz)									
Modulation Mode	HT20		Test Freq. (MHz)	2437					
Operating Function	Transmitter Mode		Polarization	V					
<p>The graph plots Level (dBuV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (30 to 1000). A red line represents the FCC CLASS-B limit, which is constant at 40 dBuV/m from 30 MHz to 100 MHz, then steps up to 45 dBuV/m from 100 MHz to 900 MHz, and finally to 55 dBuV/m from 900 MHz to 1000 MHz. Seven blue vertical lines represent emission peaks, labeled 1 through 7, with their respective frequencies and levels: 1 (207.25 MHz, 38.24 dBuV/m), 2 (216.47 MHz, 39.87 dBuV/m), 3 (270.96 MHz, 41.23 dBuV/m), 4 (297.52 MHz, 39.91 dBuV/m), 5 (405.47 MHz, 37.28 dBuV/m), 6 (527.93 MHz, 38.14 dBuV/m), and 7 (792.45 MHz, 36.18 dBuV/m). All peaks are well below the applicable limit.</p>									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	207.25	38.24	43.50	-5.26	57.61	-19.37	Peak	---	---
2	216.47	39.87	46.00	-6.13	59.26	-19.39	Peak	---	---
3	270.96	41.23	46.00	-4.77	58.26	-17.03	Peak	---	---
4	297.52	39.91	46.00	-6.09	56.18	-16.27	Peak	---	---
5	405.47	37.28	46.00	-8.72	50.81	-13.53	Peak	---	---
6	527.93	38.14	46.00	-7.86	49.22	-11.08	Peak	---	---
7	792.45	36.18	46.00	-9.82	43.01	-6.83	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)



Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	2437
Operating Function	Transmitter Mode	Polarization	H

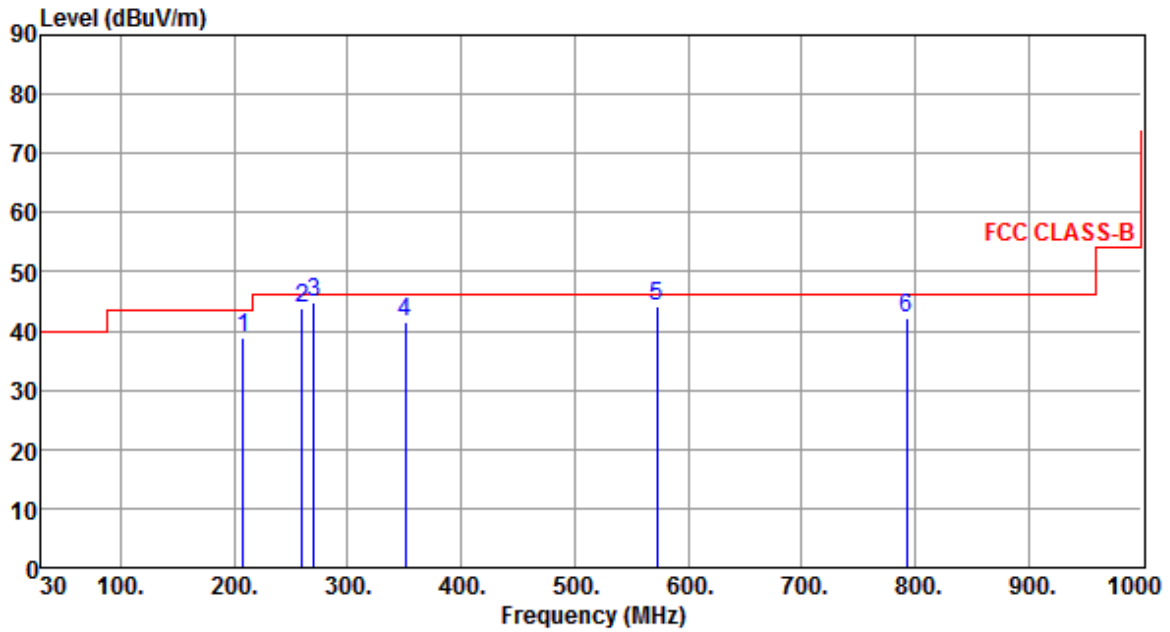


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	207.52	38.87	43.50	-4.63	58.25	-19.38	Peak	---	---
2	260.04	43.90	46.00	-2.10	61.47	-17.57	QP	---	---
3	270.18	44.83	46.00	-1.17	61.89	-17.06	QP	---	---
4	351.23	41.37	46.00	-4.63	56.24	-14.87	Peak	---	---
5	572.49	44.11	46.00	-1.89	54.38	-10.27	QP	---	---
6	792.31	42.33	46.00	-3.67	49.16	-6.83	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)




3.6.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 2400-2483.5MHz

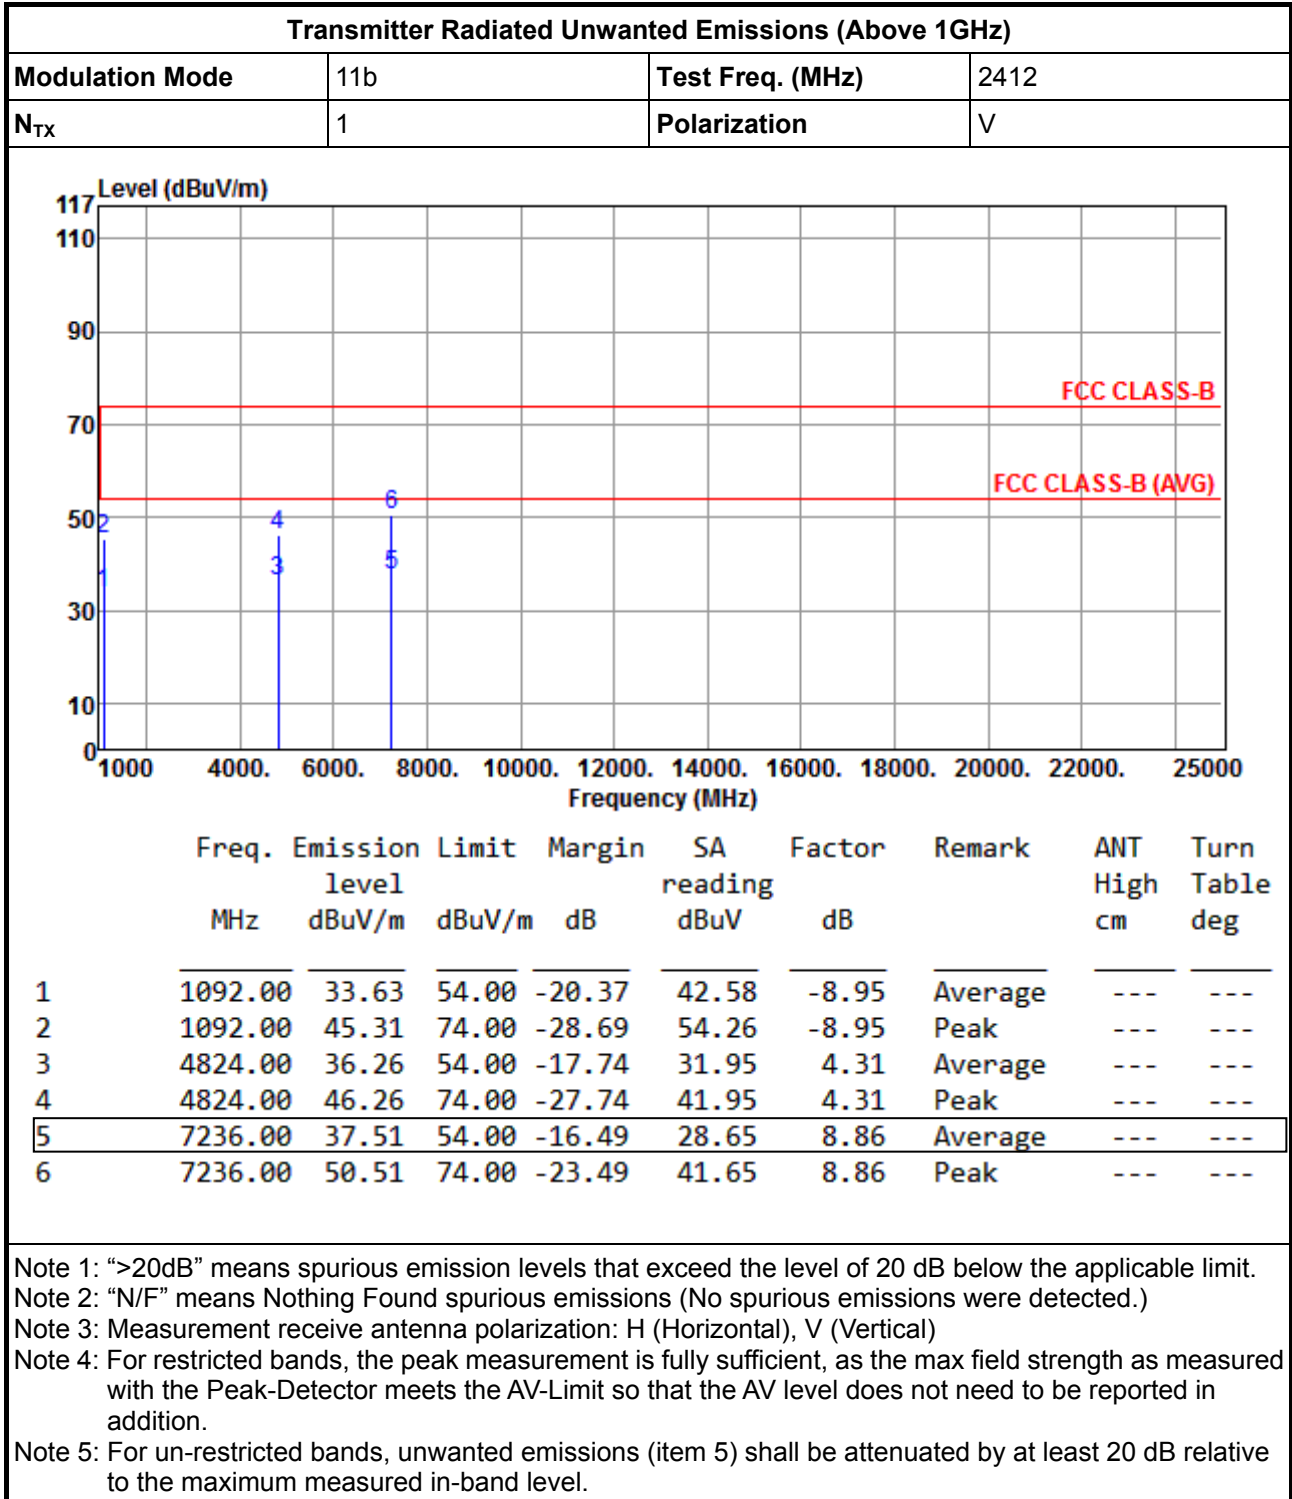



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11b	Test Freq. (MHz)	2412
N _{TX}	1	Polarization	H

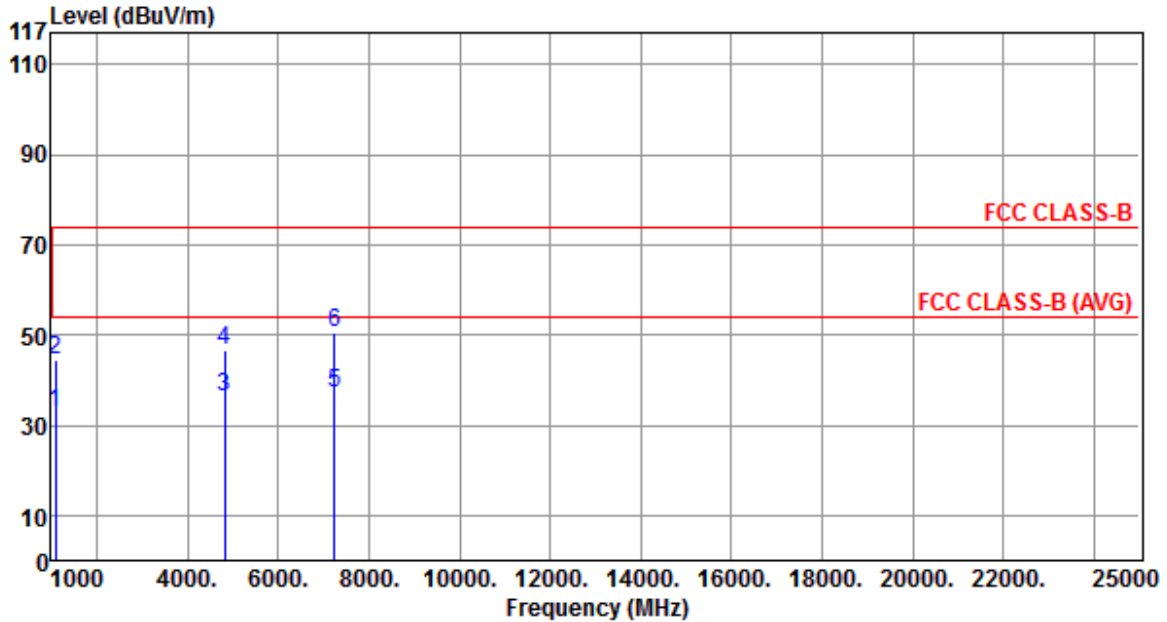

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1092.00	32.87	54.00	-21.13	41.82	-8.95	Average	---	---
2	1092.00	44.38	74.00	-29.62	53.33	-8.95	Peak	---	---
3	4824.00	36.47	54.00	-17.53	32.16	4.31	Average	---	---
4	4824.00	46.65	74.00	-27.35	42.34	4.31	Peak	---	---
5	7236.00	37.12	54.00	-16.88	28.26	8.86	Average	---	---
6	7236.00	50.45	74.00	-23.55	41.59	8.86	Peak	---	---


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions (item 5) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	11b				Test Freq. (MHz)	2437			
N _{TX}	1				Polarization	V			
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	1092.00	33.63	54.00	-20.37	42.58	-8.95	Average	---	---
2	1092.00	45.31	74.00	-28.69	54.26	-8.95	Peak	---	---
3	4874.00	37.18	54.00	-16.82	32.79	4.39	Average	---	---
4	4874.00	46.53	74.00	-27.47	42.14	4.39	Peak	---	---
5	7311.00	36.86	54.00	-17.14	27.94	8.92	Average	---	---
6	7311.00	50.05	74.00	-23.95	41.13	8.92	Peak	---	---
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.</p> <p>Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)</p> <p>Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)</p> <p>Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p> <p>Note 5: For un-restricted bands, unwanted emissions (item 5) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.</p>									



Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	11b	Test Freq. (MHz)	2437
N _{TX}	1	Polarization	H

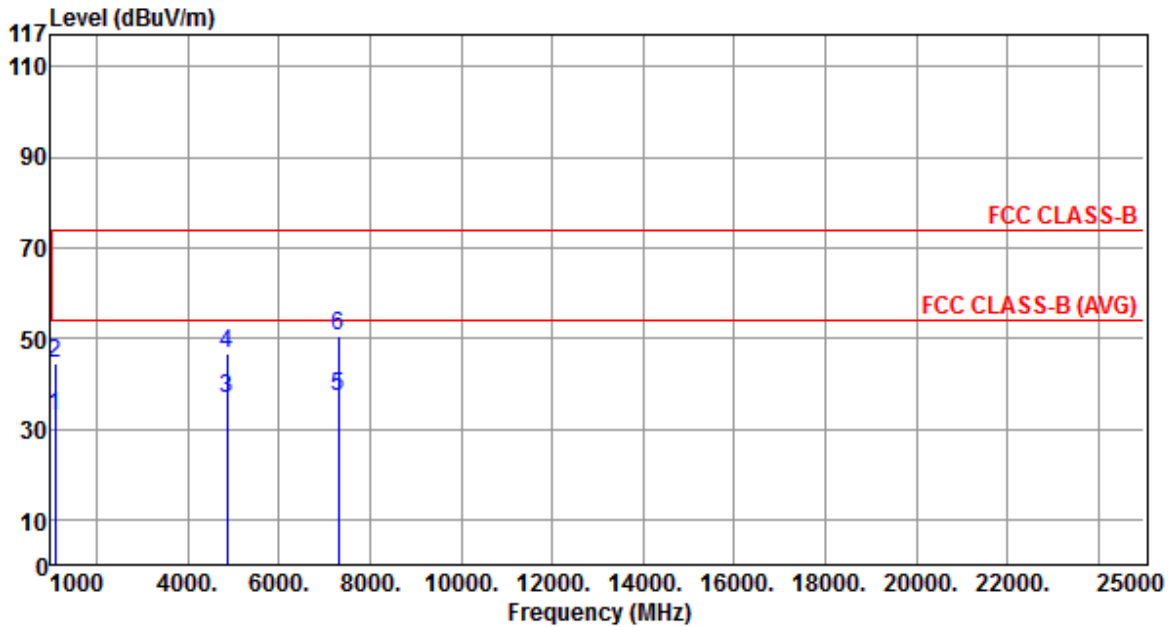


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1092.00	32.87	54.00	-21.13	41.82	-8.95	Average	---	---
2	1092.00	44.38	74.00	-29.62	53.33	-8.95	Peak	---	---
3	4874.00	36.68	54.00	-17.32	32.29	4.39	Average	---	---
4	4874.00	46.42	74.00	-27.58	42.03	4.39	Peak	---	---
5	7311.00	37.05	54.00	-16.95	28.13	8.92	Average	---	---
6	7311.00	50.41	74.00	-23.59	41.49	8.92	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions (item 5) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11b	Test Freq. (MHz)	2462
N _{TX}	1	Polarization	V

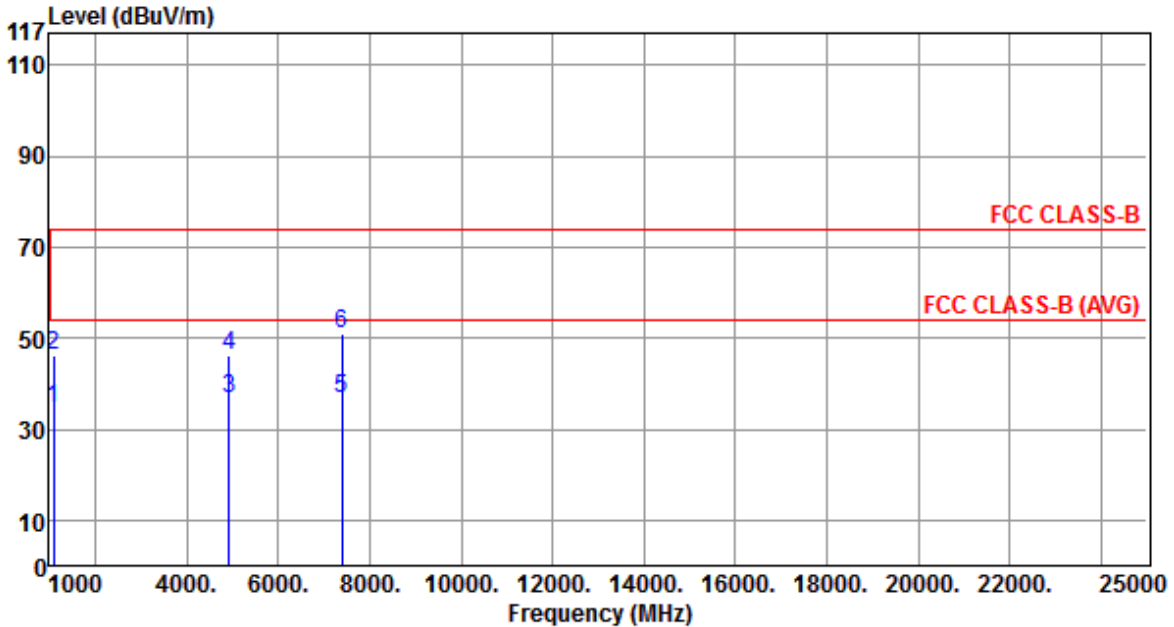


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1092.00	34.53	54.00	-19.47	43.48	-8.95	Average	---	---
2	1092.00	46.21	74.00	-27.79	55.16	-8.95	Peak	---	---
3	4924.00	36.85	54.00	-17.15	32.37	4.48	Average	---	---
4	4924.00	46.16	74.00	-27.84	41.68	4.48	Peak	---	---
5	7386.00	36.49	54.00	-17.51	27.51	8.98	Average	---	---
6	7386.00	50.81	74.00	-23.19	41.83	8.98	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions (item 5) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	11b	Test Freq. (MHz)	2462
N _{TX}	1	Polarization	H

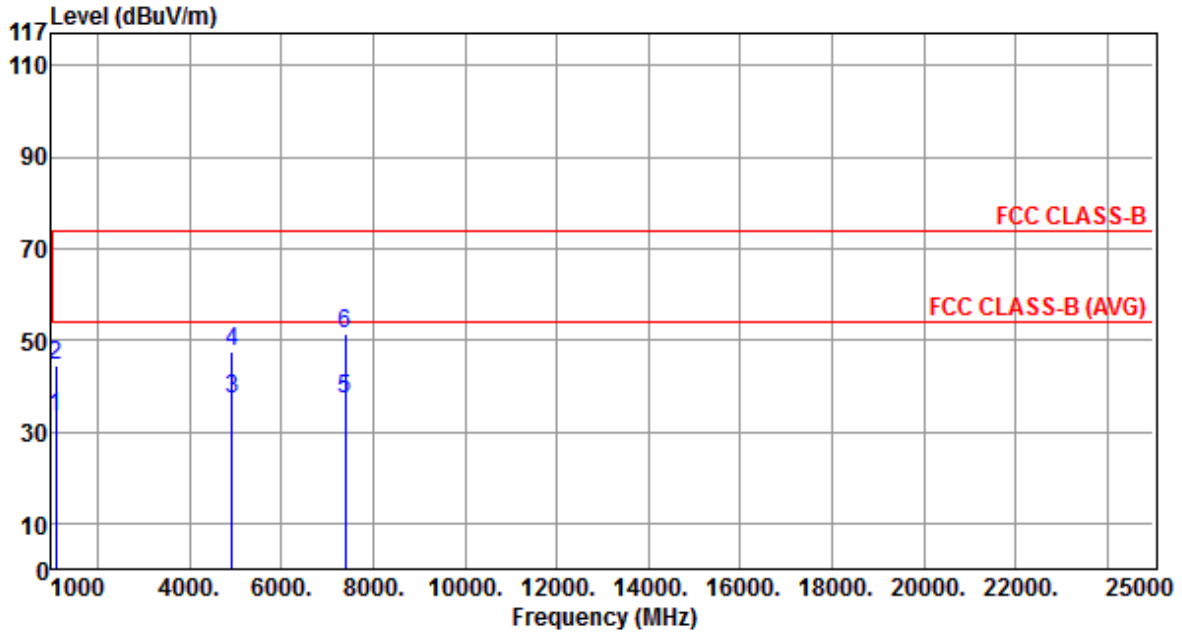


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1092.00	33.41	54.00	-20.59	42.36	-8.95	Average	---	---
2	1092.00	44.59	74.00	-29.41	53.54	-8.95	Peak	---	---
3	4924.00	37.07	54.00	-16.93	32.59	4.48	Average	---	---
4	4924.00	47.55	74.00	-26.45	43.07	4.48	Peak	---	---
5	7386.00	37.14	54.00	-16.86	28.16	8.98	Average	---	---
6	7386.00	51.37	74.00	-22.63	42.39	8.98	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions (item 5) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11g	Test Freq. (MHz)	2412
N _{TX}	1	Polarization	V

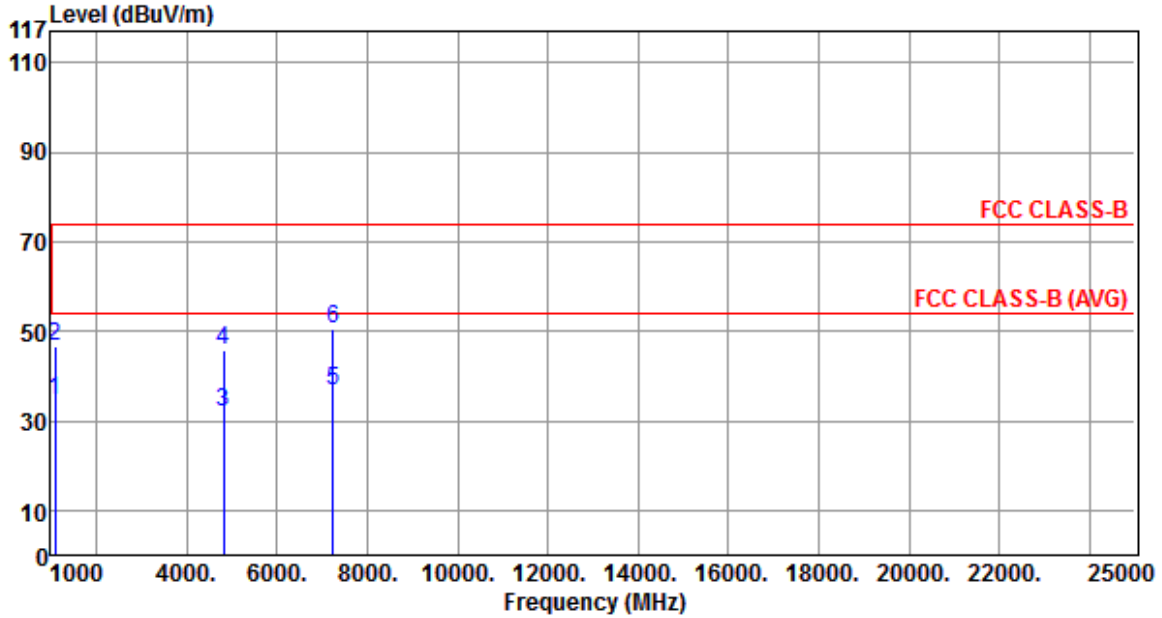


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1092.00	34.51	54.00	-19.49	43.46	-8.95	Average	---	---
2	1092.00	46.52	74.00	-27.48	55.47	-8.95	Peak	---	---
3	4824.00	31.80	54.00	-22.20	27.49	4.31	Average	---	---
4	4824.00	45.93	74.00	-28.07	41.62	4.31	Peak	---	---
5	7236.00	36.71	54.00	-17.29	27.85	8.86	Average	---	---
6	7236.00	50.44	74.00	-23.56	41.58	8.86	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions (item 5) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11g	Test Freq. (MHz)	2412
N _{TX}	1	Polarization	H

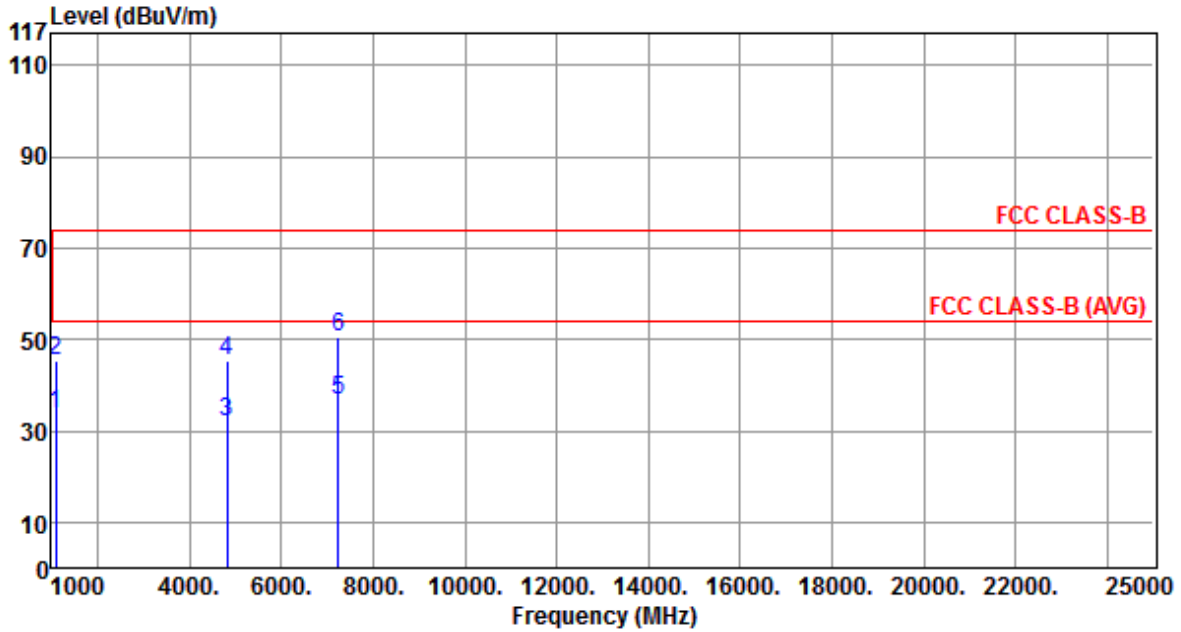


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1092.00	33.51	54.00	-20.49	42.46	-8.95	Average	---	---
2	1092.00	45.24	74.00	-28.76	54.19	-8.95	Peak	---	---
3	4824.00	31.82	54.00	-22.18	27.51	4.31	Average	---	---
4	4824.00	45.54	74.00	-28.46	41.23	4.31	Peak	---	---
5	7236.00	36.68	54.00	-17.32	27.82	8.86	Average	---	---
6	7236.00	50.44	74.00	-23.56	41.58	8.86	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions (item 5) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11g	Test Freq. (MHz)	2437
N _{TX}	1	Polarization	V

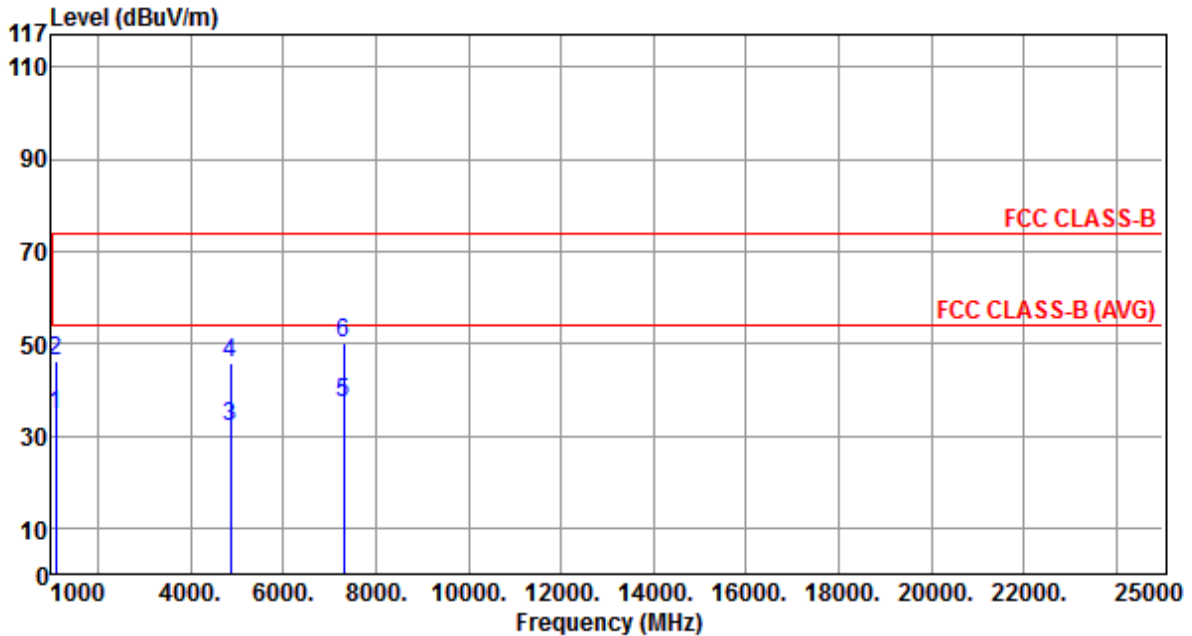


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1092.00	34.36	54.00	-19.64	43.31	-8.95	Average	---	---
2	1092.00	46.39	74.00	-27.61	55.34	-8.95	Peak	---	---
3	4874.00	31.78	54.00	-22.22	27.39	4.39	Average	---	---
4	4874.00	45.89	74.00	-28.11	41.50	4.39	Peak	---	---
5	7311.00	36.94	54.00	-17.06	28.02	8.92	Average	---	---
6	7311.00	50.25	74.00	-23.75	41.33	8.92	Peak	---	---

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions (item 5) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	11g	Test Freq. (MHz)	2437
N _{TX}	1	Polarization	H

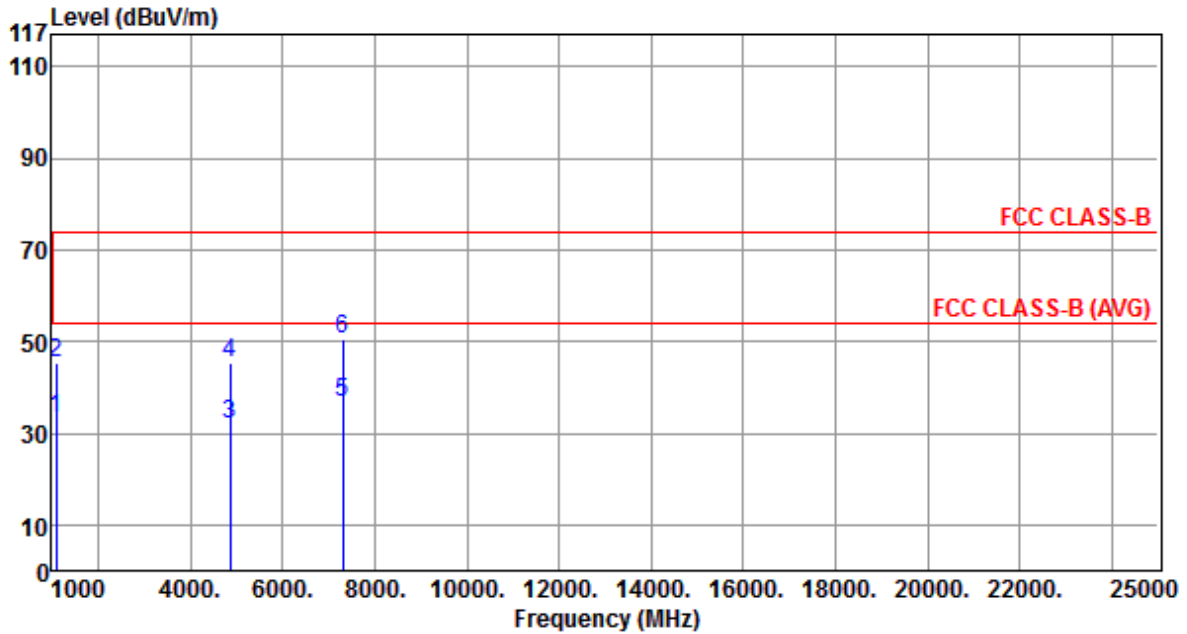


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1092.00	33.45	54.00	-20.55	42.40	-8.95	Average	---	---
2	1092.00	45.39	74.00	-28.61	54.34	-8.95	Peak	---	---
3	4874.00	32.01	54.00	-21.99	27.62	4.39	Average	---	---
4	4874.00	45.48	74.00	-28.52	41.09	4.39	Peak	---	---
5	7311.00	36.83	54.00	-17.17	27.91	8.92	Average	---	---
6	7311.00	50.55	74.00	-23.45	41.63	8.92	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions (item 5) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11g	Test Freq. (MHz)	2462
N _{TX}	1	Polarization	V

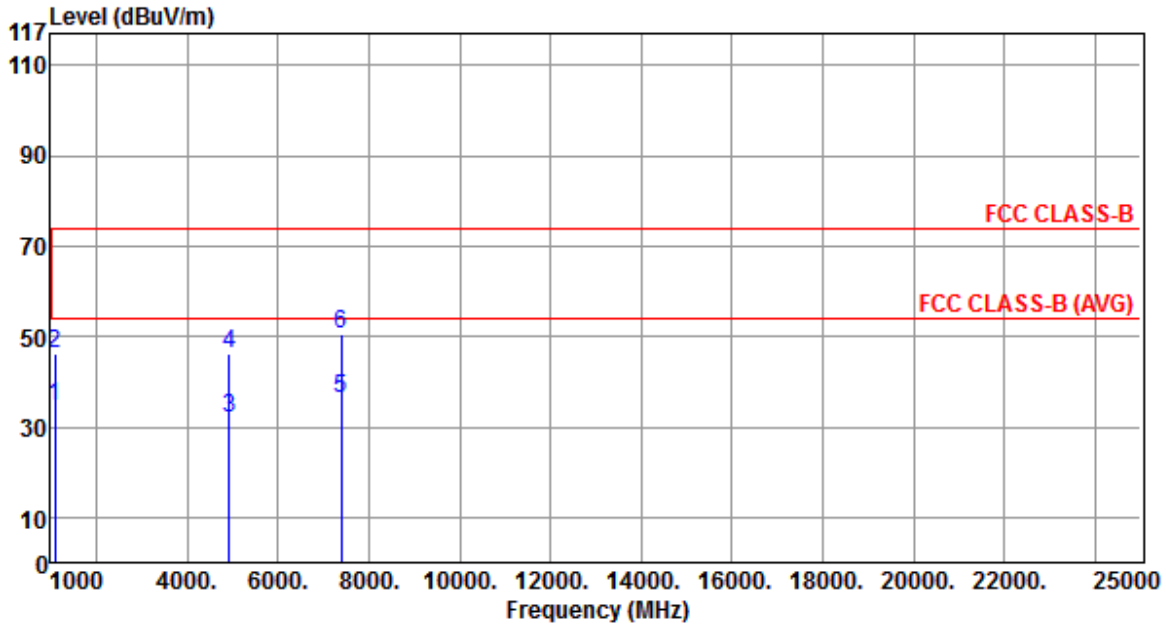

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1092.00	34.67	54.00	-19.33	43.62	-8.95	Average	---	---
2	1092.00	46.37	74.00	-27.63	55.32	-8.95	Peak	---	---
3	4924.00	32.09	54.00	-21.91	27.61	4.48	Average	---	---
4	4924.00	46.01	74.00	-27.99	41.53	4.48	Peak	---	---
5	7386.00	36.47	54.00	-17.53	27.49	8.98	Average	---	---
6	7386.00	50.66	74.00	-23.34	41.68	8.98	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions (item 5) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.




Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	11g			Test Freq. (MHz)	2462				
N _{TX}	1			Polarization	H				
<p>The graph plots Level (dBuV/m) on the y-axis (0 to 117) against Frequency (MHz) on the x-axis (1000 to 25000). Two horizontal red lines represent FCC CLASS-B (at ~74 dBuV/m) and FCC CLASS-B (AVG) (at ~54 dBuV/m). Six vertical blue lines indicate measured emission levels at various frequencies, labeled 2 through 6. Peak 6 is the highest, exceeding the FCC CLASS-B limit.</p>									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	1092.00	33.85	54.00	-20.15	42.80	-8.95	Average	---	---
2	1092.00	45.76	74.00	-28.24	54.71	-8.95	Peak	---	---
3	4924.00	31.91	54.00	-22.09	27.43	4.48	Average	---	---
4	4924.00	46.83	74.00	-27.17	42.35	4.48	Peak	---	---
5	7386.00	36.56	54.00	-17.44	27.58	8.98	Average	---	---
6	7386.00	50.53	74.00	-23.47	41.55	8.98	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions (item 5) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	2412
N _{TX}	1	Polarization	V

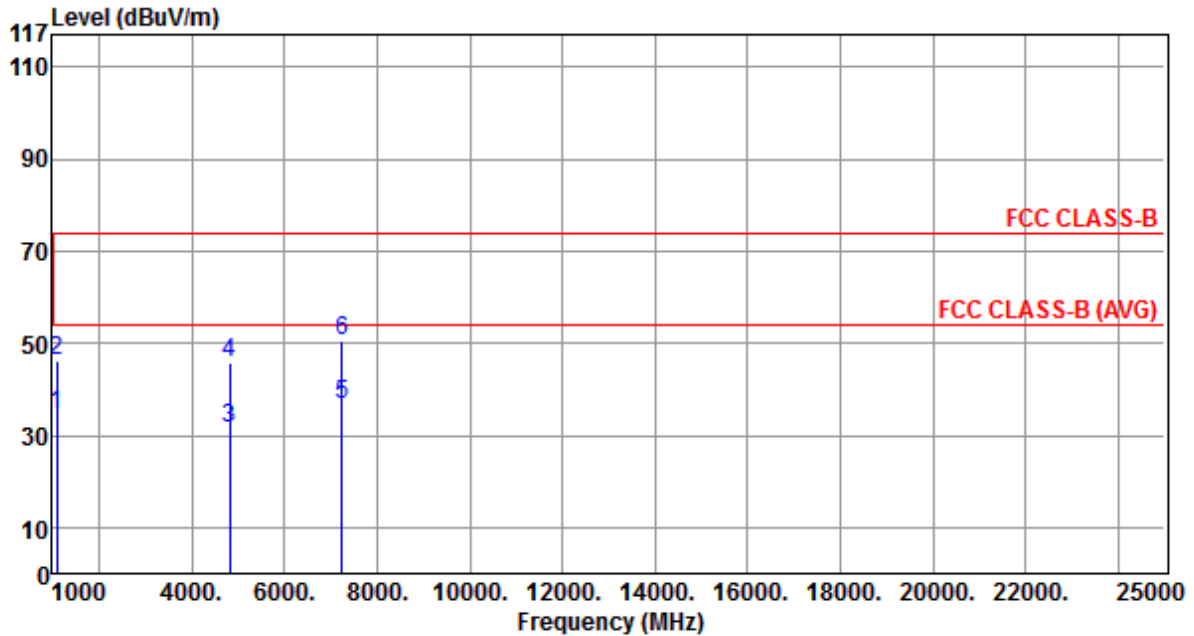


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1092.00	34.62	54.00	-19.38	43.57	-8.95	Average	---	---
2	1092.00	46.38	74.00	-27.62	55.33	-8.95	Peak	---	---
3	4824.00	31.62	54.00	-22.38	27.31	4.31	Average	---	---
4	4824.00	45.87	74.00	-28.13	41.56	4.31	Peak	---	---
5	7236.00	36.58	54.00	-17.42	27.72	8.86	Average	---	---
6	7236.00	50.37	74.00	-23.63	41.51	8.86	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions (item 5) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	2412
N _{TX}	1	Polarization	H

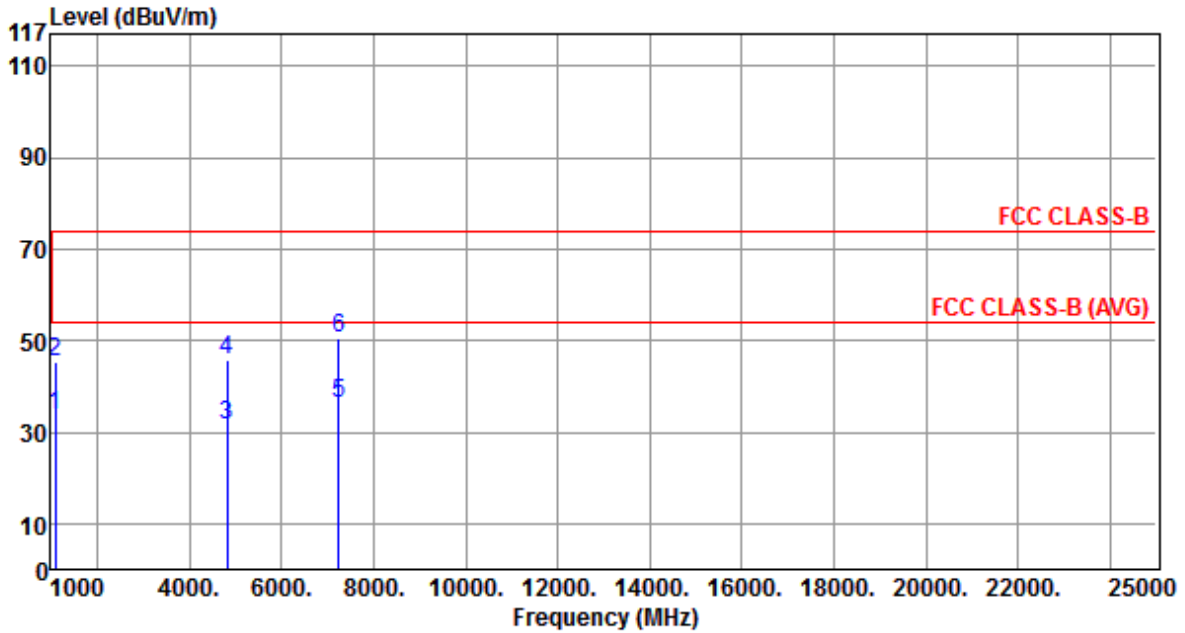


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1092.00	33.62	54.00	-20.38	42.57	-8.95	Average	---	---
2	1092.00	45.49	74.00	-28.51	54.44	-8.95	Peak	---	---
3	4824.00	31.67	54.00	-22.33	27.36	4.31	Average	---	---
4	4824.00	45.66	74.00	-28.34	41.35	4.31	Peak	---	---
5	7236.00	36.48	54.00	-17.52	27.62	8.86	Average	---	---
6	7236.00	50.69	74.00	-23.31	41.83	8.86	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions (item 5) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	2437
N _{TX}	1	Polarization	V

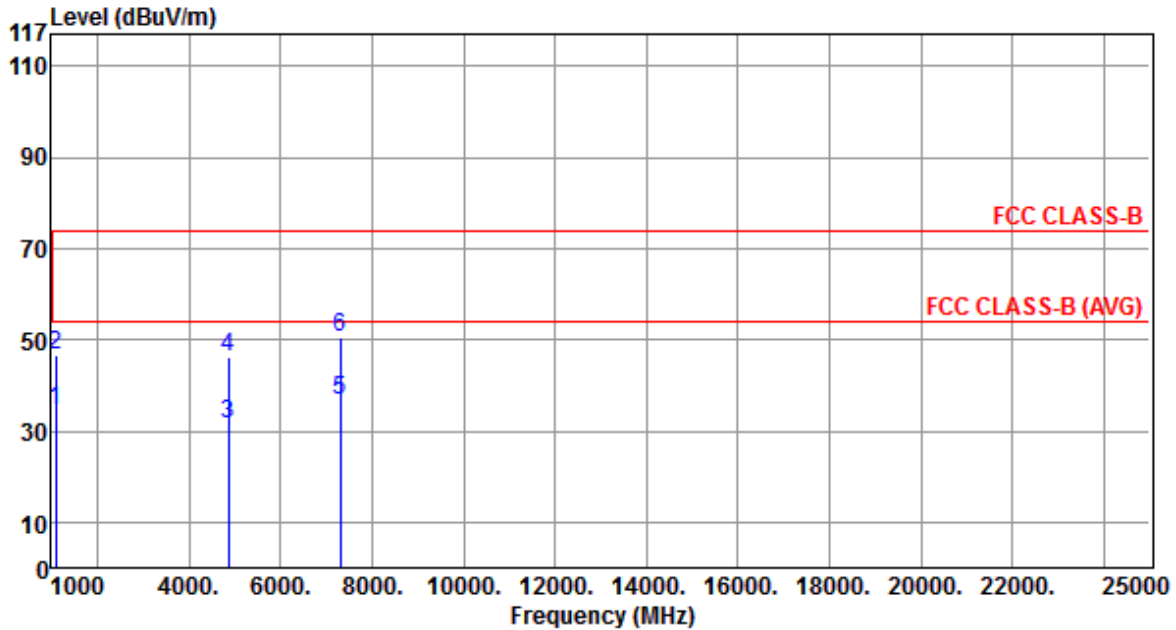

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1092.00	34.59	54.00	-19.41	43.54	-8.95	Average	---	---
2	1092.00	46.51	74.00	-27.49	55.46	-8.95	Peak	---	---
3	4874.00	31.49	54.00	-22.51	27.10	4.39	Average	---	---
4	4874.00	46.21	74.00	-27.79	41.82	4.39	Peak	---	---
5	7311.00	36.82	54.00	-17.18	27.90	8.92	Average	---	---
6	7311.00	50.57	74.00	-23.43	41.65	8.92	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.




Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	HT20		Test Freq. (MHz)	2437					
N _{TX}	1		Polarization	H					
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1092.00	32.85	54.00	-21.15	41.80	-8.95	Average	---	---
2	1092.00	45.67	74.00	-28.33	54.62	-8.95	Peak	---	---
3	4874.00	32.54	54.00	-21.46	28.15	4.39	Average	---	---
4	4874.00	45.95	74.00	-28.05	41.56	4.39	Peak	---	---
5	7311.00	36.91	54.00	-17.09	27.99	8.92	Average	---	---
6	7311.00	50.82	74.00	-23.18	41.90	8.92	Peak	---	---
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.) Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical) Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition. Note 5: For un-restricted bands, unwanted emissions (item 5) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.</p>									



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	2462
N _{TX}	1	Polarization	V

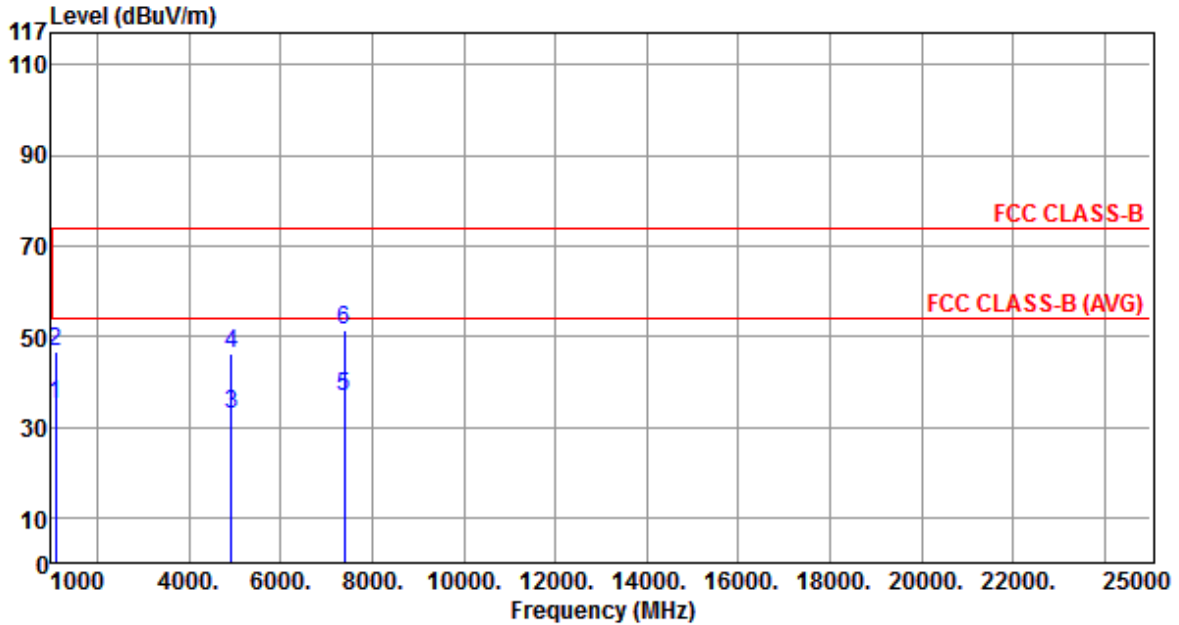


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1092.00	34.95	54.00	-19.05	43.90	-8.95	Average	---	---
2	1092.00	46.52	74.00	-27.48	55.47	-8.95	Peak	---	---
3	4924.00	32.95	54.00	-21.05	28.47	4.48	Average	---	---
4	4924.00	46.26	74.00	-27.74	41.78	4.48	Peak	---	---
5	7386.00	36.58	54.00	-17.42	27.60	8.98	Average	---	---
6	7386.00	51.26	74.00	-22.74	42.28	8.98	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	HT20	Test Freq. (MHz)	2462
N _{TX}	1	Polarization	H

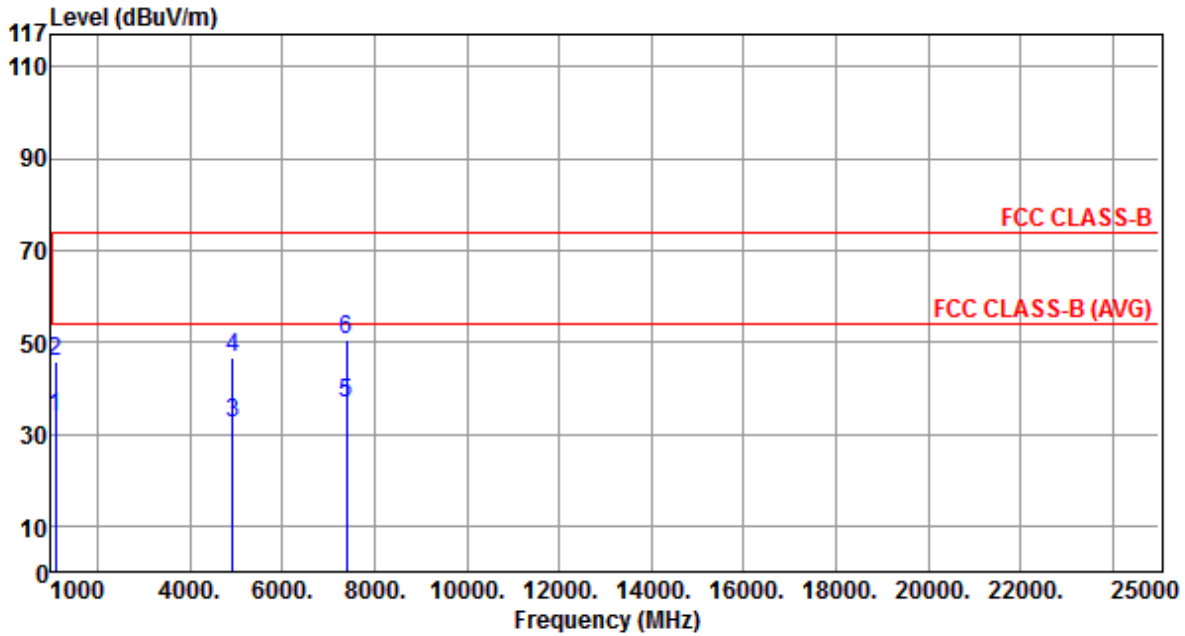

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1092.00	33.57	54.00	-20.43	42.52	-8.95	Average	---	---
2	1092.00	45.81	74.00	-28.19	54.76	-8.95	Peak	---	---
3	4924.00	32.26	54.00	-21.74	27.78	4.48	Average	---	---
4	4924.00	46.81	74.00	-27.19	42.33	4.48	Peak	---	---
5	7386.00	36.67	54.00	-17.33	27.69	8.98	Average	---	---
6	7386.00	50.66	74.00	-23.34	41.68	8.98	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions (item 5) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz ~ 2.75GHz	Mar. 26, 2013	Conduction (CO04-HY)
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127-477	9kHz ~ 30MHz	Jan. 21, 2013	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz ~ 30MHz	Apr. 18, 2013	Conduction (CO04-HY)
RF Cable-CON	HUBER+SUHNER	RG213/U	7.61183201e+012	9kHz ~ 30MHz	Nov. 09, 2012	Conduction (CO04-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP 40	100305	9KHz~40GHz	Mar. 20, 2013	Conducted (TH01-HY)
AC Power Source	G.W	APS-9102	EL920581	AC 0V ~ 300V	Jul. 02, 2012	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-SP-SD	MAA1112-007	-20 ~ 100°C	Nov. 21, 2012	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Jun. 26, 2012	Conducted (TH01-HY)
Power Sensor	Anritsu	MA2411B	0917017	300MHz ~ 40GHz	Feb. 02, 2013	Conducted (TH01-HY)
Power Meter	Anritsu	ML2495A	0949003	300MHz ~ 40GHz	Feb. 02, 2013	Conducted (TH01-HY)
RF Cable-2m	HUBER+SUHNER	SUCOFLEX_104	SN 345675/4	1GHz ~ 26.5GHz	NA	Conducted (TH01-HY)
RF Cable-3m	HUBER+SUHNER	SUCOFLEX_104	SN 345669/4	1GHz ~ 26.5GHz	NA	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.



Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Remark
3m semi-anechoic chamber	CHAMPRO	SAC-03	03CH01-WS	Jan. 04, 2013	Radiation 03CH01-WS
Amplifier	Burgeon	BPA-530	100219	Nov. 28, 2012	Radiation 03CH01-WS
Amplifier	Agilent	83017A	MY39501308	Dec. 18, 2012	Radiation 03CH01-WS
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jan. 11, 2013	Radiation 03CH01-WS
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Feb. 18, 2013	Radiation 03CH01-WS
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Jan. 14, 2013	Radiation 03CH01-WS
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Dec. 25, 2012	Radiation 03CH01-WS
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Dec. 25, 2012	Radiation 03CH01-WS
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16139/4	Dec. 25, 2012	Radiation 03CH01-WS
RF Cable-R03m	Woken	CFD400NL-LW	CFD400NL-001	Dec. 25, 2012	Radiation 03CH01-WS
RF Cable-R10m	Woken	CFD400NL-LW	CFD400NL-002	Dec. 25, 2012	Radiation 03CH01-WS
Spectrum Analyzer	R&S	FSV40	101498	Jan. 24, 2013	Radiation 03CH01-WS
Receiver	ROHDE&SCHWARZ	ESR3	101658	Jan. 28, 2013	Radiation 03CH01-WS
control	EM Electronics	EM1000	60612	N/A	Radiation 03CH01-WS

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Remark
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 15, 2012	Radiation 03CH01-WS
Amplifier	MITEQ	AMF-6F-260400	9121372	Apr. 19, 2013	Radiation 03CH01-WS

Note: Calibration Interval of instruments listed above is two year.