USED ON: 5357-001

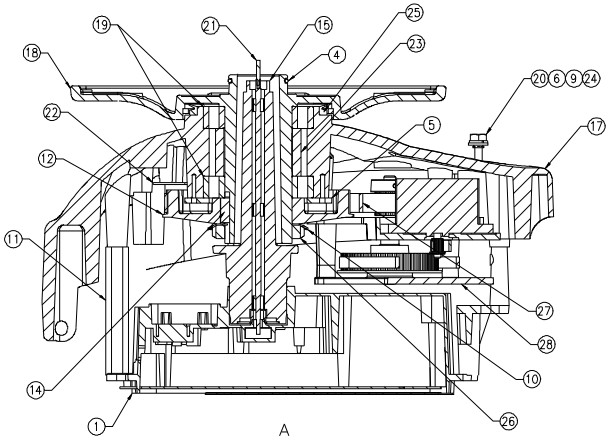

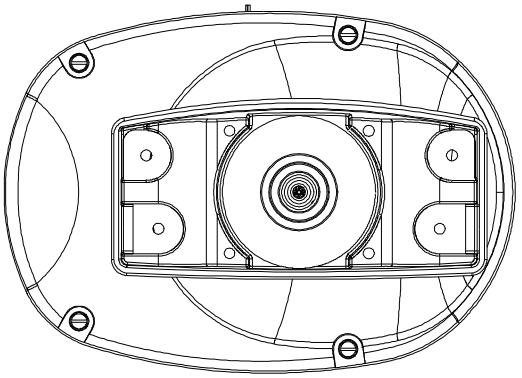

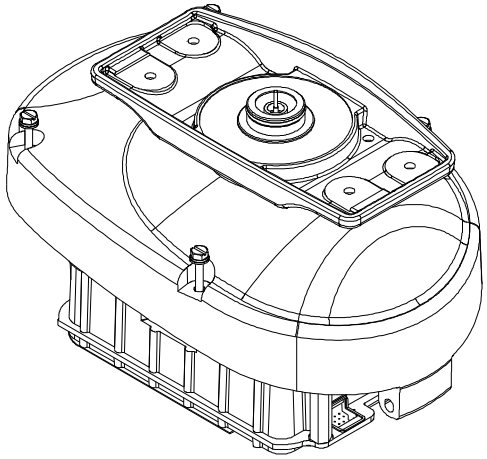

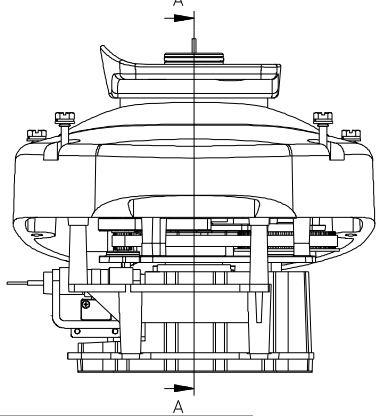

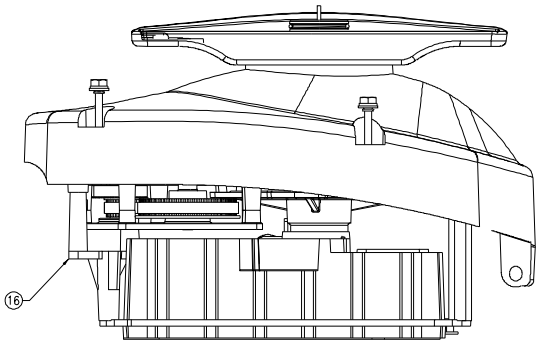

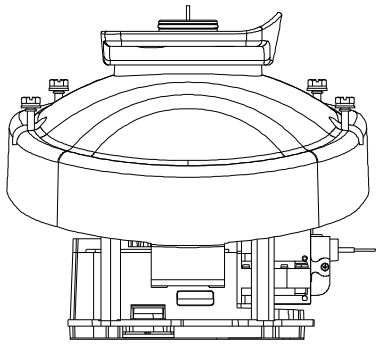

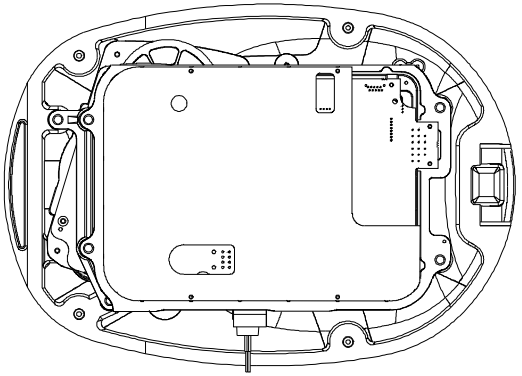

ITEM No	ORG/PART No	QTY	DESCRIPTION
1	4357-006	1	CORE SUB-ASSY
2	23078	11	M4 PLAIN WASHER
3	21214	11	M4 X 16 SCREW
4	32091	1	O RING
5	3036-142	1	BEARING PLATE
6	23040	10	M8 SPRING WASHER
7	23048	11	M4 SPRING WASHER
8	21315	4	M8 X 20 BOLT
9	23057	10	M8 PLAIN WASHER
10	23094	1	LOCK WASHER
11	3020-307	2	MOUNTING PILLARS
12	4357-021	1	ANTENNA PULLEY ASSEMBLY
13	21316	2	M8 X 70 BOLT
14	28050	1	FEATHER KEY
15	4357-001	1	COAXIAL EXTENSION TUBE ASSY
16	3004-145	1	MOUNTING BRACKET (MACHINED)
17	3004-085	1	TOP CASTING (MACHINED)
18	4357-010	1	ANTENNA BEARING SHAFT ASSY
19	31054	2	6011 BEARINGS
20	3020-317	4	CASE SCREWS
21	3020-311	1	COAXIAL PIN TIP
22	4357-026	1	ENCODER ASSY
23	3020-306	1	BEARING SPACER
24	32095	4	O RING
25	32096	1	ANTENNA SEAL
26	22065	1	LOCK NUT
27	36031	1	3MR 570-15 BELT
28	5357-002	1	BELT BOX ASSY

PARTS LIST

NOTES

1) ASSEMBLY SCREWS NOT SHOWN FOR CLARITY, REFER TO ASSEMBLY METHOD SHEETS.

ISS	DESCRIPTION OF CHANGE	DATE
F	BOM ADDED L.D.Y	10.05.99 SM
E	PENDING L.D.Y	05.02.99
D	PENDING L.D.Y	23.06.98
C	UPDATED L.D.Y	27.01.98
B	UPDATED L.D.Y	25.11.97
A	FIRST ISSUE	ORIGINAL

©THE INFORMATION CONTAINED HEREIN SHALL NOT BE REPRODUCED IN WHOLE OR IN PART WITHOUT THE PRIOR WRITTEN PERMISSION OF AUTOHELM.

Autohelm

TOLERANCES UNLESS OTHERWISE STATED
X ±0.50
.X ±0.25
.XX ±0.10
.XXX ±0.05
ANGLES ±1°
DIMENSIONS IN MM

MACHINING: 1.6 SURFACE
SHARP INTERNAL CORNERS TO HAVE RADIUS 0.4 MAX
DEBURR ALL EDGES
SCALE: 1:2

DRAWN TO BS308 DO NOT SCALE - IF IN DOUBT ASK
MATERIAL
FINISH
FROZEN DATE/ISSUE/BY: Not Frozen

DR'N: L.D.Y DATE:01.10.97
CK'D: SM
APP'D: SM

TITLE: TOP CASE ASSEMBLY
DRAWING No. 4357-005
SHT 1 OF 1
A1