



M. Flom Associates, Inc.

International Compliance Testing Laboratory

3356 N. San Marcos Place, Suite 107
Chandler, AZ 85225

toll-free: (866) 311-3268
fax: (480) 926-3598

<http://www.mflom.com>
info@mflom.com

Date: December 2, 2004

Federal Communications Commission
Via: Electronic Filing

Attention: Authorization & Evaluation Division

Applicant: E. F. Johnson Company
Equipment: 242-5337-211-AAAA
FCC ID: ATH2425331
FCC Rules: 90, Confidentiality

Gentlemen:

On behalf of the Applicant, enclosed please find Application Form 731, Engineering Test Report and all pertinent documentation, the whole for approval of the referenced equipment as shown.

Filing fees are attached.

We trust the same is in order. Should you need any further information, kindly contact the writer who is authorized to act as agent.

Sincerely yours,



Michael Schafer,
General Manager

enclosure(s)
cc: Applicant
MS/del

M. Flom Associates, Inc.
3356 N. San Marcos Place, Suite 107
Chandler, Arizona 85225-7176
(480) 926-3100 phone, fax (480) 926-3598

FCC ID: ATH2425331
MFA p0490011, d04c0001



M. Flom Associates, Inc.

International Compliance Testing Laboratory

3356 N. San Marcos Place, Suite 107
Chandler, AZ 85225

toll-free: (866) 311-3268
fax: (480) 926-3598

<http://www.mflom.com>
info@mflom.com

Transmitter Certification

of

FCC ID: ATH2425331

Model: 242-5337-211-AAAA

to

Federal Communications Commission

Rule Part(s) 90, Confidentiality

Date of report: December 2, 2004

On the Behalf of the Applicant:

E. F. Johnson Company

At the Request of:

P.O. 170502

E. F. Johnson Company,
299 Johnson Ave.
Waseca, MN 56093-0514

Attention of: (507) 835-6579; FAX: -6666
John Oblak, Director, Radio Products Development
E-mail: joblak@efjohnson.com

Supervised by:

David E. Lee,
Compliance Test Manager

M. Flom Associates, Inc.
3356 N. San Marcos Place, Suite 107
Chandler, Arizona 85225-7176
(480) 926-3100 phone, fax (480) 926-3598

FCC ID: ATH2425331
MFA p0490011, d04c0001



List of Exhibits

(FCC Certification (Transmitters) - Revised 9/28/98)

Applicant: E. F. Johnson Company

FCC ID: ATH2425331

By Applicant:

1. Letter of Authorization
2. Confidentiality Request: 0.457 And 0.459
3. Part 90.203(e) & (g) Attestation
4. Identification Drawings, 2.1033(c)(11)
 - Label
 - Location of Label
 - Compliance Statement
 - Location of Compliance Statement
5. Photographs, 2.1033(c)(12)
6. Documentation: 2.1033(c)
 - (3) User Manual
 - (9) Tune Up Info
 - (10) Schematic Diagram
 - (10) Circuit Description
 - Block Diagram
 - Parts List
 - Active Devices
7. MPE Report

By M.F.A. Inc.:

- A. Testimonial & Statement of Certification



The Applicant has been cautioned as to the following:

15.21 Information to the User.

The users manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a) Special Accessories.

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer, without additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

Table of Contents

<u>Rule</u>	<u>Description</u>	<u>Page</u>
2.1033(c)(14)	Rule Summary	2
	Standard Test Conditions and Engineering Practices	3
	Expository Statement for Permissive Changes	5
2.1046(a)	Carrier Output Power (Conducted)	8
2.1046(a)	ERP Carrier Power (Radiated)	10
2.1051	Unwanted Emissions (Transmitter Conducted)	12
2.1053(a)	Field Strength of Spurious Radiation	14
2.1049(c)(1)	Emission Masks (Occupied Bandwidth)	18
90.214	Transient Frequency Behavior	29
2.1047(a)	Audio Low Pass Filter (Voice Input)	35
2.1047(a)	Audio Frequency Response	37
2.1047(b)	Modulation Limiting	39
2.1055(a)(1)	Frequency Stability (Temperature Variation)	42
2.1055(b)(1)	Frequency Stability (Voltage Variation)	44
2.202(g)	Necessary Bandwidth and Emission Bandwidth	46

Required information per ISO/IEC Guide 25-1990, paragraph 13.2:

a)

Test Report

b) Laboratory:
(FCC: 31040/SIT)
(Canada: IC 2044)

M. Flom Associates, Inc.
3356 N. San Marcos Place, Suite 107
Chandler, AZ 85225

c) Report Number:

d04c0001

d) Client:

E. F. Johnson Company,
299 Johnson Ave.
Waseca, MN 56093-0514

e) Identification:

242-5337-211-AAAA
(FCC ID: ATH2425331)

EUT Description:

UHF/FM Mobile Transceiver

f) EUT Condition:

Not required unless specified in individual tests.

g) Report Date:

December 2, 2004

EUT Received:

September 30, 2004

h, j, k):

As indicated in individual tests.

i) Sampling method:

No sampling procedure used.

l) Uncertainty:

In accordance with MFA internal quality manual.

m) Supervised by:



David E. Lee,
Compliance Test Manager

n) Results:

The results presented in this report relate only to the item tested.

o) Reproduction:

This report must not be reproduced, except in full, without written permission from this laboratory.

Sub-part

2.1033(c)(14):

Test and Measurement Data

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II; Part 2, Sub-part J, Sections 2.947, 2.1033(c), 2.1041, 2.1046, 2.1047, 2.1079, 2.1051, 2.1053, 2.1055, 2.1057 and the following individual Parts:

- _____ 21 - Domestic Public Fixed Radio Services
- _____ 22 - Public Mobile Services
- _____ 22 Subpart H - Cellular Radiotelephone Service
- _____ 22.901(d) - Alternative technologies and auxiliary services
- _____ 23 - International Fixed Public Radiocommunication services
- _____ 24 - Personal Communications Services
- _____ 74 Subpart H - Low Power Auxiliary Stations
- _____ 80 - Stations in the Maritime Services
- _____ 80 Subpart E - General Technical Standards
- _____ 80 Subpart F - Equipment Authorization for Compulsory Ships
- _____ 80 Subpart K - Private Coast Stations and Marine Utility Stations
- _____ 80 Subpart S - Compulsory Radiotelephone Installations for Small Passenger Boats
- _____ 80 Subpart T - Radiotelephone Installation Required for Vessels on the Great Lakes
- _____ 80 Subpart U - Radiotelephone Installations Required by the Bridge-to-Bridge Act
- _____ 80 Subpart V - Emergency Position Indicating Radio Beacons (EPIRB'S)
- _____ 80 Subpart W - Global Maritime Distress and Safety System (GMDSS)
- _____ 80 Subpart X - Voluntary Radio Installations
- _____ 87 - Aviation Services
- 90 - Private Land Mobile Radio Services
- _____ 94 - Private Operational-Fixed Microwave Service
- _____ 95 Subpart A - General Mobile Radio Service (GMRS)
- _____ 95 Subpart C - Radio Control (R/C) Radio Service
- _____ 95 Subpart D - Citizens Band (CB) Radio Service
- _____ 95 Subpart E - Family Radio Service
- _____ 95 Subpart F - Interactive Video and Data Service (IVDS)
- _____ 97 - Amateur Radio Service
- _____ 101 - Fixed Microwave Services

Standard Test Conditions and Engineering Practices

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI C63.4-1992/2001, section 6.1.9, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104 °F) unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Prior to testing, the EUT was tuned up in accordance with the manufacturer's alignment procedures. All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing.

Measurement results, unless otherwise noted, are worst-case measurements.



A2LA

"A2LA has accredited M. Flom Associates, Inc. Chandler, AZ for technical competence in the field of Electrical Testing. The accreditation covers the specific tests and types of tests listed on the agreed scope of accreditation. This laboratory meets the requirements of ISO/IEC 17025 – 1999 'General Requirements for the Competence of Testing and Calibration Laboratories' and any additional program requirements in the identified field of testing."

Certificate Number: **2152-01**



UNITED STATES DEPARTMENT OF COMMERCE
 National Institute of Standards and Technology
 Gaithersburg, Maryland 20899

September 15, 1999

Mr. Morton Flom
 M. Flom Associates Inc.
 3356 N. San Marcos Place, Suite 107
 Chandler, AZ 85225

Dear Mr. Flom:

I am pleased to inform you that your laboratory has been validated by the Chinese Taipei Bureau of Standards, Metrology, and Inspection (BSMI) under the Asia Pacific Economic Cooperation Mutual Recognition Arrangement (APEC MRA). Your laboratory has been designated to act as a Conformity Assessment Body (CAB) under Appendix B, Phase I Procedures of the APEC MRA between the American Institute in Taiwan (AIT) and the Taipei Economic and Cultural Representative Office (TECRO) in the United States, covering equipment subject to Electro-Magnetic Compatibility (EMC) requirements. The names of all validated and nominated laboratories will be posted on the NIST website at <http://ts.nist.gov/mra> under the "Asia" category.

As of August 1, 1999, you may submit test data to BSMI to verify the equipment to be imported into Chinese Taipei satisfies the applicable EMC requirements. You must include the BSMI number (SL2-IN-E-041R) on your test report. This number will remain valid for your NVLAP and/or A2LA and/or BSMI accreditation remains valid for the CMS 1343R.

Please note that BSMI requires that the entity making application for the approval of regulated equipment must make such application in person at their Taipei office. BSMI also requires the name of the authorized signature who are authorized to sign the test reports. You can send this information via fax to C-Taiwan CAB Response Manager at 301-973-5414. I am also enclosing a copy of the cover sheet that, according to BSMI requirements, must accompany every test report.

If you have any questions, please contact Robert Gladhill at 301-975-4273 or Dhillon at 301-975-5521. We appreciate your continued interest in our international conformity assessment activities.

Very truly yours,

Belinda L. Collins, Ph.D.
 Belinda L. Collins, Ph.D.
 Director, Office of Standards Services

Enclosure

NIST

BSMI Number: **SL2-IN-E-041R**



List of General Information Required for Certification

In Accordance with FCC Rules and Regulations,
Volume II, Part 2 and to

90, Confidentiality

Sub-part 2.1033

(c)(1): Name and Address of Applicant:

E. F. Johnson Company
299 Johnson Ave.
Waseca, MN 56093-0514

Manufacturer:

EF Johnson Company
Irving, Texas

(c)(2): FCC ID: ATH2425331

Model Number: 242-5337-211-AAAA

(c)(3): Instruction Manual(s):

Please see attached exhibits

(c)(4): Type of Emission: 16K0F3E, 14K0F3E, 11K0F3E, 8K10F1E,
8K10F1D

(c)(5): Frequency Range, MHz: 380 to 470

(c)(6): Power Rating, Watts: 45
____ Switchable Variable ____ N/A

FCC Grant Note: BC - The output power is continuously variable from the value listed to 5%-10% of the value listed.

(c)(7): Maximum Power Rating, Watts: 300

DUT Results: Passes Fails _____

Information for Push-To-Talk Devices

Type and number of antenna to be used for this device:

Whip

Maximum antenna gain for antenna indicated above:

3dBd

Can this device sustain continuous operation with respect to its hardware capabilities and allowable operating functions?

No

Other hardware or operating restrictions that could limit a person's RF Exposure:

Timeout timer

Source-based time-averaging (see 2.1093 of rules) applicable to reduce the average output power:

No

If device has headset and belt-clip accessories that would allow body-worn operations, what is the minimum separation distance between the antenna and the user's body in this operating configuration?

N/A, Mobile

Can device access wire-line services to make phone calls, either directly or through an operator?

No

Can specific operating instructions be given to users to eliminate any potential RF Exposure concerns for both front-of-the-face and body-worn operating configurations?

N/A, Mobile

Other applicable information the applicant may provide that can serve as effective means for ensuring RF Exposure compliance:

Yes - Instructions and Training as per User Manual

Subpart 2.1033 (continued)

(c)(8): Voltages & currents in all elements in final RF stage, including final transistor or solid-state device:

Collector Current, A	= per manual
Collector Voltage, Vdc	= per manual
Supply Voltage, Vdc	= 13.8

(c)(9): **Tune-Up Procedure:**

Please see attached exhibits

(c)(10): **Circuit Diagram/Circuit Description:**

Including description of circuitry & devices provided for determining and stabilizing frequency, for suppression of spurious radiation, for limiting modulation and limiting power.

Please see attached exhibits

(c)(11): **Label Information:**

Please see attached exhibits

(c)(12): **Photographs:**

Please see attached exhibits

(c)(13): **Digital Modulation Description:**

 Attached Exhibits
X N/A

(c)(14): **Test and Measurement Data:**

Follows

Name of Test: Carrier Output Power (Conducted)

Specification: 47 CFR 2.1046(a)


Guide: ANSI/TIA/EIA-603-1992, Paragraph 2.2.1

Measurement Procedure

A) The EUT was connected to a resistive coaxial attenuator of normal load impedance, and the unmodulated output power was measured by means of an RF Power Meter.

B) Measurement accuracy is $\pm 3\%$.

Transmitter Test Set-Up: RF Power Output

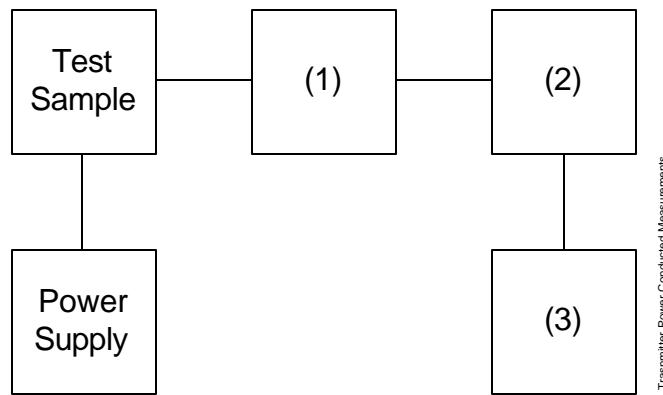

	Asset	Description	s/n	Cycle	Last Cal
(1)	Coaxial Attenuator				
X	i00231/2	PASTERNACK PE7021-30 (30 dB)	231 or 232	NCR	
	i00122/3	NARDA 766 (10 dB)	7802 or 7802A	NCR	
(2)	Power Meters				
X	i00020	HP 8901A Power Mode	2105A01087	12 mo.	Apr-04
(3)	Frequency Counter				
X	i00020	HP 8901A Frequency Mode	2105A01087	12 mo.	Apr-04



Name of Test: Carrier Output Power (Conducted)

Measurement Results
(Worst case)

Frequency of Carrier, MHz = 425, 380, 470
Ambient Temperature = 23°C ± 3°C

Power Setting	RF Power, dBm	RF Power, Watts
High	46.5	45

Performed by:

A handwritten signature in black ink, appearing to read "David E. Lee".

David E. Lee,
Compliance Test Manager

Name of Test: ERP Carrier Power (Radiated)

Specification: TIA/EIA 603A (Substitution Method)


Measurement Procedure

Definition

The average radiated power of a licensed device is the equivalent power required, when delivered to a half-wave dipole or horn antenna, to produce at a distant point the same average received power as produced by the licensed device.

Method of Measurement:

A) Connect the equipment as illustrated. Place the transmitter to be tested on the turntable in the standard test site.

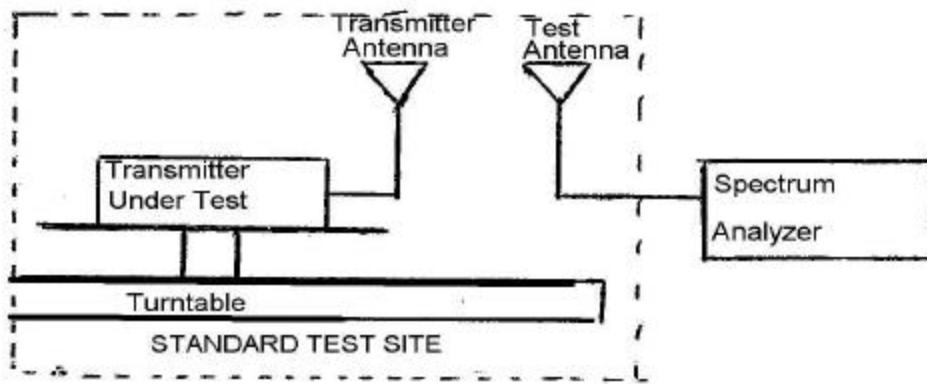

B) Raise and lower the test antenna from 1m to 6 m with the transmitter facing the antenna and record the highest received signal in dB as LVL.

C) Repeat step B) for seven additional readings at 45° interval positions of the turntable.

D) Replace the transmitter under test with a half-wave or horn vertically polarized antenna. The center of the antenna should be at the same location as the transmitter under test. Connect the antenna to a signal generator with a known output power and record the path loss in dB or LOSS.

E) Calculate the average radiated output power from the readings in step C) and D) by the following:

$$\text{average radiated power} = 10 \log_{10} \frac{10(LVL - LOSS)}{10} (\text{dBm})$$

Name of Test: ERP Carrier Power (Radiated)

Test Equipment

Asset	Description	s/n	Cycle	Last Cal
Transducer				
	i00088 EMCO 3109-B 25MHz-300MHz	2336	12 mo.	Sep-03
X	i00089 Aprel 2001 200MHz-1GHz	001500	12 mo.	Sep-03
X	i00103 EMCO 3115 1GHz-18GHz	9208-3925	12 mo.	Jan-04
Amplifier				
X	i00028 HP 8449A	2749A00121	12 mo.	May-04
Spectrum Analyzer				
X	i00029 HP 8563E	3213A00104	12 mo.	May-04
X	i00033 HP 85462A	3625A00357	12 mo.	Jul-04
Substitution Generator				
X	i00067 HP 8920A Communication TS	3345U01242	12 mo.	Jun-04
	i00207 HP 8753D Network Analyzer	3410A08514	12 mo.	Jul-04

Measurement Results

	380.000MHz		425.000MHz		470.000MHz	
	LVL, dbm	Path Loss, db	LVL, dbm	Path Loss, db	LVL, dbm	Path Loss, db
0°	47.5		48.3		48.0	
45°	43.4		46.5		45.8	
90°	45.8		48.3		47.2	
135°	48.2	-1.3	46.8	-4.1	46.1	-3.4
180°	43.3		47.0		44.7	
225°	40.9		48.6		45.7	
270°	46.7		49.6		47.6	
315°	42.0		46.2		48.5	
<hr/>						
Av. Radiated Power:		380MHz	425MHz	470MHz		
		43.43dbm	43.56dbm	43.30dbm		

Performed by:

David E. Lee,
Compliance Test Manager



Name of Test: Unwanted Emissions (Transmitter Conducted)

Specification: 47 CFR 2.1051

Guide: ANSI/TIA/EIA-603-1992, Paragraph 2.2.13


Measurement Procedure

A) The emissions were measured for the worst case as follows:

- 1). within a band of frequencies defined by the carrier frequency plus and minus one channel.
- 2). from the lowest frequency generated in the EUT and to at least the 10th harmonic of the carrier frequency, or 40 GHz, whichever is lower.

B) The magnitude of spurious emissions that are attenuated more than 20 dB below the permissible value need not be specified.

Transmitter Test Set-Up: Spurious Emission

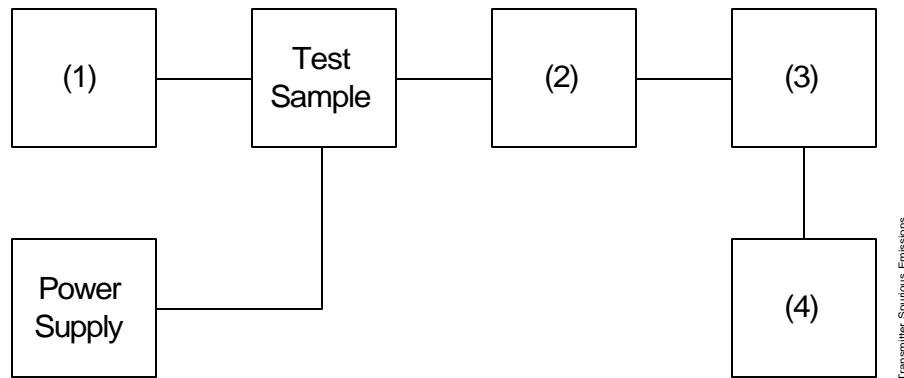

Asset	Description	s/n		
(1) Audio Oscillator/Generator				
X i00017	HP 8903A Audio Analyzer	2216A01753	12 mo.	Apr-04
i0002	HP 3336B Synthesizer / Level Gen.	1931A01465	12 mo.	Apr-04
(2) Coaxial Attenuator				
X i00231/2	PASTERNACK PE7021-30 (30 dB)	231 or 232	NCR	
i0012/3	NARDA 766 (10 dB)	7802 or 7802A	NCR	
(3) Filters; Notch, HP, LP, BP	None required			
(4) Spectrum Analyzer				
X i00048	HP 8566B Spectrum Analyzer	2511A01467	12 mo.	Oct-04
i00029	HP 8563E Spectrum Analyzer	3213A00104	12 mo.	May-04



Name of Test: Unwanted Emissions (Transmitter Conducted)

Measurement Results
(Worst Case)

Summary:

Frequency of carrier, MHz	=	425, 380, 470
Spectrum Searched, GHz	=	0 to 10 x F_C
Maximum Response, Hz	=	2820
All Other Emissions	=	= 20 dB Below Limit
Limit(s), dBc	25kHz channel	$43 + (10 \times \log(45)) = 59.53\text{dBc}$
	12.5kHz channel	$50 + (10 \times \log(45)) = 66.53\text{dBc}$

Measurement Results

All emissions measured on 25kHz channels were less than 80dBc (-33dBm) at all three test frequencies.

All emissions measured on 12.5kHz channels were less than 87dBc (-40dBm) at all three test frequencies.

Performed by:

A handwritten signature in black ink, appearing to read 'David E. Lee'.

David E. Lee,
Compliance Test Manager

Name of Test: Field Strength of Spurious Radiation

Specification: 47 CFR 2.1053(a)

Guide: ANSI/TIA/EIA-603-1992/2001, Paragraph 1.2.12 and Table 16, 47 CFR 22.917


Measurement Procedure

Definition:

Radiated spurious emissions are emissions from the equipment when transmitting into a non-radiating load on a frequency or frequencies which are outside an occupied band sufficient to ensure transmission of information of required quality for the class of communications desired.


Method of Measurement:

- A) Connect the equipment as illustrated
- B) Adjust the spectrum analyzer for the following settings:
 - 1) Resolution Bandwidth 100 kHz (<1 GHZ), 1 MHZ (> 1GHz).
 - 2) Video Bandwidth = 3 times Resolution Bandwidth, or 30 kHz (22.917)
 - 3) Sweep Speed \leq 2000 Hz/second
 - 4) Detector Mode = Mean or Average Power
- C) Place the transmitter to be tested on the turntable in the standard test site. The transmitter is transmitting into a non-radiating load that is placed on the turntable. The RF cable to this load should be of minimum length.

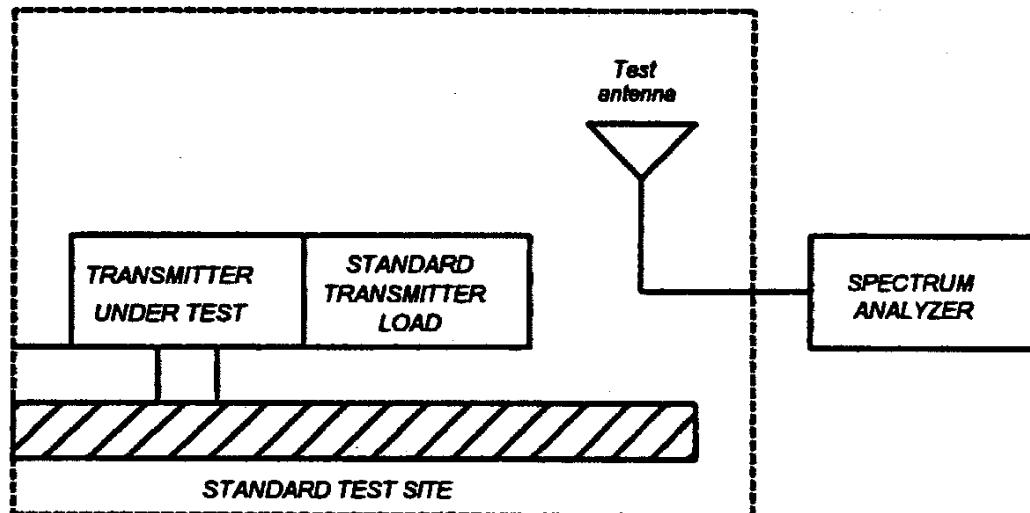

Name of Test: Field Strength of Spurious Radiation (Cont.)

- D) For each spurious measurement the test antenna should be adjusted to the correct length for the frequency involved. This length may be determined from a calibration ruler supplied with the equipment. Measurements shall be made from the lowest radio frequency generated in the equipment to the tenth harmonic of the carrier, except for the region close to the carrier equal to \pm the test bandwidth (see section 1.3.4.4).
- E) For each spurious frequency, raise and lower the test antenna from 1 m to 4 m to obtain a maximum reading on the spectrum analyzer with the test antenna at horizontal polarity. Repeat this procedure to obtain the highest possible reading. Record this maximum reading.
- F) Repeat step E) for each spurious frequency with the test antenna polarized vertically.

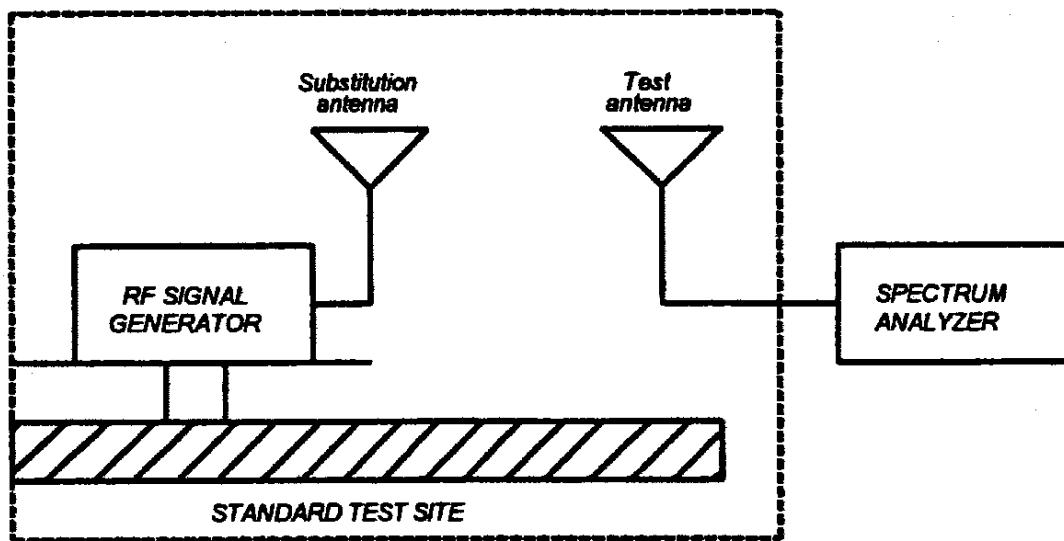

- G) Reconnect the equipment as illustrated.
- H) Keep the spectrum analyzer adjusted as in step B).
- I) Remove the transmitter and replace it with a substitution antenna (the antenna should be half-wavelength for each frequency involved). The center of the substitution antenna should be approximately at the same location as the center of the transmitter. At lower frequencies, where the substitution antenna is very long, this will be impossible to achieve when the antenna is polarized vertically. In such case the lower end of the antenna should be 0.3 m above the ground.

Name of Test: Field Strength of Spurious Radiation (Cont.)

J) Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a non-radiating cable. With the antennas at both ends horizontally polarized and with the signal generator tuned to a particular spurious frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output.

K) Repeat step J) with both antennas vertically polarized for each spurious frequency.

L) Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps J) and K) by the power loss in the cable between the generator and the antenna and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna.

M) The levels recorded in step L) are absolute levels of radiated spurious emissions in dBm. The radiated spurious emissions in dB can be calculated by the following:

Radiated spurious emissions dB =

$$10\log_{10}(\text{TX power in watts}/0.001) - \text{the levels in step I)}$$

NOTE: It is permissible that other antennas provided can be referenced to a dipole.

Test Equipment

Asset	Description	s/n	Cycle	Last Cal
Transducer				
	i00088 EMCO 3109-B 25MHz-300MHz	2336	12 mo.	Sep-03
X	i00089 Aprel 2001 200MHz-1GHz	001500	12 mo.	Sep-03
X	i00103 EMCO 3115 1GHz-18GHz	9208-3925	12 mo.	Jan-04
Amplifier				
X	i00028 HP 8449A	2749A00121	12 mo.	May-04
Spectrum Analyzer				
X	i00029 HP 8563E	3213A00104	12 mo.	May-04
X	i00033 HP 85462A	3625A00357	12 mo.	Sep-04
Substitution Generator				
X	i00067 HP 8920A Communication TS	3345U01242	12 mo.	Jun-04
	i00207 HP 8753D Network Analyzer	3410A08514	12 mo.	Jul-04

Microphone, Antenna Port, and Cabling

Microphone	Yes	Cable Length _____ Meters
Antenna Port Terminated	Yes	Load _____ - _____ Antenna Gain _____ 0dB
All Ports Terminated by Load	Yes	Peripheral _____ No _____

Name of Test: Field Strength of Spurious Radiation

Measurement Results

g04a0141: 2004-Oct-12 Tue 16:26:00

STATE: 2:High Power

Ambient Temperature: 23°C ± 3°C

Frequency Tuned, MHz	Frequency Emission, MHz	ERP, dBm	ERP, dBc
380.000000	760.005000	-23.2	-69.7
425.000000	850.010000	-14.0	-60.5
470.000000	940.001100	-22.0	-68.5
380.000000	1139.990000	-55.3	-101.8
425.000000	1275.000000	-44.9	-91.4
470.000000	1409.995833	-36.8	-83.3
380.000000	1519.990000	-63.3	-109.8
425.000000	1699.990833	-25.9	-72.4
470.000000	1880.003333	-36.5	-83.0
380.000000	1900.011667	-47.8	-94.3
425.000000	2124.995833	-39.9	-86.4
380.000000	2280.011667	-61.0	-107.5
470.000000	2349.990833	-30.0	-76.5
425.000000	2550.011667	-51.7	-98.2
380.000000	2660.011667	-54.2	-100.7
470.000000	2819.997500	-12.6	-59.1
470.000000	2819.997500	-16.6	-63.1
470.000000	2819.997500	-13.3	-59.8
470.000000	2819.998333	-12.8	-59.3
470.000000	2819.998333	-4.8	-51.3
470.000000	2819.998333	-7.6	-54.1
470.000000	2820.000000	-8.6	-55.1
425.000000	2975.010000	-51.8	-98.3
380.000000	3040.011667	-51.9	-98.4
470.000000	3289.997500	-26.8	-73.3
425.000000	3399.995000	-45.3	-91.8
380.000000	3420.011667	-56.0	-102.5
470.000000	3759.997500	-29.8	-76.3
380.000000	3800.011667	-54.8	-101.3
425.000000	3825.001667	-42.9	-89.4
470.000000	4229.998333	-39.5	-86.0
425.000000	4250.005000	-51.0	-97.5
470.000000	4699.998333	-33.2	-79.7

Performed by:



David E. Lee,
Compliance Test Manager

Name of Test: Emission Masks (Occupied Bandwidth)


Specification: 47 CFR 2.1049(c)(1)

Guide: ANSI/TIA/EIA-603-1992, Paragraph 2.2.11

Measurement Procedure

- A) The EUT and test equipment were set up as shown below
- B) For EUTs supporting audio modulation, the audio signal generator was adjusted to the frequency of maximum response and with output level set for $\pm 2.5/\pm 1.25$ kHz deviation (or 50% modulation). With level constant, the signal level was increased 16 dB.
- C) For EUTs supporting digital modulation, the digital modulation mode was operated to its maximum extent.
- D) The Occupied Bandwidth was measured with the Spectrum Analyzer controls set as shown on the test results.

Transmitter Test Set-Up: Occupied Bandwidth

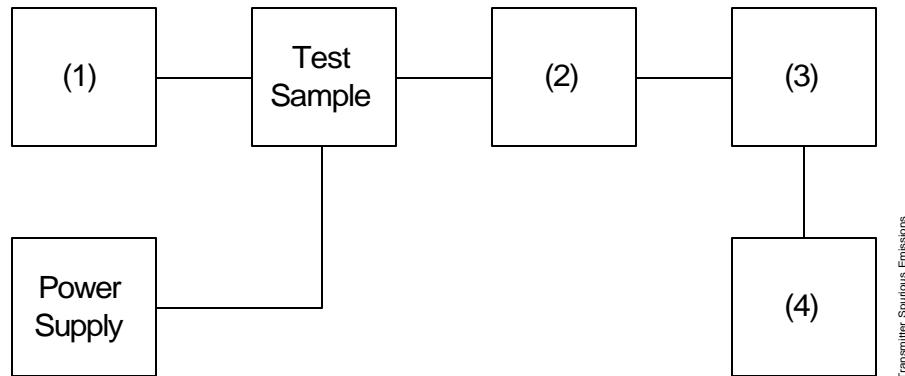

Asset	Description	s/n	Cycle	Last Cal
(1) Audio Oscillator/Generator				
X i00017	HP 8903A Modulation Meter	2216A01753	12 mo.	Apr-04
(2) Coaxial Attenuator				
X i00231/2	PASTERNACK PE7021-30 (30 dB)	231 or 232	NCR	
i00123	NARDA 766 (10 dB)	7802A	NCR	
(3) Interface				
X i00021	HP 8954A Transceiver Interface	2146A00159	NCR	
(4) Spectrum Analyzer				
X i00048	HP 8566B Spectrum Analyzer	2511A01467	12 mo.	Oct-04
i00029	HP 8563E Spectrum Analyzer	3213A00104	12 mo.	May-04


Name of Test: Emission Masks (Occupied Bandwidth)

Measurement Results

g04b0049: 2004-Nov-09 Tue 10:15:00

State: 2:High Power

Ambient Temperature: 23°C ± 3°C

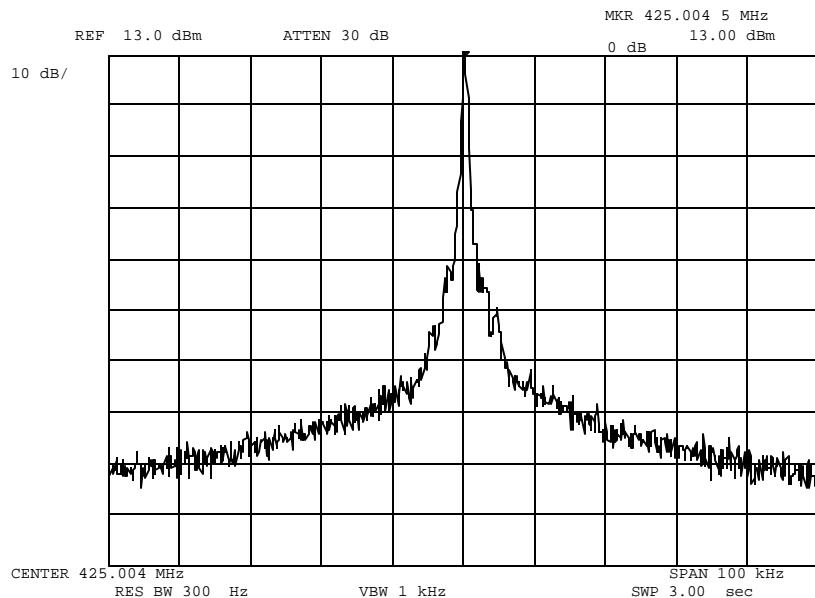

Power:
Modulation:

HIGH
NONE

Performed by:


Bobby Leanio


Name of Test: Emission Masks (Occupied Bandwidth)

Measurement Results

g04b0050: 2004-Nov-09 Tue 10:16:00

State: 2:High Power

Ambient Temperature: 23°C ± 3°C

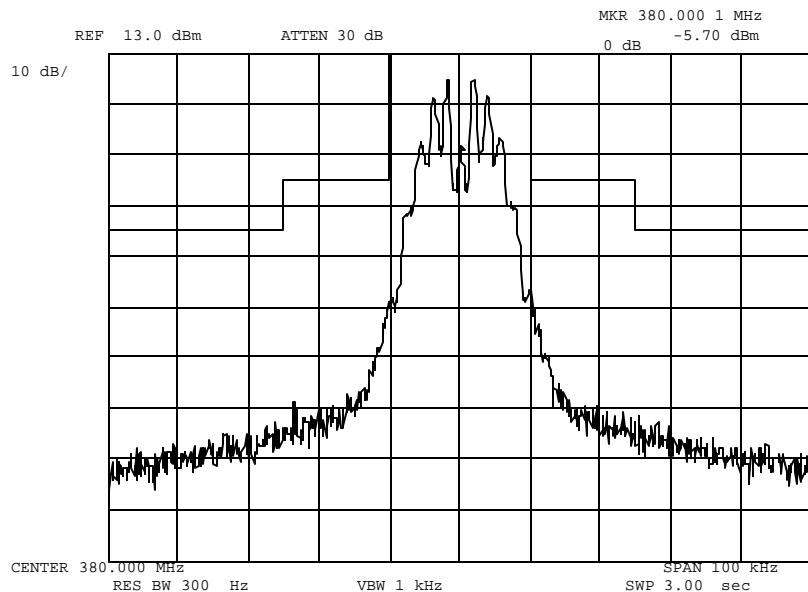

Power:
Modulation:

HIGH
VOICE 2500Hz
MASK: B, VHF/UHF 25kHz, w/LPF

Performed by:


Bobby Leanio


Name of Test: Emission Masks (Occupied Bandwidth)

Measurement Results

g04b0051: 2004-Nov-09 Tue 10:18:00

State: 2:High Power

Ambient Temperature: 23°C ± 3°C

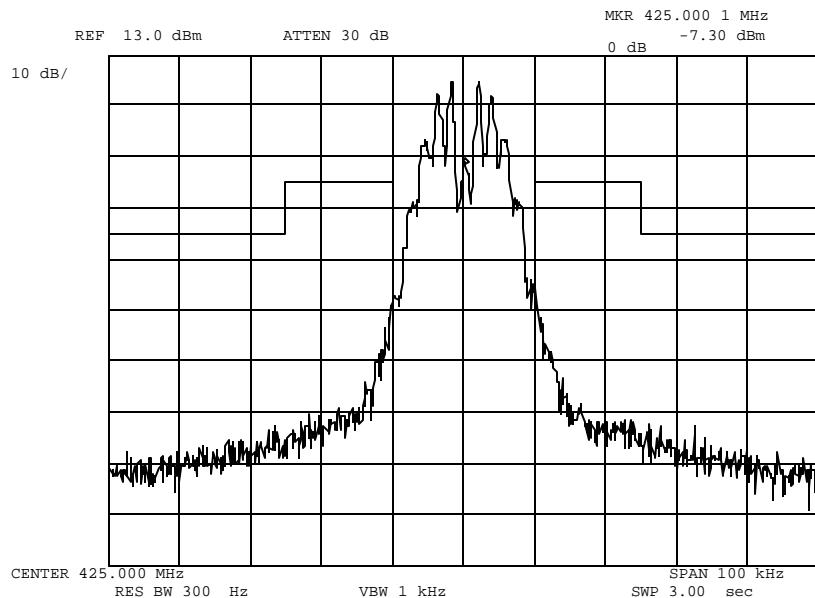

Power:

HIGH

Modulation:

VOICE 2500Hz

MASK: B, VHF/UHF 25kHz, w/LPF

Performed by:


Bobby Leanio


Name of Test: Emission Masks (Occupied Bandwidth)

Measurement Results

g04b0052: 2004-Nov-09 Tue 10:19:00

State: 2:High Power

Ambient Temperature: 23°C ± 3°C

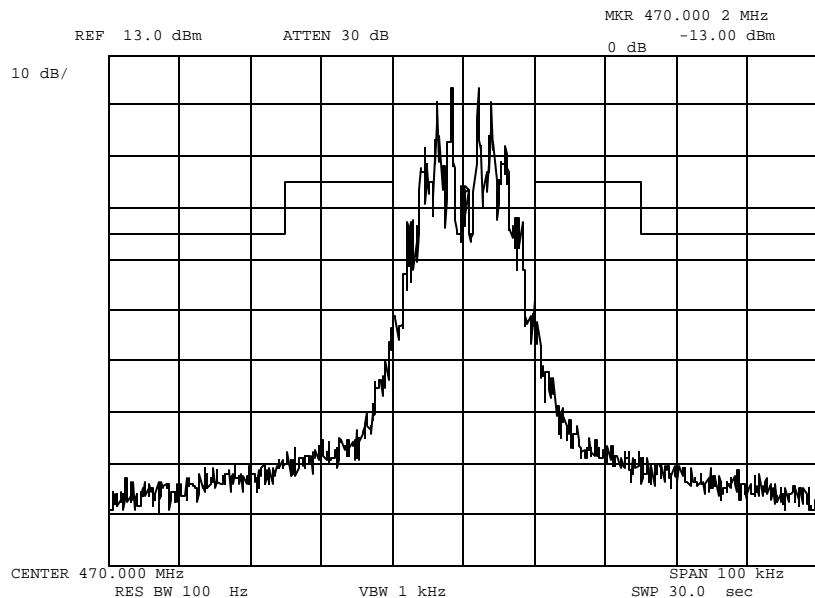

Power:

HIGH

Modulation:

VOICE 2500Hz

MASK: B, VHF/UHF 25kHz, w/LPF

Performed by:


Bobby Leanio


Name of Test: Emission Masks (Occupied Bandwidth)

Measurement Results

g04a0001: 2004-Oct-27 Wed 09:32:00

State: 2:High Power

Ambient Temperature: 23°C ± 3°C

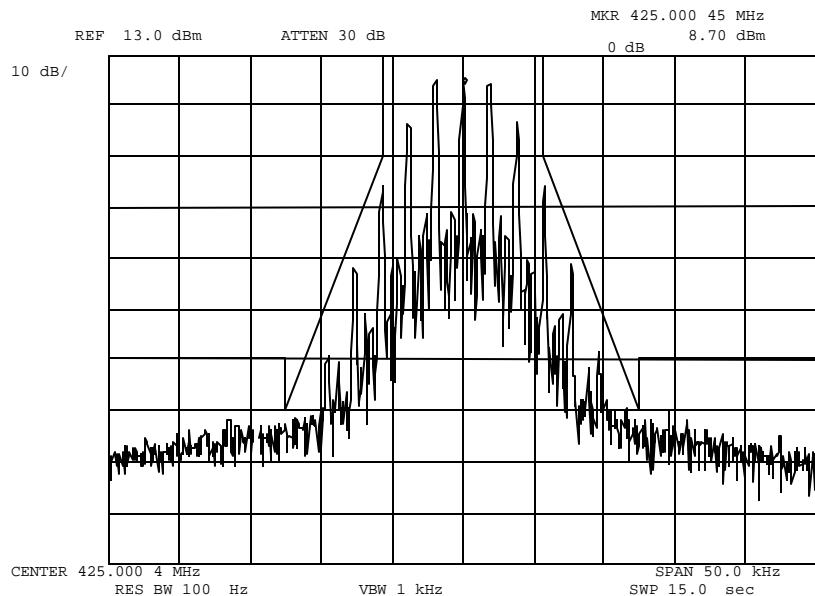

Power:
Modulation:

HIGH
VOICE 2500Hz
MASK: D, VHF/UHF 12.5kHz BW

Performed by:


Bobby Leanio


Name of Test: Emission Masks (Occupied Bandwidth)

Measurement Results

g04a0002: 2004-Oct-27 Wed 09:35:00

State: 2:High Power

Ambient Temperature: 23°C ± 3°C

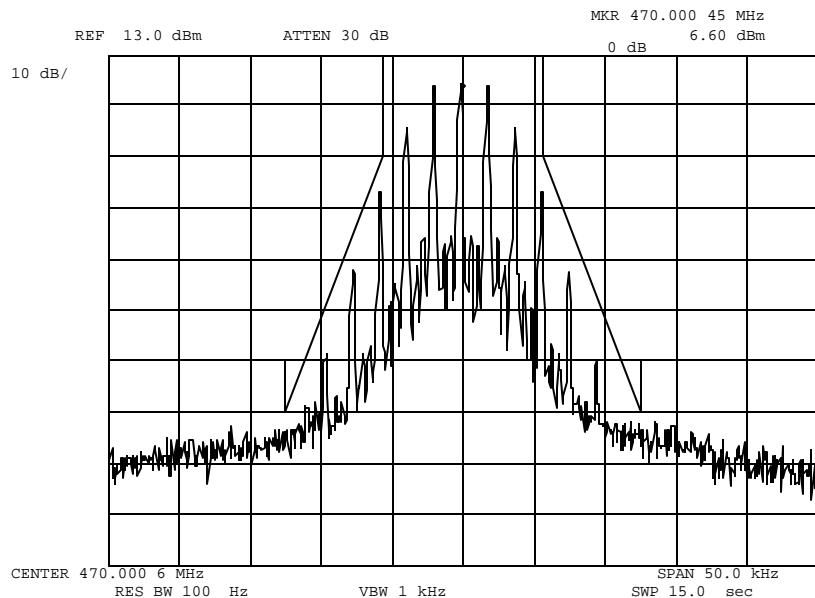

Power:

HIGH

Modulation:

VOICE 2500Hz

MASK: D, VHF/UHF 12.5kHz BW

Performed by:


Bobby Leanio


Name of Test: Emission Masks (Occupied Bandwidth)

Measurement Results

g04a0003: 2004-Oct-27 Wed 09:38:00

State: 2:High Power

Ambient Temperature: 23°C ± 3°C

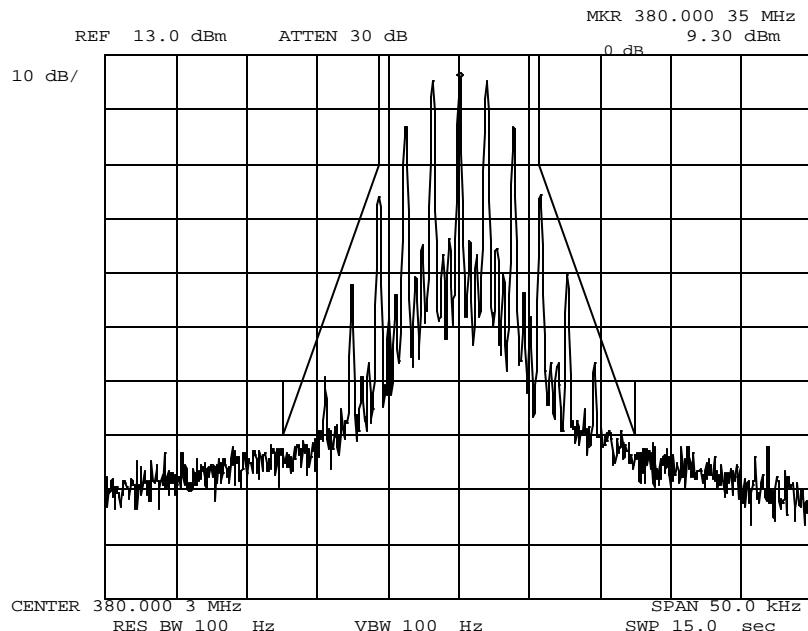

Power:


HIGH

Modulation:

VOICE 2500Hz

MASK: D, VHF/UHF 12.5kHz BW

Performed by:


Bobby Leanio

M. Flom Associates, Inc.
3356 North San Marcos Place, Suite 107
Chandler, Arizona 85225-7176
(480) 926-3100 phone, (480) 926-3598 fax

Page 25 of 46

FCC ID: ATH2425331

MFA p0490011, d04c0001


Name of Test: Emission Masks (Occupied Bandwidth)

Measurement Results

g04a0004: 2004-Oct-27 Wed 09:40:00

State: 2:High Power

Ambient Temperature: 23°C ± 3°C

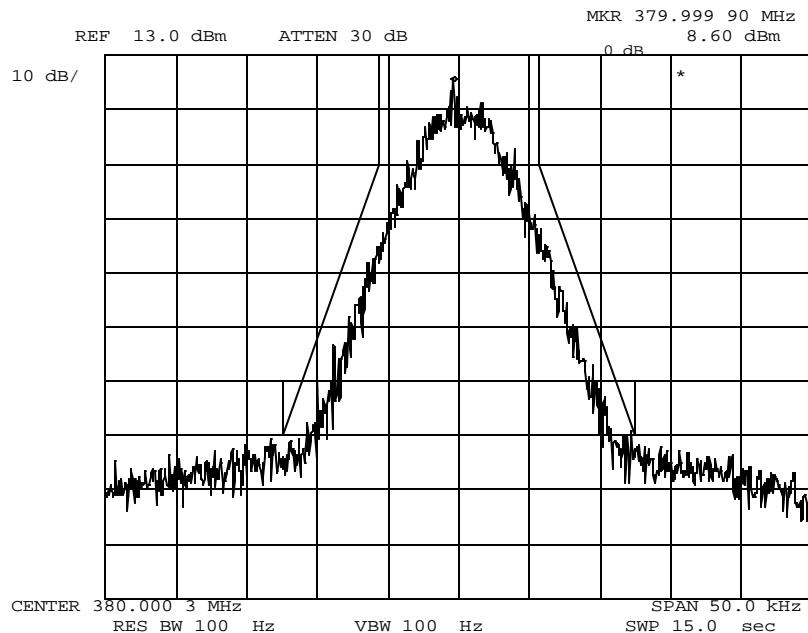

Power:
Modulation:

HIGH
DIGITIZED VOICE 2500Hz
MASK: D, VHF/UHF 12.5kHz BW

Performed by:


Bobby Leanio


Name of Test: Emission Masks (Occupied Bandwidth)

Measurement Results

g04a0005: 2004-Oct-27 Wed 09:44:00

State: 2:High Power

Ambient Temperature: 23°C ± 3°C

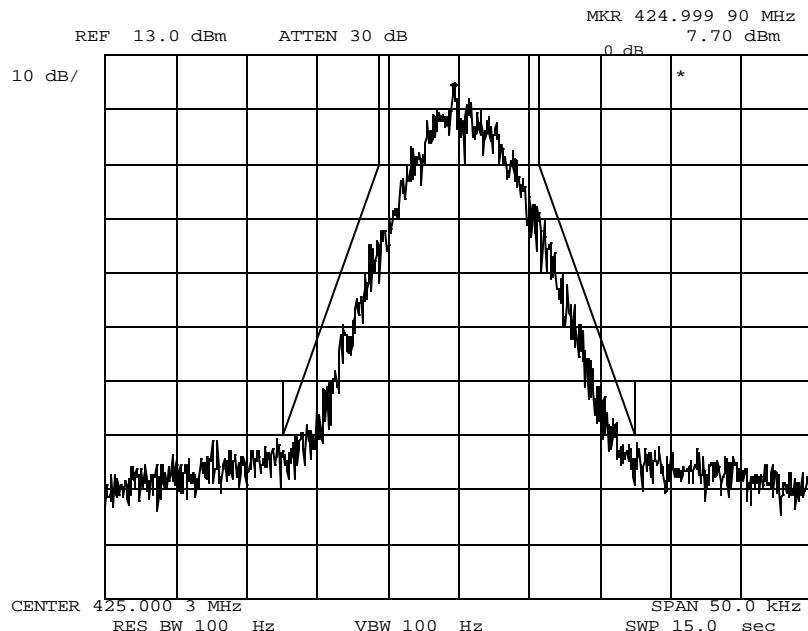

Power:
Modulation:

HIGH
DIGITIZED VOICE 2500Hz
MASK: D, VHF/UHF 12.5kHz BW

Performed by:


Bobby Leanio


Name of Test: Emission Masks (Occupied Bandwidth)

Measurement Results

g04a0006: 2004-Oct-27 Wed 09:46:00

State: 2:High Power

Ambient Temperature: 23°C ± 3°C

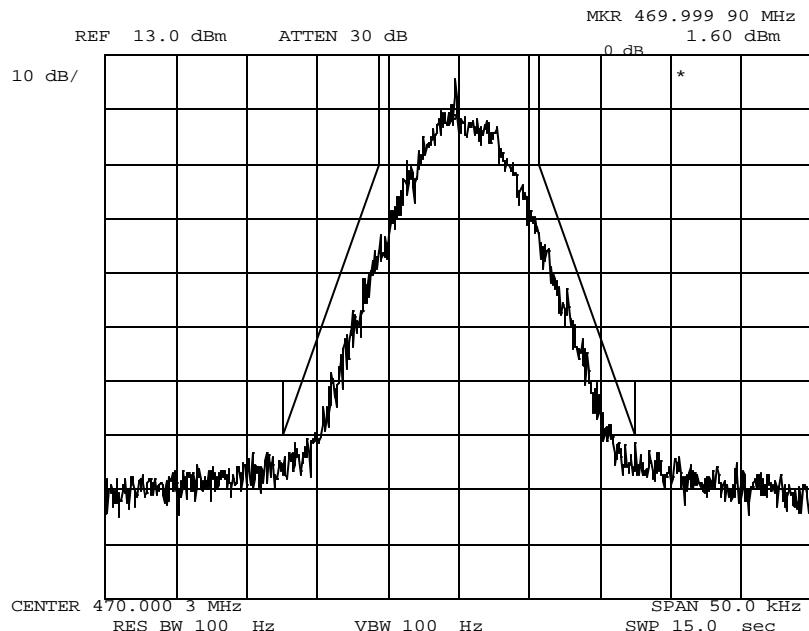

Power:

HIGH

Modulation:

DIGITIZED VOICE 2500Hz

MASK: D, VHF/UHF 12.5kHz BW

Performed by:


Bobby Leanio

Name of Test: Transient Frequency Behavior

Specification: 47 CFR 90.214


Guide: ANSI/TIA/EIA-603-1992, Paragraph 2.2.19

Measurement Procedure

- A) The EUT was setup as shown on the attached page, following TIA/EIA-603 steps a, b, and c as a *guide*.
- B) The transmitter was turned on.
- C) Sufficient attenuation was provided so that the transmitter carrier level measured at the output of the combiner was 40 dB below the maximum input level of the test receiver. This level was recorded.
- D) The transmitter was turned off.
- E) An RF signal generator (1) modulated with a 1 kHz tone at either 25, 12.5, or 6.25 kHz deviation, and set to the same frequency as the assigned transmitter frequency, (2) was adjusted to a level -20 dB below the level recorded for step C) above, measured at the output of the combiner. This level was then fixed for the remainder of the test.
- F) The oscilloscope was setup using TIA/EIA-603 steps j and k as a guide, and to either 10 ms/div (UHF) or 5 ms/div (VHF).
- G) The 30 dB attenuator was removed, the transmitter was turned on, and the level of the carrier at the output of the combiner was recorded.
- H) The carrier on-time as referenced in TIA/EIA-603 steps m, n, and o was captured and plotted. The carrier off-time as referenced in TIA/EIA-603 steps p, q, r, and s was captured and plotted.

Name of Test: Transient Frequency Behavior

Transmitter Set-Up

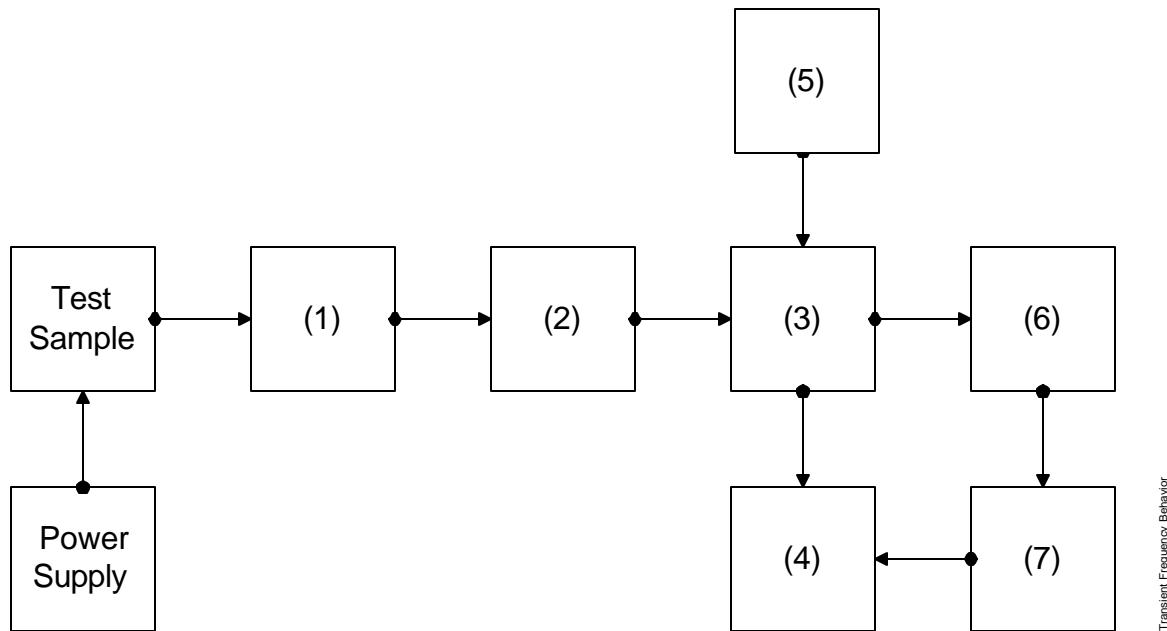


Asset	Description	s/n	Cycle	Last Cal
(1) Attenuator (Removed after 1st step)				
X i00231/2	PASTERNACK PE7021-30 (30 dB)	231 or 232	NCR	
(2) Attenuator				
X i00231/2	PASTERNACK PE7021-30 (30 dB)	231 or 232	NCR	
i00122/3	NARDA 766 (10 dB)	7802 or 7802A	NCR	
(3) Combiner				
X i00154	4 x 25 Ω Combiner	154	NCR	
(4) Crystal Decoder				
X i00159	HP 8470B Crystal Detector	1822A10054	NCR	
(5) RF Signal Generator				
X i00067	HP 8920A Communication TS	3345U01242	12 mo.	Jun-04
(6) Modulation Analyzer				
X i00020	HP 8901A Modulation Meter	2105A01087	12 mo.	Apr-04
(7) Oscilloscope				
X i00030	HP 54502A Digital Oscilloscope	2927A00209	12 mo.	Jan-04

Name of Test: Transient Frequency Behavior

2004-Nov-10, 13:19, Wed

Ambient Temperature: 23°C ± 3°C

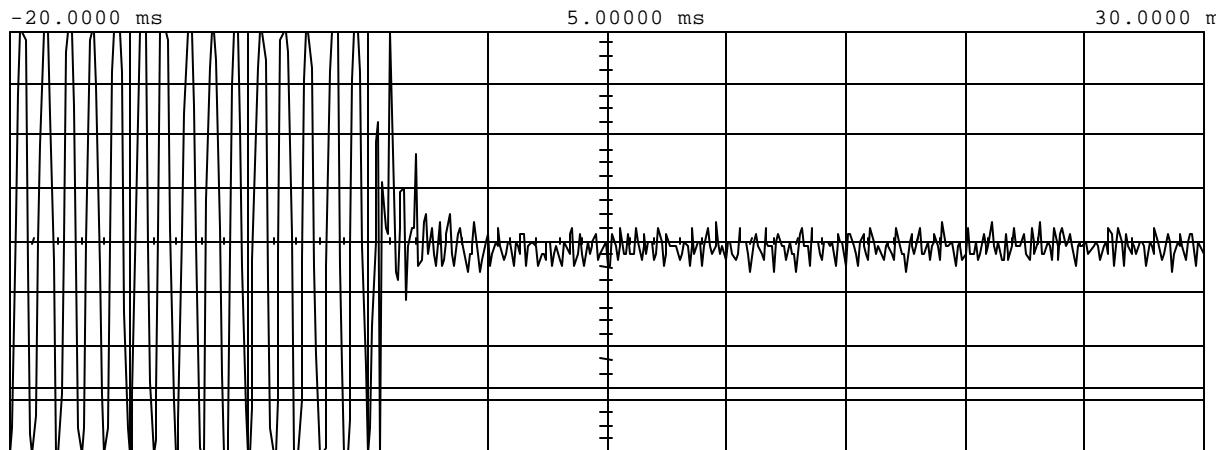

Main	Timebase 5.00 ms/div	Delay/Pos -20.0000 ms	Reference Left	Mode Repetitive
Channel 1	Sensitivity 50.0 mV/div	Offset 5.000 mV	Probe 1.000 :1	Coupling ac (1M ohm)

Trigger mode : Edge
On Negative Edge Of Chan2
Trigger Level
Chan2 = -27.500 mV (noise reject ON)
Holdoff = 40.000 ns

Power:	High
Modulation:	25 kHz Deviation
Description:	Carrier On

Performed by:




Bobby Leanio

Name of Test: Transient Frequency Behavior

2004-Nov-10, 13:21, Wed

Ambient Temperature: 23°C ± 3°C

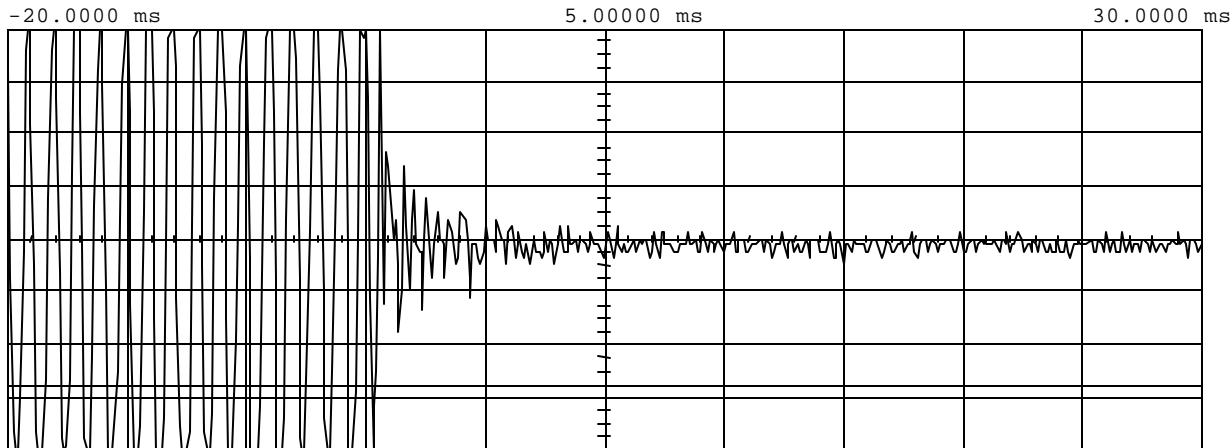

Main	Timebase 5.00 ms/div	Delay/Pos -20.0000 ms	Reference Left	Mode Repetitive
Channel 1	Sensitivity 50.0 mV/div	Offset 5.000 mV	Probe 1.000 :1	Coupling ac (1M ohm)

Trigger mode : Edge
On Negative Edge Of Chan2
Trigger Level
Chan2 = -27.500 mV (noise reject ON)
Holdoff = 40.000 ns

Power:	High
Modulation:	12.5 kHz Deviation
Description:	Carrier On

Performed by:

M. Flom Associates, Inc.
3356 North San Marcos Place, Suite 107
Chandler, Arizona 85225-7176
(480) 926-3100 phone, (480) 926-3598 fax




Bobby Leanio

Name of Test: Transient Frequency Behavior

2004-Nov-10, 13:06, Wed

Ambient Temperature: 23°C ± 3°C

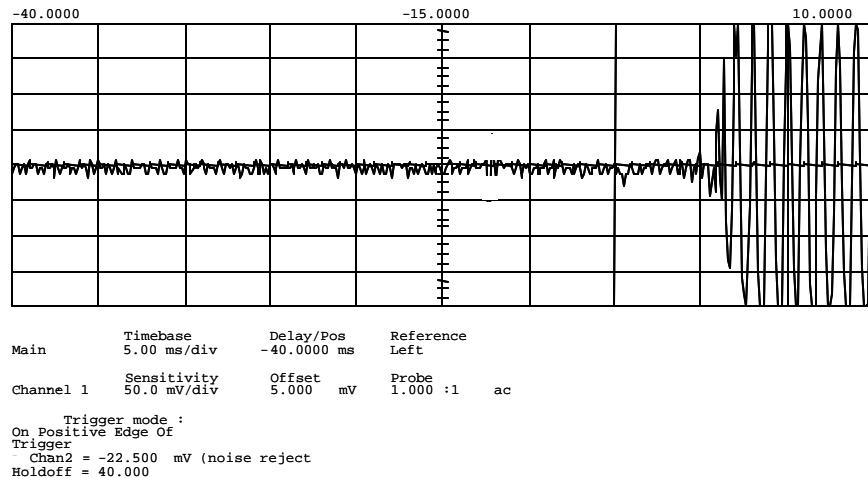

Power:
Modulation:
Description:

High
12.5 kHz Deviation
Carrier Off

Performed by:




Bobby Leanio

Name of Test: Transient Frequency Behavior

2004-Nov-10, 13:08, Wed

Ambient Temperature: 23°C ± 3°C

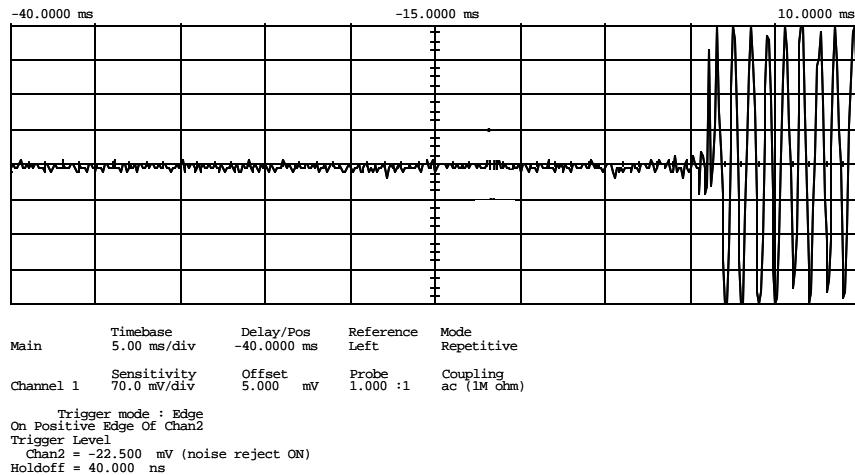

Power: High
Modulation: 25 kHz Deviation
Description: Carrier Off

Performed by:



Bobby Leanio

Name of Test: Audio Low Pass Filter (Voice Input)


Specification: 47 CFR 2.1047(a)

Guide: ANSI/TIA/EIA-603-1992, Paragraph 2.2.15

Measurement Procedure

- A) The EUT and test equipment were set up such that the audio input was connected at the input to the modulation limiter, and the modulated stage.
- B) The audio output was connected at the output to the modulated stage.

Transmitter Test Set-Up: Response of Low Pass Filter

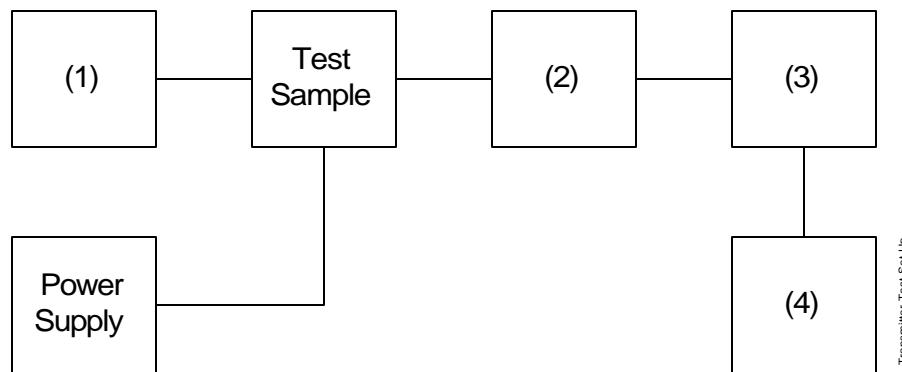

Asset	Description	s/n	Cycle	Last Cal
(1) Audio Oscillator				
X i00002	HP 3336B Synthesizer / Level Gen.	1931A01465	12 mo	Apr-04
(2) Coaxial Attenuator				
i00122/3	NARDA 766 (10dB)10	7802 or 7802A	NCR	
X i00231/2	PASTERNACK PE7021-30 (30 dB)	231 or 232	NCR	
(3) Modulation Analyzer				
X i00020	HP 8901A Modulation Meter	2105A01087	12 mo.	Apr-04
(4) Audio Analyzer				
X i00001	HP 3586B Selective Level Meter	1928A01360	12 mo.	Apr-04


Name of Test: Audio Low Pass Filter (Voice Input)

Measurement Results

g04a0146: 2004-Oct-13 Wed 15:27:00

State: 0:General

Ambient Temperature: $23^{\circ}\text{C} \pm 3^{\circ}\text{C}$

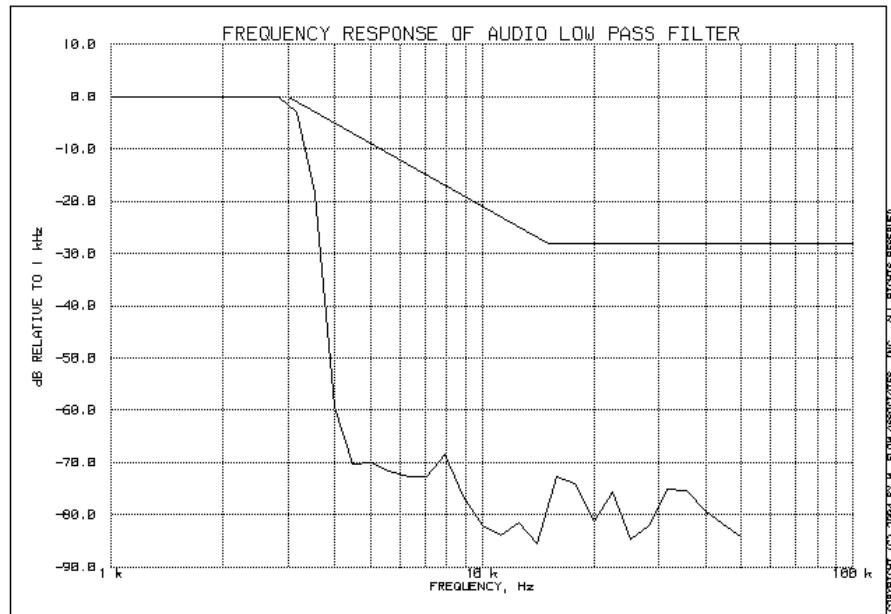

COPYRIGHT (C) 2004 BY M. FLOM ASSOCIATES, INC. ALL RIGHTS RESERVED.

Performed by:



David E. Lee,
Compliance Test Manager

Name of Test: Audio Frequency Response


Specification: 47 CFR 2.1047(a)

Guide: ANSI/TIA/EIA-603-1992, Paragraph 2.2.6

Measurement Procedure

- A) The EUT and test equipment were set up as shown below.
- B) The audio signal generator was connected to the audio input circuit/microphone of the EUT.
- C) The audio signal input was adjusted to obtain 20% modulation at 1 kHz, and this point was taken as the 0 dB reference level.
- D) With input levels held constant and below limiting at all frequencies, the audio signal generator was varied from 100 Hz to 50 kHz.
- E) The response in dB relative to 1 kHz was measured, using the HP 8901A Modulation Meter.

Transmitter Test Set-Up: Audio Frequency Response

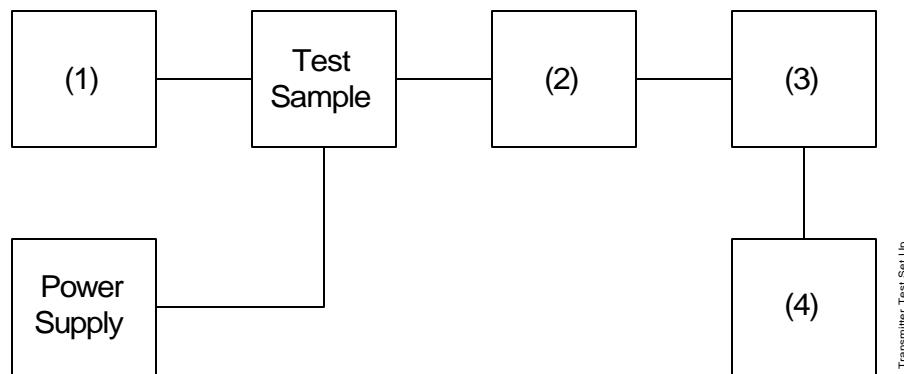

Transmitter Test Set Up

Asset	Description	s/n	Cycle	Last Cal
(1) Audio Oscillator				
X i00017	HP 8903A Audio Analyzer	2216A01753	12 mo.	Apr-04
(2) Coaxial Attenuator				
i00122/3	NARDA 766-(10 dB)	7802 or 7802A	NCR	
X i00231/2	PASTERACK PE7021-30 (30 dB)	231 or 232	NCR	
(3) Modulation Analyzer				
X i00020	HP 8901A Modulation Meter	2105A01087	12 mo.	Apr-04
(4) Audio Analyzer				
X i00017	HP 8903A Audio Analyzer	2216A01753	12 mo.	Apr-04


Name of Test: Audio Frequency Response

Measurement Results

g04a0145: 2004-Oct-13 Wed 15:22:00

State: 0:General

Ambient Temperature: $23^{\circ}\text{C} \pm 3^{\circ}\text{C}$

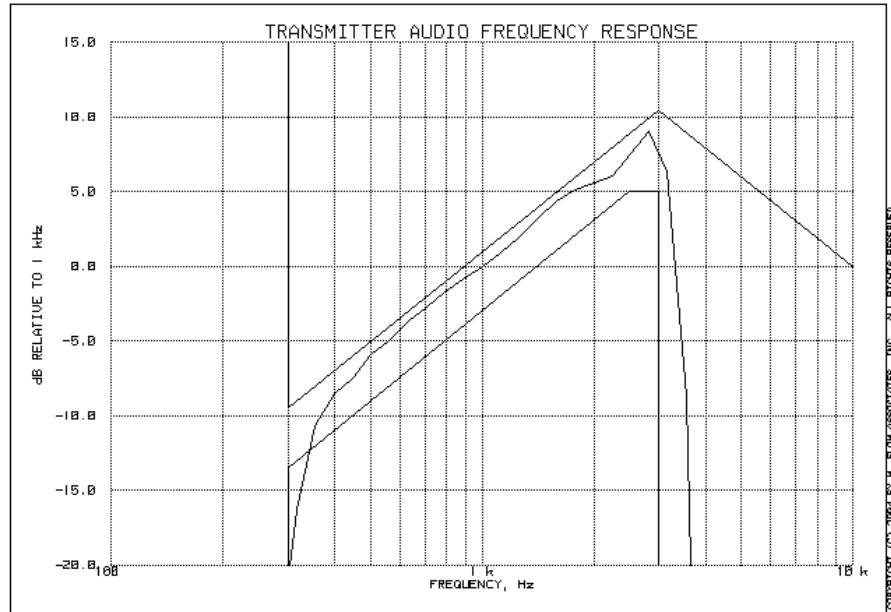

Frequency of Maximum Audio Response, Hz = 2820

Additional points:

Frequency, Hz	Level, dB
300	-20.20
20000	-50.77
30000	-49.88
50000	-49.43

Performed by:



David E. Lee,
Compliance Test Manager

Name of Test: Modulation Limiting


Specification: 47 CFR 2.1047(b)

Guide: ANSI/TIA/EIA-603-1992, Paragraph 2.2.3

Measurement Procedure

- A) The signal generator was connected to the input of the EUT as shown below.
- B) The modulation response was measured for each of three frequencies (one of which was the frequency of maximum response), and the input voltage was varied and was observed on an HP 8901A Modulation Analyzer.
- C) The input level was varied from 30% modulation (± 1.5 kHz deviation) to at least 20 dB higher than the saturation point.
- D) Measurements were performed for both negative and positive modulation and the respective results were recorded.

Transmitter Test Set-Up: Modulation Limiting

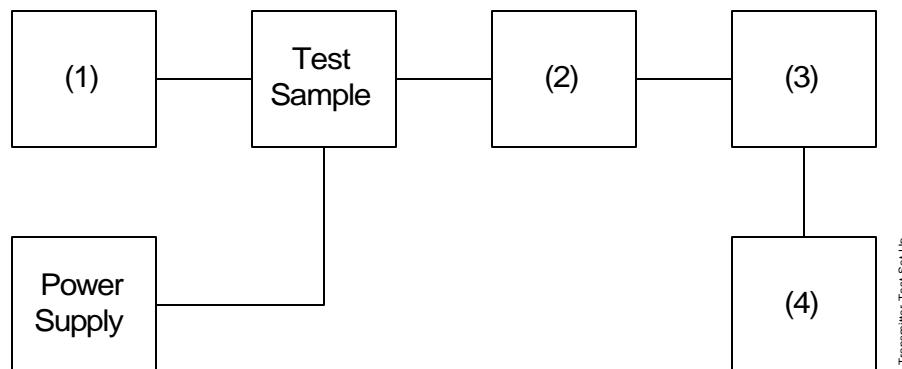

Asset	Description		s/n		
(1) Audio Oscillator	X	i00017	HP 8903A Audio Analyzer	2216A01753	12 mo. Apr-04
(2) Coaxial Attenuator	i0012/23	NARDA 766-(10 dB)	7802 or 7802A	NCR	
	X	i00231/2	PASTERNACK PE7021-30 (30 dB)	231 or 232	NCR
(3) Modulation Analyzer	X	i00020	HP 8901A Modulation Meter	2105A01087	12 mo. Apr-04
(4) Audio Analyzer	X	i00017	HP 8903A Audio Analyzer	2216A01753	12 mo. Apr-04

Name of Test: Modulation Limiting


Measurement Results

g04a0147: 2004-Oct-13 Wed 15:37:00


State: 0:General

Ambient Temperature: $23^{\circ}\text{C} \pm 3^{\circ}\text{C}$

Positive Peaks:

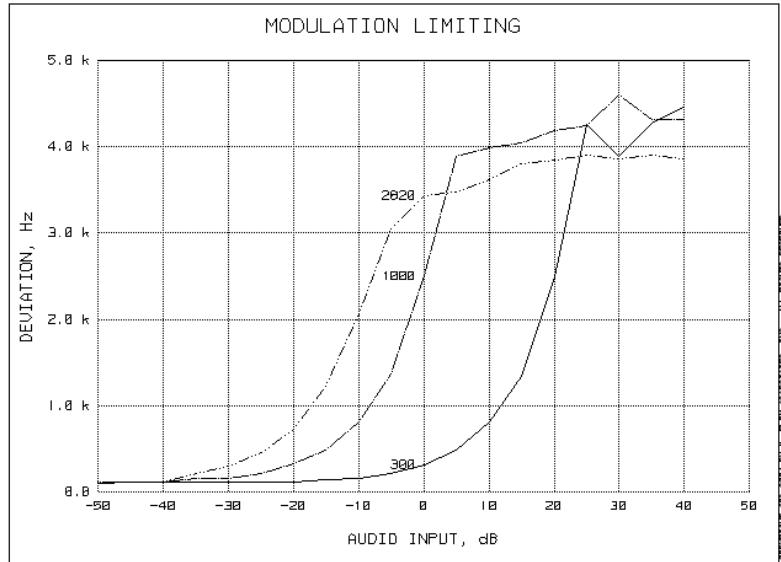

Negative Peaks:

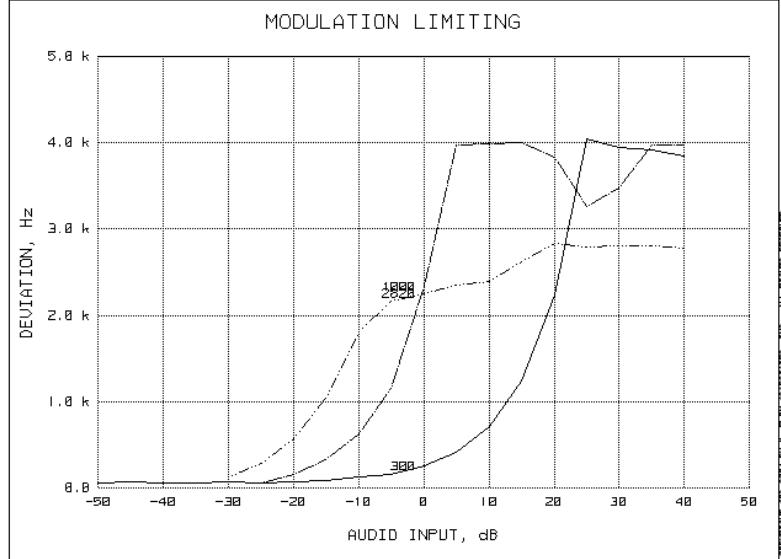

Performed by:



David E. Lee,
Compliance Test Manager

Name of Test: Modulation Limiting


Measurement Results

g04a0148: 2004-Oct-13 Wed 15:43:00


State: 0:General

Ambient Temperature: $23^{\circ}\text{C} \pm 3^{\circ}\text{C}$

Positive Peaks:

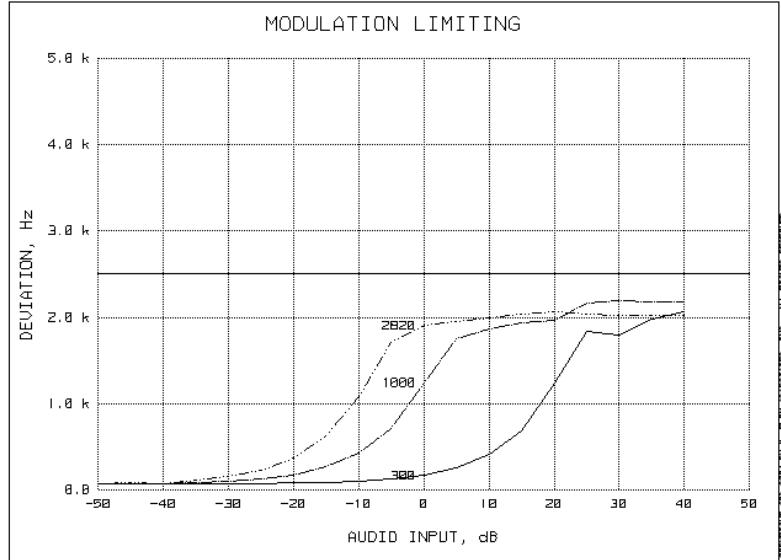

Negative Peaks:

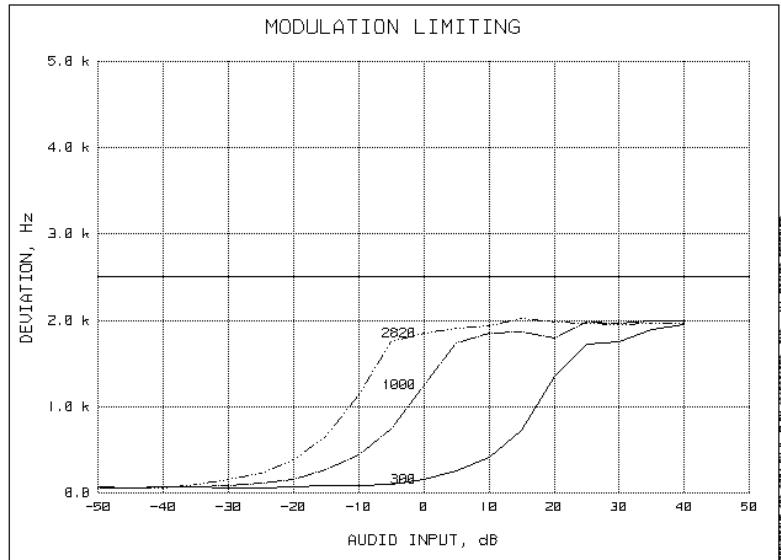

Performed by:



David E. Lee,
Compliance Test Manager

Name of Test: Frequency Stability (Temperature Variation)


Specification: 47 CFR 2.1055(a)(1)

Guide: ANSI/TIA/EIA-603-1992, Paragraph 2.2.2

Measurement Procedure

- A) The EUT and test equipment were set up as shown on the following page.
- B) With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.
- C) With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
- D) The temperature tests were performed for the worst case.

Transmitter Test Set-Up: Temperature Variation

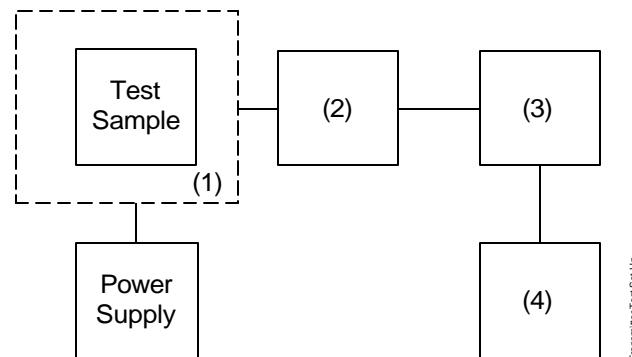


Asset	Description	s/n	Cycle	Last Cal
(1) Temperature, Humidity, Vibration				
X i00027	Tenney Temp. Chamber	9083-765-234	NCR	
(2) Coaxial Attenuator				
X i00231/2	PASTERNACK PE7021-30 (30 dB)	231 or 232	NCR	
i00122/3	NARDA 766 (10 dB)	7802 or 7802A	NCR	
(3) RF Power				
X i00067	HP 8920A Communications TS	3345U01242	12 mo.	Jun-04
(4) Frequency Counter				
X i00067	HP 8920A Communications TS	3345U01242	12 mo.	Jun-04

Name of Test: Frequency Stability (Temperature Variation)

Measurement Results

State:

Room Temperature: $23^{\circ}\text{C} \pm 3^{\circ}\text{C}$

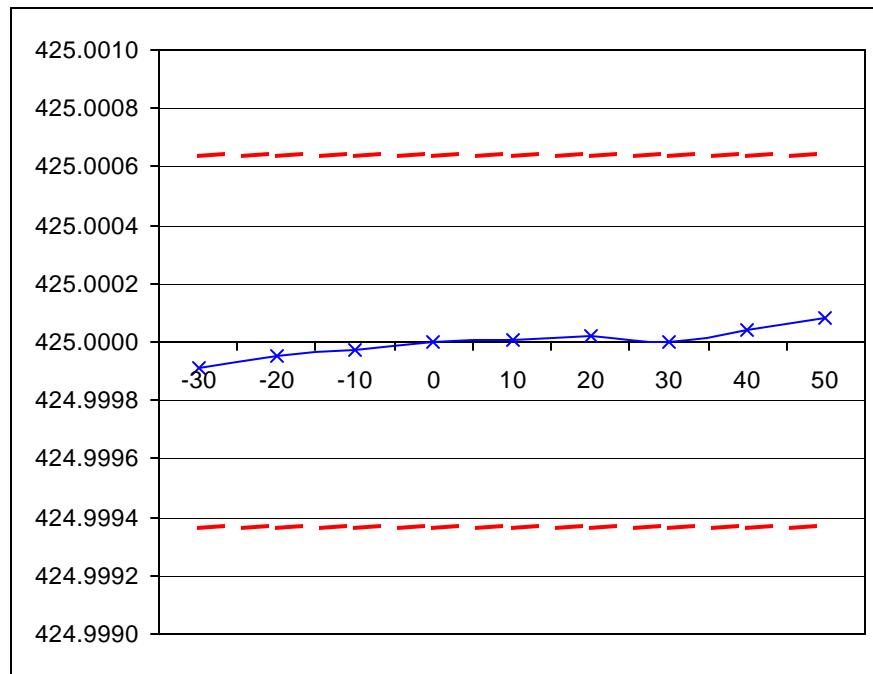

Performed by:



Bobby Leanio

Name of Test: Frequency Stability (Voltage Variation)


Specification: 47 CFR 2.1055(d)(1)

Guide: ANSI/TIA/EIA-603-1992, Paragraph 2.2.2

Measurement Procedure

- A) The EUT was placed in a temperature chamber (if required) at $25\pm 5^{\circ}\text{C}$ and connected as shown below.
- B) The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
- C) The variation in frequency was measured for the worst case.

Transmitter Test Set-Up: Voltage Variation

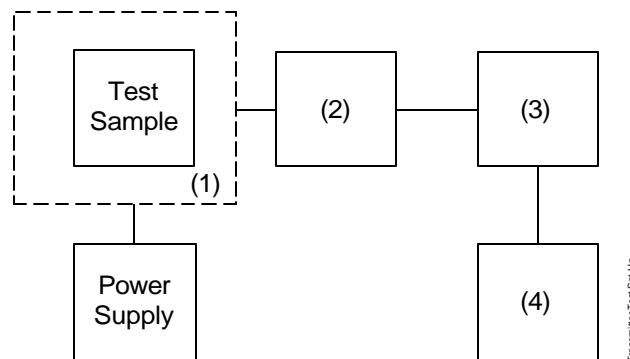

Asset	Description	s/n	Cycle	Last Cal
(1) Temperature, Humidity, Vibration				
i00027	Tenney Temp. Chamber	9083-765-234	NCR	
(2) Coaxial Attenuator				
X i00231/2	PASTERNACK PE7021-30 (30 dB)	231 or 232	NCR	
i00122/3	NARDA 766 (10 dB)	7802 or 7802A	NCR	
(3) RF Power				
X i00020	HP 8901A Power Mode	2105A01087	12 mo.	Apr-04
(4) Frequency Counter				
X i00020	HP 8901A Frequency Mode	2105A01087	12 mo.	Apr-04

Results: Frequency Stability (Voltage Variation)

g04a0151: 2004-Oct-13 Wed 15:12:13

State: 0:General

Ambient Temperature: 23°C ± 3°C

Limit, ppm	= 1.5
Limit, Hz	= 638
Battery End Point (Voltage)	= 10.3

% of STV	Voltage	Frequency, MHz	Change, Hz	Change, ppm
85	11.73	425.000000	0	0.00
100	13.8	425.000000	0	0.00
115	15.87	425.000020	20	0.05
75	10.3	425.000020	20	0.05

Performed by:



David E. Lee,
Compliance Test Manager

Name of Test: Necessary Bandwidth and Emission Bandwidth

Specification: 47 CFR 2.202(g)

Modulation = 16K0F3E

Necessary Bandwidth Calculation:

Maximum Modulation (M), kHz	= 3.00
Maximum Deviation (D), kHz	= 5.00
Constant Factor (K)	= 1
Necessary Bandwidth (B _N), kHz	= $(2 \times M) + (2 \times D \times K)$ = 16.0

Modulation = 14K0F3E

Necessary Bandwidth Calculation:

Maximum Modulation (M), kHz	= 2.00
Maximum Deviation (D), kHz	= 5.00
Constant Factor (K)	= 1
Necessary Bandwidth (B _N), kHz	= $(2 \times M) + (2 \times D \times K)$ = 14.0

Modulation = 11K0F3E

Necessary Bandwidth Calculation:

Maximum Modulation (M), kHz	= 3.00
Maximum Deviation (D), kHz	= 2.50
Constant Factor (K)	= 1
Necessary Bandwidth (B _N), kHz	= $(2 \times M) + (2 \times D \times K)$ = 11.0

Modulation = 8K10F1E

Necessary Bandwidth Calculation:

Maximum Modulation (M), kHz	= 1.5
Maximum Deviation (D), kHz	= 2.5
Constant Factor (K)	= 1
Necessary Bandwidth (B _N), kHz	= $(2 \times M) + (2 \times D \times K)$ = 8.0

Modulation = 8K10F1D

Necessary Bandwidth Calculation:

Maximum Modulation (M), kHz	= 3
Maximum Deviation (D), kHz	= 1.25
Constant Factor (K)	= 1
Necessary Bandwidth (B _N), kHz	= $(2 \times M) + (2 \times D \times K)$ = 8.0

Performed by:



David E. Lee,
Compliance Test Manager

END OF TEST REPORT



Testimonial and Statement of Certification

This is to Certify:

1. **That** the application was prepared either by, or under the direct supervision of, the undersigned.
2. **That** the technical data supplied with the application was taken under my direction and supervision.
3. **That** the data was obtained on representative units, randomly selected.
4. **That**, to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct.

Certifying Engineer:

A handwritten signature in black ink, appearing to read "David E. Lee".

David E. Lee,
Compliance Test Manager