

MODEL : VOD128

CUSTOMER : AUDIOVOX


DATE : 10/07/07

DESCRIPTION : UNIT LABEL LOCATION

REVISION : NEW

PAGE : 5 OF 7

BACK VIEW

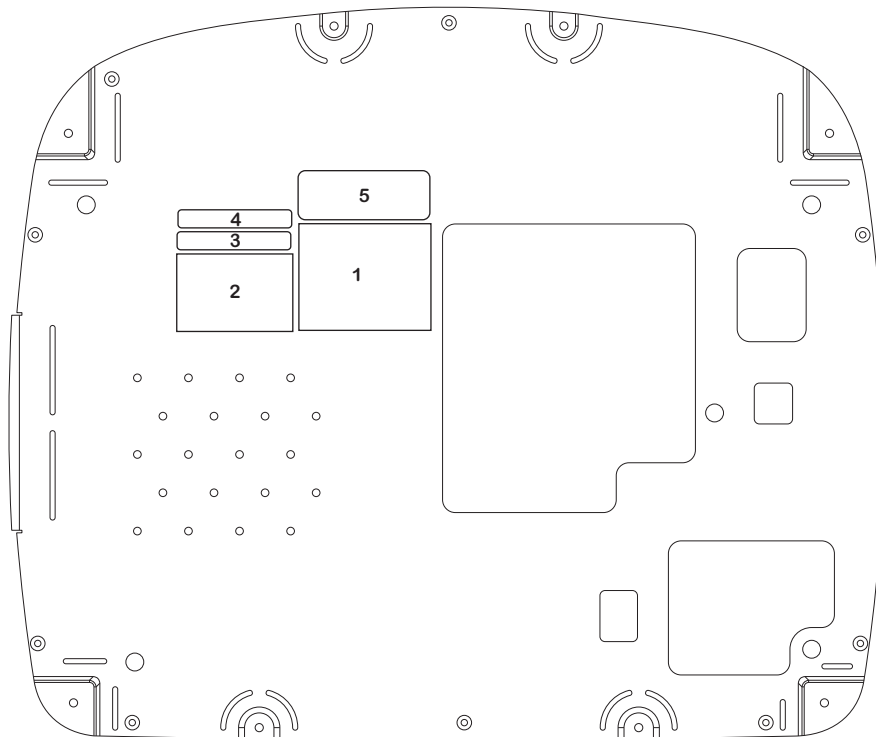

① CHASSIS LABEL (52 x 42mm) P/N: 50-AC-10010G

AUDIOVOX
ELECTRONICS CORP.

150 Marcus Blvd., Hauppauge, NY 11788
Technical Assistance: 1-800-225-6074

MODEL No.: VOD128

12-Pin Harness

Signal Name	Color
LAMP-AUTO	VIO/BRN
LAMP-COMMON	BLK/RED
LAMP-ON	RED/BLK
LINE OUT-RIGHT	RED (RCA)
LINE OUT-LEFT	WHITE (RCA)
VIDEO OUTPUT	YELLOW (RCA)
POWER +12v (SW)	RED
POWER GROUND	BLACK

Inspected By : _____

To 2-Pin Connector

Made in Malaysia 132-7419

② FCC / FDA / Class 1 Laser Label P/N: 90-KQ-02010G (45 x 30mm)

This device complies with FCC Rules Part 15. Operation is subject to the following two conditions : (1) This device may not cause harmful interference and (2) This device must accept any interference that may be received, including interference that may cause undesired operation.

This product is Class 1 Laser Product and complies with FDA Rules 21 CFR Chapter 1, Subchapter J.

③ PATENT LABEL P/N: 90-NH-09010G (44 x 7mm)

Licensed under one or more of the following patents, Patent NOS. 5,775,762 and 5,927,784

④ FCC ID LABEL (44 x 7mm) P/N: 90-AC-01010G (44 x 7mm)


FCC ID : ATI9R3VOD128

⑤ BC S/N LBL 136-4422-POD



WARRANTY VOID IF LABEL REMOVED

FRONT PANEL

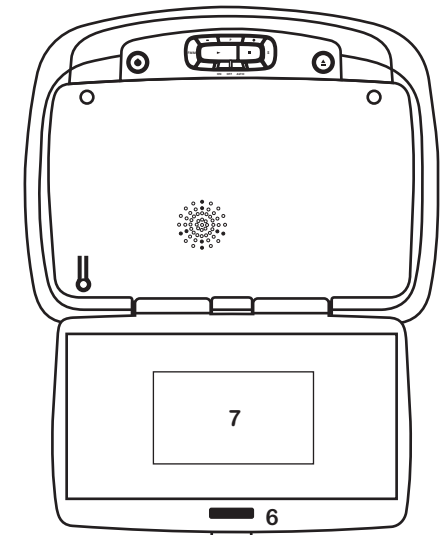

⑥ WARNING LABEL P/N: 51-NH-06010G (32.0 x 6.5mm)

AUDIOVOX

⑦ WARNING LABEL P/N: 90-X1-09010G (90 x 70mm)

WARNING

An LCD panel and/or video monitor may be installed in a motor vehicle and visible to the driver if the LCD panel or video monitor is used for vehicle information, system control, rear or side observation or navigation. If the LCD panel or video monitor is used for television reception, video or DVD play, the LCD panel or video monitor must be installed so that these features will only function when the vehicle is in 'park' or when the vehicle's parking brake is applied.

An LCD panel or video monitor used for television reception, video or DVD play that operates when the vehicle is in gear or when the parking brake is not applied must be installed to the rear of the driver's seat where it will not be visible, directly or indirectly, to the operator of the motor vehicle.

NOTE: This label is to be removed by the end user only!