



FCC Test Report

FCC Part 22, 24 / RSS 132, 133

FOR:

**For the
Multi-Tech Systems Inc.**

Model Number: MTSMC-H, MTSMC-H-U

FCC ID: AU792U07G30822

IC ID: 125A-0030

**TEST REPORT #: EMC_MULTI_022_07002_FCC22_24
DATE: 2007-8-28**



**FCC listed:
A2LA accredited
IC recognized #
3462B**

CETECOM Inc.

411 Dixon Landing Road • Milpitas, CA 95035 • U.S.A.

Phone: +1 (408) 586 6200 • Fax: +1 (408) 586 6299 • E-mail: info@cetecomusa.com • <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686

Board of Directors: Dr. Harald Ansorge, Dr. Klaus Matkey, Hans Peter May

© Copyright by CETECOM



Table of Contents

1 ASSESSMENT4

2 ADMINISTRATIVE DATA.....5

2.1 IDENTIFICATION OF THE TESTING LABORATORY ISSUING THE EMC TEST REPORT.....5

2.2 IDENTIFICATION OF THE CLIENT5

2.3 IDENTIFICATION OF THE MANUFACTURER.....5

3 EQUIPMENT UNDER TEST (EUT).....6

3.1 SPECIFICATION OF THE EQUIPMENT UNDER TEST6

3.2 IDENTIFICATION OF THE EQUIPMENT UNDER TEST (EUT)6

3.3 IDENTIFICATION OF ACCESSORY EQUIPMENT6

4 SUBJECT OF INVESTIGATION.....7

5 MEASUREMENTS.....8

5.1 RF POWER OUTPUT8

5.1.1 *FCC 2.1046 Measurements required: RF power output.*.....8

5.1.2 *Limits:*8

5.1.2.1 *FCC 22.913 (a) Effective radiated power limits.*8

5.1.2.2 *FCC 24.232 (b)(c) Power limits.*8

5.1.3 *Conducted Output Power Measurement procedure:*.....8

5.1.4 *Radiated Output Power Measurement procedure:*.....9

5.1.5 *ERP Results 850 MHz band:*.....10

5.1.6 *EIRP Results 1900 MHz band:*.....10

5.2 OCCUPIED BANDWIDTH/EMISSION BANDWIDTH29

5.2.1 *FCC 2.1049 Measurements required: Occupied bandwidth.*.....29

5.2.2 *Occupied / emission bandwidth measurement procedure:*.....29

5.2.3 *Occupied / Emission bandwidth results 850 MHz band:*29

5.3 FREQUENCY STABILITY30

5.3.1 *Limit*30

5.3.2 *Test Results GSM850*31

5.3.3 *Test Results UMTS FDD5*31

5.3.4 *Test Results GSM1900*31

5.3.5 *Test Results UMTS FDD2*31

5.4 SPURIOUS EMISSIONS CONDUCTED.....32

5.4.1 *FCC 2.1051 Measurements required: Spurious emissions at antenna terminals.*32

5.4.2 *Limits:*32

5.4.2.1 *FCC 22.917 Emission limitations for cellular equipment.*32

5.4.2.2 *FCC 24.238 Emission limitations for Broadband PCS equipment.*32

5.4.3 *Conducted out of band emissions measurement procedure:*33

5.4.4 *Test Results: Conducted Emission:*33

5.5 SPURIOUS EMISSIONS RADIATED34

5.5.1 *FCC 2.1053 Measurements required: Field strength of spurious radiation.*.....34

5.5.2 *Limits:*34

5.5.2.1 *FCC 22.917 Emission limitations for cellular equipment.*34

5.5.2.2 *FCC 24.238 Emission limitations for Broadband PCS equipment.*34

5.5.3 *Radiated out of band measurement procedure:*35



5.5.4	<i>Radiated out of band emissions results on EUT:</i>	37
5.5.4.1	RESULTS OF RADIATED SPURIOUS EMISSIONS TESTS GSM-850:	37
5.5.4.2	RESULTS OF RADIATED SPURIOUS EMISSIONS TESTS(UMTS FDD5)	49
5.5.4.3	RESULTS OF RADIATED SPURIOUS EMISSIONS TESTS (PCS-1900):.....	59
5.5.4.4	RESULTS OF RADIATED SPURIOUS EMISSIONS TESTS (UMTS FDD2):.....	69
5.5.5	<i>RECEIVER RADIATED EMISSIONS § 2.1053 / RSS-132 & 133</i>	79
5.5.5.1	Test Results	79
5.6	AC POWER LINE CONDUCTED EMISSIONS § 15.107/207.....	87
5.6.1	<i>Limits</i>	87
5.6.2	<i>Results, Line:</i>	88
6	TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS	89
7	REFERENCES	90
8	BLOCK DIAGRAMS	91



1 Assessment

The following is in compliance with the applicable criteria specified in FCC rules Parts 2, 22 and 24 of Title 47 of the Code of Federal Regulations and in compliance with the applicable criteria specified in Industry Canada rules RSS132 and RSS133.

Company	Description	Model #
Multi-Tech Systems Inc.	SocketModem HSDPA	MTSMC-H MTSMC-H-U

Technical responsibility for area of testing:

Lothar Schmidt
 (Director Regulatory and
 Antenna Services)

2007-8-28 EMC & Radio

Date	Section	Name	Signature
------	---------	------	-----------

This report is prepared by:

Peter Mu
 (EMC Project Engineer)

2007-8-28 EMC & Radio

Date	Section	Name	Signature
------	---------	------	-----------

The test results of this test report relate exclusively to the test item specified in Identification of the Equipment under Test. The CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc USA.

The test results of this test report relate exclusively to radiated measurement only. Radio module used in this product has been previously certified under its own FCC and IC ID.



2 Administrative Data

2.1 Identification of the Testing Laboratory Issuing the EMC Test Report

Company Name:	CETECOM Inc.
Department:	EMC
Address:	411 Dixon Landing Road Milpitas, CA 95035 U.S.A.
Telephone:	+1 (408) 586 6200
Fax:	+1 (408) 586 6299
Responsible Test Lab Manager:	Lothar Schmidt
Responsible Project Leader:	Peter Mu
Date of test:	2007-8-9 to 2007-8-28

2.2 Identification of the Client

Applicant's Name:	Multi-Tech Systems Inc
Address Line 1:	2205 Woodale Drive
Address Line 2:	
City/ Zip Code	Mounds View, MN 55112
Country:	U.S.A
Contact Person:	Thomas Hofstede
Phone No.:	763.717.5505
Fax:	763.717.5814
e-mail:	thofstede@multitech.com

2.3 Identification of the Manufacturer

Same as above client.



3 Equipment under Test (EUT)

3.1 Specification of the Equipment under Test

Marketing Name of EUT (if not same as Model No.)	SocketModem HSDPA
Description	SocketModem HSDPA
Model No.	MTSMC-H, MTSMC-H-U
FCC-ID	AU792U07G30822
IC-ID (Industry Canada)	125A-0030
Frequency Range:	824.2MHz – 848.8MHz for GSM 850 1850.2MHz – 1909.8MHz for PCS 1900 826.4MHz – 846.6MHz for UMTS FDD5 1852.4MHz – 1907.6MHz for UMTS FDD2
Type(s) of Modulation:	GMSK, 8PSK, QPSK
Number of Channels:	124 for GSM-850, 299 for PCS-1900
Antenna Type:	Quad Band 2.0dBi
Max. Output Power:	Radiated : see section 5.1.5 and 5.1.6. 29.12dBm (0.817W) @ GSM 848.8MHz ERP values 26.13dBm (0.410W) @ PCS 1852.4MHz EIRP values

3.2 Identification of the Equipment Under Test (EUT)

EUT #	TYPE	MANF.	MODEL	IMEI #
1	EUT	Multi-Tech Systems Inc	MTSMC-H-U	35411401.001897.704

3.3 Identification of Accessory equipment

AE #	TYPE	MANF.	MODEL	SERIAL #
1	AC/DC ADAPTER	GlobTek, Inc	GT-21089-1509-T3	RoHS00144922/06
2	Developer Board	Multi-Tech	MTSMI-UDK	12283593

4 Subject of Investigation

All testing was performed on the EUT listed in Section 3. The EUT was maximized in the X,Y, Z positions , all data in this report shows the worst case between horizontal and vertical polarization for above 1GHz. The dual band antenna used has 2dBi only and is provided with a 3m cable.

The objective of the measurements done by Cetecom Inc. was to measure the performance of the EUT as specified by requirements listed in FCC rules Parts 2, 22 and 24 of Title 47 of the Code of Federal Regulations and Industry Canada rules RSS132 and RSS133.

This EUT contains an FCC approved module with the FCC ID: **QIPHC25**. This report refers mainly to the radiated measurements in both GSM and UMTS FDD technology.

In addition, measurements are made at 60C, 70C and 75C to determine Frequency Stability under these conditions. Findings confirm that the EUT complies.

5 Measurements

5.1 RF Power Output

5.1.1 FCC 2.1046 Measurements required: RF power output.

Power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on circuit elements as specified. The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

5.1.2 Limits:

5.1.2.1 FCC 22.913 (a) Effective radiated power limits.

The effective radiated power (ERP) of mobile transmitters must not exceed 7 Watts.

5.1.2.2 FCC 24.232 (b)(c) Power limits.


(b) Mobile/portable stations are limited to 2 Watts effective isotropic radiated power (EIRP).

(c) Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms equivalent voltage. The measurement results shall be properly adjusted for any limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement over the full bandwidth of the channel.

5.1.3 Conducted Output Power Measurement procedure:

Based on TIA-603C 2004

2.2.1 Conducted Carrier Output Power Rating




1. Connect the equipment as shown in the above diagram. A Digital Radiocommunication Tester (DRT) is used to enable the EUT to transmit and to measure the output power.
2. Adjust the settings of the DRT to set the EUT to its maximum power at the required channel.
3. Record the output power level measured by the DRT.
4. Correct the measured level for all losses in the RF path.
5. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.

5.1.4 Radiated Output Power Measurement procedure:

Based on TIA-603C 2004

2.2.17.2 Effective Radiated Power (ERP) or Effective Isotropic Radiated Power (EIRP)

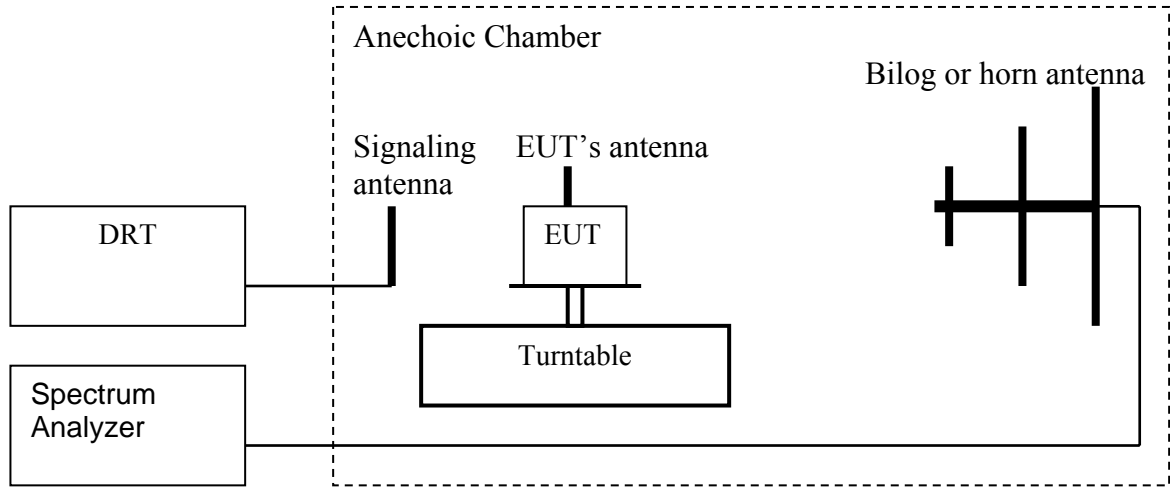

1. Connect the equipment as shown in the above diagram with the EUT's antenna in a vertical orientation.
 2. Adjust the settings of the Digital Radiocommunication Tester (DRT) to set the EUT to its maximum power at the required channel.
 3. Set the spectrum analyzer to the channel frequency. Set the analyzer to measure peak hold with the required settings.
 4. Rotate the EUT 360°. Record the peak level in dBm (**LVL**).
 5. Replace the EUT with a vertically polarized half wave dipole or known gain antenna. The center of the antenna should be at the same location as the center of the EUT's antenna.
 6. Connect the antenna to a signal generator with known output power and record the path loss in dB (**LOSS**). **LOSS** = Generator Output Power (dBm) – Analyzer reading (dBm).
 7. Determine the ERP using the following equation:
ERP (dBm) = LVL (dBm) + LOSS (dB)
 8. Determine the EIRP using the following equation:
EIRP (dBm) = ERP (dBm) + 2.14 (dB)
 9. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band. **Spectrum analyzer settings = rbw=vbw=3MHz**
- (note: Steps 5 and 6 above are performed prior to testing and **LOSS** is recorded by test software. Steps 3, 4, 7 and 8 above are performed with test software.)



5.1.5 ERP Results 850 MHz band:

Power Control Level	Burst Peak ERP
5	≤38.45dBm (7W)

Frequency (MHz)	Effective Radiated Power (dBm)	
	GPRS	EGPRS
824.2	25.5	22.8
836.6	27.54	24.87
848.8	29.12	26.52

Frequency (MHz)	Effective Radiated Power (dBm)
	UMTS FDD5
826.4	21.17
836.6	20.22
846.6	20.62

5.1.6 EIRP Results 1900 MHz band:

Power Control Level	Burst Peak EIRP
0	≤33dBm (2W)

Frequency (MHz)	Effective Isotropic Radiated Power (dBm)	
	GPRS	EGPRS
1850.2	24.72	23.74
1880.0	26.00	24.98
1909.8	26.13	25.12

Frequency (MHz)	Effective Radiated Power (dBm)
	UMTS FDD5
1852.4	20.91
1880	22.17
1907.6	18.96




EIRP (GSM 850) CHANNEL 128 GPRS §22.913(a)

EUT: MTSMC-H-U W/ HC25 MODULE
Customer: Multitech
Test Mode: GPRS 850 CH128
ANT Orientation: H
EUT Orientation: H
Test Engineer: Satya Radhakrishna
Power Supply: AC Adapter
Comments:

SWEEP TABLE: "EIRP 850 CH 128 H"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
819.2 MHz	829.2 MHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM
		MaxPeak			

Marker: 824.330261 MHz 27.64 dBm

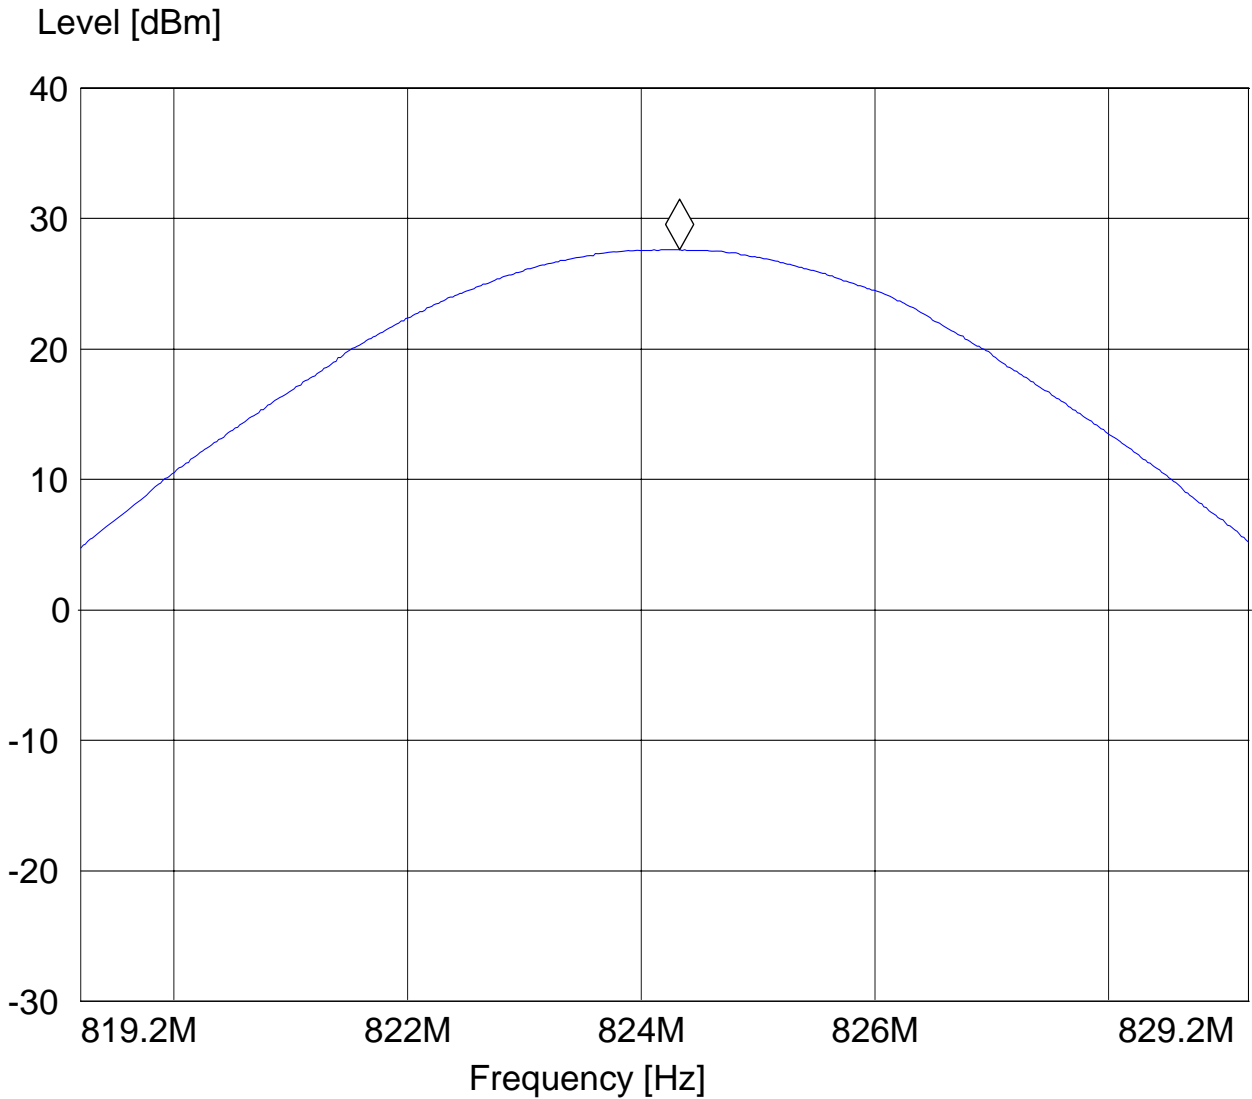




EIRP (GSM 850) CHANNEL 190 GPRS §22.913(a)

EUT: MTSMC-H-U W/ HC25 MODULE
Customer: Multitech
Test Mode: GPRS 850 CH190
ANT Orientation: H
EUT Orientation: H
Test Engineer: Satya Radhakrishna
Power Supply: AC Adapter
Comments:

SWEEP TABLE: "EIRP 850 CH 190 H"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
831.6 MHz	841.6 MHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM
		MaxPeak			

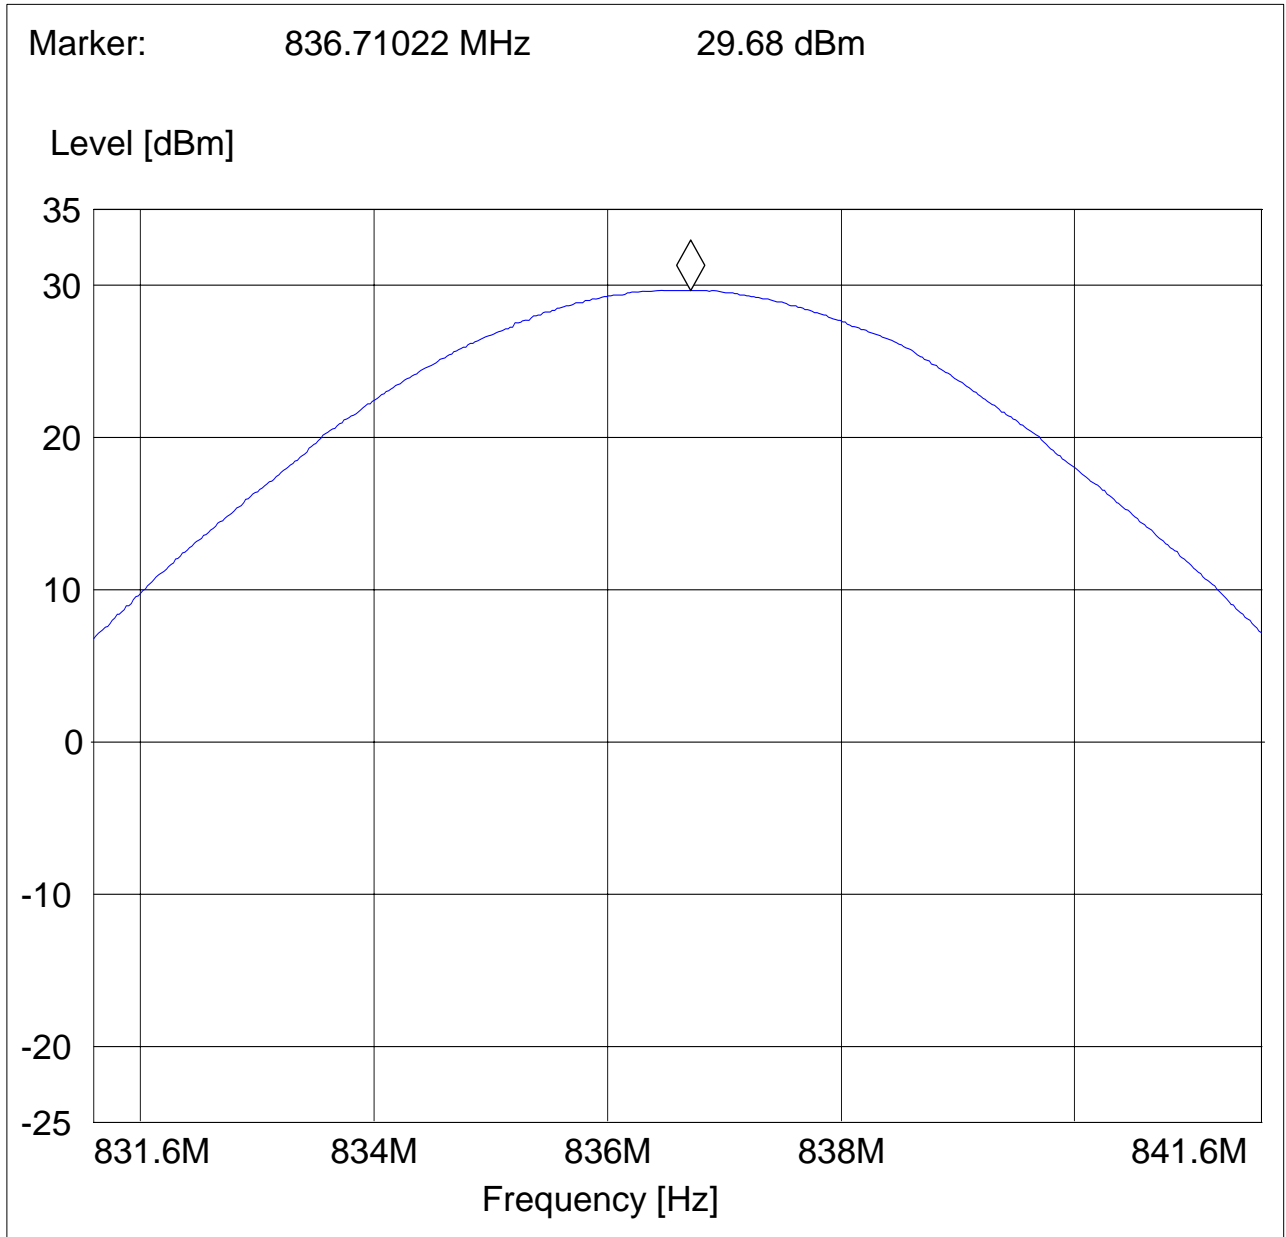




EIRP (GSM 850) CHANNEL 251 GPRS §22.913(a)

EUT: MTSMC-H-U W/ HC25 MODULE
Customer: Multitech
Test Mode: GPRS 850 CH251
ANT Orientation: H
EUT Orientation: H
Test Engineer: Satya Radhakrishna
Power Supply: AC Adapter
Comments:

SWEEP TABLE: "EIRP 850 CH 251 H"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
843.8 MHz	853.8 MHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM

Marker: 848.91022 MHz 31.26 dBm

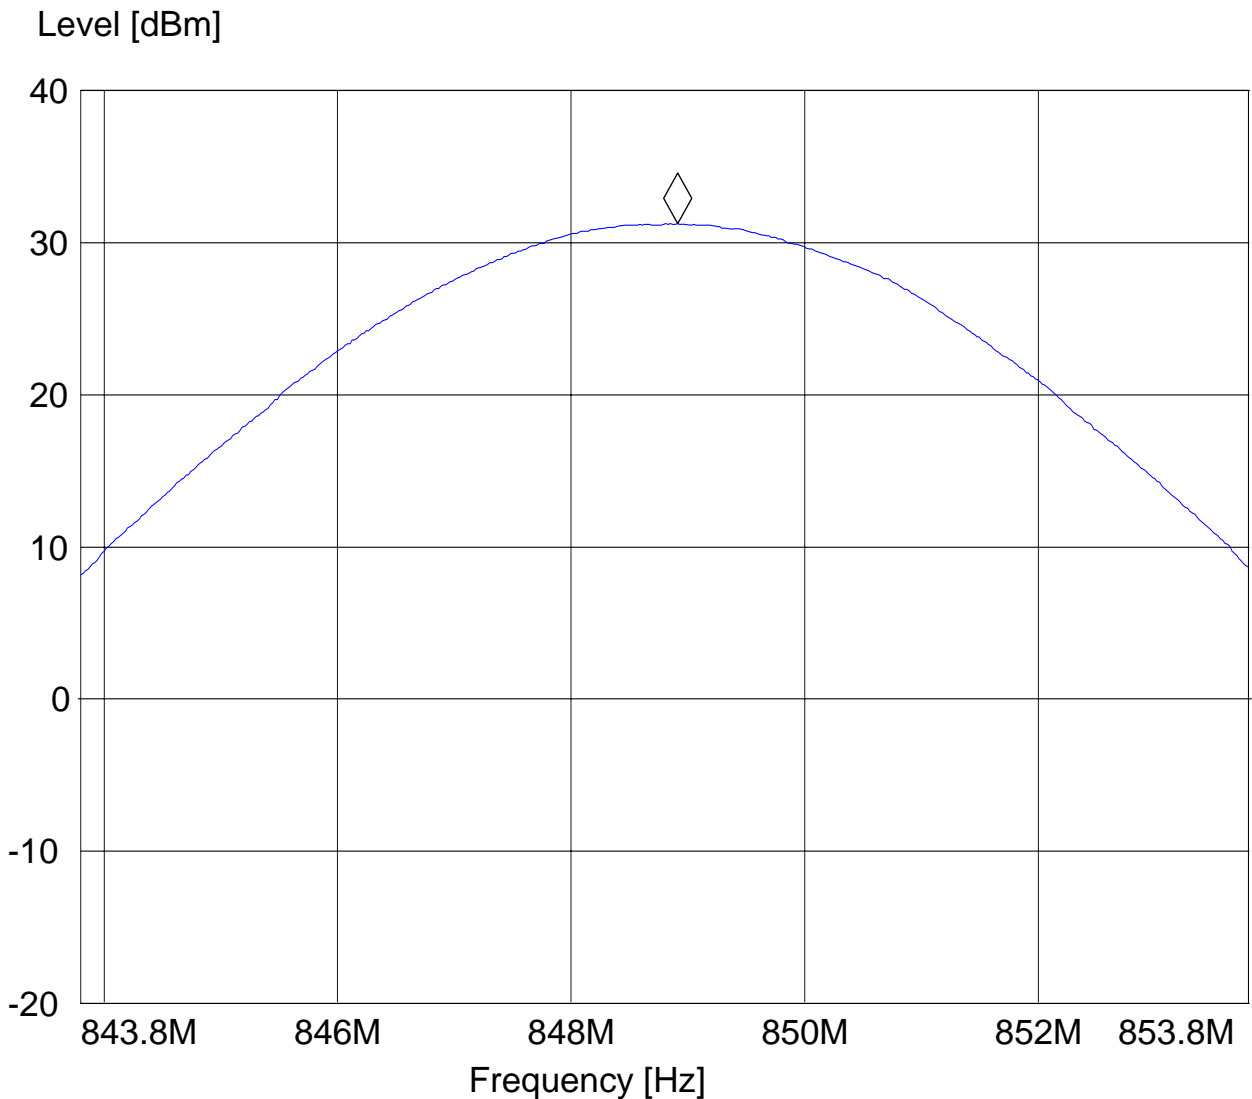




EIRP (GSM 850) CHANNEL 128 EGPRS §22.913(a)

EUT: MTSMC-H-U W/ HC25 MODULE
Customer: Multitech
Test Mode: EGPRS 850 CH128
ANT Orientation: H
EUT Orientation: H
Test Engineer: Satya Radhakrishna
Power Supply: AC Adapter
Comments:

SWEEP TABLE: "EIRP 850 CH 128 H"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
819.2 MHz	829.2 MHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM
		MaxPeak			

Marker: 824.31022 MHz 24.94 dBm

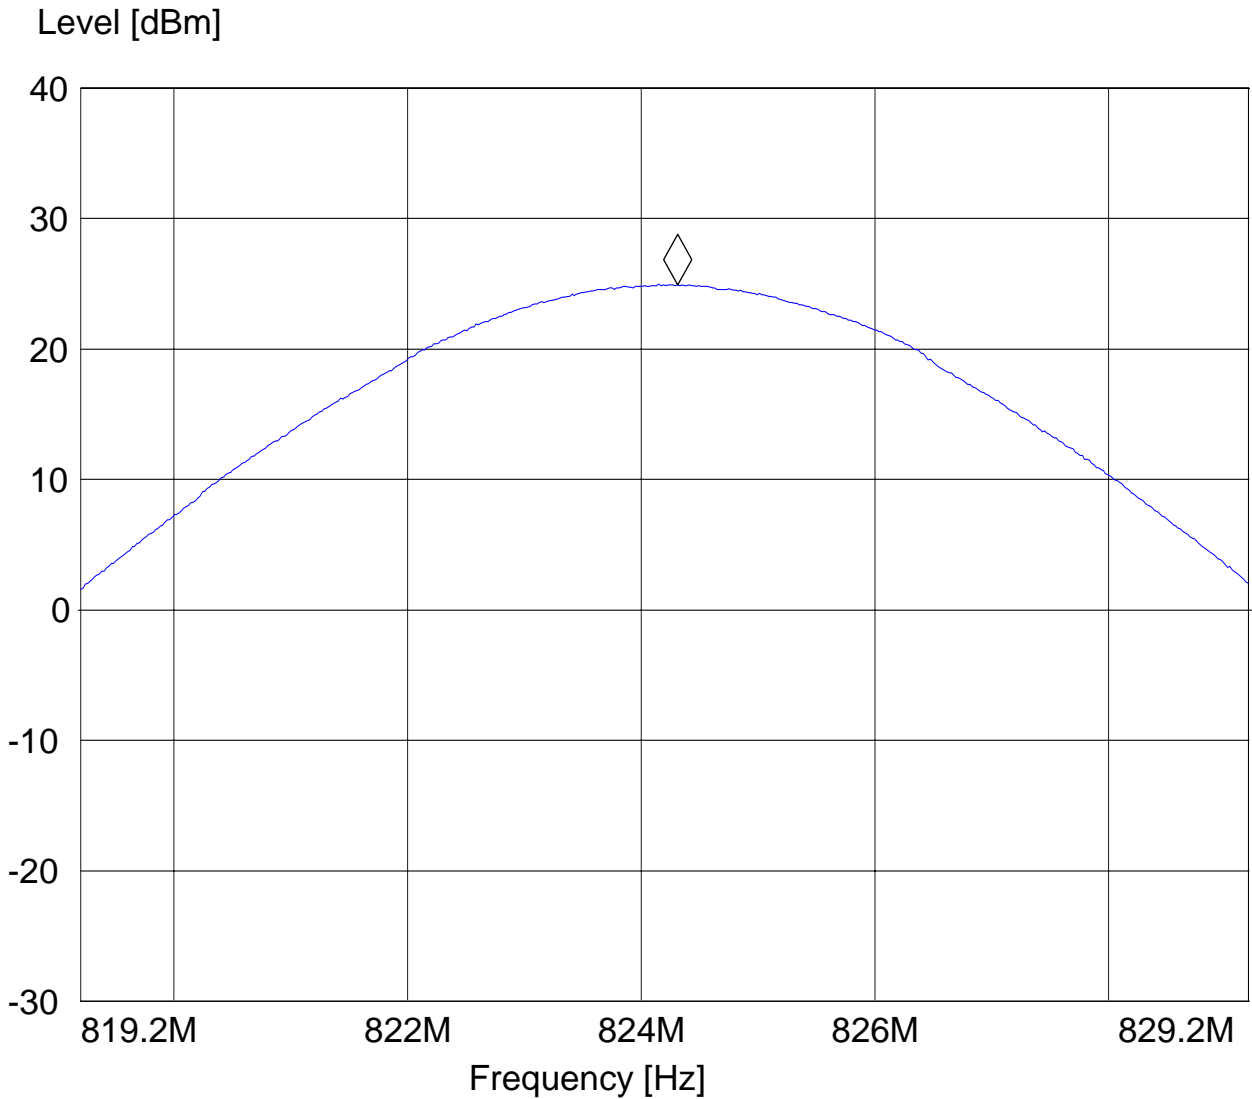




EIRP (GSM 850) CHANNEL 190 EGPRS §22.913(a)

EUT: MTSMC-H-U W/ HC25 MODULE
Customer: Multitech
Test Mode: EGPRS 850 CH190
ANT Orientation: H
EUT Orientation: H
Test Engineer: Satya Radhakrishna
Power Supply: AC Adapter
Comments:

SWEEP TABLE: "EIRP 850 CH 190 H"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
831.6 MHz	841.6 MHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM

Marker: 836.63006 MHz 27.01 dBm

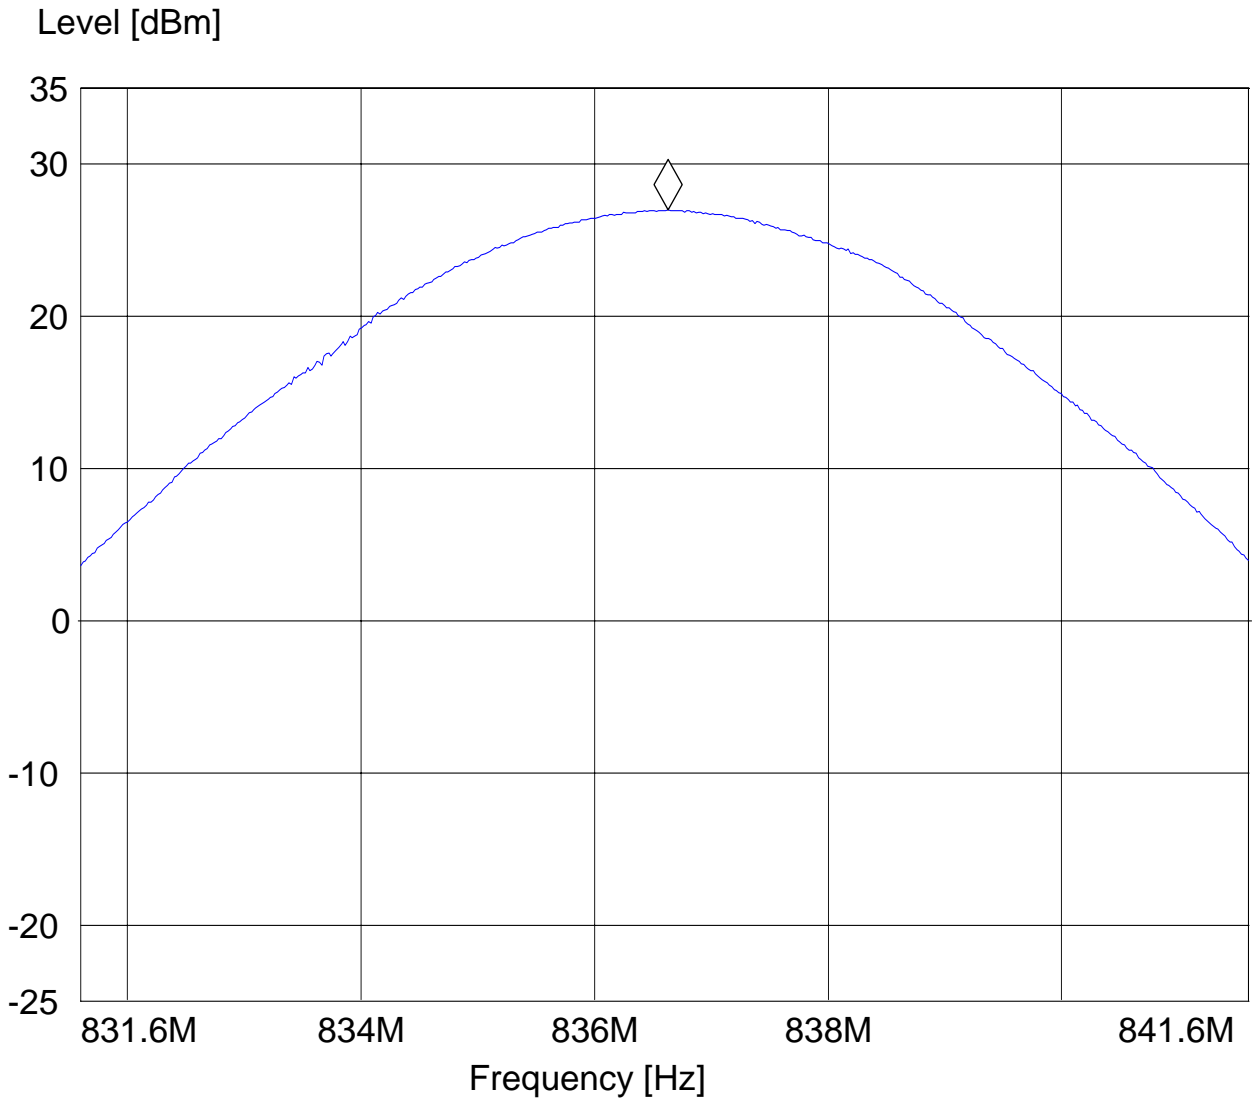




EIRP (GSM 850) CHANNEL 251 EGPRS §22.913(a)

EUT: MTSMC-H-U W/ HC25 MODULE
 Customer: Multitech
 Test Mode: EGPRS 850 CH251
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Satya Radhakrishna
 Power Supply: AC Adapter
 Comments:

SWEEP TABLE: "EIRP 850 CH 251 H"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
843.8 MHz	853.8 MHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM

Marker: **848.81002 MHz** **28.66 dBm**

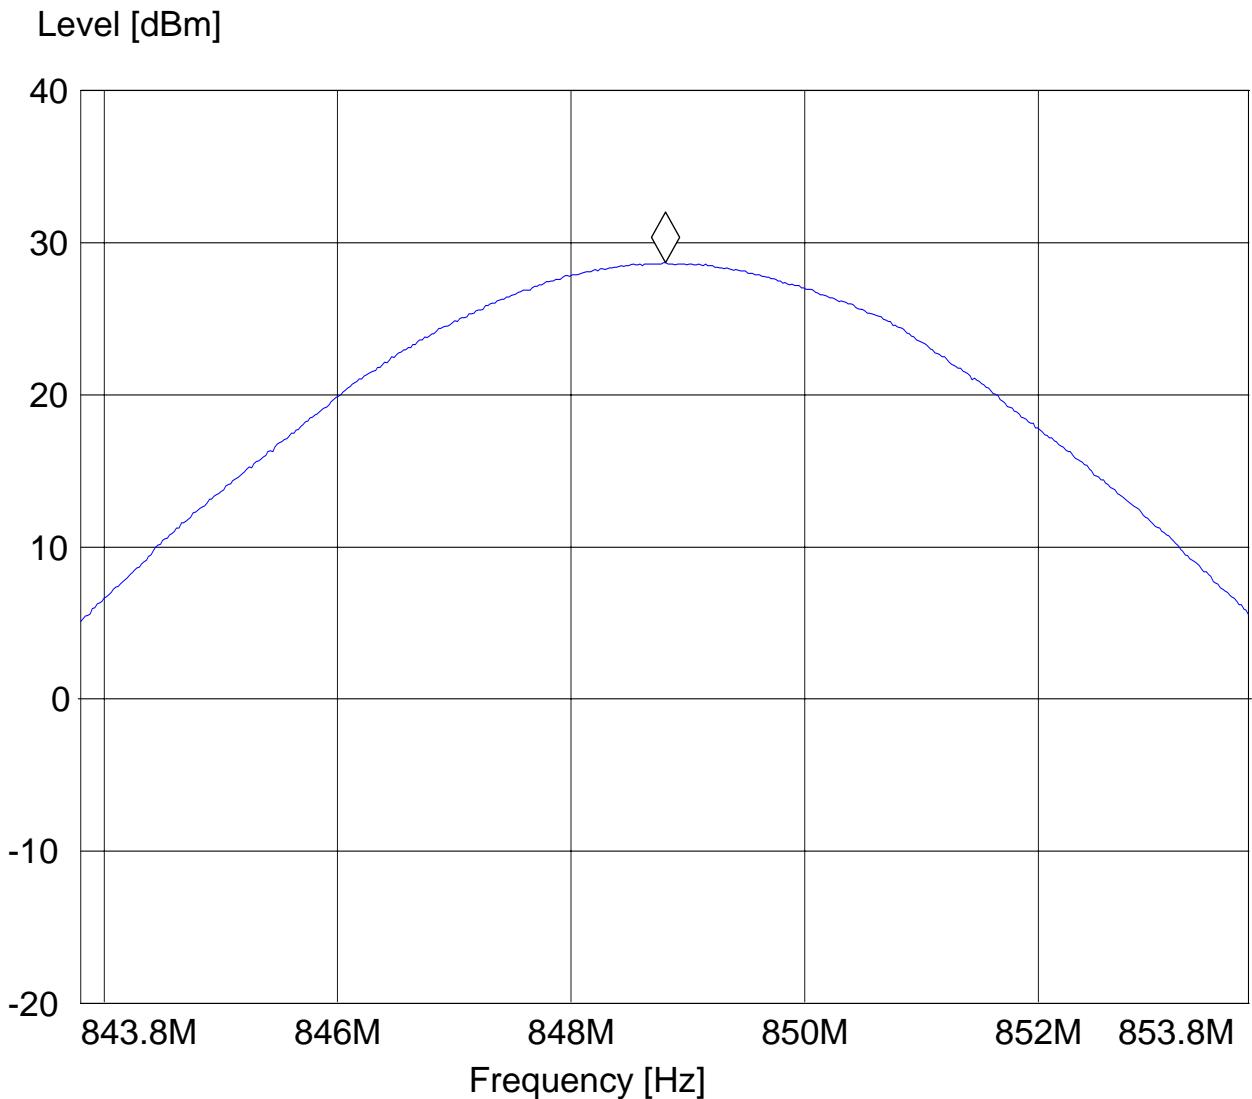




EIRP (UMTS FDD5) CHANNEL 4132 §22.913(a)

EUT: MTSMC-H-U W/ HC25 MODULE
Customer: Multitech
Test Mode: FDDV, CH 4132
ANT Orientation: H
EUT Orientation: H
Test Engineer: Ed
Power Supply: AC Adapter
Comments:

SWEEP TABLE: "EIRP 850 CH 4132H"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
816.4 MHz	836.4 MHz	MaxPeak	Coupled	5 MHz	DUMMY-DBM

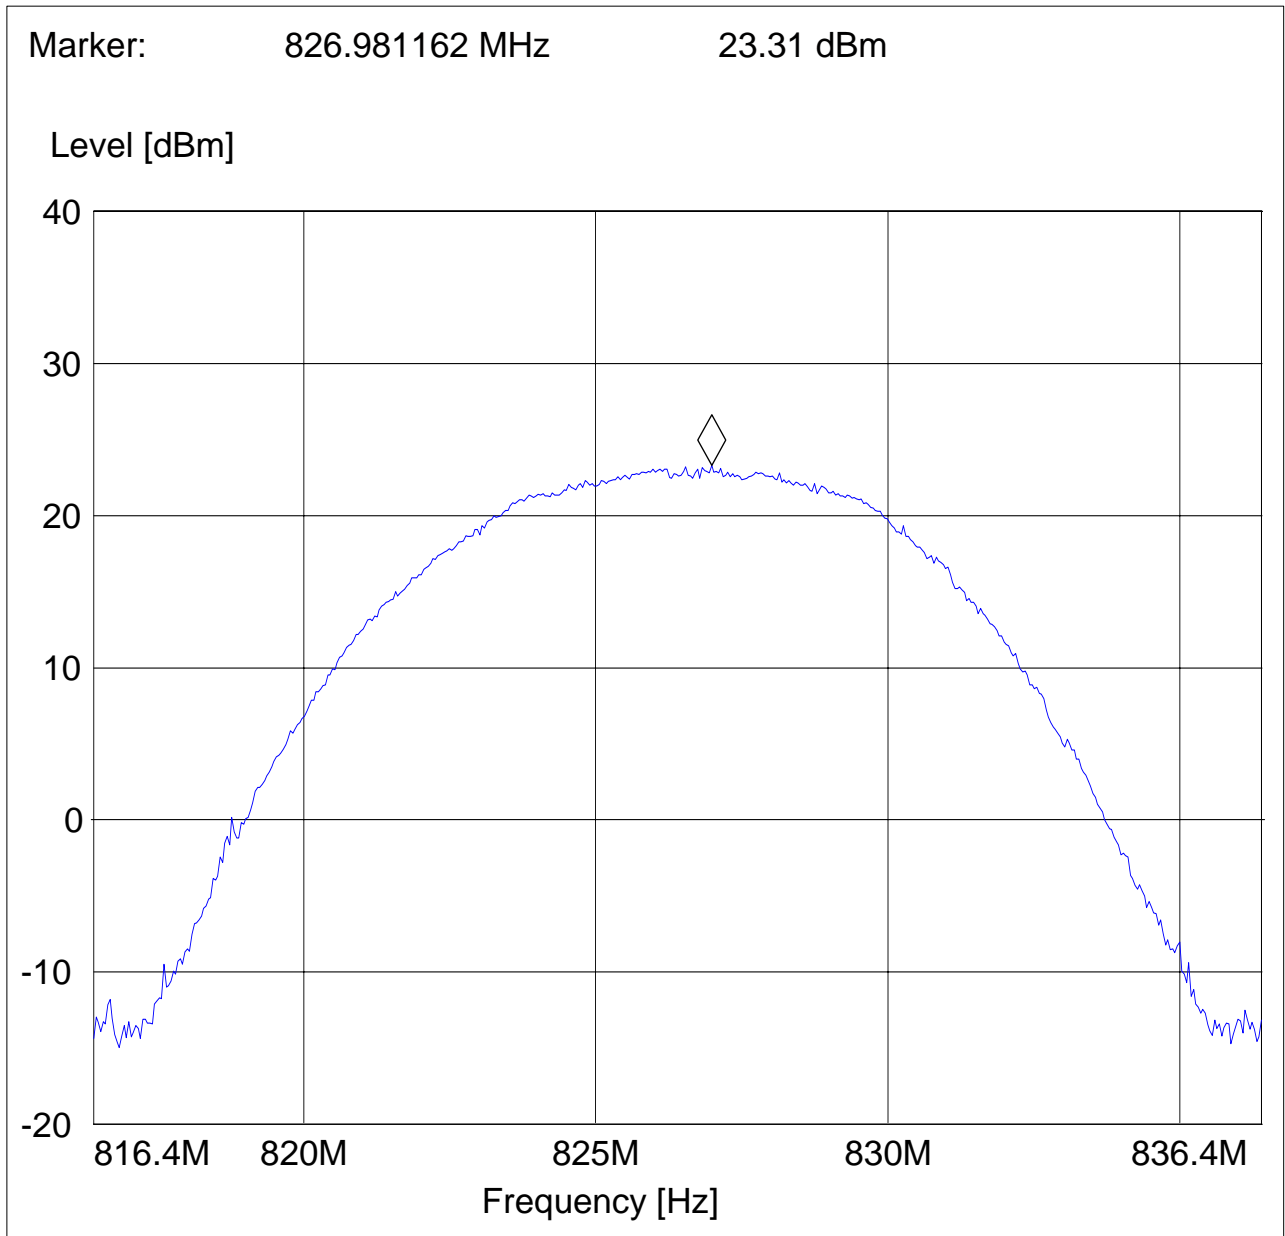




EIRP (UMTS FDD5) CHANNEL 4183 §22.913(a)

EUT: MTSMC-H-U W/ HC25 MODULE
Customer: Multitech
Test Mode: FDDV, CH 4183
ANT Orientation: H
EUT Orientation: H
Test Engineer: Ed
Power Supply: AC Adapter
Comments:

SWEEP TABLE: "EIRP 850 CH 4183 H"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
826.6 MHz	846.6 MHz	MaxPeak	Coupled	5 MHz	DUMMY-DBM
		MaxPeak			

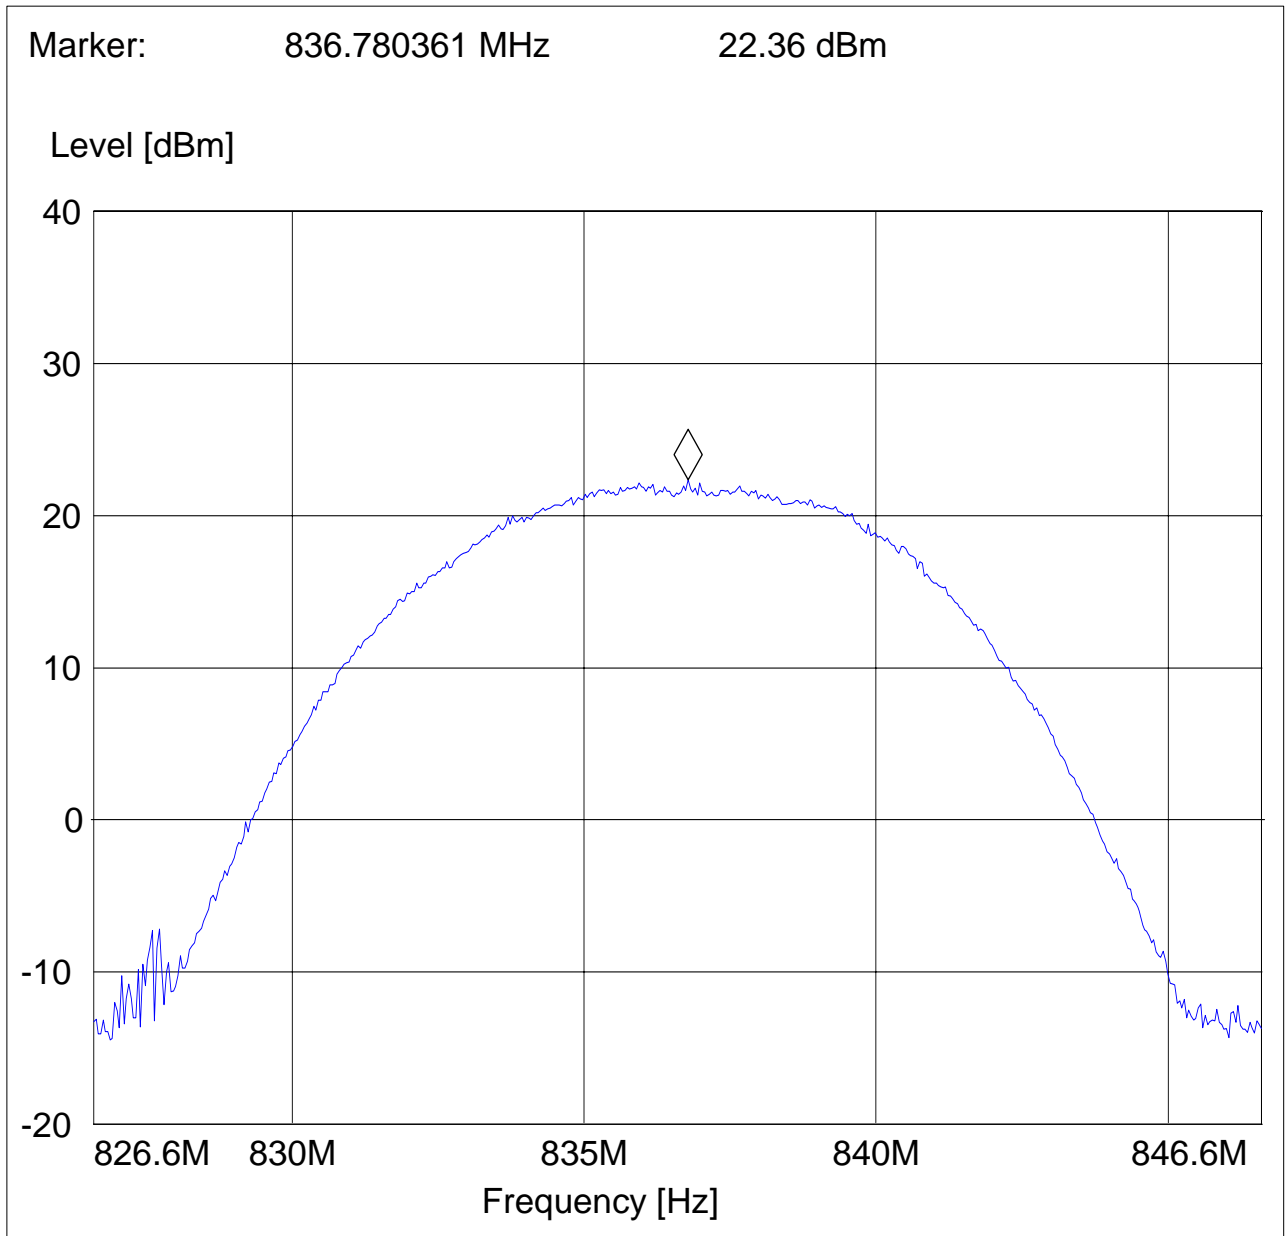




EIRP (UMTS FDD5) CHANNEL 4233 §22.913(a)

EUT: MTSMC-H-U W/ HC25 MODULE
Customer: Multitech
Test Mode: FDDV, CH 4233
ANT Orientation: H
EUT Orientation: H
Test Engineer: Ed
Power Supply: AC Adapter
Comments:

SWEEP TABLE: "EIRP 850 CH 4233H"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
836.6 MHz	856.6 MHz	MaxPeak	Coupled	5 MHz	DUMMY-DBM

Marker: 846.219238 MHz 22.76 dBm

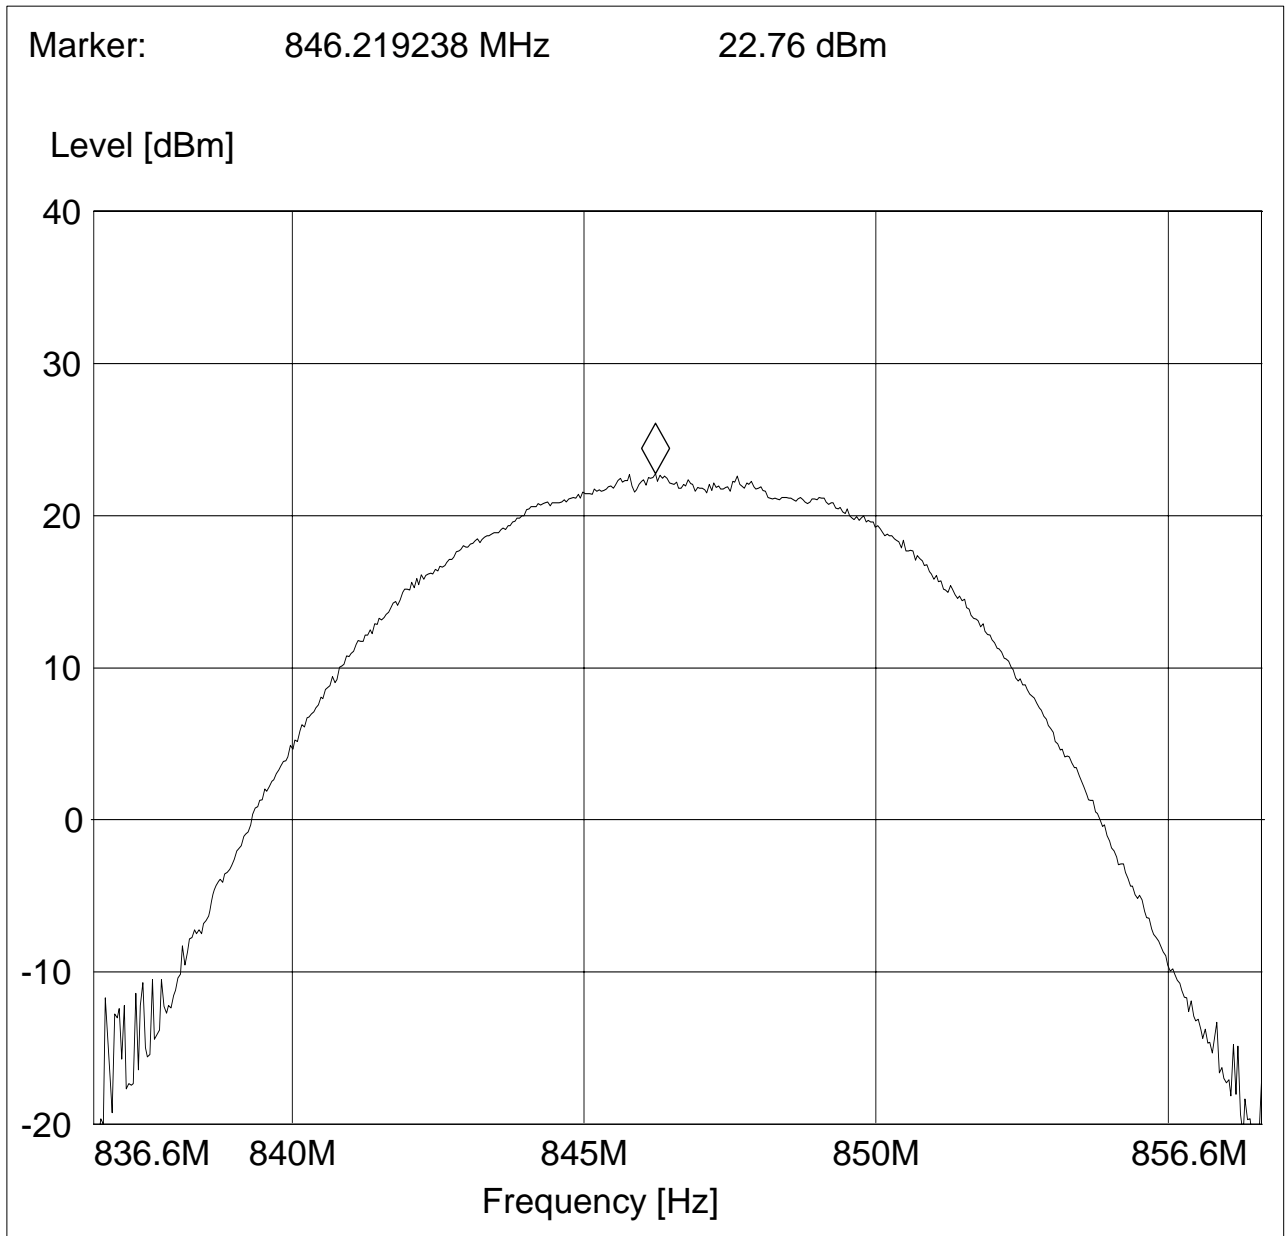




EIRP (PCS-1900) CHANNEL 512 GPRS §24.232(b)

EUT: MTSMCHU
Customer: Multitech
Test Mode: GPRS1900
ANT Orientation: H
EUT Orientation: H
Test Engineer: Peter Mu
Power Supply: AC Power Supply
Comments:

SWEEP TABLE: "EIRP 1900 CH512"

Short Description:		EIRP PCS 1900 for channel-512			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
1.8 GHz	1.9 GHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM

Marker: 1.85021002 GHz 24.72 dBm

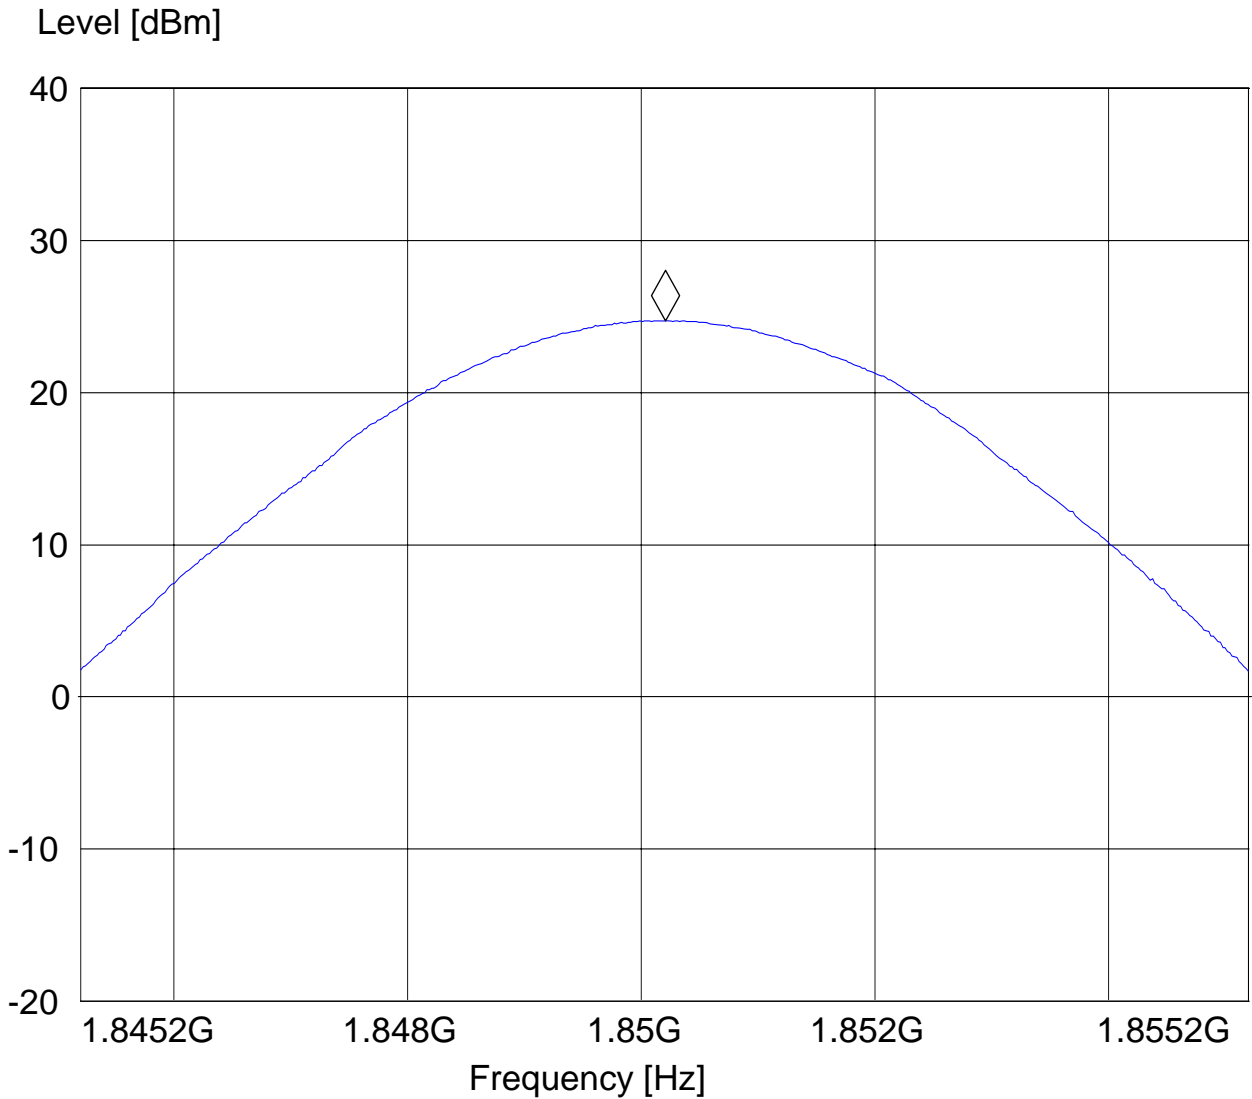




EIRP (PCS-1900) CHANNEL 661 GPRS §24.232(b)

EUT: MTSMCHU
Customer: Multitech
Test Mode: GPRS1900
ANT Orientation: H
EUT Orientation: H
Test Engineer: Peter Mu
Power Supply: AC Power Supply
Comments:

SWEEP TABLE: "EIRP 1900 CH661"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.9 GHz	1.9 GHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM

Marker: 1.88001002 GHz 26 dBm

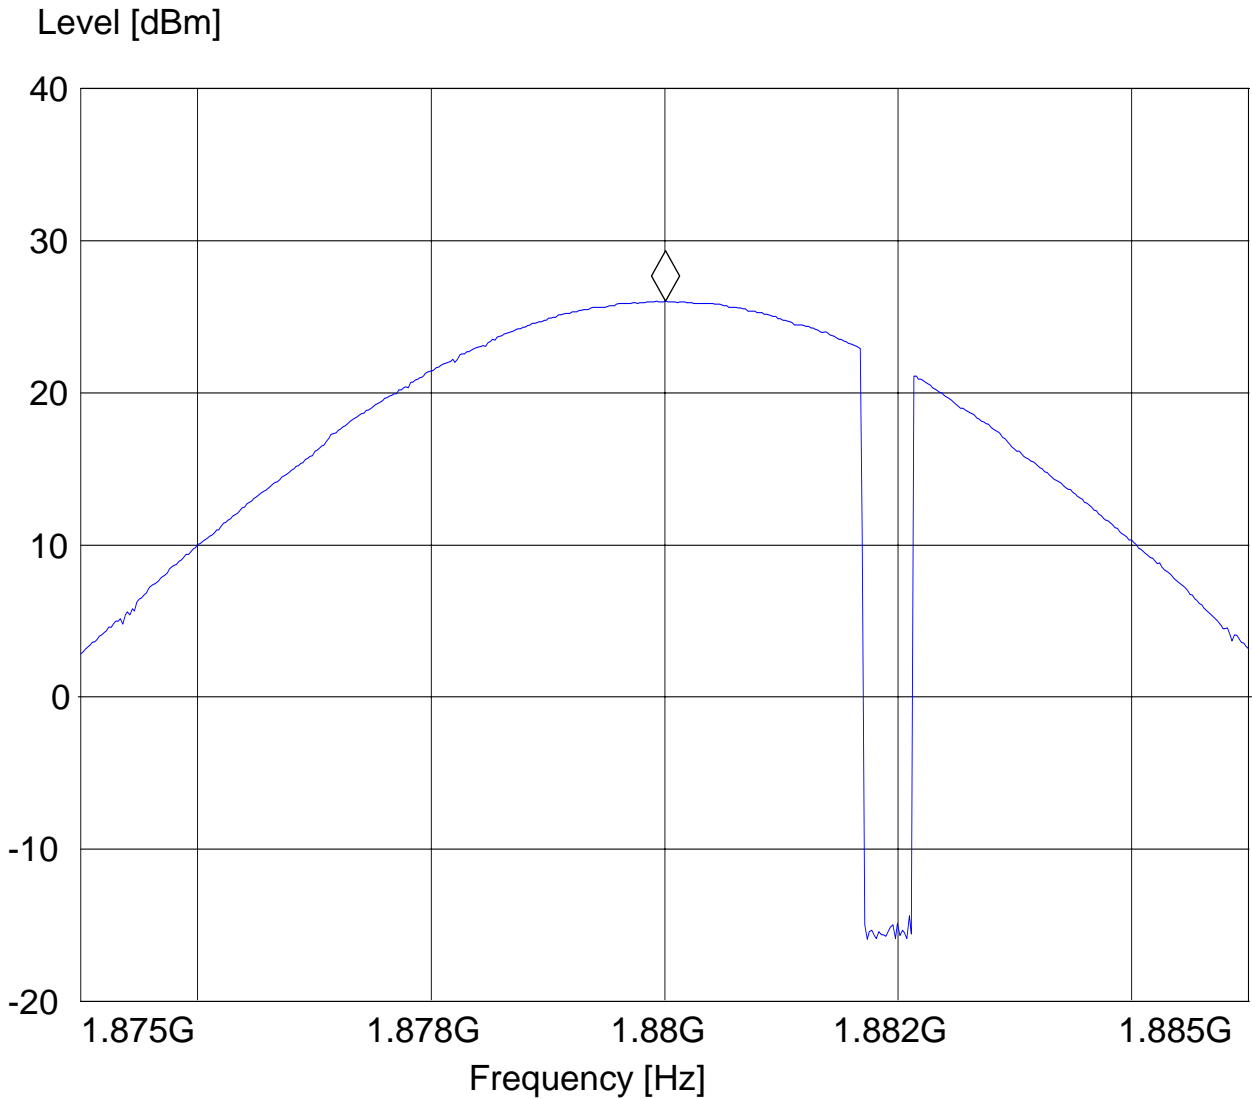




EIRP (PCS-1900) CHANNEL 810 GPRS §24.232(b)

EUT: MTSCHU
Customer: Multitech
Test Mode: GPRS1900
ANT Orientation: H
EUT Orientation: H
Test Engineer: Peter Mu
Power Supply: AC Power Supply
Comments:

SWEEP TABLE: "EIRP 1900 CH810"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.9 GHz	1.9 GHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM

Marker: 1.90991022 GHz 26.13 dBm

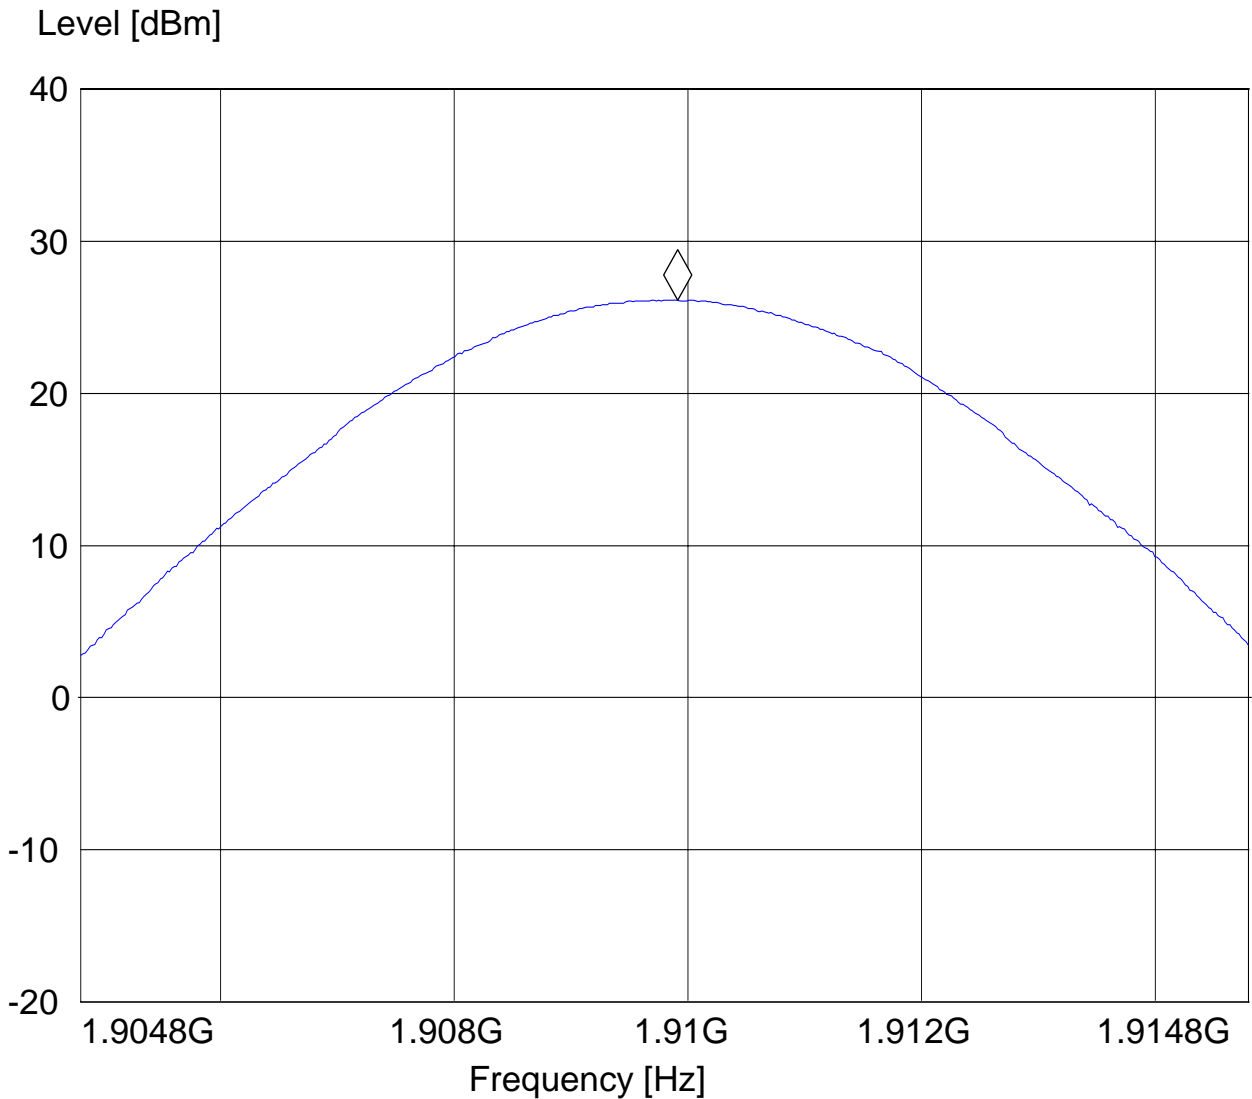




EIRP (PCS-1900) CHANNEL 512 EGPRS §24.232(b)

EUT: MTSMCHU
Customer: Multitech
Test Mode: EGPRS1900
ANT Orientation: H
EUT Orientation: H
Test Engineer: Peter Mu
Power Supply: AC Power Supply
Comments:

SWEEP TABLE: "EIRP 1900 CH512"

Short Description:		EIRP PCS 1900 for channel-512			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
1.8 GHz	1.9 GHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM

Marker: 1.85023006 GHz 23.74 dBm

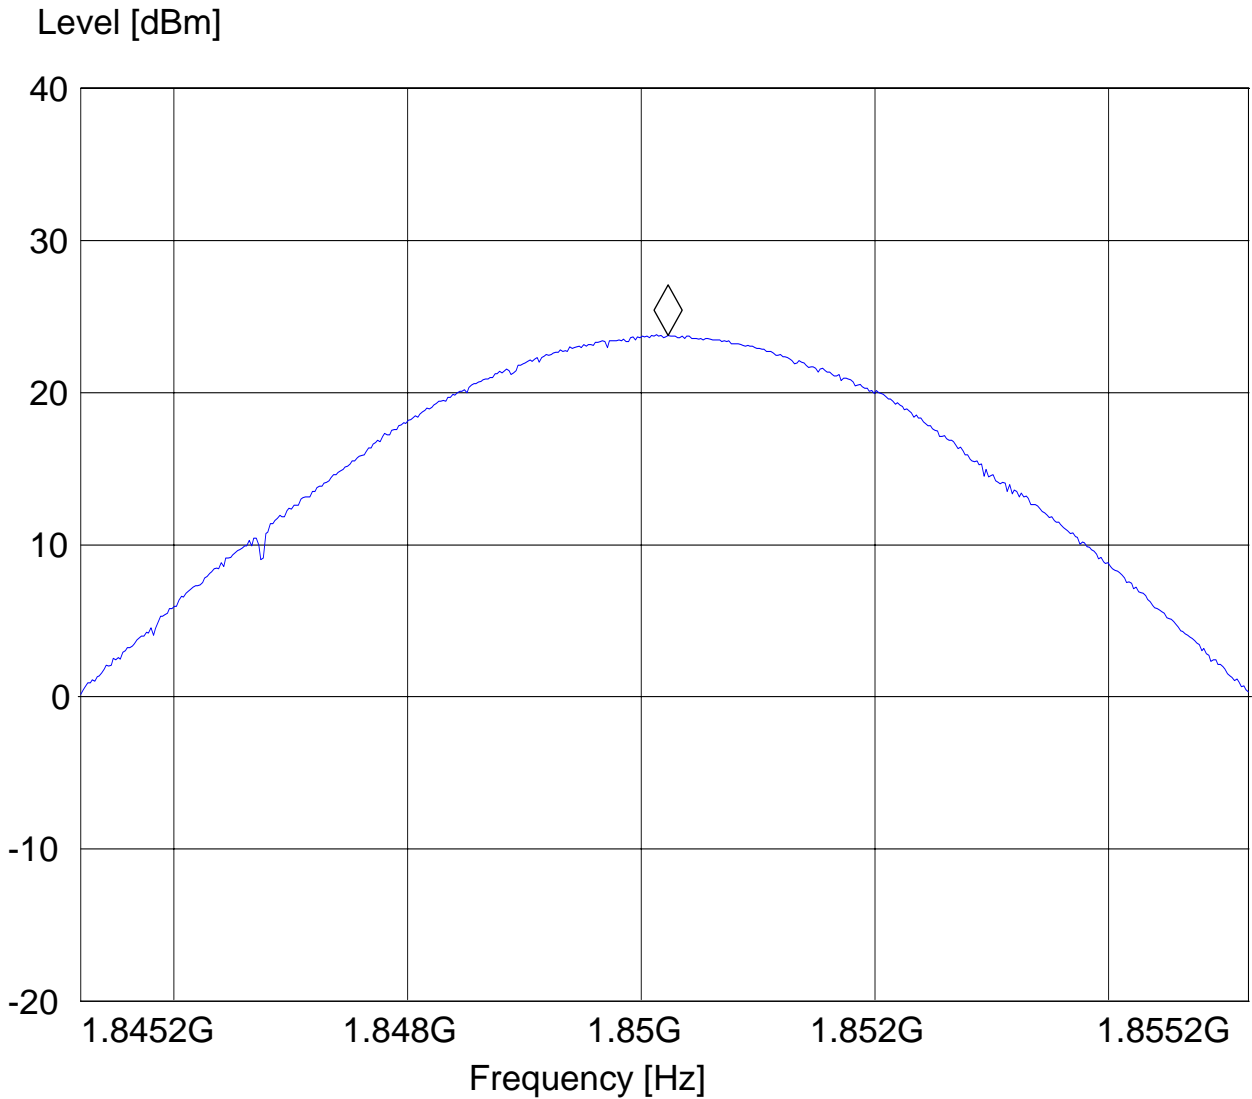




EIRP (PCS-1900) CHANNEL 661 EGPRS §24.232(b)

EUT: MTSMCHU
Customer: Multitech
Test Mode: EGPRS1900
ANT Orientation: H
EUT Orientation: H
Test Engineer: Peter Mu
Power Supply: AC Power Supply
Comments:

SWEEP TABLE: "EIRP 1900 CH661"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.9 GHz	1.9 GHz	MaxPeak	Coupled	3 MHz	DUMMY-DBM

Marker: 1.88001002 GHz 24.98 dBm

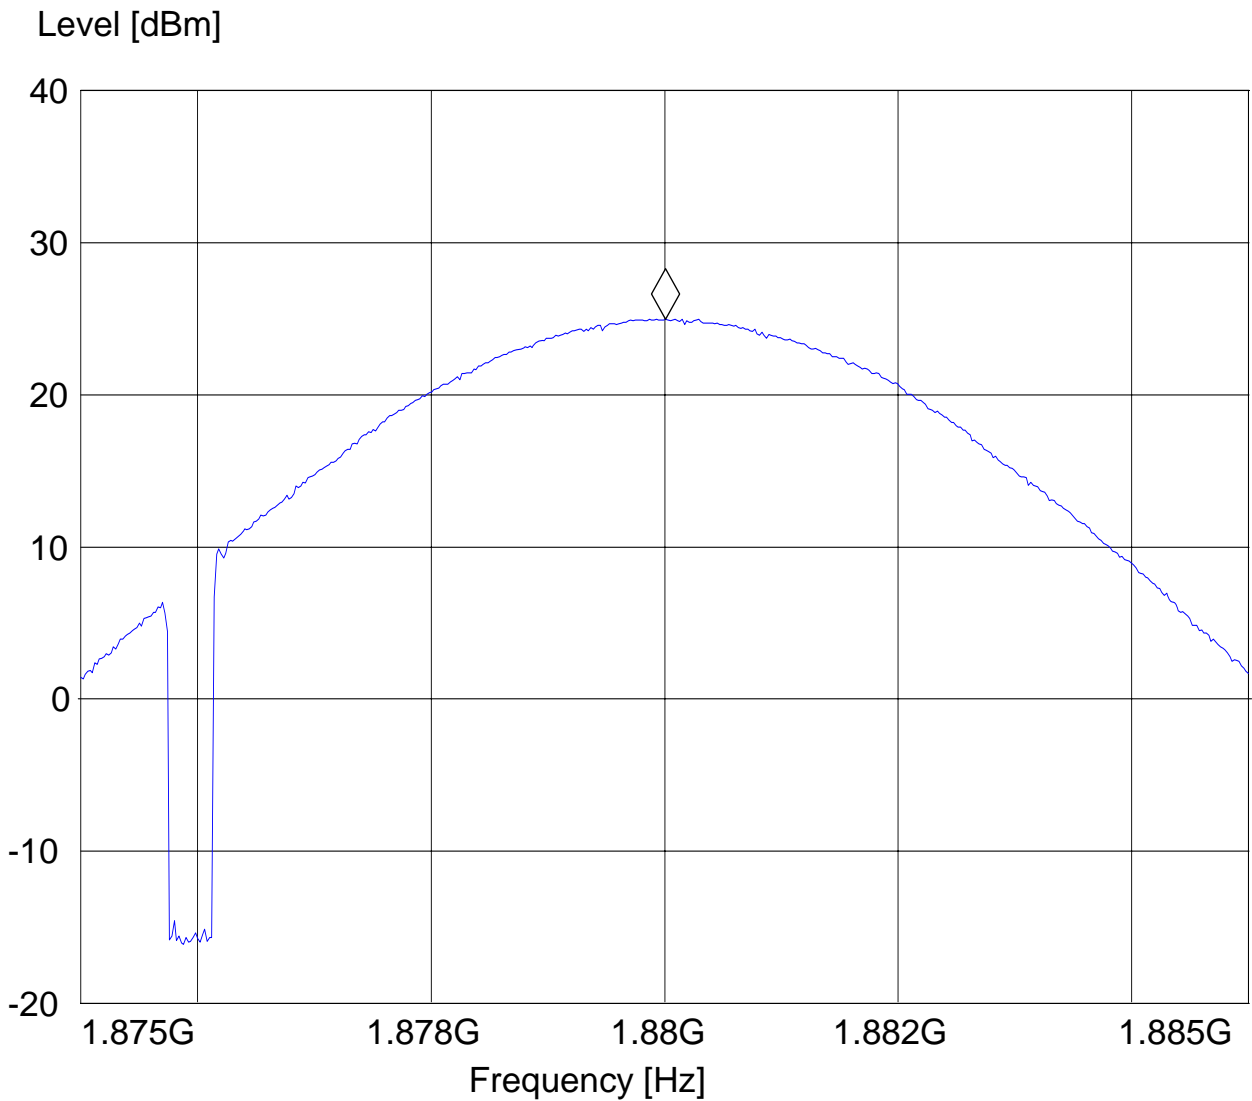




EIRP (PCS-1900) CHANNEL 810 EGPRS §24.232(b)

EUT: MTSMCHU
Customer: Multitech
Test Mode: EGPRS1900
ANT Orientation: H
EUT Orientation: H
Test Engineer: Peter Mu
Power Supply: AC Power Supply
Comments:

SWEEP TABLE: "EIRP 1900 CH810"

Short Description: EIRP PCS 1900 for channel-810
Start Stop Detector Meas. IF Transducer
Frequency Frequency Time Bandw.
1.9 GHz 1.9 GHz MaxPeak Coupled 3 MHz DUMMY-DBM

Marker: 1.90970982 GHz 25.12 dBm

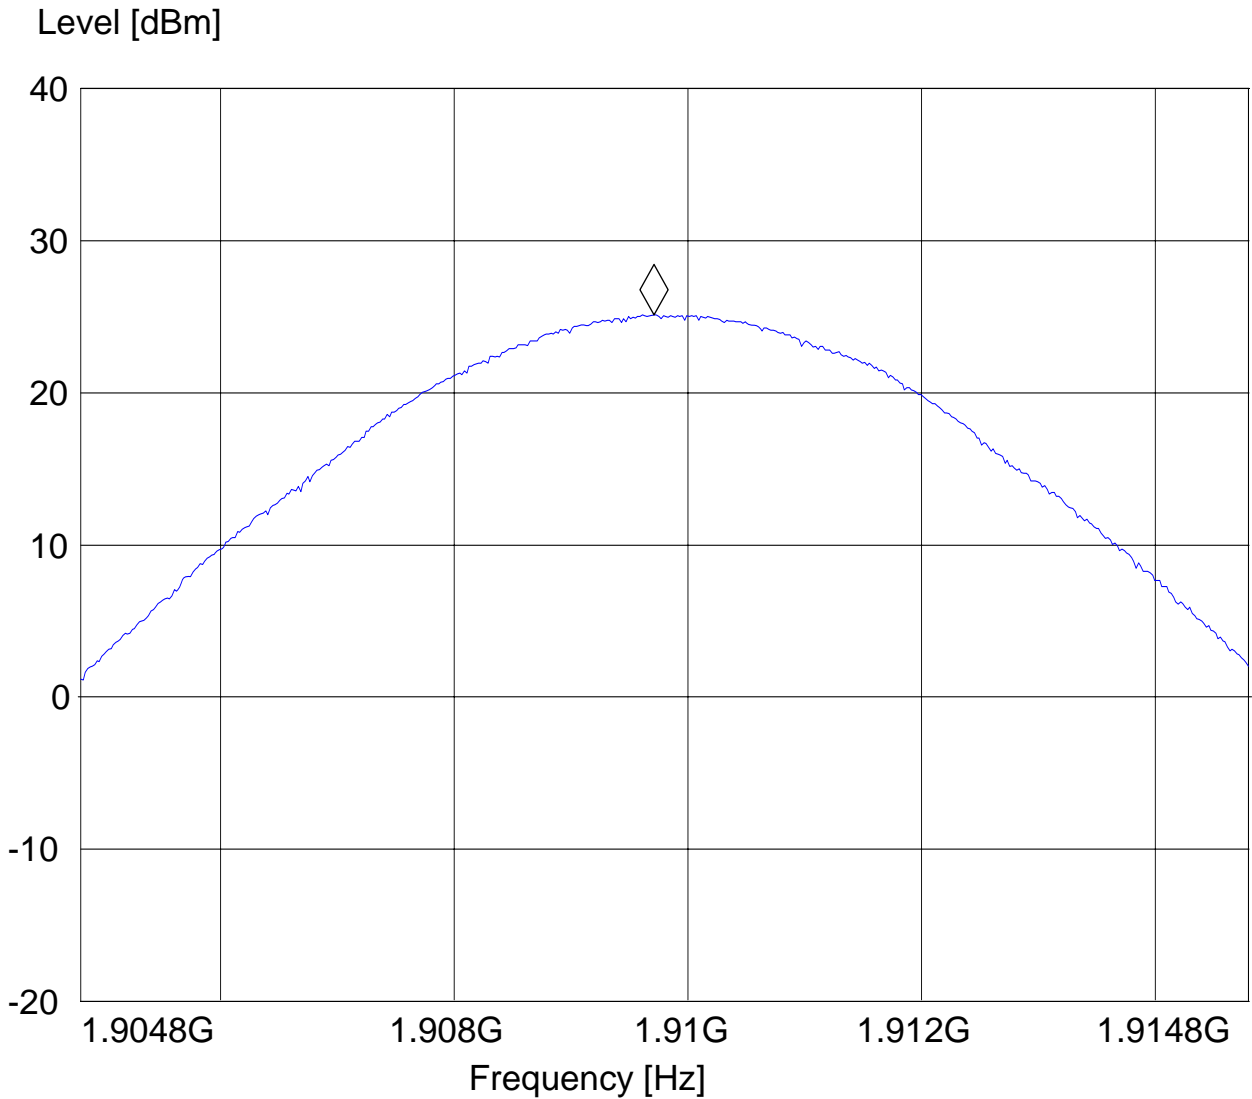



EIRP (UMTS FDD2) CHANNEL 9262 §24.232(b)


EUT: MTSMCHU
Customer: Multitech
Test Mode: UMTS FDD2
ANT Orientation: H
EUT Orientation: H
Test Engineer: Peter Mu
Power Supply: AC Power Supply
Comments:

SWEEP TABLE: "EIRP 1900 CH 9262"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.8 GHz	1.9 GHz	MaxPeak	Coupled	5 MHz	DUMMY-DBM

Short Description: EIRP PCS 1900 for channel-512

Marker: 1.851698597 GHz 20.91 dBm

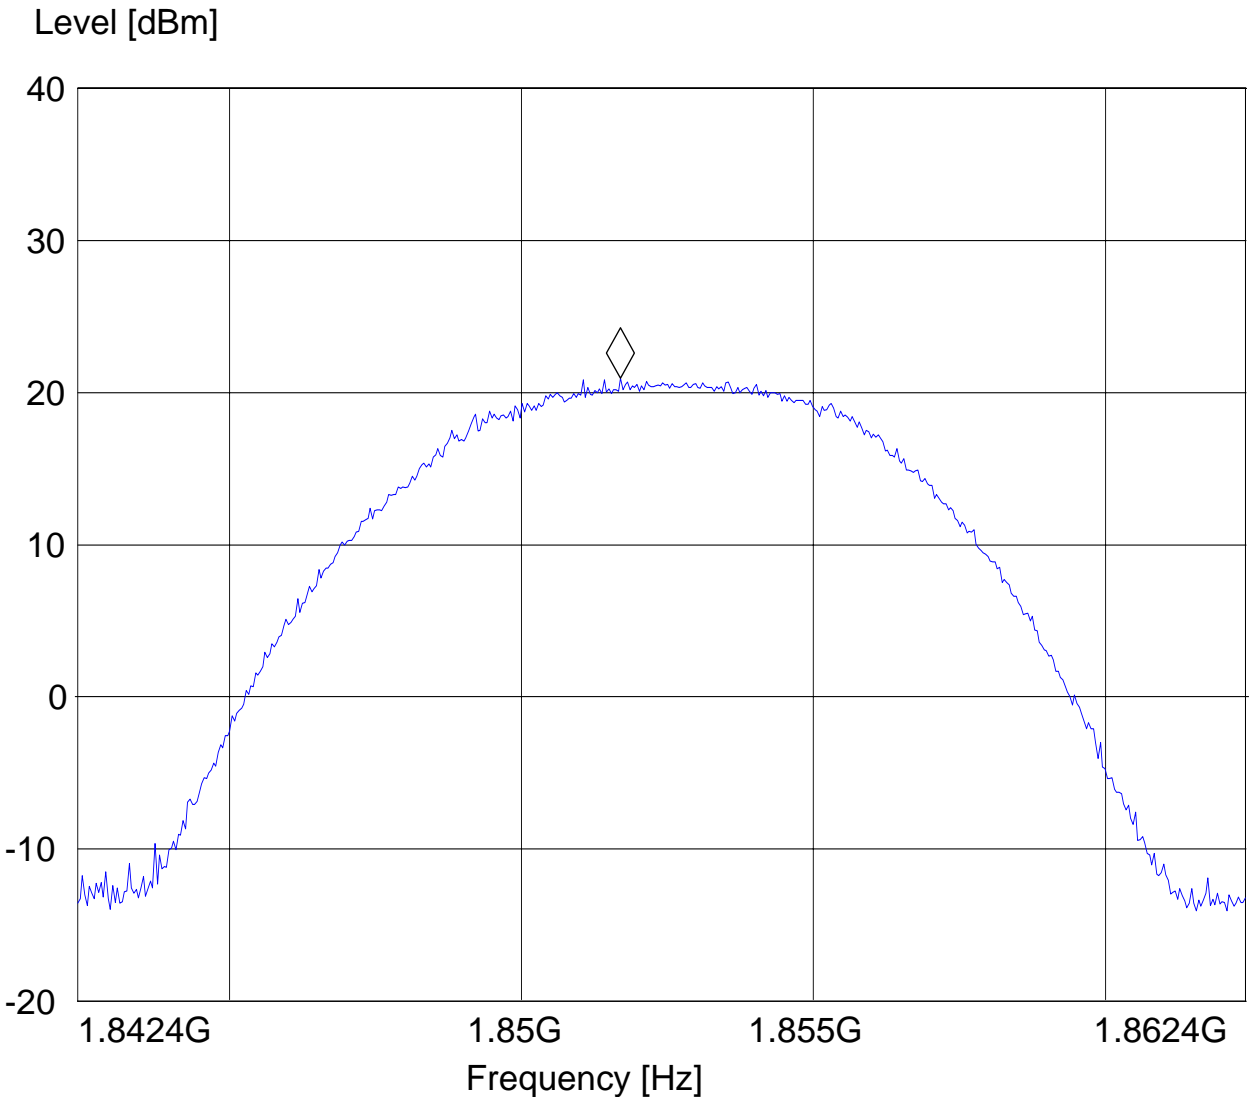




EIRP (UMTS FDD2) CHANNEL 9400 §24.232(b)

EUT: MTSMCHU
 Customer: Multitech
 Test Mode: UMTS FDD2
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Peter Mu
 Power Supply: AC Power Supply
 Comments:

SWEEP TABLE: "EIRP 1900 CH 9400"

Short Description:		EIRP PCS 1900 for channel-661			
Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.9 GHz	1.9 GHz	MaxPeak	Coupled	5 MHz	DUMMY-DBM
		MaxPeak			

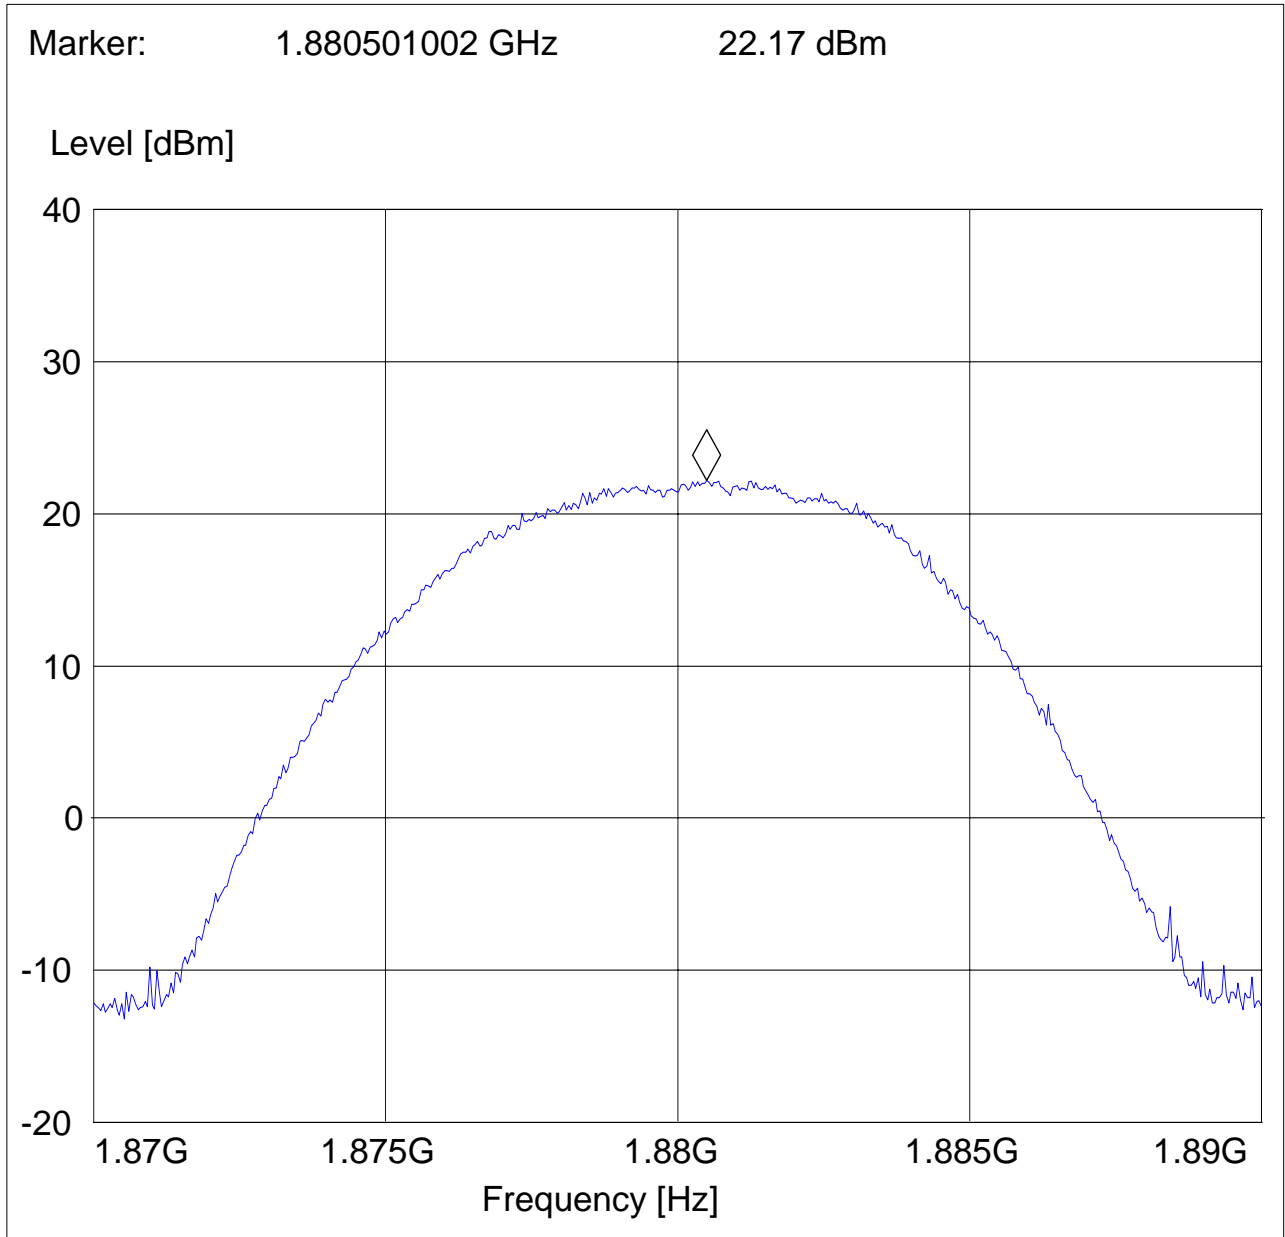



EIRP (UMTS FDD2) CHANNEL 9538 §24.232(b)


EUT: MTSMCHU
Customer: Multitech
Test Mode: UMTS FDD2
ANT Orientation: H
EUT Orientation: H
Test Engineer: Peter Mu
Power Supply: AC Power Supply
Comments:

SWEEP TABLE: "EIRP 1900 CH 9538"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.9 GHz	1.9 GHz	MaxPeak	Coupled	5 MHz	DUMMY-DBM

Short Description: EIRP PCS 1900 for channel-810

Marker: 1.906738277 GHz 18.96 dBm

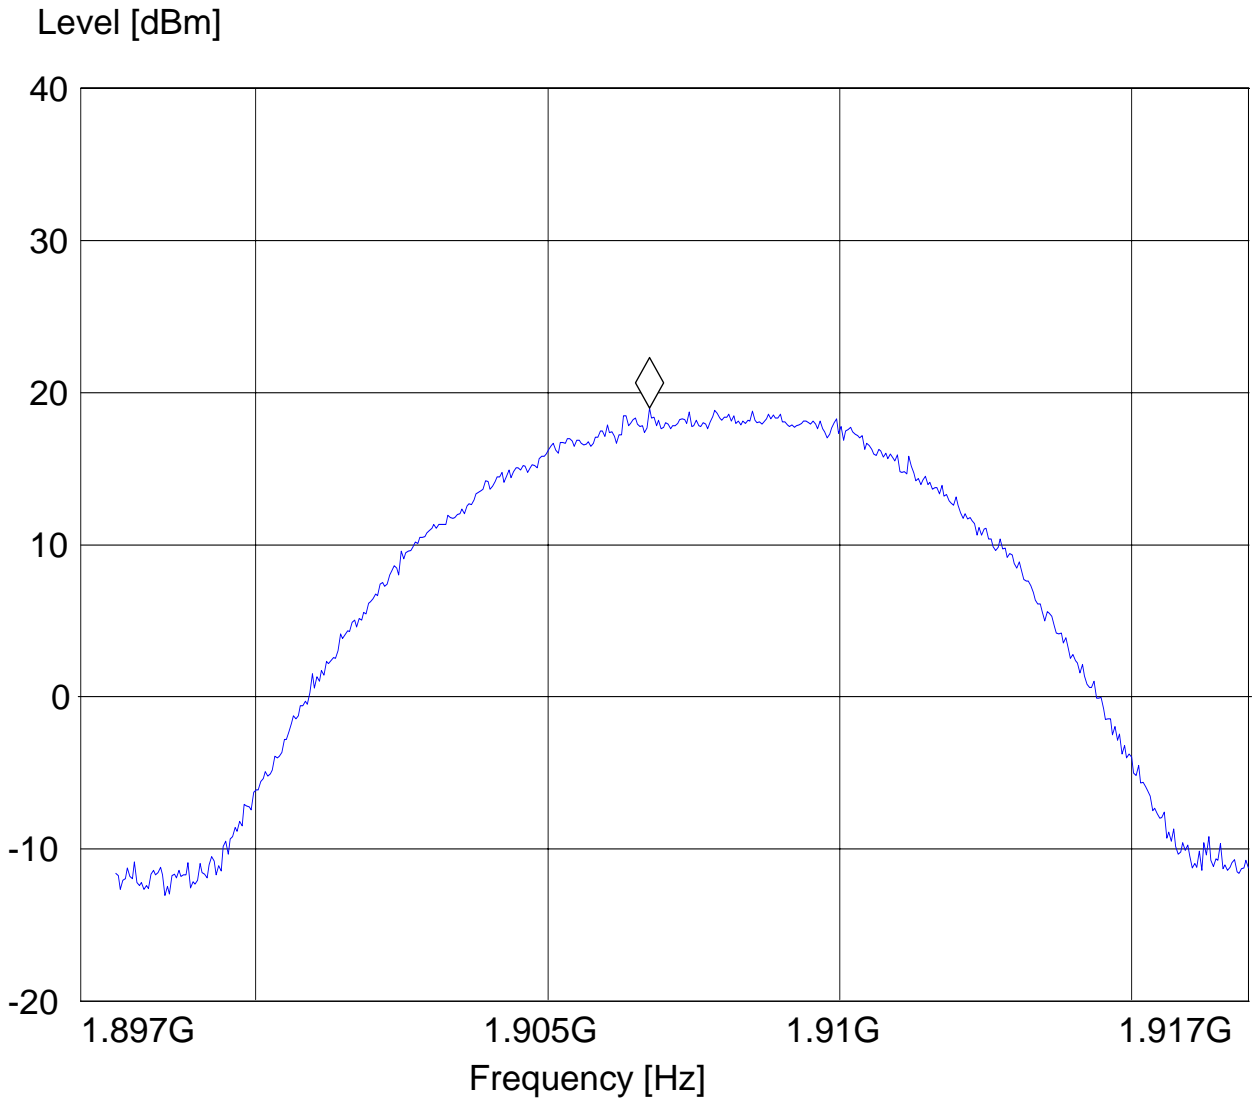


5.2 Occupied Bandwidth/Emission Bandwidth

5.2.1 FCC 2.1049 Measurements required: Occupied bandwidth

The occupied bandwidth, that is the frequency bandwidth such that below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions as applicable.

(h) Transmitters employing digital modulation techniques-when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated.

5.2.2 Occupied / emission bandwidth measurement procedure:

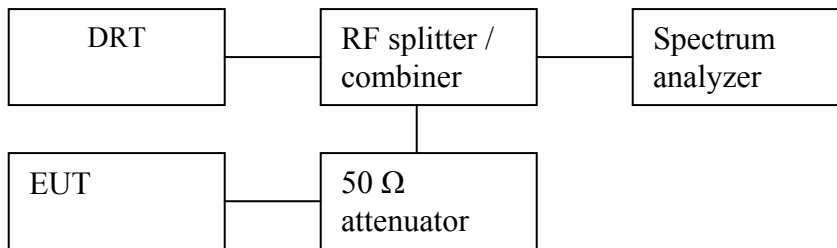

1. Connect the equipment as shown in the above diagram.
2. Adjust the settings of the Digital Radiocommunication Tester (DRT) to set the EUT to its maximum power at the required channel.
3. Set the spectrum analyzer to measure the 99% (-20 dB) occupied bandwidth. Record the value.
4. Set the spectrum analyzer to measure the 99.5% (-26 dB) emission bandwidth. Record the value.
5. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.

5.2.3 Occupied / Emission bandwidth results 850 MHz band:

The test results of this test report relate exclusively to radiated measurement only. Radio module used in this product has been previously certified under its own FCC and IC ID. For results of the conducted measurement please refer to the conducted test report.

5.3 Frequency Stability

5.3.1 Limit

For Hand carried battery powered equipment:

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.2VDC and 4.5VDC, with a nominal voltage of 3.7VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -2.7% and +21.62%. For the purposes of measuring frequency stability these voltage limits are to be used.

Method of Measurement:

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU 200 UNIVERSAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30 C.
3. With the EUT, powered via nominal voltage, connected to the CMU 200 and in a simulated call on mid channel (190 for GSM 850 & 4183 for FDD5 & 661 for PCS-1900&9400 for FDD2), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10 C increments from -30 C to +50 C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50 C.
7. With the EUT, powered via nominal voltage, connected to the CMU 200 and in a simulated call on mid channel (190 for GSM 850 & 4183 for FDD5 & 661 for PCS-1900&9400 for FDD2), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 C increments from +50 C to -30 C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5 C during the measurement procedure.

For equipment powered by primary supply voltage:

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

For this EUT section 2.1055(d)(1) applies. This requires to vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.



5.3.2 Test Results GSM850

Temperature	Frequency Error (Hz)	Frequency p.p.m	Verdict
60C	4	0.004781	Pass
70C	26	0.031078	Pass
75C	-15	-0.01793	Pass

5.3.3 Test Results UMTS FDD5

Temperature	Frequency Error (Hz)	Frequency p.p.m	Verdict
60C	-20	-0.02391	Pass
70C	10	0.011953	Pass
75C	35	0.041836	Pass

5.3.4 Test Results GSM1900

Temperature	Frequency Error (Hz)	Frequency p.p.m	Verdict
60C	-24	-0.01277	Pass
70C	-10	-0.00532	Pass
75C	-14	-0.00745	Pass

5.3.5 Test Results UMTS FDD2

Temperature	Frequency Error (Hz)	Frequency p.p.m	Verdict
60C	-1	-0.00053	Pass
70C	-16	-0.00851	Pass
75C	-44	-0.0234	Pass

5.4 Spurious Emissions Conducted

5.4.1 FCC 2.1051 Measurements required: Spurious emissions at antenna terminals.

The radio frequency voltage or power generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in FCC 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

5.4.2 Limits:

5.4.2.1 FCC 22.917 Emission limitations for cellular equipment.

The rules in this section govern the spectral characteristics of emissions in the Cellular Radiotelephone Service.

(a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

(b) *Measurement procedure.* Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

5.4.2.2 FCC 24.238 Emission limitations for Broadband PCS equipment.

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

(a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


(b) *Measurement procedure.* Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the

transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

5.4.3 Conducted out of band emissions measurement procedure:

Based on TIA-603C 2004

2.2.13 Unwanted Emissions: Conducted Spurious

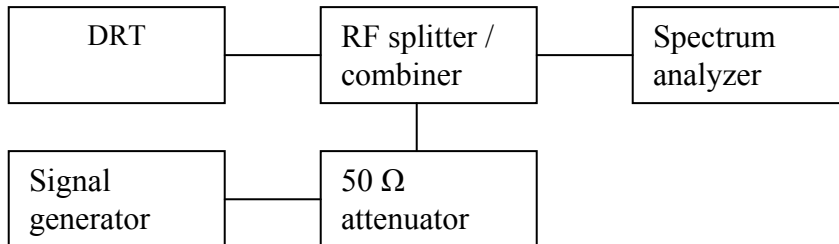

1. Connect the equipment as shown in the above diagram.
 2. Set the spectrum analyzer to measure peak hold with the required settings.
 3. Set the signal generator to a known output power and record the path loss in dB (**LOSS**) for frequencies up to the tenth harmonic of the EUT’s carrier frequency. **LOSS** = Generator Output Power (dBm) – Analyzer reading (dBm).
 4. Replace the signal generator with the EUT.
 5. Adjust the settings of the Digital Radiocommunication Tester (DRT) to set the EUT to its maximum power at the required channel.
 6. Set the spectrum analyzer to measure peak hold with the required settings. Offset the spectrum analyzer reference level by the path loss measured above.
 7. Measure and record all spurious emissions up to the tenth harmonic of the carrier frequency.
 8. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.
 9. If necessary steps 6 and 7 may be performed with the spectrum analyzer set to average detector.
- (**note:** Step 3 above is performed prior to testing and **LOSS** is recorded by test software. Steps 2, 6, and 7 above are performed with test software.)

5.4.4 Test Results: Conducted Emission:

The test results of this test report relate exclusively to radiated measurement only. Radio module used in this product has been previously certified under its own FCC and IC ID. For results of the conducted measurement please refer to the conducted test report.

5.5 Spurious Emissions Radiated

5.5.1 FCC 2.1053 Measurements required: Field strength of spurious radiation.

- (a) Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission.

5.5.2 Limits:

5.5.2.1 **FCC 22.917 Emission limitations for cellular equipment.**

The rules in this section govern the spectral characteristics of emissions in the Cellular Radiotelephone Service.

- (a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

(b) *Measurement procedure.* Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

5.5.2.2 **FCC 24.238 Emission limitations for Broadband PCS equipment.**

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

- (a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


(b) *Measurement procedure.* Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required

measurement bandwidth (*i.e.* 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

5.5.3 Radiated out of band measurement procedure:

Based on TIA-603C 2004

2.2.12 Unwanted emissions: Radiated Spurious

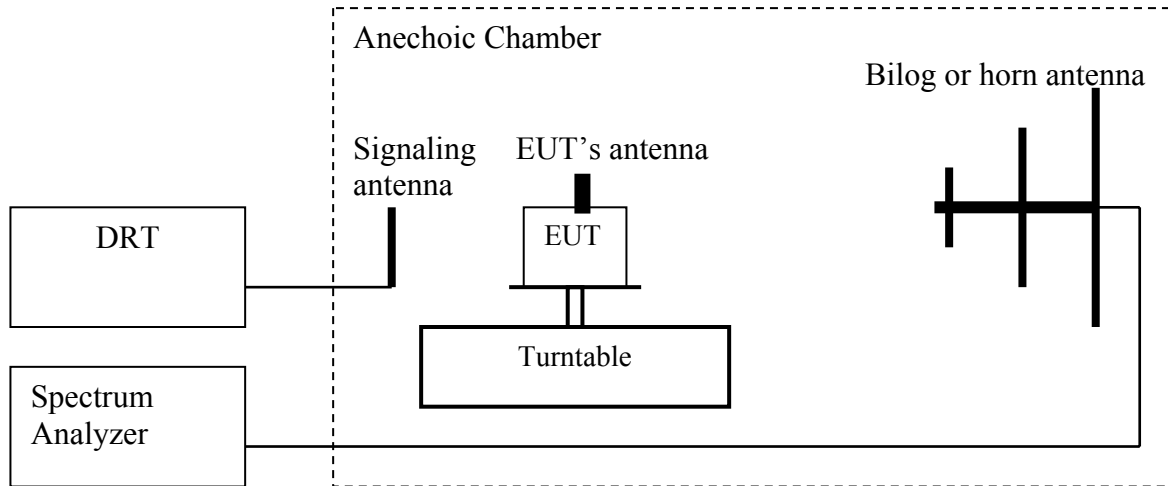

1. Connect the equipment as shown in the above diagram with the EUT's antenna in a horizontal orientation.
2. Adjust the settings of the Digital Radiocommunication Tester (DRT) to set the EUT to its maximum power at the required channel.
3. Set the spectrum analyzer to measure peak hold with the required settings.
4. Place the measurement antenna in a horizontal orientation. Rotate the EUT 360°. Raise the measurement antenna up to 4 meters in 0.5 meters increments and rotate the EUT 360° at each height to maximize all emissions. Measure and record all spurious emissions (LVL) up to the tenth harmonic of the carrier frequency.
5. Replace the EUT with a horizontally polarized half wave dipole or known gain antenna. The center of the antenna should be at the same location as the center of the EUT's antenna.
6. Connect the antenna to a signal generator with known output power and record the path loss in dB (LOSS). $LOSS = \text{Generator Output Power (dBm)} - \text{Analyzer reading (dBm)}$.
7. Determine the level of spurious emissions using the following equation:
Spurious (dBm) = LVL (dBm) + LOSS (dB):
8. Repeat steps 4, 5 and 6 with all antennas vertically polarized.
9. Determine the level of spurious emissions using the following equation:
Spurious (dBm) = LVL (dBm) + LOSS (dB):
10. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.

(note: Steps 5 and 6 above are performed prior to testing and LOSS is recorded by test software. Steps 3, 4 and 7 above are performed with test software.)

Spectrum analyzer settings:

Res B/W: 1 MHz

Vid B/W: 1 MHz

Measurement Survey:

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the GSM-850 & PCS-1900 bands. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the GSM-850 & PCS-1900 band into any of the other blocks respectively. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

Radiated emission measurements were made only with GPRS mode GMSK modulation because this mode represents the worse case emission for all the modulations for GSM. See section 5.5.4.1 and 5.5.4.3

Radiated emissions measurements were made also with UMTS FDD mode. See section 5.5.4.2 and 5.5.4.4



5.5.4 Radiated out of band emissions results on EUT:

5.5.4.1 RESULTS OF RADIATED SPURIOUS EMISSIONS TESTS GSM-850:

Harmonics	Tx ch-128 Freq. (MHz)	Level (dBm)	Tx ch-190 Freq. (MHz)	Level (dBm)	Tx ch-251 Freq. (MHz)	Level (dBm)
2	1648.4	NF	1673.2	NF	1697.6	NF
3	2472.6	NF	2509.8	NF	2546.4	NF
4	3296.8	NF	3346.4	NF	3395.2	NF
5	4121	NF	4183	NF	4244	NF
6	4945.2	NF	5019.6	NF	5092.8	NF
7	5769.4	NF	5856.2	NF	5941.6	NF
8	6593.6	NF	6692.8	NF	6790.4	NF
9	7417.8	NF	7529.4	NF	7639.2	NF
10	8242	NF	8366	NF	8488	NF
NF = NOISE FLOOR						




RADIATED SPURIOUS EMISSIONS (GSM-850) TX: 30MHz - 1GHz
Spurious emission limit -13dBm
Antenna: vertical

Note:

- 1. The peak above the limit line is the carrier freq.
- 2. This plot is valid for low, mid & high channels (worst-case plot)

EUT: MTSMC-H-U W/ HC25 MODULE
Customer: Multitech
Test Mode: GPRS 850 CH251
ANT Orientation: V
EUT Orientation: H
Test Engineer: Sam
Power Supply: AC Adapter
Comments: marker on the uplink
SWEEP TABLE: "FCC 24 Spur 30M-1G_V"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

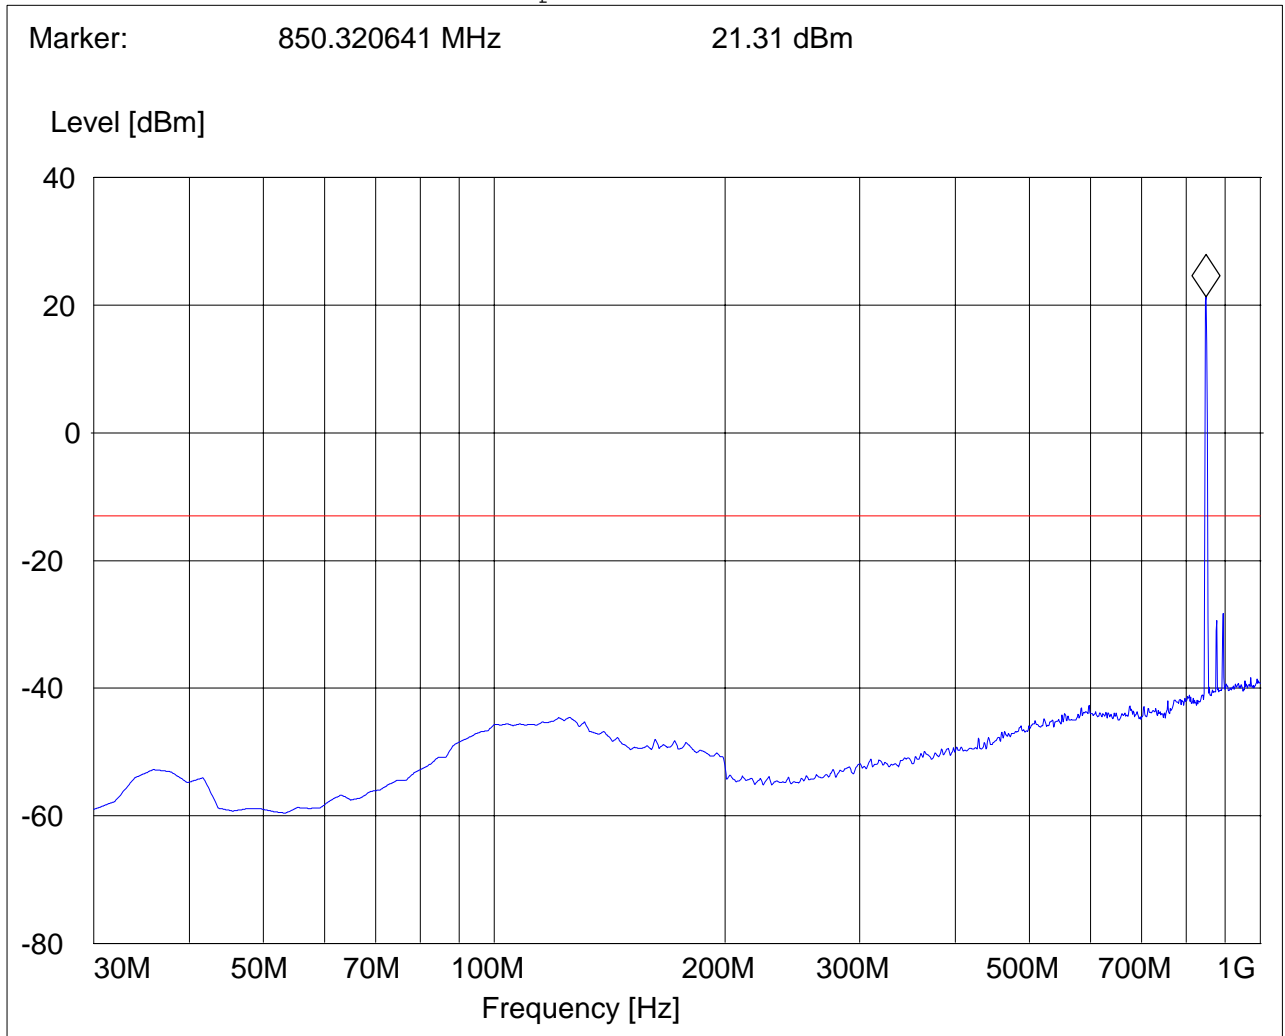



RADIATED SPURIOUS EMISSIONS (GSM-850)TX: 30MHz - 1GHz
Spurious emission limit -13dBm
Antenna: horizontal


Note:

- 1. The peak above the limit line is the carrier freq.
- 2. This plot is valid for low, mid & high channels (worst-case plot)

EUT: MTSMC-H-U W/ HC25 MODULE
Customer: Multitech
Test Mode: GPRS 850 CH190
ANT Orientation: H
EUT Orientation: H
Test Engineer: Sam
Power Supply: AC Adapter
Comments:

SWEEP TABLE: "FCC 24 Spur 30M-1G_H"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	DUMMY-DBM

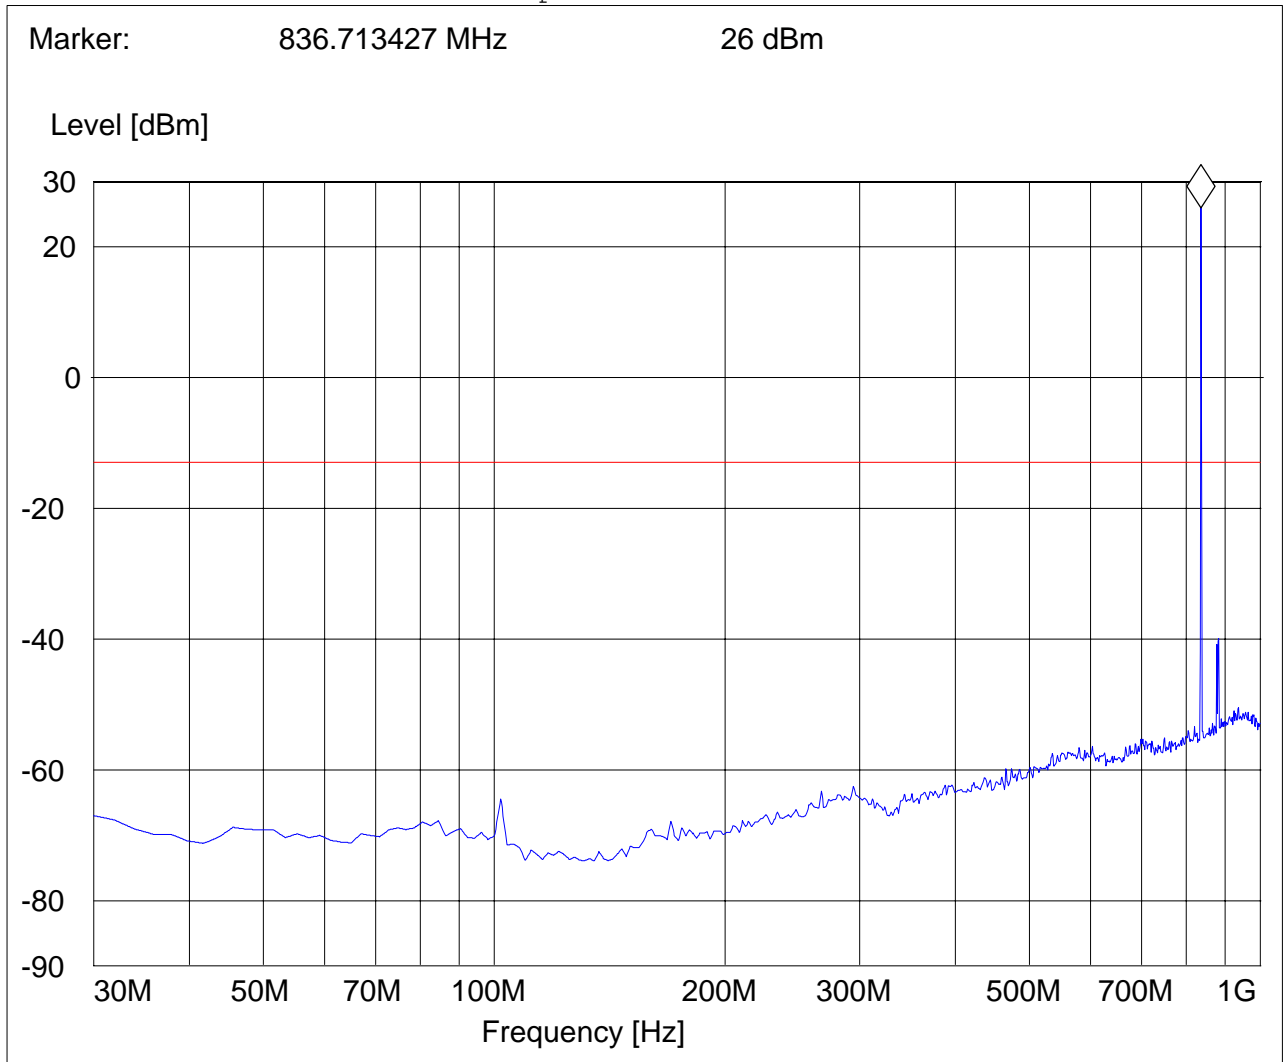




RADIATED SPURIOUS EMISSIONS (GSM-850) Tx @ 824.2MHz: 1GHz – 1.58GHz

EUT: MTSMC-H-U W/ HC25 MODULE
 Customer: Multitech
 Test Mode: GPRS 850 CH128
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Sam
 Power Supply: AC Adapter
 Comments:

SWEEP TABLE: "FCC 22Spuri 1-1.58G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	1.6 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 1.554428858 GHz -49.41 dBm

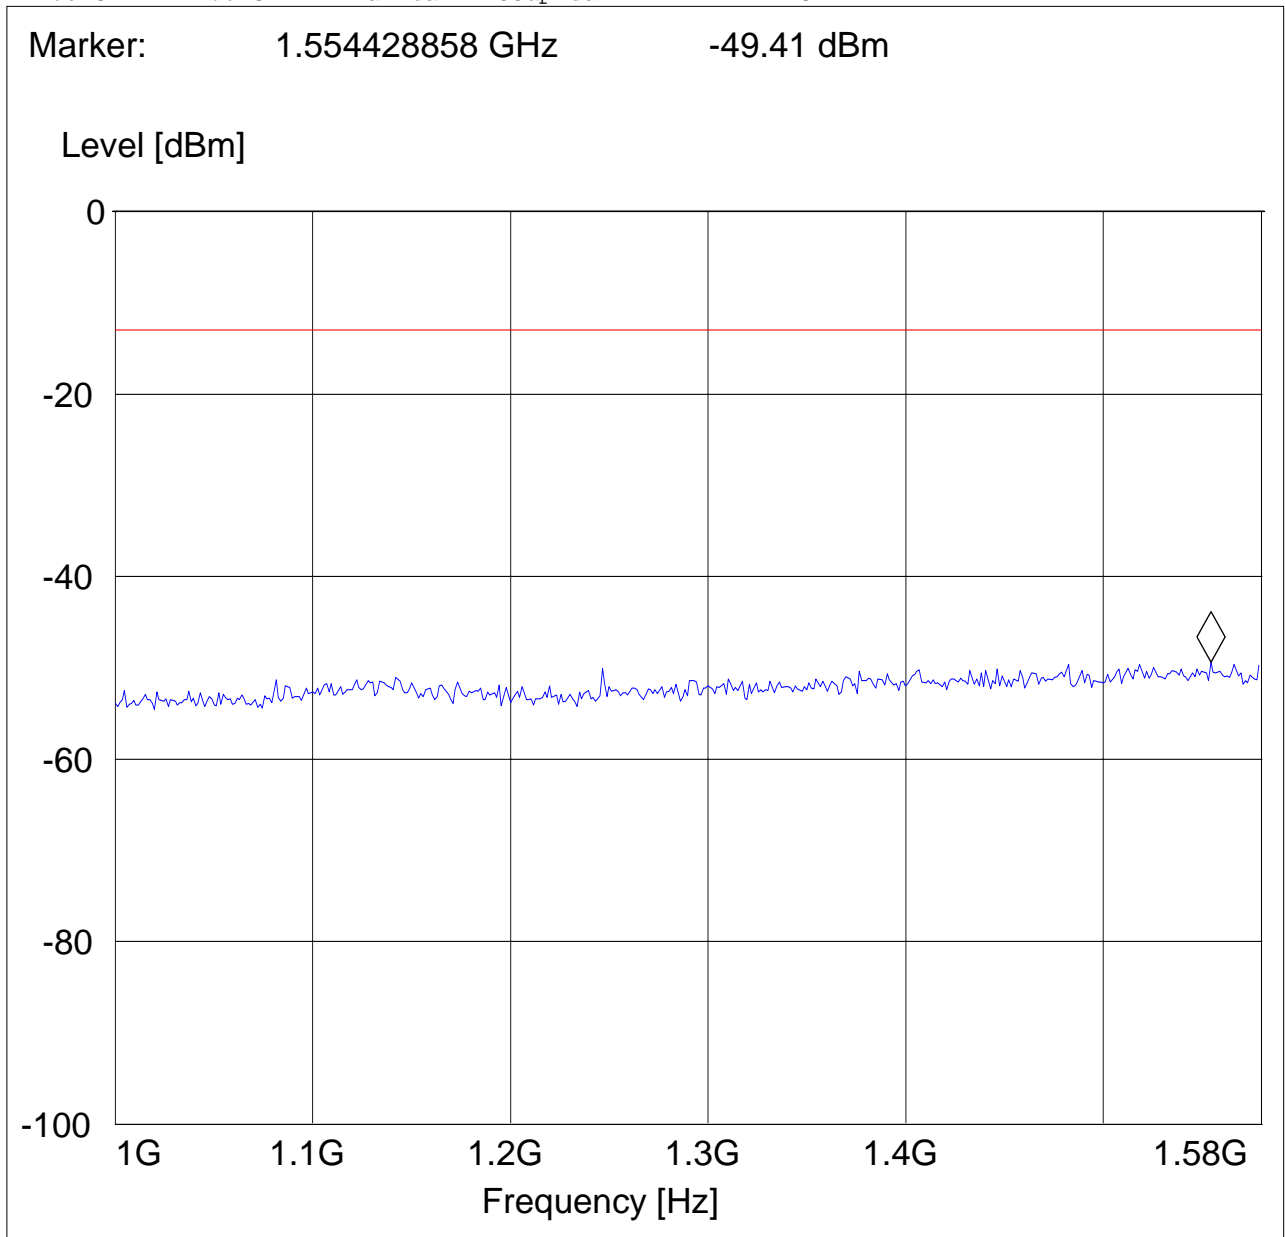




RADIATED SPURIOUS EMISSIONS (GSM-850) Tx @ 824.2MHz: 1.58GHz – 3GHz

EUT: MTSMC-H-U W/ HC25 MODULE
 Customer: Multitech
 Test Mode: GPRS 850 CH128
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Sam
 Power Supply: AC Adapter
 Comments:

SWEEP TABLE: "FCC 22Spuri 1.58-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.6 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 1.582845691 GHz -25.97 dBm

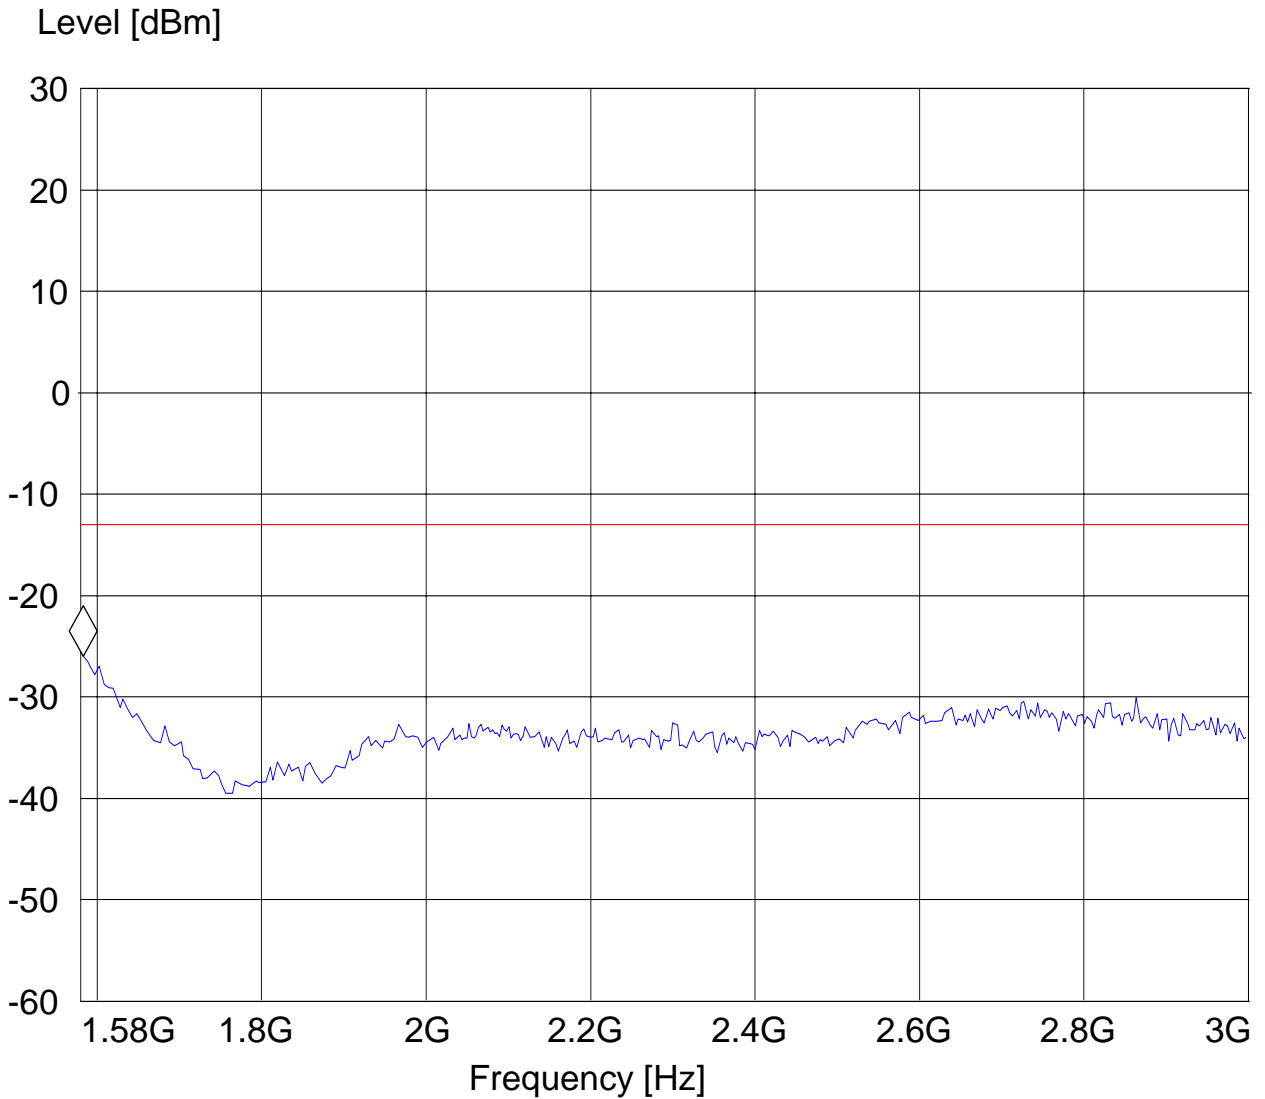




RADIATED SPURIOUS EMISSIONS (GSM-850) Tx @ 824.2MHz: 3GHz – 9GHz

EUT: MTSMC-H-U W/ HC25 MODULE
 Customer: Multitech
 Test Mode: GPRS 850 CH128
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Sam
 Power Supply: AC Adapter
 Comments:

SWEEP TABLE: "FCC 22Spuri 3-9G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
3.0 GHz	9.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 6.22244489 GHz -47.72 dBm

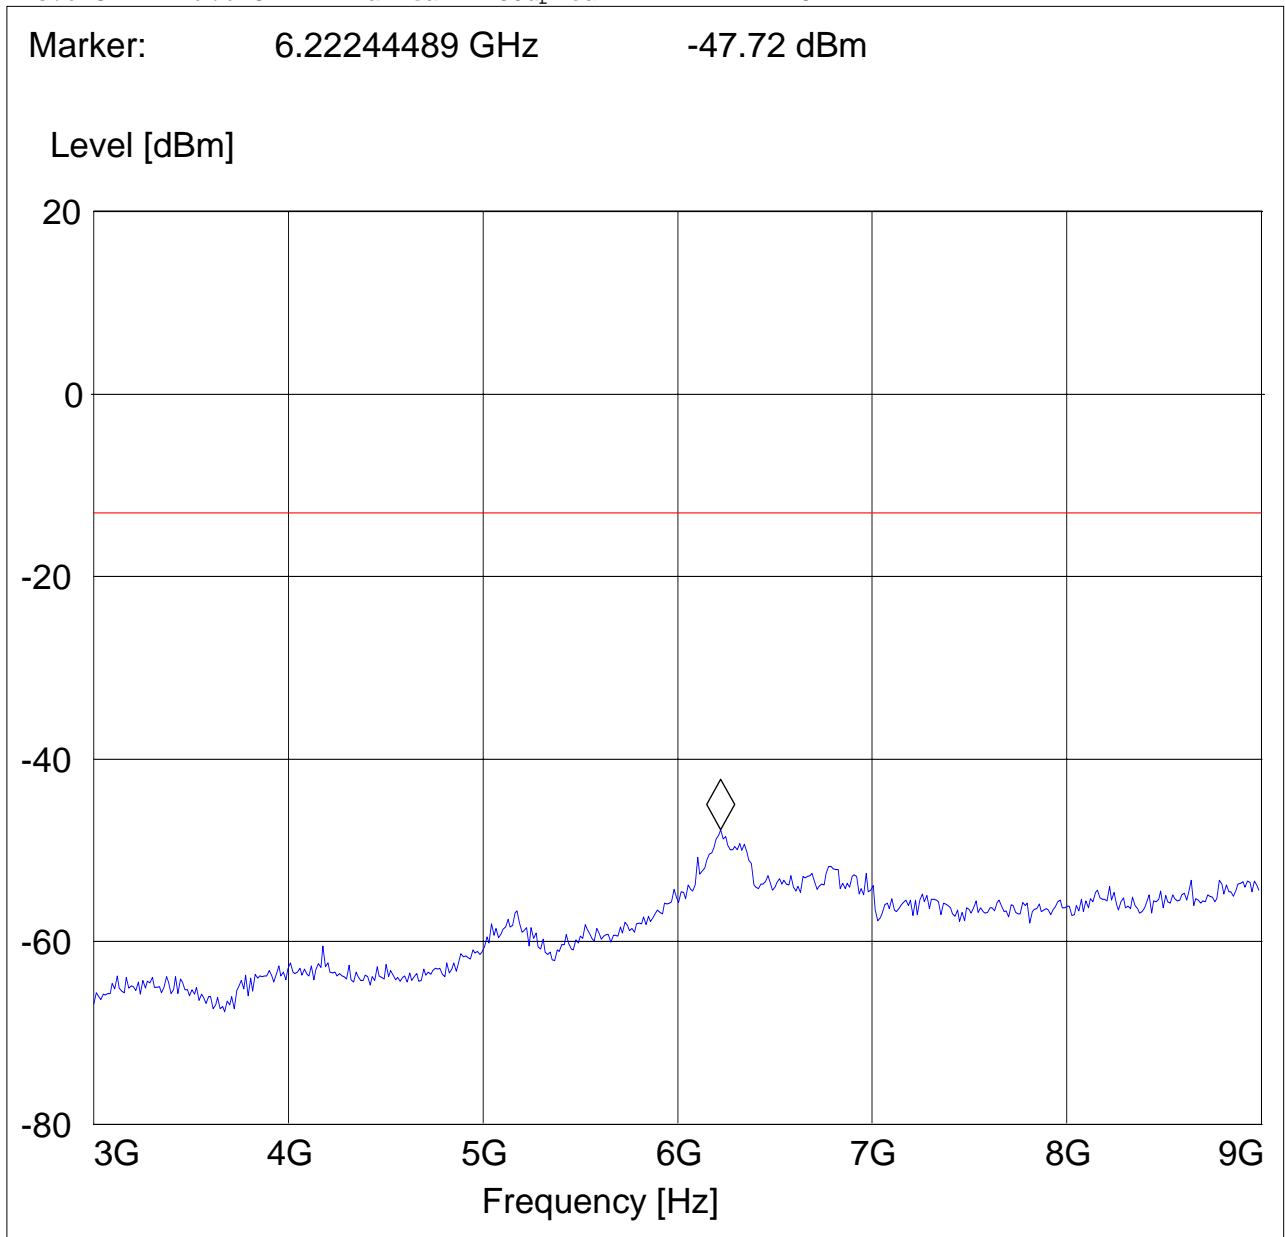




RADIATED SPURIOUS EMISSIONS (GSM-850) Tx @ 836.6MHz: 1GHz – 1.58GHz

EUT: MTSMC-H-U W/ HC25 MODULE
 Customer: Multitech
 Test Mode: GPRS 850 CH190
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Sam
 Power Supply: AC Adapter
 Comments:

SWEEP TABLE: "FCC 22Spuri 1-1.58G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	1.6 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 1.511422846 GHz -49.2 dBm

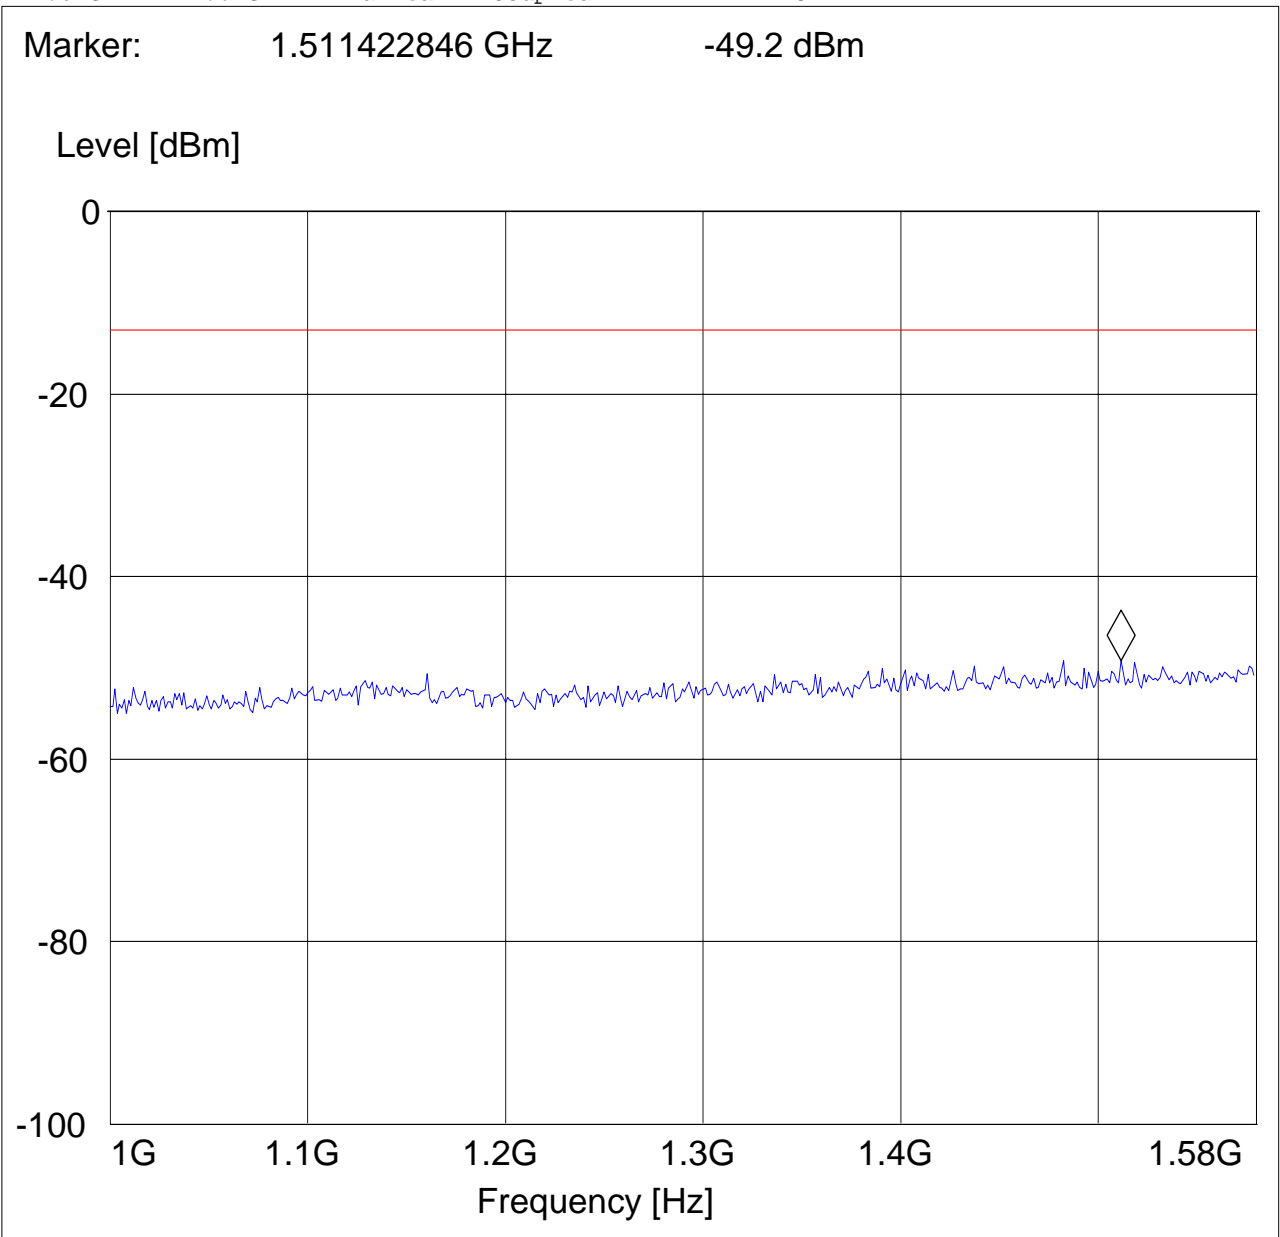




RADIATED SPURIOUS EMISSIONS (GSM-850) Tx @ 836.6MHz: 1.58-3GHz

EUT: MTSMC-H-U W/ HC25 MODULE
 Customer: Multitech
 Test Mode: GPRS 850 CH190
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Sam
 Power Supply: AC Adapter
 Comments:

SWEEP TABLE: "FCC 22Spuri 1.58-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.6 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 1.58 GHz -25.66 dBm

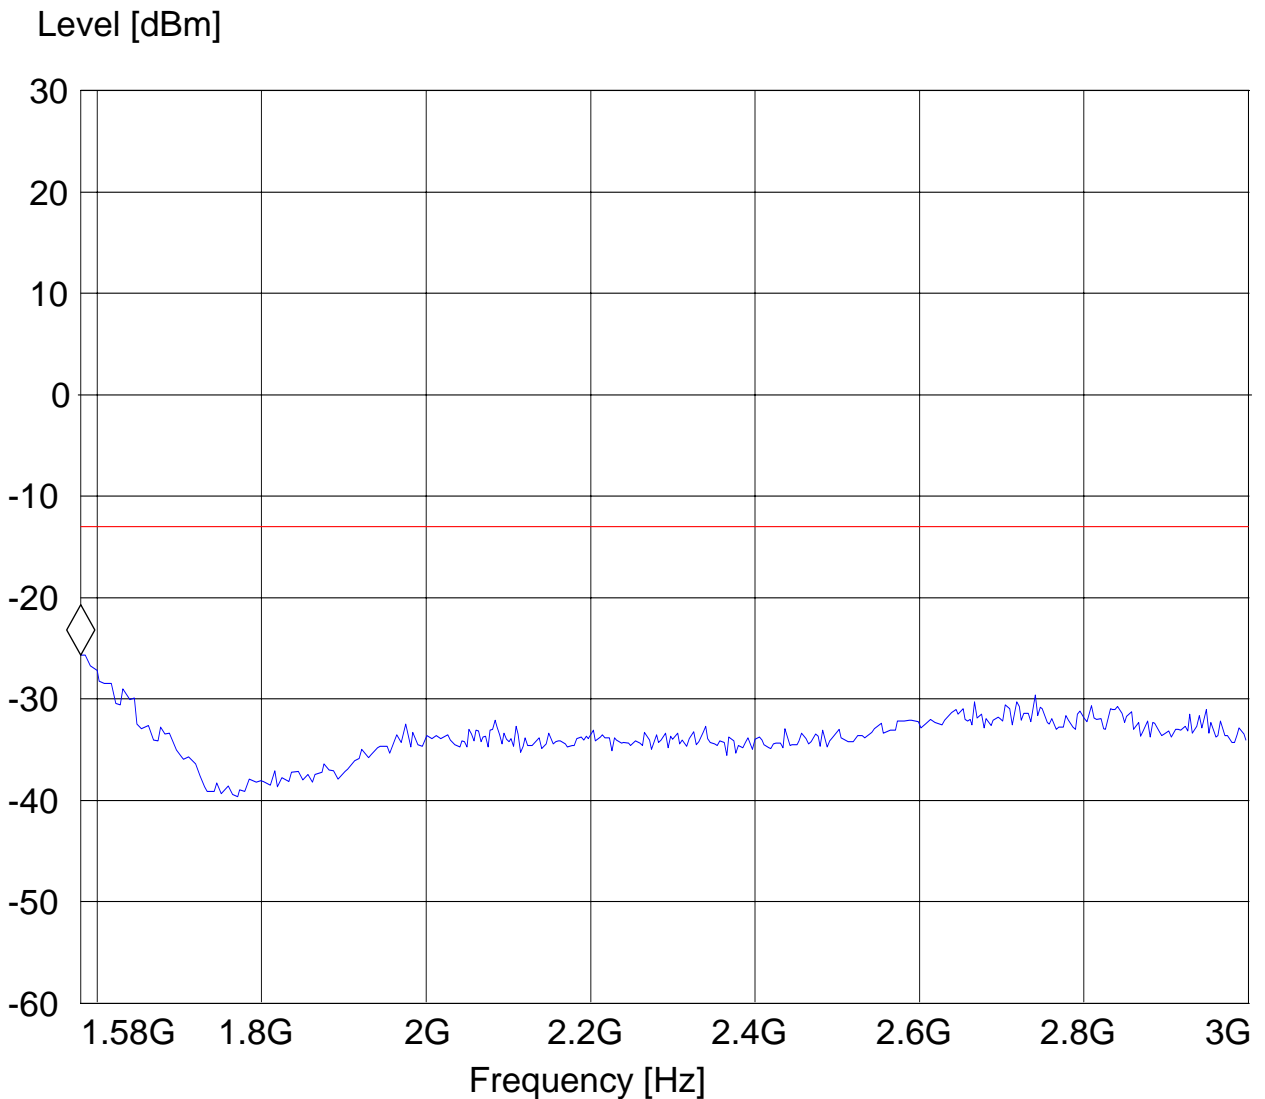




RADIATED SPURIOUS EMISSIONS (GSM-850) Tx @ 836.6MHz: 3GHz – 9GHz

EUT: MTSMC-H-U W/ HC25 MODULE
 Customer: Multitech
 Test Mode: GPRS 850 CH190
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Sam
 Power Supply: AC Adapter
 Comments:

SWEEP TABLE: "FCC 22Spuri 3-9G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
3.0 GHz	9.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 6.22244489 GHz -47.71 dBm

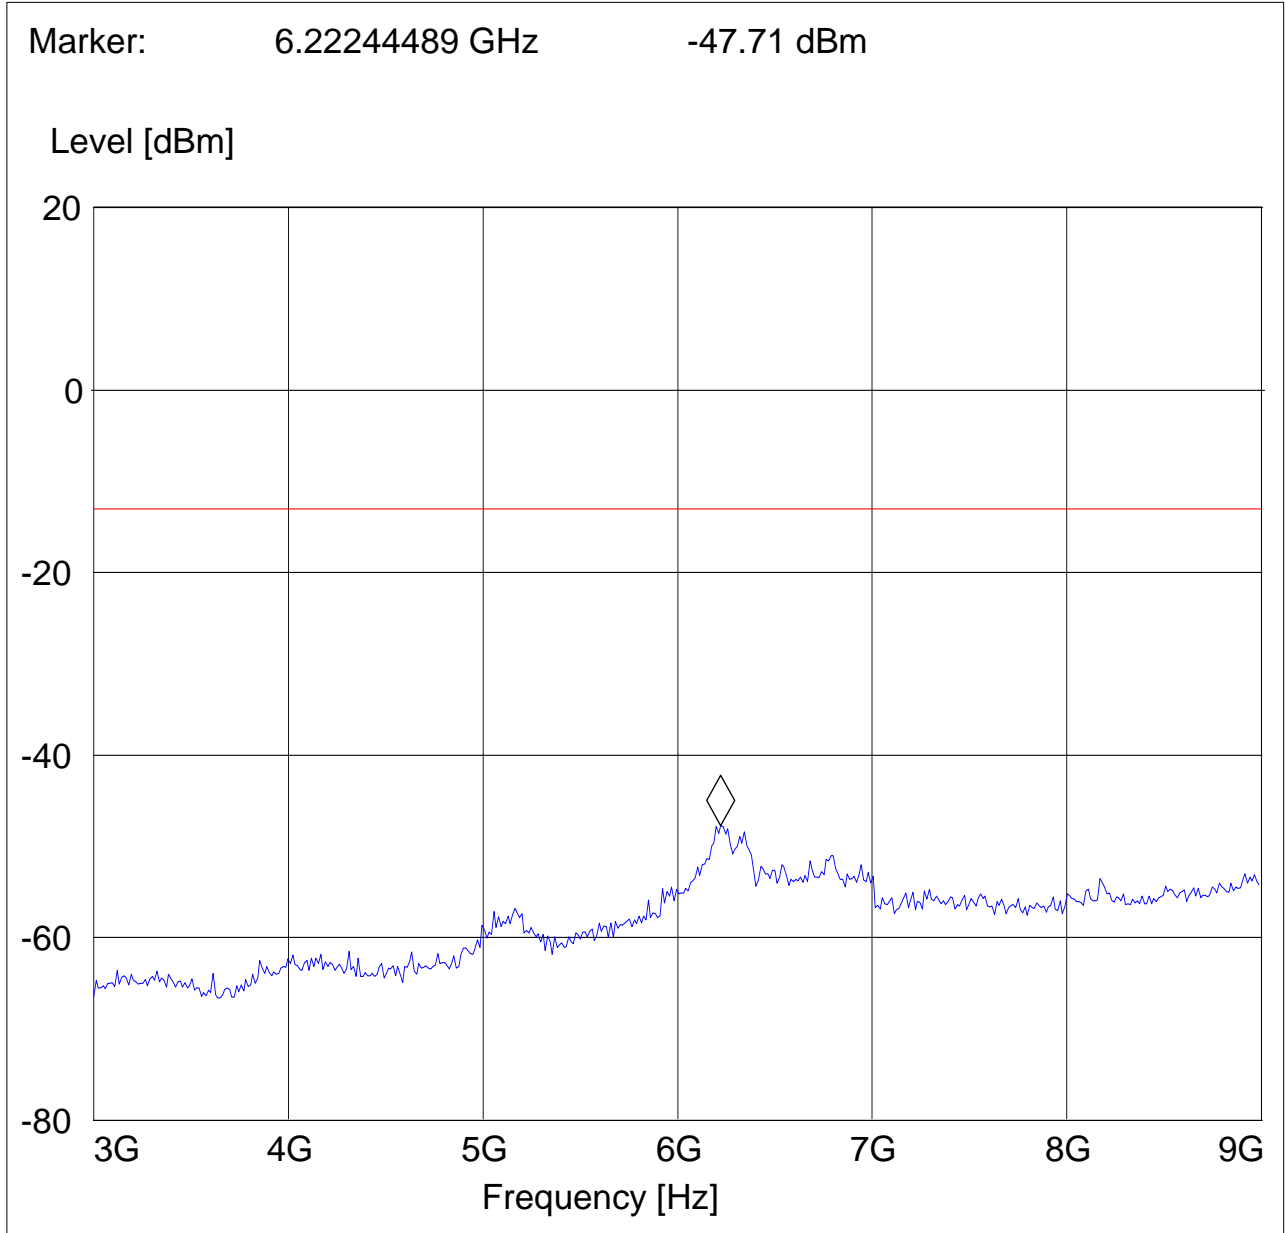




RADIATED SPURIOUS EMISSIONS (GSM-850) Tx @ 848.8MHz: 1GHz – 1.58GHz

EUT: MTSMC-H-U W/ HC25 MODULE
 Customer: Multitech
 Test Mode: GPRS 850 CH251
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Sam
 Power Supply: AC Adapter
 Comments:

SWEEP TABLE: "FCC 22Spuri 1-1.58G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	1.6 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 1.487014028 GHz -49.04 dBm

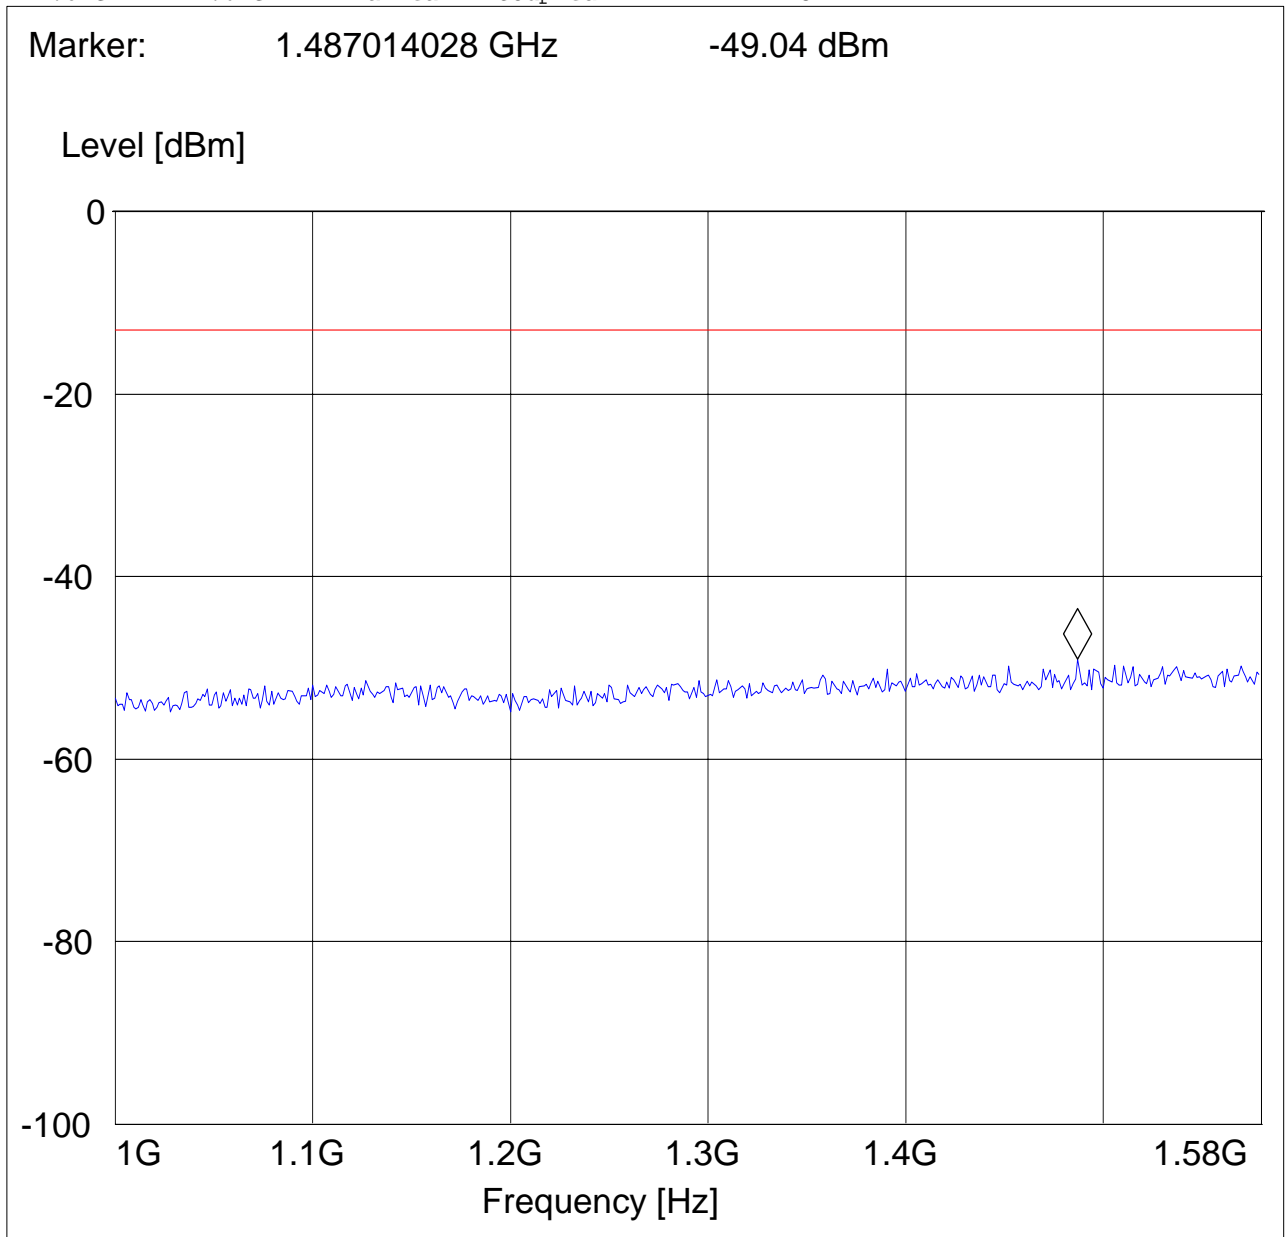




RADIATED SPURIOUS EMISSIONS (GSM-850) Tx @ 848.8MHz: 1.58-3GHz

EUT: MTRSMC-H-U W/ HC25 MODULE
Customer: Multitech
Test Mode: GPRS 850 CH251
ANT Orientation: H
EUT Orientation: H
Test Engineer: Sam
Power Supply: AC Adapter
Comments:

SWEEP TABLE: "FCC 22Spuri 1.58-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.6 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 1.58 GHz -25.1 dBm

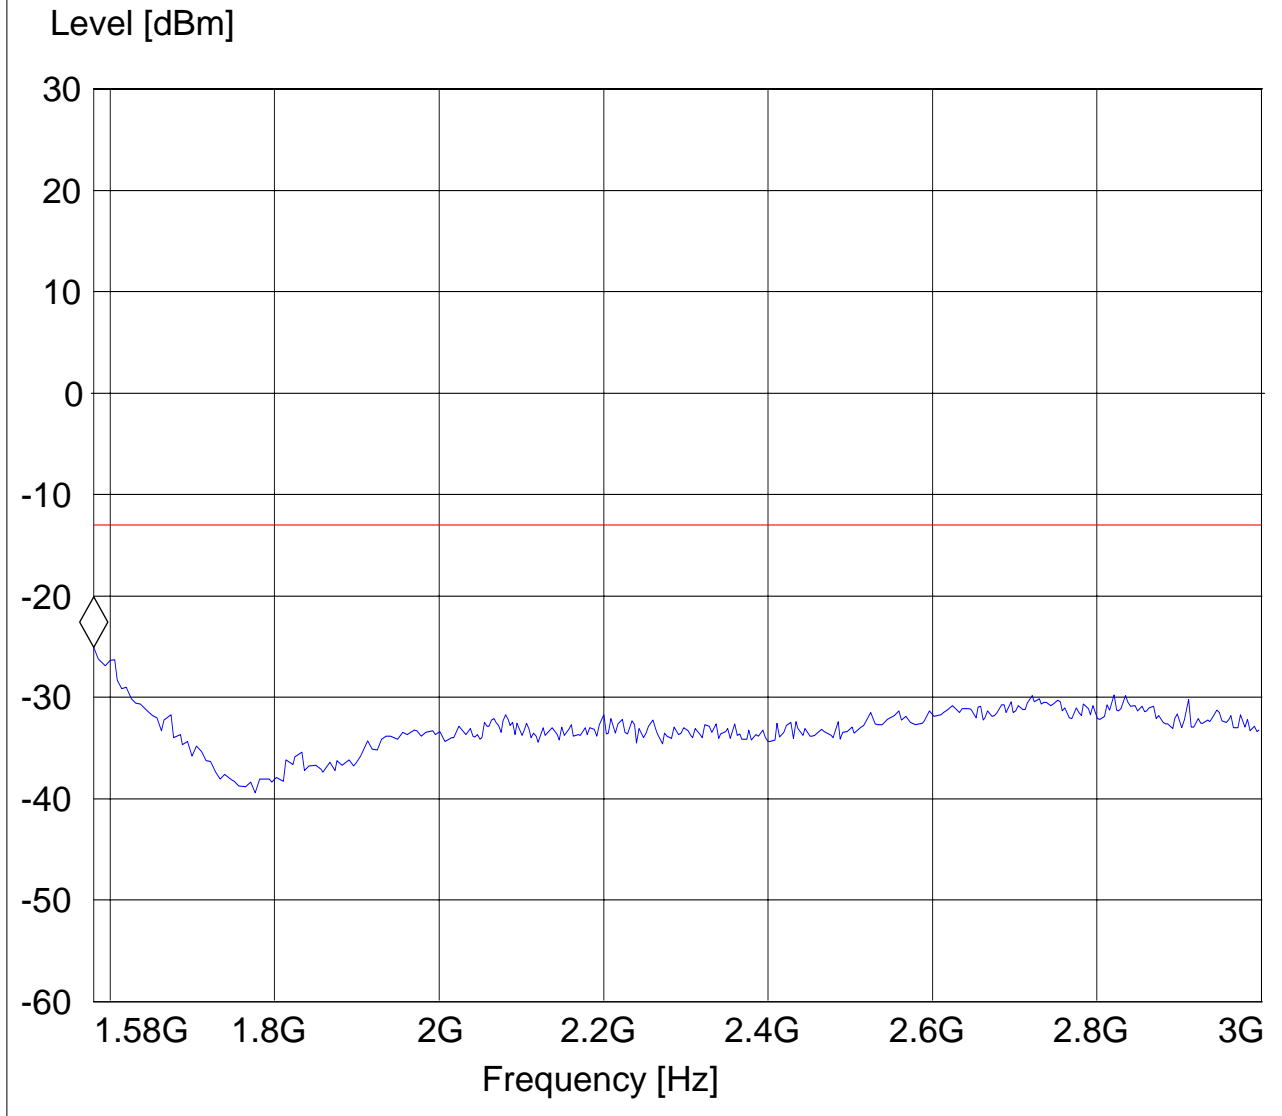




RADIATED SPURIOUS EMISSIONS (GSM-850) Tx @ 848.8MHz: 3GHz – 9GHz

EUT: MTSMC-H-U W/ HC25 MODULE
 Customer: Multitech
 Test Mode: GPRS 850 CH251
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Sam
 Power Supply: AC Adapter
 Comments:

SWEEP TABLE: "FCC 22Spuri 3-9G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
3.0 GHz	9.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 6.22244489 GHz -47.59 dBm

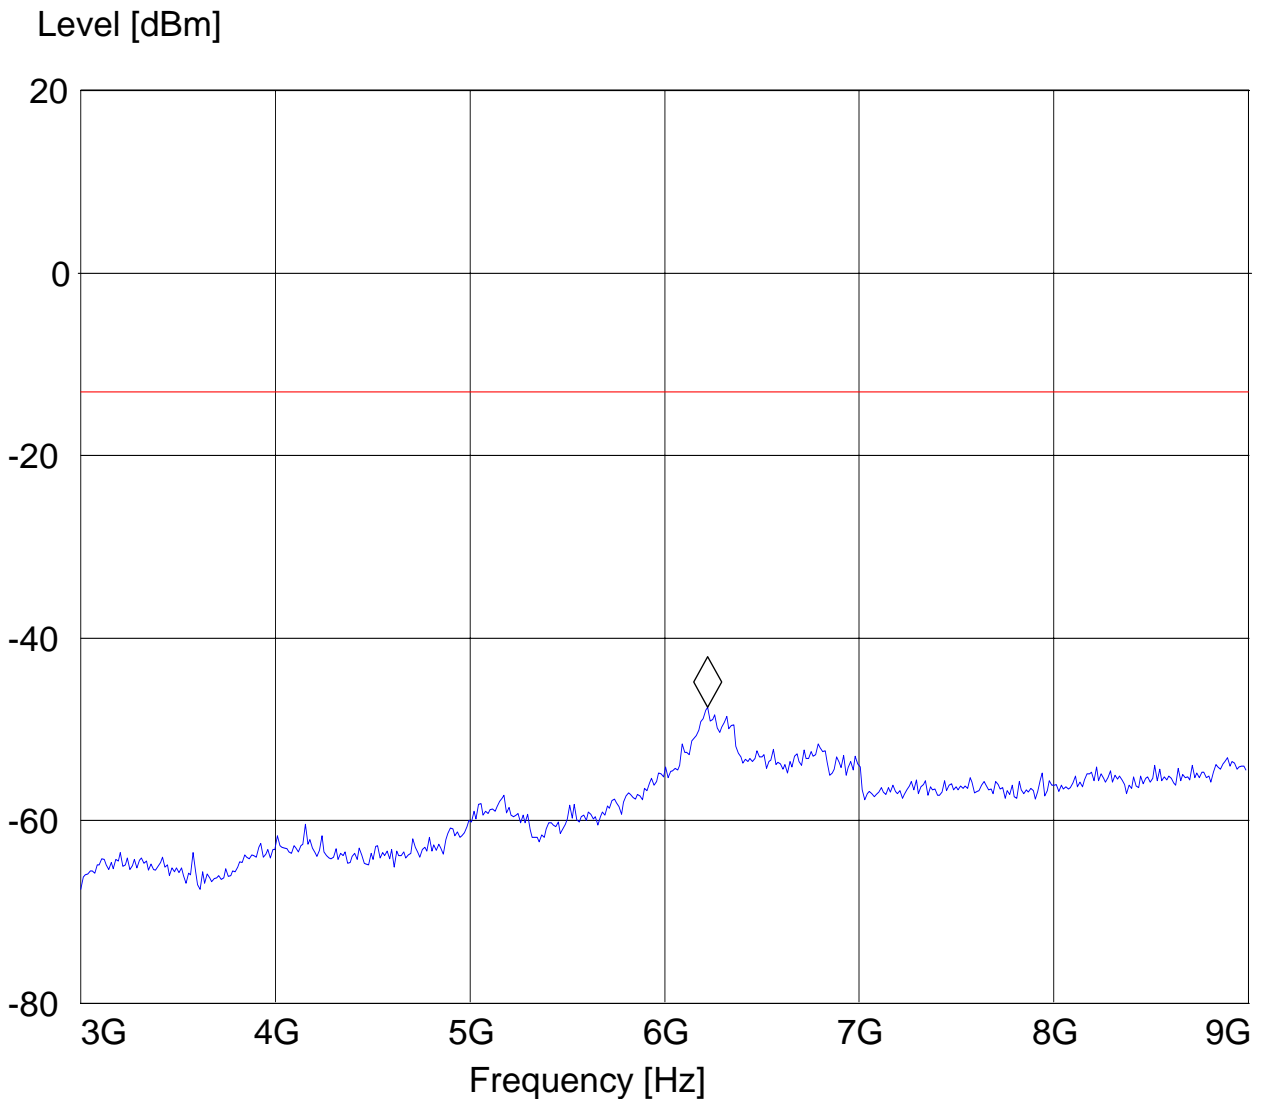



5.5.4.2 RESULTS OF RADIATED SPURIOUS EMISSIONS TESTS(UMTS FDD5)

Harmonics	Tx ch-4132 Freq. (MHz)	Level(dBm)	Tx ch-4183 Freq. (MHz)	Level(dBm)	Tx ch-4233 Freq. (MHz)	Level(dBm)
2	1652.8	NF	1673.2	NF	1693.2	NF
3	2479.2	NF	2509.8	NF	2539.8	NF
4	3305.6	NF	3346.4	NF	3386.4	NF
5	4132	NF	4183	NF	4233	NF
6	4958.4	NF	5019.6	NF	5079.6	NF
7	5784.8	NF	5856.2	NF	5926.2	NF
8	6611.2	NF	6692.8	NF	6772.8	NF
9	7437.6	NF	7529.4	NF	7619.4	NF
10	8264	NF	8366	NF	8466	NF



RADIATED SPURIOUS EMISSIONS (UMTS FDD5) TX: 30MHz - 1GHz
Spurious emission limit -13dBm
Antenna: vertical


Note:

- 1. The peak above the limit line is the carrier freq.
- 2. This plot is valid for low, mid & high channels (worst-case plot)

EUT: MTSMC-H-U W/ HC25 MODULE
Customer: Multitech
Test Mode: FDDV, CH 4233
ANT Orientation: V
EUT Orientation: H
Test Engineer: Ed
Power Supply: AC Adapter
Comments:

SWEEP TABLE: "FCC 24 Spur 30M-1G_V"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

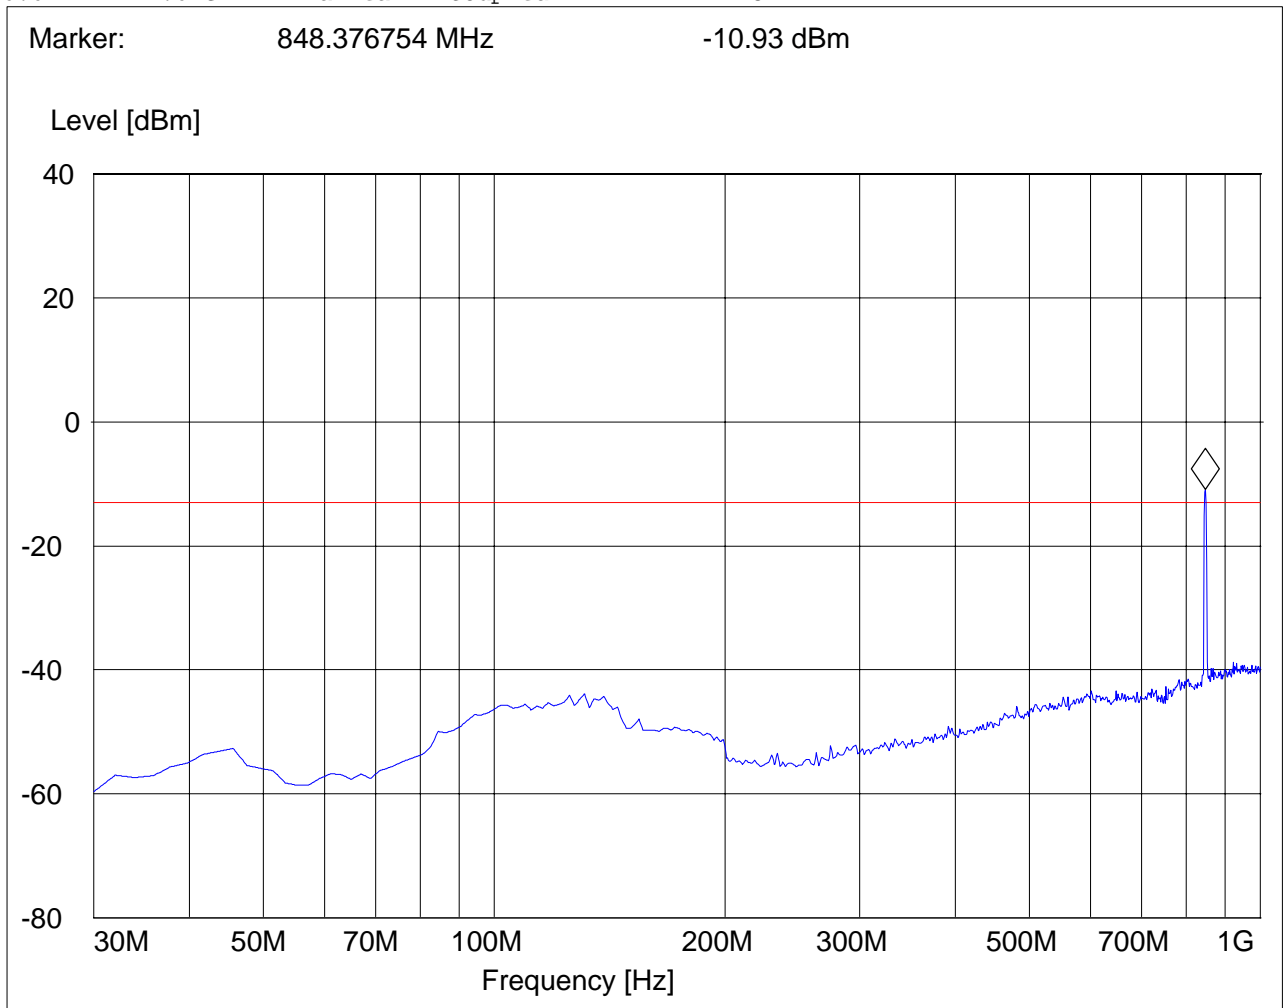



RADIATED SPURIOUS EMISSIONS (UMTS FDD5) TX: 30MHz - 1GHz
Spurious emission limit -13dBm
Antenna: Horizontal


Note:

- 1. The peak above the limit line is the carrier freq.
- 2. This plot is valid for low, mid & high channels (worst-case plot)

EUT: MTSMC-H-U W/ HC25 MODULE
Customer: Multitech
Test Mode: FDDV, CH 4233
ANT Orientation: H
EUT Orientation: H
Test Engineer: Ed
Power Supply: AC Adapter
Comments:

SWEEP TABLE: "FCC 24 Spur 30M-1G_H"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	DUMMY-DBM

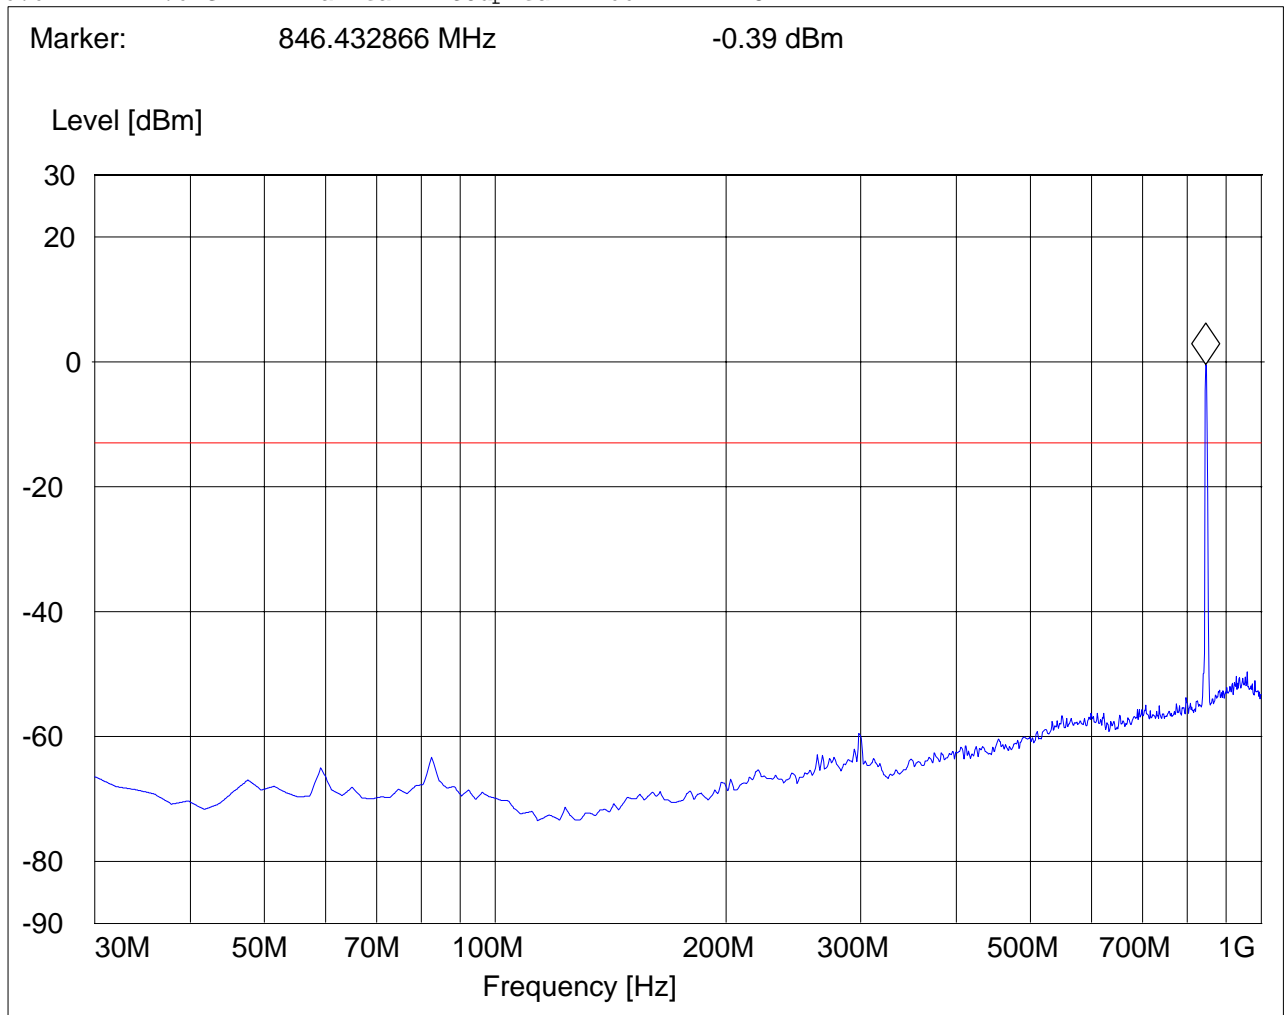




RADIATED SPURIOUS EMISSIONS (UMTS FDD5) Tx @ 826.4MHz: 1GHz - 1.58GHz

EUT: MTSMC-H-U W/ HC25 MODULE
 Customer: Multitech
 Test Mode: FDDV, CH 4132
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Ed
 Power Supply: AC Adapter
 Comments:

SWEEP TABLE: "FCC 22Spuri 1-1.58G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	1.6 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 1.574188377 GHz -49.08 dBm

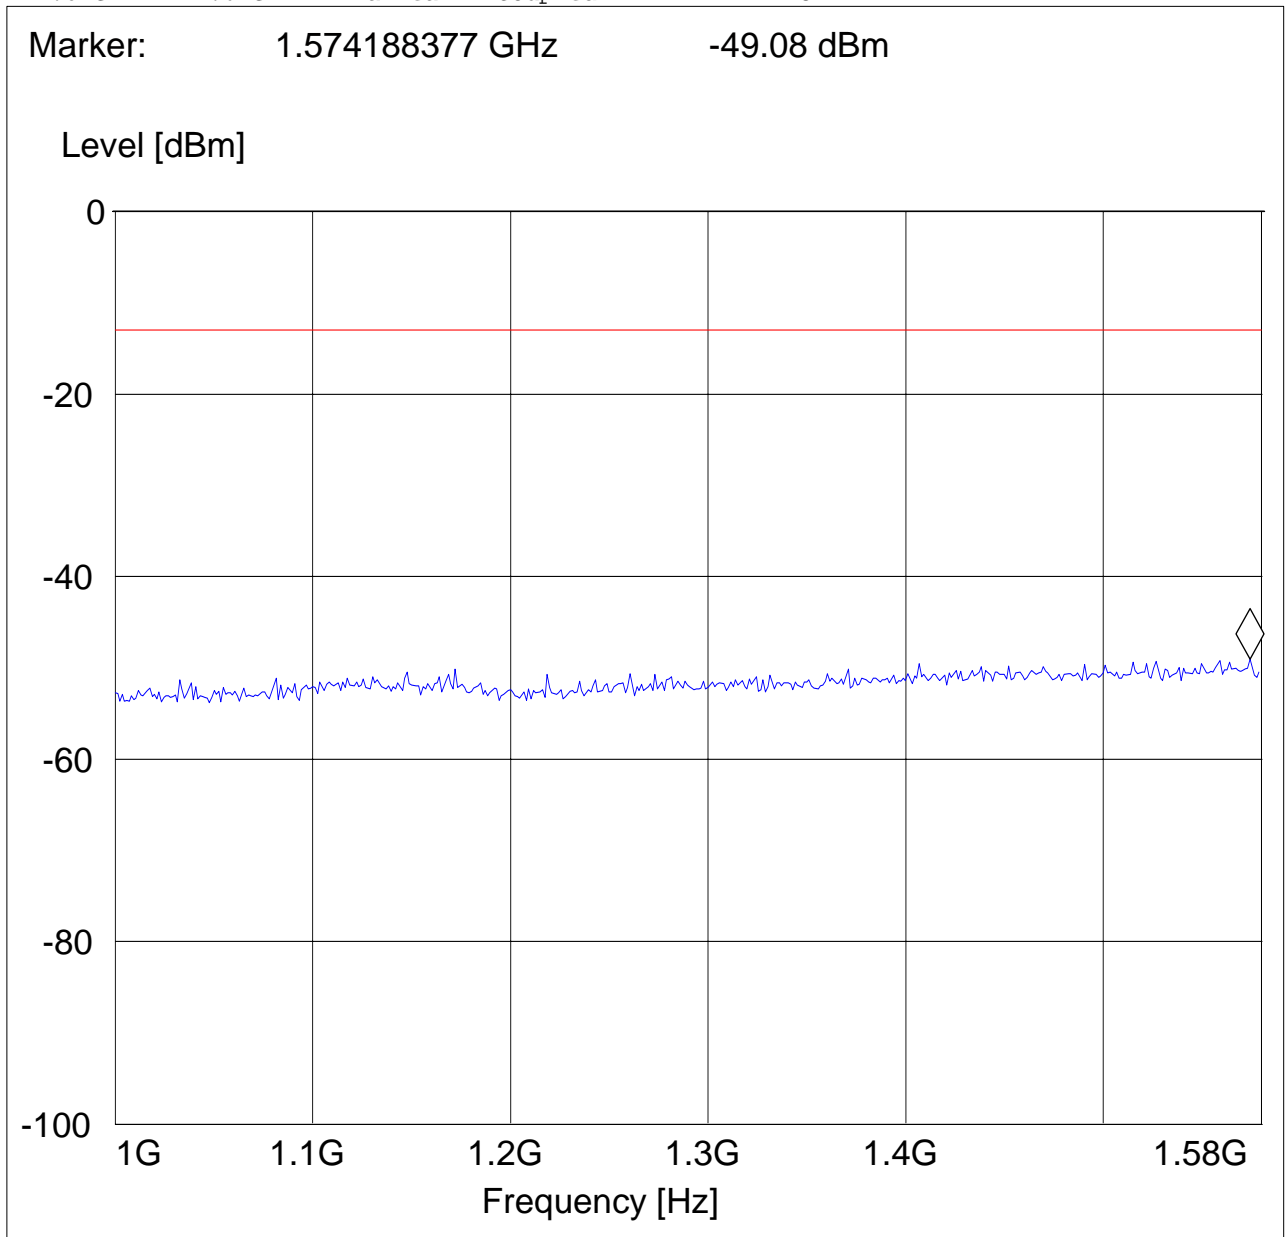




RADIATED SPURIOUS EMISSIONS (UMTS FDD5) Tx @ 826.4MHz: 1.58GHz – 3GHz

Customer: Multitech
Test Mode: FDDV, CH 4132
ANT Orientation: H
EUT Orientation: H
Test Engineer: Ed
Power Supply: AC Adapter
Comments:

SWEEP TABLE: "FCC 22Spuri 1.58-9G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.6 GHz	9.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 6.219358717 GHz -46.53 dBm

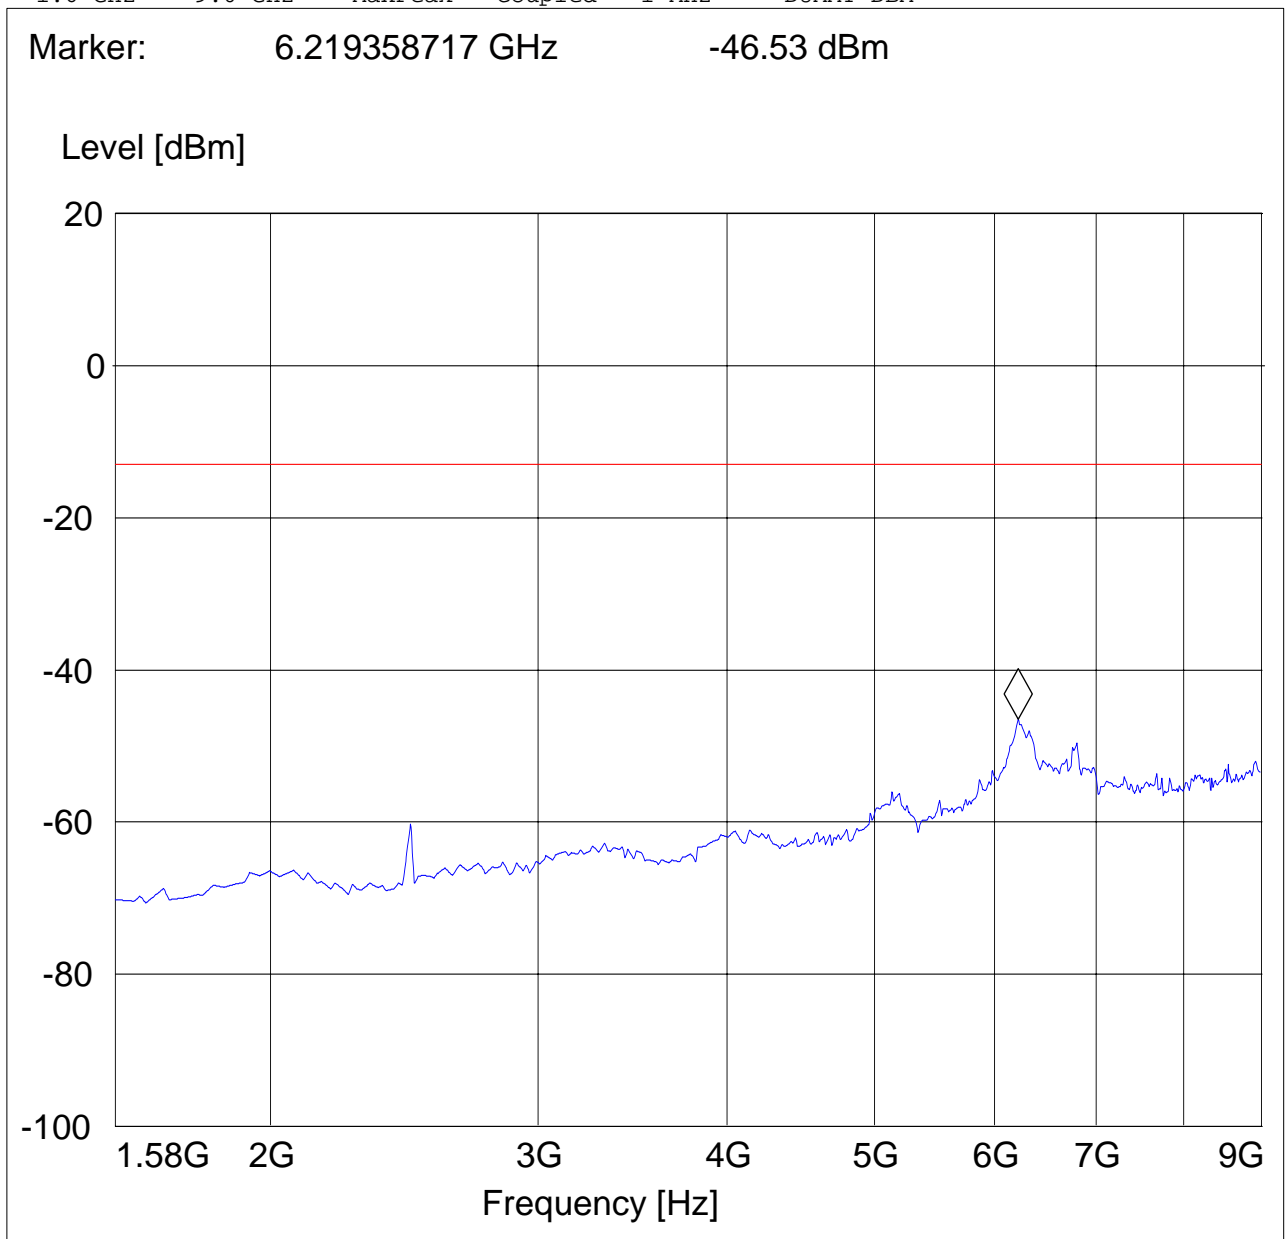




RADIATED SPURIOUS EMISSIONS (UMTS FDD5) Tx @ 826.4MHz: 3GHz – 9GHz

Customer: Multitech
Test Mode: FDDV, CH 4132
ANT Orientation: H
EUT Orientation: H
Test Engineer: Ed
Power Supply: AC Adapter
Comments:

SWEEP TABLE: "FCC 22Spuri 3-9G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
3.0 GHz	9.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

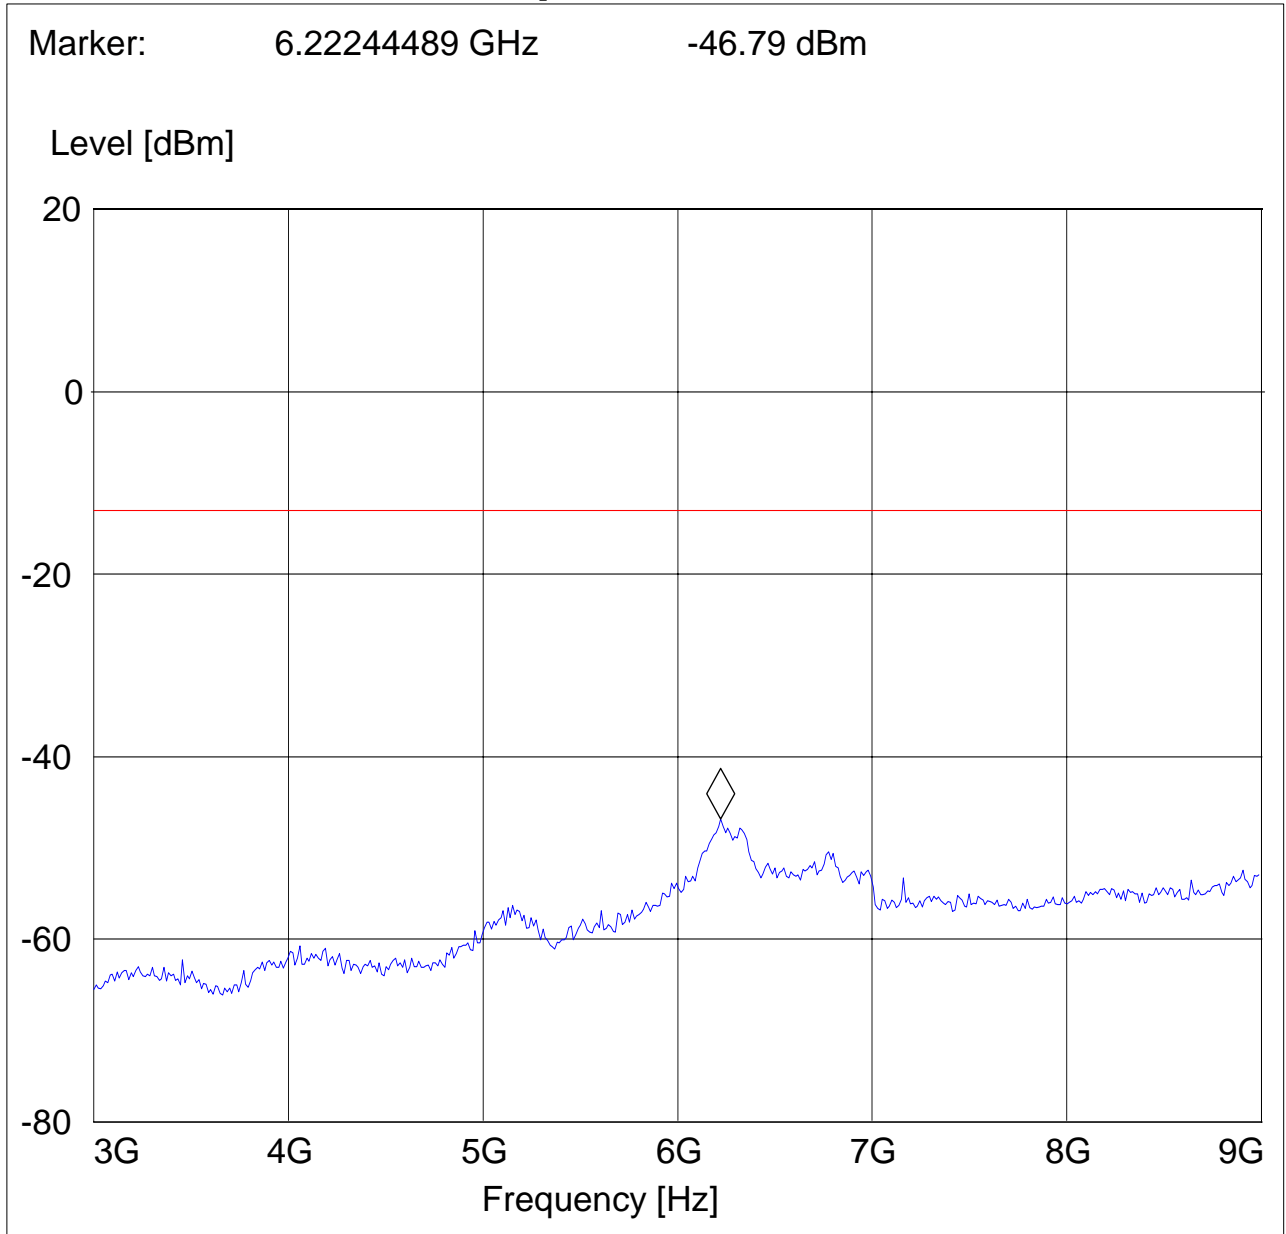




RADIATED SPURIOUS EMISSIONS (UMTS FDD5) Tx @ 836.6MHz: 1GHz - 1.58GHz

EUT: MTSMC-H-U W/ HC25 MODULE
 Customer: Multitech
 Test Mode: FDDV, CH 4183
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Ed
 Power Supply: AC Adapter
 Comments:

SWEEP TABLE: "FCC 22Spuri 1-1.58G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	1.6 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 1.535831663 GHz -47.84 dBm

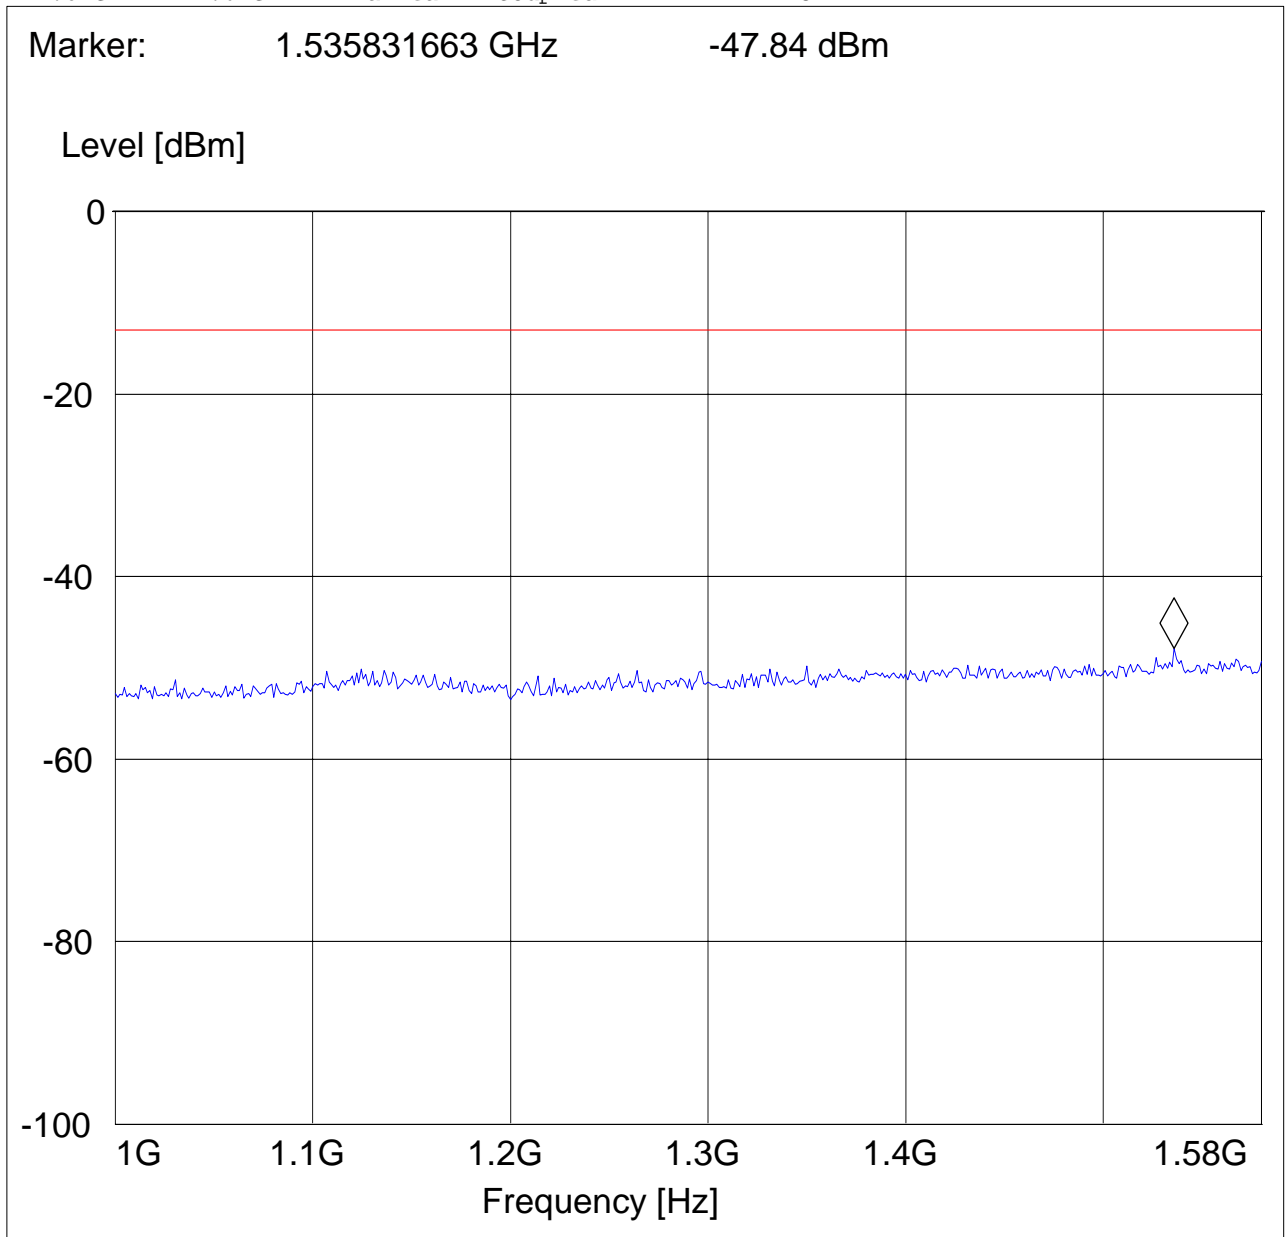




RADIATED SPURIOUS EMISSIONS (UMTS FDD5) Tx @ 836.6MHz: 1.58GHz – 9GHz

EUT: MTSMC-H-U W/ HC25 MODULE
Customer: Multitech
Test Mode: FDDV, CH 4183
ANT Orientation: H
EUT Orientation: H
Test Engineer: Ed
Power Supply: AC Adapter
Comments:

SWEEP TABLE: "FCC 22Spuri 1.58-9G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.6 GHz	9.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 6.219358717 GHz -46.83 dBm

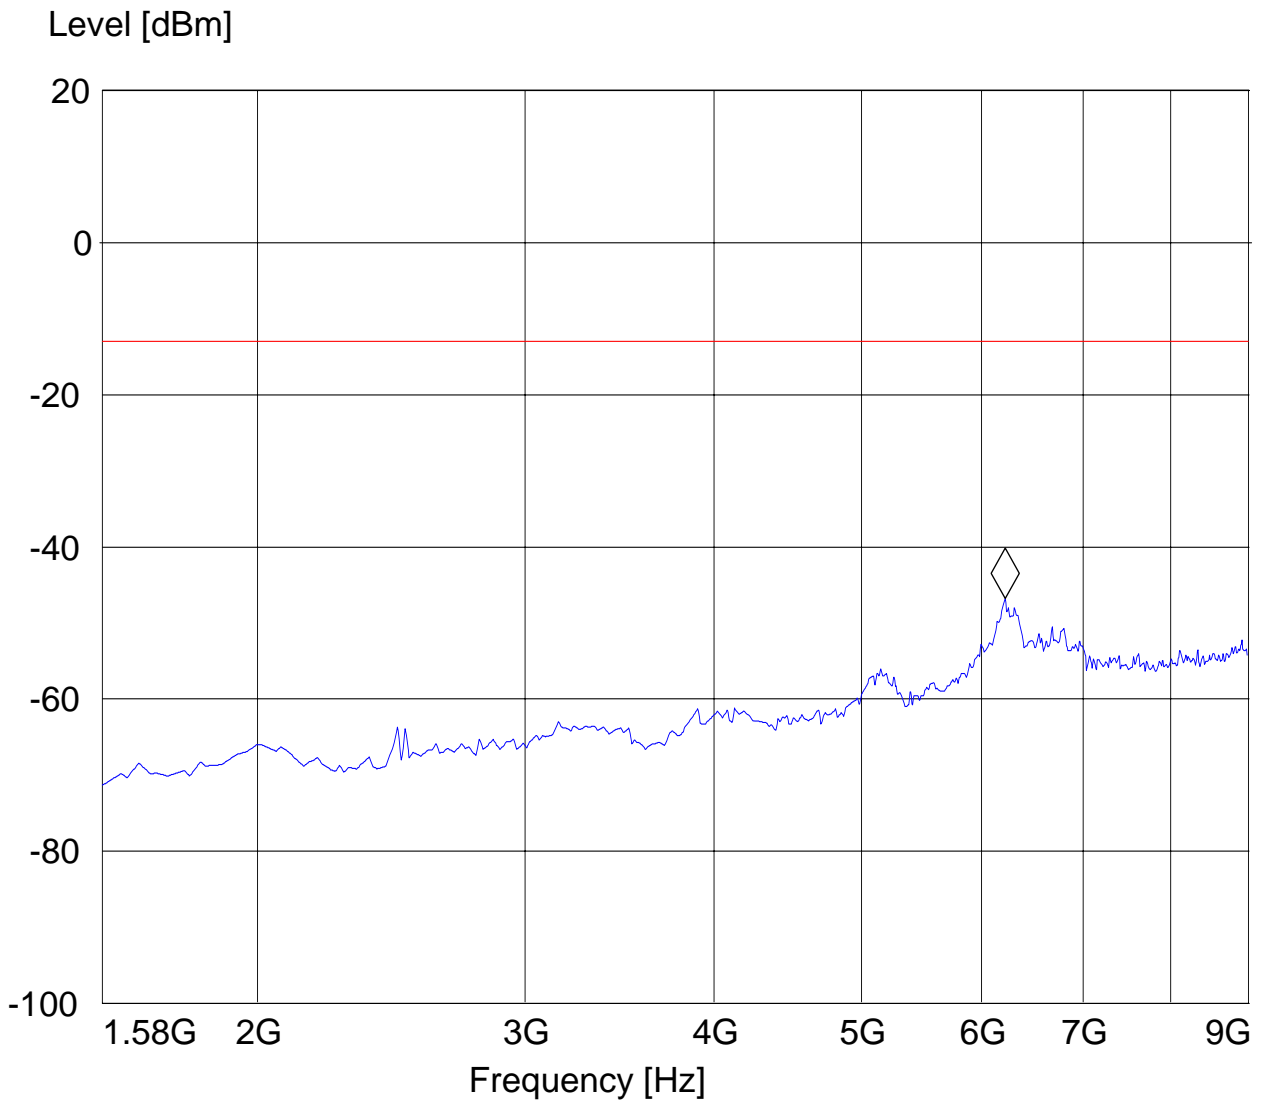




RADIATED SPURIOUS EMISSIONS (UMTS FDD5) Tx @ 846.6MHz: 1GHz - 1.58GHz

EUT: MTSMC-H-U W/ HC25 MODULE
Customer: Multitech
Test Mode: FDDV, CH 4233
ANT Orientation: H
EUT Orientation: H
Test Engineer: Ed
Power Supply: AC Adapter
Comments:

SWEEP TABLE: "FCC 22Spuri 1-1.58G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	1.6 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 1.478877756 GHz -49.63 dBm

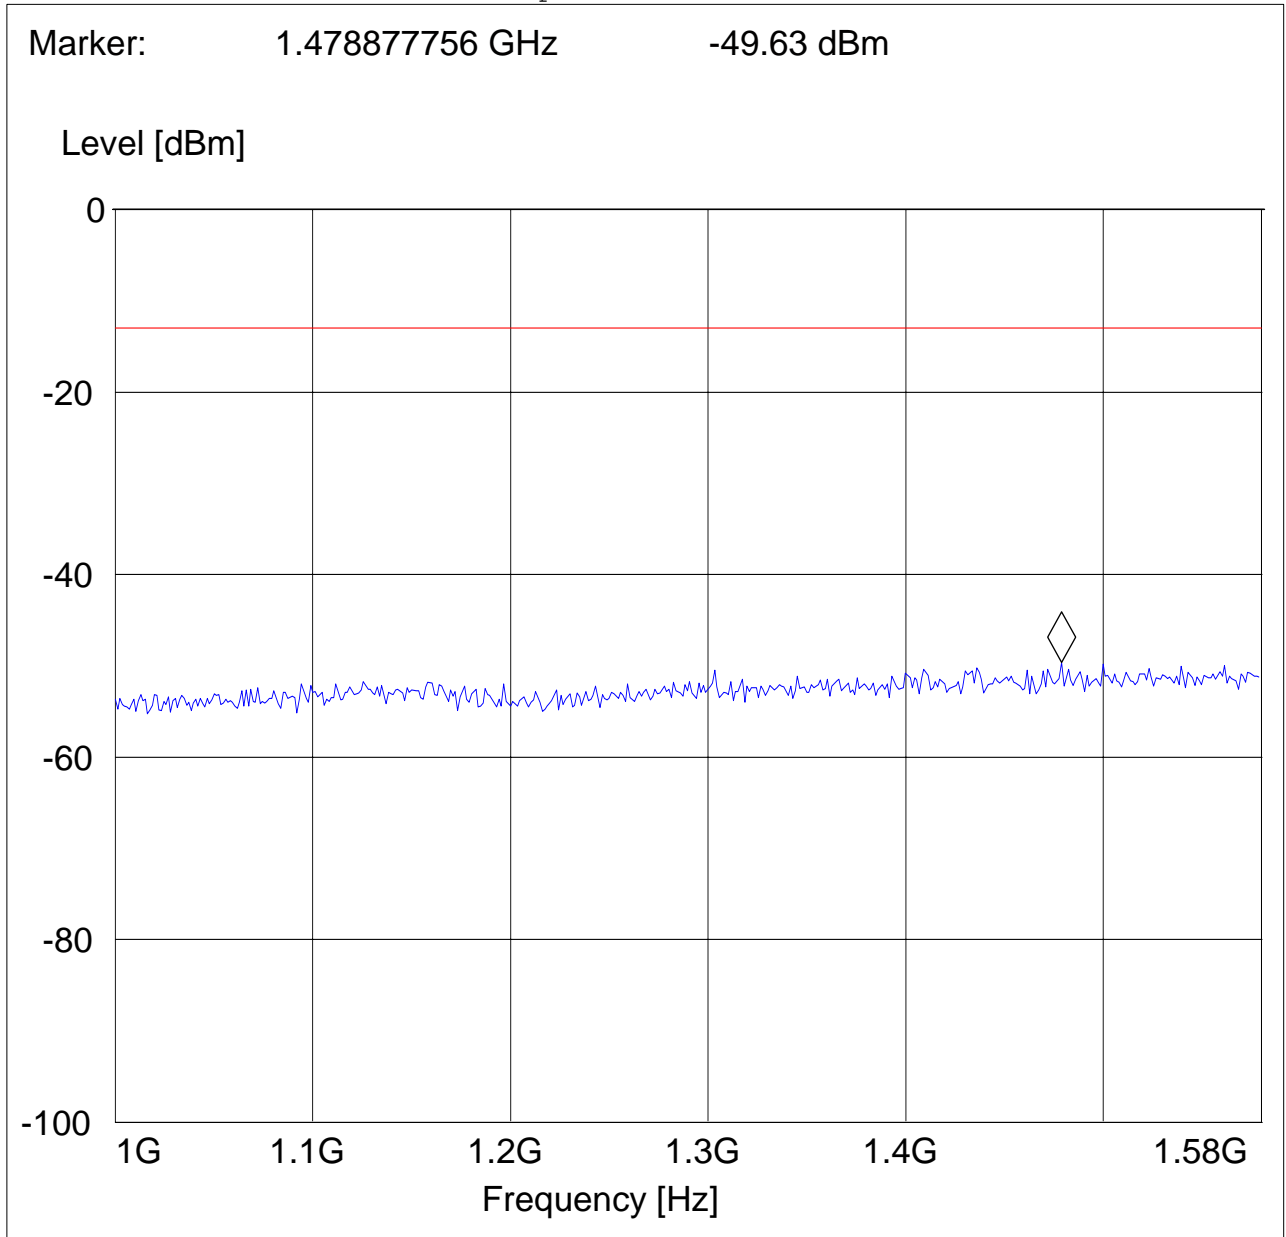




RADIATED SPURIOUS EMISSIONS (UMTS FDD5) Tx @ 846.6MHz: 1.58GHz – 9GHz

EUT: MTSMC-H-U W/ HC25 MODULE
 Customer: Multitech
 Test Mode: FDDV, CH 4233
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Ed
 Power Supply: AC Adapter
 Comments:

SWEEP TABLE: "FCC 22Spuri 1.58-9G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.6 GHz	9.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

Marker: 6.219358717 GHz -46.81 dBm

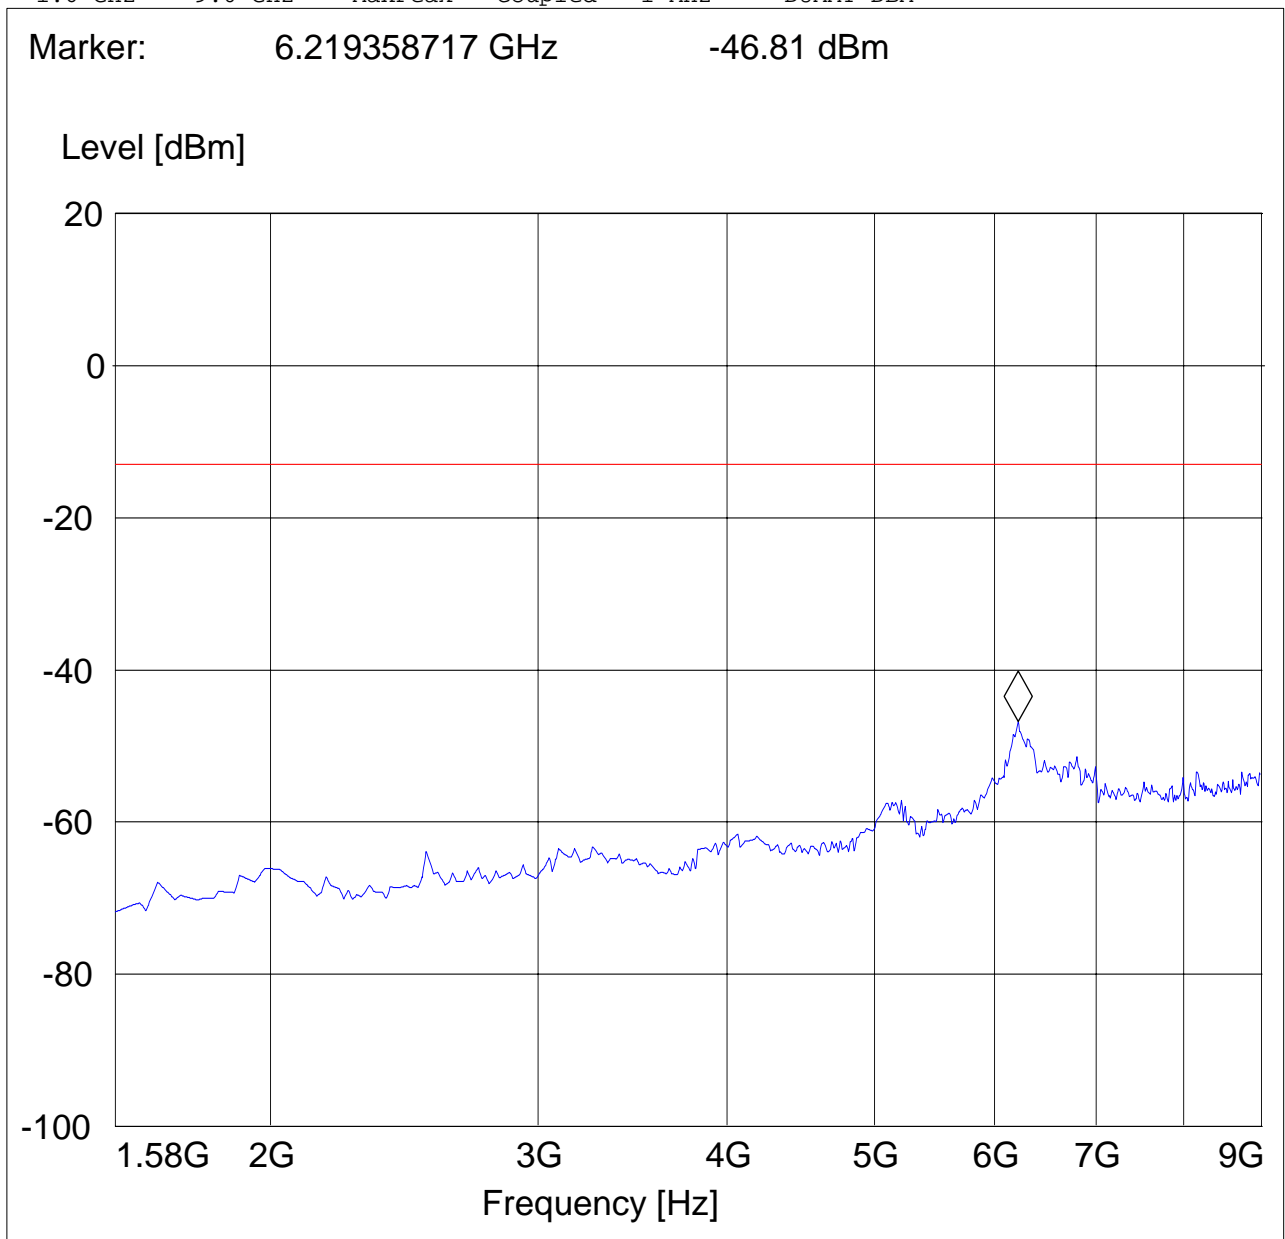



5.5.4.3 RESULTS OF RADIATED SPURIOUS EMISSIONS TESTS (PCS-1900):

Harmonic	Tx ch-512 Freq.(MHz)	Level (dBm)	Tx ch-661 Freq. (MHz)	Level (dBm)	Tx ch-810 Freq. (MHz)	Level (dBm)
2	3700.4	NF	3760	NF	3819.6	NF
3	5550.6	NF	5640	NF	5729.4	NF
4	7400.8	NF	7520	NF	7639.2	NF
5	9251	NF	9400	NF	9549	NF
6	11101.2	NF	11280	NF	11458.8	NF
7	12951.4	NF	13160	NF	13368.6	NF
8	14801.6	NF	15040	NF	15278.4	NF
9	16651.8	NF	16920	NF	17188.2	NF
10	18502	NF	18800	NF	19098	NF
NF = NOISE FLOOR						




RADIATED SPURIOUS EMISSIONS(PCS 1900) TX: 30MHz - 1GHz

Antenna: Vertical

EUT: MTSMC-H-U W/ HC25 MODULE
Customer: Multitech
Test Mode: GSM 1900, ch 512
ANT Orientation: V
EUT Orientation: H
Test Engineer: Ed
Power Supply: AC Adapter
Comments:

SWEEP TABLE: "FCC 24 Spur 30M-1G_V"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

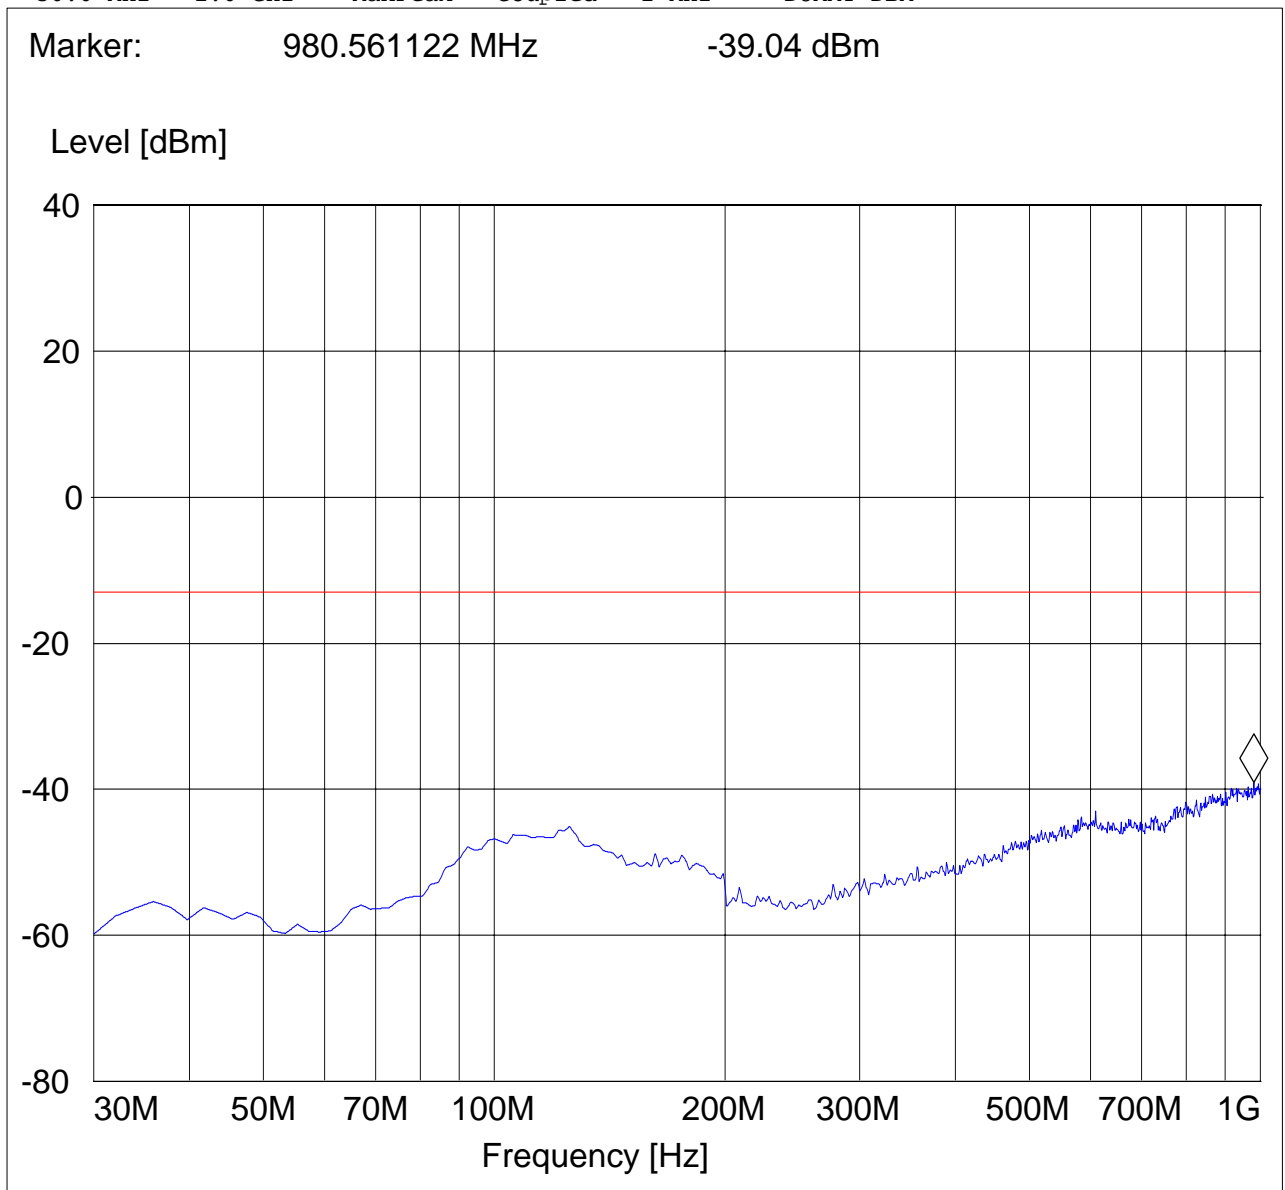




RADIATED SPURIOUS EMISSIONS(PCS 1900) TX: 30MHz - 1GHz

Antenna: Horizontal

EUT: MTSMC-H-U W/ HC25 MODULE
Customer: Multitech
Test Mode: GSM 1900, ch 810
ANT Orientation: H
EUT Orientation: H
Test Engineer: Ed
Power Supply: AC Adapter
Comments:

SWEEP TABLE: "FCC 24 Spur 30M-1G_H"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	DUMMY-DBM

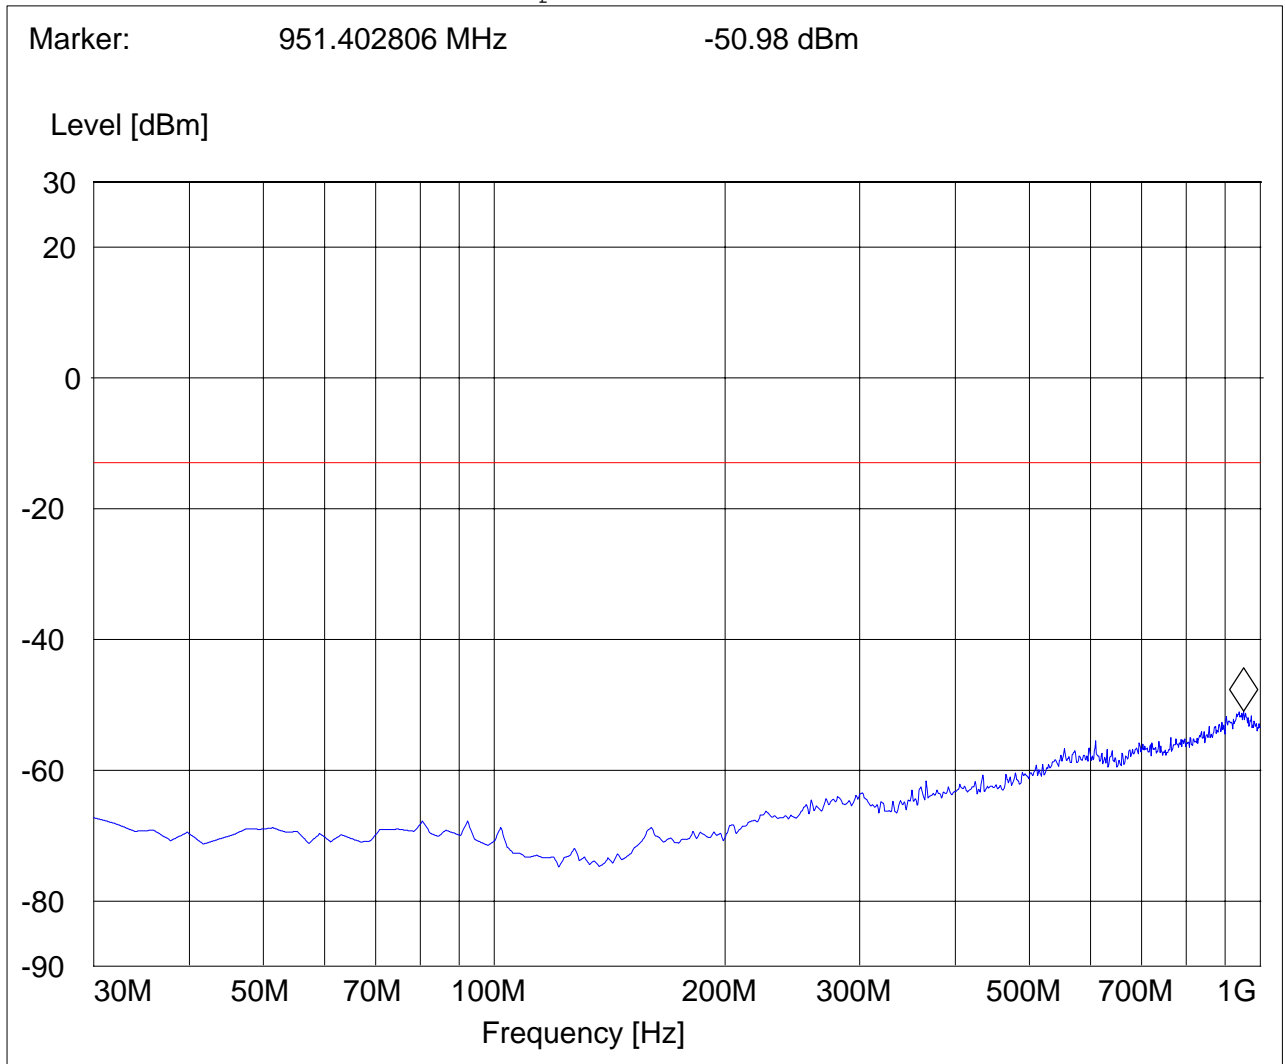




RADIATED SPURIOUS EMISSIONS(PCS 1900) Tx @ 1850.2MHz: 1GHz – 3GHz

Note: The peak above the limit line is the carrier freq. at ch-512.

EUT: MTSMC-H-U W/ HC25 MODULE
 Customer: Multitech
 Test Mode: GSM 1900, ch 512
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Ed
 Power Supply: AC Adapter
 Comments:

SWEEP TABLE: "FCC 24Spuri 1-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

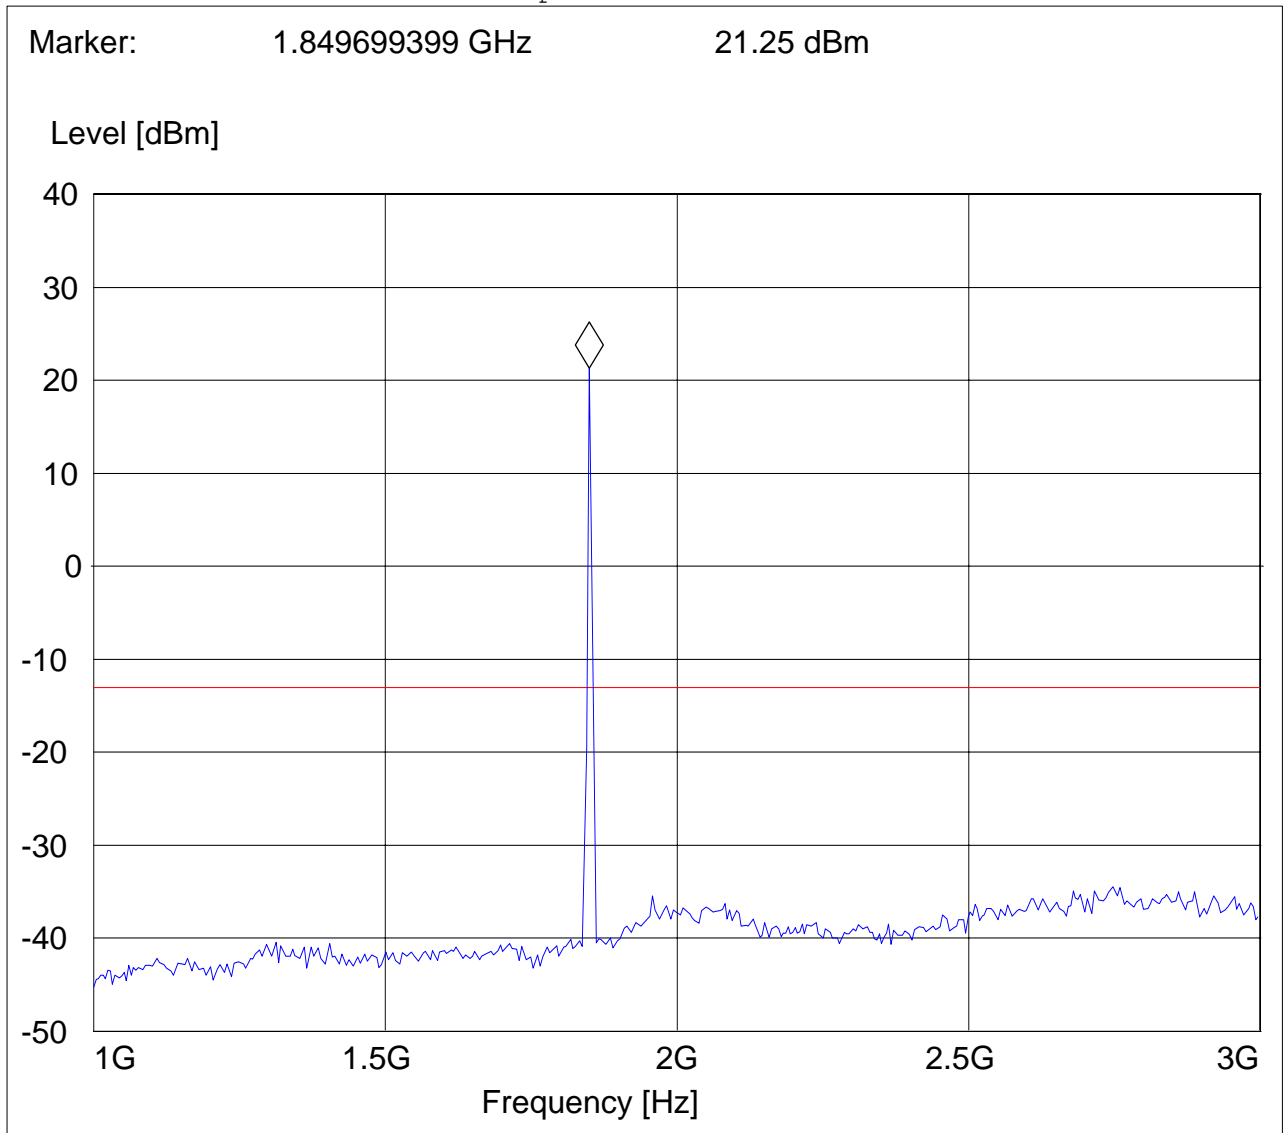




RADIATED SPURIOUS EMISSIONS(PCS 1900) Tx @ 1850.2MHz: 3GHz – 18GHz

EUT: MTSMC-H-U W/ HC25 MODULE
Customer: Multitech
Test Mode: GSM 1900, ch 512
ANT Orientation: H
EUT Orientation: H
Test Engineer: Ed
Power Supply: AC Adapter
Comments:

SWEEP TABLE: "FCC 24Spuri 3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
3.0 GHz	18.0 GHz	Average	Coupled	1 MHz	DUMMY-DBM

Marker: 17.909819639 GHz -51.28 dBm

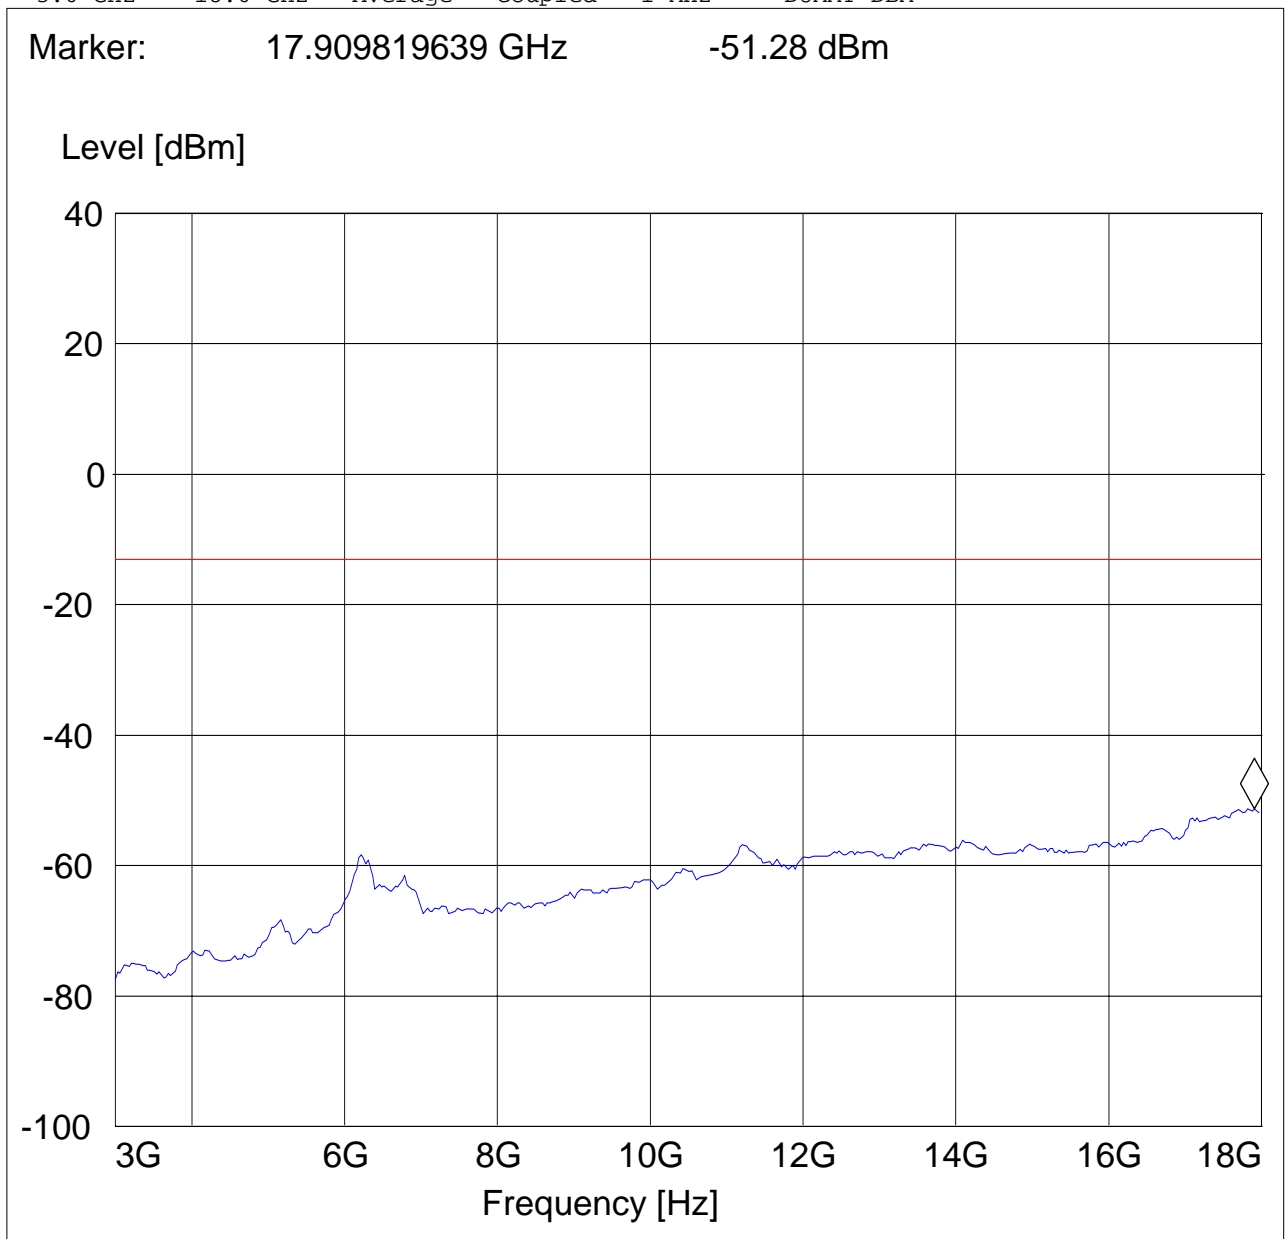




RADIATED SPURIOUS EMISSIONS(PCS 1900) Tx @ 1880.0MHz: 1GHz – 3GHz

EUT: MTSMC-H-U W/ HC25 MODULE
 Customer: Multitech
 Test Mode: GSM 1900, ch 661
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Ed
 Power Supply: AC Adapter
 Comments:

SWEEP TABLE: "FCC 24Spuri 1-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

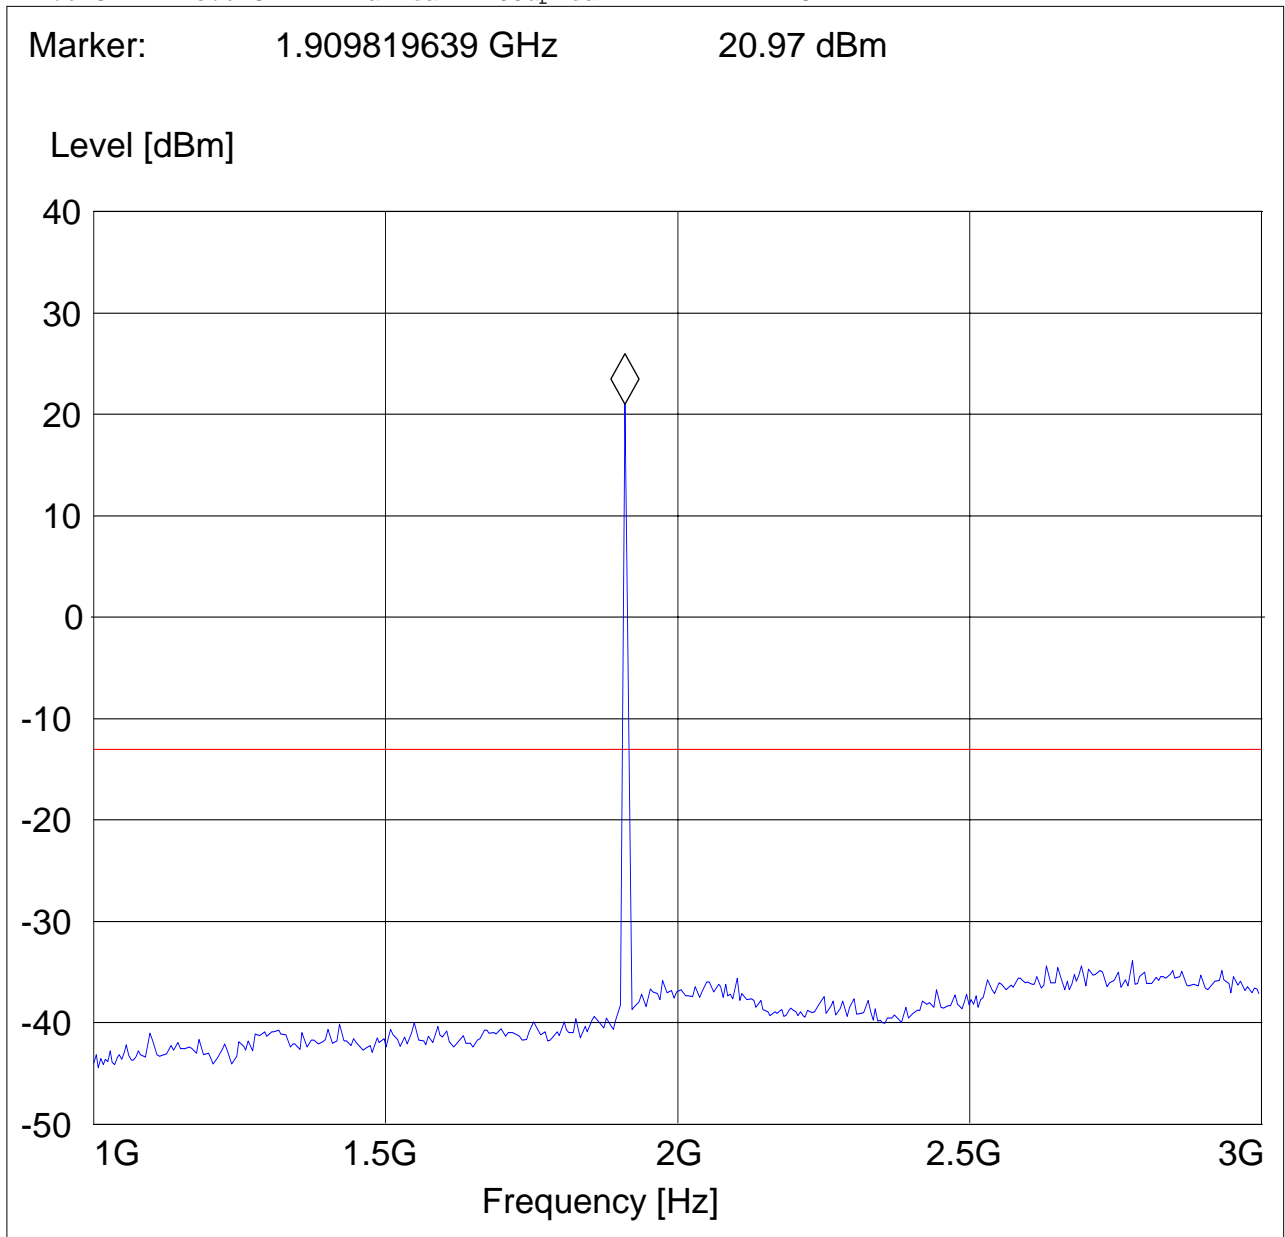




RADIATED SPURIOUS EMISSIONS(PCS 1900) Tx @ 1880.0MHz: 3GHz – 18GHz

EUT: MTSMC-H-U W/ HC25 MODULE
Customer: Multitech
Test Mode: GSM 1900, ch 661
ANT Orientation: H
EUT Orientation: H
Test Engineer: Ed
Power Supply: AC Adapter
Comments:

SWEEP TABLE: "FCC 24Spuri 3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
3.0 GHz	18.0 GHz	Average	Coupled	1 MHz	DUMMY-DBM

Marker: 17.789579158 GHz -51.19 dBm

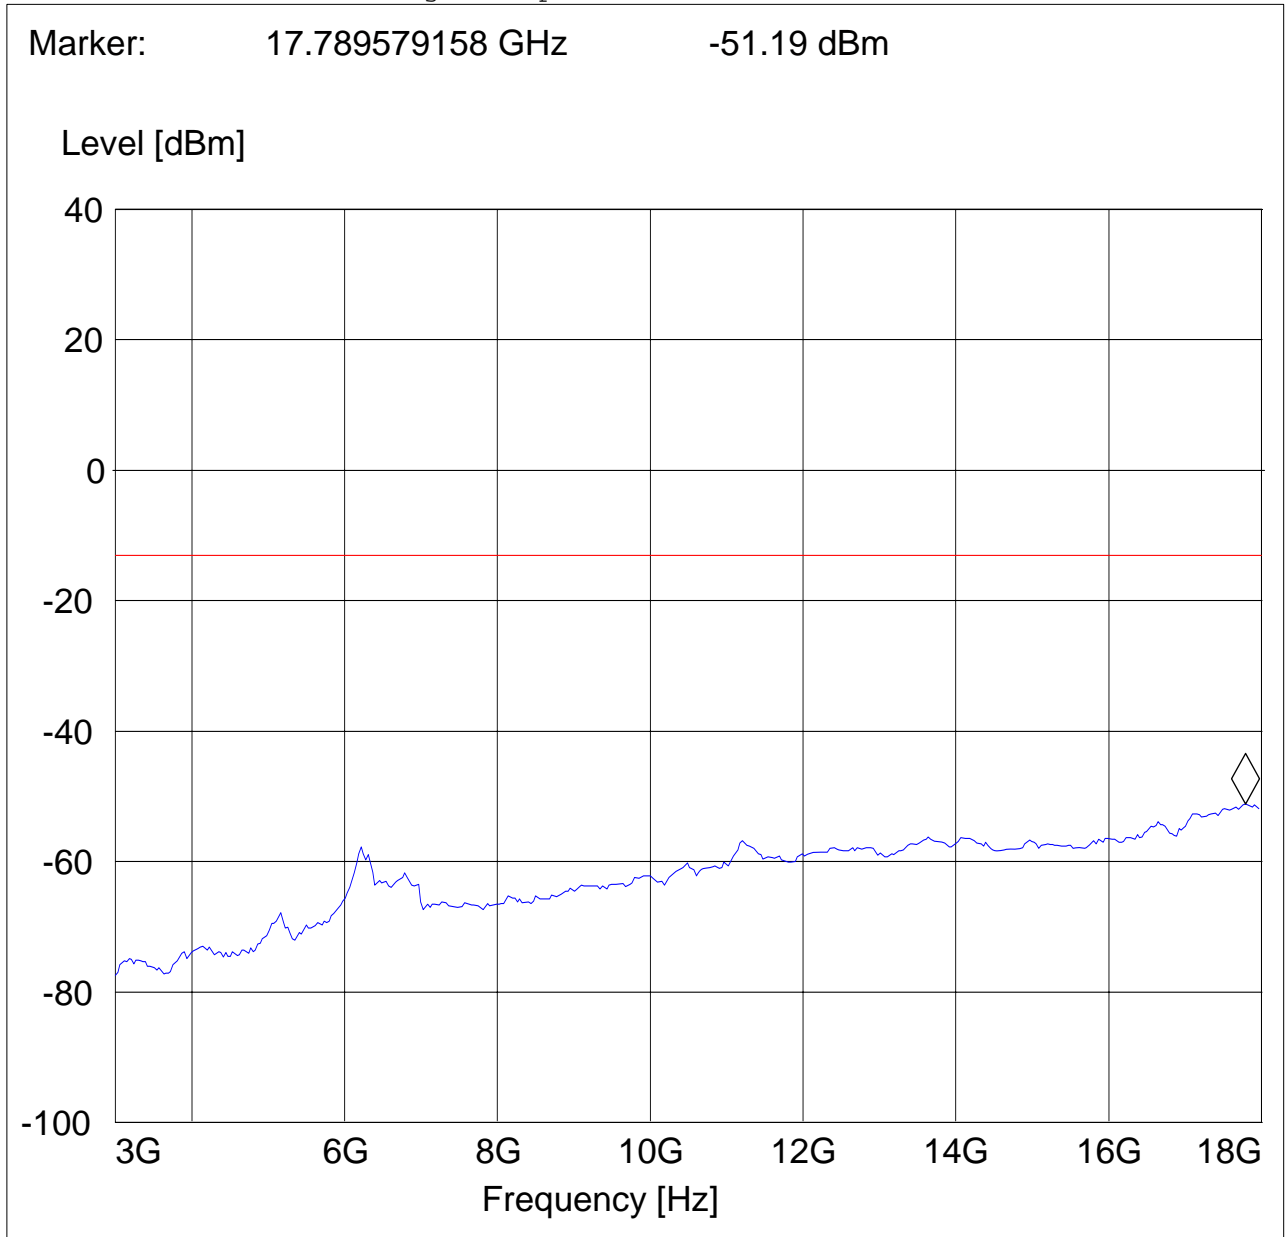




RADIATED SPURIOUS EMISSIONS(PCS 1900) Tx @ 1909.8MHz: 1GHz – 3GHz

EUT: MTSMC-H-U W/ HC25 MODULE
 Customer: Multitech
 Test Mode: GSM 1900, ch 810
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Ed
 Power Supply: AC Adapter
 Comments:

SWEEP TABLE: "FCC 24Spuri 1-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

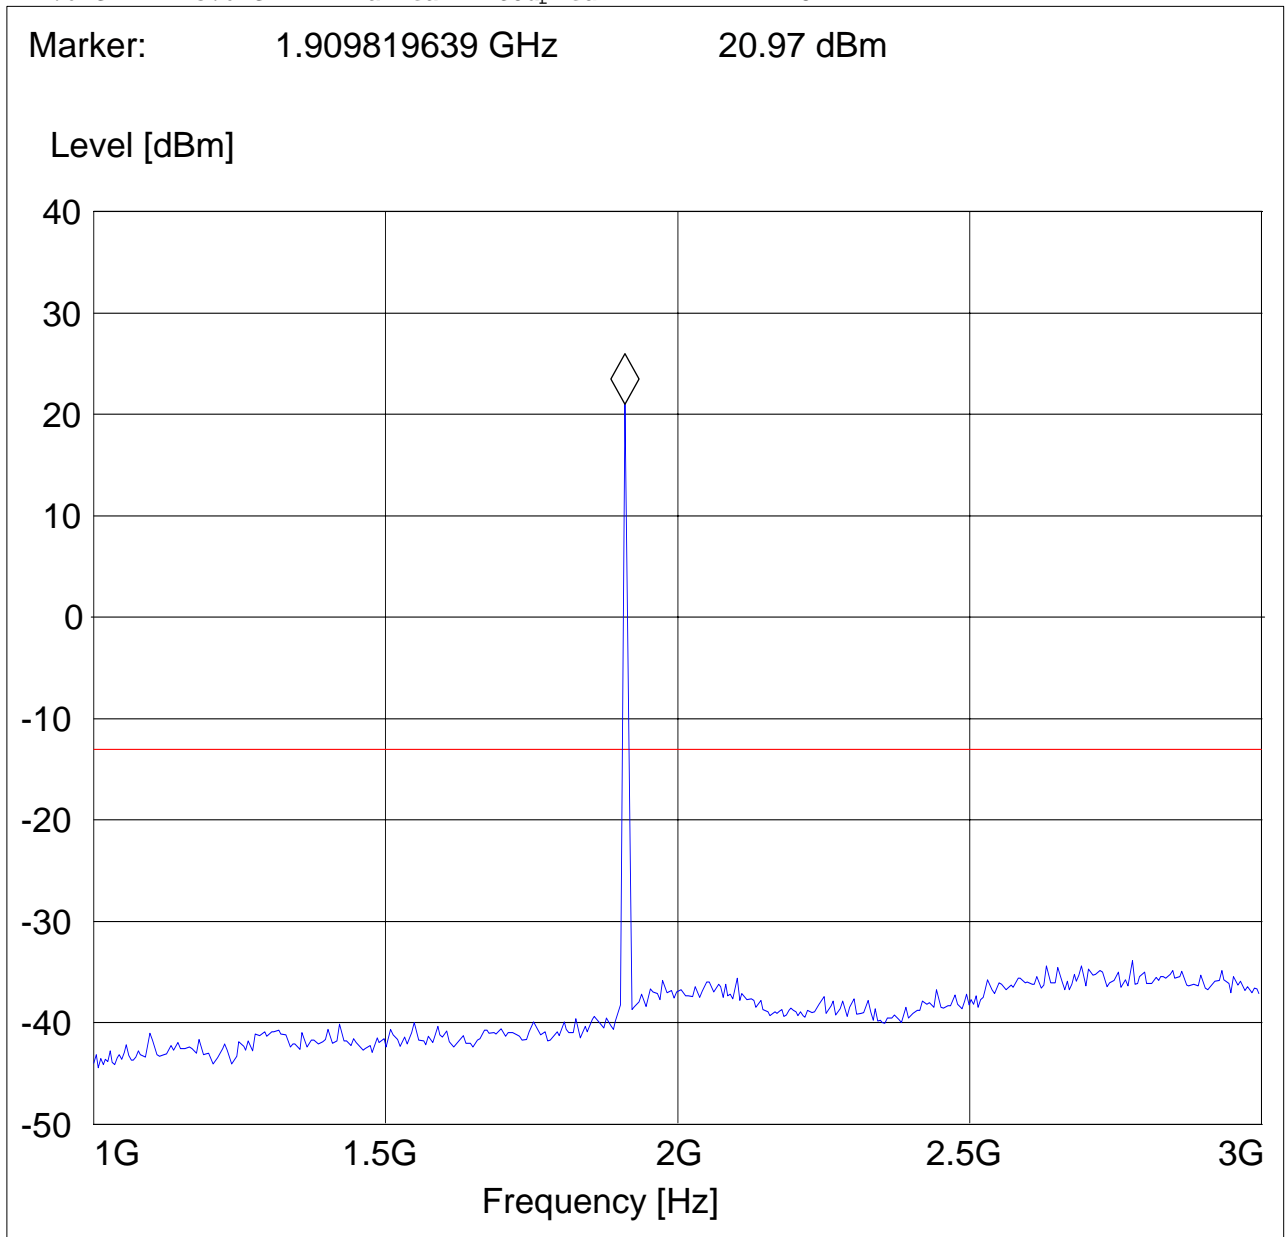




RADIATED SPURIOUS EMISSIONS(PCS 1900) Tx @ 1909.8MHz: 3GHz – 18GHz

EUT: MTSMC-H-U W/ HC25 MODULE
Customer: Multitech
Test Mode: GSM 1900, ch 810
ANT Orientation: H
EUT Orientation: H
Test Engineer: Ed
Power Supply: AC Adapter
Comments:

SWEEP TABLE: "FCC 24Spuri 3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
3.0 GHz	18.0 GHz	Average	Coupled	1 MHz	DUMMY-DBM

Marker: 17.789579158 GHz -51.19 dBm

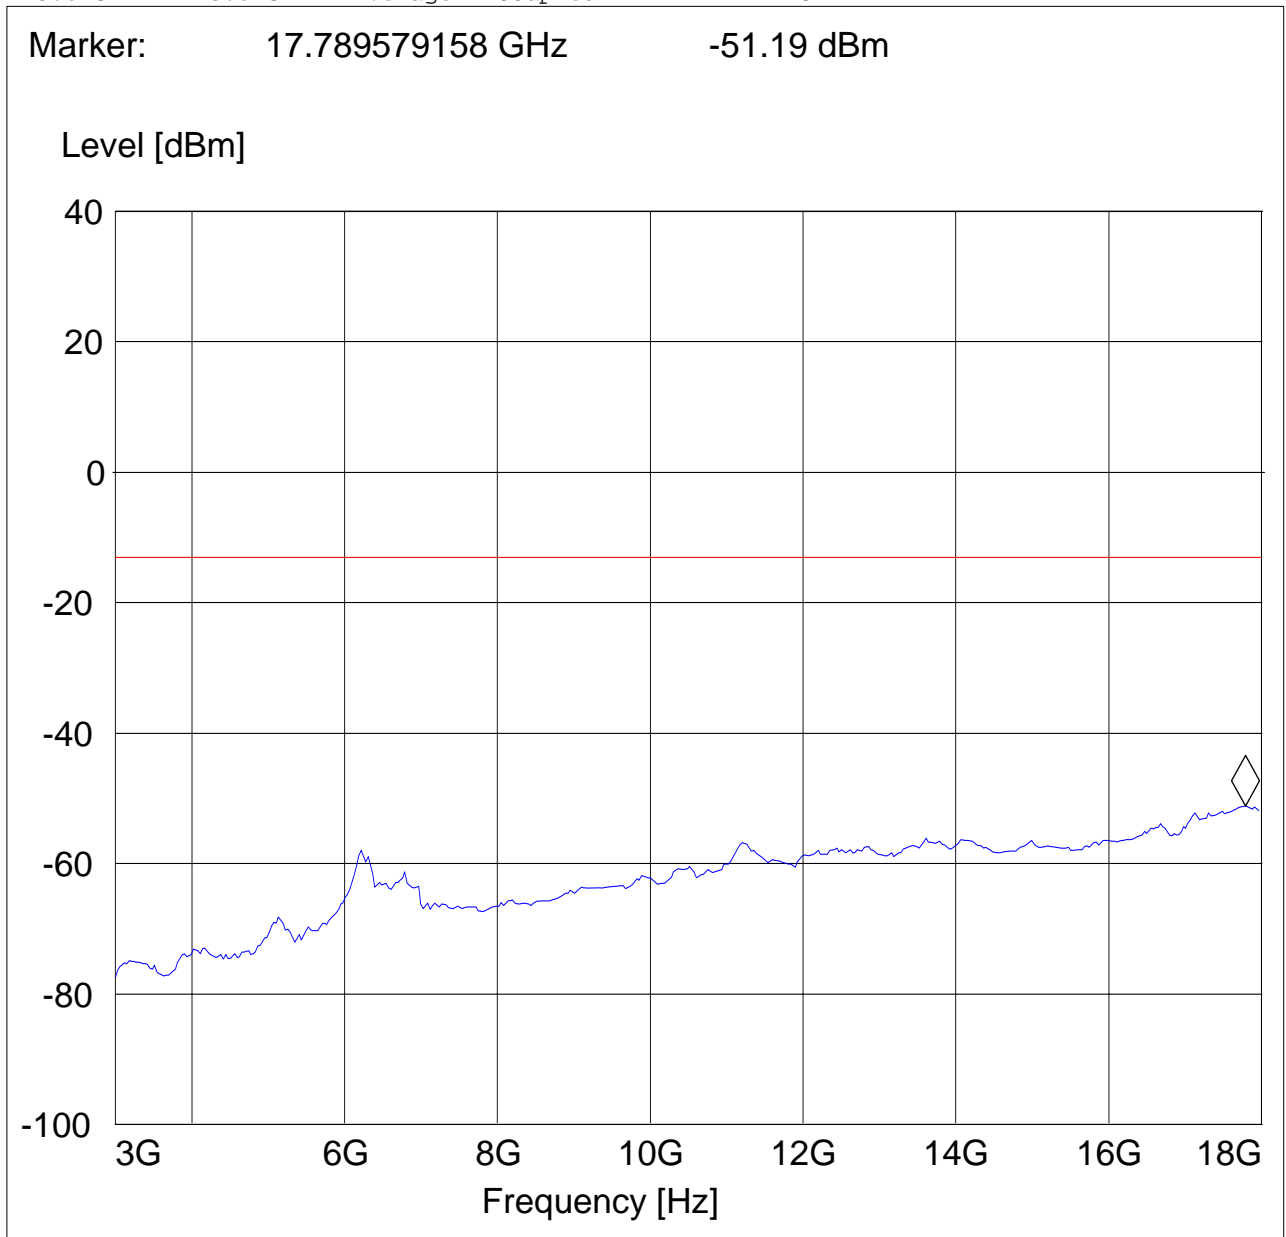



RADIATED SPURIOUS EMISSIONS(PCS 1900) 18GHz – 19.1GHz


Note: This plot is valid for low, mid & high channels (worst-case plot)

EUT: MTSMCHU
 Customer: Multitech
 Test Mode: GPRS1900
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Peter Mu
 Power Supply: AC Power Supply
 Comments:

SWEEP TABLE: "FCC 24spuri 18-19.1G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
18.0 GHz	19.1 GHz	Average	Coupled	1 MHz	DUMMY-DBM

Marker: 18.632665331 GHz -57.71 dBm

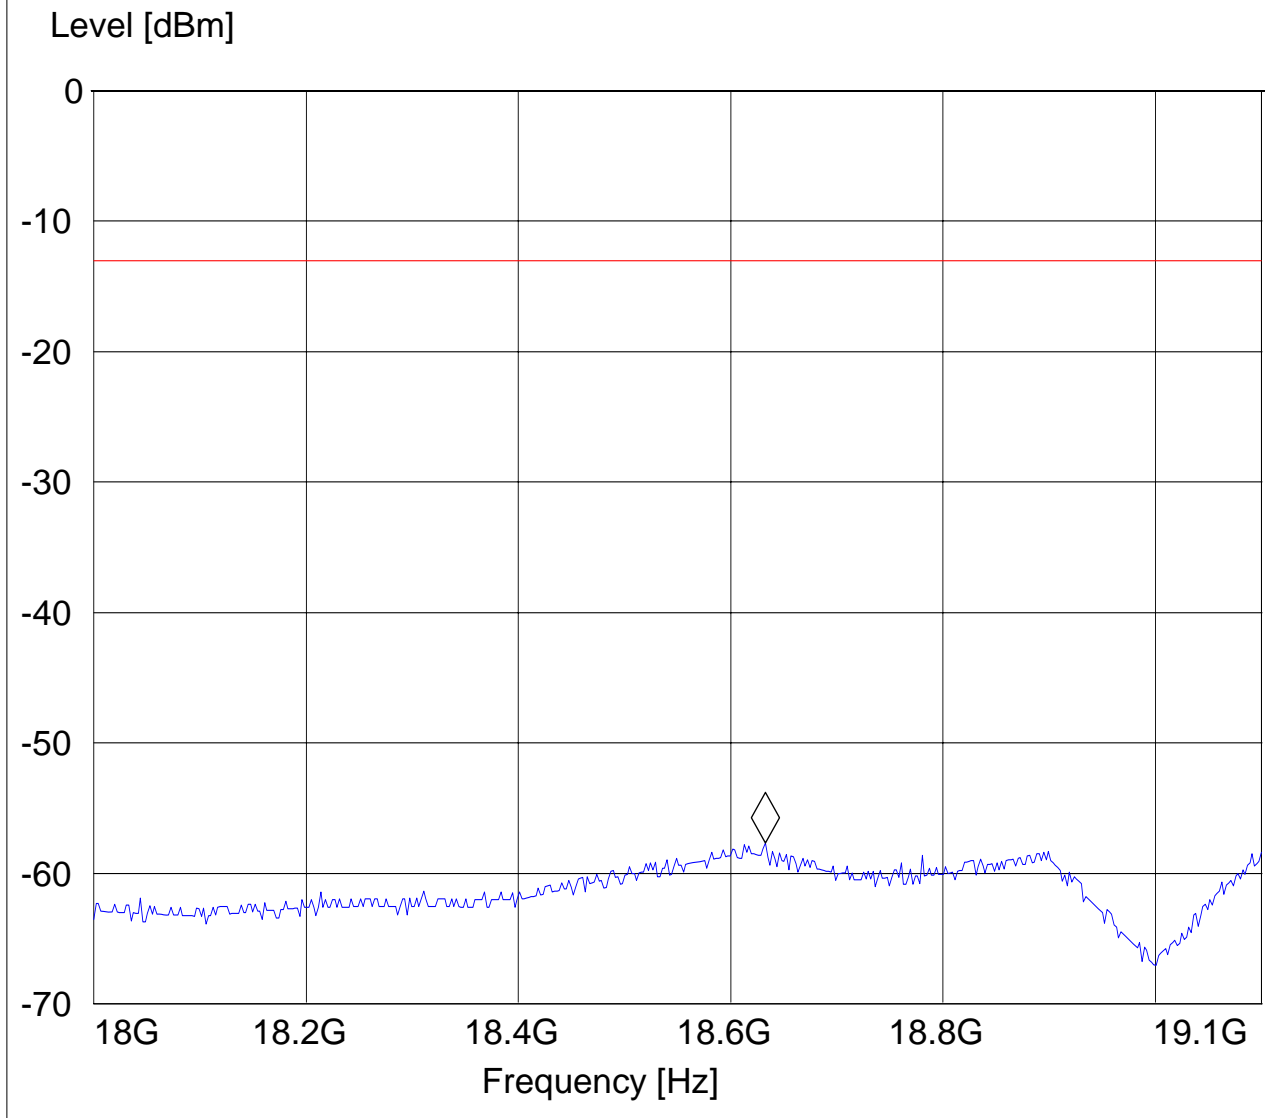



5.5.4.4 RESULTS OF RADIATED SPURIOUS EMISSIONS TESTS (UMTS FDD2):

Harmonics	Tx ch-9262 Freq. (MHz)	Level (dBm)	Tx ch-9400 Freq. (MHz)	Level (dBm)	Tx ch-9538 Freq. (MHz)	Level (dBm)
2	3704.8	NF	3760	NF	3815.2	NF
3	5557.2	NF	5640	NF	5722.8	NF
4	7409.6	NF	7520	NF	7630.4	NF
5	9262	NF	9400	NF	9538	NF
6	11114.4	NF	11280	NF	11445.6	NF
7	12966.8	NF	13160	NF	13353.2	NF
8	14819.2	NF	15040	NF	15260.8	NF
9	16671.6	NF	16920	NF	17168.4	NF
10	18524	NF	18800	NF	19076	NF




RADIATED SPURIOUS EMISSIONS(UMTS FDD2) TX: 30MHz - 1GHz

Antenna: Vertical

EUT: MTSMC-H-U W/ HC25 MODULE
Customer: Multitech
Test Mode: FDDII-CH9400
ANT Orientation: V
EUT Orientation: H
Test Engineer: Ed
Power Supply: AC Adapter
Comments:

SWEEP TABLE: "FCC 24 Spur 30M-1G_V"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

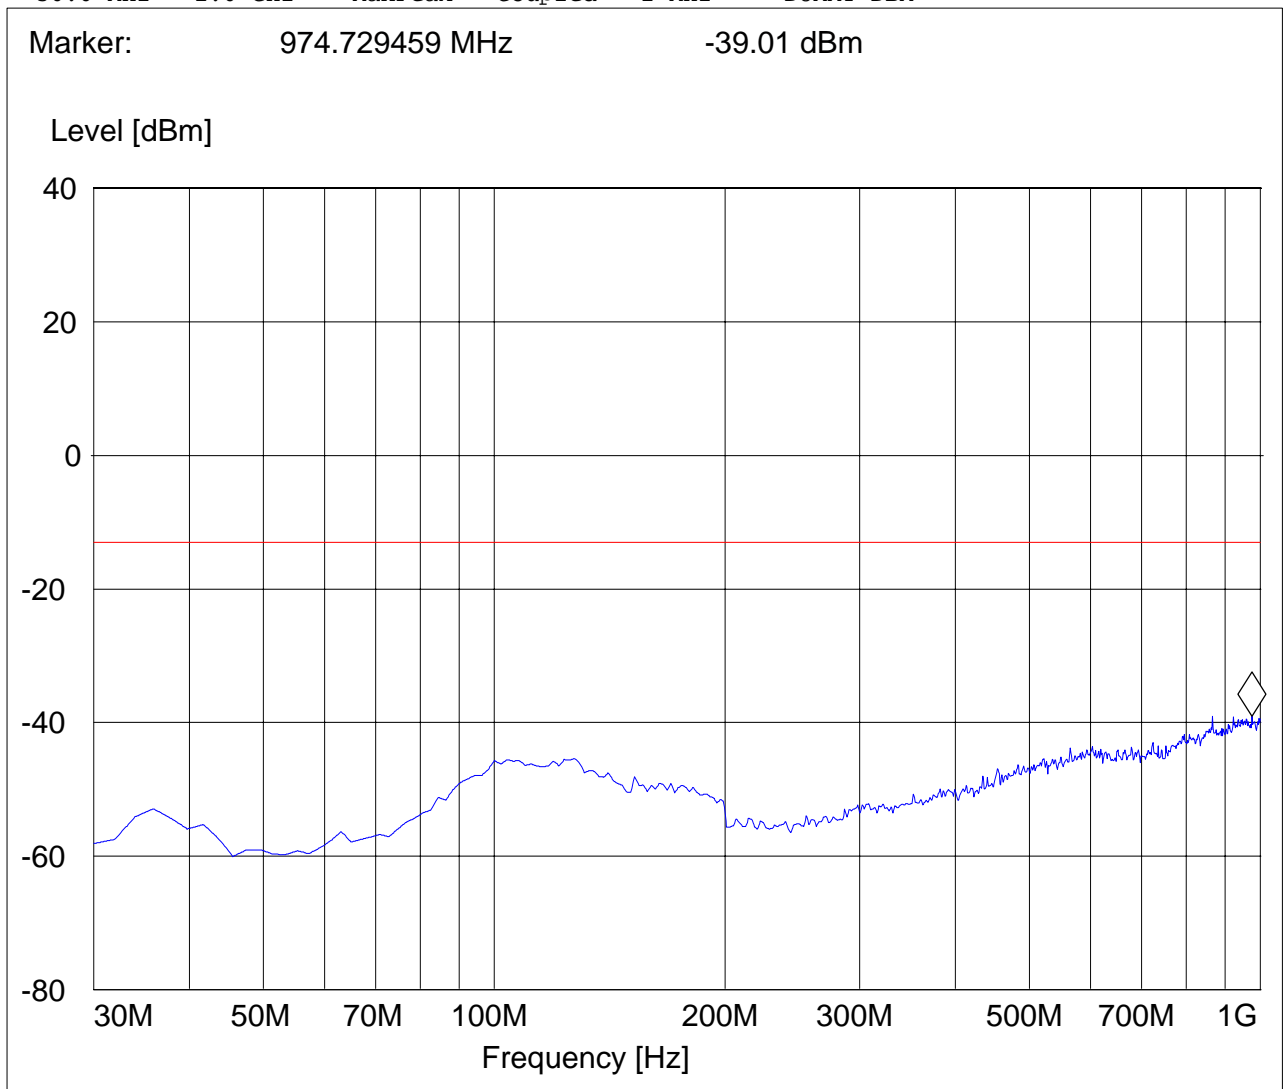




RADIATED SPURIOUS EMISSIONS(UMTS FDD2) TX: 30MHz - 1GHz

Antenna: Horizontal

EUT: MTRSMC-H-U W/ HC25 MODULE
Customer: Multitech
Test Mode: FDDII-CH9400
ANT Orientation: H
EUT Orientation: H
Test Engineer: Ed
Power Supply: AC Adapter
Comments:

SWEEP TABLE: "FCC 24 Spur 30M-1G_H"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	DUMMY-DBM

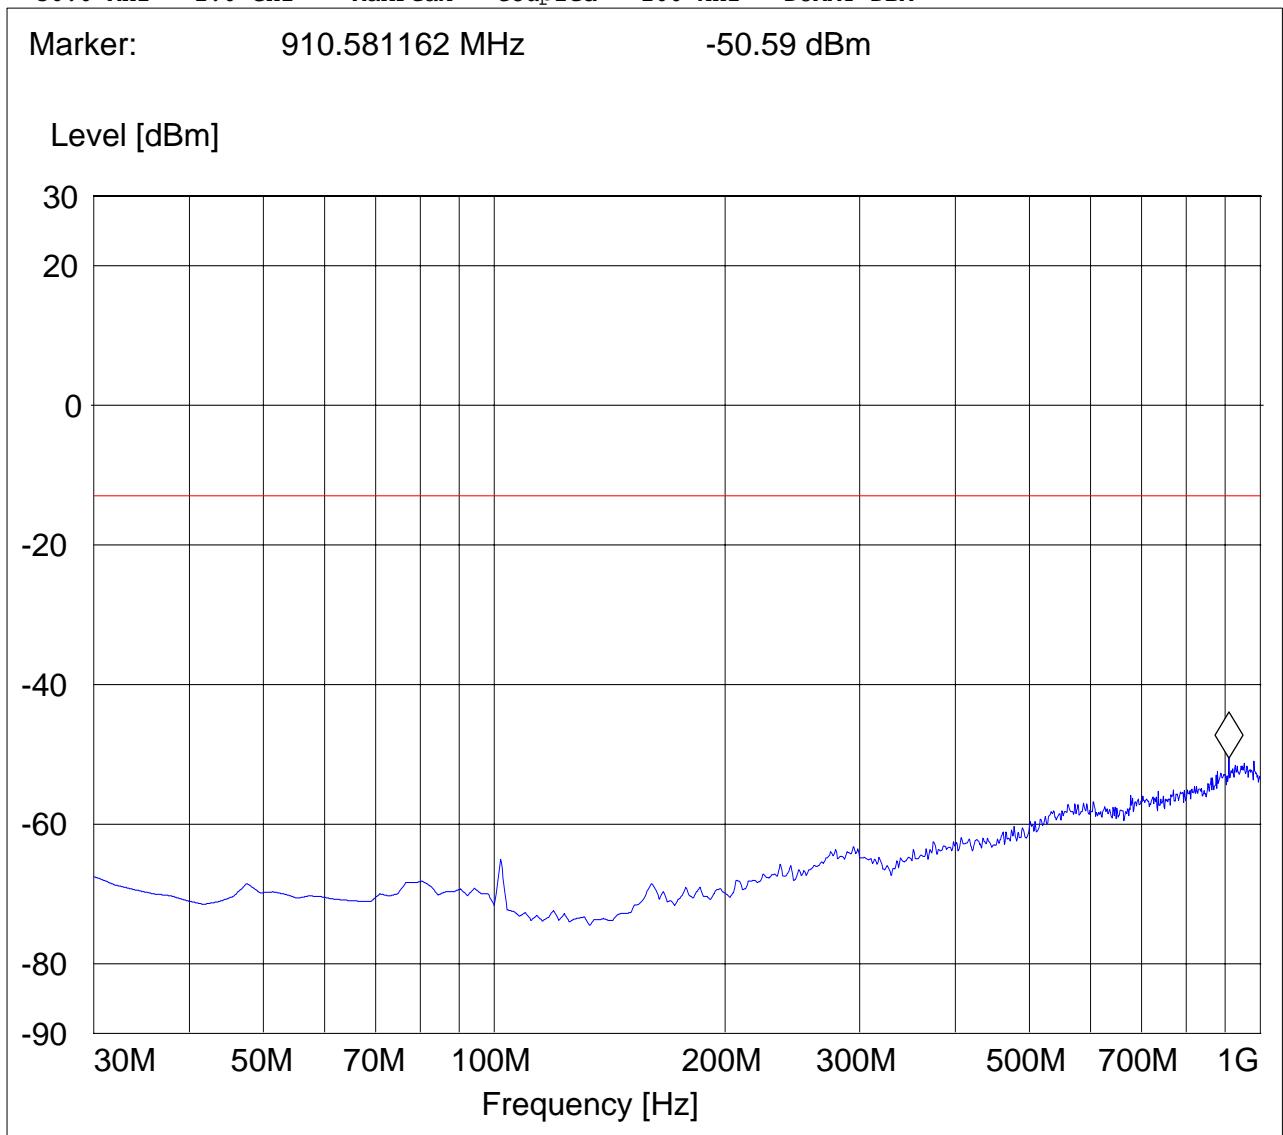




RADIATED SPURIOUS EMISSIONS(UMTS FDD2) Tx @ 1852.4MHz: 1GHz – 3GHz

Note: The peak above the limit line is the carrier freq. at ch-9262.

EUT: MTSMC-H-U W/ HC25 MODULE
 Customer: Multitech
 Test Mode: FDDII-CH9262
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Ed
 Power Supply: AC Adapter
 Comments: marker on the uplink

SWEEP TABLE: "FCC 24Spuri 1-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

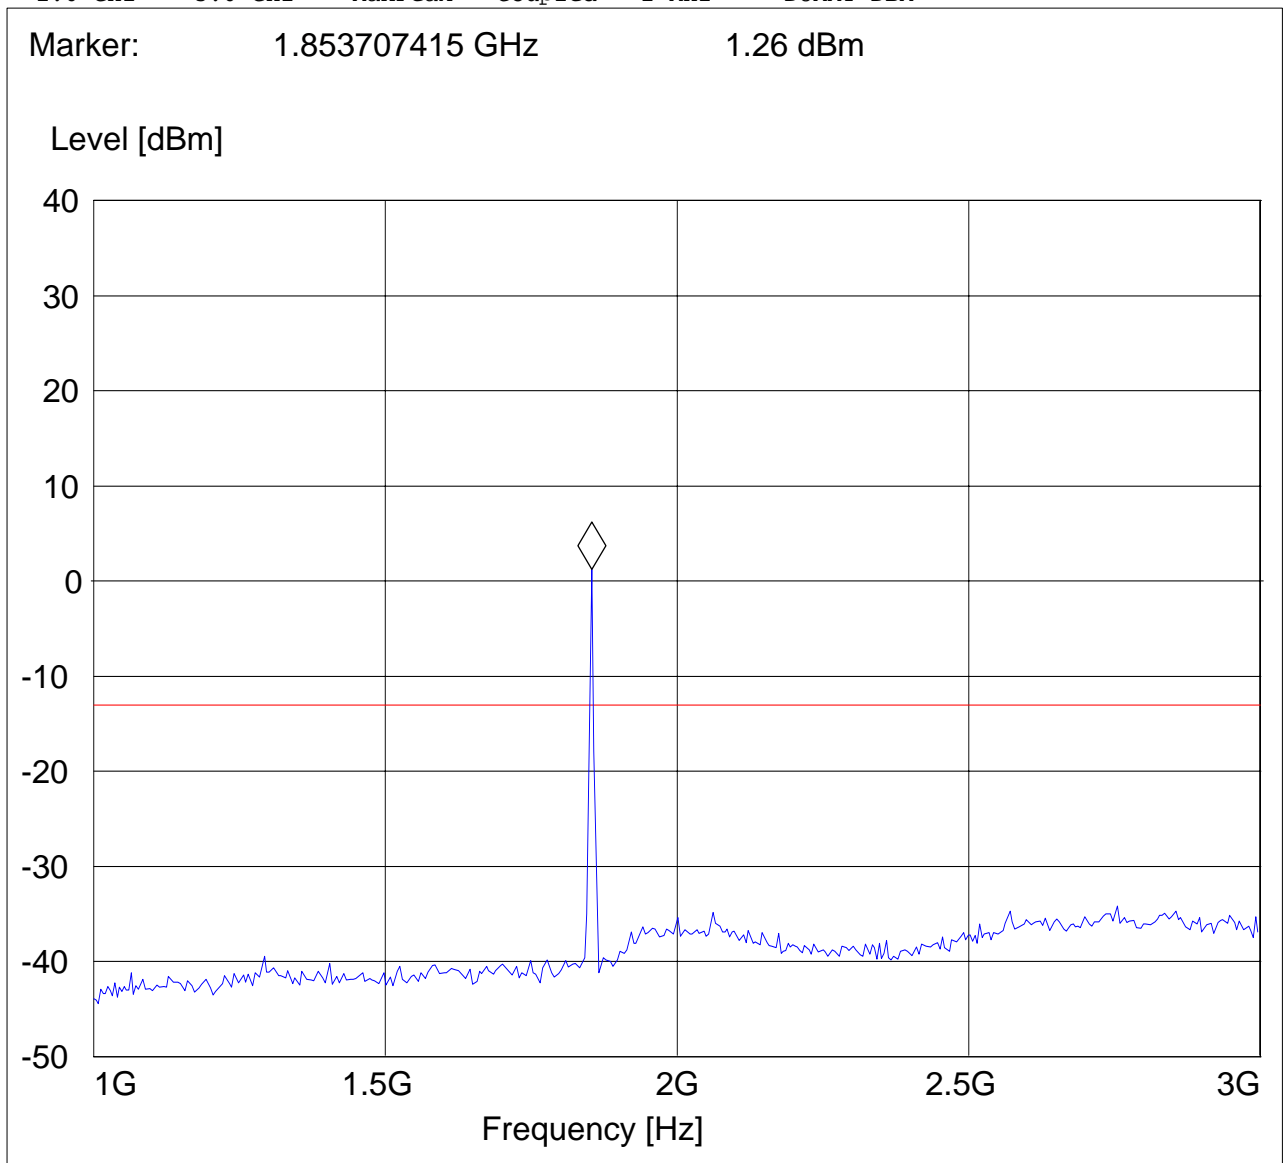




RADIATED SPURIOUS EMISSIONS(UMTS FDD2) Tx @ 1852.4MHz: 3GHz – 18GHz

EUT: MTSMC-H-U W/ HC25 MODULE
 Customer: Multitech
 Test Mode: FDDII-CH9262
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Ed
 Power Supply: AC Adapter
 Comments:

SWEEP TABLE: "FCC 24Spuri 3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
3.0 GHz	18.0 GHz	Average	Coupled	1 MHz	DUMMY-DBM

Marker: 17.789579158 GHz -51.19 dBm

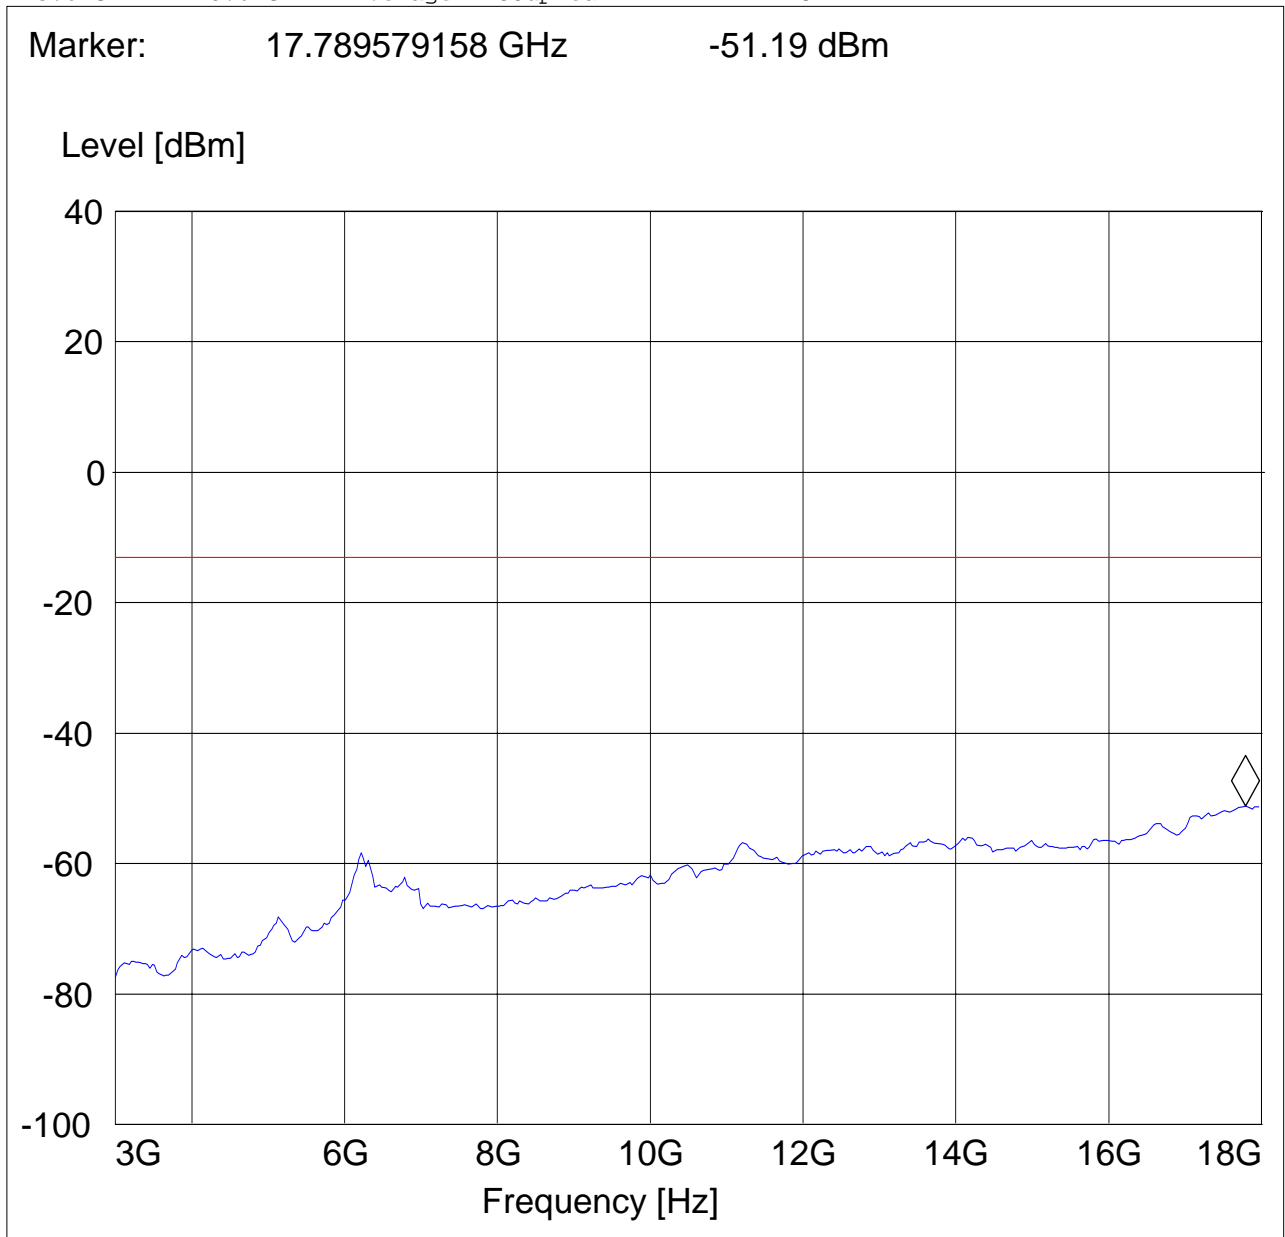




RADIATED SPURIOUS EMISSIONS(UMTS FDD2) Tx @ 1880.0MHz: 1GHz – 3GHz

EUT: MTSMC-H-U W/ HC25 MODULE
Customer: Multitech
Test Mode: FDDII-CH9400
ANT Orientation: H
EUT Orientation: H
Test Engineer: Ed
Power Supply: AC Adapter
Comments: marker on the uplink

SWEEP TABLE: "FCC 24Spuri 1-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

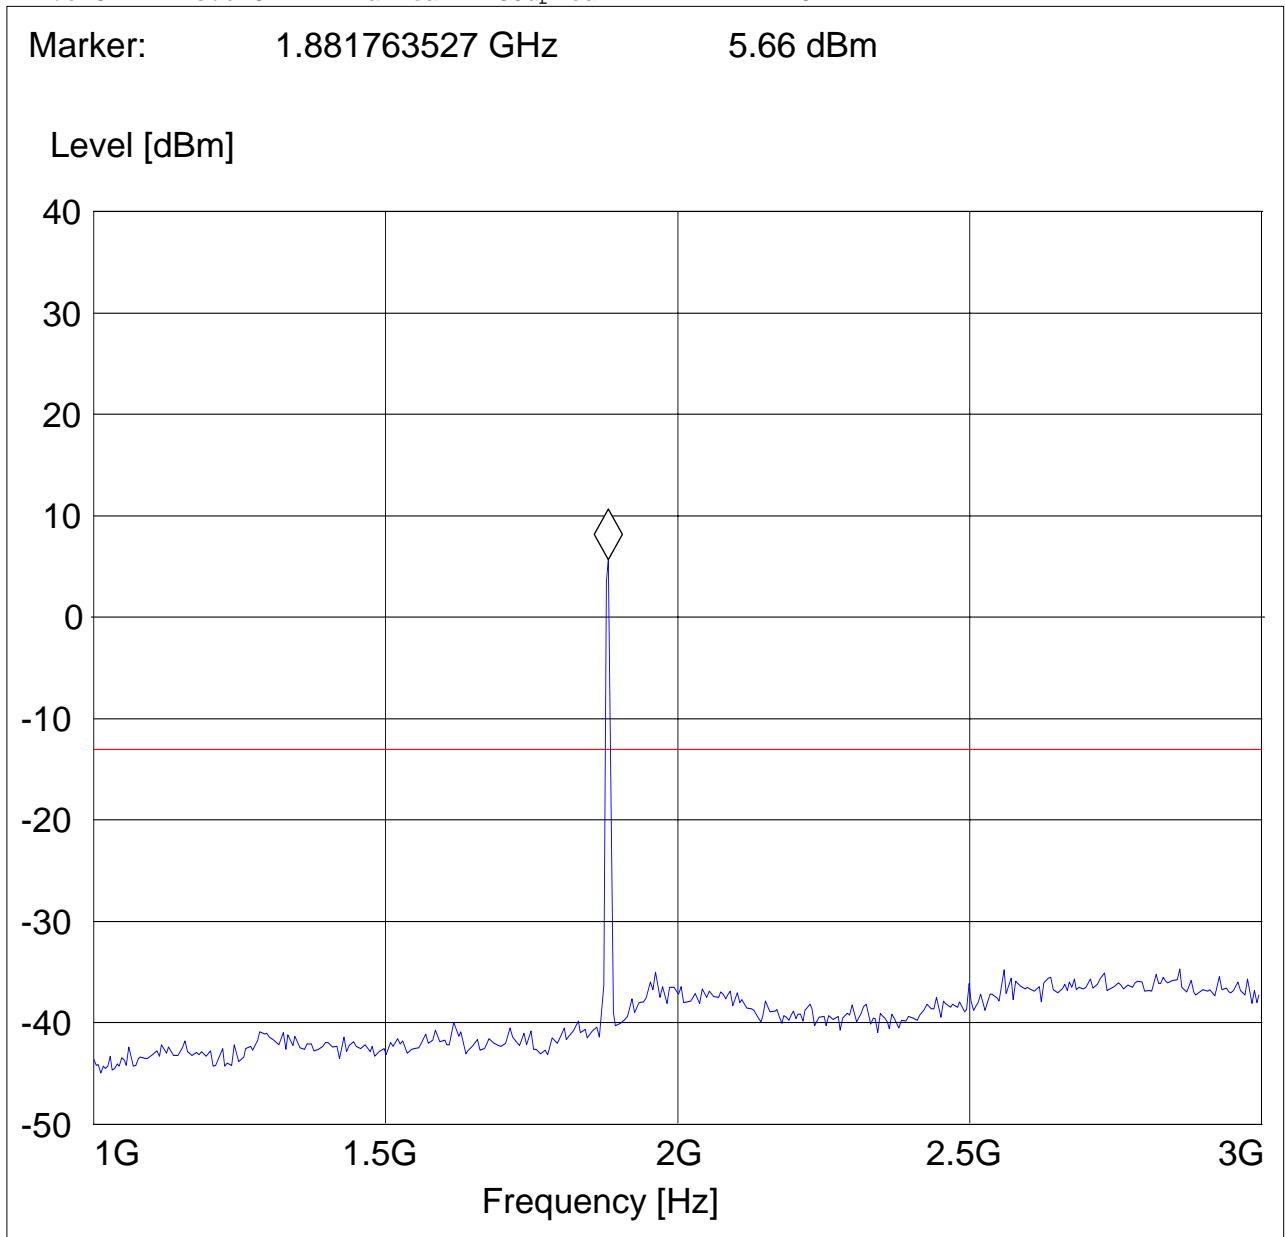




RADIATED SPURIOUS EMISSIONS(UMTS FDD2) Tx @ 1880.0MHz: 3GHz – 18GHz

EUT: MTSMC-H-U W/ HC25 MODULE
 Customer: Multitech
 Test Mode: FDDII-CH9400
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Ed
 Power Supply: AC Adapter
 Comments:

SWEEP TABLE: "FCC 24Spuri 3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
3.0 GHz	18.0 GHz	Average	Coupled	1 MHz	DUMMY-DBM

Marker: 17.699398798 GHz -50.85 dBm

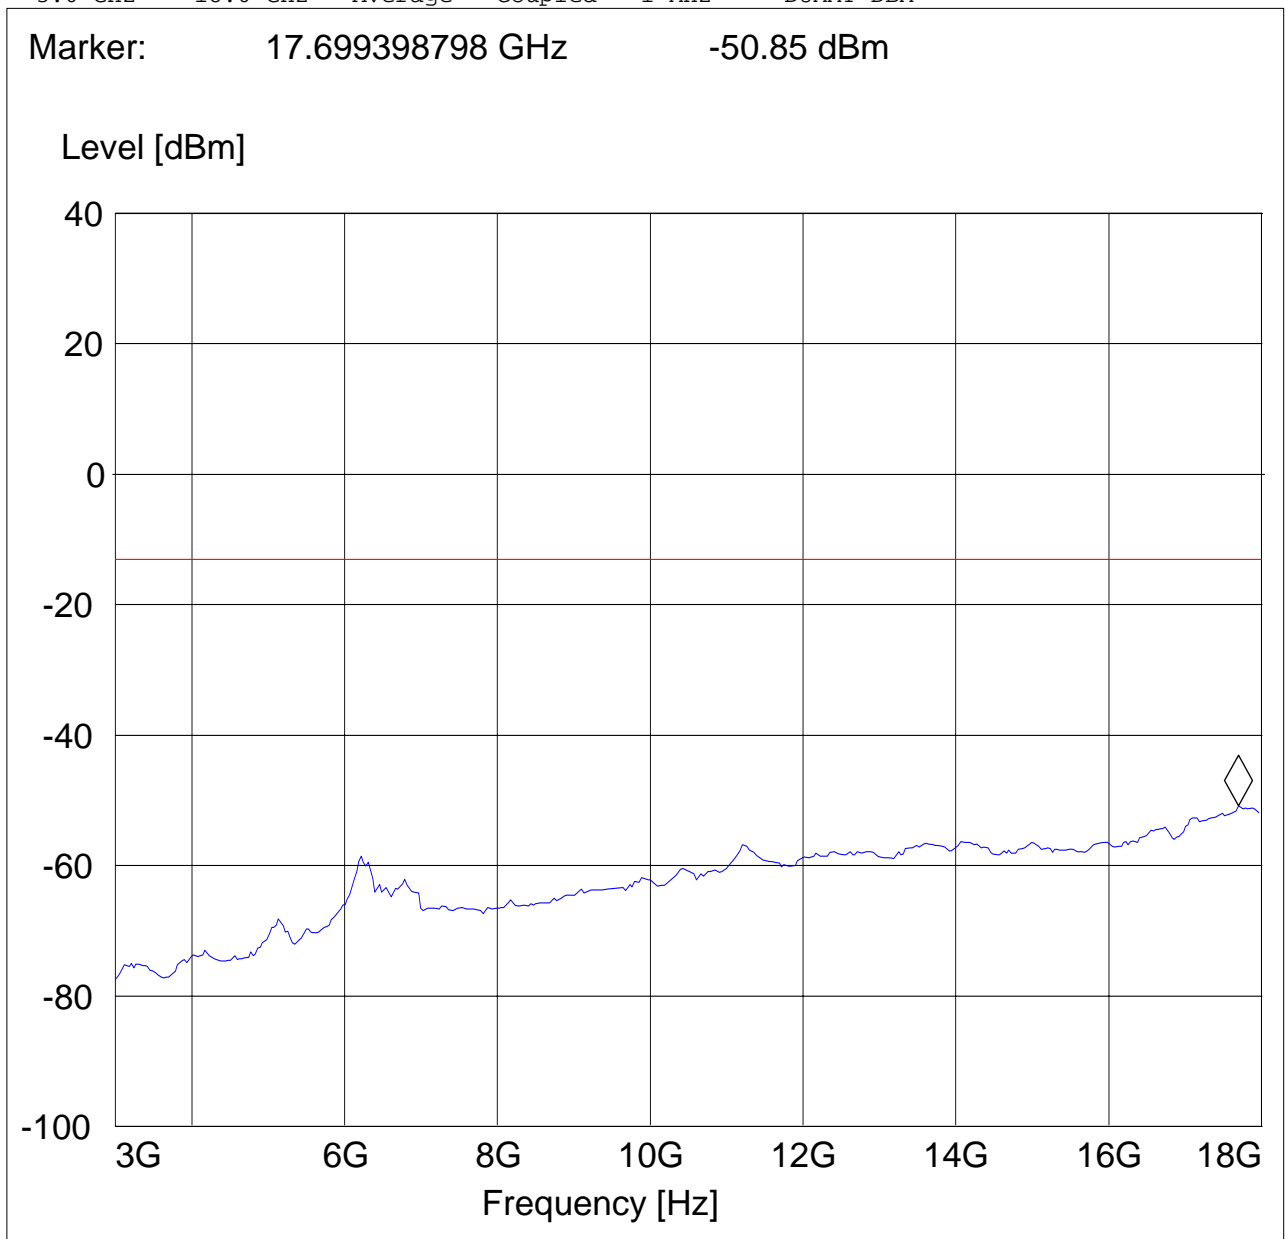




RADIATED SPURIOUS EMISSIONS(UMTS FDD2) Tx @ 1907.6MHz: 1GHz – 3GHz

EUT: MTSMC-H-U W/ HC25 MODULE
 Customer: Multitech
 Test Mode: FDDII-CH9538
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Ed
 Power Supply: AC Adapter
 Comments: marker on the uplink

SWEEP TABLE: "FCC 24Spuri 1-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	DUMMY-DBM

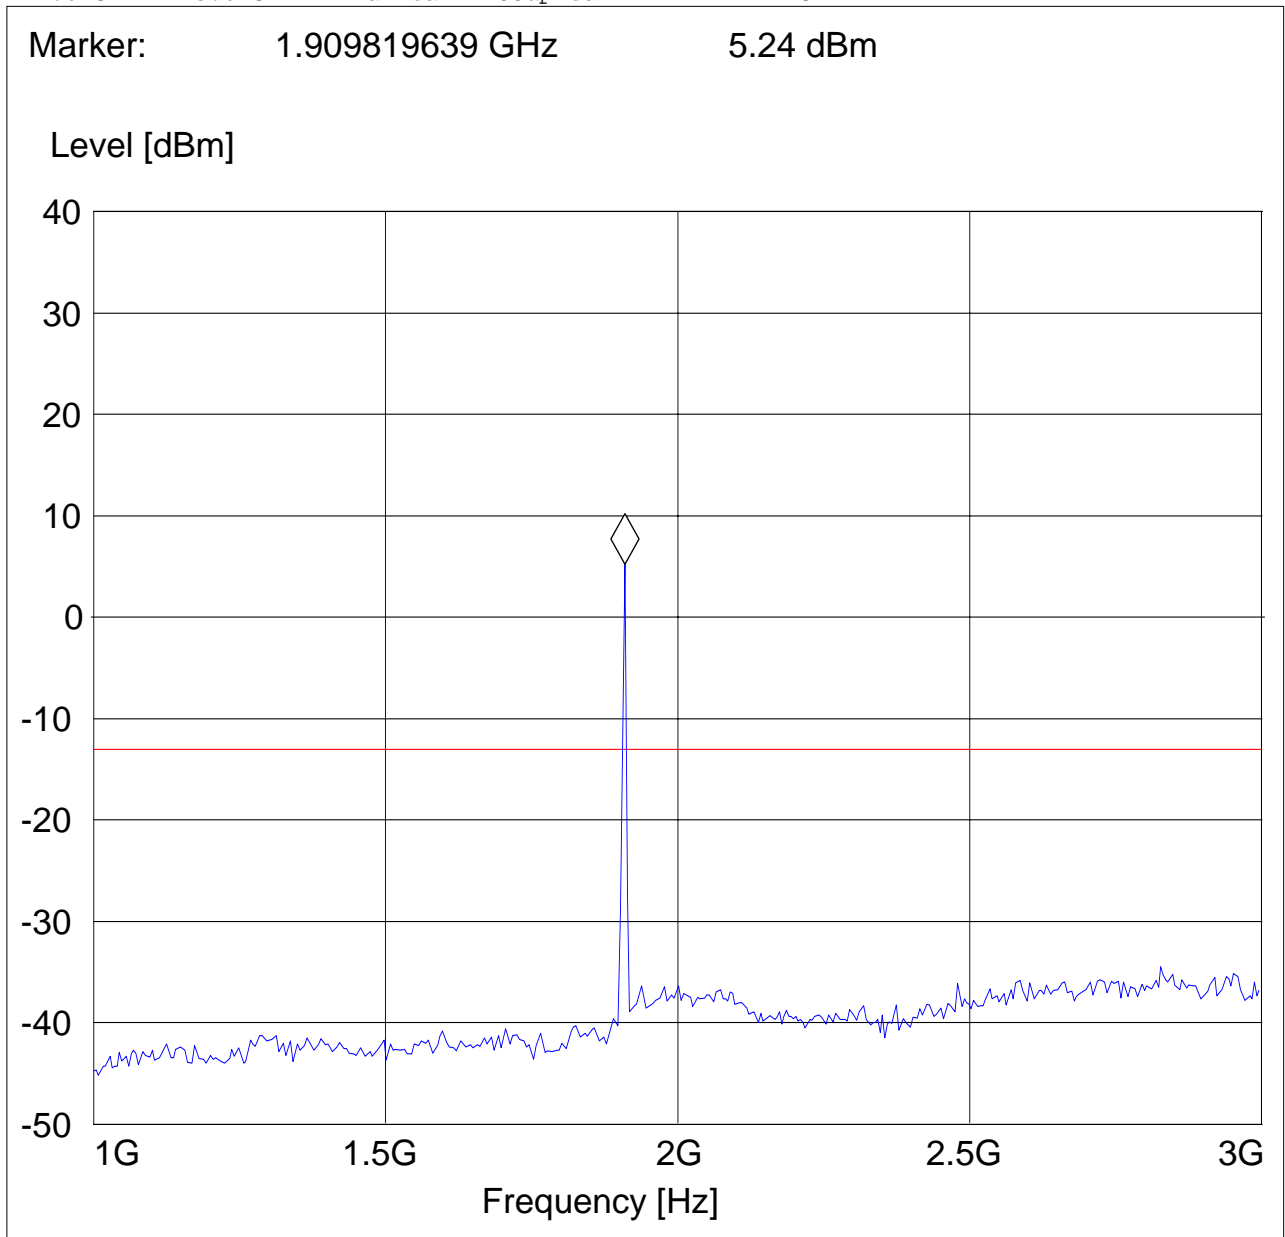




RADIATED SPURIOUS EMISSIONS(UMTS FDD2) Tx @ 1907.6MHz: 3GHz – 18GHz

EUT: MTSMC-H-U W/ HC25 MODULE
 Customer: Multitech
 Test Mode: FDDII-CH9538
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Ed
 Power Supply: AC Adapter
 Comments:

SWEEP TABLE: "FCC 24Spuri 3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
3.0 GHz	18.0 GHz	Average	Coupled	1 MHz	DUMMY-DBM

Marker: 17.789579158 GHz -51.19 dBm

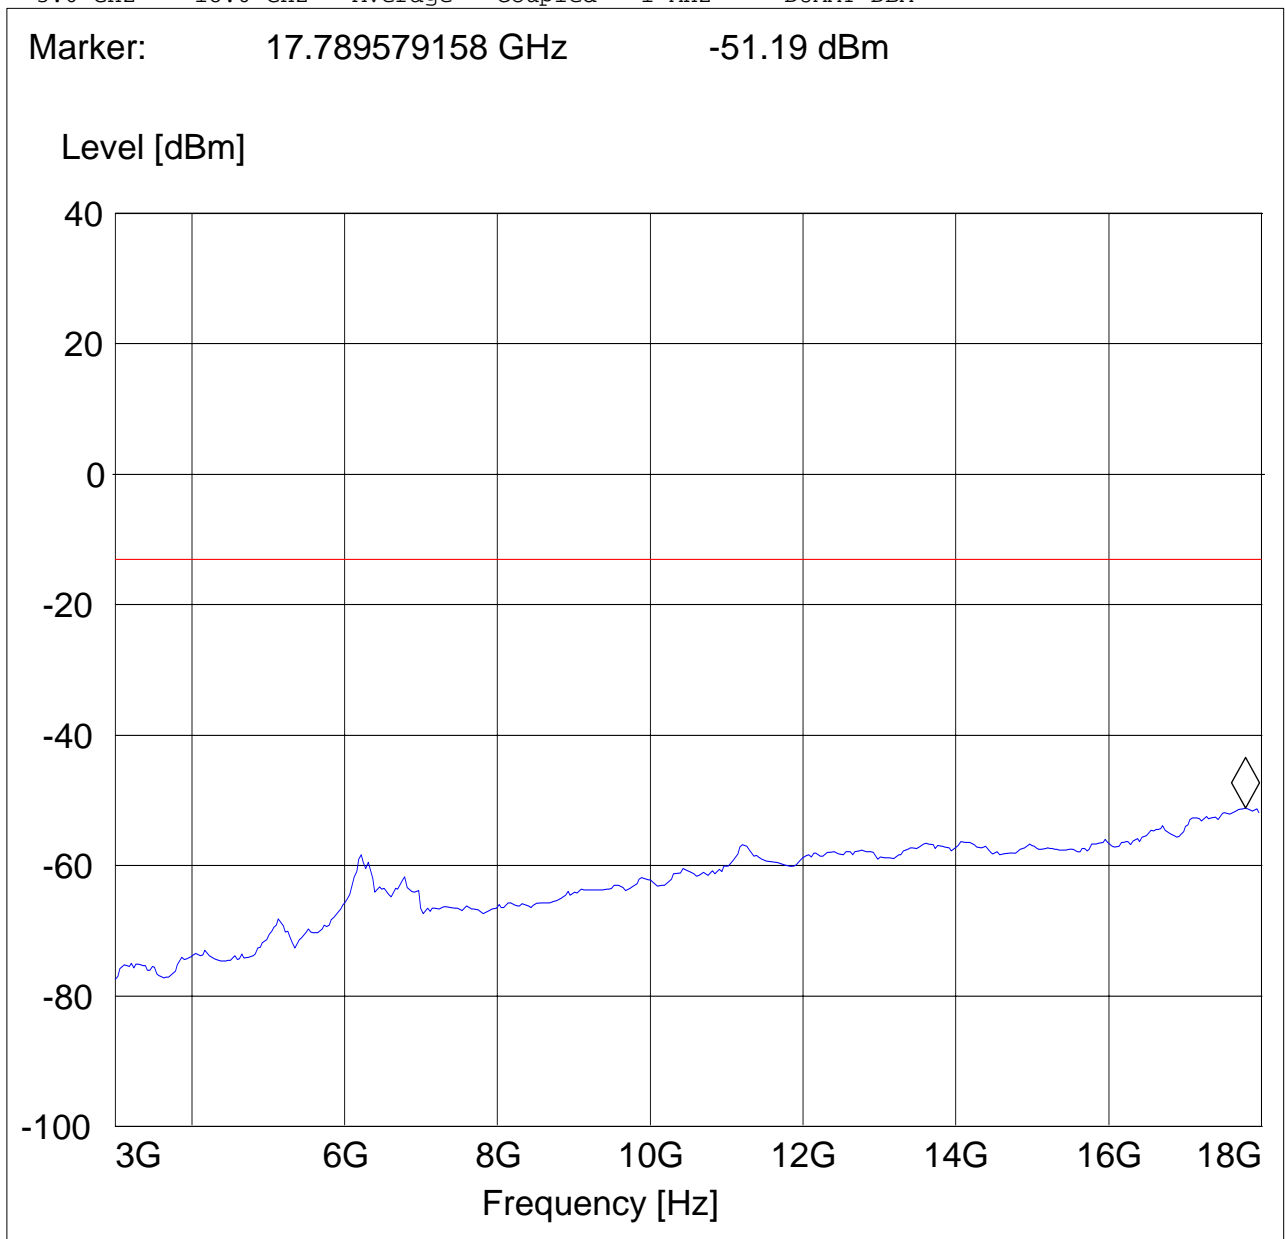



RADIATED SPURIOUS EMISSIONS(UMTS FDD2) 18GHz – 19.1GHz


Note: This plot is valid for low, mid & high channels (worst-case plot)

EUT: MTSMC-H-U W/ HC25 MODULE
Customer: Multitech
Test Mode: FDDII-CH9400
ANT Orientation: H
EUT Orientation: H
Test Engineer: Ed
Power Supply: AC Adapter
Comments:

SWEEP TABLE: "FCC 24spuri 18-19.1G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
18.0 GHz	19.1 GHz	Average	Coupled	1 MHz	DUMMY-DBM

Marker: 18.575350701 GHz -50.96 dBm

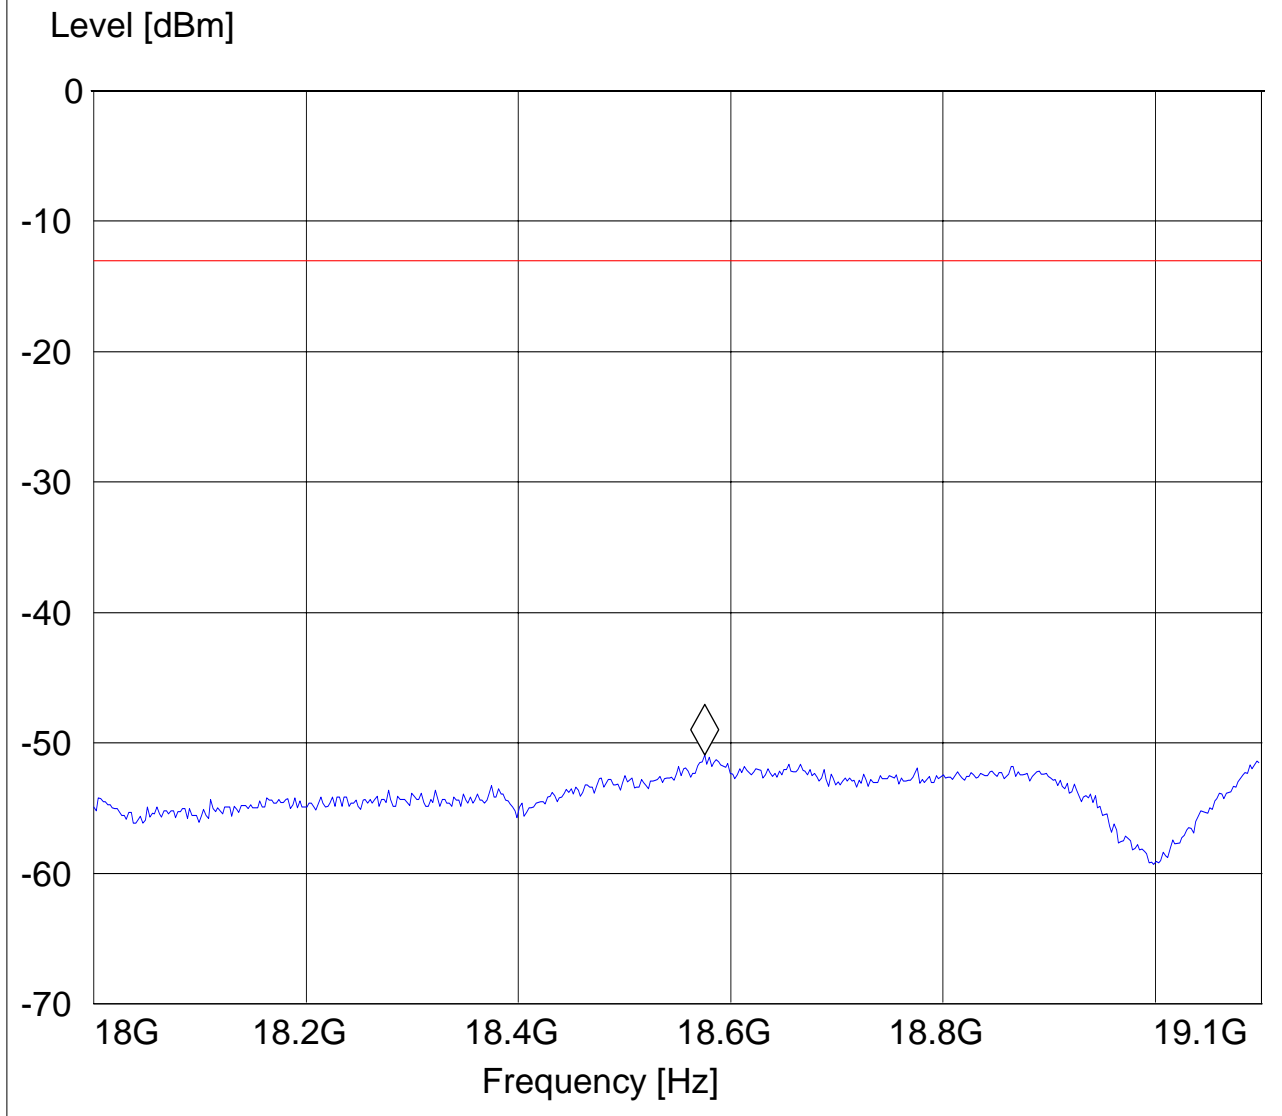



5.5.5 RECEIVER RADIATED EMISSIONS § 2.1053 / RSS-132 & 133

NOTE:

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3GHz and 26.5GHz very short cable connections to the antenna was used to minimize the noise level.

Limits		SUBCLAUSE § RSS-133
Frequency (MHz)	Field strength ($\mu\text{V}/\text{m}$)	Measurement distance (m)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

5.5.5.1 Test Results

No significant emissions measurable. Plots reported here represent the worse case emission for all bands.




RECEIVER SPURIOUS EMISSION 30M-1GHz, Antenna Vertical

Note: This plot is for high, mid, and low channel for both GSM850 and UMTS FDD5 bands.

EUT: MTSMCHU
 Customer: Multitech
 Test Mode: UMTS FDD5
 ANT Orientation: v
 EUT Orientation: H
 Test Engineer: Peter Mu
 Power Supply: AC Power Supply
 Comments:

SWEEP TABLE: "CANADA RE_30M-1G_Ver"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Vert

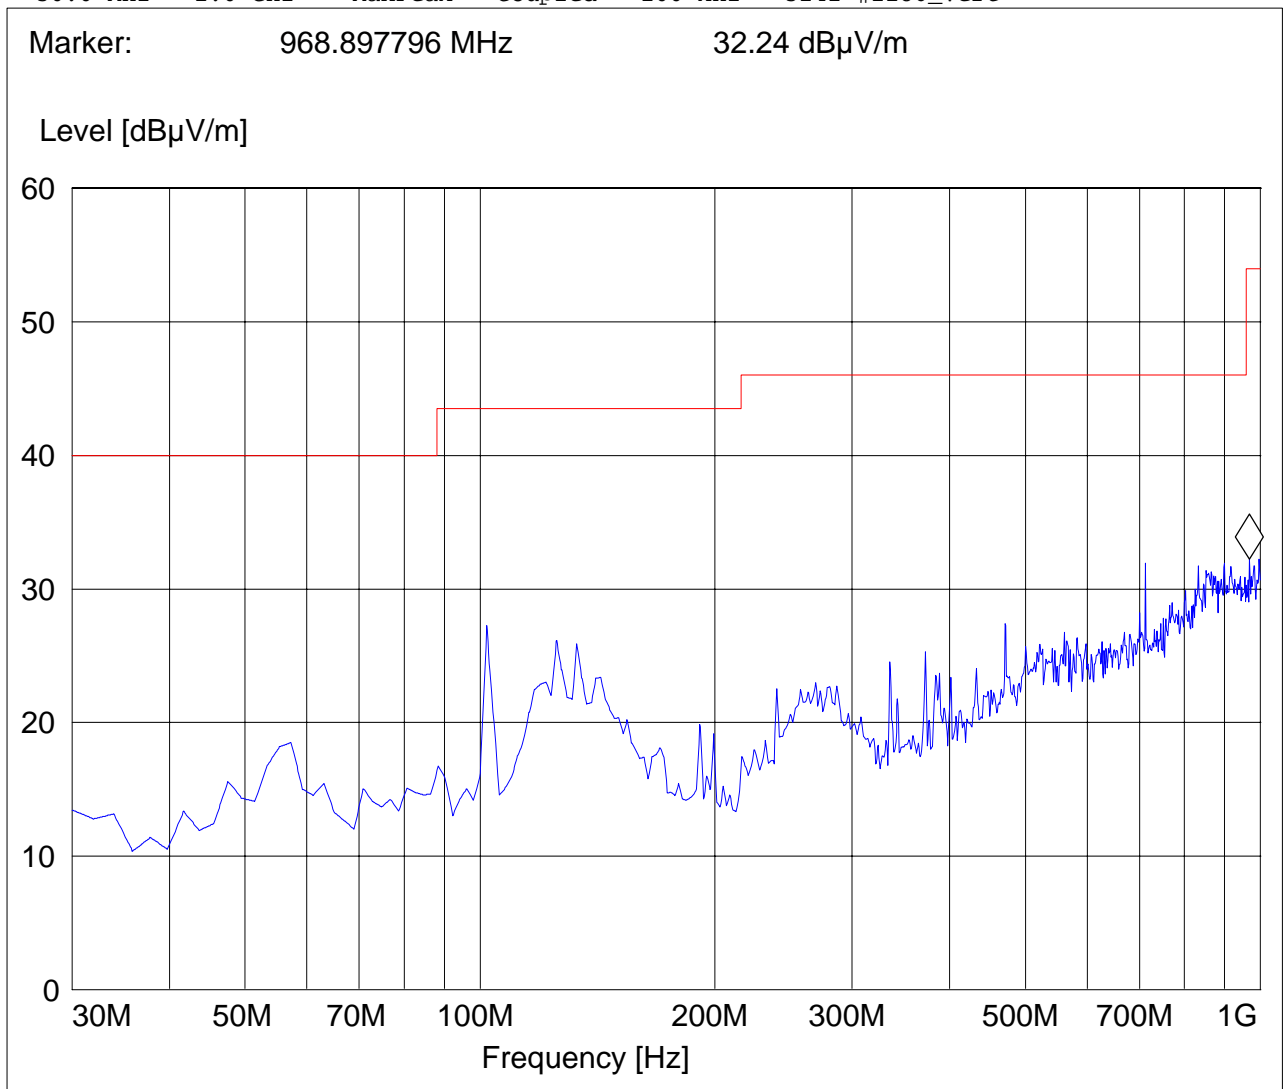




RECEIVER SPURIOUS EMISSION 30M-1GHz, Antenna Horizontal

Note: This plot is for high, mid, and low channel for both GSM850 and UMTS FDDV bands.

EUT: MTSMCHU
 Customer: Multitech
 Test Mode: UMTS FDD5
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Peter Mu
 Power Supply: AC Power Supply
 Comments:

SWEEP TABLE: "CANADA RE_30M-1G_Ver"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Vert

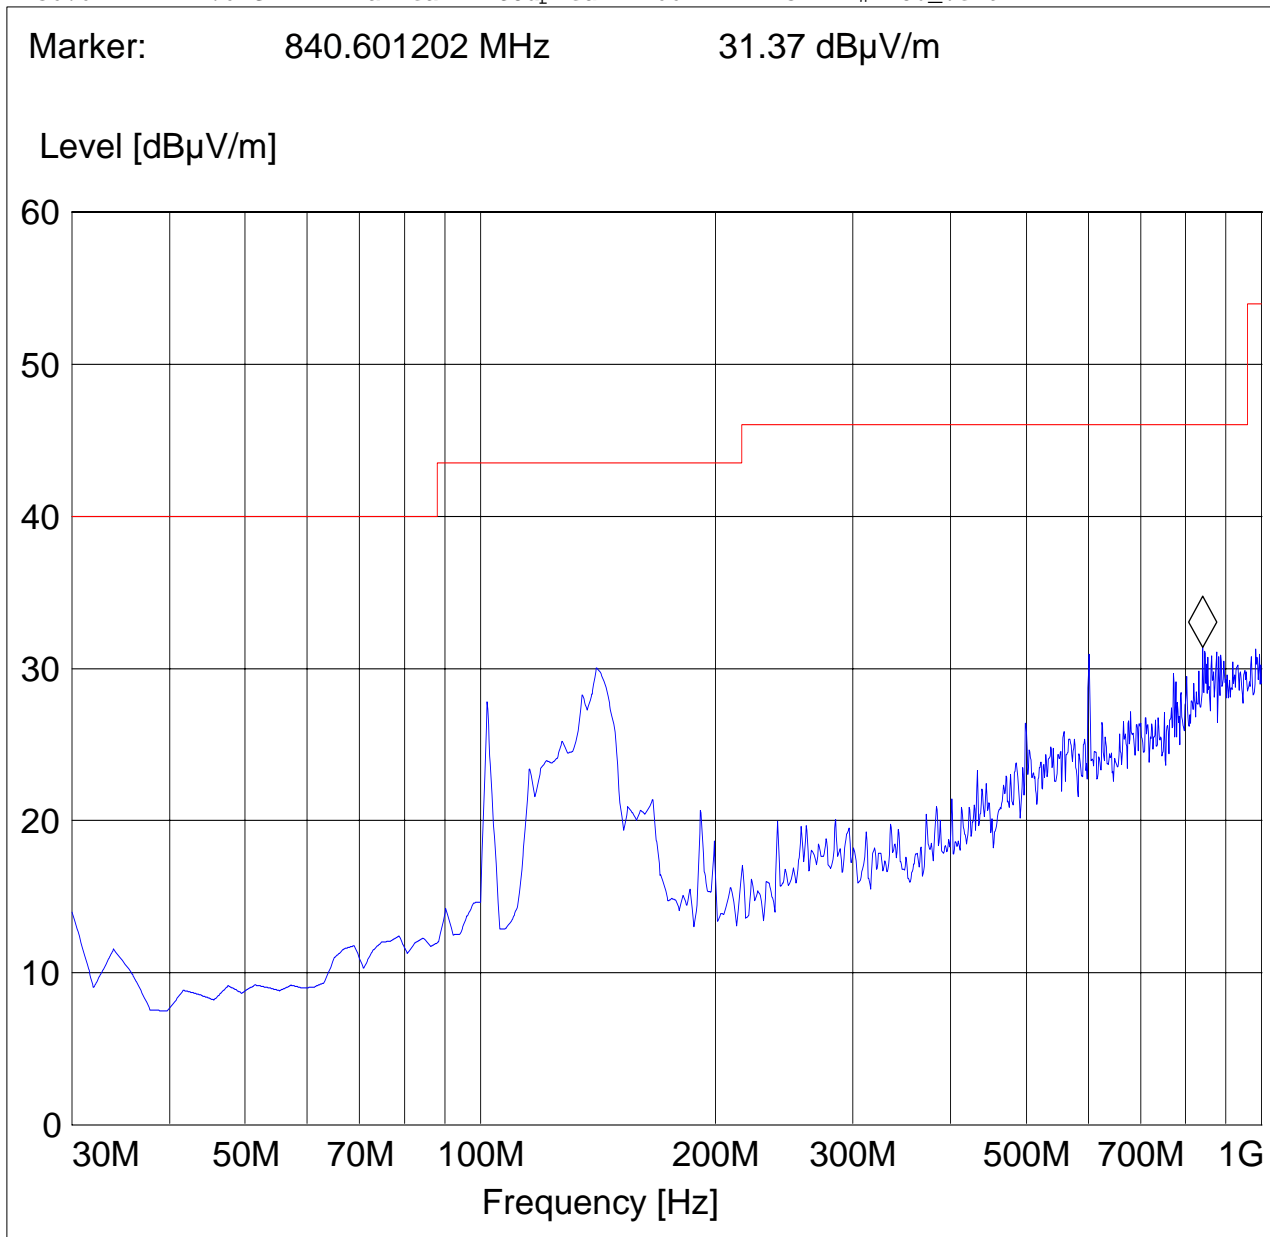




RECEIVER SPURIOUS EMISSION 1-18GHz

EUT / Description: MTSMCHU
Manufacturer: Multitech
Test mode: idel
ANT Orientation: : H
EUT Orientation:: H
Test Engineer: Peter Mu
Voltage: AC Power Supply
Comments::

SWEEP TABLE: "CANADA RE_1-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

Marker: 17.182364729 GHz 39.39 dBµV/m

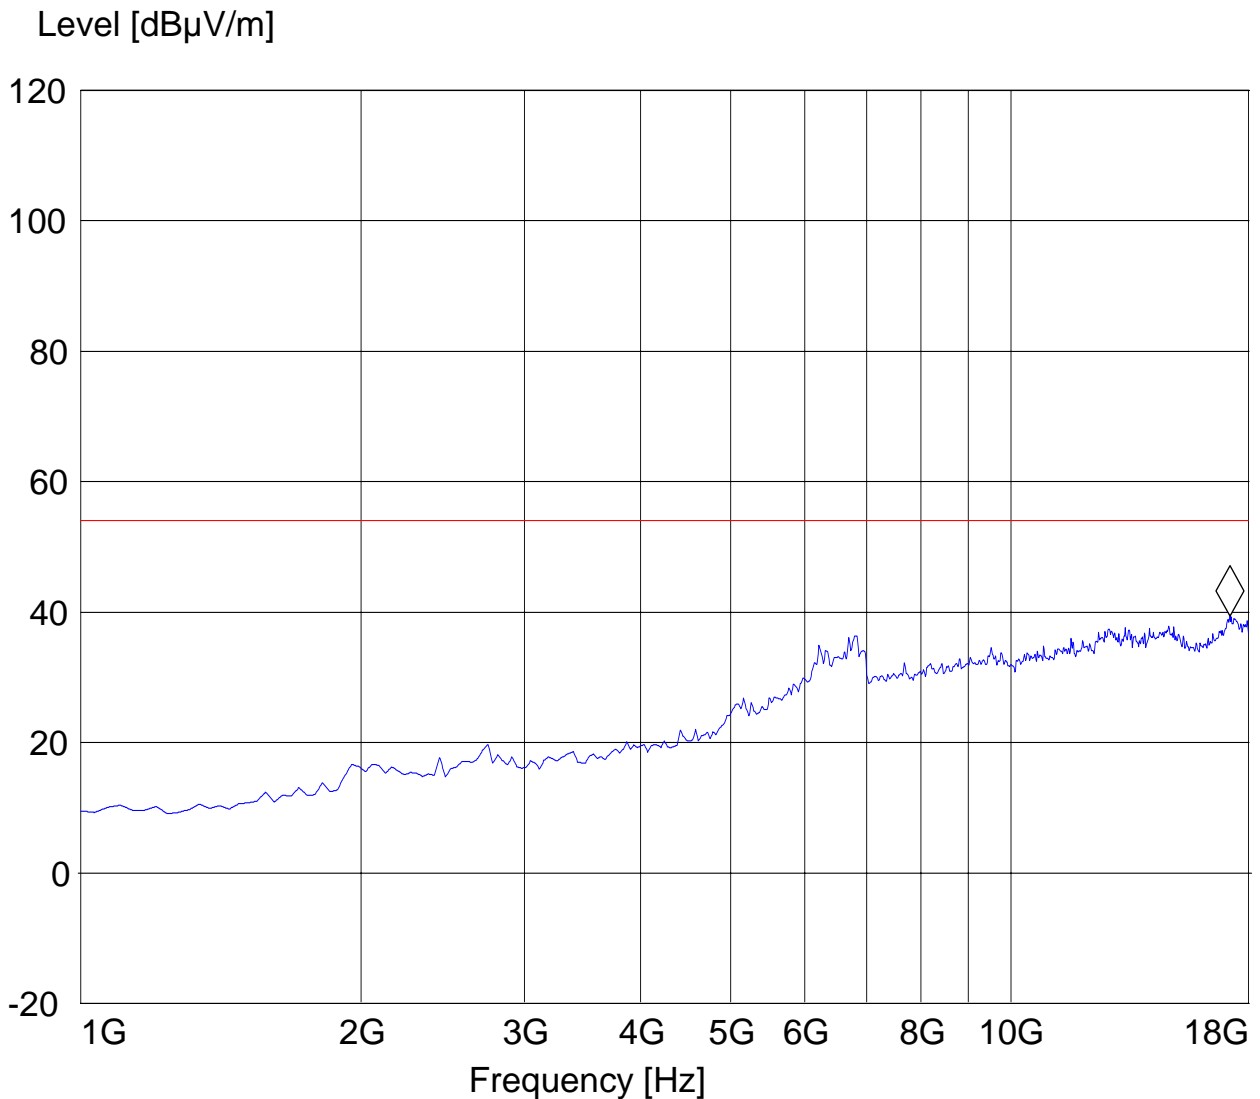




RECEIVER SPURIOUS EMISSION 30-1GHz, Antenna Vertical

Note: This plot is for high, mid, and low channel for both GSM1900 and UMTS FDD2 bands.

EUT: MTSMCHU
Customer: Multitech
Test Mode: GPRS1900
ANT Orientation: v
EUT Orientation: H
Test Engineer: Peter Mu
Power Supply: AC Power Supply
Comments:

SWEEP TABLE: "CANADA RE_30M-1G_Ver"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Vert

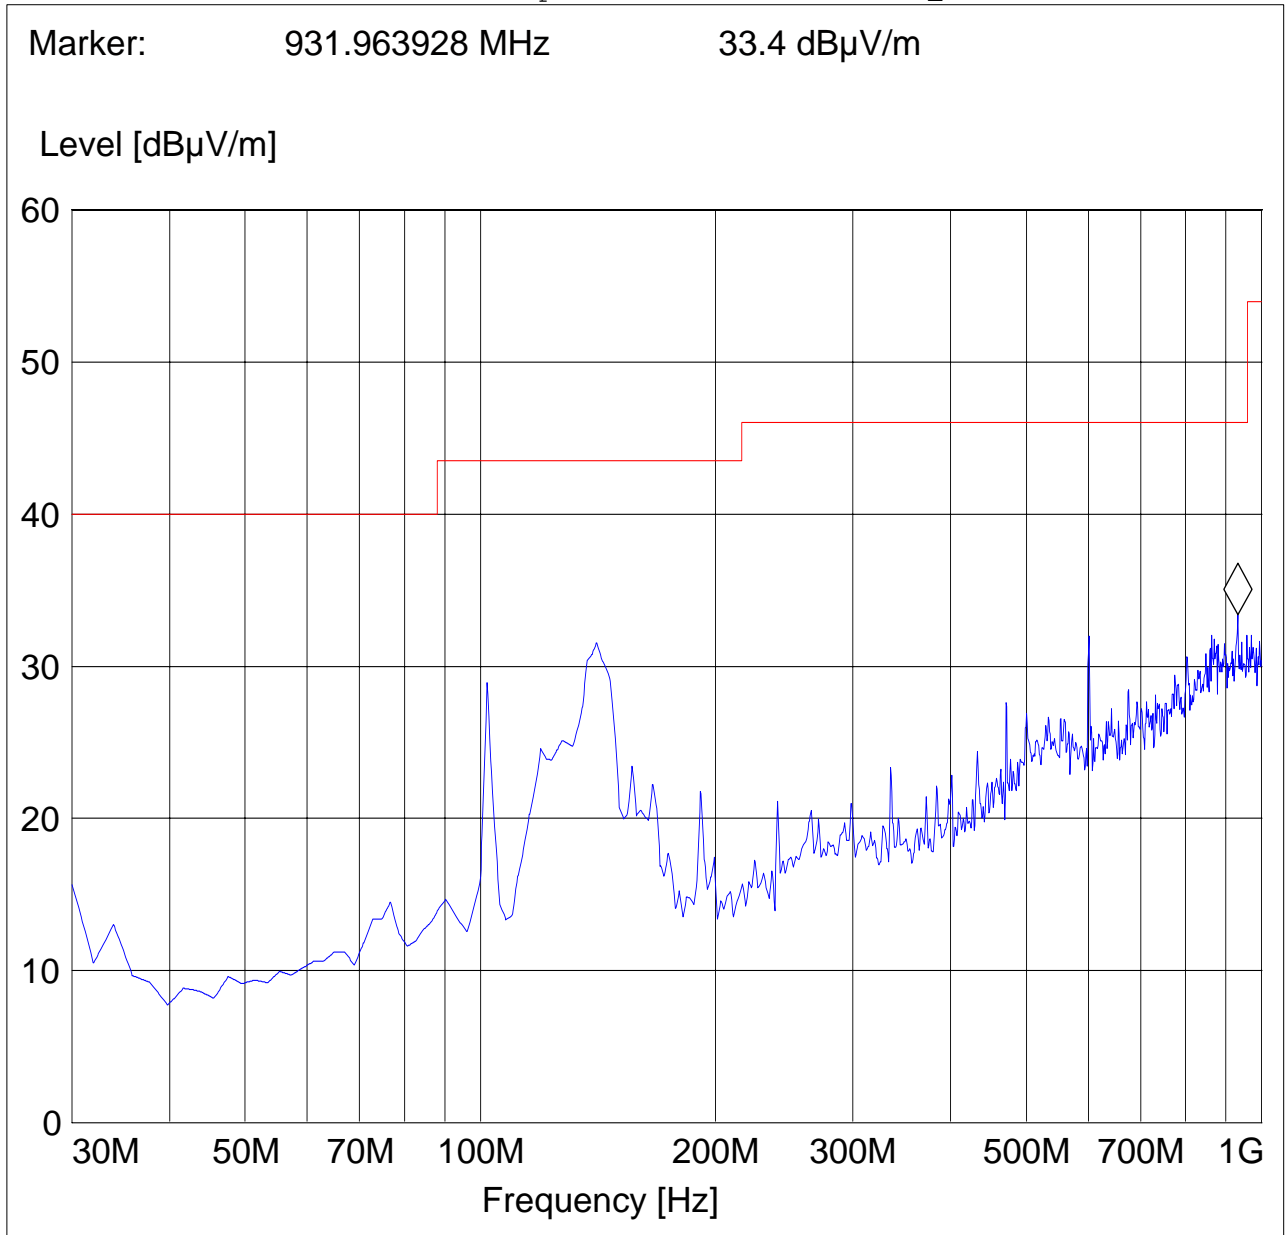



RECEIVER SPURIOUS EMISSION 30-1GHz, Antenna Horizontal


Note: This plot is for high, mid, and low channel for both GSM1900 and UMTS FDD2 bands.

EUT: MTSMCHU
Customer: Multitech
Test Mode: GPRS1900
ANT Orientation: H
EUT Orientation: H
Test Engineer: Peter Mu
Power Supply: AC Power Supply

Comments:

SWEEP TABLE: "CANADA RE_30M-1G_Hor"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Horz

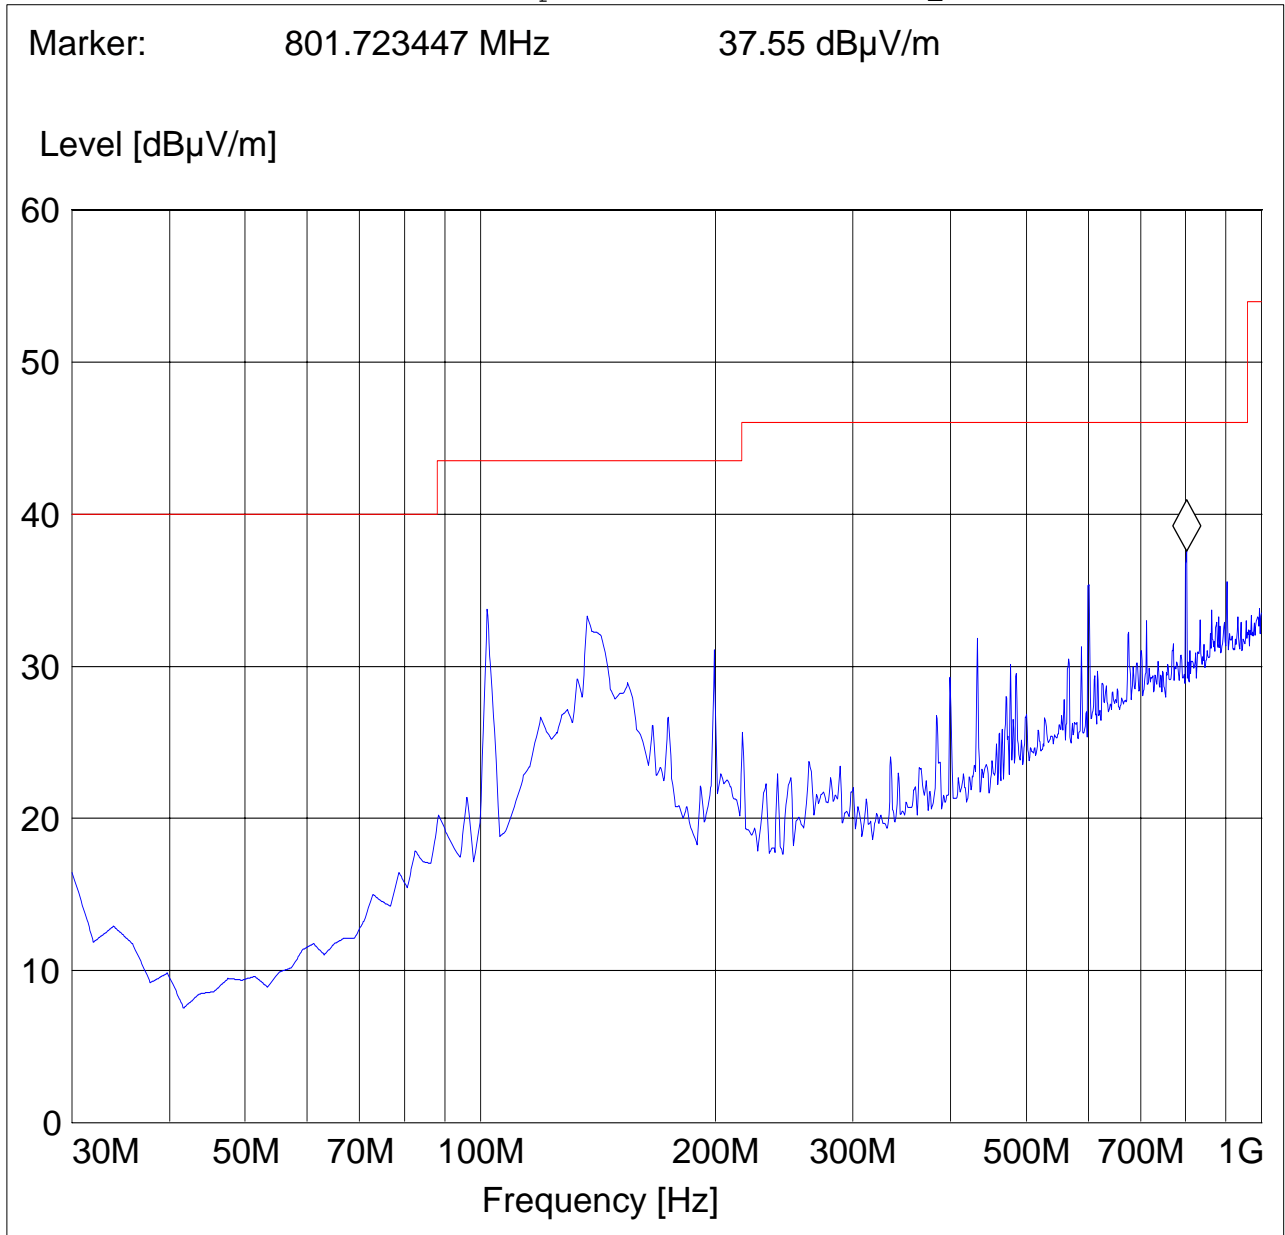




RECEIVER SPURIOUS EMISSION 1-18GHz

EUT / Description: MTSMCHU
Manufacturer: Multitech
Test mode: idel
ANT Orientation: : H
EUT Orientation:: H
Test Engineer: Peter Mu
Voltage: AC Power Supply
Comments::

SWEEP TABLE: "CANADA RE_1-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

Marker: 17.216432866 GHz 39.87 dB μ V/m

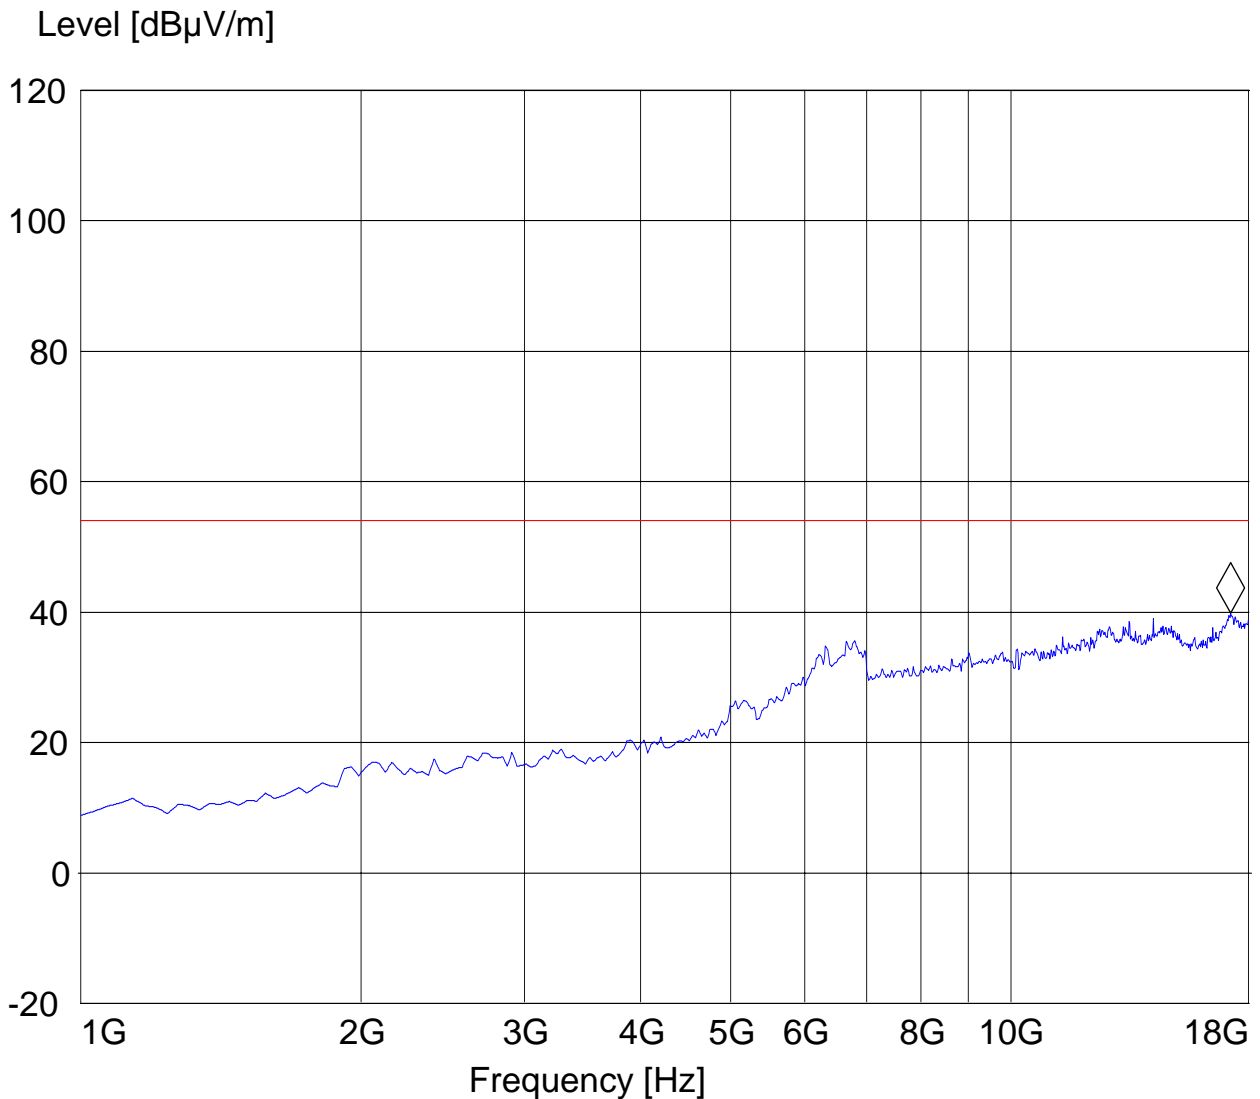




RECEIVER SPURIOUS EMISSION 18-26.5GHz

EUT: MTSMCHU
 Customer: Multitech
 Test Mode: GPRS1900
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Peter Mu
 Power Supply: AC Power Supply
 Comments:

SWEEP TABLE: "CANADA RE_18-26.5G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
18.0 GHz	26.0 GHz	MaxPeak	Coupled	1 MHz	#572 horn AF

Marker: 24.25250501 GHz 26.5 dBμV/m

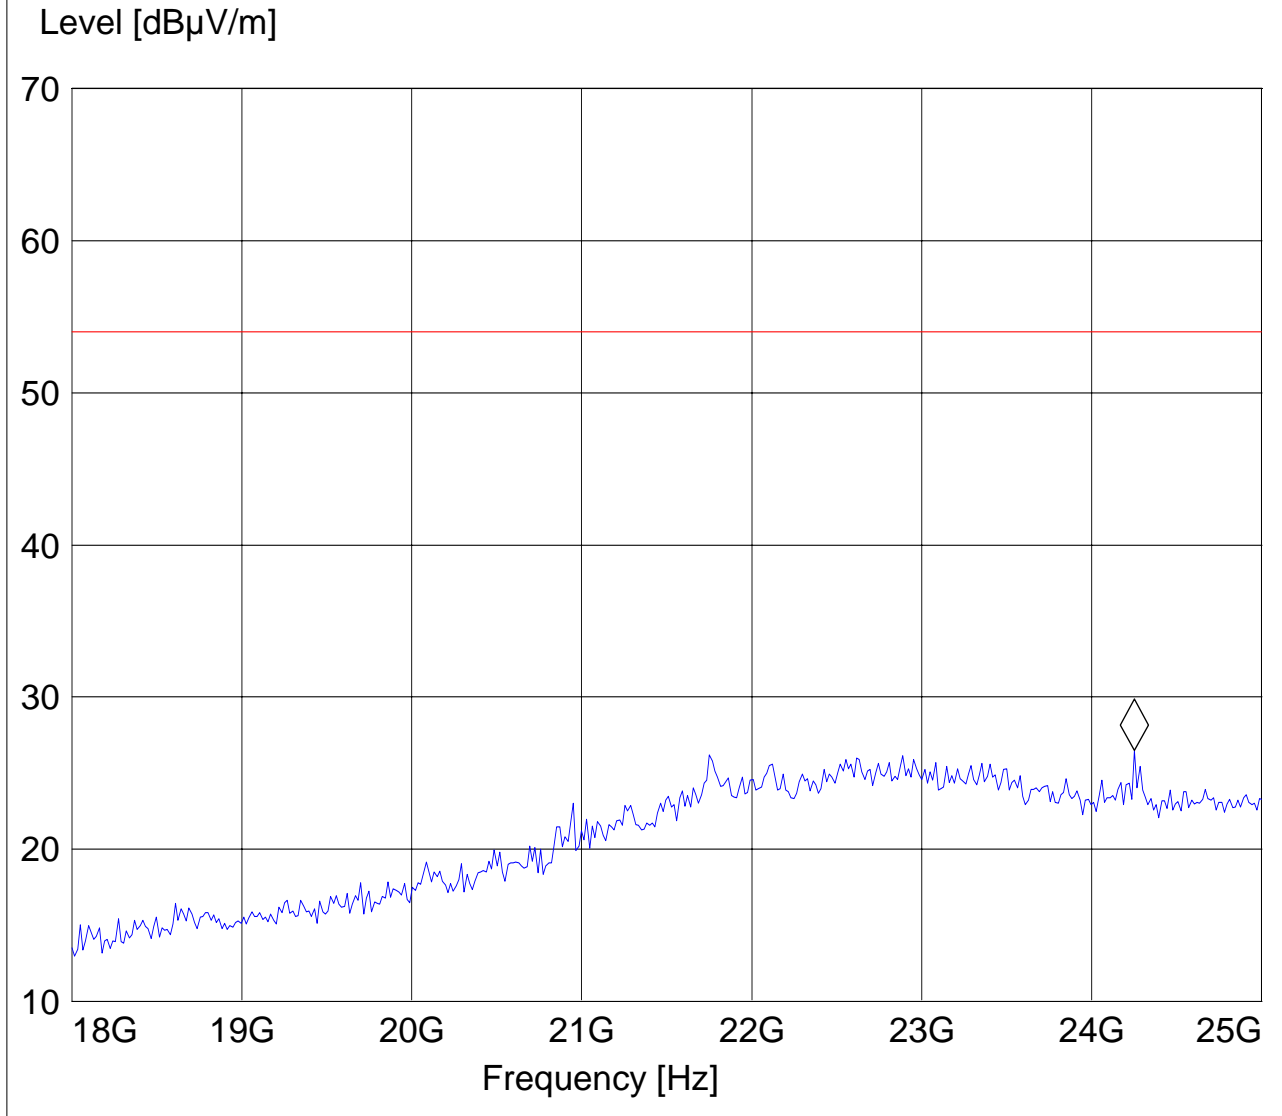



5.6 AC POWER LINE CONDUCTED EMISSIONS § 15.107/207

5.6.1 Limits

Technical specification: 15.107 / 15.207 (Revised as of August 20, 2002)

§15.107 (a) Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 µH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Limit

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

* Decreases with logarithm of the frequency

ANALYZER SETTINGS: RBW = 10KHz VBW = 10KHz




5.6.2 Results, Line:

EUT: MTSMCHU
Manufacturer: Multitech
Operating Condition: GSM850
ANT Orientation:: CONDUCTED
EUT Orientation:: H
Test Engineer:: Peter Mu
Power Supply: : AC Adaptor
Comments: :

SWEEP TABLE: "55022 cond"

Short Description: EN 55022 for 150KHz-30MHz
Unit: dBμV
Detector: Mode:

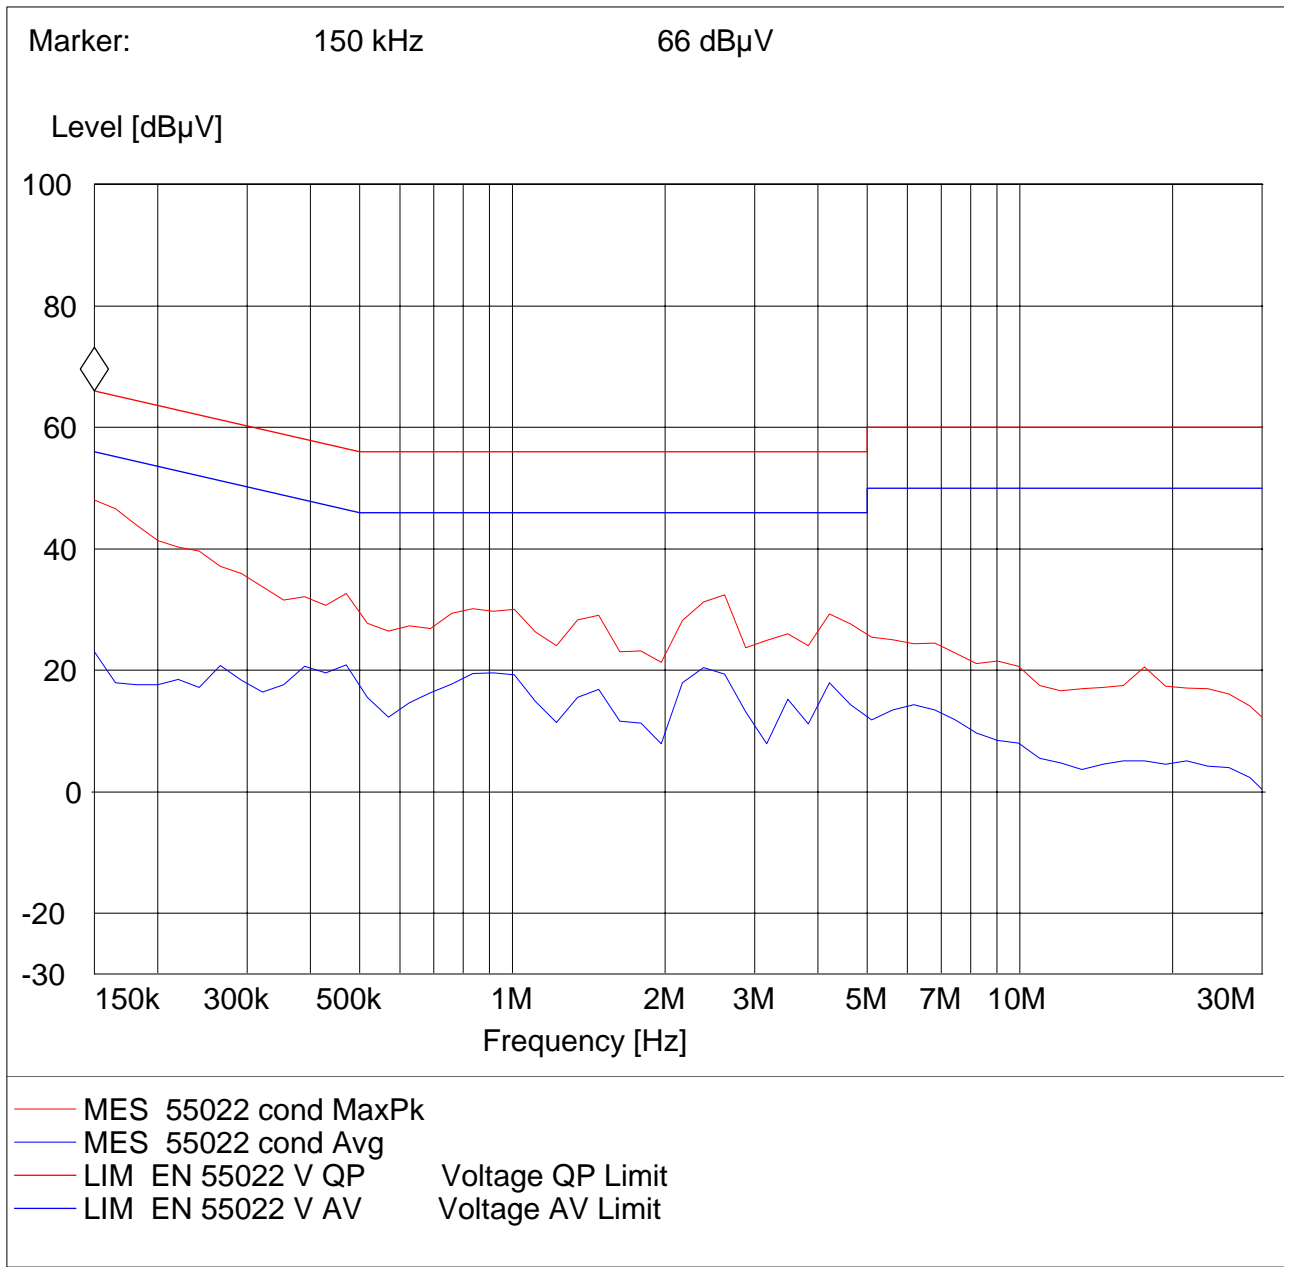



6 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

No	Instrument/Ancillary	Type	Manufacturer	Serial No.	Cal Due	Interval
01	Spectrum Analyzer	ESIB 40	Rohde & Schwarz	100107	May 2008	1 year
02	Spectrum Analyzer	FSEM 30	Rohde & Schwarz	100017	August 2008	1 year
03	Signal Generator	SMY02	Rohde & Schwarz	836878/011	May 2008	1 year
04	Power-Meter	NRVD	Rohde & Schwarz	0857.8008.02	May 2008	1 year
05	Biconilog Antenna	3141	EMCO	0005-1186	June 2008	1 year
06	Horn Antenna (1-18GHz)	SAS-200/571	AH Systems	325	June 2008	1 year
07	Horn Antenna (18-26.5GHz)	3160-09	EMCO	1240	June 2008	1 year
08	Power Splitter	11667B	Hewlett Packard	645348	n/a	n/a
09	Climatic Chamber	VT4004	Voltsch	G1115	May 2008	1 year
10	High Pass Filter	5HC2700	Trilithic Inc.	9926013	n/a	n/a
11	High Pass Filter	4HC1600	Trilithic Inc.	9922307	n/a	n/a
12	Pre-Amplifier	JS4-00102600	Miteq	00616	May 2008	1 year
13	Power Sensor	URV5-Z2	Rohde & Schwarz	DE30807	May 2008	1 year
14	Digital Radio Comm. Tester	CMD-55	Rohde & Schwarz	847958/008	May 2008	1 year
15	Universal Radio Comm. Tester	CMU 200	Rohde & Schwarz	832221/06	May 2008	1 year
16	LISN	ESH3-Z5	Rohde & Schwarz	836679/003	May 2008	1 year
17	Loop Antenna	6512	EMCO	00049838	July 2008	2 years

7 References

Title 47—Telecommunication, CHAPTER I--FEDERAL COMMUNICATIONS COMMISSION,
PART 2--FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS October 1, 2001.

Title 47—Telecommunication, CHAPTER I--FEDERAL COMMUNICATIONS COMMISSION,
PART 22 PUBLIC MOBILE SERVICES October 1, 1998.


FCC Report and order 02-229 September 24, 2002.

Title 47—Telecommunication, CHAPTER I--FEDERAL COMMUNICATIONS COMMISSION,
PART 24 PERSONAL COMMUNICATIONS SERVICES October 1, 1998.

ANSI / TIA-603-C-2004 Land Mobile FM or PM Communications Equipment Measurement and Performance Standard November 7, 2002.

8 BLOCK DIAGRAMS

Conducted Testing

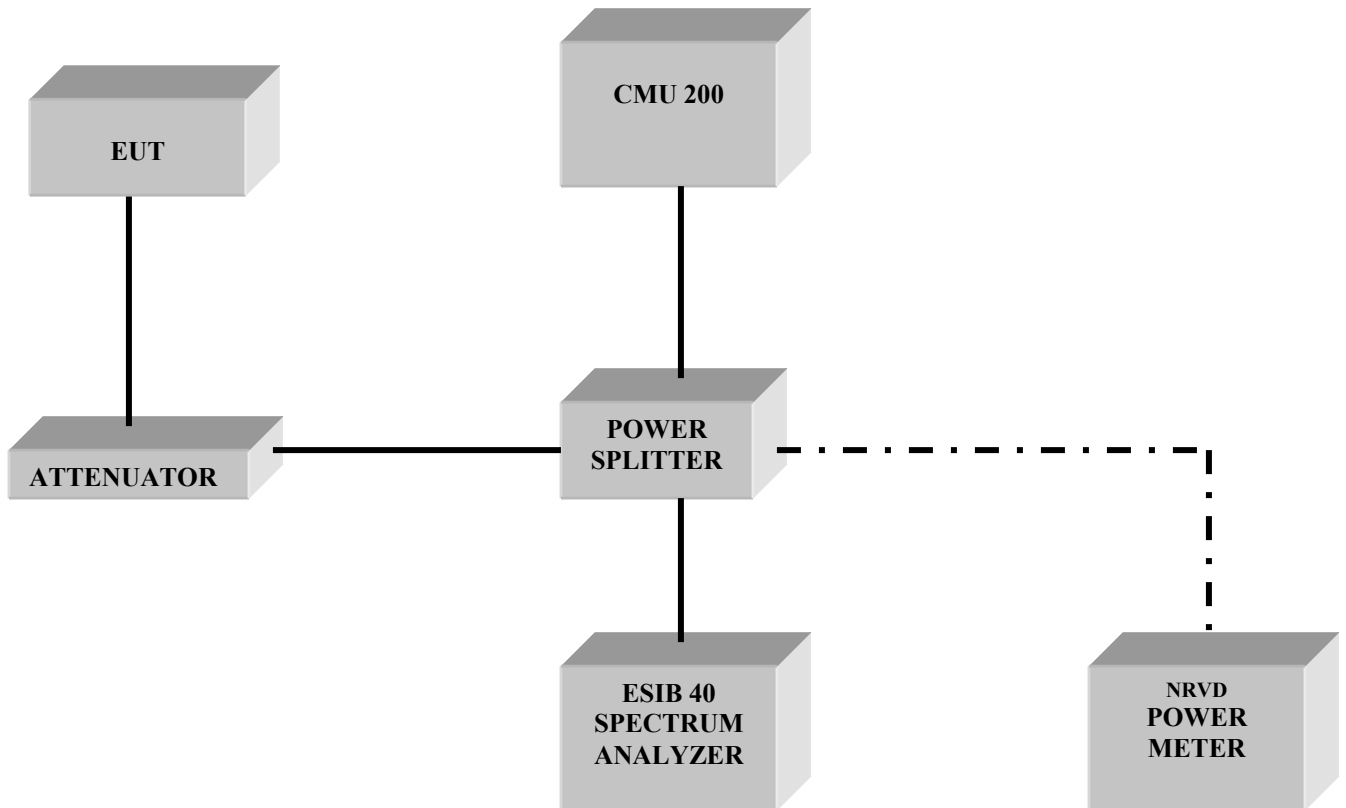

Radiated Testing

ANECHOIC CHAMBER

