



FCC Test Report

FCC Part 22, 24 / RSS 132,133

For the
Multi-Tech Systems Inc

SocketModem EDGE

Model Number:
MTSMC-E1, MTSMC-E1-V

With Siemens GSM Module MC75i

FCC ID: AU792U09G17826
IC ID: 125A-0035

TEST REPORT #: EMC_MULTI_041_09001_FCC22_24_rev1
DATE: 2009-10-01



Bluetooth
Qualification Test
Facility
(BQTF)



LAB CODE 20020328-00

FCC listed:
A2LA accredited

IC recognized #
3462B

CETECOM Inc.

411 Dixon Landing Road • Milpitas, CA 95035 • U.S.A.

Phone: +1 (408) 586 6200 • Fax: +1 (408) 586 6299 • E-mail: info@cetecomusa.com • <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686

Board of Directors: Dr. Harald Ansorge, Dr. Klaus Matkey, Hans Peter May

© Copyright by CETECOM

Table of Contents

1 ASSESSMENT3

2 ADMINISTRATIVE DATA.....4

2.1 IDENTIFICATION OF THE TESTING LABORATORY ISSUING THE EMC TEST REPORT.....4

2.2 IDENTIFICATION OF THE CLIENT4

2.3 IDENTIFICATION OF THE MANUFACTURER.....4

3 EQUIPMENT UNDER TEST (EUT).....5

3.1 SPECIFICATION OF THE EQUIPMENT UNDER TEST5

3.2 IDENTIFICATION OF THE EQUIPMENT UNDER TEST (EUT)5

3.3 IDENTIFICATION OF ACCESSORY EQUIPMENT5

4 SUBJECT OF INVESTIGATION.....6

5 MEASUREMENTS.....7

5.1 RF POWER OUTPUT7

5.1.1 FCC 2.1046 Measurements required: RF power output.....7

5.1.2 Limits:7

5.1.2.1 FCC 22.913 (a) Effective radiated power limits.7

5.1.2.2 FCC 24.232 (b)(c) Power limits.7

5.1.3 Conducted Output Power Measurement procedure:.....7

5.1.4 Radiated Output Power Measurement procedure:.....8

5.1.5 ERP Results 850 MHz band:9

5.1.6 EIRP Results 1900 MHz band:.....9

5.2 SPURIOUS EMISSIONS RADIATED22

5.2.1 FCC 2.1053 Measurements required: Field strength of spurious radiation.....22

5.2.2 Limits:22

5.2.2.1 FCC 22.917 Emission limitations for cellular equipment.22

5.2.2.2 FCC 24.238 Emission limitations for Broadband PCS equipment.22

5.2.3 Radiated out of band measurement procedure:23

5.2.4 Radiated out of band emissions results on EUT:25

5.2.4.1 Test Results Transmitter Spurious Emission GSM850:25

5.2.4.2 Test Results Transmitter Spurious Emission PCS-1900:32

5.2.5 RECEIVER RADIATED EMISSIONS § 2.1053 / RSS-132 & 13342

5.2.5.1 Test Results Receiver Spurious Emission: 30M-1GHz.....43

6 LIST OF EQUIPMENT.....45

7 REFERENCES46

8 BLOCK DIAGRAMS47

9 REVISION HISTORY.....49



1 Assessment

The following is in compliance with the applicable criteria specified in FCC rules Parts 2, 22 and 24 of Title 47 of the Code of Federal Regulations and in compliance with the applicable criteria specified in Industry Canada rules RSS132 and RSS133.

Company	Description	Model #
Multi-Tech Systems Inc	EDGE Modem	MTSMC-E1, MTSMC-E1-V

Technical responsibility for area of testing:

Marc Douat

2009-10-01 EMC & Radio (Test Lab Manager)

Date	Section	Name	Signature
------	---------	------	-----------

This report is prepared by:

Josie Sabado

2009-10-01 EMC & Radio (Project Engineer)

Date	Section	Name	Signature
------	---------	------	-----------

The test results of this test report relate exclusively to the test item specified in Identification of the Equipment under Test. The CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc USA.

The test results of this test report relate exclusively to radiated measurement only. Radio module used in this product has been previously certified under its own FCC and IC ID.

2 Administrative Data

2.1 Identification of the Testing Laboratory Issuing the EMC Test Report

Company Name:	CETECOM Inc.
Department:	EMC
Address:	411 Dixon Landing Road Milpitas, CA 95035 U.S.A.
Telephone:	+1 (408) 586 6200
Fax:	+1 (408) 586 6299
Responsible Test Lab Manager:	Marc Douat
Responsible Project Leader:	Josie Sabado

2.2 Identification of the Client

Applicant's Name:	Multi-Tech Systems Inc
Street Address:	2205 Woodale Drive
City/Zip Code	Mounds View, MN 55112
Country	USA
Contact Person:	Thomas Hofstede
Phone No.	763.717.5505
e-mail:	thofstede@multitech

2.3 Identification of the Manufacturer

Same as above applicant

3 Equipment under Test (EUT)

3.1 Specification of the Equipment under Test

Marketing Name of EUT (if not same as Model No.)	SocketModem EDGE
Description	EDGE Modem
Model No.	MTSMC-E1, MTSMC-E1-V
FCC-ID	AU792U09G17826
IC-ID (Industry Canada)	125A-0035
Frequency Range:	824.2MHz – 848.8MHz for GSM 850 1850.2MHz – 1909.8MHz for PCS 1900
Type(s) of Modulation:	GMSK, 8PSK
Number of Channels:	124 for GSM-850, 299 for PCS-1900
Antenna Type:	Quad band / 2 dBi
Max. Output Power:	Conducted : Tests not performed by Cetecom. Radiated : see section 5.1.5 and 5.1.6. 31.596dBm (1.44W) @ GSM 824.2MHz ERP values 28.106dBm (0.647W) @ PCS 1880MHz EIRP values

3.2 Identification of the Equipment Under Test (EUT)

EUT #	TYPE	MANF.	MODEL
1	EUT	Multi-Tech Systems Inc	MTSMC-E1, MTSMC-E1-V

3.3 Identification of Accessory equipment

AE #	TYPE	MODEL
1	AC Adaptor	GT-41052-1509

4 Subject of Investigation

All testing was performed on the EUT listed in Section 3. The EUT was maximized in the X,Y, Z positions , all data in this report shows the worst case between horizontal and vertical polarization.

The objective of the measurements done by Cetecom Inc. was to measure the performance of the EUT as specified by requirements listed in FCC rules Parts 2, 22 and 24 of Title 47 of the Code of Federal Regulations and Industry Canada rules RSS132 and RSS133.

This EUT contains an FCC approved module with the FCC ID **QIPMC75i**. This report refers only to the radiated measurements in GSM technology.

5 Measurements

5.1 RF Power Output

5.1.1 FCC 2.1046 Measurements required: RF power output.

Power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on circuit elements as specified. The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

5.1.2 Limits:

5.1.2.1 FCC 22.913 (a) Effective radiated power limits.

The effective radiated power (ERP) of mobile transmitters must not exceed 7 Watts.

5.1.2.2 FCC 24.232 (b)(c) Power limits.

(c) Mobile/portable stations are limited to 2 Watts effective isotropic radiated power (EIRP).


(d) In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

(e) Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms equivalent voltage. The measurement results shall be properly adjusted for any limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement over the full bandwidth of the channel.

5.1.3 Conducted Output Power Measurement procedure:

Based on TIA-603C 2004

2.2.1 Conducted Carrier Output Power Rating

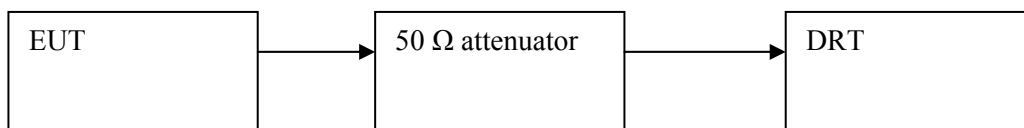


1. Connect the equipment as shown in the above diagram. A Digital Radiocommunication Tester (DRT) is used to enable the EUT to transmit and to measure the output power.
2. Adjust the settings of the DRT to set the EUT to its maximum power at the required channel.
3. Record the output power level measured by the DRT.
4. Correct the measured level for all losses in the RF path.
5. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.

5.1.4 Radiated Output Power Measurement procedure:

Based on TIA-603C 2004

2.2.17.2 Effective Radiated Power (ERP) or Effective Isotropic Radiated Power (EIRP)

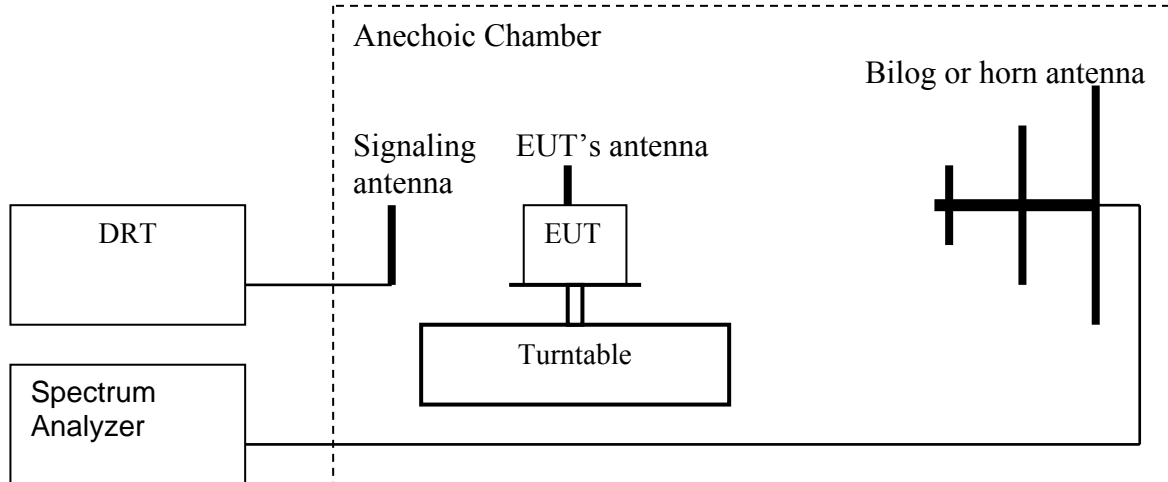

1. Connect the equipment as shown in the above diagram with the EUT's antenna in a vertical orientation.
 2. Adjust the settings of the Digital Radiocommunication Tester (DRT) to set the EUT to its maximum power at the required channel.
 3. Set the spectrum analyzer to the channel frequency. Set the analyzer to measure peak hold with the required settings.
 4. Rotate the EUT 360°. Record the peak level in dBm (**LVL**).
 5. Replace the EUT with a vertically polarized half wave dipole or known gain antenna. The center of the antenna should be at the same location as the center of the EUT's antenna.
 6. Connect the antenna to a signal generator with known output power and record the path loss in dB (**LOSS**). **LOSS** = Generator Output Power (dBm) – Analyzer reading (dBm).
 7. Determine the ERP using the following equation:

$$\mathbf{ERP\ (dBm) = LVL\ (dBm) + LOSS\ (dB)}$$
 8. Determine the EIRP using the following equation:

$$\mathbf{EIRP\ (dBm) = ERP\ (dBm) + 2.14\ (dB)}$$
 9. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band. **Spectrum analyzer settings = rbw=vbw=3MHz**
- (note: Steps 5 and 6 above are performed prior to testing and **LOSS** is recorded by test software. Steps 3, 4, 7 and 8 above are performed with test software.)

5.1.5 ERP Results 850 MHz band:

Power Control Level	Burst Peak ERP
5	≤38.45dBm (7W)

Frequency (MHz)	Effective Radiated Power (dBm)	
	GSM	EGPRS
824.2	31.596	29.587
836.6	30.426	29.491
848.8	30.693	28.43

5.1.6 EIRP Results 1900 MHz band:

Power Control Level	Burst Peak EIRP
0	≤33dBm (2W)

Frequency (MHz)	Effective Isotropic Radiated Power (dBm)	
	GSM	EGPRS
1850.2	27.730	27.319
1880.0	28.106	28.097
1909.8	27.133	26.834

PLOTS

GSM 824.2 MHz, Channel 128


EUT Information

Description:

EUT Name:	MTSMC_E1
Manufacturer:	Multitech
EUT:	H
ANT:	H
Software Rev:	
Comment:	AC; TT@198 ANT-127cm

Test

ERP 850 L

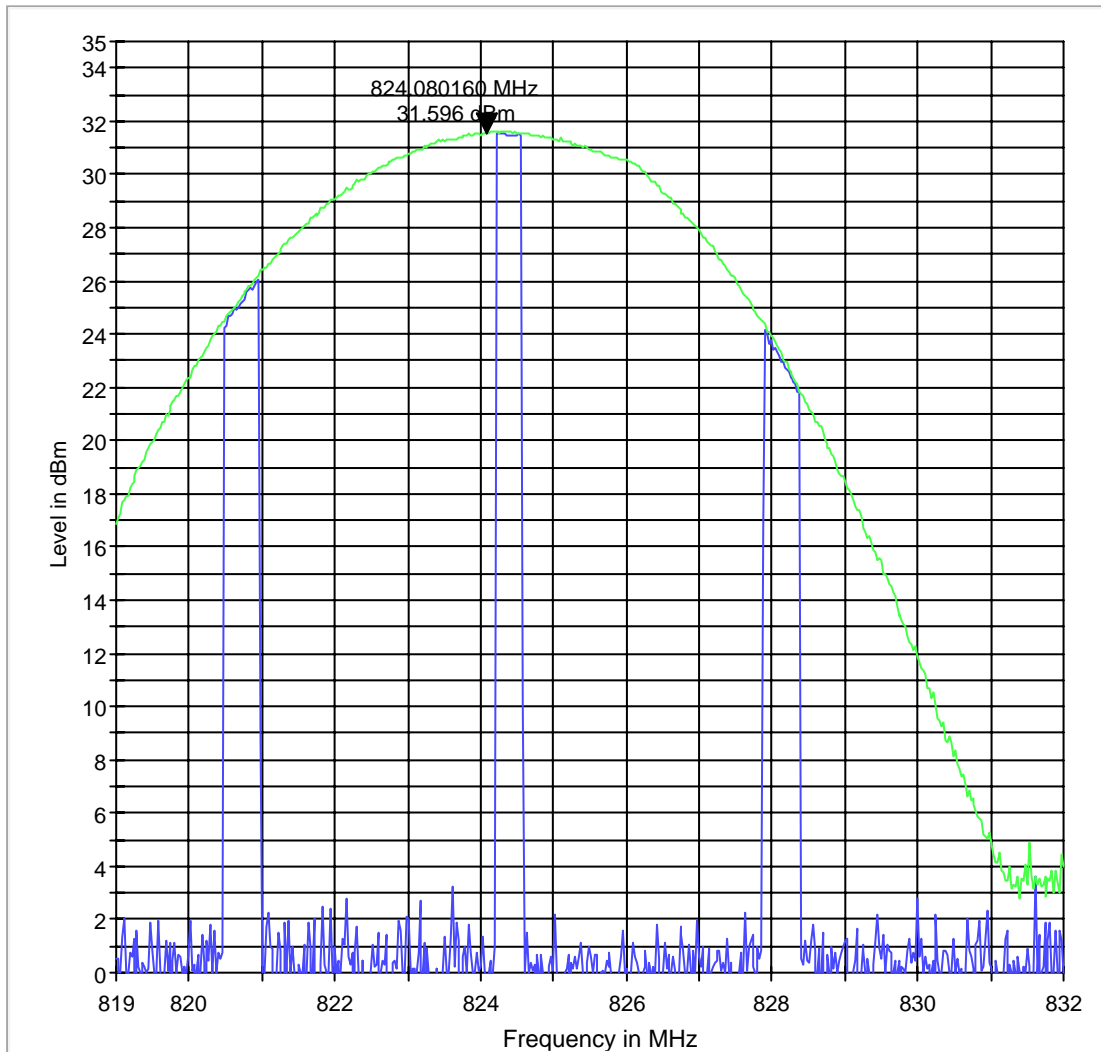

GSM 836.6 MHz, Channel 190


EUT Information

Description:

EUT Name:	MTSMC_E1
Manufacturer:	Multitech
EUT:	H
ANT:	H
Software Rev:	
Comment:	AC; TT@200 ANT-126cm

Test

ERP 850 M

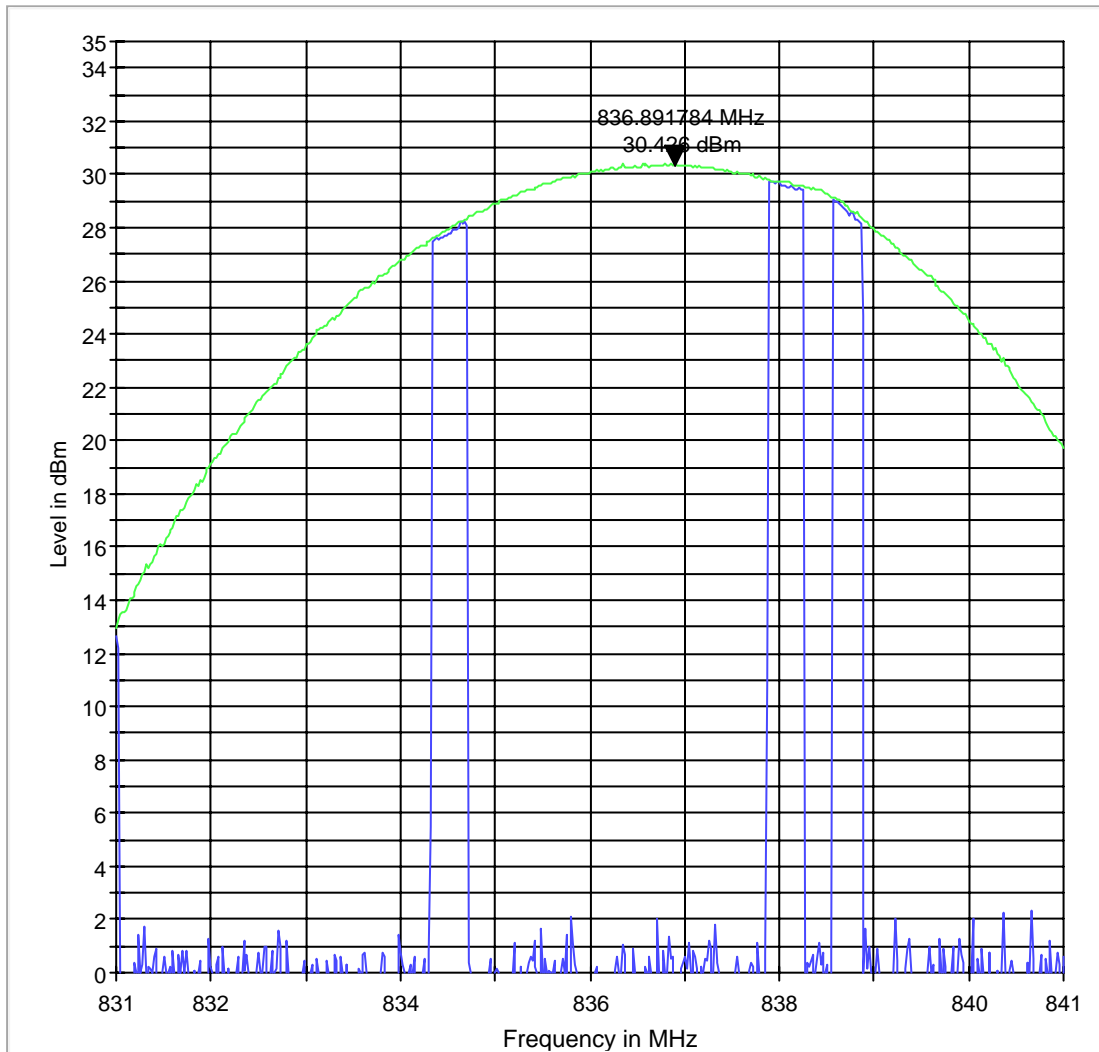

GSM 848.8 MHz, Channel 251


EUT Information

Description:

EUT Name:	MTSMC_E1
Manufacturer:	Multitech
EUT:	H
ANT:	H
Software Rev:	
Comment:	AC; TT@200 ANT-121

Test

ERP 850 H

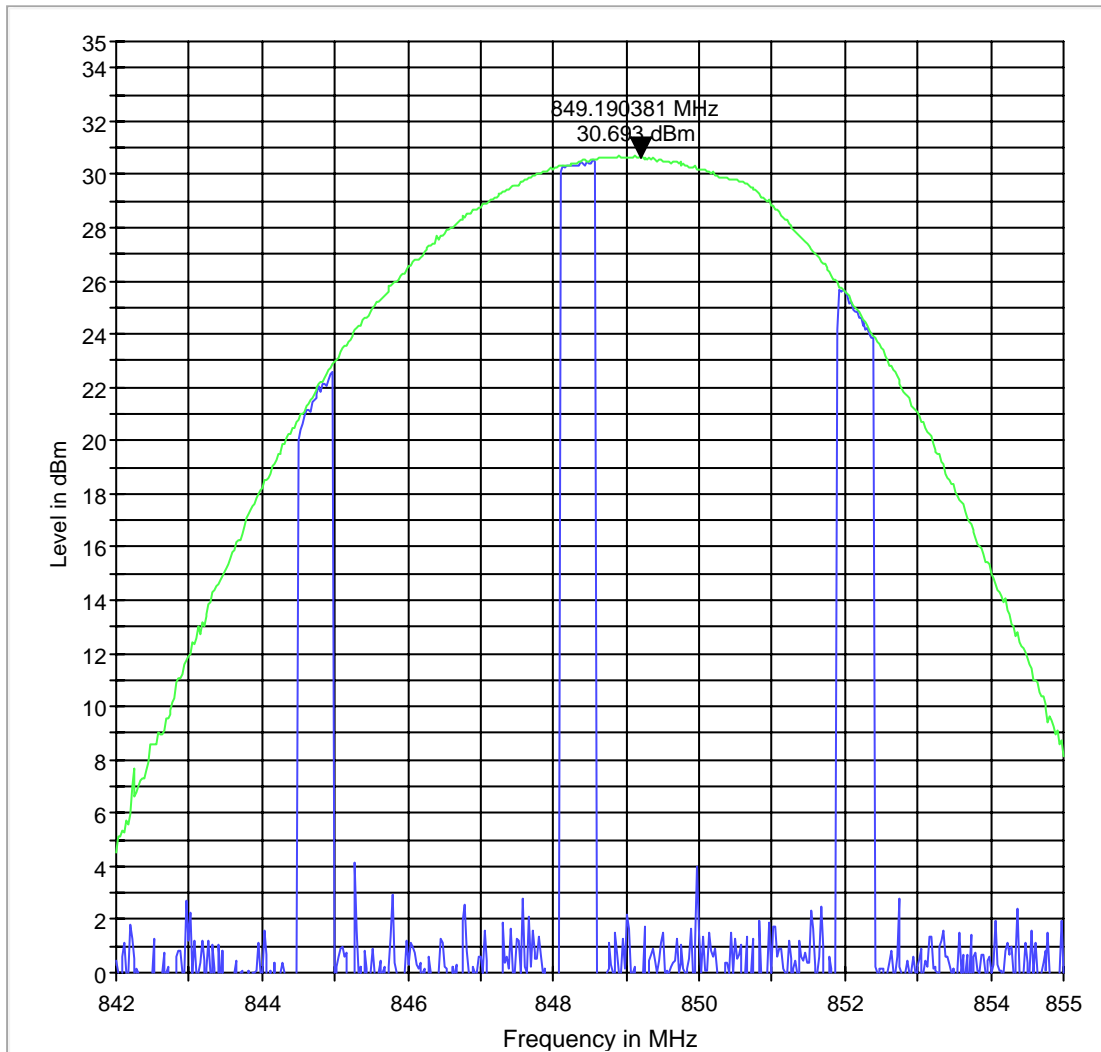


EGPRS 824.2 MHz, Channel 128

ERP_L

1/1

ERP_L

ERP 850 L

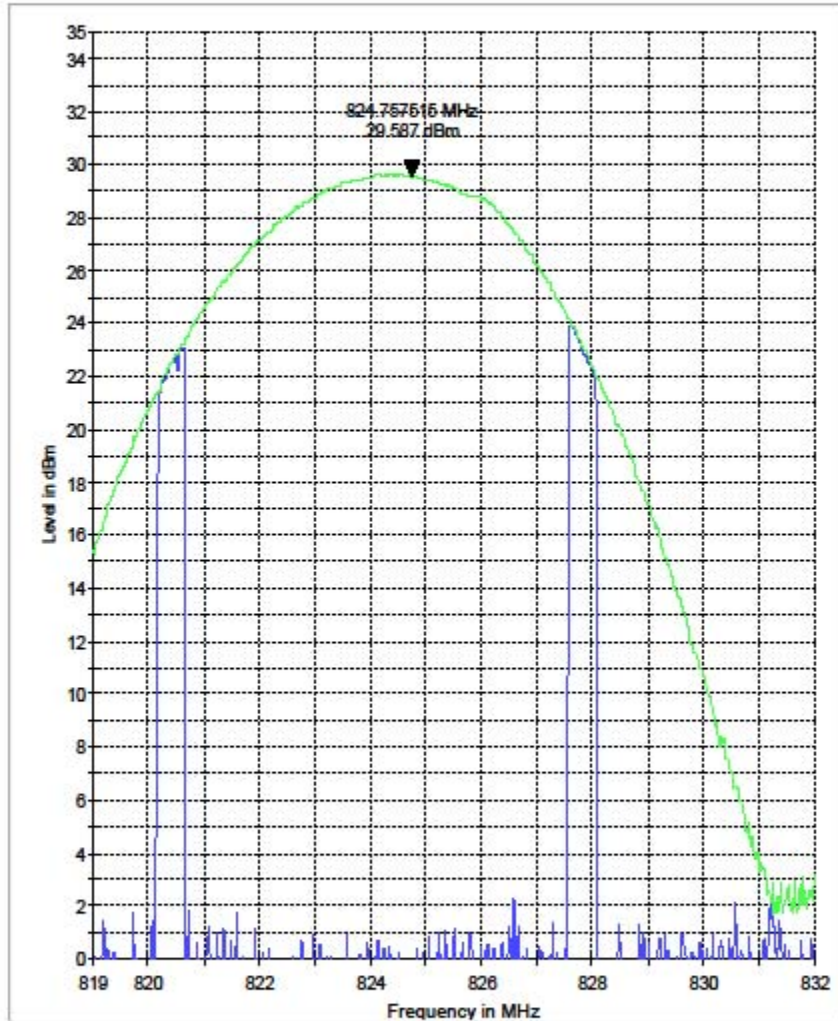


EGPRS 836.6 MHz, Channel 190

ERP_M

1/1

ERP_M

ERP 850 M

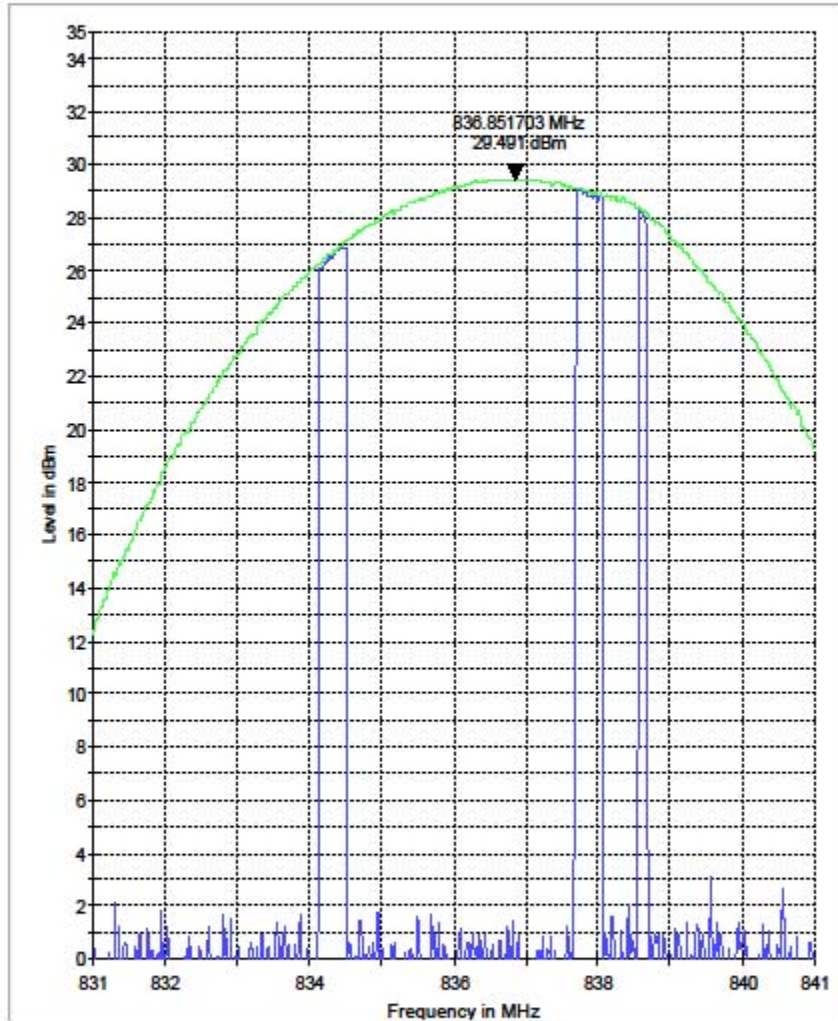

— MaxPeak-ClearWrite — MaxPeak-MaxHold


EGPRS 848.8 MHz, Channel 251

ERP_H

1/1

ERP_H

ERP 850 H

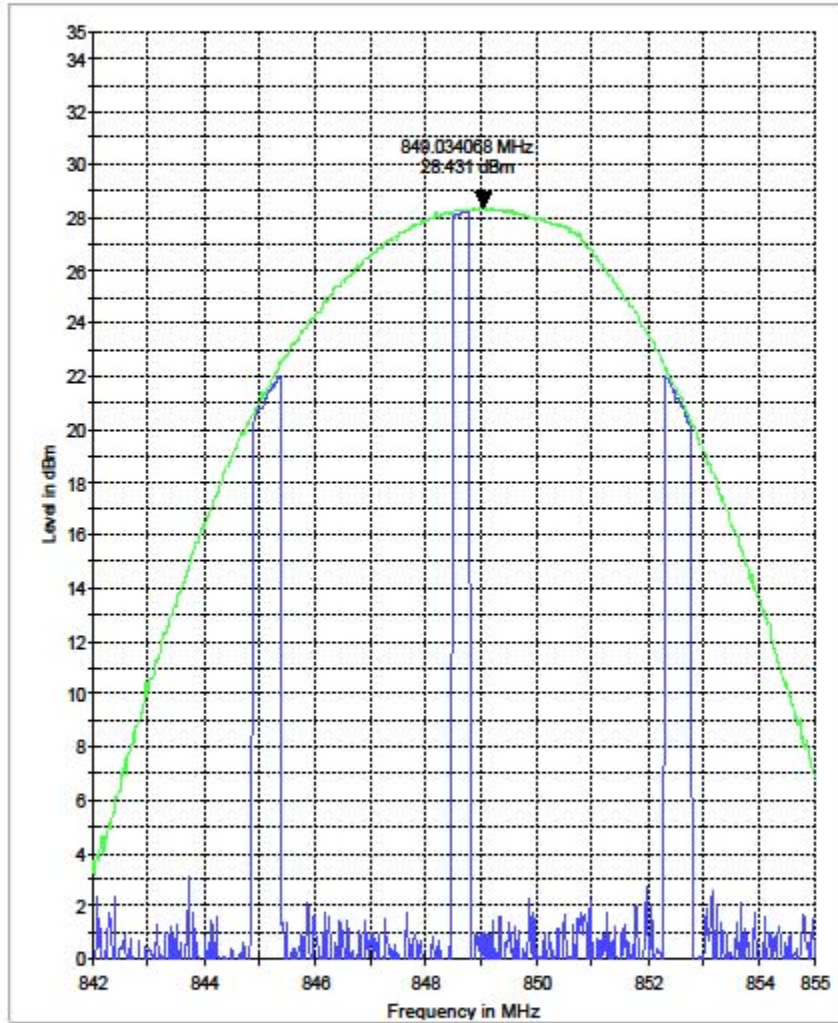

— MaxPeak-ClearWrite — MaxPeak-MaxHold

1850.2 MHz

EIRP-L


1 / 1

EUT Information

Description:
EUT Name: MTSMC_E1
Manufacturer: Multitech
EUT: EUT ANT - VERTICAL
ANT: VERTICAL
Software Rev:
Comment: AC; TT@87° ANT-90cm

EIRP-L

EIRP 1800 L

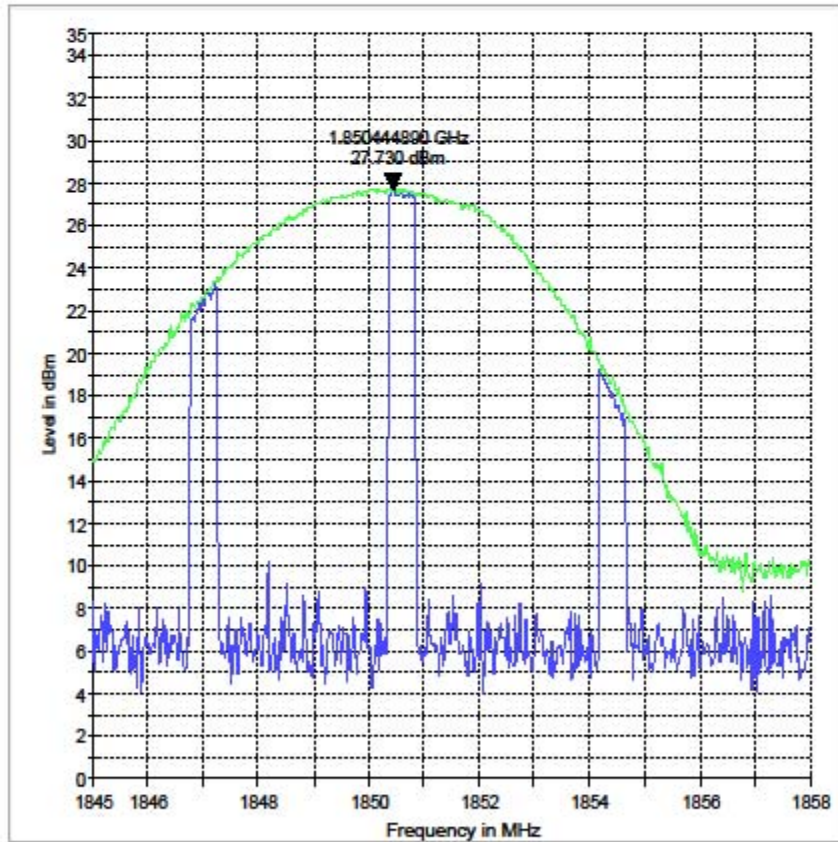

1880 MHz

EIRP-M


1 / 1

EUT Information

Description:
EUT Name: MTSMC_E1
Manufacturer: Multitech
EUT: EUT ANT-VERTICAL
ANT: V
Software Rev:
Comment: AC; TT@91° ANT-100cm

EIRP-M

EIRP 1900 M

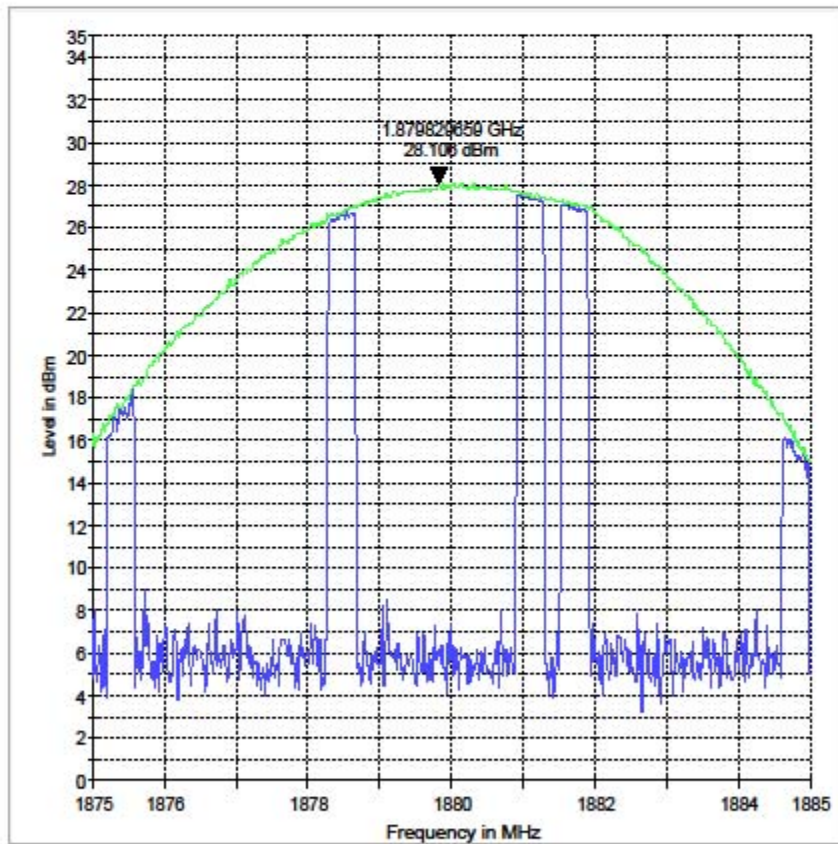

1909.8 MHz


EIRP-H

1 / 1

EUT Information

Description:
EUT Name: MTSMC_E1
Manufacturer: Multitech
EUT: EUT ANT- VERTICAL
ANT: VERTICAL
Software Rev:
Comment: AC; TT@100° ANT-90cm

EIRP-H

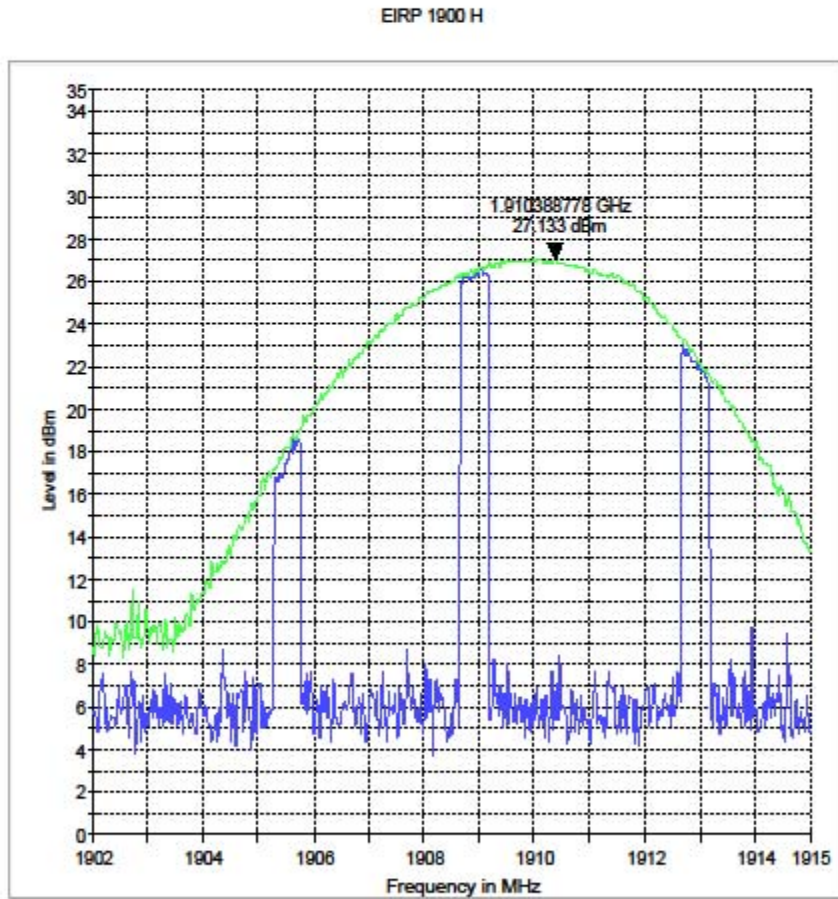


EGPRS 1850.2 MHz, Channel 512

EIRP_L

1/1

EIRP_L

EIRP 1800 L

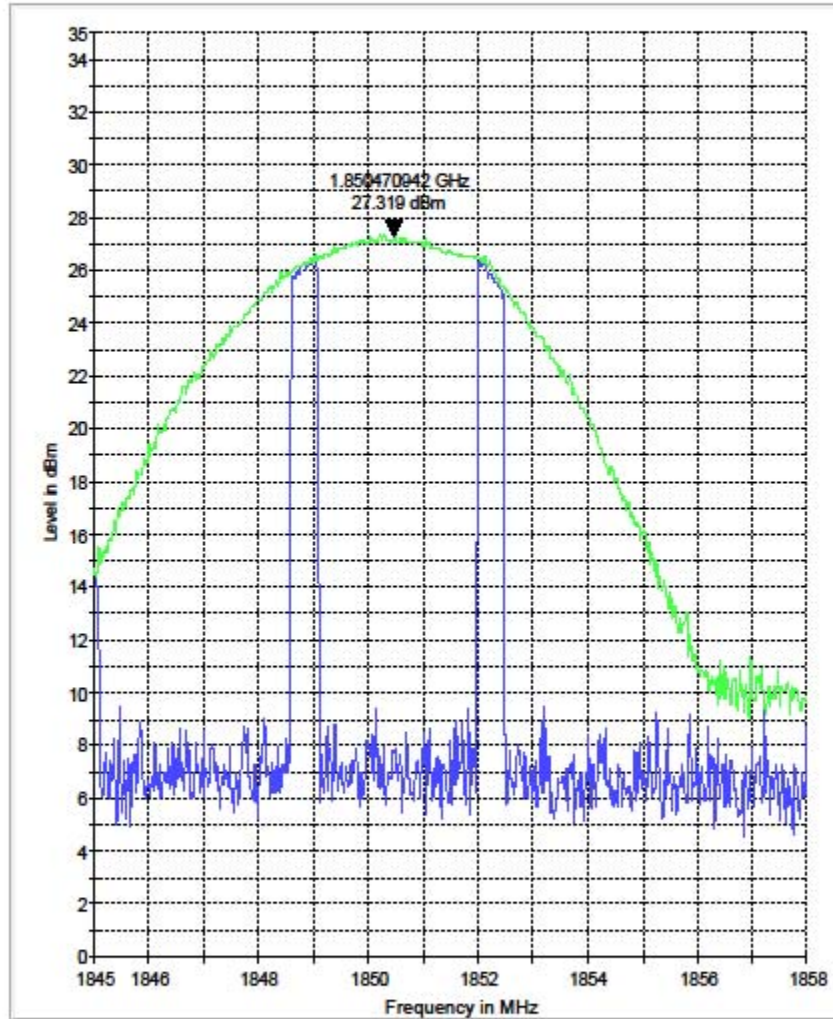

10/1/2009 jsabado

EMC32 V8.10.10

1:10:25


EGPRS 1880 MHz, Channel 661

EIRP_M

1/1

EIRP_M

EIRP 1900 M

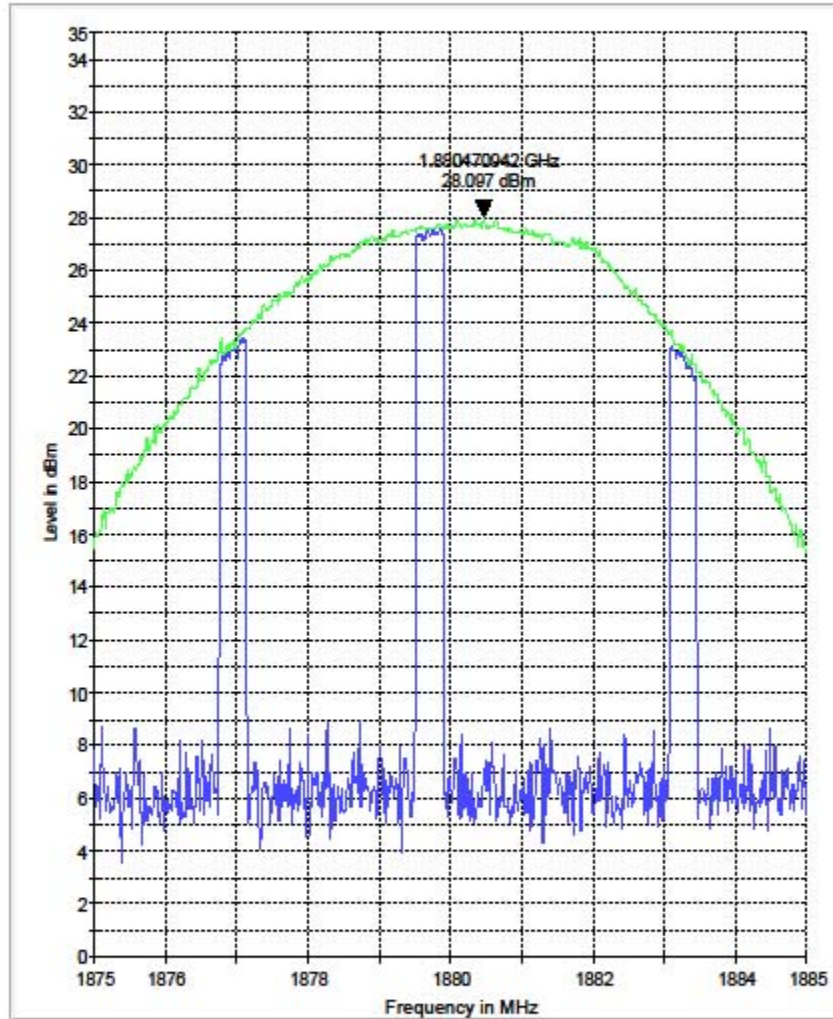

10/1/2009 jsabado

EMC32 V8.10.10

1:01:41


EGPRS 1909.8 MHz, Channel 810

EIRP_H

1/1

EIRP_H

EIRP 1900 H

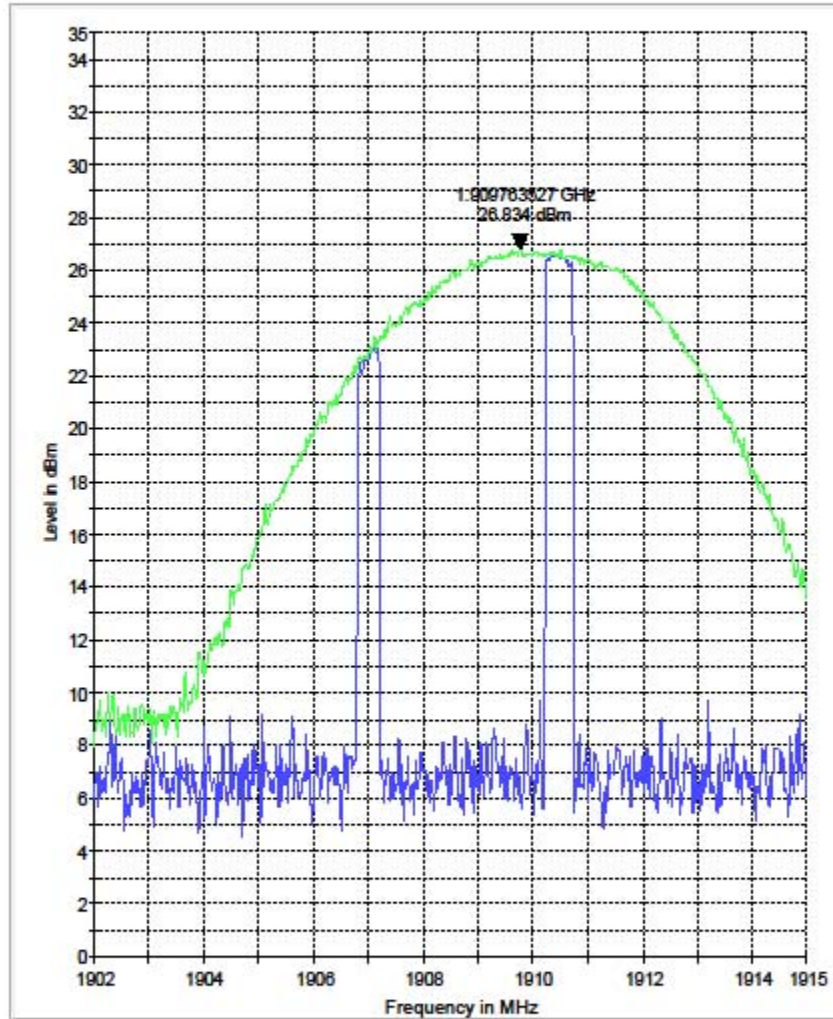

10/1/2009 jsabado

EMC32 V8.10.10

1:08:49

5.2 Spurious Emissions Radiated

5.2.1 FCC 2.1053 Measurements required: Field strength of spurious radiation.

- (a) Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission.

5.2.2 Limits:

5.2.2.1 **FCC 22.917 Emission limitations for cellular equipment.**

The rules in this section govern the spectral characteristics of emissions in the Cellular Radiotelephone Service.

- (a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

(b) *Measurement procedure.* Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

5.2.2.2 **FCC 24.238 Emission limitations for Broadband PCS equipment.**

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

- (a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


(b) *Measurement procedure.* Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 100 kHz of 1 percent of emission bandwidth, as specified). The

emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

5.2.3 Radiated out of band measurement procedure:

Based on TIA-603C 2004

2.2.12 Unwanted emissions: Radiated Spurious

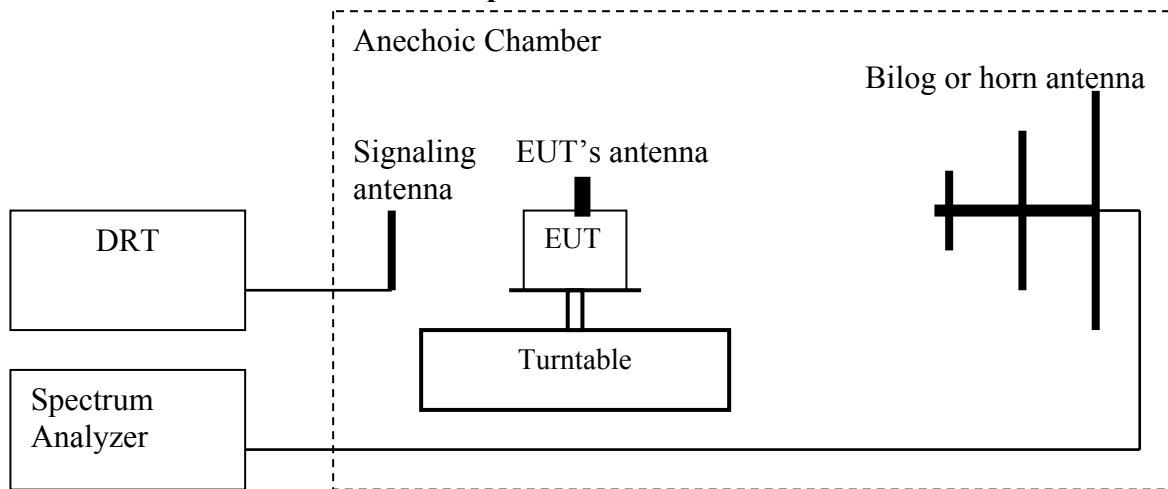

1. Connect the equipment as shown in the above diagram with the EUT's antenna in a horizontal orientation.
2. Adjust the settings of the Digital Radiocommunication Tester (DRT) to set the EUT to its maximum power at the required channel.
3. Set the spectrum analyzer to measure peak hold with the required settings.
4. Place the measurement antenna in a horizontal orientation. Rotate the EUT 360°. Raise the measurement antenna up to 4 meters in 0.5 meters increments and rotate the EUT 360° at each height to maximize all emissions. Measure and record all spurious emissions (LVL) up to the tenth harmonic of the carrier frequency.
5. Replace the EUT with a horizontally polarized half wave dipole or known gain antenna. The center of the antenna should be at the same location as the center of the EUT's antenna.
6. Connect the antenna to a signal generator with known output power and record the path loss in dB (**LOSS**). $\text{LOSS} = \text{Generator Output Power (dBm)} - \text{Analyzer reading (dBm)}$.
7. Determine the level of spurious emissions using the following equation:
Spurious (dBm) = LVL (dBm) + LOSS (dB):
8. Repeat steps 4, 5 and 6 with all antennas vertically polarized.
9. Determine the level of spurious emissions using the following equation:
Spurious (dBm) = LVL (dBm) + LOSS (dB):
10. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.

(**note:** Steps 5 and 6 above are performed prior to testing and **LOSS** is recorded by test software. Steps 3, 4 and 7 above are performed with test software.)

Spectrum analyzer settings:

Res B/W: 1 MHz

Vid B/W: 1 MHz

Measurement Survey:

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the GSM-850 & PCS-1900 bands. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the GSM-850 & PCS-1900 band into any of the other blocks respectively. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

Radiated emission measurements were made only with Circuit Switched mode GMSK modulation because this mode represents the worse case emission for all the modulations for GSM. See section 5.5.4.1 and 5.5.4.3

Radiated emissions measurements were made also with UMTS FDD mode. See section 5.5.4.2 and 5.5.4.4

5.2.4 Radiated out of band emissions results on EUT:

5.2.4.1 Test Results Transmitter Spurious Emission GSM850:

Harmonics	Tx ch-128 Freq. (MHz)	Level (dBm)	Tx ch-190 Freq. (MHz)	Level (dBm)	Tx ch-251 Freq. (MHz)	Level (dBm)
2	1648.4	NF	1673.2	NF	1697.6	NF
3	2472.6	NF	2509.8	NF	2546.4	NF
4	3296.8	NF	3346.4	NF	3395.2	NF
5	4121	NF	4183	NF	4244	NF
6	4945.2	NF	5019.6	NF	5092.8	NF
7	5769.4	NF	5856.2	NF	5941.6	NF
8	6593.6	NF	6692.8	NF	6790.4	NF
9	7417.8	NF	7529.4	NF	7639.2	NF
10	8242	NF	8366	NF	8488	NF
NF = NOISE FLOOR						

RADIATED SPURIOUS EMISSIONS (GSM-850) TX: 30MHz - 1GHz

Channel 128

Spurious emission limit -13dBm


EUT Information

Description:

EUT Name: MTSMC_E1
Manufacturer: Multitech
Serial Number:
Hardware Rev:
Software Rev:
Comment: AC

FCC 22 30-1000MHz Low Channel

FCC 22 30-1000MHz

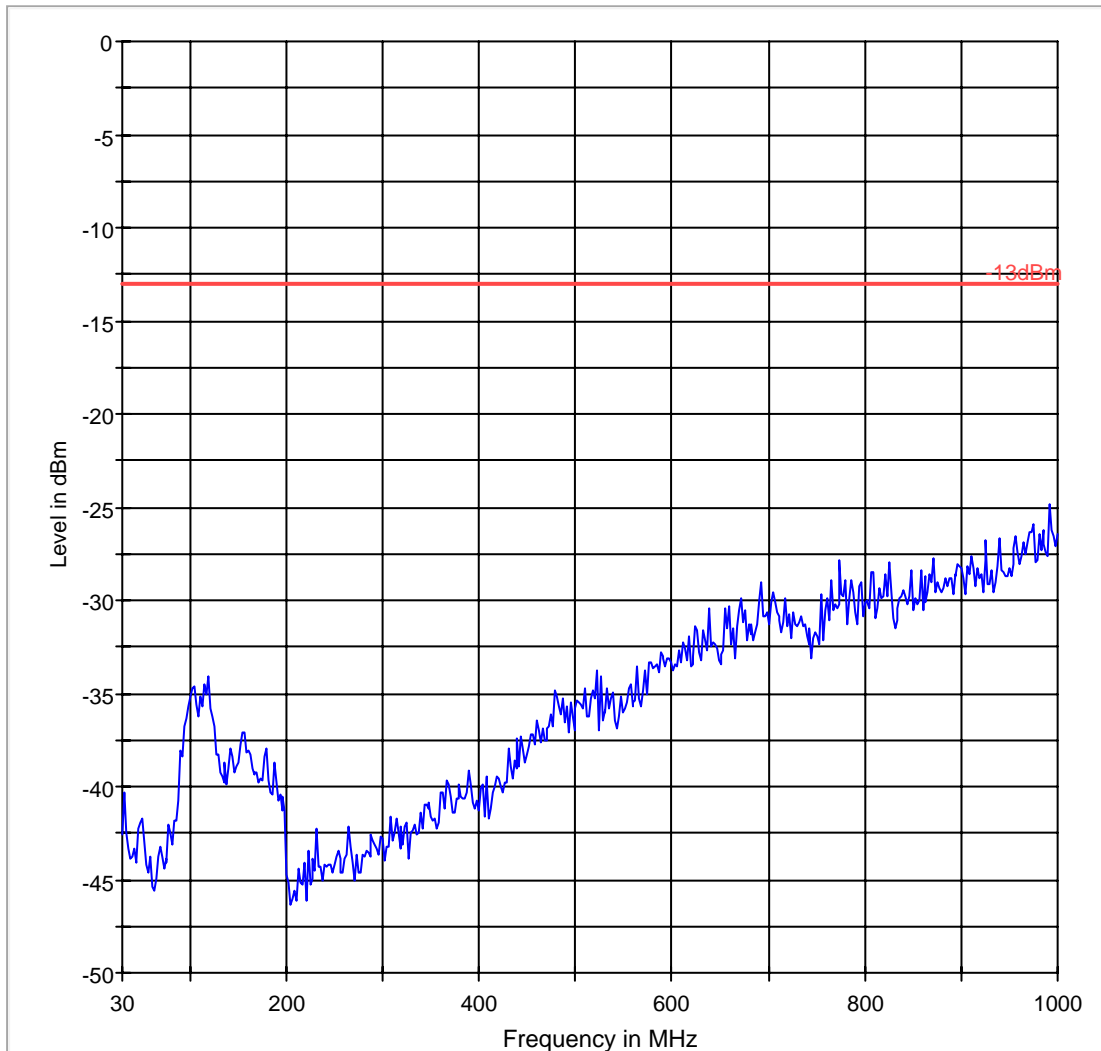

RADIATED SPURIOUS EMISSIONS (GSM-850)TX: 30MHz - 1GHz

Channel 190

Spurious emission limit -13dBm

NOTE: Peak over the limit is the carrier frequency


EUT Information

Description:

EUT Name: MTSMC_E1
Manufacturer: Multitech
Serial Number:
Hardware Rev:
Software Rev:
Comment: AC

FCC 22 30-1000MHz Mid Channel

FCC 22 30-1000MHz

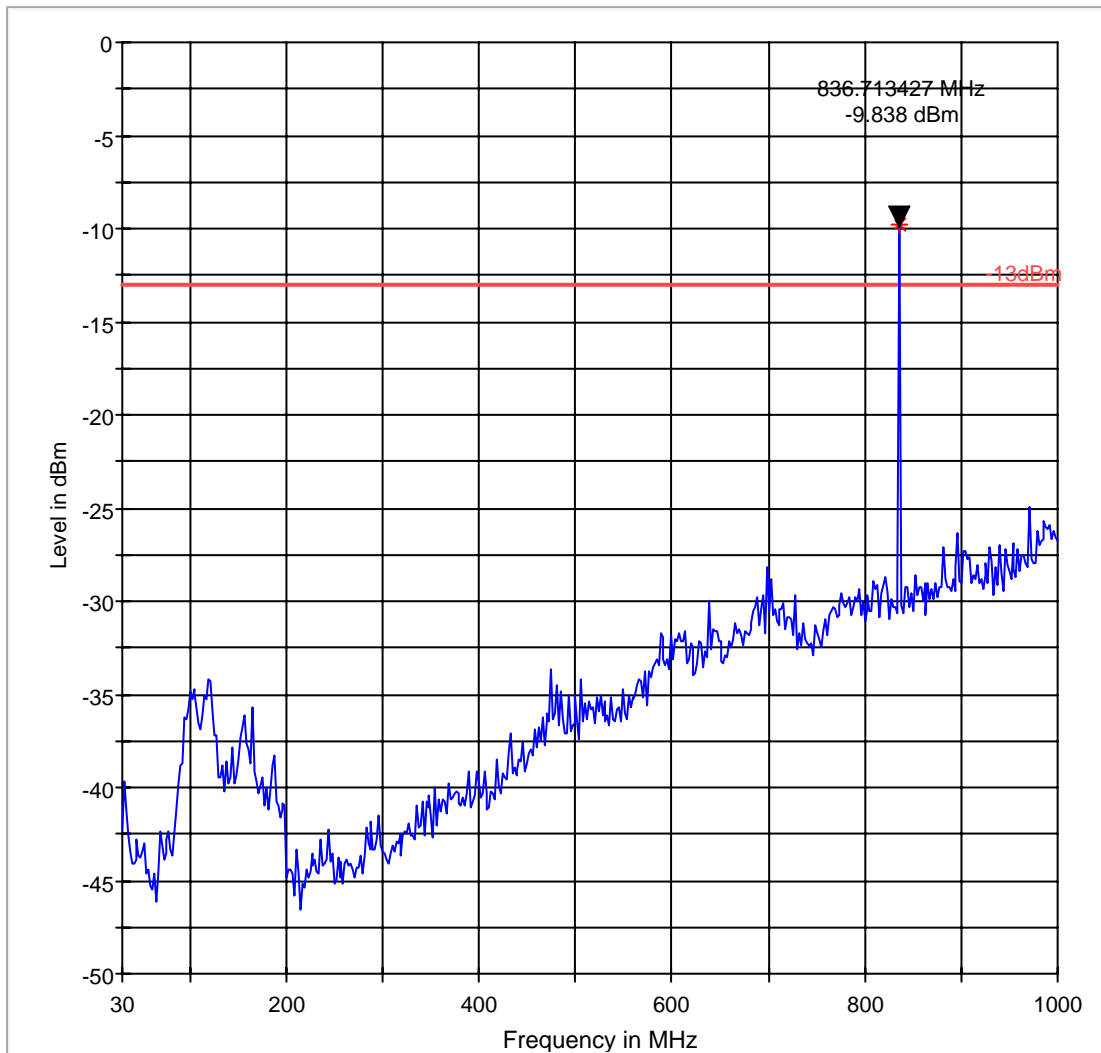

RADIATED SPURIOUS EMISSIONS (GSM-850)TX: 30MHz - 1GHz

Channel 251

Spurious emission limit -13dBm


EUT Information

Description:

EUT Name: MTSMC_E1
Manufacturer: Multitech
Serial Number:
Hardware Rev:
Software Rev:
Comment: AC

FCC 22 30-1000MHz High Channel

FCC 22 30-1000MHz

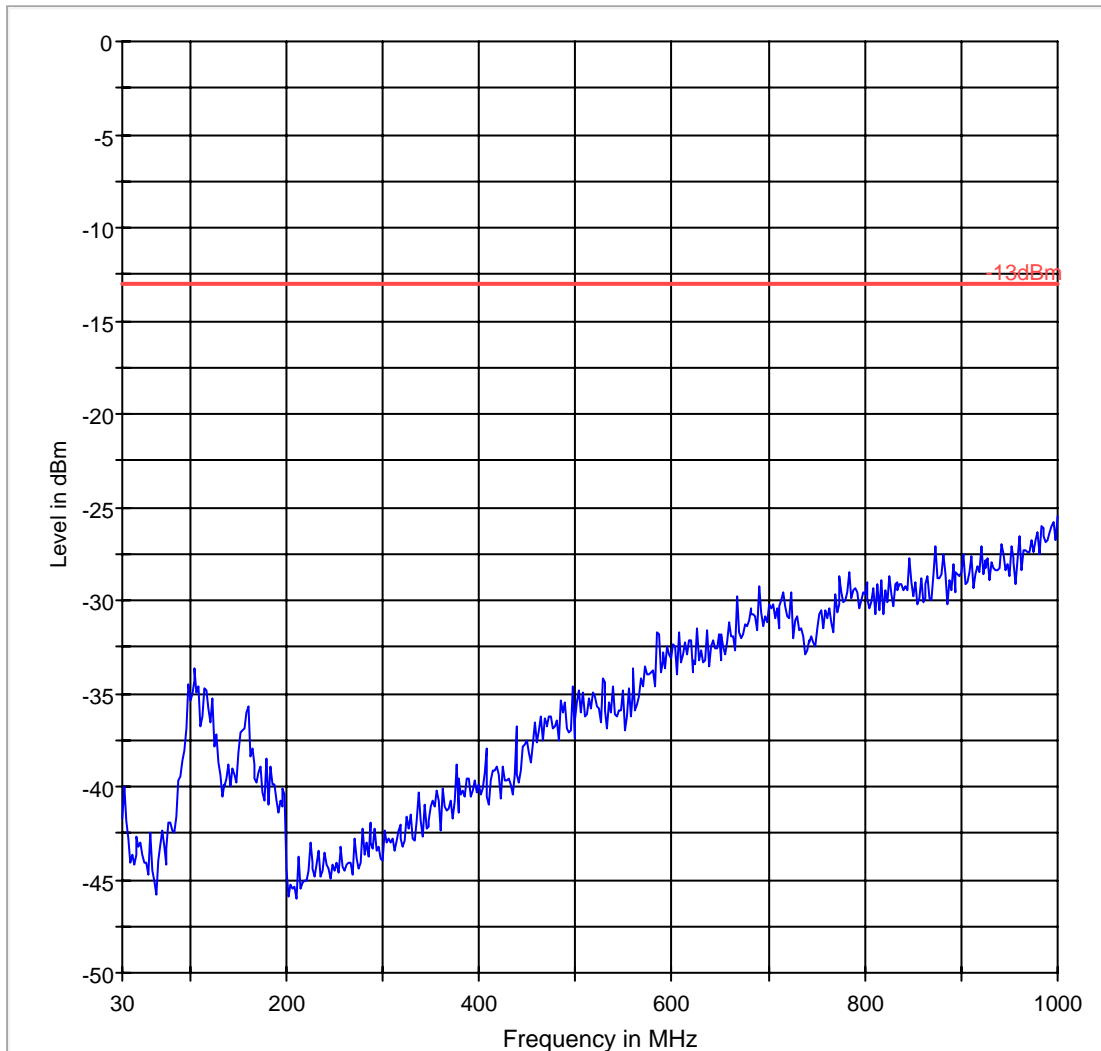

RADIATED SPURIOUS EMISSIONS (GSM-850)TX: 1GHz - 9GHz

Channel 128


Spurious emission limit -13dBm

FCC 22 1-9GHz Low Channel

1 / 1

FCC 22 1-9GHz Low Channel

FCC 22 1-9GHz

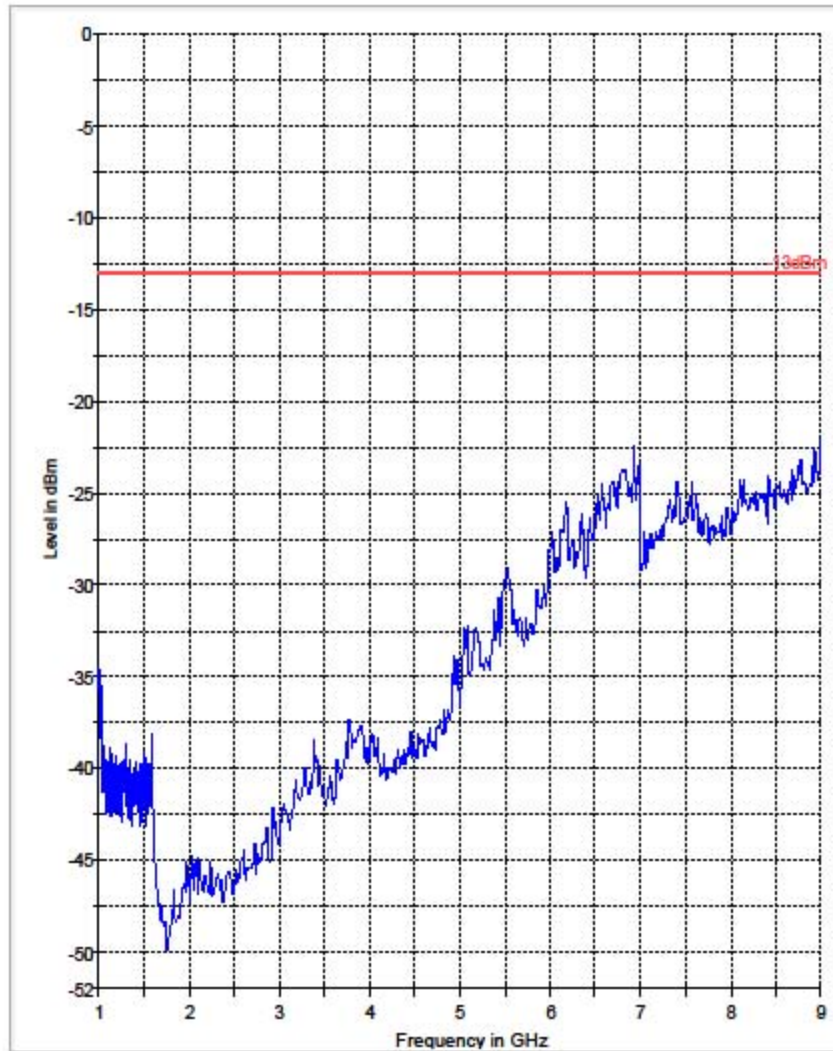

RADIATED SPURIOUS EMISSIONS (GSM-850)TX: 1GHz - 9GHz

Channel 190


Spurious emission limit -13dBm

FCC 22 1-9GHz Mid Channel

1 / 1

FCC 22 1-9GHz Mid Channel

FCC 22 1-9GHz

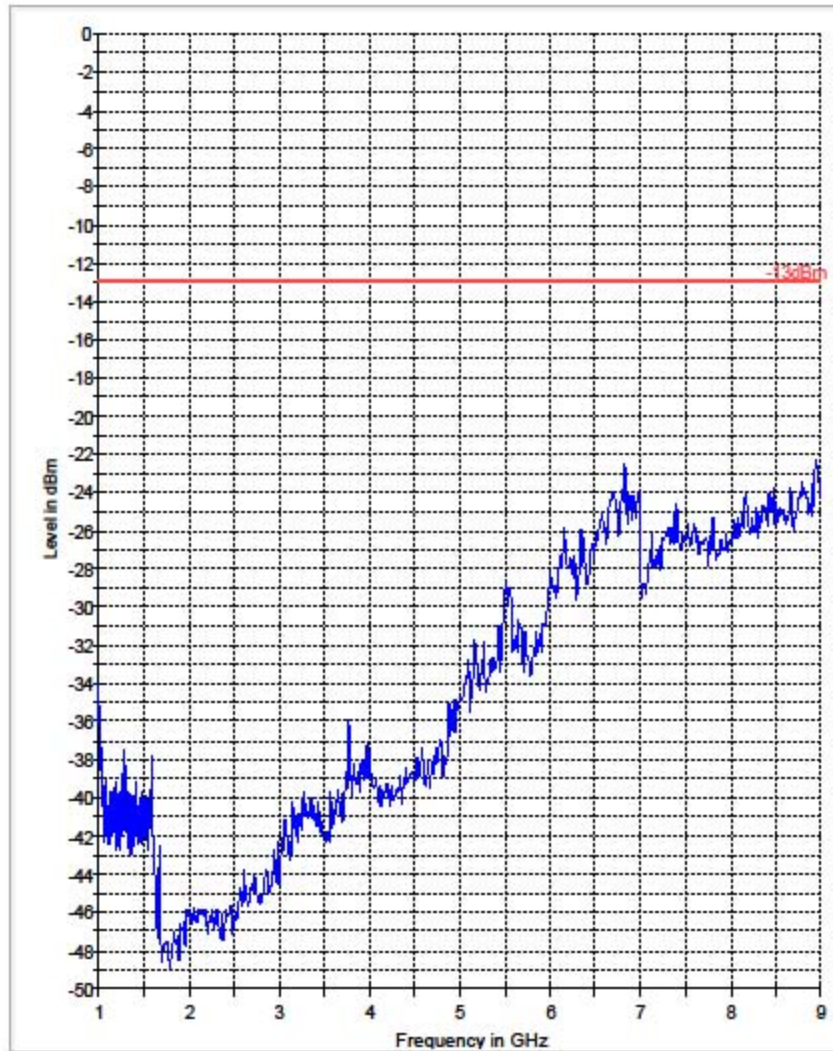

RADIATED SPURIOUS EMISSIONS (GSM-850)TX: 1GHz - 9GHz

Channel 251


Spurious emission limit -13dBm

FCC 22 1-9GHz High Channel

1 / 1

FCC 22 1-9GHz High Channel

FCC 22 1-9GHz

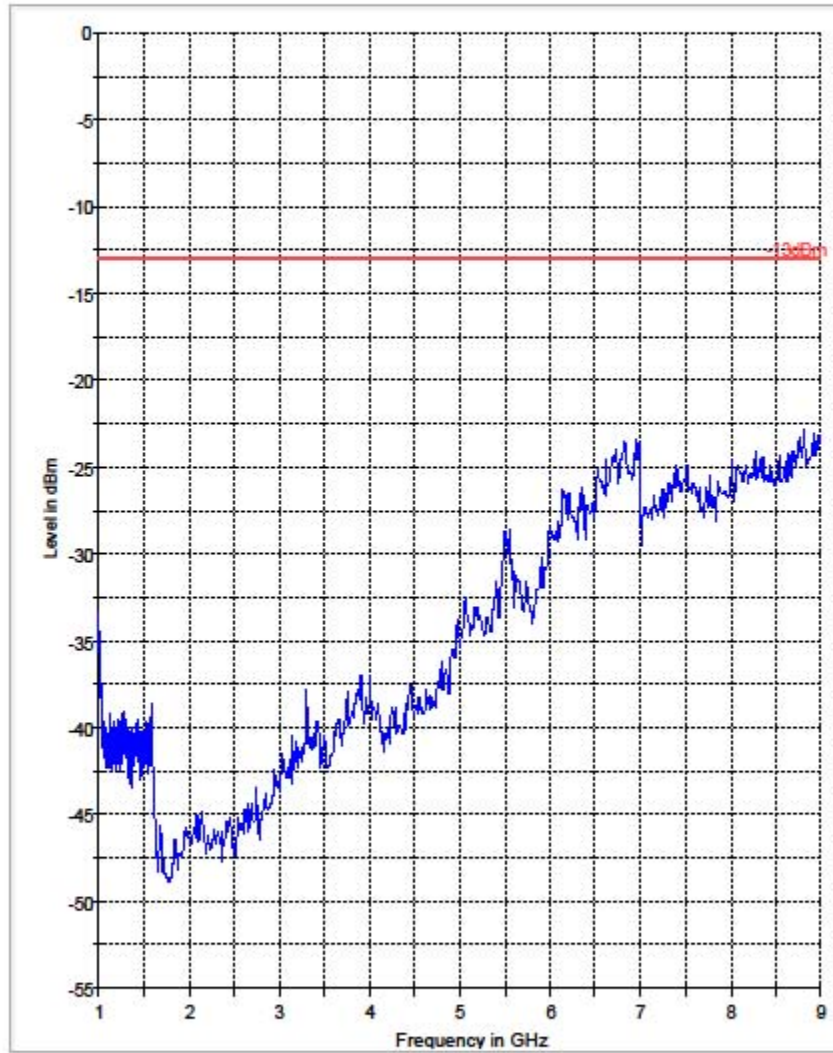

5.2.4.2 Test Results Transmitter Spurious Emission PCS-1900:

Harmonic	Tx ch-512 Freq.(MHz)	Level (dBm)	Tx ch-661 Freq. (MHz)	Level (dBm)	Tx ch-810 Freq. (MHz)	Level (dBm)
2	3700.4	NF	3760	NF	3819.6	NF
3	5550.6	NF	5640	NF	5729.4	NF
4	7400.8	NF	7520	NF	7639.2	NF
5	9251	NF	9400	NF	9549	NF
6	11101.2	NF	11280	NF	11458.8	NF
7	12951.4	NF	13160	NF	13368.6	NF
8	14801.6	NF	15040	NF	15278.4	NF
9	16651.8	NF	16920	NF	17188.2	NF
10	18502	NF	18800	NF	19098	NF
NF = NOISE FLOOR						

RADIATED SPURIOUS EMISSIONS(PCS 1900) TX: 30MHz - 1GHz

Channel 512


EUT Information

Description:

EUT Name: MTSMC_E1
Manufacturer: Multitech
Serial Number:
Hardware Rev:
Software Rev:
Comment: AC

FCC 24 30-1000MHz Low Channel

FCC 22 30-1000MHz

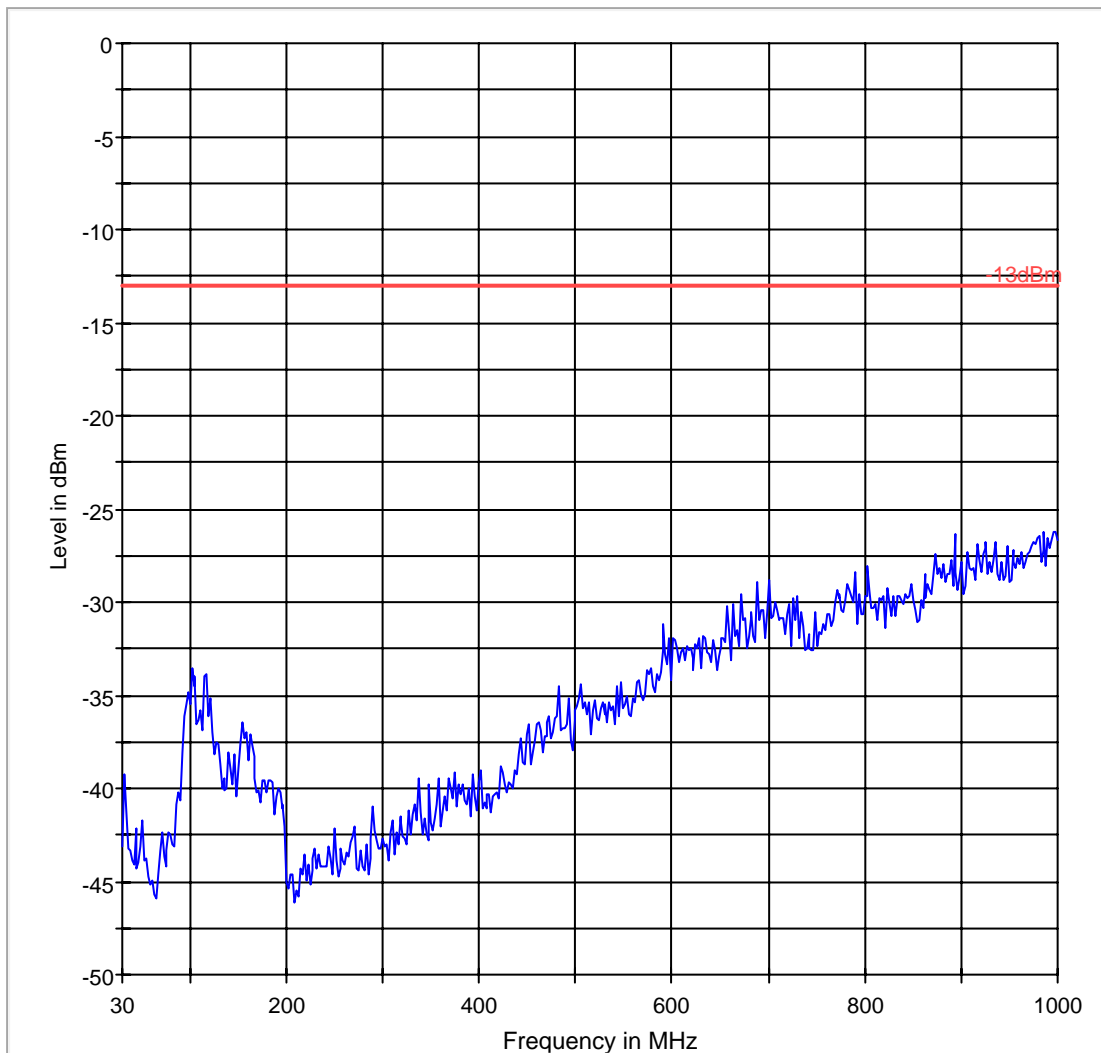

**RADIATED SPURIOUS EMISSIONS(PCS 1900) TX: 30MHz - 1GHz
Channel 661**


EUT Information

Description:

EUT Name: MTSMC_E1
Manufacturer: Multitech
Serial Number:
Hardware Rev:
Software Rev:
Comment: AC

FCC 24 30-1000MHz Mid Channel

FCC 22 30-1000MHz

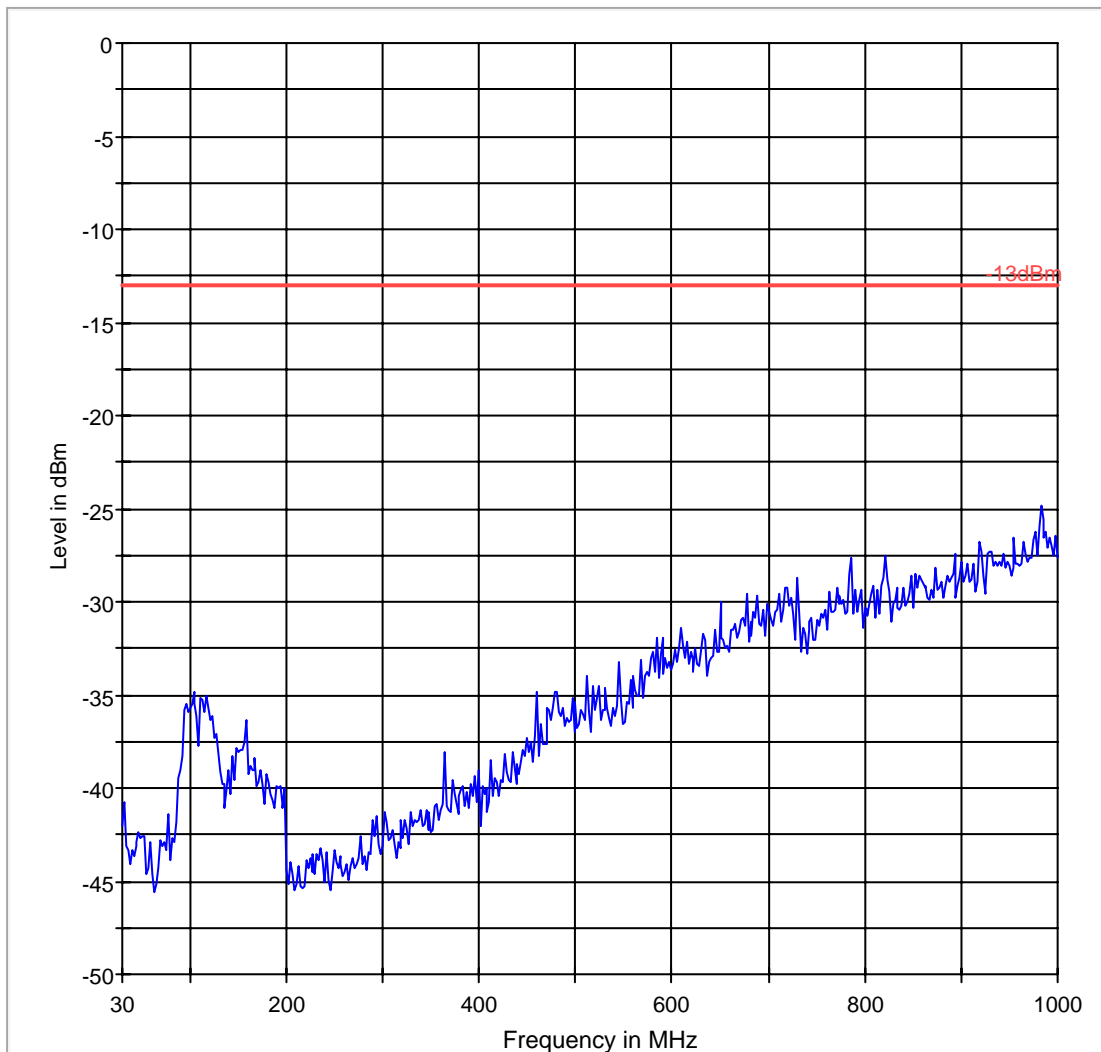

RADIATED SPURIOUS EMISSIONS(PCS 1900) TX: 30MHz - 1GHz

Channel 810


EUT Information

Description:

EUT Name: MTSMC_E1
Manufacturer: Multitech
Serial Number:
Hardware Rev:
Software Rev:
Comment: AC

FCC 24 30-1000MHz High Channel

FCC 22 30-1000MHz

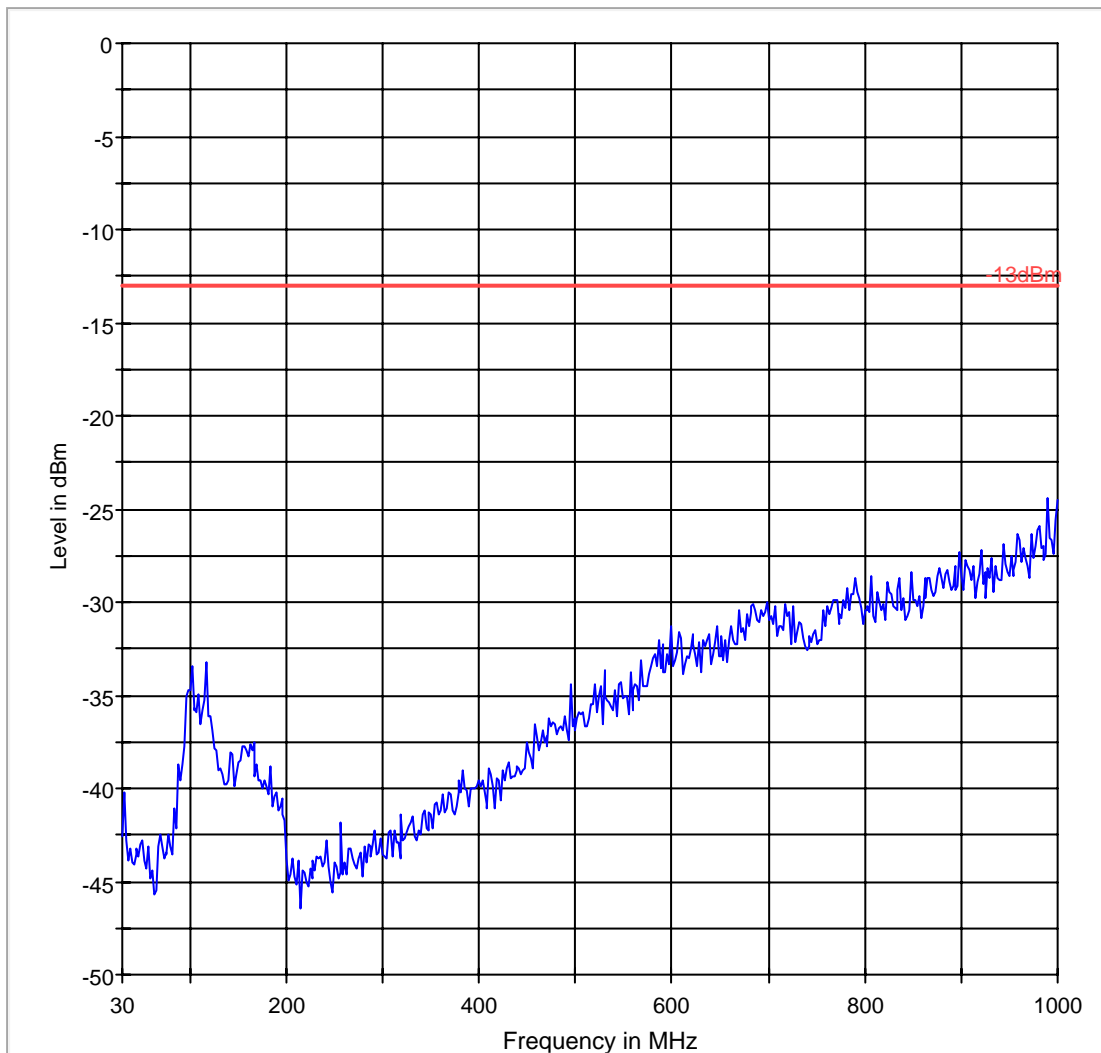


**RADIATED SPURIOUS EMISSIONS(PCS 1900) TX: 1GHz - 18GHz
Channel 512**

FCC 24 1-18GHz Low Channel

1 / 1

FCC 24 1-18GHz Low Channel

FCC 24 1-18GHz

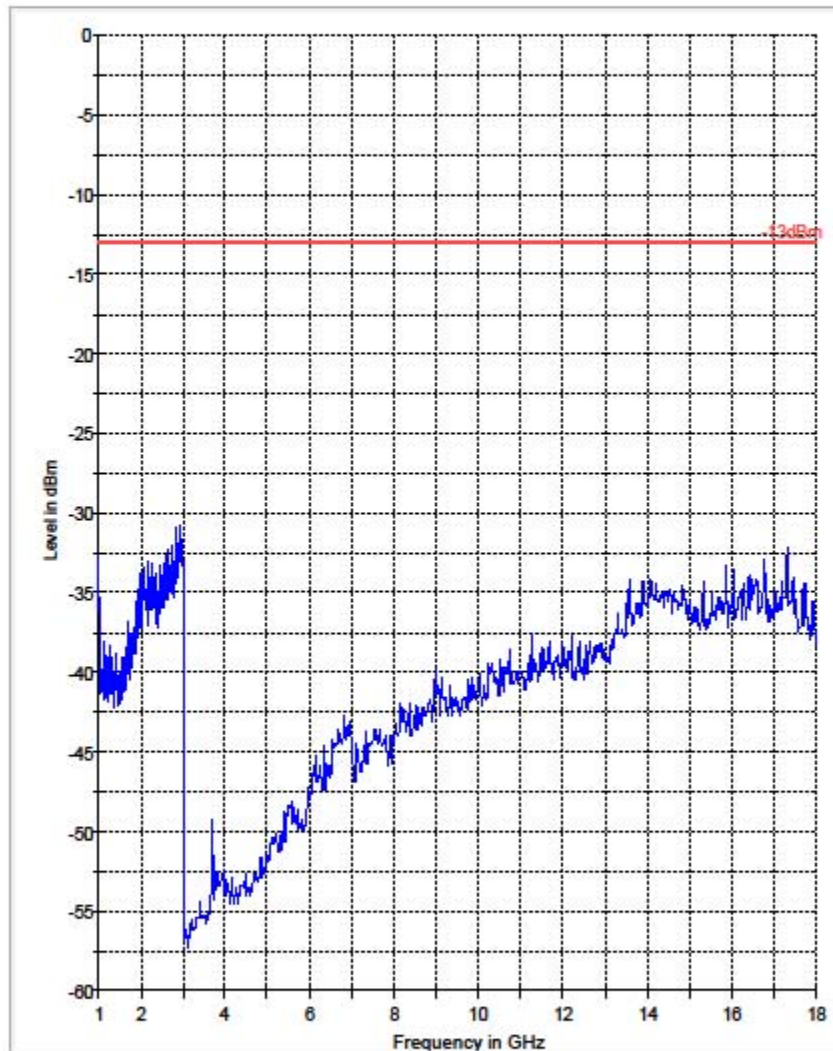


**RADIATED SPURIOUS EMISSIONS(PCS 1900) TX: 1GHz - 18GHz
Channel 661**

FCC 24 1-18GHz Mid Channel

1 / 1

FCC 24 1-18GHz Mid Channel

FCC 24 1-18GHz

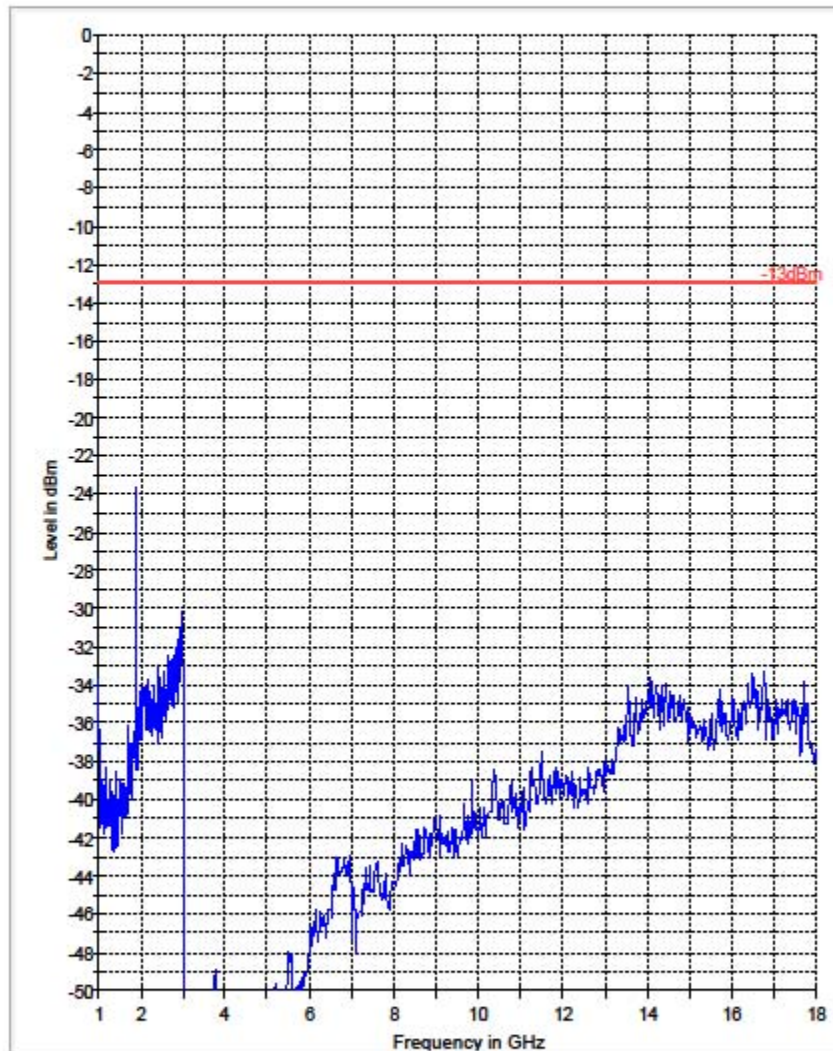


**RADIATED SPURIOUS EMISSIONS(PCS 1900) TX: 1GHz - 18GHz
Channel 810**

FCC 24 1-18GHz High Channel

1 / 1

FCC 24 1-18GHz High Channel

FCC 24 1-18GHz

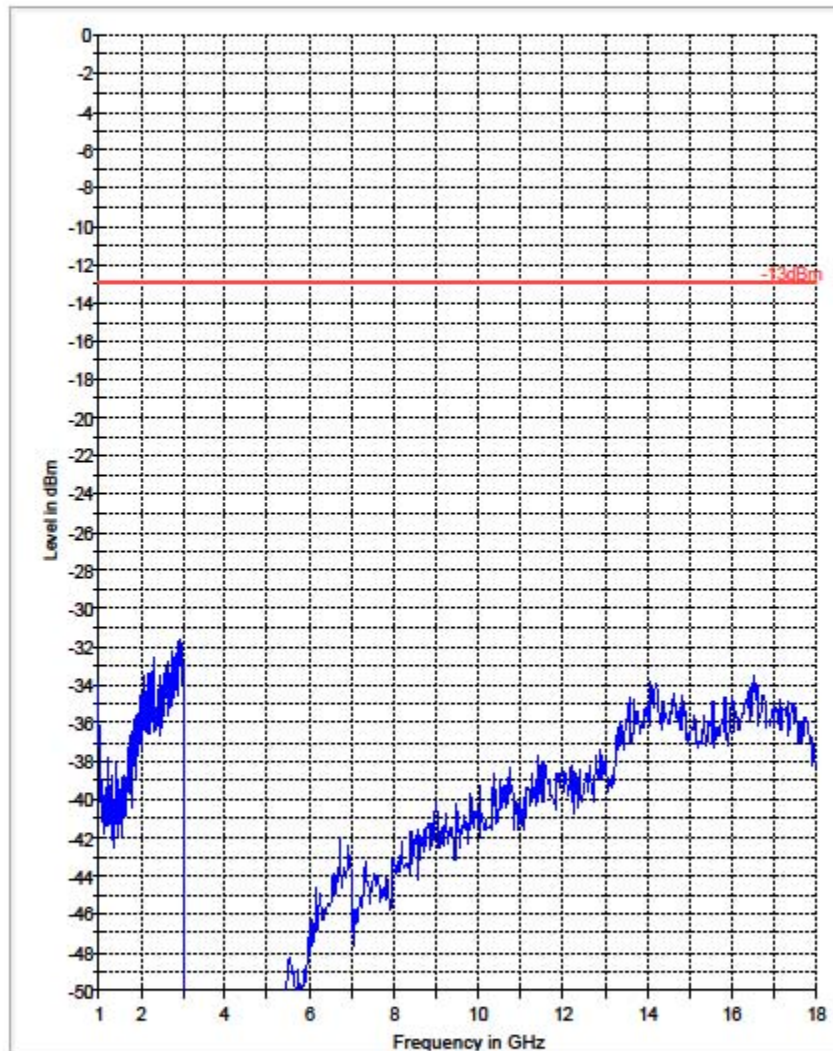




RADIATED SPURIOUS EMISSIONS(PCS 1900) TX: 18GHz – 19.1GHz

Channel 512

EUT: MTSMC
 Customer:: Multitech
 Test Mode: GSM1900 CH 512
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: SAM
 Voltage: AC
 Comments:

SWEEP TABLE: "FCC 24spuri 18-19.1G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
18.0 GHz	19.1 GHz	Average	Coupled	1 MHz	DUMMY-DBM

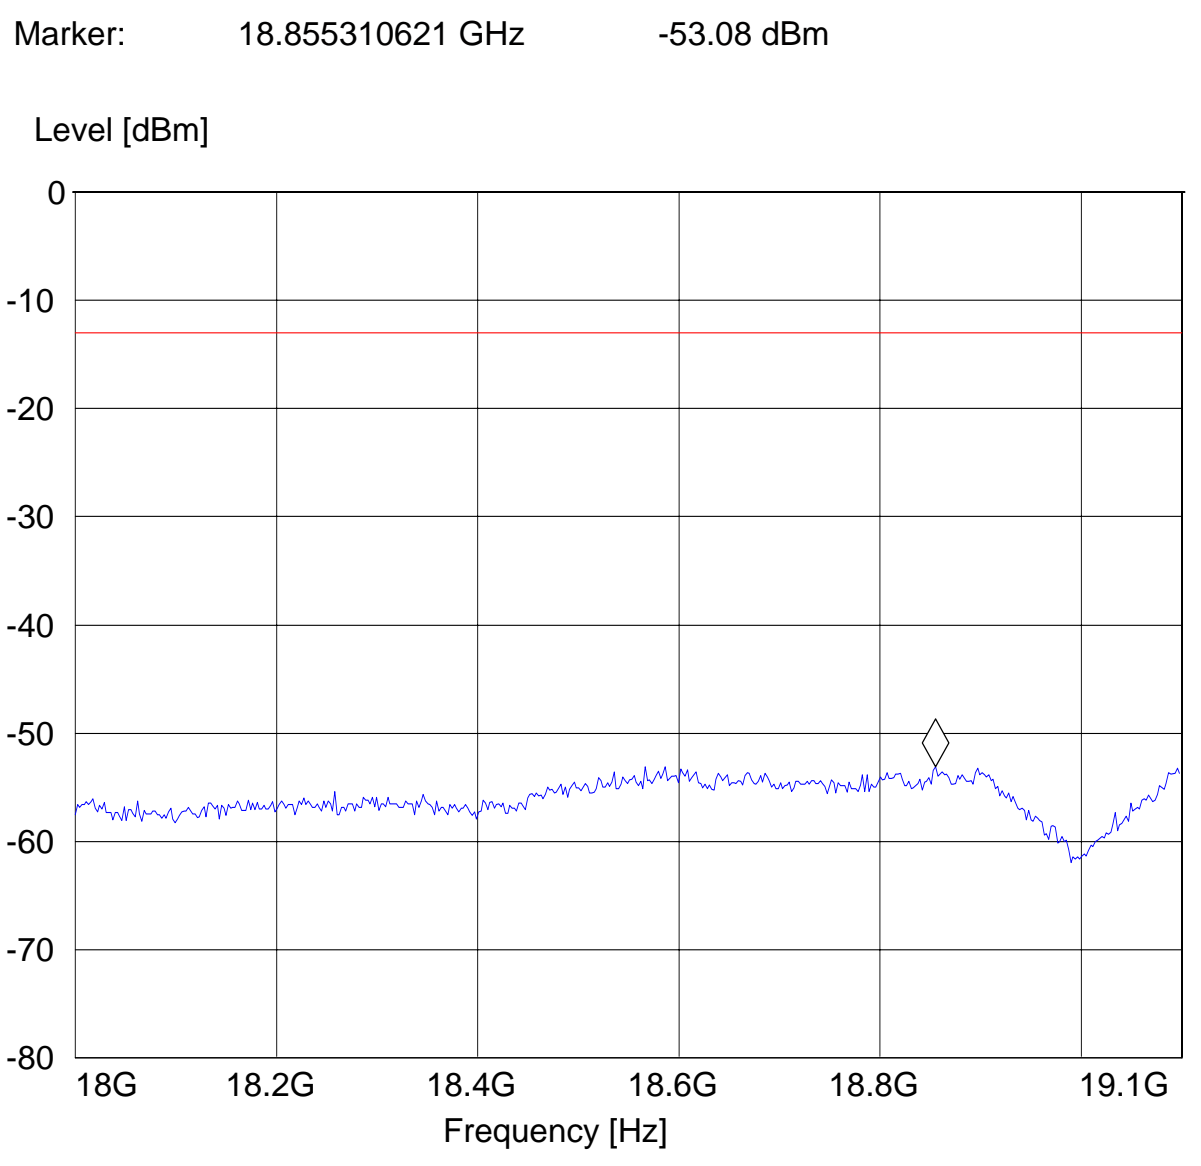




RADIATED SPURIOUS EMISSIONS(PCS 1900) TX: 18GHz – 19.1GHz

Channel 661

EUT: MTSMC
 Customer:: Multitech
 Test Mode: GSM1900 CH 661
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: SAM
 Voltage: AC
 Comments:

SWEEP TABLE: "FCC 24spuri 18-19.1G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
18.0 GHz	19.1 GHz	Average	Coupled	1 MHz	DUMMY-DBM

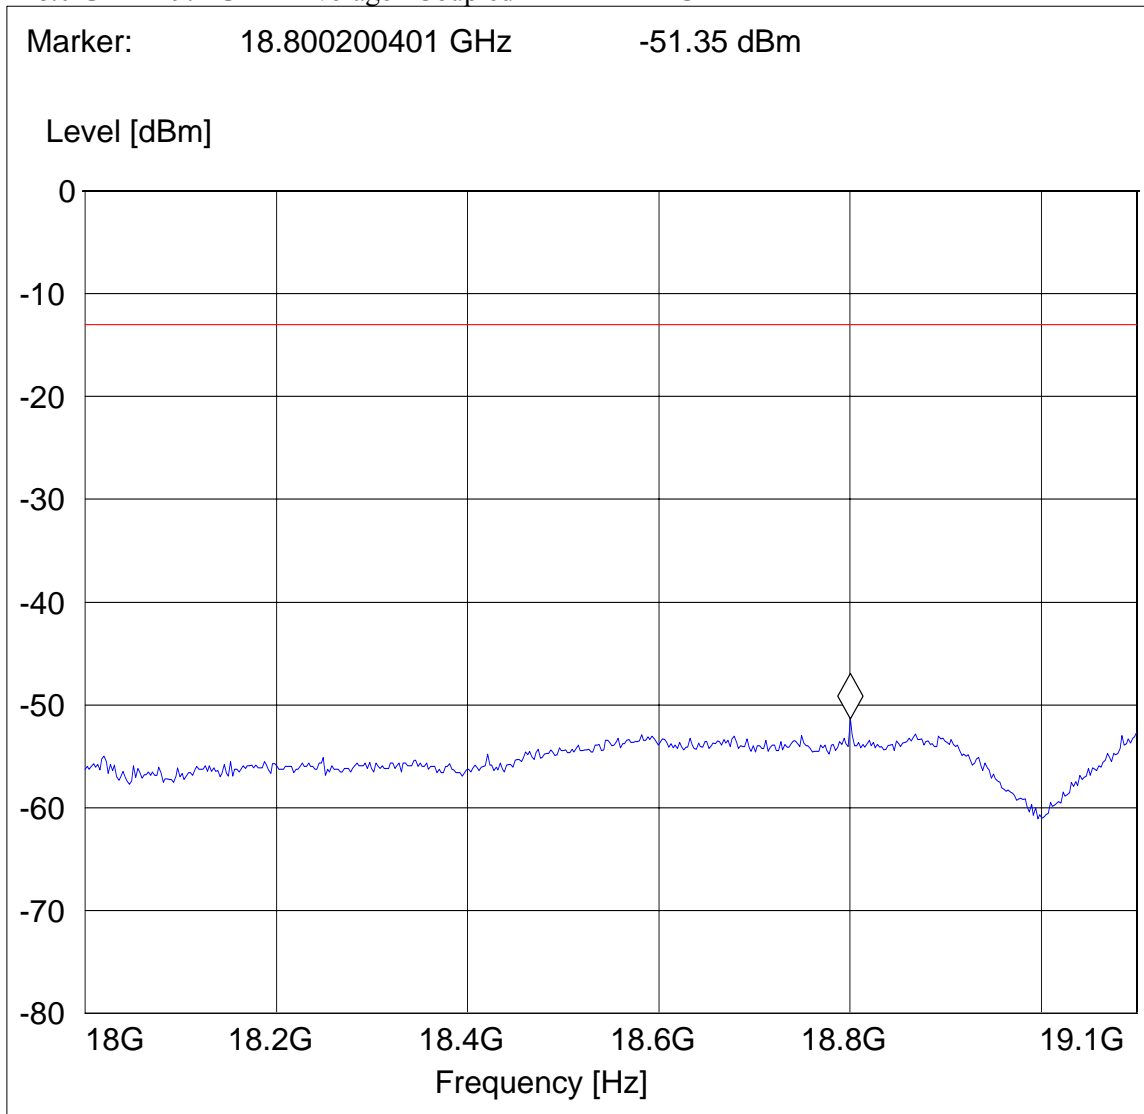



RADIATED SPURIOUS EMISSIONS(PCS 1900) TX: 18GHz – 19.1GHz


Channel 810

EUT: MTSMC
 Customer:: Multitech
 Test Mode: GSM1900 CH 810
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: SAM
 Voltage: AC
 Comments:

SWEEP TABLE: "FCC 24spuri 18-19.1G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
18.0 GHz	19.1 GHz	Average	Coupled	1 MHz	DUMMY-DBM

Marker: 18.55991984 GHz -52.68 dBm

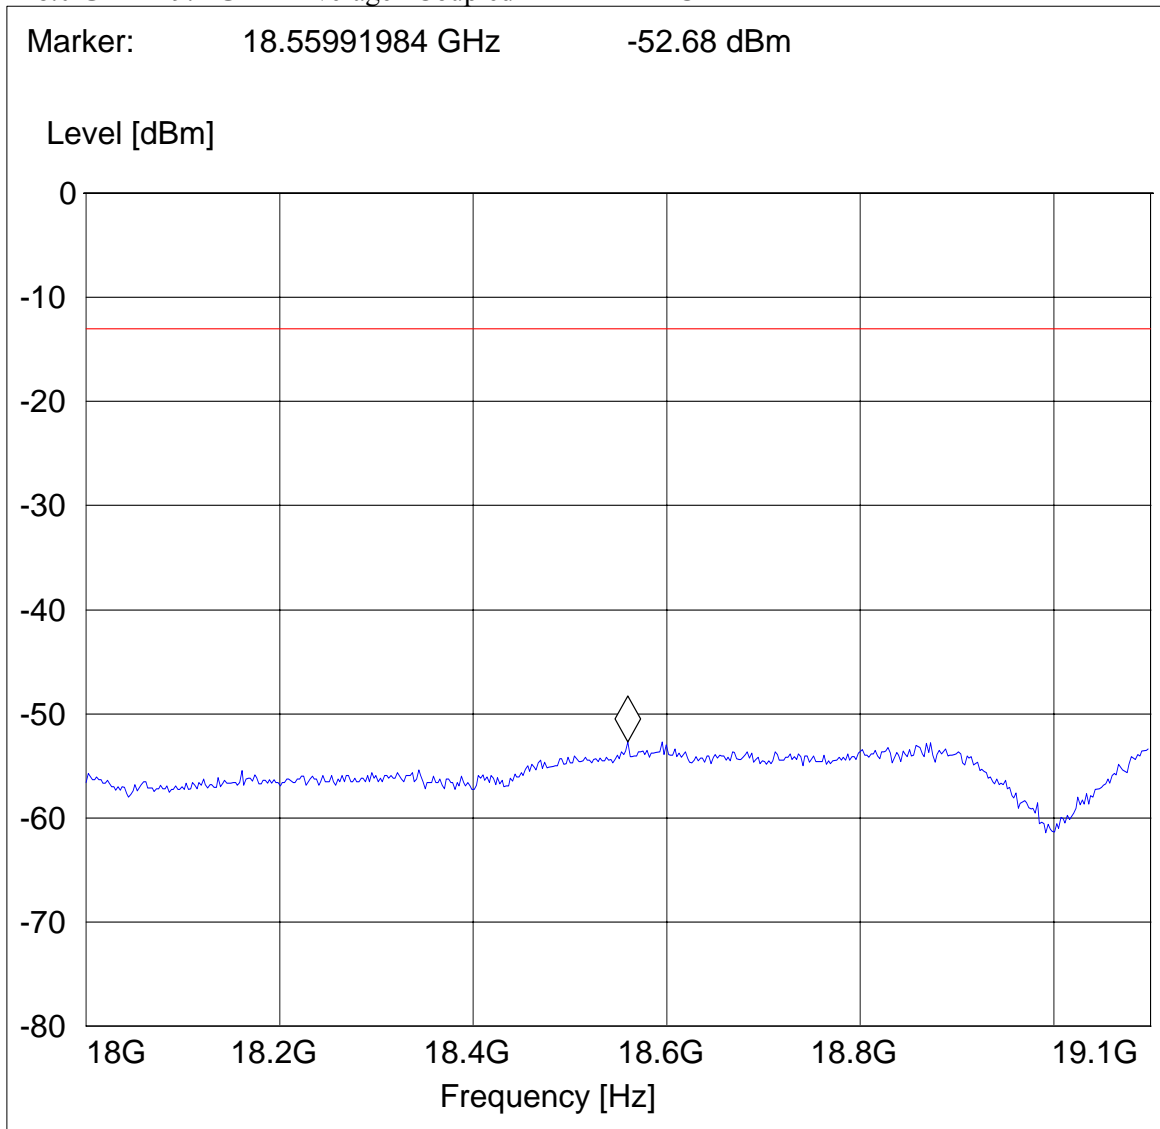

5.2.5 RECEIVER RADIATED EMISSIONS**§ 2.1053 / RSS-132 & 133****NOTE:**

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3GHz and 26.5GHz very short cable connections to the antenna was used to minimize the noise level.

Limits**SUBCLAUSE § RSS-133**

Frequency (MHz)	Field strength ($\mu\text{V}/\text{m}$)	Measurement distance (m)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

No significant emissions measurable. Plots reported here represent the worse case emissions.

5.2.5.1 Test Results Receiver Spurious Emission: 30M-1GHz

This plot is valid for low, mid & high channels (worst-case plot)

Test


1 / 1

EUT Information

Description:
EUT Name: MTSMC_E1
Manufacturer: Multitech
Serial Number:
Hardware Rev:
Software Rev:
Comment: AC

Test

FCC 15 30-1000MHz

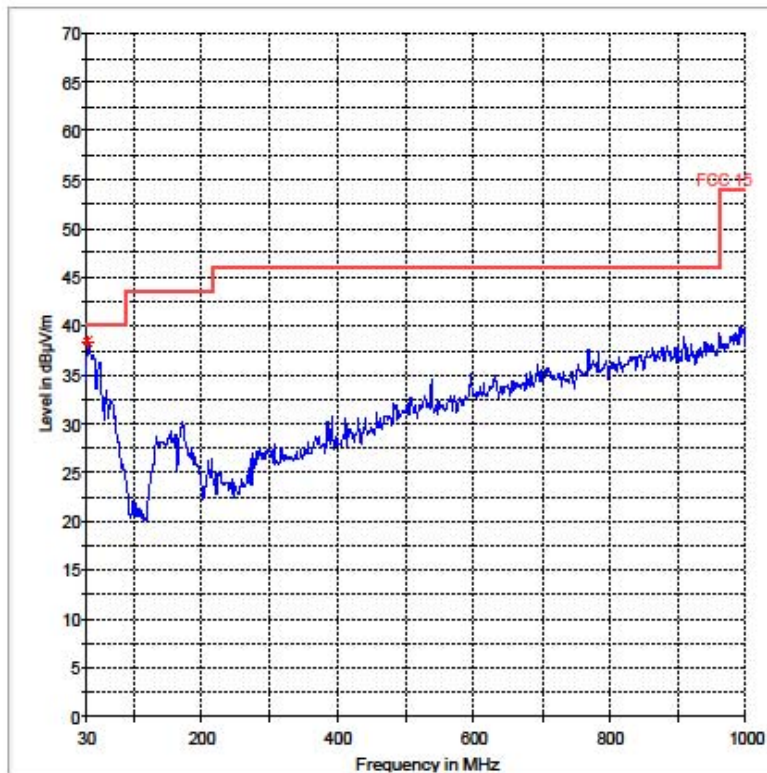

Receiver Spurious Emission GSM850 IDLE: 1GHz - 18GHz
This plot is valid for low, mid & high channels (worst-case plot)

Test

1 / 1

EUT Information

Description:

EUT Name:


MTSMC_E1

Manufacturer:

Multitech

Test

FCC 15 1-18GHz

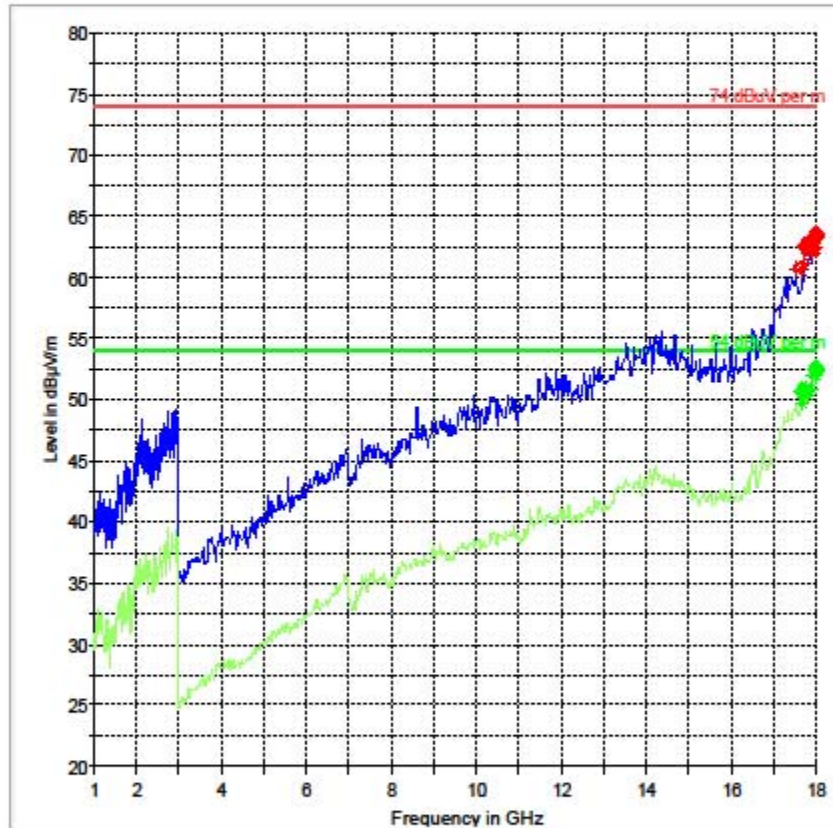

- 74 dBµV per m.LimitLine
- 54 dBµV per m.LimitLine
- Preview Result 1
- Data Reduction 1 [2]
- Final Measurement Result 2
- Preview Result 2
- Data Reduction 2 [2]
- Final Measurement Result 1

6 List of Equipment

No	Instrument/Ancillary	Type	Manufacturer	Serial No.	Cal Due	Interval
01	Spectrum Analyzer	ESIB 40	Rohde & Schwarz	100107	May 2009	1 year
02	Spectrum Analyzer	FSEM 30	Rohde & Schwarz	100017	May 2009	1 year
03	Signal Generator	SMY02	Rohde & Schwarz	836878/011	May 2009	1 year
04	Power-Meter	NRVD	Rohde & Schwarz	0857.8008.02	May 2009	1 year
05	Biconilog Antenna	3141	EMCO	0005-1186	June 2009	1 year
06	Horn Antenna (1-18GHz)	SAS-200/571	AH Systems	325	June 2009	1 year
07	Horn Antenna (18-26.5GHz)	3160-09	EMCO	1240	June 2009	1 year
08	Power Splitter	11667B	Hewlett Packard	645348	n/a	n/a
09	Climatic Chamber	VT4004	Voltsch	G1115	May 2009	1 year
10	High Pass Filter	5HC2700	Trilithic Inc.	9926013	n/a	n/a
11	High Pass Filter	4HC1600	Trilithic Inc.	9922307	n/a	n/a
12	Pre-Amplifier	JS4-00102600	Miteq	00616	May 2009	1 year
13	Power Sensor	URV5-Z2	Rohde & Schwarz	DE30807	May 2009	1 year
14	Digital Radio Comm. Tester	CMD-55	Rohde & Schwarz	847958/008	May 2009	1 year
15	Universal Radio Comm. Tester	CMU 200	Rohde & Schwarz	832221/06	May 2009	1 year
16	LISN	ESH3-Z5	Rohde & Schwarz	836679/003	May 2009	1 year
17	Loop Antenna	6512	EMCO	00049838	July 2010	2 years

7 References

Title 47—Telecommunication, CHAPTER I--FEDERAL COMMUNICATIONS COMMISSION, PART 2--FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS October 1, 2001.

Title 47—Telecommunication, CHAPTER I--FEDERAL COMMUNICATIONS COMMISSION, PART 22 PUBLIC MOBILE SERVICES October 1, 1998.


FCC Report and order 02-229 September 24, 2002.

Title 47—Telecommunication, CHAPTER I--FEDERAL COMMUNICATIONS COMMISSION, PART 24 PERSONAL COMMUNICATIONS SERVICES October 1, 1998.

ANSI / TIA-603-C-2004 Land Mobile FM or PM Communications Equipment Measurement and Performance Standard November 7, 2002.


8 BLOCK DIAGRAMS

Conducted Testing

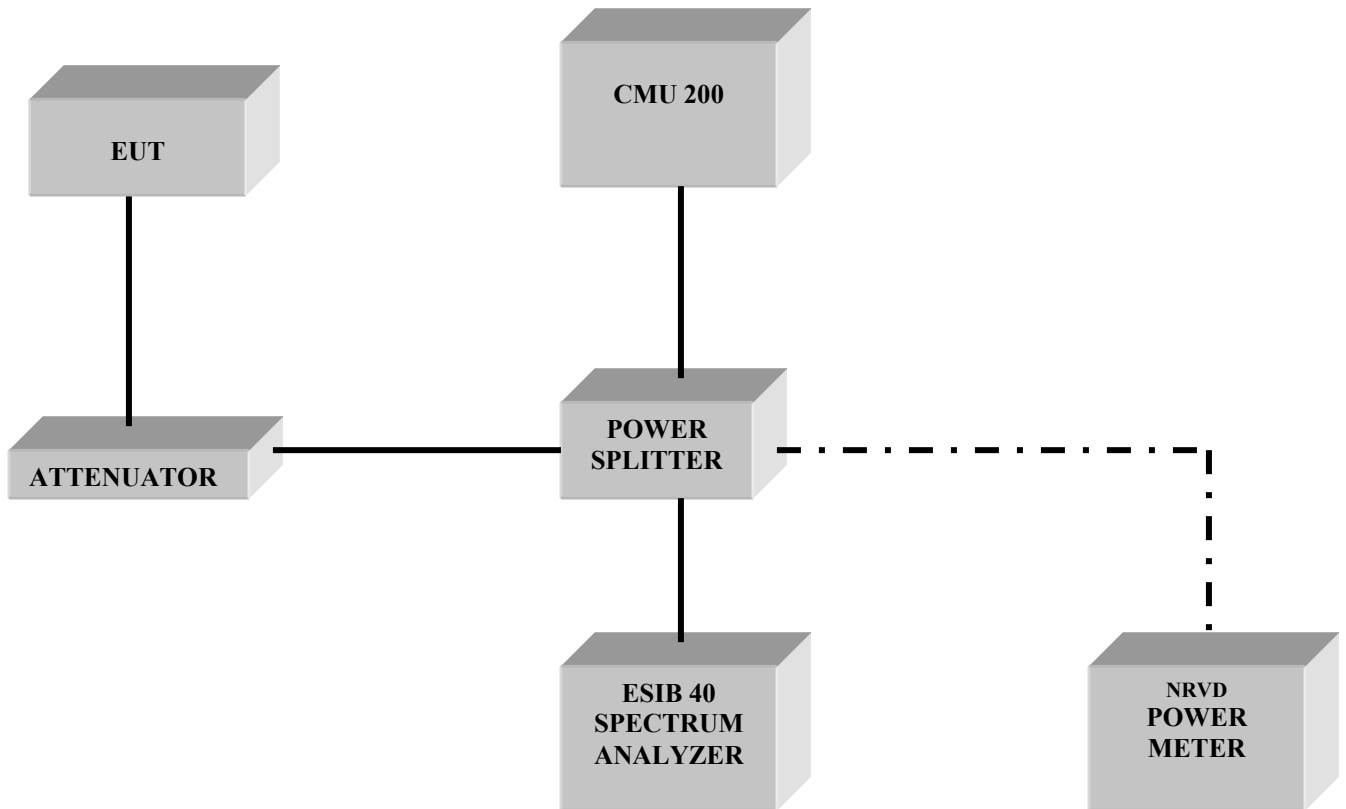

Radiated Testing

ANECHOIC CHAMBER

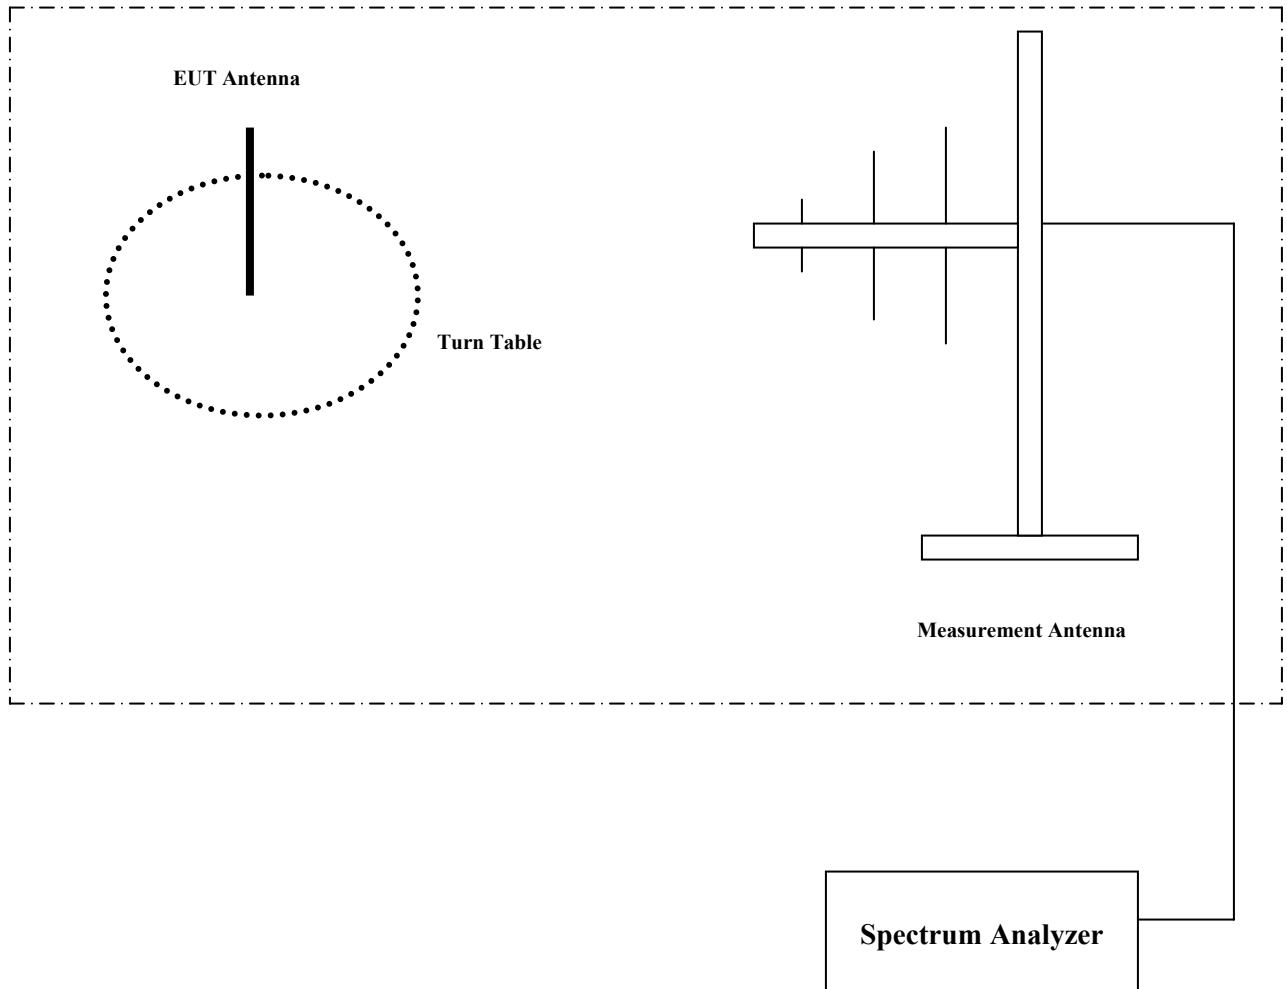

9 Revision History

Date	Report Name	Changes to report	Report prepared by
2009-09-29	EMC_MULTI_041_09001_FCC22_24	Original Document	Josie Sabado
2009-10-01	EMC_MULTI_041_09001_FCC22_24_rev1	Added MTSMC-E1 to the model #. Updated EGPRS information/data. Replaces previous report number	Josie Sabado