



## STC Test Report

Date : 2012-08-07

Page 1 of 50

No. : HM167758

**Applicant (MUE001):** Musical Electronics Limited  
Flat H, J, K, 12/F, World Tech Centre,  
95 How Ming Street, Kwun Tong, Kowloon, Hong Kong

**Manufacturer:** Musical Electronics (Qing Yuan) Limited  
Tai He Industrail Park, Qing Xin Country, Qing Yuan City,  
Guang Dong Province, China.

**Description of Sample(s):** Product: Wireless Speaker  
Brand Name: Capello  
Model Number: CB350  
FCC ID: AUICB350

**Date Sample(s) Received:** 2012-07-13

**Date Tested:** 2012-07-25 to 2012-08-07

**Investigation Requested:** Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2011 and ANSI C63.4:2009 for FCC Certification.

**Conclusion(s):** The submitted product COMPLIED with the requirements of Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this Test Report.

**Remark(s):** ---

---

Dr. LEE Kam Chuen  
Authorized Signatory  
ElectroMagnetic Compatibility Department  
For and on behalf of  
The Hong Kong Standards and Testing Centre Ltd.

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong  
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from the Hong Kong Standards and Testing Centre Ltd.  
For full text of "Conditions of Issuance of Test Report", please refer to overleaf or refer to the website of Homepage.



## **STC Test Report**

Date : 2012-08-07

Page 2 of 50

No. : HM167758

### **CONTENT:**

Cover	Page 1 of 50
Content	Page 2 of 50
<b><u>1.0</u></b>	<b><u>General Details</u></b>
1.1	Test Laboratory Page 3 of 50
1.2	Equipment Under Test [EUT] Description of EUT operation Page 3 of 50
1.3	Date of Order Page 3 of 50
1.4	Submitted Sample Page 3 of 50
1.5	Test Duration Page 3 of 50
1.6	Country of Origin Page 3 of 50
1.7	RF Module Details Page 4 of 50
1.8	Antenna Details Page 4 of 50
<b><u>2.0</u></b>	<b><u>Technical Details</u></b>
2.1	Investigations Requested Page 5 of 50
2.2	Test Standards and Results Summary Page 5 of 50
2.3	Table for Test Modes Page 6 of 50
<b><u>3.0</u></b>	<b><u>Test Results</u></b>
3.1	Emission Page 7 – 43 of 50
<b><u>Appendix A</u></b>	
List of Measurement Equipment	Page 44 of 50
<b><u>Appendix B</u></b>	
Ancillary Equipment	Page 44 of 50
<b><u>Appendix C</u></b>	
Photographs	Page 45 - 50 of 50

### **The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong  
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)



## STC Test Report

Date : 2012-08-07

Page 3 of 50

No. : HM167758

### **1.0 General Details**

#### **1.1 Test Laboratory**

The Hong Kong Standards and Testing Centre Ltd.  
EMC Laboratory  
10 Dai Wang Street, Taipo Industrial Estate  
New Territories, Hong Kong

#### **1.2 Equipment Under Test [EUT] Description of Sample(s)**

Product:	Wireless Speaker
Manufacturer:	Musical Electronics (Qing Yuan) Limited Tai He Industrail Park, Qing Xin Country, Qing Yuan City, Guang Dong Province, China.
Brand Name:	Capello
Model Number:	CB350
Input Voltage:	The AC/DC Adaptor used for the tests was provided by the applicant with the following details: Two pins (Live / Neutral) only adaptor, Model Number: BI10-120100-AdU, Input: 100- 240Va.c. 50/60Hz 0.5A, Output: 12Vd.c. 1A. Or USB power jack
Output:	5V 0.5A for Charge any device with a USB jack.

##### **1.2.1 Description of EUT Operation**

The Equipment Under Test (EUT) is a Musical Electronics Limited, Wireless Speaker, it is Audio System, modulation by IC; and type is frequency hopping speed spectrum Modulation.

#### **1.3 Date of Order**

2012-07-13

#### **1.4 Submitted Sample(s):**

1 Sample

#### **1.5 Test Duration**

2012-07-25 to 2012-08-07

#### **1.6 Country of Origin**

China

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)



## STC Test Report

Date : 2012-08-07

Page 4 of 50

No. : HM167758

### **1.7 RF Module Details**

Module Model Number:	BM160
Module FCC ID:	N/A
Module Transmission Type:	Bluetooth V2.1+EDR
Modulation:	FHSS (GFSK / $\pi/4$ -DQPSK / 8DPSK)
Data Rates:	1Mbps: GFSK 2 Mbps: $\pi/4$ -DQPSK 3 Mbps: 8DPSK
Frequency Range:	2400-2483.5MHz
Carrier Frequencies:	2402MHz – 2480MHz

Module Specification (specification provided by manufacturer)

### **1.8 Antenna Details**

Antenna Type:	Inverted-F Antenna (PCB Layout)
Antenna Gain:	2.12dBi

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date : 2012-08-07

Page 5 of 50

No. : HM167758

### **2.0 Technical Details**

#### **2.1 Investigations Requested**

Perform Electromagnetic Interference measurements in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2011 Regulations and ANSI C63.4:2009 for FCC Certification.

#### **2.2 Test Standards and Results Summary Tables**

EMISSION Results Summary						
Test Condition	Test Requirement	Test Method	Class / Severity	Test Result		
				Pass	Fail	N/A
Output Power of Fundamental Emissions	FCC 47CFR 15.247(b)(1)	ANSI C63.4:2009	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
RF Conducted Spurious Emission	FCC 47CFR 15.247(c)	N/A	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Radiated Spurious Emissions	FCC 47CFR 15.209	ANSI C63.4:2009	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
AC Mains Conducted Emissions	FCC 47CFR 15.207	N/A	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Number of Operating Channel	FCC 47CFR 15.247(a)(2)(b)(1)	N/A	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Band-edge compliance of Conducted Emission	FCC 47CFR 15.247(c)	N/A	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Pseudorandom Hopping Algorithm	FCC 47CFR 15.247(a)(1)	N/A	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Time of Occupancy	FCC 47CFR 15.247(a)(1)(iii)	N/A	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
20dB Bandwidth	FCC 47CFR 15.247(a)(2)	N/A	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Hopping Channel Separation	FCC 47CFR 15.247(a)(1)	N/A	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Antenna requirement	FCC 47CFR 15.203	N/A	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Note: N/A – Not Applicable

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date : 2012-08-07

Page 6 of 50

No. : HM167758

### 2.3 Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate in the table below is the worst case rate with respect to the specific test item.

Investigation has been done on all the possible configurations for searching the worst cases.

The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate
Max. Conducted Output Power	GFSK / $\pi/4$ -DQPSK / 8DPSK	1MBps / 2MBps / 3MBps
Hopping Channel Separation	8DPSK	3MBps
Number of Hopping Frequency	8DPSK	3MBps
Dwell Time	DH1 / DH3 / DH5	3MBps
Radiated Emissions Below 1GHz	GFSK	1MBps
Radiated Emission Above 1GHz	GFSK	1MBps
Band Edge Emissions	GFSK / $\pi/4$ -DQPSK / 8DPSK	1MBps / 2MBps / 3MBps

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date : 2012-08-07

Page 7 of 50

No. : HM167758

### **3.0 Test Results**

#### **3.1 Emission**

##### **3.1.1 Maximum Peak Output Power**

Test Requirement:	FCC 47CFR 15.247(b)(1)
Test Method:	N/A
Test Date:	2012-07-30
Mode of Operation:	Bluetooth Communication mode (Fundamental Power)


#### **Test Method:**

The RF output of the EUT was connected to the spectrum analyzer. All the attenuation or cable loss will be added to the measured maximum output power. The results are recorded in dBm.

#### **Spectrum Analyzer Setting:**

RBW = 3 MHz, VBW = 3MHz, Sweep = Auto, Span = 10MHz  
Detector = Peak, Trace = Max. hold

#### **Test Setup:**

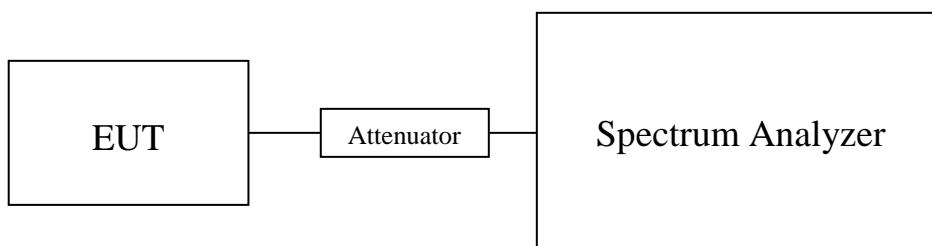

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date : 2012-08-07

Page 8 of 50

No. : HM167758

### **Limits for Peak Output Power of Fundamental & Harmonics Emissions [FCC 47CFR 15.247]:**

The maximum peak output power shall not exceeded the following limits:  
For frequency hopping systems employing at least 75 hopping channels: 1 Watt  
For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 Watts  
For Digital Transmission systems in 2400-2483.5 MHz Band: 1 Watt

### **Results of Bluetooth Communication mode (GFSK) (Fundamental Power): Pass Maximum conducted output power**

Transmitter Frequency (MHz)	Maximum conducted output power (mW)
2402	1.98

Transmitter Frequency (MHz)	Maximum conducted output power (mW)
2441	1.58

Transmitter Frequency (MHz)	Maximum conducted output power (mW)
2480	1.32

### **Results of Bluetooth Communication mode ( $\pi/4$ -DQPSK) (Fundamental Power): Pass Maximum conducted output power**

Transmitter Frequency (MHz)	Maximum conducted output power (mW)
2402	1.02

Transmitter Frequency (MHz)	Maximum conducted output power (mW)
2441	0.85

Transmitter Frequency (MHz)	Maximum conducted output power (mW)
2480	0.78

### **Results of Bluetooth Communication mode (8 DPSK) (Fundamental Power): Pass Maximum conducted output power**

Transmitter Frequency (MHz)	Maximum conducted output power (mW)
2402	1.04

Transmitter Frequency (MHz)	Maximum conducted output power (mW)
2441	0.89

Transmitter Frequency (MHz)	Maximum conducted output power (mW)
2480	0.79

Limit: 0.125W (125mW)

Calculated measurement uncertainty : 30MHz to 1GHz 1.7dB  
1GHz to 18GHz 1.7dB

### **The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong  
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)





## STC Test Report

Date : 2012-08-07

Page 9 of 50

No. : HM167758

### **3.1.2 Radiated Spurious Emissions**

Test Requirement:	FCC 47CFR 15.209
Test Method:	ANSI C63.4:2009
Test Date:	2012-07-30
Mode of Operation:	Bluetooth Communication mode / Aux in connected to iPod with charging function (Charging up iPod)

#### **Test Method:**

The sample was placed 0.8m above the ground plane of semi-anechoic Chamber\*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

\* Semi-anechoic chamber located on the G/F of "The Hong Kong Standards and Testing Centre Ltd." with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 607756.

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date : 2012-08-07

Page 10 of 50

No. : HM167758

### **Spectrum Analyzer Setting:**

9KHz – 30MHz (Pk & Av)

RBW: 10kHz  
VBW: 30kHz  
Sweep: Auto  
Span: Fully capture the emissions being measured  
Trace: Max. hold


30MHz – 1GHz (QP)

RBW: 120kHz  
VBW: 120kHz  
Sweep: Auto  
Span: Fully capture the emissions being measured  
Trace: Max. hold

Above 1GHz (Pk & Av)

RBW: 3MHz  
VBW: 3MHz  
Sweep: Auto  
Span: Fully capture the emissions being measured  
Trace: Max. hold

### **Test Setup:**

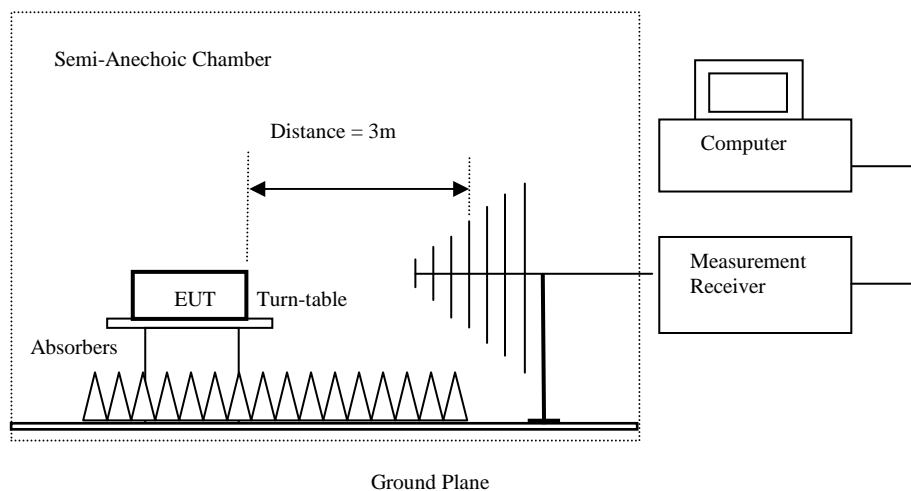

Absorbers placed on top of the ground plane are for measurements above 1000MHz only.

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date : 2012-08-07

Page 11 of 50

No. : HM167758

### Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

Frequency Range [MHz]	Quasi-Peak Limits [ $\mu\text{V/m}$ ]
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

### Result of Bluetooth Communication mode – CH0 (9kHz – 30MHz): Pass

Field Strength of Spurious Emissions						
Average Value						
Frequency	Measured	Correction	Field	Field	Limit	E-Field
MHz	Level	Factor	Strength	Strength	$\mu\text{V/m}$	Polarity
	dB $\mu\text{V}$	dB/m	dB $\mu\text{V/m}$	$\mu\text{V/m}$	$\mu\text{V/m}$	
<b>Emissions detected are more than 20 dB below the FCC Limits</b>						

### Results of Bluetooth Communication mode – CH0 (30MHz – 1000MHz): PASS

Field Strength of Spurious Emissions						
Quasi-Peak						
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
MHz	Level @3m	Factor	Strength	@3m	dB $\mu\text{V/m}$	Polarity
	dB $\mu\text{V}$	dB/m	dB $\mu\text{V/m}$	dB $\mu\text{V/m}$		
33.1	18.5	16.8	35.3	40.0	-4.7	Vertical
75.8	31.3	7.4	38.7	40.0	-1.3	Vertical
41.8	27.1	12.0	39.1	40.0	-0.9	Vertical
84.6	22.9	7.7	30.6	40.0	-9.4	Vertical
208.6	3.9	12.2	16.1	43.5	-27.4	Vertical
302.3	5.0	15.5	20.5	46.0	-25.5	Vertical

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date : 2012-08-07

Page 12 of 50

No. : HM167758

### **Result of Bluetooth Communication mode – CH0 (1GHz – 26GHz): Pass**

<b>Field Strength of Spurious Emissions</b>						
<b>Peak Value</b>						
Frequency MHz	Measured Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB $\mu$ V/m	E-Field Polarity
2402.0	68.2	28.0	96.2	--	--	Horizontal
4804.1	7.8	32.9	40.7	74.0	-33.3	Horizontal
7206.3	4.7	37.2	41.9	74.0	-32.1	Horizontal

### **Result of Bluetooth Communication mode – CH0 (1GHz – 26GHz): Pass**

<b>Field Strength of Spurious Emissions</b>						
<b>Average Value</b>						
Frequency MHz	Measured Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB $\mu$ V/m	E-Field Polarity
2402.0	48.2	28.0	76.2	--	--	Horizontal
4804.1	4.2	32.9	37.1	54.0	-16.9	Horizontal
7206.3	1.1	37.2	38.3	54.0	-15.7	Horizontal

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date : 2012-08-07

Page 13 of 50

No. : HM167758

### **Result of Bluetooth Communication mode – CH39 (9kHz – 30MHz): Pass**

Field Strength of Spurious Emissions						
Average Value						
Frequency	Measured	Correction	Field	Field	Limit	E-Field
	Level	Factor	Strength	Strength		Polarity
MHz	dB $\mu$ V	dB/m	dB $\mu$ V/m	$\mu$ V/m	$\mu$ V/m	
<b>Emissions detected are more than 20 dB below the FCC Limits</b>						

### **Results of Bluetooth Communication mode – CH39 (30MHz – 1000MHz): PASS**

Field Strength of Spurious Emissions						
Quasi-Peak						
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @ 3m	Factor	Strength	@ 3m		Polarity
MHz	dB $\mu$ V	dB/m	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m	
33.1	18.5	16.8	35.3	40.0	-4.7	Vertical
75.8	31.3	7.4	38.7	40.0	-1.3	Vertical
41.8	27.1	12.0	39.1	40.0	-0.9	Vertical
84.6	22.9	7.7	30.6	40.0	-9.4	Vertical
208.6	3.9	12.2	16.1	43.5	-27.4	Vertical
302.3	5.0	15.5	20.5	46.0	-25.5	Vertical

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date : 2012-08-07

Page 14 of 50

No. : HM167758

### **Result of Bluetooth Communication mode – CH39 (1GHz – 26GHz): Pass**

<b>Field Strength of Spurious Emissions</b>						
<b>Peak Value</b>						
Frequency MHz	Measured Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB $\mu$ V/m	E-Field Polarity
2441.0	67.5	28.0	95.5	--	--	Horizontal
4882.0	8.2	33.0	41.2	74.0	-32.8	Horizontal
7323.1	4.9	37.2	42.1	74.0	-31.9	Horizontal

### **Result of Bluetooth Communication mode – CH40 (1GHz – 26GHz): Pass**

<b>Field Strength of Spurious Emissions</b>						
<b>Average Value</b>						
Frequency MHz	Measured Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB $\mu$ V/m	E-Field Polarity
2441.0	47.5	28.0	75.5	--	--	Horizontal
4882.0	5.1	33.0	38.1	54.0	-15.9	Horizontal
7323.1	1.5	37.2	38.7	54.0	-15.3	Horizontal

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date : 2012-08-07

Page 15 of 50

No. : HM167758

### **Result of Bluetooth Communication mode – CH79 (9kHz – 30MHz): Pass**

Field Strength of Spurious Emissions						
Average Value						
Frequency	Measured	Correction	Field	Field	Limit	E-Field
	Level	Factor	Strength	Strength		Polarity
MHz	dB $\mu$ V	dB/m	dB $\mu$ V/m	$\mu$ V/m	$\mu$ V/m	
<b>Emissions detected are more than 20 dB below the FCC Limits</b>						

### **Results of Bluetooth Communication mode – CH79 (30MHz – 1000MHz): PASS**

Field Strength of Spurious Emissions						
Quasi-Peak						
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @ 3m	Factor	Strength	@ 3m		Polarity
MHz	dB $\mu$ V	dB/m	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m	
33.1	18.5	16.8	35.3	40.0	-4.7	Vertical
75.8	31.3	7.4	38.7	40.0	-1.3	Vertical
41.8	27.1	12.0	39.1	40.0	-0.9	Vertical
84.6	22.9	7.7	30.6	40.0	-9.4	Vertical
208.6	3.9	12.2	16.1	43.5	-27.4	Vertical
302.3	5.0	15.5	20.5	46.0	-25.5	Vertical

### **The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)



## STC Test Report

Date : 2012-08-07

Page 16 of 50

No. : HM167758

### Result of Bluetooth Communication mode – CH79 (1GHz – 26GHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency MHz	Measured Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB $\mu$ V/m	E-Field Polarity
2480.0	66.9	28.0	94.9	--	--	Horizontal
4960.1	8.4	33.1	41.5	74.0	-32.5	Horizontal
7440.3	4.7	37.2	41.9	74.0	-32.1	Horizontal

### Result of Bluetooth Communication mode – CH79 (1GHz – 26GHz): Pass

Field Strength of Spurious Emissions						
Average Value						
Frequency MHz	Measured Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Limit @3m dB $\mu$ V/m	Margin dB $\mu$ V/m	E-Field Polarity
2480.0	46.9	28.0	74.9	--	--	Horizontal
4960.1	5.2	33.1	38.3	54.0	-15.7	Horizontal
7440.3	1.5	37.2	38.7	54.0	-15.3	Horizontal

#### Remarks:

\* Denotes restricted band of operation.

Measurements were made using a peak detector. Any emission less than 1000MHz and falling within the restricted bands of FCC Rules Part 15 Section 15.205 and the limits of FCC Rules Part 15 Section 15.209 were applied.

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty	:	30MHz to 1GHz	5.1dB
		1GHz to 18GHz	5.1dB

### The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org





## STC Test Report

Date : 2012-08-07

Page 17 of 50

No. : HM167758

### Result of Band-edge measurement:

#### Bluetooth Communication mode (GFSK mode) (out of band measurement):

Field Strength of Spurious Emissions						
Peak Value						
Frequency	Measured Level	Correction Factor	Field Strength	Field Strength	Limit	E-Field Polarity
MHz	dB $\mu$ V	dB/m	dB $\mu$ V/m	$\mu$ V/m	$\mu$ V/m	
2390.00	15.1	28.0	43.1	142.9	5,000.0	Horizontal
2495.00	10.7	28.0	38.7	86.1	5,000.0	Horizontal

Field Strength of Spurious Emissions						
Average Value						
Frequency	Measured Level	Correction Factor	Field Strength	Field Strength	Limit	E-Field Polarity
MHz	dB $\mu$ V	dB/m	dB $\mu$ V/m	$\mu$ V/m	$\mu$ V/m	
2390.00	3.7	28.0	31.7	38.5	500.0	Horizontal
2495.00	3.4	28.0	31.4	37.2	500.0	Horizontal

#### Bluetooth Communication mode ( $\pi/4$ -DQPSK mode) (out of band measurement):

Field Strength of Spurious Emissions						
Peak Value						
Frequency	Measured Level	Correction Factor	Field Strength	Field Strength	Limit	E-Field Polarity
MHz	dB $\mu$ V	dB/m	dB $\mu$ V/m	$\mu$ V/m	$\mu$ V/m	
2390.00	14.1	28.0	42.1	127.4	5,000.0	Horizontal
2495.00	10.4	28.0	38.4	83.2	5,000.0	Horizontal

Field Strength of Spurious Emissions						
Average Value						
Frequency	Measured Level	Correction Factor	Field Strength	Field Strength	Limit	E-Field Polarity
MHz	dB $\mu$ V	dB/m	dB $\mu$ V/m	$\mu$ V/m	$\mu$ V/m	
2390.00	3.3	28.0	31.3	36.7	500.0	Horizontal
2495.00	3.1	28.0	31.1	35.9	500.0	Horizontal

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date : 2012-08-07

Page 18 of 50

No. : HM167758

### **Bluetooth Communication mode (8DPSK mode) (out of band measurement):**

Field Strength of Spurious Emissions						
Peak Value						
Frequency	Measured Level	Correction Factor	Field Strength	Field Strength	Limit	E-Field Polarity
MHz	dB $\mu$ V	dB/m	dB $\mu$ V/m	$\mu$ V/m	$\mu$ V/m	
2390.00	14.2	28.0	42.2	128.8	5,000.0	Horizontal
2495.00	10.1	28.0	38.1	80.4	5,000.0	Horizontal

Field Strength of Spurious Emissions						
Average Value						
Frequency	Measured Level	Correction Factor	Field Strength	Field Strength	Limit	E-Field Polarity
MHz	dB $\mu$ V	dB/m	dB $\mu$ V/m	$\mu$ V/m	$\mu$ V/m	
2390.00	3.1	28.0	31.1	35.9	500.0	Horizontal
2495.00	2.9	28.0	30.9	35.1	500.0	Horizontal

#### Remarks:

- \* Denotes restricted band of operation.  
Measurements were made using a peak detector. Any emission less than 1000MHz and falling within the restricted bands of FCC Rules Part 15 Section 15.205 and the limits of FCC Rules Part 15 Section 15.209 were applied.

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz 5.1dB  
1GHz to 18GHz 5.1dB

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date : 2012-08-07

Page 19 of 50

No. : HM167758

### Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

Frequency Range [MHz]	Quasi-Peak Limits [ $\mu$ V/m]
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

### Result of Aux in connected to iPod with charging function (9kHz – 30MHz): Pass

Emissions detected are more than 20 dB below the limit line(s)

### Result of Aux in connected to iPod with charging function (30MHz – 1GHz): Pass

Field Strength of Spurious Emissions						
Quasi-Peak						
Frequency	Measured Level @ 3m	Correction Factor	Field Strength	Limit @ 3m	Margin	E-Field Polarity
MHz	dB $\mu$ V	dB/m	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m	
31.8	19.3	17.3	36.6	40.0	-3.4	Vertical
45.6	16.8	10.1	26.9	40.0	-13.1	Vertical
69.6	22.6	7.5	30.1	40.0	-9.9	Vertical
84.6	20.9	7.7	28.6	43.5	-14.9	Vertical
312.0	20.1	16.3	36.4	46.0	-9.6	Horizontal
684.0	10.1	24.5	34.6	46.0	-11.4	Horizontal

### Result of Aux in connected to iPod with charging function (1GHz – 26GHz): Pass

Emissions detected are more than 20 dB below the limit line(s)

#### Remarks:

\* Denotes restricted band of operation.

Measurements were made using a peak detector. Any emission less than 1000MHz and falling within the restricted bands of FCC Rules Part 15 Section 15.205 and the limits of FCC Rules Part 15 Section 15.209 were applied.

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz 5.1dB

1GHz to 18GHz 5.1dB

### The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



## STC Test Report

Date : 2012-08-07

Page 20 of 50

No. : HM167758


### 3.1.3 Conducted Emissions (0.15MHz to 30MHz)

Test Requirement:	FCC 47CFR 15.207
Test Method:	ANSI C63.4:2009
Test Date:	2012-07-25
Mode of Operation:	Bluetooth Communication Mode / Aux-in mode connected to iPod with charging function (Charging up iPod)
Test Voltage:	117V a.c., 60Hz

#### Test Method:

The test was performed in accordance with ANSI C63.4: 2009, with the following: an initial measurement was performed in peak and average detection mode on the live line, any emissions recorded within 30dB of the relevant limit line were re-measured using quasi-peak and average detection on the live and neutral lines with the worst case recorded in the table of results.

#### Test Setup:

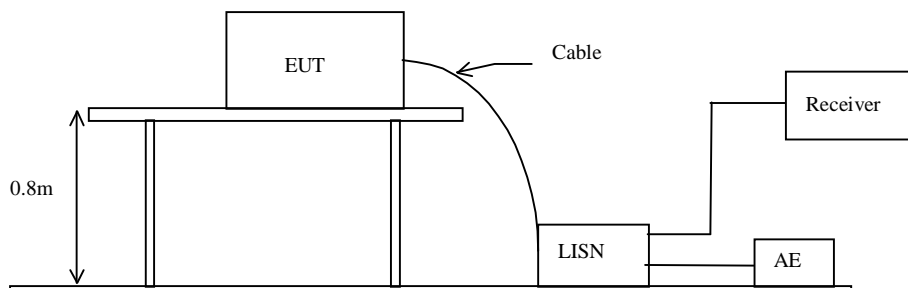

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date : 2012-08-07

Page 21 of 50

No. : HM167758

### Limit for Conducted Emissions (FCC 47 CFR 15.207):


Frequency Range [MHz]	Quasi-Peak Limits [dB $\mu$ V]	Average [dB $\mu$ V]
0.15-0.5	66 to 56*	56 to 46*
0.5-5.0	56	46
5.0-30.0	60	50

\* Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

### Results of Bluetooth Communication Mode: Pass

Please refer to the following diagram for individual results.

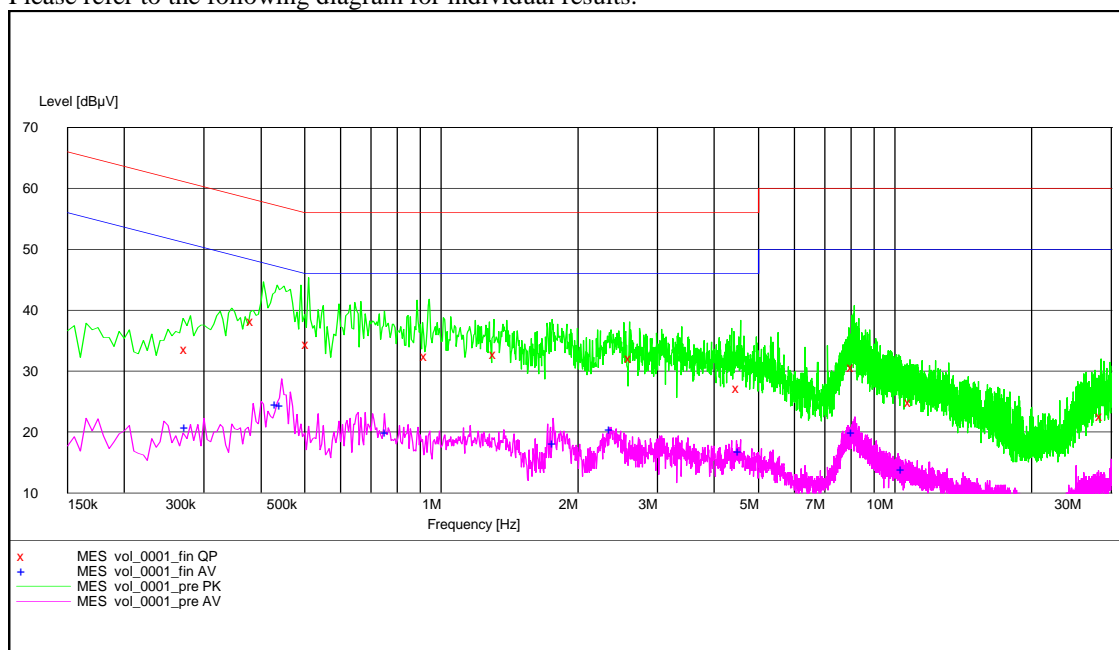

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date : 2012-08-07

Page 22 of 50

No. : HM167758

### Results of Bluetooth Communication Mode: Pass

Conductor	Frequency	Quasi-peak		Average	
		Level	Limit	Level	Limit
Live or Neutral	MHz	dB $\mu$ V	dB $\mu$ V	dB $\mu$ V	dB $\mu$ V
Live	0.275	33.6	61.0	*-	*-
Live	0.510	34.5	56.0	*-	*-
Live	0.760	*-	*-	20.0	46.0
Live	1.775	*-	*-	18.2	46.0
Live	2.375	*-	*-	20.4	46.0
Live	2.620	32.1	56.0	*-	*-
Live	4.530	27.2	56.0	*-	*-
Live	4.550	*-	*-	16.9	46.0
Live	8.110	30.6	60.0	*-	*-
Live	8.115	*-	*-	20.0	50.0
Neutral	0.275	*-	*-	20.9	51.0
Neutral	0.385	38.2	58.0	*-	*-
Neutral	0.435	*-	*-	24.7	47.0
Neutral	0.445	*-	*-	24.4	47.0
Neutral	0.930	32.5	56.0	*-	*-
Neutral	1.320	32.8	56.0	*-	*-
Neutral	10.440	*-	*-	14.0	50.0
Neutral	10.845	24.9	60.0	*-	*-
Neutral	28.655	22.6	60.0	*-	*-

#### Remarks:

Calculated measurement uncertainty : 3.97dB

\*- Emission(s) that is far below the corresponding limit line.

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date : 2012-08-07

Page 23 of 50

No. : HM167758

### Limit for Conducted Emissions (FCC 47 CFR 15.207):


Frequency Range [MHz]	Quasi-Peak Limits [dB $\mu$ V]	Average [dB $\mu$ V]
0.15-0.5	66 to 56*	56 to 46*
0.5-5.0	56	46
5.0-30.0	60	50

\* Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

### Results of Aux-in mode connected to iPod with charging function (Charging up iPod): Pass

Please refer to the following diagram for individual results.

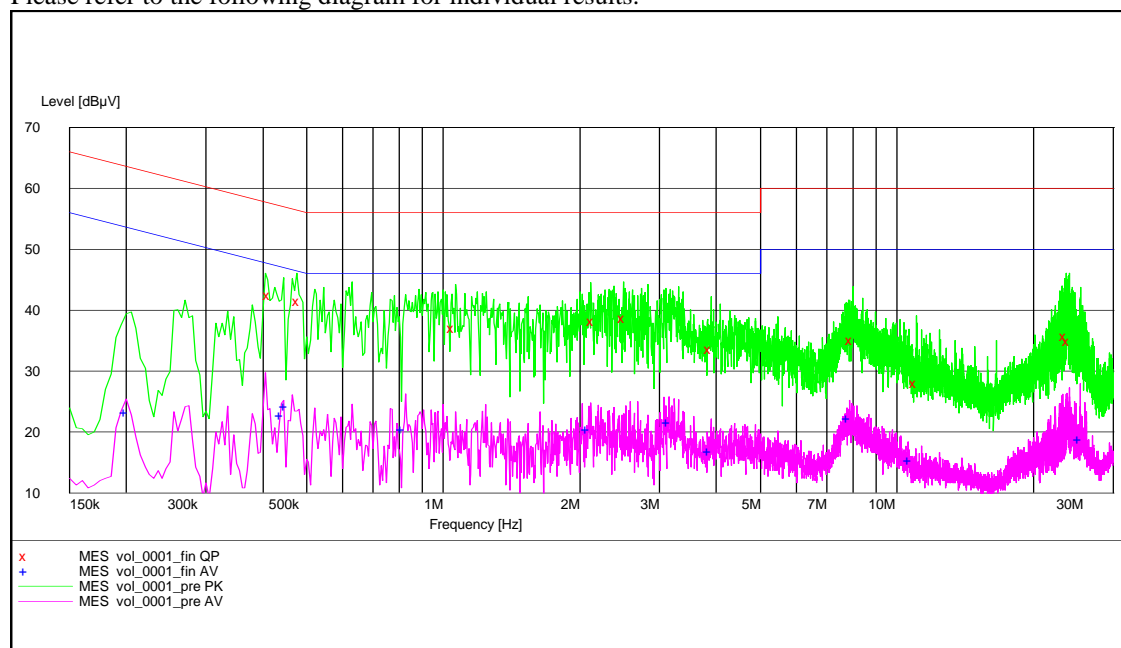

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date : 2012-08-07

Page 24 of 50

No. : HM167758

### Results of Aux-in mode connected to iPod with charging function (Charging up iPod): Pass

Conductor	Frequency	Quasi-peak		Average	
		Level	Limit	Level	Limit
Live or Neutral	MHz	dB $\mu$ V	dB $\mu$ V	dB $\mu$ V	dB $\mu$ V
Live	0.415	42.5	58.0	*-	*-
Live	3.865	*-	*-	16.9	46.0
Live	3.890	33.7	56.0	*-	*-
Live	11.015	28.1	60.0	*-	*-
Live	23.925	35.0	60.0	*-	*-
Neutral	0.200	*-	*-	23.4	54.0
Neutral	0.440	*-	*-	22.8	47.0
Neutral	0.450	*-	*-	24.3	47.0
Neutral	0.480	41.5	56.0	*-	*-
Neutral	0.815	*-	*-	20.4	46.0
Neutral	1.055	37.0	56.0	*-	*-
Neutral	2.085	*-	*-	20.5	46.0
Neutral	2.145	38.2	56.0	*-	*-
Neutral	2.505	38.7	56.0	*-	*-
Neutral	3.135	*-	*-	21.6	46.0
Neutral	7.815	*-	*-	22.3	50.0
Neutral	7.965	35.1	60.0	*-	*-
Neutral	10.660	*-	*-	15.4	50.0
Neutral	23.635	35.8	60.0	*-	*-
Neutral	25.300	*-	*-	18.8	50.0

#### Remarks:

Calculated measurement uncertainty : 3.97dB

\*- Emission(s) that is far below the corresponding limit line.

### **The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)





## STC Test Report

Date : 2012-08-07

Page 25 of 50

No. : HM167758

### **3.1.4 20dB Bandwidth Measurement**

Test Requirement:	FCC 47CFR 15.247(a)(1)
Test Method:	ANSI C63.4:2009
Test Date:	2012-08-07
Mode of Operation:	Communication Mode (8DPSK)

#### **Remark:**

The result has been done on all the possible configurations for searching the worst cases.

#### **Test Method:**

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

#### **Test Setup:**

As Test Setup of clause 3.1.1 in this test report.

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report


Date : 2012-08-07

Page 26 of 50

No. : HM167758

Fundamental Frequency [MHz]	20dB Bandwidth [MHz]	FCC Limits [MHz]
2402	1.38	Within 2400-2483.5

### (Lowest Operating Frequency)

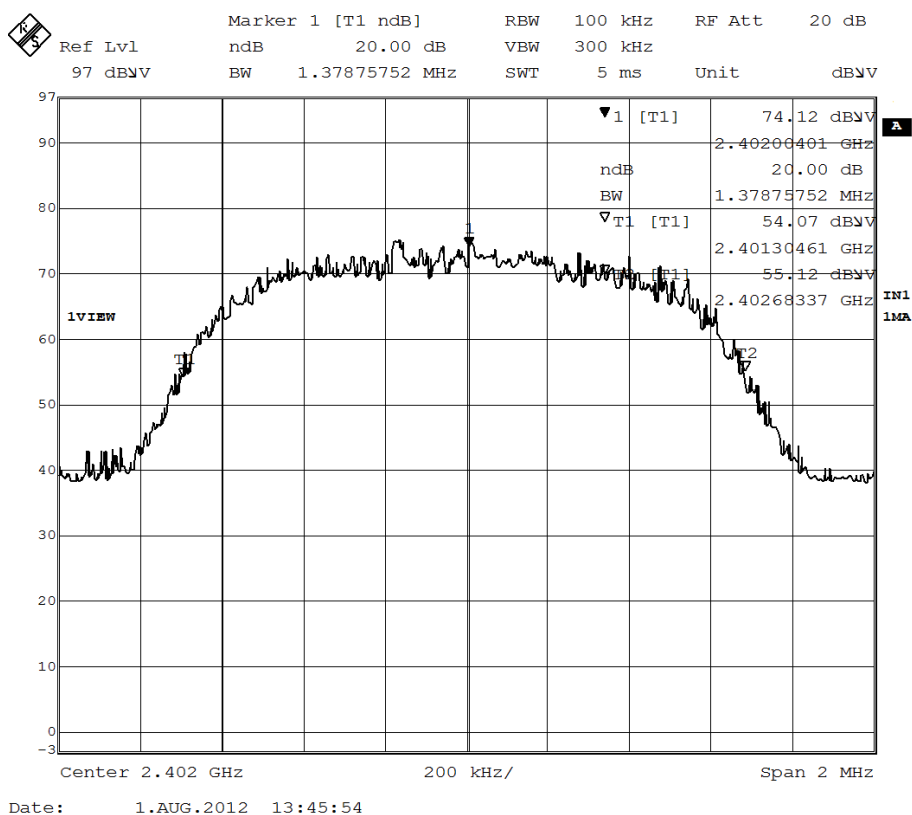

### The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong  
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date : 2012-08-07


Page 27 of 50

No. : HM167758

Fundamental Frequency [MHz]	20dB Bandwidth [MHz]	FCC Limits [MHz]
2441	1.38	Within 2400-2483.5

### (Middle Operating Frequency)

Marker 1 [T1 ndB] RBW 100 kHz RF Att 20 dB  
Ref Lvl ndB 20.00 dB VBW 300 kHz  
97 dBV BW 1.38276553 MHz SWT 5 ms Unit dBV

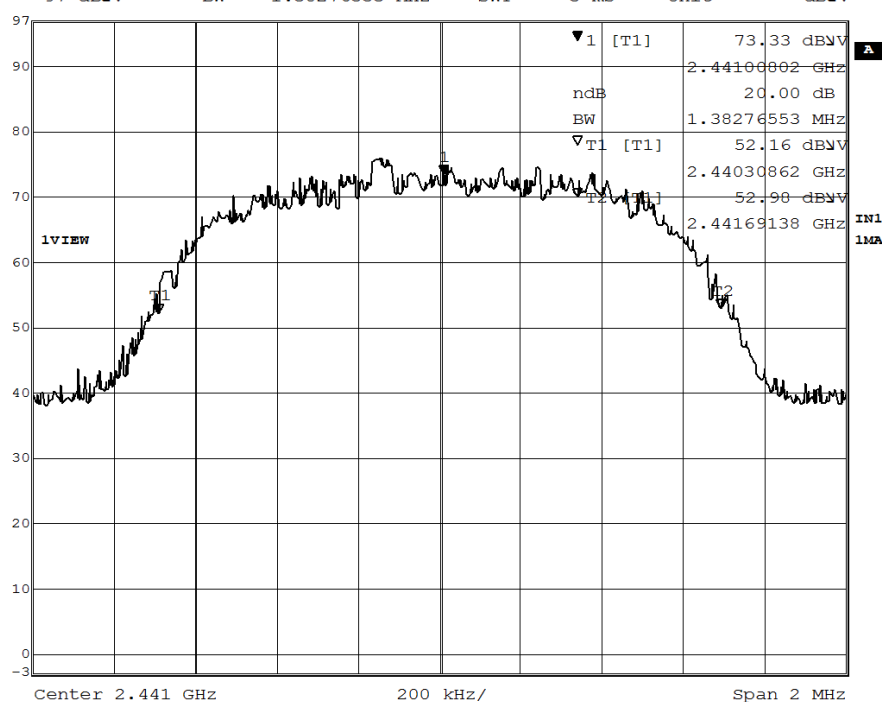

Date: 1.AUG.2012 13:40:00

### The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date : 2012-08-07

Page 28 of 50


No. : HM167758

Fundamental Frequency [MHz]	20dB Bandwidth [MHz]	FCC Limits [MHz]
2480	1.39	Within 2400-2483.5

### (Highest Operating Frequency)



Ref Lvl	Marker 1 [T1 ndB]	RBW	100 kHz	RF Att	20 dB	
97 dB $\mu$ V	ndB	20.00 dB	VBW	300 kHz		
	BW	1.39078156 MHz	SWT	5 ms	Unit	dB $\mu$ V

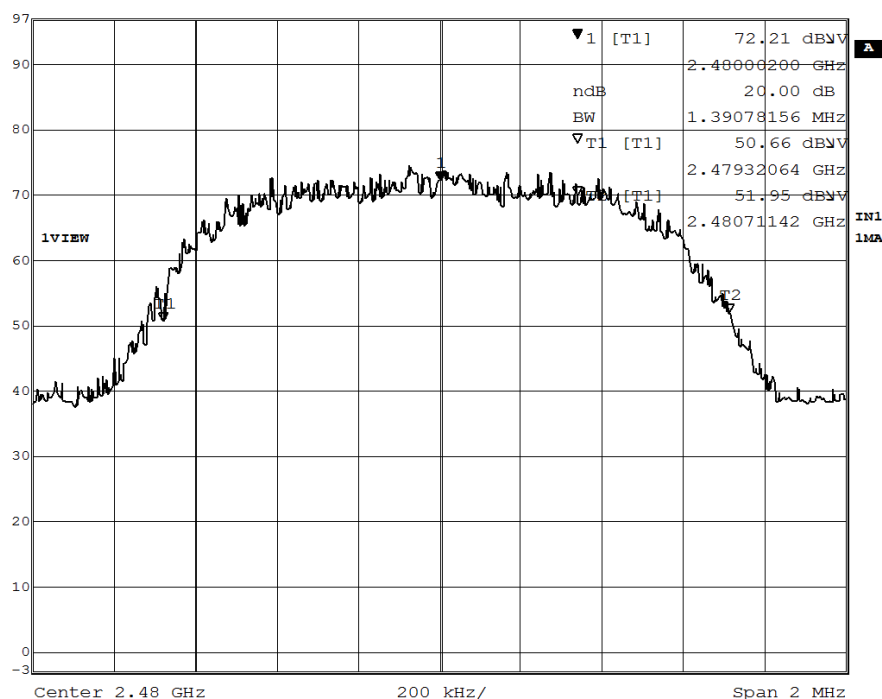

Date: 1.AUG.2012 13:35:14

### The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date : 2012-08-07

Page 29 of 50

No. : HM167758

### **Channel Centre Frequency**

#### **Requirements:**

Frequency hopping system in the 2400-2483.5MHz band shall use at least 79 (Channel 0 to 78) non-overlapping channels.

The EUT operates in according with the Bluetooth system specification within the 2400 - 2483.5 MHz frequency band.

RF channels for Bluetooth systems are spaced 1 MHz and are ordered in channel number k. In order to comply with out-of-band regulations, a lower frequency guard band of 2.0 MHz and a higher frequency guard band of 3.5MHz is used.

The operating frequencies of each channel are as follows:

First RF channel start from 2400MHz + 2MHz guard band = 2402MHz

Frequency of RF Channel = 2402+k MHz, k = 0,...,78 (Channel separation = 1MHz)

### **Hopping Channel Separation**

#### **Requirements:**

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

#### **Limit:**

The maximum Bandwidth is 1.39MHz, so the minimum channel separation is  $1.39 \times (2/3) = 0.92\text{MHz}$

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report


Date : 2012-08-07

Page 30 of 50


No. : HM167758

Separation between = 1MHz (>0.92MHz)

### Channel 0 – Channel 1, Pass

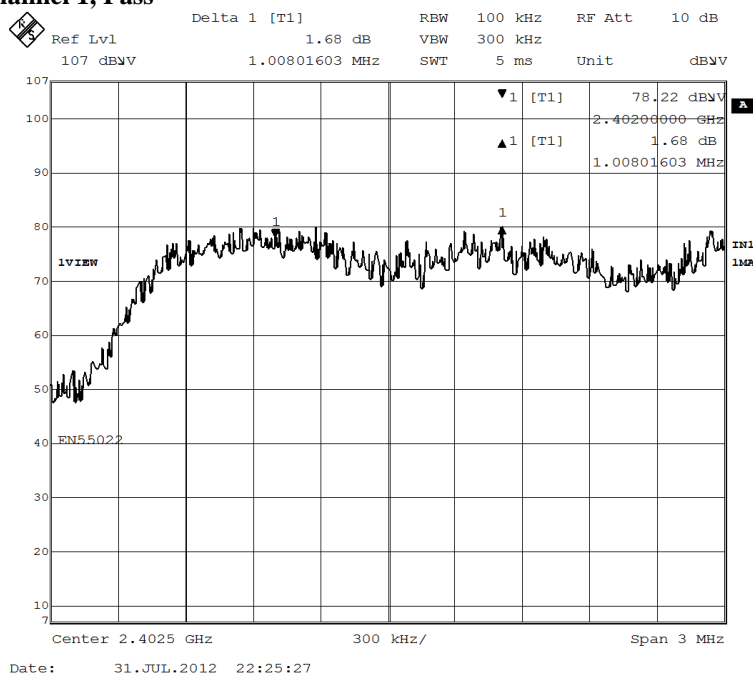

### Channel 39 – Channel 40, Pass

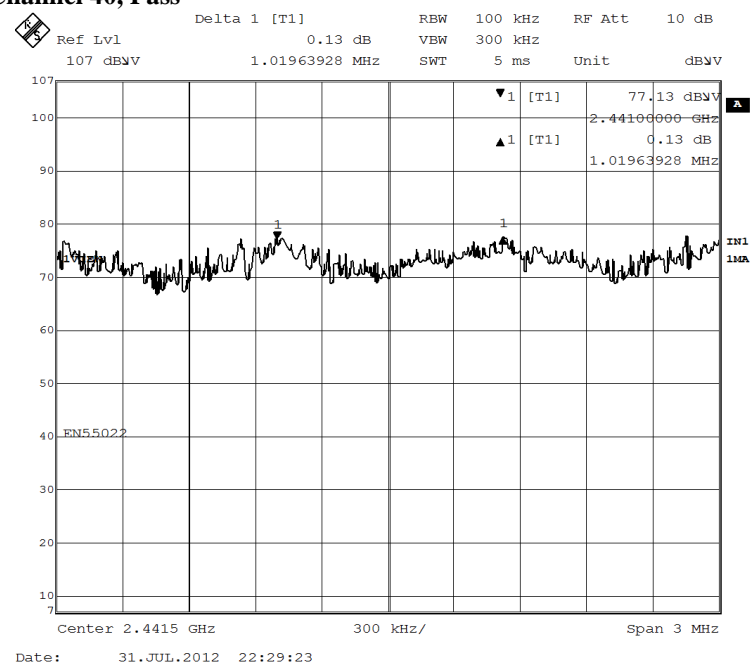

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage




## STC Test Report

Date : 2012-08-07

Page 31 of 50

No. : HM167758

### Channel 78 – Channel 79, Pass

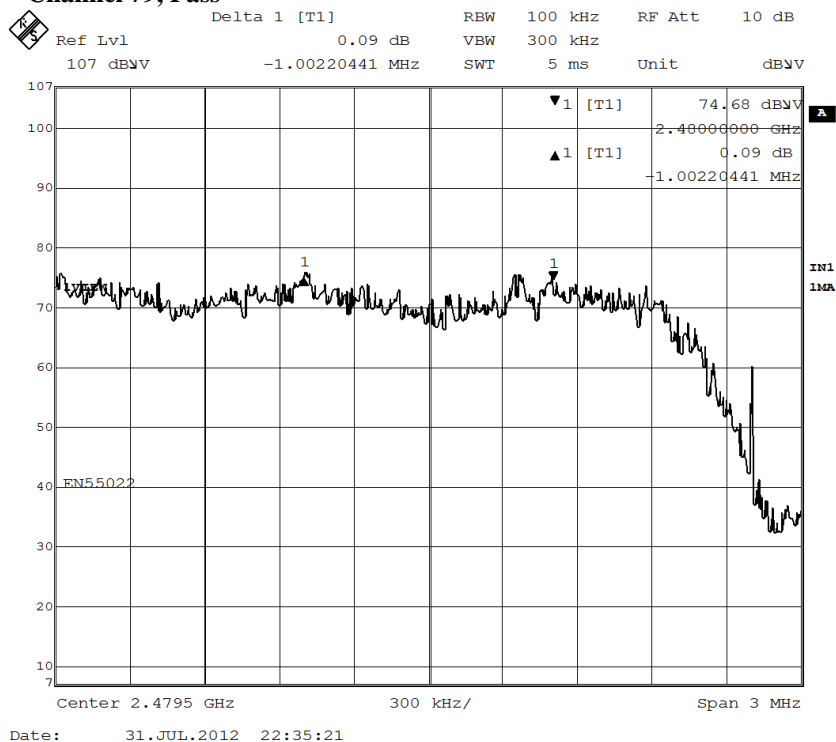

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage




## STC Test Report

Date : 2012-08-07

Page 32 of 50

No. : HM167758

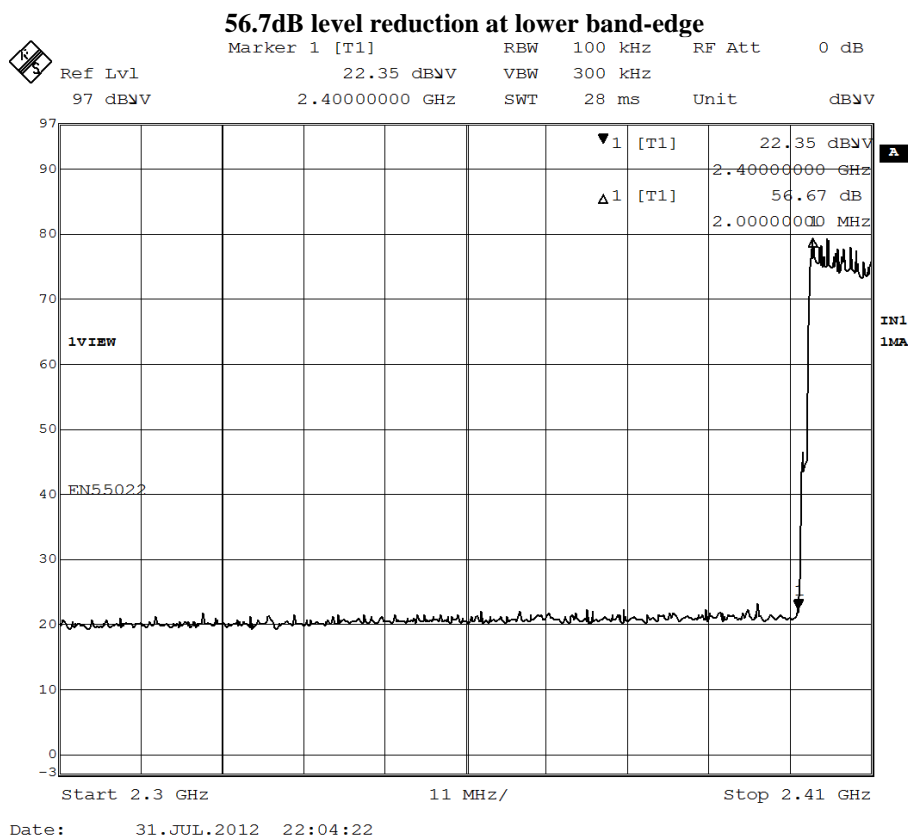

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage






## STC Test Report

Date : 2012-08-07

Page 33 of 50

No. : HM167758

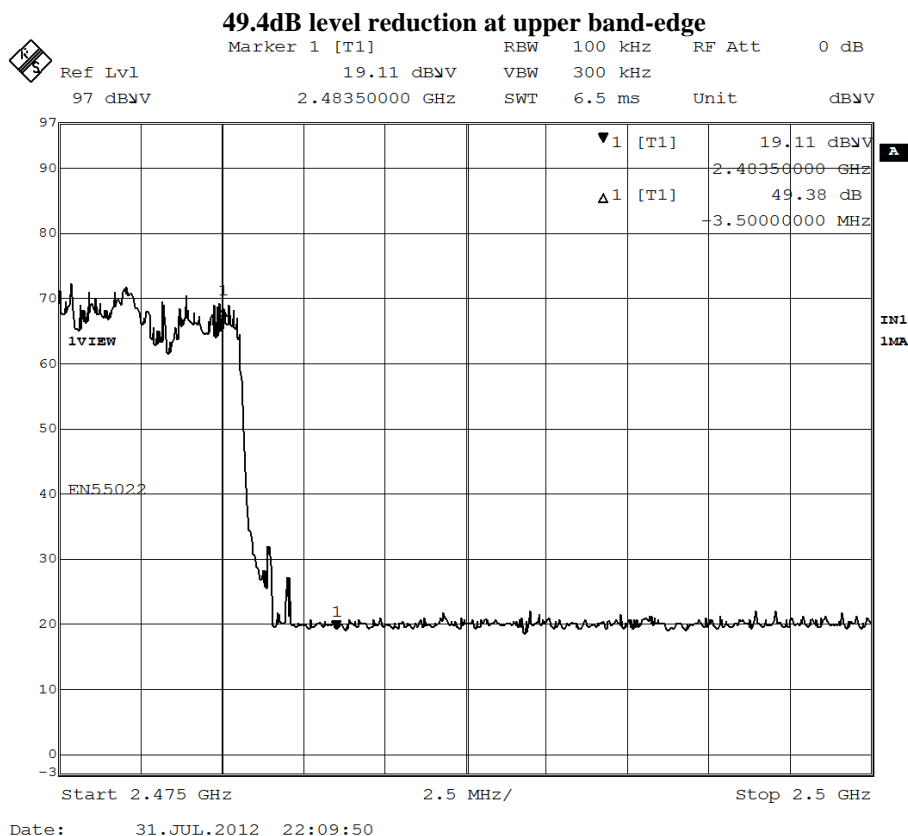

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## **STC Test Report**

Date : 2012-08-07

Page 34 of 50

No. : HM167758

### **Antenna Requirement**

#### **Test Requirements: § 15.203**

#### **Test Specification:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

#### **Test Results:**

The EUT has 1 [Inverted-F Antenna (PCB layout)] which is permanently attached to the main unit and attached on PCB board, the antenna gain = 2.12dBi. All component install on inside of EUT. User unable to remove or changed the Antenna.

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## **STC Test Report**

Date : 2012-08-07

Page 35 of 50

No. : HM167758

### **Pseudorandom Hopping Algorithm**

#### **Requirements:**

The channel frequencies shall be selected from a pseudorandom ordered list of hopping frequencies. Each frequency must be used equally by the transmitter.

### **EUT Pseudorandom Hopping Algorithm**

The EUT is a Bluetooth device, the Pseudo-random hopping pattern; hopping characteristics and algorithm are based on the Bluetooth specification.

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date : 2012-08-07

Page 36 of 50

No. : HM167758


### Occupancy Time

#### Requirements:

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channel employed.  
No requirements for Digital Transmission System.

#### Measurement Data:

##### Channel Occupied in 8DPSK: 79 of 79 Channel

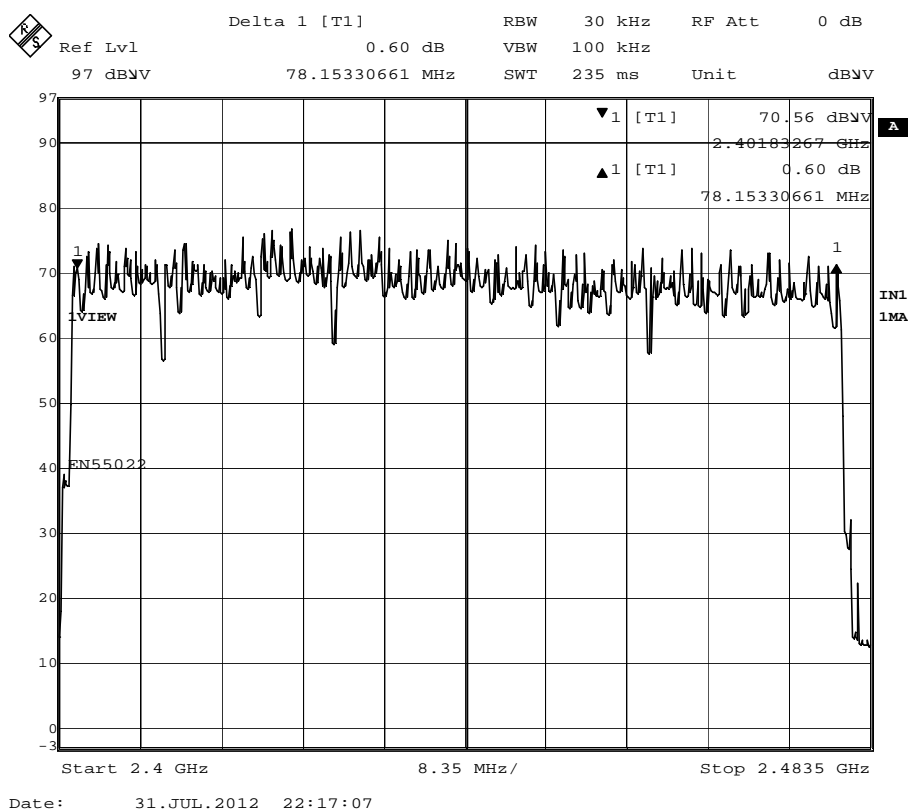

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date : 2012-08-07


Page 37 of 50

No. : HM167758

### DH5 Packet:

DH5 Packet permit maximum  $1600/79/6 = 3.37$  hops per second in each channel (5 time slots RX, 1 time slot TX). The Dwell time is the time duration of the pulse times  $3.37 \times 31.6 = 106.6$  within 31.6 seconds

**Fig. A**  
**[Pulse duration of Lowest Channel]**  
**Pulse duration = 2.846ms**

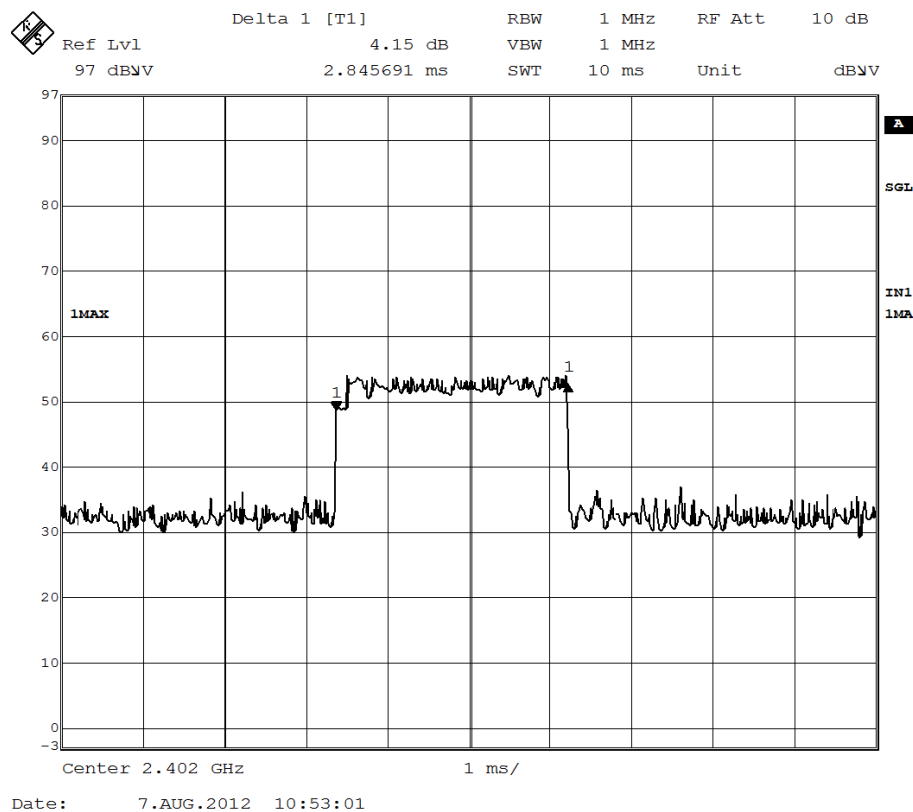

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage




## STC Test Report

Date : 2012-08-07

Page 38 of 50

No. : HM167758

**Fig. B**  
**[Pulse duration of Middle Channel]**  
**Pulse duration = 2.866ms**

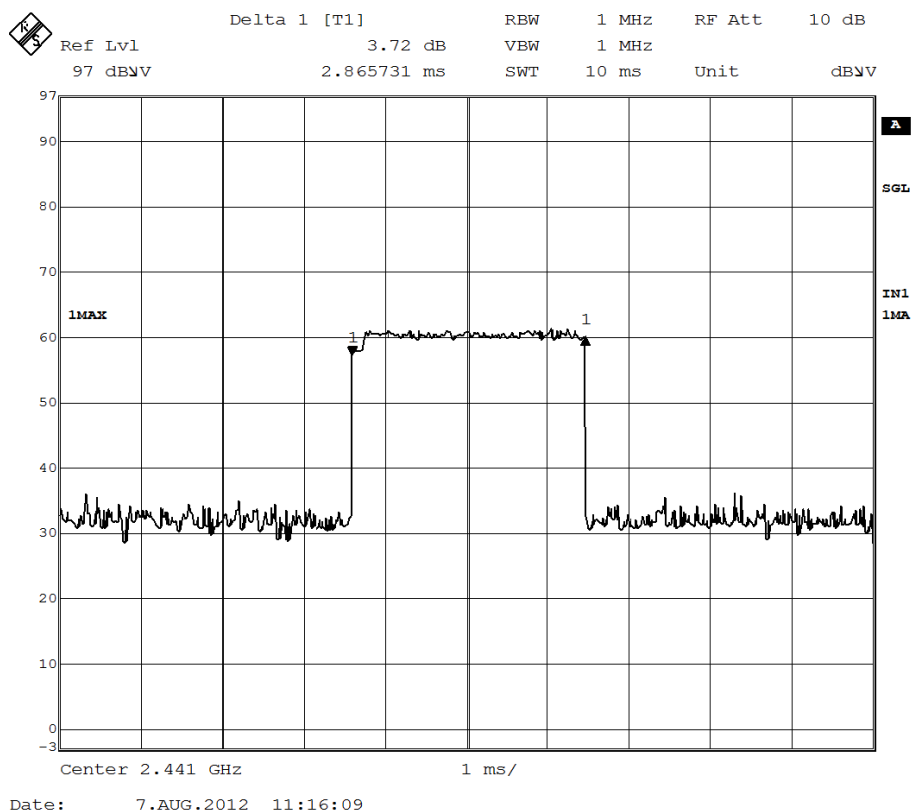

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage




## STC Test Report

Date : 2012-08-07

Page 39 of 50

No. : HM167758

**Fig. C**  
**[Pulse duration of Highest Channel]**  
**Pulse duration = 2.864ms**

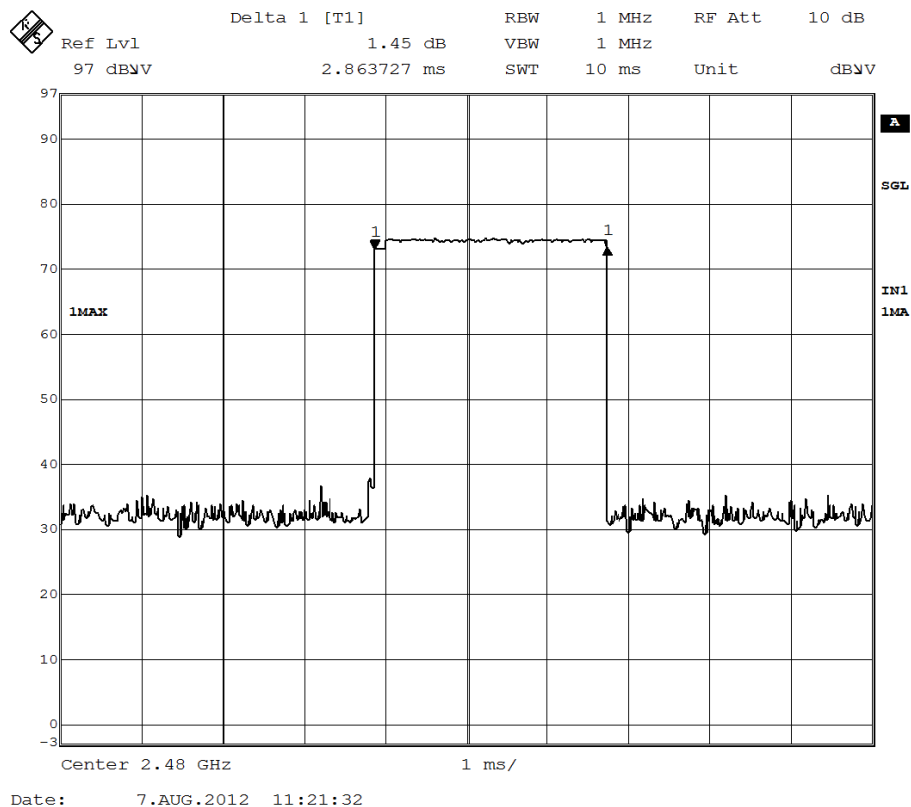

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date : 2012-08-07


Page 40 of 50

No. : HM167758

### DH3 Packet:

DH3 Packet permit maximum  $1600/79/4 = 5.06$  hops per second in each channel (3 time slots RX, 1 time slot TX). The Dwell time is the time duration of the pulse times  $5.06 \times 31.6 = 160$  within 31.6 seconds

**Fig. D**  
**[Pulse duration of Lowest Channel]**  
**Pulse duration = 1.663ms**

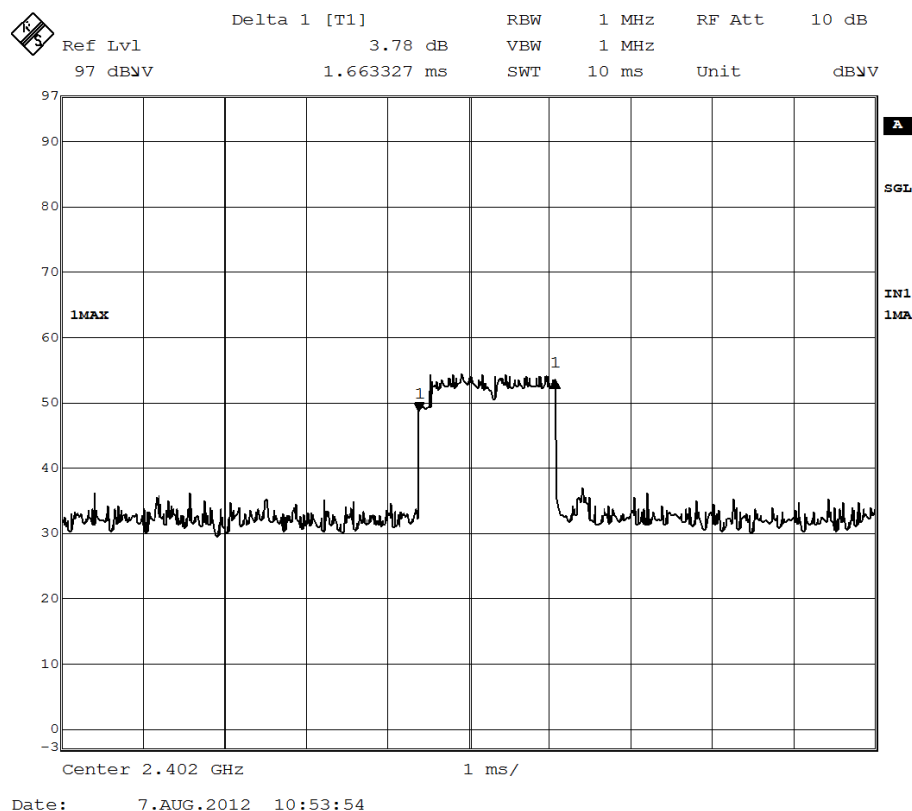

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage






## STC Test Report

Date : 2012-08-07

Page 41 of 50

No. : HM167758

**Fig. E**  
**[Pulse duration of Middle Channel]**  
**Pulse duration = 1.663ms**

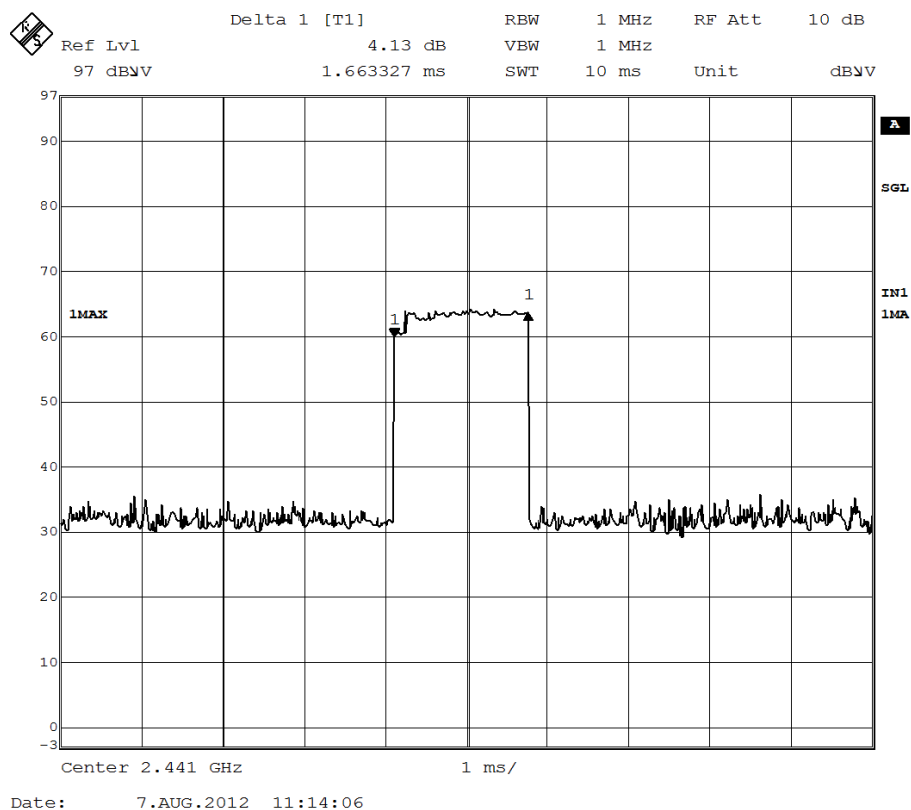

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage




## STC Test Report

Date : 2012-08-07

Page 42 of 50

No. : HM167758

**Fig. F**  
**[Pulse duration of Highest Channel]**  
**Pulse duration = 1.663ms**

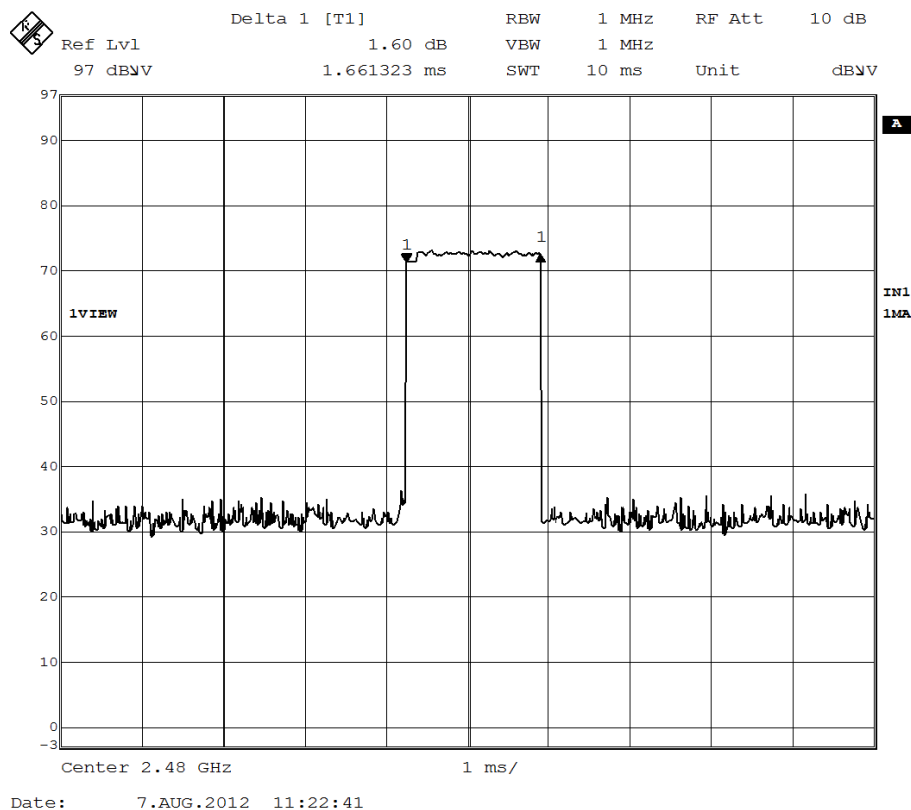

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date : 2012-08-07


Page 43 of 50

No. : HM167758

### **DH1 Packet:**

DH1 Packet permit maximum  $1600/79/2 = 10.12$  hops per second in each channel (3 time slots RX, 1 time slot TX). The Dwell time is the time duration of the pulse times  $10.12 \times 31.6 = 320$  within 31.6 seconds

**Fig. G**  
**[Pulse duration of Lowest Channel]**  
**Pulse duration = 0.431ms**

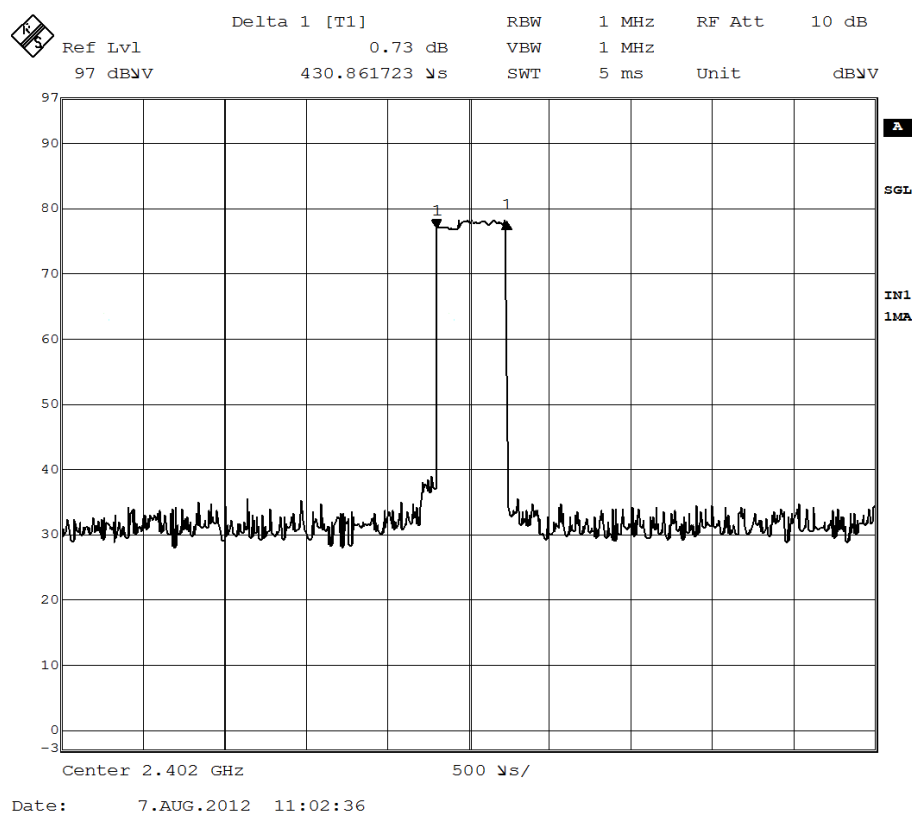

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage




## STC Test Report

Date : 2012-08-07

Page 44 of 50

No. : HM167758

**Fig. H**  
**[Pulse duration of Middle Channel]**  
**Pulse duration = 0.431ms**

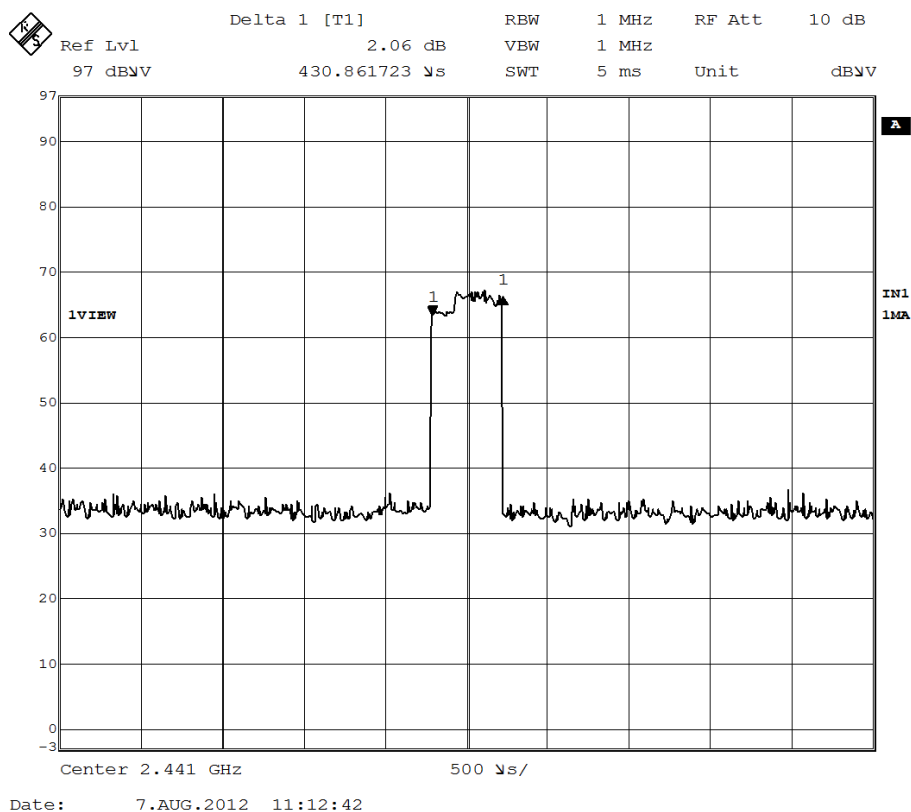

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage




## STC Test Report

Date : 2012-08-07

Page 45 of 50

No. : HM167758

**Fig. I**  
**[Pulse duration of Highest Channel]**  
**Pulse duration = 0.431ms**

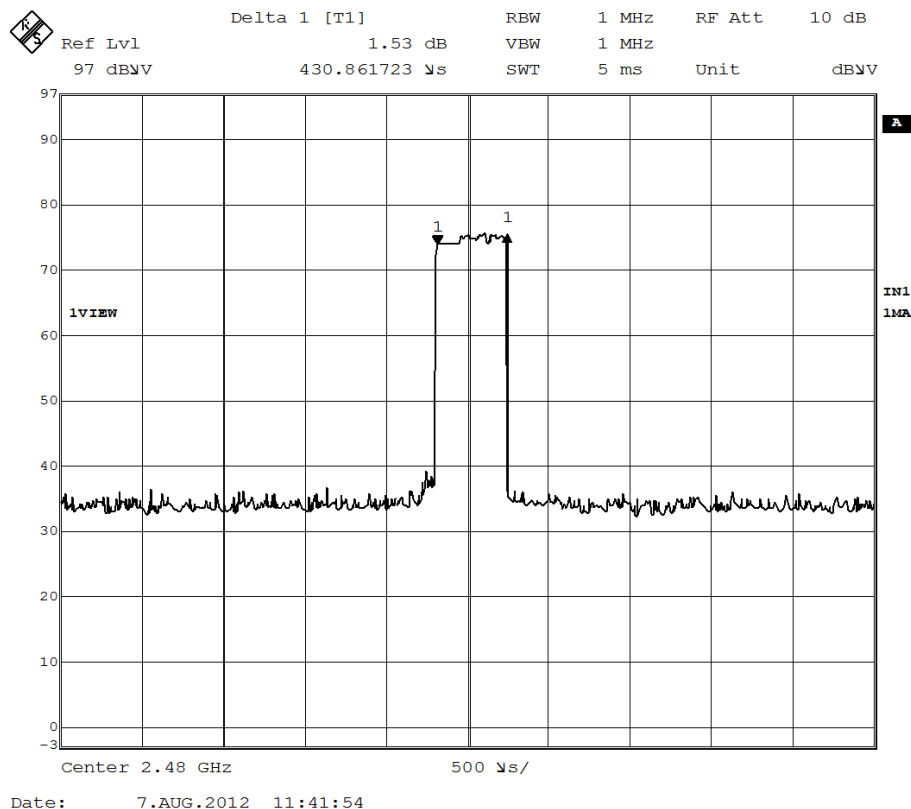

### Time of occupancy:

Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (s)	Limits (s)	Test Results
DH5	2402	2.846	0.303	0.400	Complies
DH5	2442	2.866	0.305	0.400	Complies
DH5	2480	2.864	0.305	0.400	Complies
DH3	2402	1.663	0.266	0.400	Complies
DH3	2442	1.663	0.266	0.400	Complies
DH3	2480	1.663	0.266	0.400	Complies
DH1	2402	0.431	0.138	0.400	Complies
DH1	2442	0.431	0.138	0.400	Complies
DH1	2480	0.431	0.138	0.400	Complies

### The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)



## STC Test Report

Date : 2012-08-07

Page 46 of 50

No. : HM167758

### Appendix A

#### List of Measurement Equipment

##### Radiated Emission

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EM276	Broadband Horn Antenna	A-INFOMW	JXTXLB-10180-SF	J2031090903007	2010/08/21	2013/08/21
EM215	MULTIDEVICE CONTROLLER	EMCO	2090	00024676	N/A	N/A
EM216	MINI MAST SYSTEM	EMCO	2075	00026842	N/A	N/A
EM217	ELECTRIC POWERED TURNTABLE	EMCO	2088	00029144	N/A	N/A
EM218	ANECHOIC CHAMBER	ETS-Linggren	FACT-3	--	2011/10/25	2012/10/25
EM219	BICONILOG ANTENNA	EMCO	3142C	00029071	2011/03/01	2013/03/01
EM229	EMI Test Receiver	R&S	ESIB40	100248	2012/05/03	2013/05/03
EM022	LOOP ANTENNA	EMCO	6502	1189-2424	2010/09/07	2012/09/07
EM293	MXA Signal Analyzer	Agilent Technologies	MY50510152	N/A	2011/11/10	2012/11/10

##### Line Conducted

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EM197	LISN	EMCO	4825/2	1193	2012/05/16	2013/05/16
EM181	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESIB7	100072	2012/05/03	2013/05/03
EM179	IMPULSE LIMITER	ROHDE & SCHWARZ	ESH3-Z2	357-8810.52/54	2012/01/27	2013/01/27
EM154	SHIELDING ROOM	SIEMENS MATSUSHITA COMPONENTS	N/A	803-740-057-99A	2012/01/27	2013/01/27

### Appendix B

#### Ancillary Equipment

ITEM NO.	DESCRIPTION	MODEL NO.	FCC ID	REMARK
1	iPod	A1137	N/A	Serial No. 5U603KHUSZB Rating: 5-30Vd.c. 1A Max.

Remarks:-

CM Corrective Maintenance  
N/A Not Applicable or Not Available  
TBD To Be Determined

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date : 2012-08-07

Page 47 of 50

No. : HM167758

### Appendix C

#### Photographs of EUT


**Front View of the product**




**Rear View of the product**



**Inner Circuit Top View**

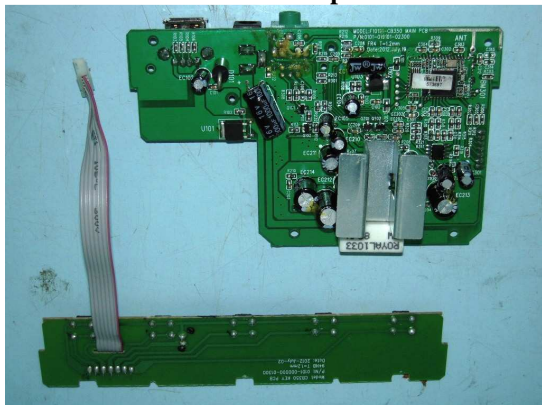

**Inner Circuit Bottom View**

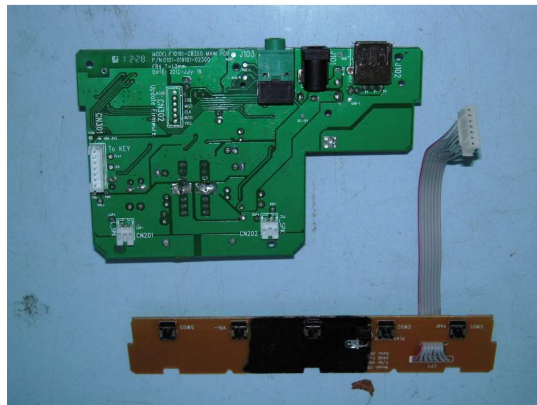

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## **STC Test Report**

Date : 2012-08-07

Page 48 of 50

No. : HM167758

### **Photographs of EUT**

**Measurement of Radiated Emission Test Set Up [Aux mode]**



**Measurement of Radiated Emission Test Set Up [communication mode]**



**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage





## STC Test Report


Date : 2012-08-07

Page 49 of 50

No. : HM167758

### **Photographs of EUT**

**Measurement of Conducted Emission Test Set Up [Aux mode]**

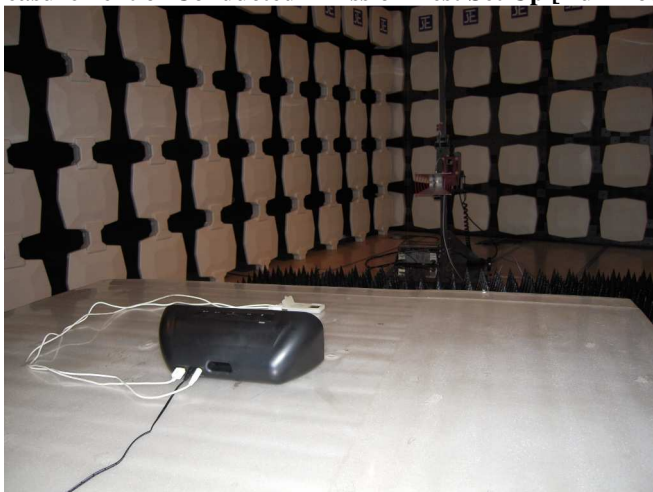

**Measurement of Radiated Emission Test Set Up [communication mode]**



**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date : 2012-08-07

Page 50 of 50

No. : HM167758

### Measurement of Conducted Emission Test Set Up [Communication mode]



\*\*\*\*\* End of Test Report \*\*\*\*\*

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage